Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2414691 A1 2003/06/21

(21) 2 414 691

(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION

(13) A1

(22) Date de dépôt/Filing Date: 2002/12/18

(41) Mise à la disp. pub./Open to Public Insp.: 2003/06/21

(30) Priorités/Priorities: 2001/12/21 (60/342,786) US;
2002/12/17 (UNKNOWN) US


(51) Cl.Int.^{7}/Int.Cl.^{7} F04D 13/08

(71) Demandeur/Applicant:
SCHLUMBERGER CANADA LIMITED, CA

(72) Inventeurs/Inventors:
ARAUZ, GRIGORY L., US;
BUCHANAN, STEVEN E., US

(74) Agent: SMART & BIGGAR

(54) Titre : MOTEUR SCELLE POUR POMPE SUBMERSIBLE
(54) Title: SEALED ESP MOTOR SYSTEM

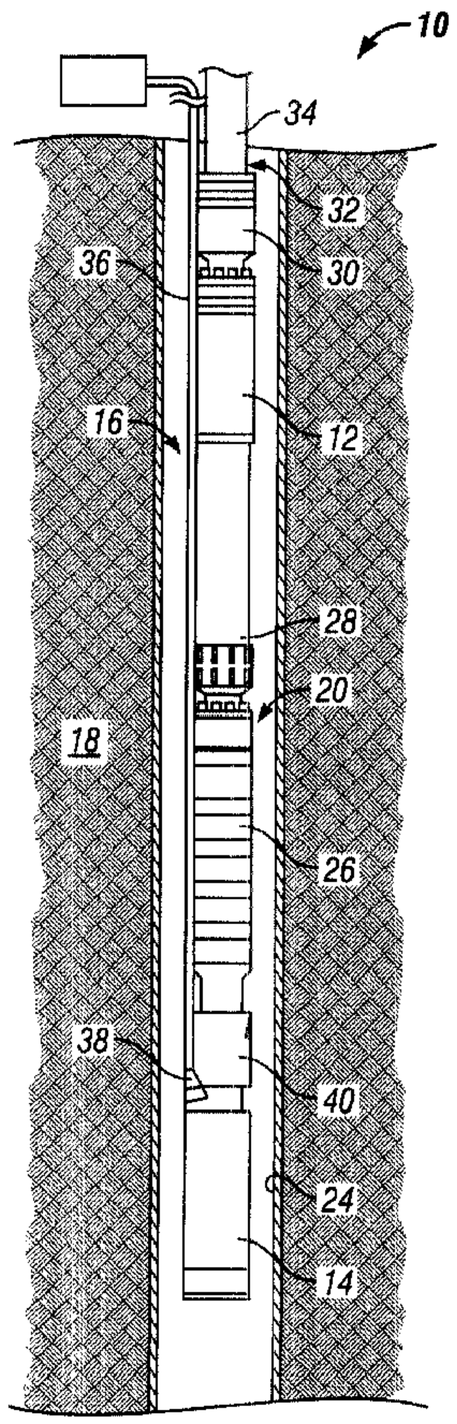

(57) Abrégé/Abstract:
The present invention provides a submersible motor and pump system for use in a wellbore. More specifically, the present invention provides a submersible system having a sealed motor and a magnetic coupling to transmit torque from the sealed motor to the pump.

ABSTRACT

The present invention provides a submersible motor and pump system for use in a wellbore. More specifically, the present invention provides a submersible system having a sealed motor and a magnetic coupling to transmit torque from the sealed motor to the pump.

SEALED ESP MOTOR SYSTEM

This application claims the benefit of U.S. Provisional Application No. 60/342,786 filed December 21, 2001.

FIELD OF THE INVENTION

The present invention relates generally to pumping systems utilized in raising fluids from wells, and particularly to a submersible pumping system having a sealed motor.

BACKGROUND OF THE INVENTION

In producing petroleum and other useful fluids from production wells, it is generally known to provide a submersible pumping system, such as an electric submersible pumping system (ESP), for raising the fluids collected in a well. Typically, production fluids enter a wellbore via perforations made in a well casing adjacent a production formation. Fluids contained in the formation collect in the wellbore and may be raised by the pumping system to a collection point above the earth's surface. The ESP systems can also be used to move the fluid from one zone to another.

An ESP system is generally comprised of a motor section, a pump section, and a protector. Current motor designs require

clean oil, not only to minimize magnetic losses, but also to provide appropriate lubrication in the hydrodynamic bearings that support the rotor. Contamination of the clean oil leads to short circuit which is one of the most common failure modes in electric motors used in ESP applications.

The protector of a typical ESP system provides an elaborate seal intended to maintain the clean oil environment separate from the well fluid. One end of the protector is open to the well bore, while the other end is connected to the interior of the motor. Existing protectors have the common purpose of forming a barrier between the motor oil and the well fluid. Circumstances such as thermal cycling, mechanical seal failures, wear, or scale can result in a malfunction of the protector. Such malfunction allows well fluid to reach the motor resulting in an electrical short circuit.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a front elevational view of a submersible pumping system positioned in a wellbore and having an embodiment of the sealed motor system of the present invention

FIG. 2 provides a side view of an embodiment of the magnetic coupling of the sealed motor system.

FIG. 3 provides an end view of an embodiment of the magnetic coupling of the sealed motor system.

FIG. 4 provides an end view of an embodiment of the magnetic coupling of the sealed motor system in which the permanent magnets are enclosed by a thin metal sleeve.

FIG. 5 provides a perspective view of an embodiment of the motor-side rotor and the pump-side rotor of the magnetic coupling in which the permanent magnets are enclosed by a thin metal sleeve.

FIG. 6 provides an illustration of an embodiment of the sealed motor allowing for the thermal expansion of the motor oil.

FIG. 7 provides an illustration of another embodiment of the sealed motor allowing for the thermal expansion of the motor oil.

FIG. 8 provides an illustration of another embodiment of the sealed motor allowing for the thermal expansion of the motor oil.

FIG. 9 provides an illustration of yet another embodiment of the sealed motor allowing for the thermal expansion of the motor oil.

FIG. 10 illustrates an embodiment of the magnetic coupling of the sealed motor system having a plurality of magnets mounted along the motor-side shaft.

FIG. 11 provides a schematic of one embodiment of an intermediate bearing support of the magnetic coupling of the sealed motor system.

FIG. 12 provides a schematic of another embodiment of an intermediate bearing support of the magnetic coupling of the sealed motor system.

FIG. 13 provides a schematic of another embodiment of an intermediate bearing support of the magnetic coupling of the sealed motor system.

FIG. 14 provides an illustration of an embodiment of the sealed motor system where the magnetic coupling is integral with the sealed motor and the protector.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Referring generally to FIG. 1, a submersible pumping system, such as an electric submersible pumping system (ESP), having an embodiment of the sealed motor system **10** of the present invention is illustrated. The submersible pumping system may comprise a variety of components depending on the particular application or environment in which it is used. The sealed motor system **10** used therein includes at least a submersible pump **12** and a submersible sealed motor **14**.

The submersible pumping system is designed for deployment in a well **16** within a geological formation **18** containing desirable production fluids, such as petroleum. In a typical application, a wellbore **20** is drilled and lined with a wellbore casing **24**. The submersible system is deployed within wellbore **20** to a desired location for pumping of wellbore fluids.

The sealed motor system **10** includes a variety of additional components. A protector **26** serves to transmit torque generated by the motor **16** to the submersible pump **12**. The protector **26** additionally includes thrust bearings designed to carry the thrust loads generated within the submersible pump **12**. The system **10** further includes a pump intake **28** through which wellbore fluids are drawn into the submersible pump **12**.

The submersible pumping system also includes a connector or discharge head **30** by which the submersible pumping system is connected to a deployment system **32**. The deployment system **32** may comprise a cable, coil tubing, or production tubing. In the illustrated embodiment, the deployment system **32** comprises production tubing **34** through which the wellbore fluids are pumped to another zone or to the surface of the earth. A power cable **36** is disposed along the deployment system **32** and routed to a bulkhead **38** within the housing of the sealed motor **14** to provide power thereto. In one embodiment, the bulkhead **38** is a glass sealed bulkhead.

In an embodiment of the sealed motor system **10** of the present invention, a magnetic coupling **40** is affixed between the sealed motor **14** and the protector **26**. The magnetic coupling **40** enables torque generated by the sealed motor **14** to be transmitted to the protector **26** and the pump **12** while maintaining the motor **14** in a separate, sealed housing. In other words, the magnetic coupling **40** removes the necessity of mechanical interaction between the motor shaft and the shaft of the protector **26** or the pump **12**. The torque generated by the sealed motor **14** is transmitted to the protector **26** and the pump **12** by magnetic fields acting through the sealed motor casing.

FIGS. 2 and 3 provide side and end views, respectively, of an embodiment of the magnetic coupling **40** of the sealed motor system **10**. The magnetic coupling **40** is generally comprised of a motor-side housing **42** and a pump-side housing **44**. The motor-side housing **42** is affixed to the motor housing **46** of the motor **14** such that the motor **14** remains sealed from the surrounding wellbore fluids. In one exemplary embodiment, the motor-side housing **42** is affixed to the motor housing **46** by welds **48**.

The motor-side housing **42** has a motor-side shaft **50** running therethrough. The motor-side shaft **50** is rotatably driven by the sealed motor **14**. In a typical embodiment, the motor-side shaft **50** is affixed to the motor shaft (not shown). Permanent magnets **52**, arranged in rings, are mounted to the motor-side shaft **50** by a motor-side rotor **54**. The permanent magnets **52** rotate along with the motor-side shaft **50**.

Affixed to the top end **56** of the motor-side housing **42** is a thin-walled shell **58**. The shell **58** covers the motor-side shaft **50** as well as the permanent magnets **52**, arranged in rings, affixed thereto. The thin-walled shell **58** is affixed to the motor-side housing **42** such that the motor **14** remains sealed. In one exemplary embodiment, the thin-walled shell **58** is affixed to the motor-side housing **42** by welds **60**.

In one embodiment, the thin-walled shell **58** is made of a high strength non-magnetic material such as Hastelloy or titanium. In other embodiments, to avoid high eddy current losses, the thin-walled shell **58** can be made of a non-conducting high performance composite material such as carbon-reinforced PEEK.

The pump-side housing **44** has a pump-side shaft **62** running therethrough. In a typical embodiment, the pump-side shaft **62** is affixed to the pump shaft (not shown). Affixed to the base of the pump-side shaft **62** is a pump-side rotor **64** that has permanent magnets **66** mounted thereto. Rotation of the pump-side rotor **64** results in rotation of the pump-side shaft **62** and consequentially the pump shaft.

In one embodiment, the permanent magnets **52, 66** are made from materials with a high density of magnetic energy such as neodymium iron-boron or samarium cobalt. The permanent magnets **52, 66** are closely aligned and the distance from the magnets **52, 66** to the shell **58** is small to reduce magnetic losses. FIGS. 4 and 5 illustrate an embodiment of the magnetic coupling **40** of the sealed motor system **10** in which the magnets **52, 66** can be enclosed by thin metal sleeves **53, 67** to provide mechanical protection and corrosion resistance. FIG. 4 provides a side view

and FIG. 5 provides a perspective view of the motor-side rotor **54** and the pump-side rotor **64** having the thin metal sleeves **53, 67**. The sleeves **53, 67** can be made of a thin non-magnetic material and will produce no Eddy current losses since there is no relative motion with respect to the magnets **52, 56**.

Referring back to FIG. 2, the permanent magnets **52** within the motor-side housing **42** along with the permanent magnets **66** in the pump-side housing **44** act to create a magnetic field that enables the synchronous transmission of the rotating motion from the motor-side shaft **50** to the pump-side shaft **62**.

As the motor-side shaft **50** is rotated by operation of the sealed motor **14**, the motor-side rotor **54** rotates along with the affixed permanent magnets **52**. Because the permanent magnets **52** of the motor-side rotor **54** are magnetically linked to the permanent magnets **66** of the pump-side rotor **64**, the pump-side rotor **64** is forced to rotate resulting in rotation of the pump-side shaft **62** and the affixed pump shaft. The magnetic field runs through the thin-walled shell **58**, eliminating any need for mechanical connection between the motor-side shaft **50** and the pump-side shaft **62**, enabling the motor **14** to remain completely sealed.

Because the magnetic coupling **40** is a non-contact coupling, the dynamics of the motor-side components and the pump-side components are isolated. In other words, dynamic or vibration problems existing in the sealed motor **14** are not transmitted to the pump **12**, and vice versa.

Although the magnetic coupling **40** does not require any specific fluid to operate, the presence of solids in the small gap **68** that exists between the thin-walled shell **58** and the pump-side rotor **64** can create additional friction compromising the power capability of the magnetic coupling **40**. Because the components of the magnetic coupling **40** that are located within the pump-side housing **44** are likely to be exposed to well fluid, a metallic knitted mesh **70**, or other screen, is provided as a means to stop solids from reaching the small gap **68** in the coupling.

It is understood that the above concern does not exist within the motor-side housing **42**. The motor-side housing **42** is filled with clean oil **72** and is sealed from exposure to the surrounding well fluids to avoid contamination. However, good circulation of the oil **72** may be required to remove heat from the coupling.

FIG. 6 provides an illustration of an embodiment of the sealed motor **14** of the sealed motor system **10** allowing for the thermal expansion of the motor oil **72**. As illustrated, such expansion is accommodated by the inclusion of a pressurized expansion chamber **74** affixed to the base **76** of the sealed motor **14**. A fluid channel **78** extends therethrough the base **76** to enable communication between the sealed motor **14** and the expansion chamber **74**.

Located within the expansion chamber **74**, is a flexible element **80**, such as an elastomeric bag, that is attached to the base **76** of the sealed motor **14**. The flexible element **80** is surrounded by pressurized gas **82** while its interior **84** is in communication with the motor oil **72** through the fluid channel **78**. In cold conditions, the pressure of the gas **82** keeps the flexible element **80** in its compressed state. When the temperature rises, the thermal expansion of the oil **72** overcomes the pressure of the gas **82** and the flexible element **80** expands.

Another embodiment of the sealed motor **14** of the sealed motor system **10** allowing for thermal expansion of the motor oil **72** is illustrated in FIG. 7. In this embodiment, the thermal expansion is accommodated by the inclusion of a metal bellows **86**

housed within the pressurized expansion chamber **74** that is affixed to the base **76** of the sealed motor **14**.

On the motor-side of the bellows **86**, the bellows **86** is exposed to the motor oil **72**. On the other side of the bellows **86**, the bellows **86** is exposed to wellbore fluid via the wellbore fluid inlet **88**. A metal mesh screen **90** is provided proximate the fluid inlet **88** to keep large debris from interfering with the flexures of the bellows **86**.

The bellows **86** expands and compresses in response to the fluid pressure of the oil **72** and the well fluid so as to effectively equalize the pressure. As such, the bellows **86** minimizes the net fluid pressure forces acting on the components of the sealed motor **14**.

Another embodiment of the sealed motor **14** of the sealed motor system **10** using a bellows **86** to allowing for thermal expansion of the motor oil **72** is illustrated schematically in FIG. 8. In this embodiment, an expansion chamber **75** is affixed to the base **76** of the sealed motor **14**. A fluid channel **78** extends therethrough the base **76** to enable communication between the sealed motor **14** and the expansion chamber **75**.

Located within the expansion chamber **75** is the bellows **86**. The expansion chamber **75** protects the bellows **86** from the surrounding wellbore fluid such that the exterior of the bellows **86** is only in contact with the motor oil **72** contained within the sealed motor **14**. The interior of the bellows **86** is filled with clean oil **73**.

A flexible element **80** is affixed to the base of the bellows **86** such that the interior of the flexible element **80** is in communication with the clean oil **73** contained within the interior of the bellows **86**. The exterior of the flexible element **80** is in communication with the surrounding wellbore fluid.

The bellows **86** expands and compresses in response to the fluid pressure of the oil **72, 73** and the fluid pressure of the surrounding wellbore fluid acting on the exterior of the flexible element **80**. In this manner, the bellows **86** acts to effectively equalize the pressure. As such, the bellows **86** minimizes the net fluid pressure forces acting on the components of the sealed motor **14**.

Yet another embodiment of the sealed motor **14** of the sealed motor system **10** allowing for thermal expansion of the motor oil **72** is illustrated in FIG. 9. In this embodiment, the thermal

expansion is accommodated by the inclusion of a piston **92** housed within the pressurized expansion chamber **74** that is affixed to the base **76** of the sealed motor **14**.

On the motor-side of the piston **92**, the piston **92** is exposed to the motor oil **72**. On the other side of the piston **92**, the piston **92** is exposed to wellbore fluid via the wellbore fluid inlet **88**. A metal mesh screen **90** is provided proximate the fluid inlet **88** to keep large debris from interfering with the action of the piston **92**.

The piston **92** is configured to move in response to the fluid pressure of the oil **72** and the well fluid so as to effectively equalize the pressure. As such, the piston **92** minimizes the net fluid pressure forces acting on the components of the sealed motor **14**.

In alternate embodiments, the sealed motor **14** can be filled with gas instead of motor oil **72**. This removes the necessity of the expansion chamber **74**. Using gas instead of motor oil **72** requires the use of gas or foil bearings.

Because the diameter of the magnetic coupling **40** employed by the sealed motor system **10** is constrained by the size of the

well, to increase the power transmitted by the sealed motor system **10**, the length of the magnetic coupling **40** must be increased. FIG. 10 illustrates one such extended length embodiment is which the magnetic coupling **40** of the sealed motor system **10** has a plurality of magnets **52, 66** mounted along the motor-side shaft **50.**

The magnetic coupling **40** in this embodiment is again comprised of a motor-side housing **42** and a pump-side housing **44.** The motor-side housing **42** is affixed to the sealed motor **14** by means, such as welding, that ensure the motor **14** remains sealed from the surrounding wellbore fluids.

The motor-side shaft **42** runs therethrough the motor-side housing **42** and is rotatably driven by the sealed motor **14.** A plurality of permanent magnets **52**, arranged in rings, are mounted to the motor-side shaft **50** by a motor-side rotor **54.**

Affixed to the top end **56** of the motor-side housing **42** is the thin-walled shell **58.** The shell **58** covers the motor-side shaft **50** as well as the plurality of permanent magnets **52**, arranged in rings, affixed thereto. The thin-walled shell **58** is affixed to the motor-side housing **42** such that the motor **14**

remains sealed. In one exemplary embodiment, the thin-walled shell **58** is affixed by welds **60**.

As discussed above, the thin-walled shell **58** can be made of a high strength non-magnetic material such as Hastelloy or titanium. Likewise, the thin-walled shell **58** can be made of a non-conducting high performance composite material such as carbon-reinforced PEEK.

The pump-side shaft **62** runs through the pump-side housing **44**. Affixed to the base of the pump-side shaft **62** is the pump-side rotor **64** that has a plurality of permanent magnets **66**, arranged in rings, mounted thereto. The plurality of permanent magnets **66** mounted to the pump-side rotor **64** are located at the same axial location as the plurality of permanent magnets **52** mounted to the motor-side rotor **54**.

The plurality of permanent magnets **52** within the motor-side housing **14** along with the plurality of permanent magnets **66** in the pump-side housing **44** act to create a magnetic field that enables the synchronous transmission of the rotating motion from the motor-side shaft **50** to the pump-side shaft **62**.

As the motor-side shaft **50** is rotated by operation of the sealed motor **14**, the motor-side rotor **54** rotates along with the affixed plurality of permanent magnets **52**. Because the plurality of permanent magnets **52** of the motor-side rotor **54** are magnetically linked to the plurality of permanent magnets **66** of the pump-side rotor **64**, the pump-side rotor **64** is forced to rotate resulting in rotation of the pump-side shaft **62** and the affixed pump shaft. The magnetic field runs through the thin-walled shell **58**, eliminating any need for mechanical connection between the motor-side shaft **50** and the pump-side shaft **62**, enabling the motor **14** to remain completely sealed.

The magnetic coupling **40** of the sealed motor system **10** is typically supported at either end by hydrodynamic bearings, such as plain journal bearings. Where space permits, bearings such as tilt-pad, lemon bore, and offset bearings can be used to advantage at either end of the magnetic coupling **40**.

As the length of the coupling **40** increases to accommodate higher power requirements of the sealed motor system **10**, it may be necessary to provide one or more intermediate bearing supports **94** to enhance the dynamic stability of the coupling **40**.

In one embodiment, where space permits, bearings such as tilt-

pad, lemon bore, and offset bearings can be used to advantage as the intermediate bearing supports **94**.

In additional embodiments, intermediate bearings supports **94** such as that illustrated in FIG. 11 can be used to enhance the dynamic stability of the magnetic coupling **40**. In this embodiment, the intermediate bearing supports **94** are comprised generally of three intermediate bearings **96, 98, 100.**

The first intermediate bearing **96** is located between the rotatable motor-side shaft **50** and the stationary thin-walled shell **58**. The stationary sleeve **97b** of the first intermediate bearing **96** is affixed to the thin-walled shell **58** while the rotatable interior surface **97a** is located proximate the motor-side shaft **50**.

The second intermediate bearing **98** is located between the stationary thin-walled shell **58** and the rotatable pump-side rotor **64** that is connected to the pump-side shaft **62**. The second intermediate bearing **98** is concentric with the first intermediate bearing **96** and located at the same axial location. The stationary sleeve **99a** of the second intermediate bearing **98** is affixed to the thin-walled shell **58** while its rotatable

exterior surface **99b** is located proximate the pump-side rotor **64.**

The third intermediate bearing **100** is located between the rotatable pump-side rotor **64** and the stationary pump-side housing **44.** The third intermediate bearing **100** is comprised of a stationary sleeve **101b** affixed to the pump-side housing **44** and a rotating interior surface **101a** proximate the pump-side rotor **64.** In the embodiment shown in FIG. 11, the third intermediate bearing **100** is located at the same axial location as the first and second intermediate bearings **96, 98.** However, it should be understood that the third intermediate bearing **100** can be located anywhere along the length of the pump-side rotor **64.** One such example is shown in FIG. 12.

Another embodiment of an intermediate bearing support **94** is described with reference to FIG. 13. In this embodiment, enhanced stability of the magnetic coupling **40** is achieved by creating an elliptical surface in the thin-walled shell **58.** The elliptical shape in the shell **58** can be achieved by using a bearing **102** having an elliptical hole **104** bored into the bearing portion **106** that contacts the shell **58.** The elliptical shape of the shell **58** has stabilizing effects similar to hydrodynamic

bearings that enhance stability (e.g., tilt-pad, lemon bore, offset bearings).

FIG. 14 provides a schematic illustration of an embodiment of the sealed motor system **10** where the magnetic coupling **40** is integral with the sealed motor **14** and the protector **26**. The internal components of the magnetic coupling **40** remain as described above, but are not housed within a separate coupling housing. Rather, the internal components in this embodiment are housed within the lower portion of the protector housing **108** and the upper portion of the motor housing **46**. As such, the motor housing **46** can be affixed directly to the protector housing **108**.

One advantage of this embodiment is that the torque is supplied through the components of the magnetic coupling **40** directly from the motor shaft **110** to the shaft of the protector **112**.

In additional embodiments of the sealed motor system **10**, the protector **26** can be eliminated altogether by carrying the thrust load in either the sealed motor **14** or the pump **12**. In such case, the sealed motor **14** can be affixed directly to the pump **12**.

The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such are intended to be included within the scope of the following non-limiting claims.

WHAT IS CLAIMED IS:

1. A submersible motor and pump system for use in a wellbore, comprising:

a motor;

a motor shaft rotatably driven by the motor and having at least one permanent magnet;

a pump;

a pump shaft having at least one permanent magnet;

wherein the motor shaft and the pump shaft are positioned so that the at least one permanent magnet of the motor shaft is magnetically coupled to the at least permanent magnet of the pump shaft so that rotation of the motor shaft induces rotation of the pump shaft; and

wherein the motor and the pump are disposed within the wellbore.

2. The system of claim 1, further comprising a shell disposed between the at least one permanent magnet of the motor shaft and the at least one permanent magnet of the pump shaft.

3. The system of claim 2, wherein the shell prevents fluid communication therebetween.

4. The system of claim 2, wherein the shell seals the motor from well fluids.

5. The system of claim 4, further comprising a pressure and volume compensation device affixed to the motor and adapted to compensate for varying fluid pressure within the sealed motor.

6. The system of claim 5, wherein the pressure and volume compensation device is a flexible element housed within a pressurized chamber.

7. The system of claim 5, wherein the pressure and volume compensation device is a bellows.

8. The system of claim 5, wherein the pressure and volume compensation device is a piston.

9. The system of claim 5, wherein the pressure and volume compensation device comprises a bellows affixed to a flexible element, the flexible element having an exterior surface in communication with wellbore fluid.

10. The system of claim 2, further comprising an intermediate bearing disposed between the motor shaft and the shell.

11. The system of claim 2, further comprising an intermediate bearing disposed between the shell and the pump shaft.

12. The system of claim 2, further comprising an intermediate bearing disposed between the pump shaft and an exterior housing.

13. A submersible pumping system for deployment in a well, comprising:

a submersible pump; and

a motor located within a housing sealed from contamination with well fluids, and adapted to magnetically drive the submersible pump.

14. The submersible pumping system of claim 13, further comprising a magnetic coupling adapted to transmit torque from the motor to the submersible pump.

15. The submersible pumping system of claim 14 further comprising a protector adapted to transmit torque from the magnetic coupling to the submersible pump.

16. The submersible pumping system of claim 13 further comprising a protector adapted to transmit torque to the submersible pump.

17. The submersible pumping system of claim 13 further comprising thrust bearings.

18. A sealed motor system for use in a submersible pumping system, comprising:

a motor;

a motor housing adapted to seal the motor from the surrounding environment;

a submersible pump; and

a magnetic coupling adapted to transmit torque to the submersible pump by magnetic fields acting through the motor housing.

19. The sealed motor system of claim 18, wherein the motor housing comprises a thin-walled shell.

20. The sealed motor system of claim 19, wherein the thin-walled shell is made of a high strength non-magnetic material.

21. The sealed motor system of claim 19, wherein the thin-walled shell is made of a non-conducting composite material.

22. The sealed motor system of claim 21, wherein the non-conducting composite material is carbon-reinforced PEEK.

23. The sealed motor system of claim 18, wherein the magnetic coupling comprises rotors housing one or more permanent magnets.

24. A magnetic coupling for use in a submersible pumping system to transmit torque from a motor to a pump for pumping well fluids, comprising:

a motor-side housing affixed to the motor;

a motor-side shaft rotatably driven by the motor;

a motor-side rotor affixed to the motor-side shaft and having at least one permanent magnet affixed thereto;

a protective shell affixed to the motor-side housing and adapted to seal the motor, motor-side shaft and the motor-side rotor from the surrounding well fluids;

a pump-side housing affixed to the pump;

a pump-side shaft adapted to drive the pump;

a pump-side rotor affixed to the pump-side shaft and having at least one permanent magnet affixed thereto; and

wherein the at least one permanent magnet affixed to the motor-side rotor interacts with the at least one permanent magnet affixed to the pump-side rotor to create a magnetic field that transmits through the protective shell to enable synchronous transmission of torque from the motor-side shaft to the pump-side shaft.

25. The magnetic coupling of claim 24, wherein the motor-side housing is welded to the motor.

26. The magnetic coupling of claim 24, wherein the at least one permanent magnet of the motor-side rotor is arranged in rings.

27. The magnetic coupling of claim 24, wherein the protective shell is made of a high strength, non-magnetic material.

28. The magnetic coupling of claim 24, wherein the protective shell is made of a non-conducting composite material.

29. The magnetic coupling of claim 28, wherein the composite material is carbon-reinforced PEEK.

30. The magnetic coupling of claim 24, wherein the at least one permanent magnet affixed to the motor-side rotor is enclosed by a non-magnetic sleeve.

31. The magnetic coupling of claim 24, wherein the at least one permanent magnet affixed to the pump-side rotor is enclosed by a non-magnetic sleeve.

32. The magnetic coupling of claim 24, wherein the sealed motor is filled with clean oil.

33. The magnetic coupling of claim 24, further comprising a pressure and volume compensating device affixed to the sealed motor.

34. A magnetic coupling for use in a submersible pumping system, comprising:

a motor sealed from well fluids by a protective housing;

a motor shaft within the protective housing having a plurality of magnets affixed thereto;

a pump having a pump housing;

pump rotor located outside the protective housing and having a plurality of magnets affixed thereto magnetically linked to the magnets affixed to the motor shaft; and

wherein rotation of the motor shaft causes the pump rotor to rotate.

35. The magnetic coupling of claim 34, further comprising one or more intermediate bearing supports.

36. The magnetic coupling of claim 35, wherein the one or more intermediate bearing supports comprise tilt-pad bearings.

37. The magnetic coupling of claim 35, wherein the one or more intermediate bearing supports comprise lemon bore bearings.

38. The magnetic coupling of claim 35, wherein the one or more intermediate bearing supports comprise offset bearings.

39. The magnetic coupling of claim 35, wherein the one or more intermediate bearing supports comprise elliptical bearings adapted to shape the protective housing elliptically.

40. The magnetic coupling of claim 35, wherein the one or more intermediate bearing supports comprise:

a first bearing located between the motor shaft and the protective housing;

a second bearing coaxially aligned with the first bearing and located between the protective housing and the pump rotor; and

a third bearing located between the pump rotor and the pump housing.

41. A method of pumping well fluids using a sealed motor, comprising:

providing a motor sealed from well fluids by a protective shell;

providing a pump adapted to pump fluids and located outside of the protective shell; and

providing a magnetic coupling adapted to transmit torque generated by the motor to the pump by use of magnetic fields acting through the protective shell.

Smart & Biggar
Ottawa, Canada
Patent Agents

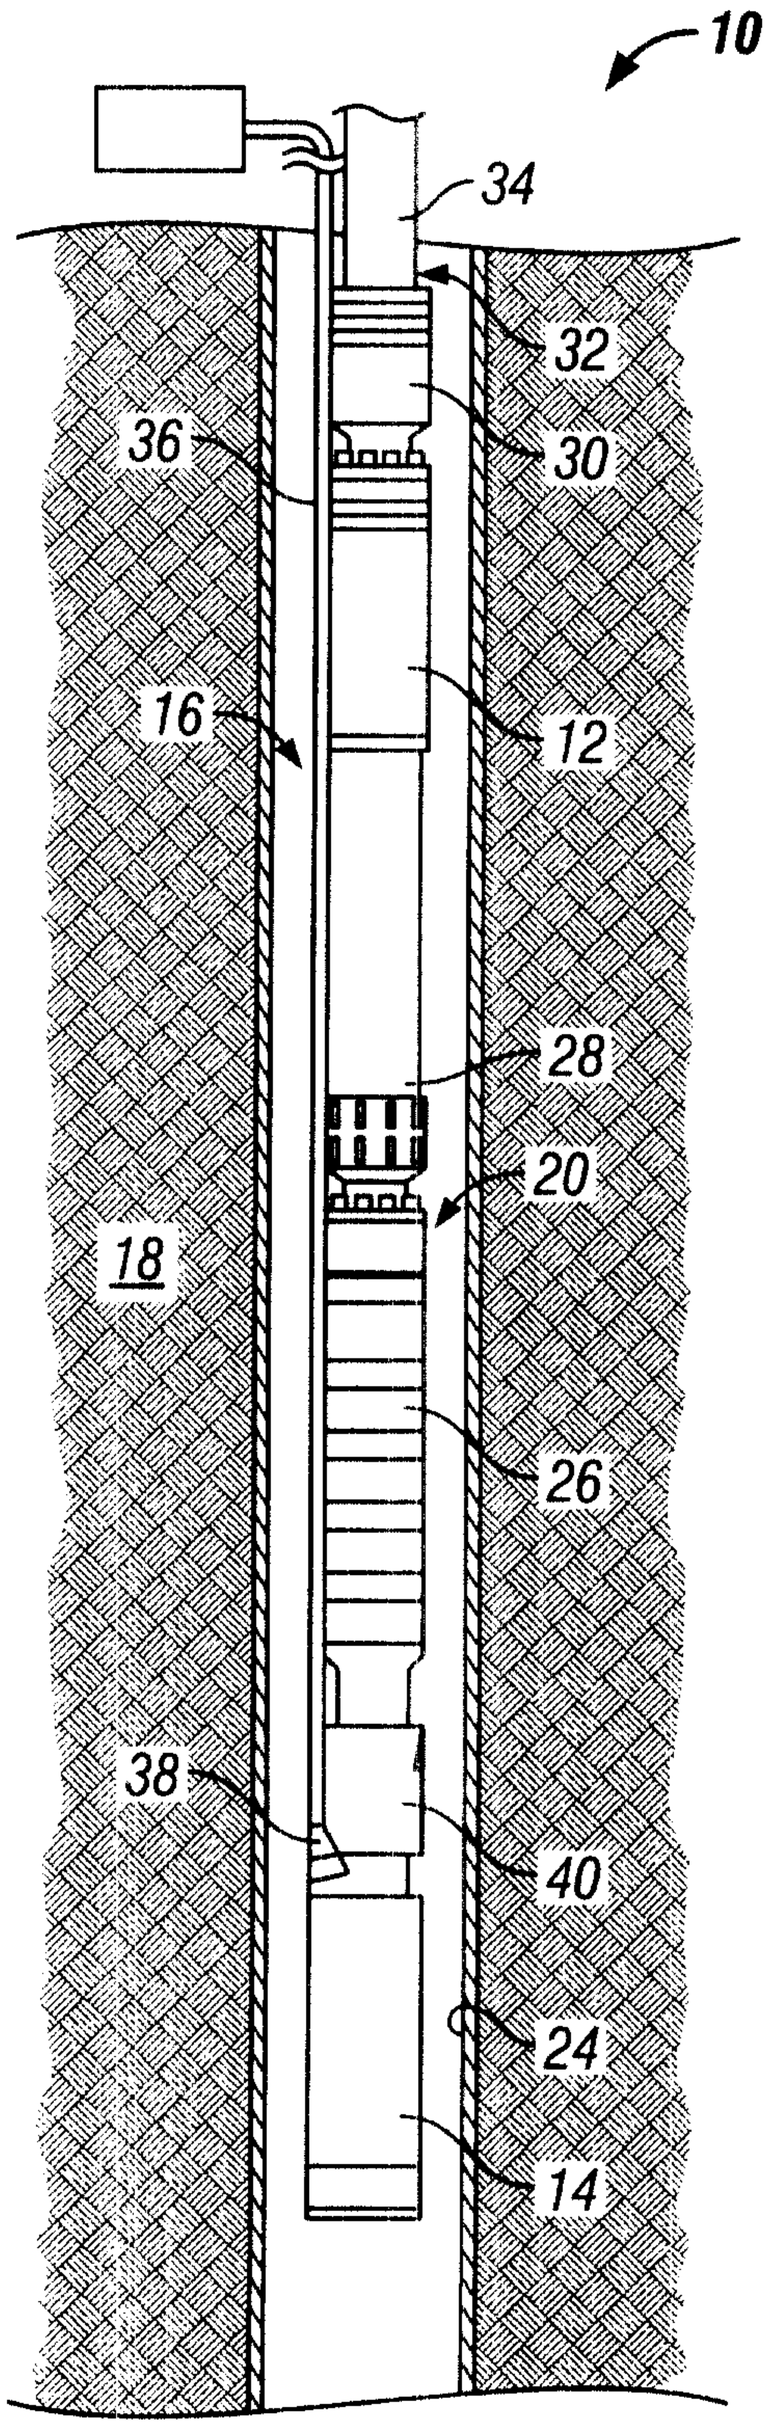


FIG. 1

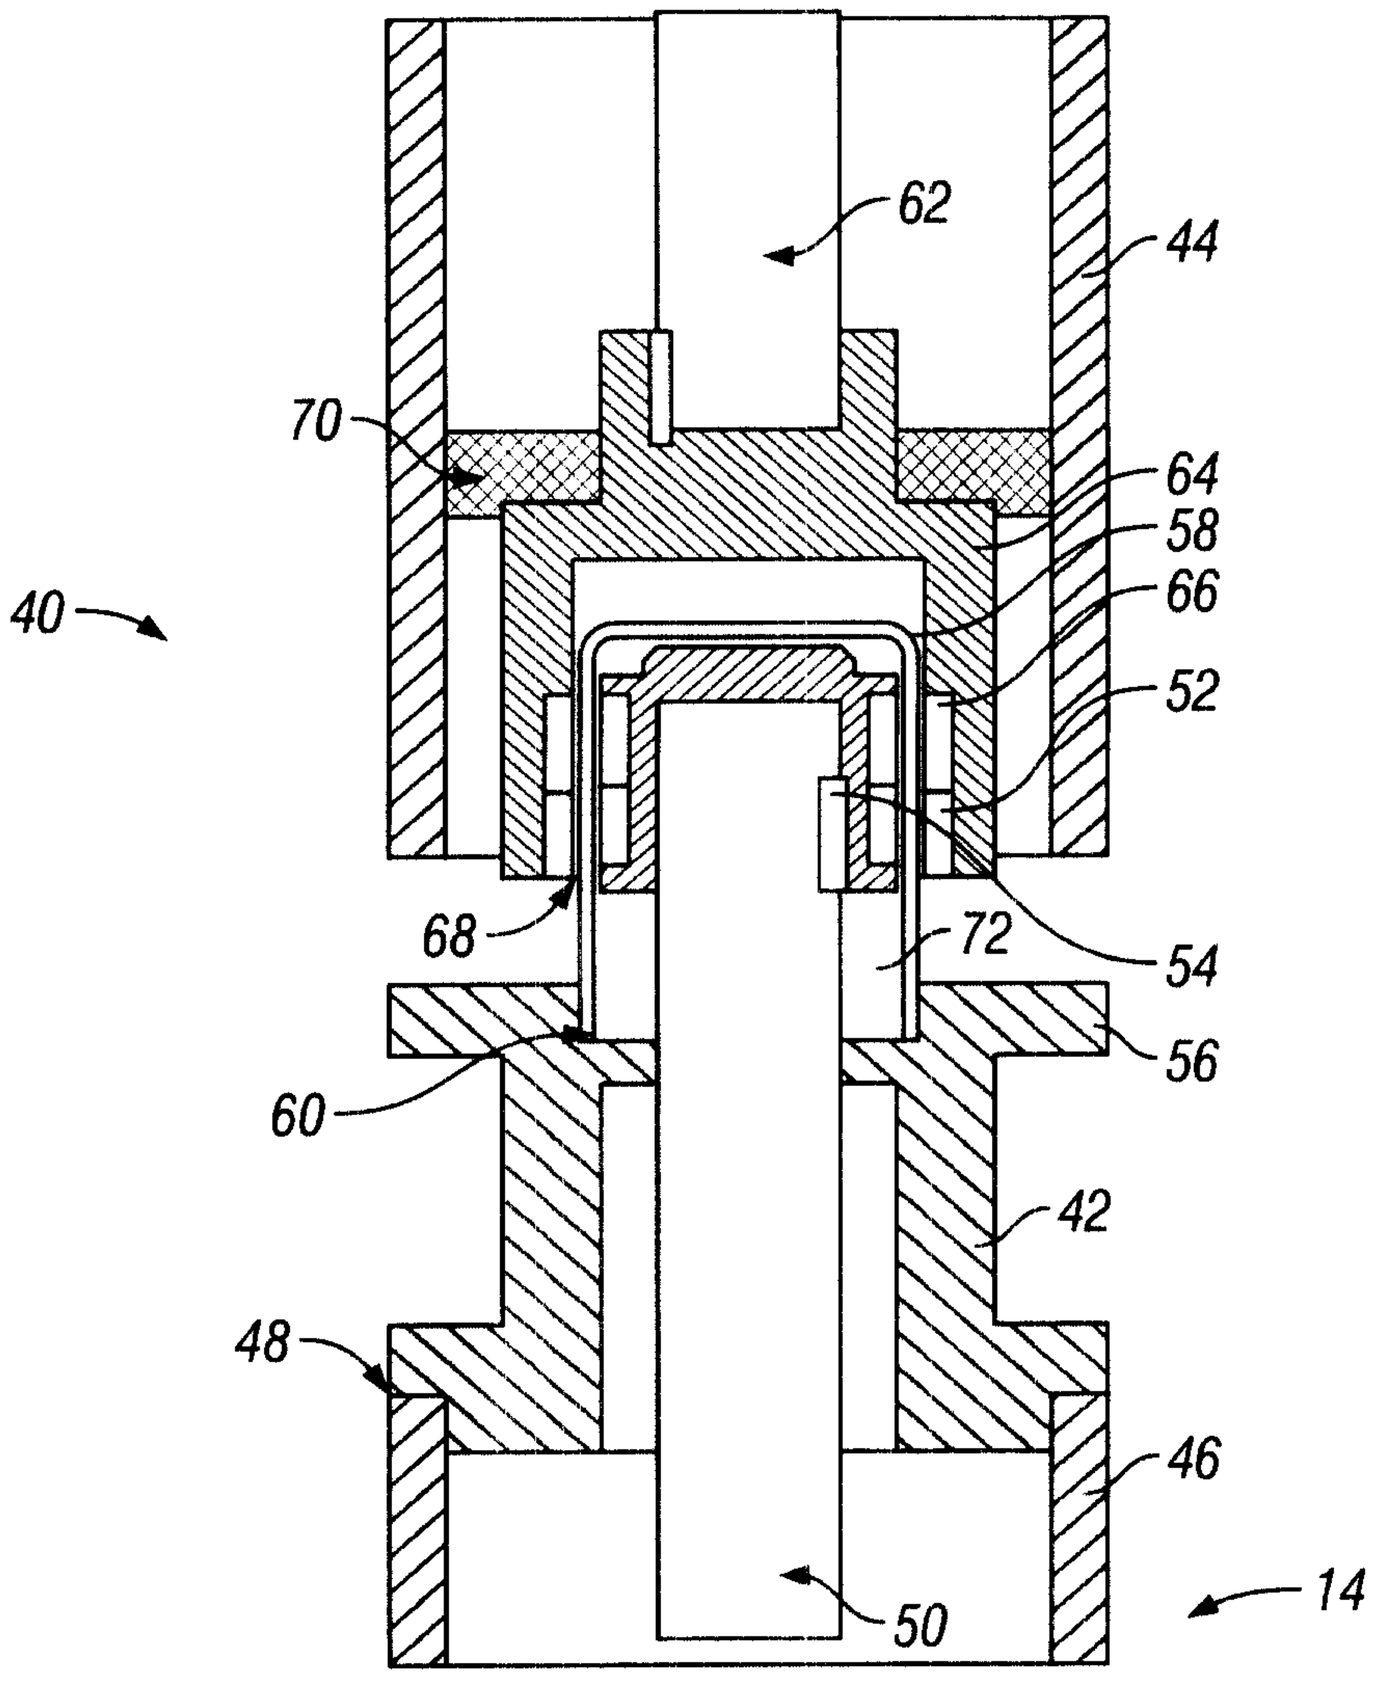


FIG. 2

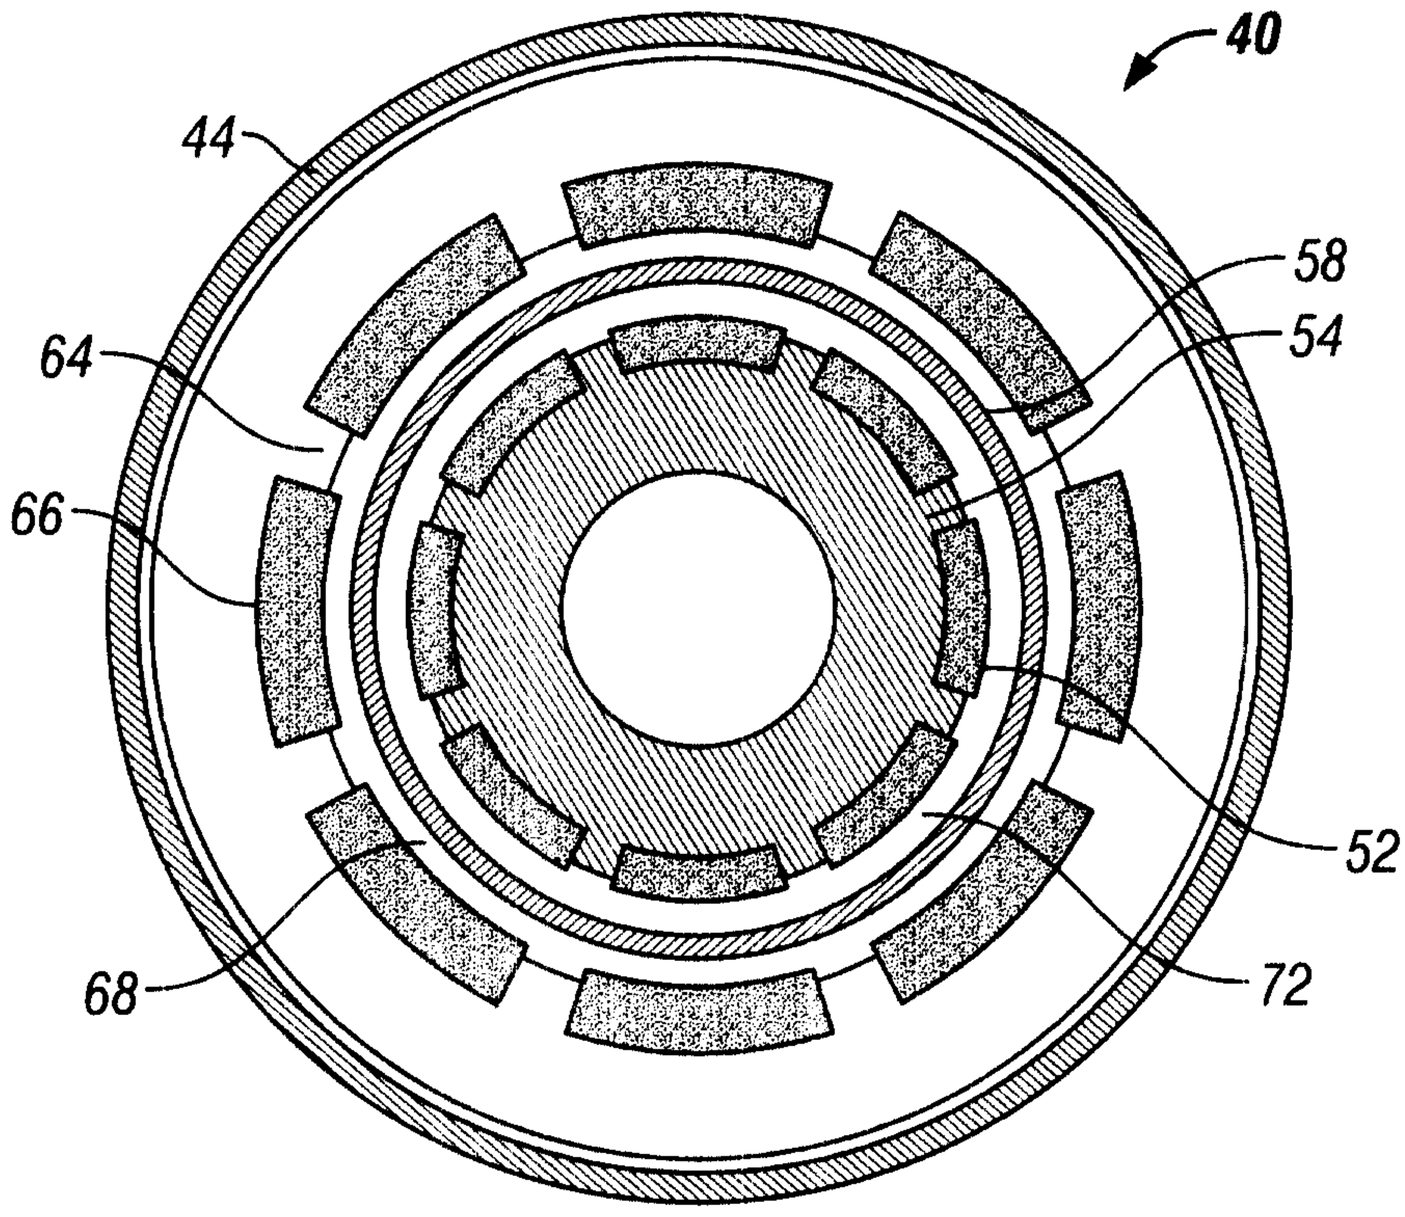


FIG. 3

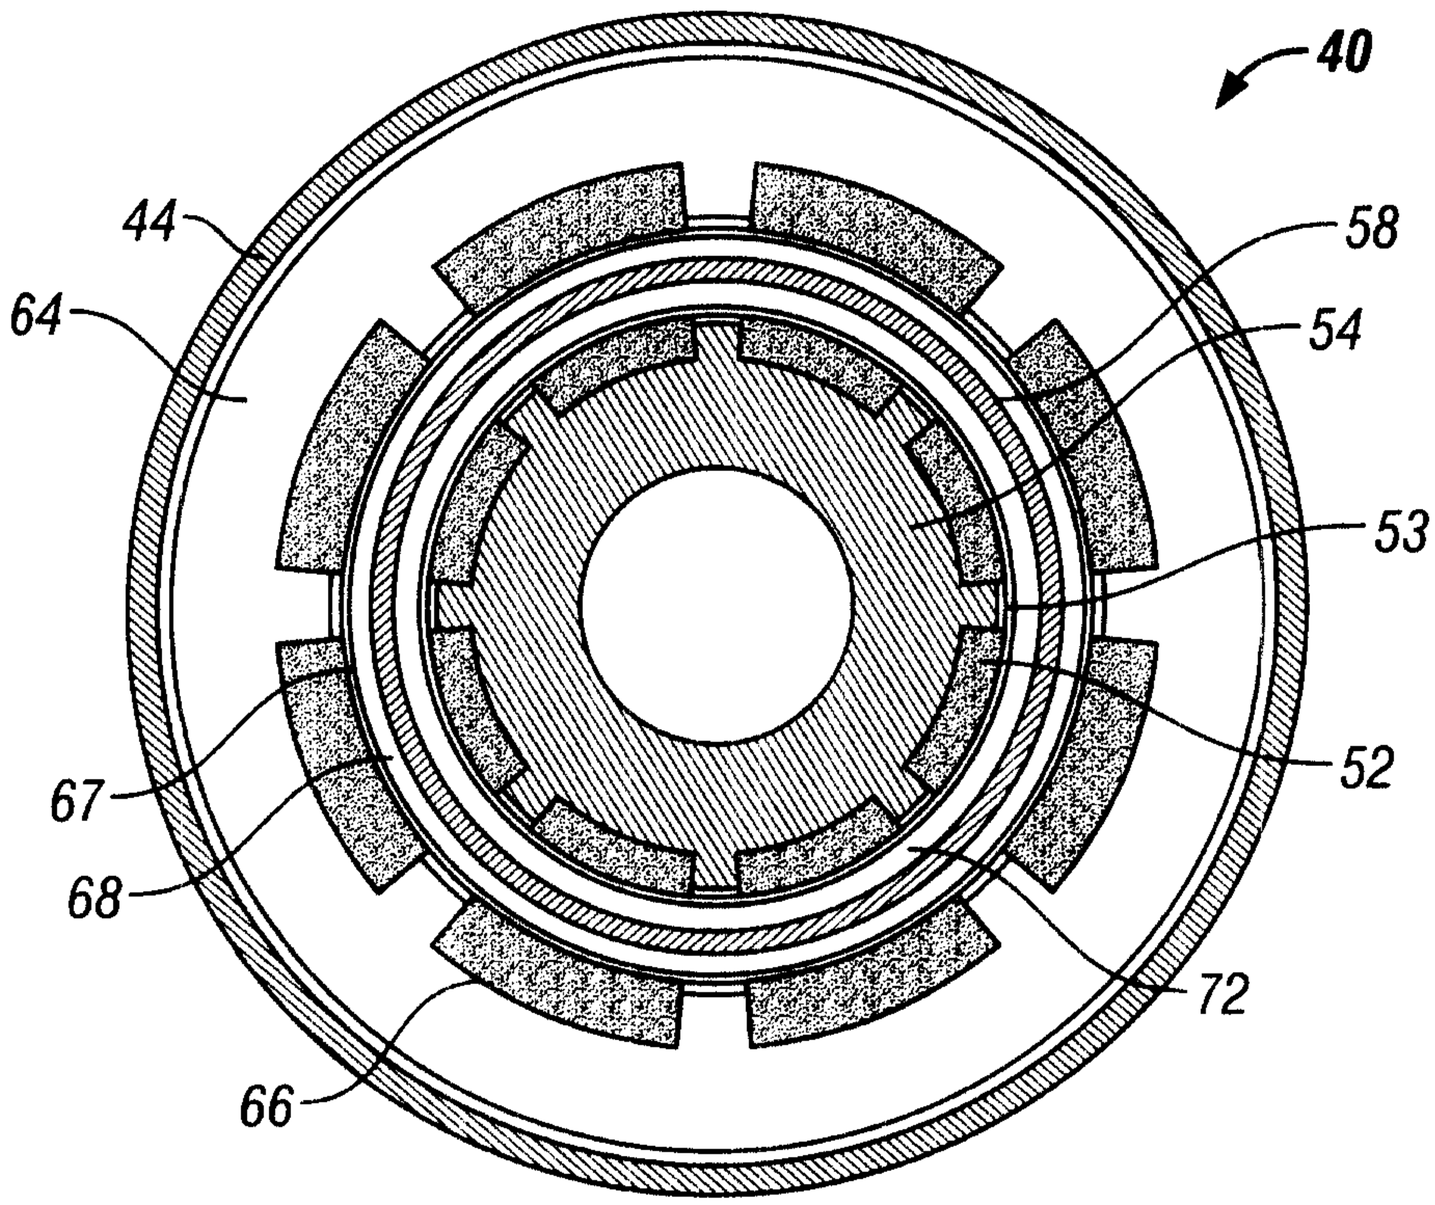


FIG. 4

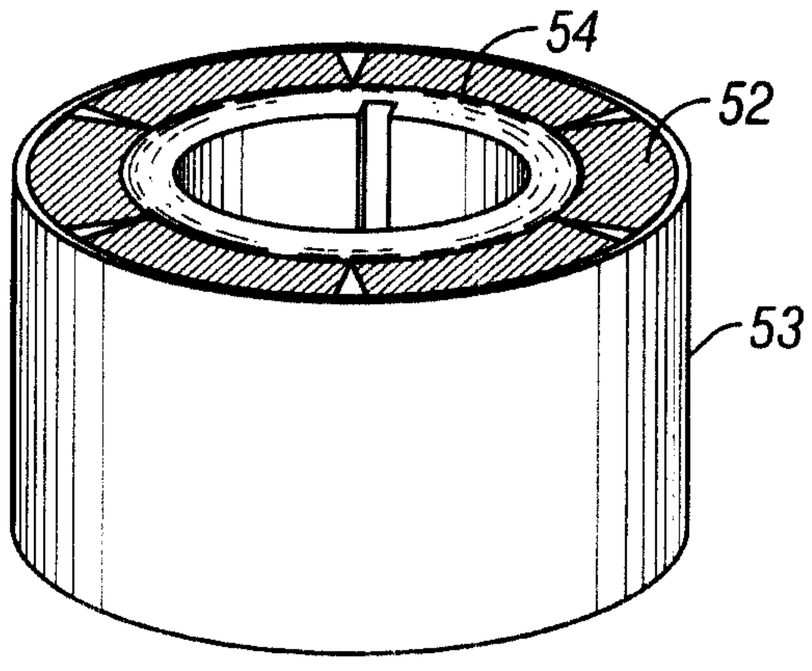


FIG. 5A

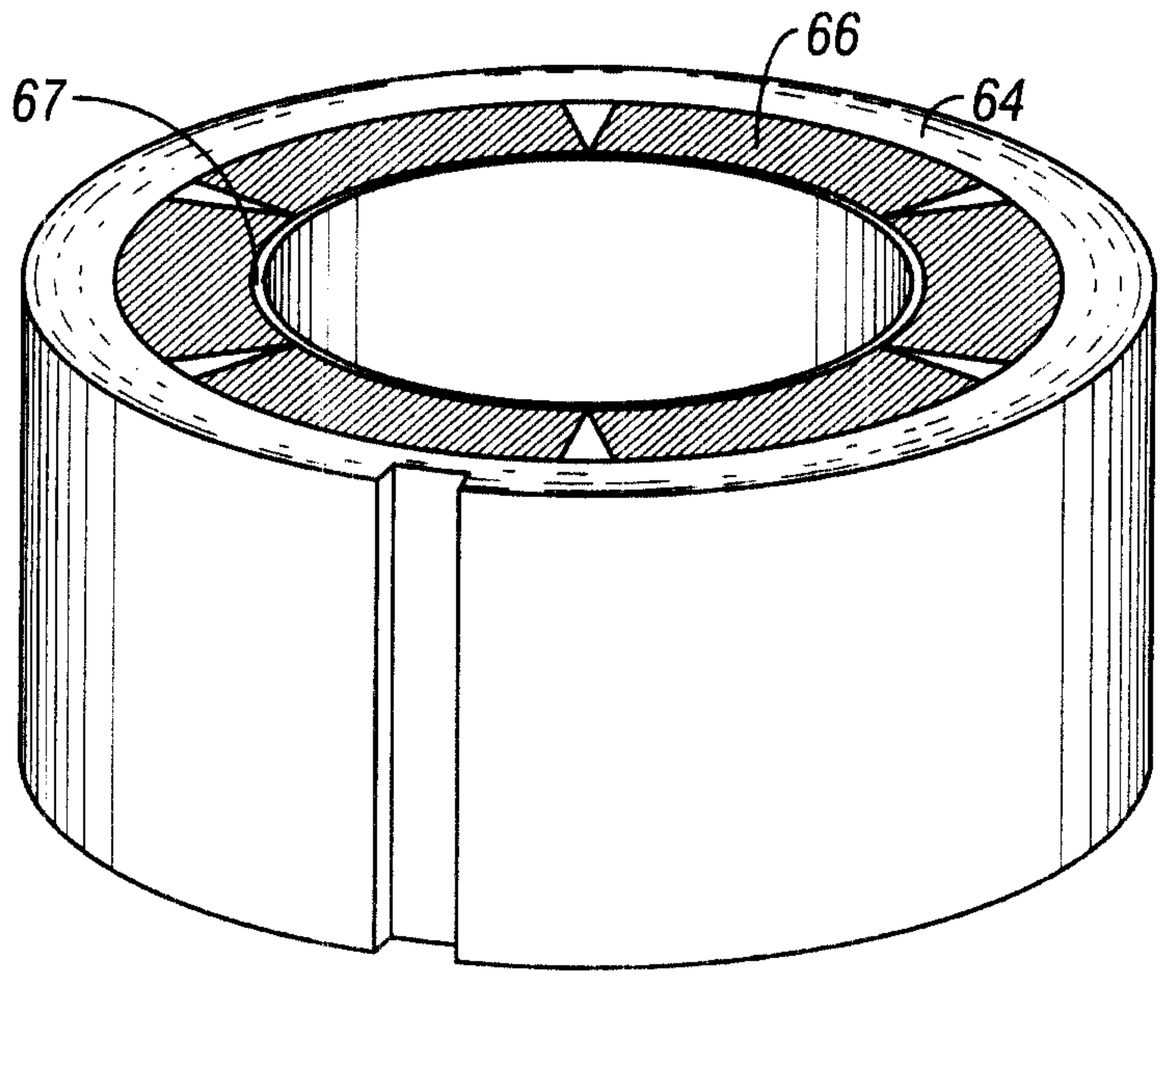


FIG. 5B

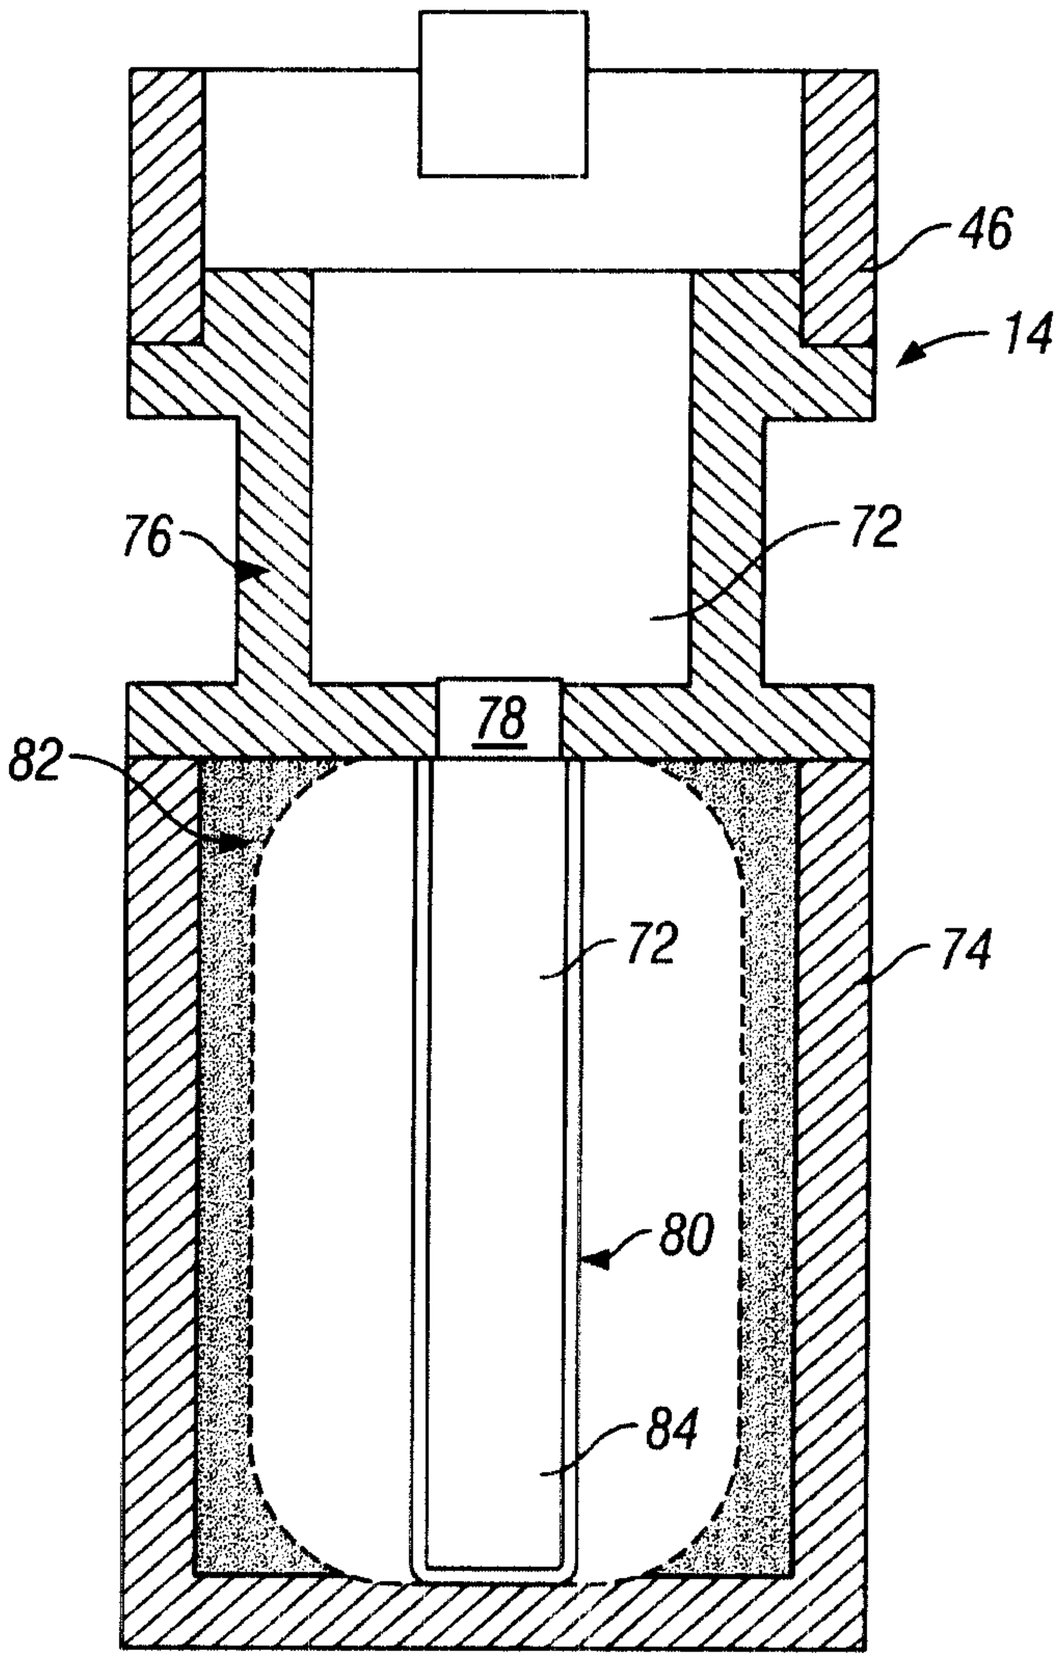


FIG. 6

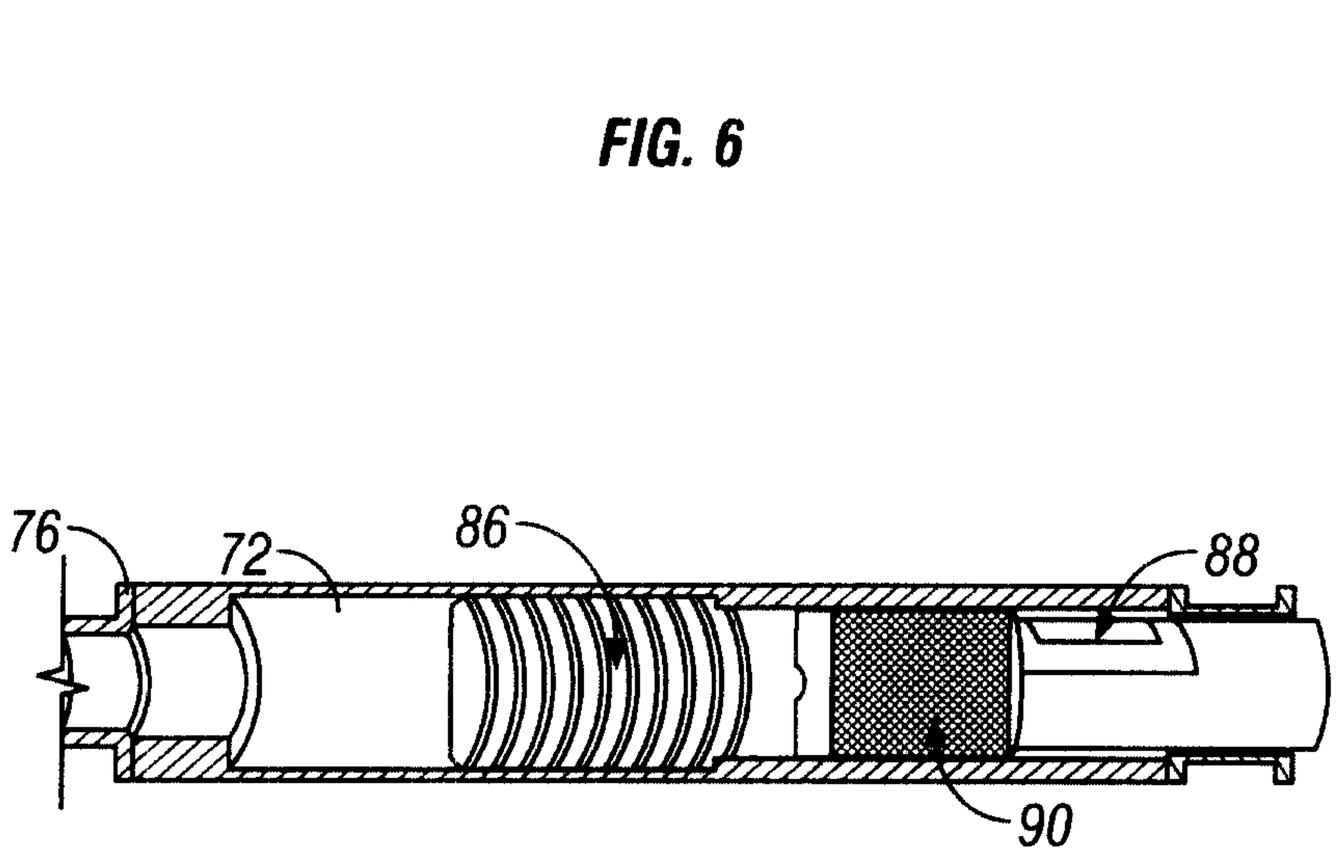


FIG. 7

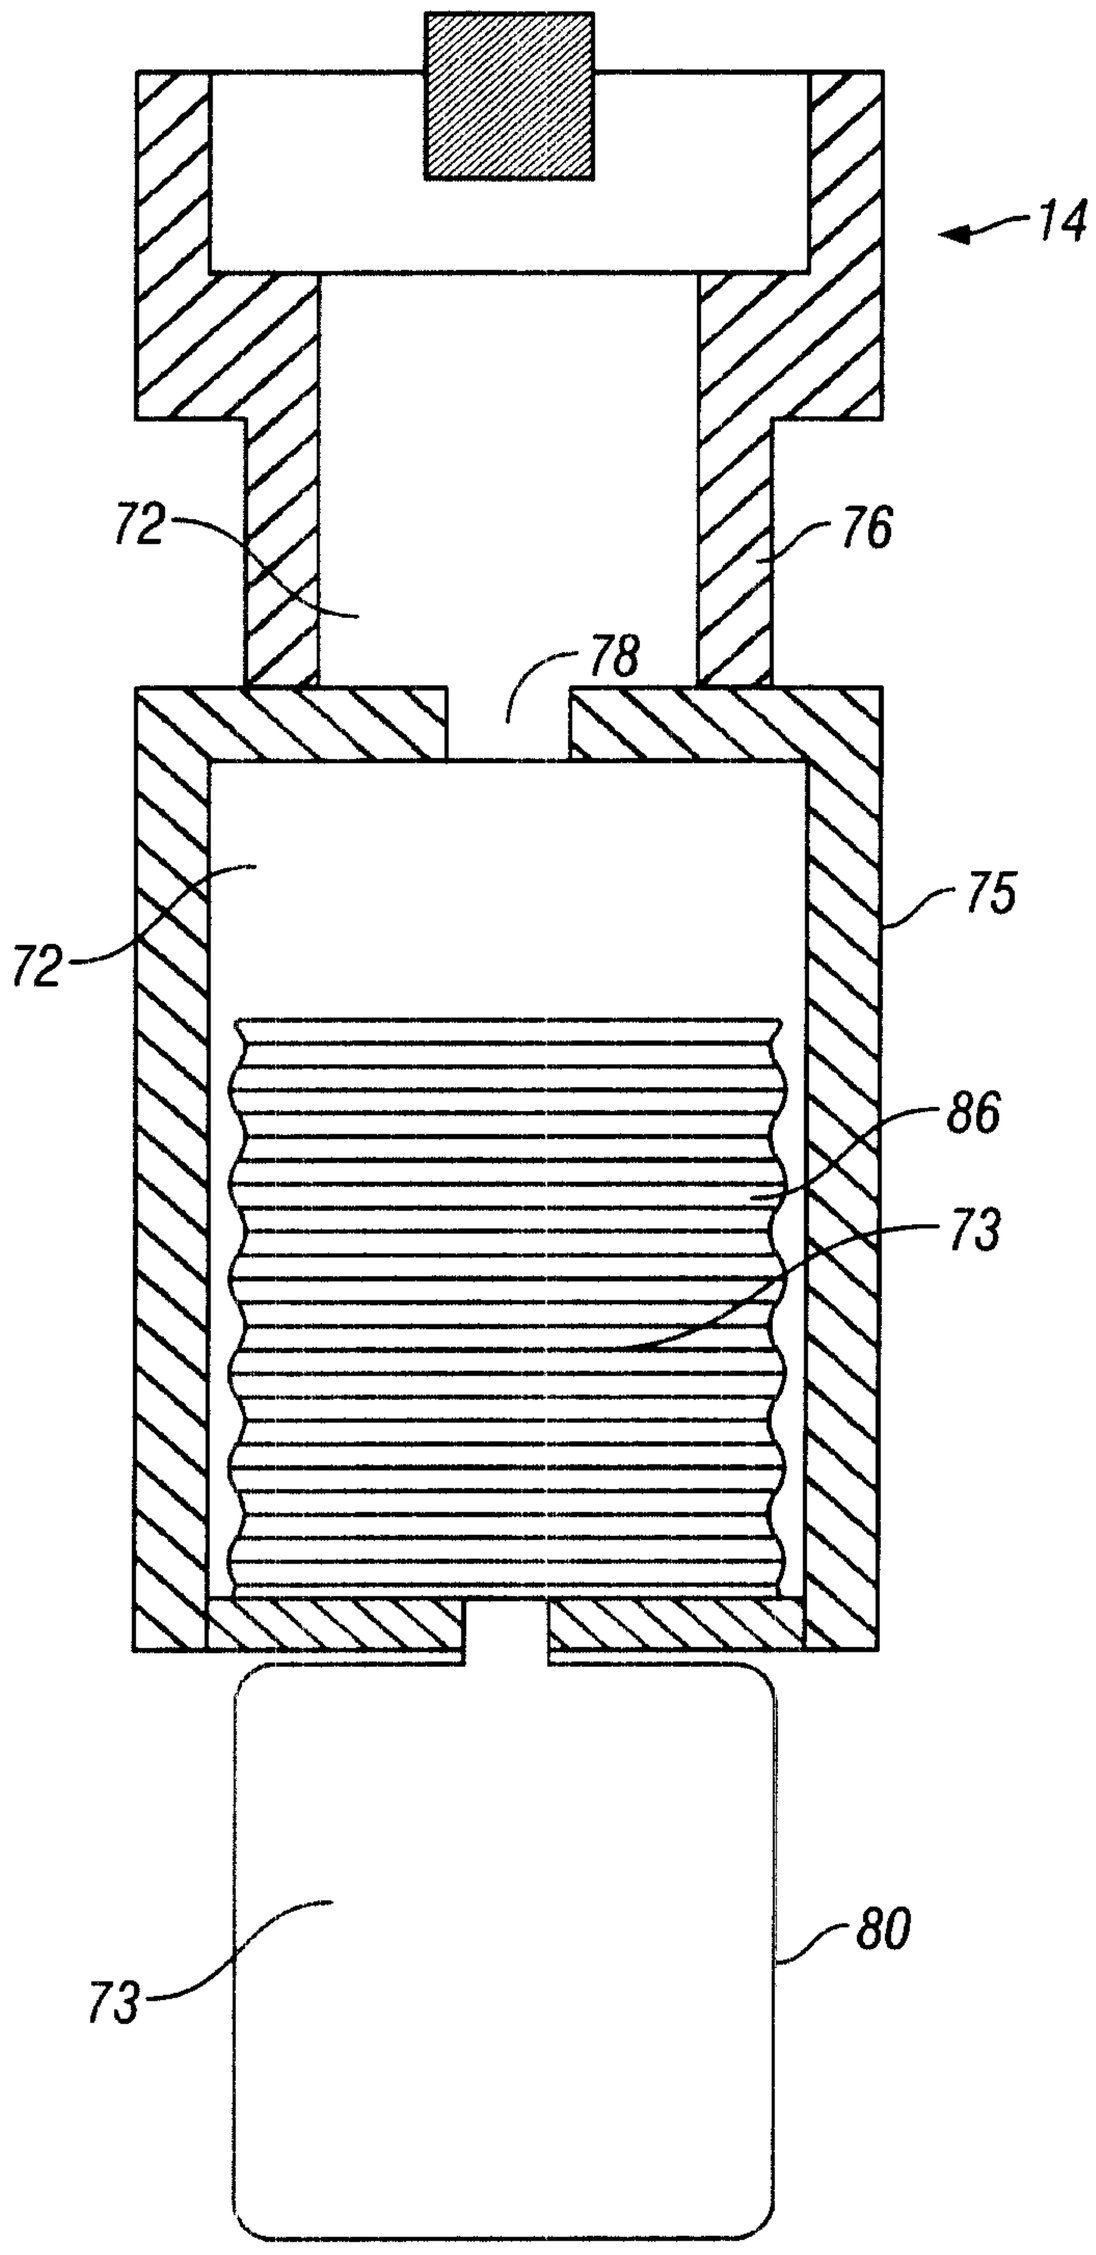


FIG. 8

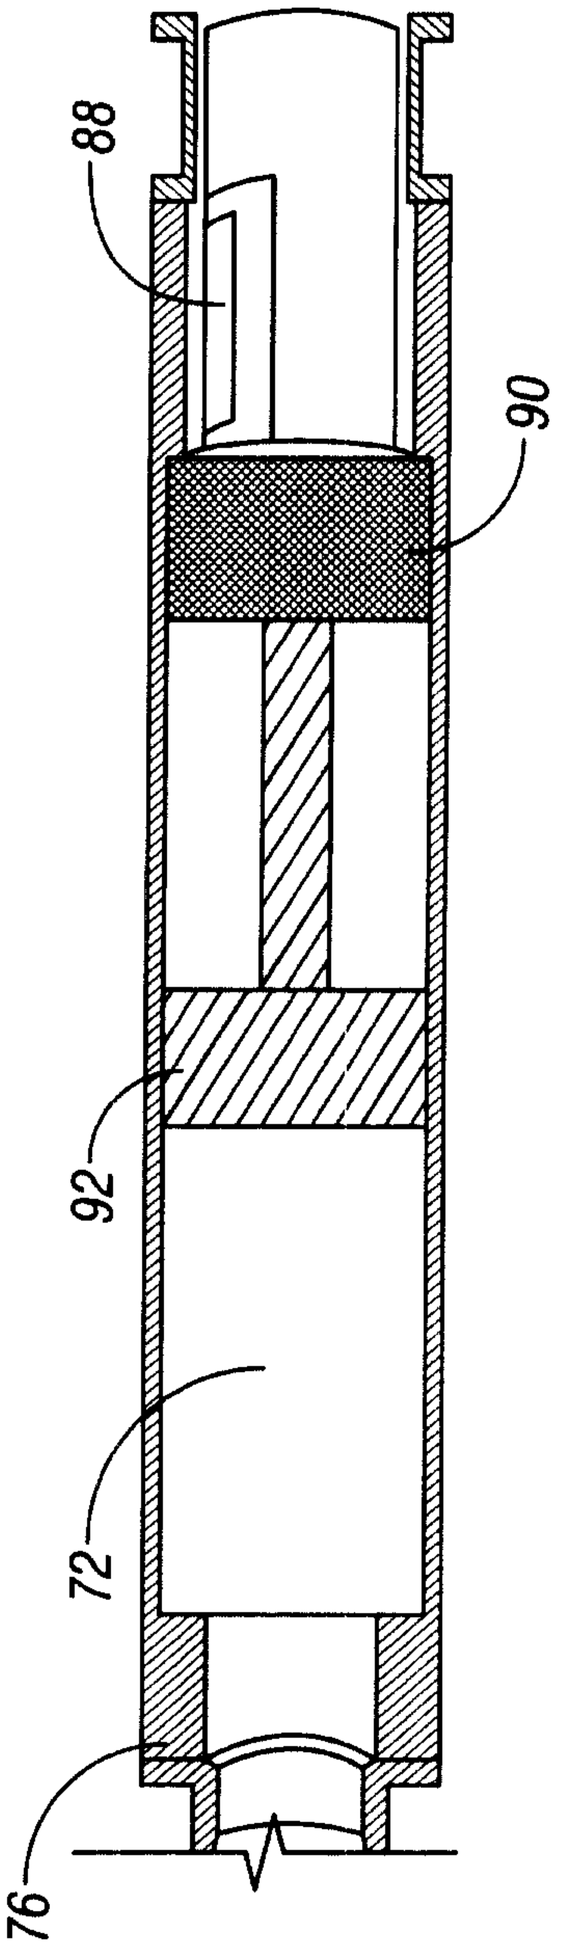


FIG. 9

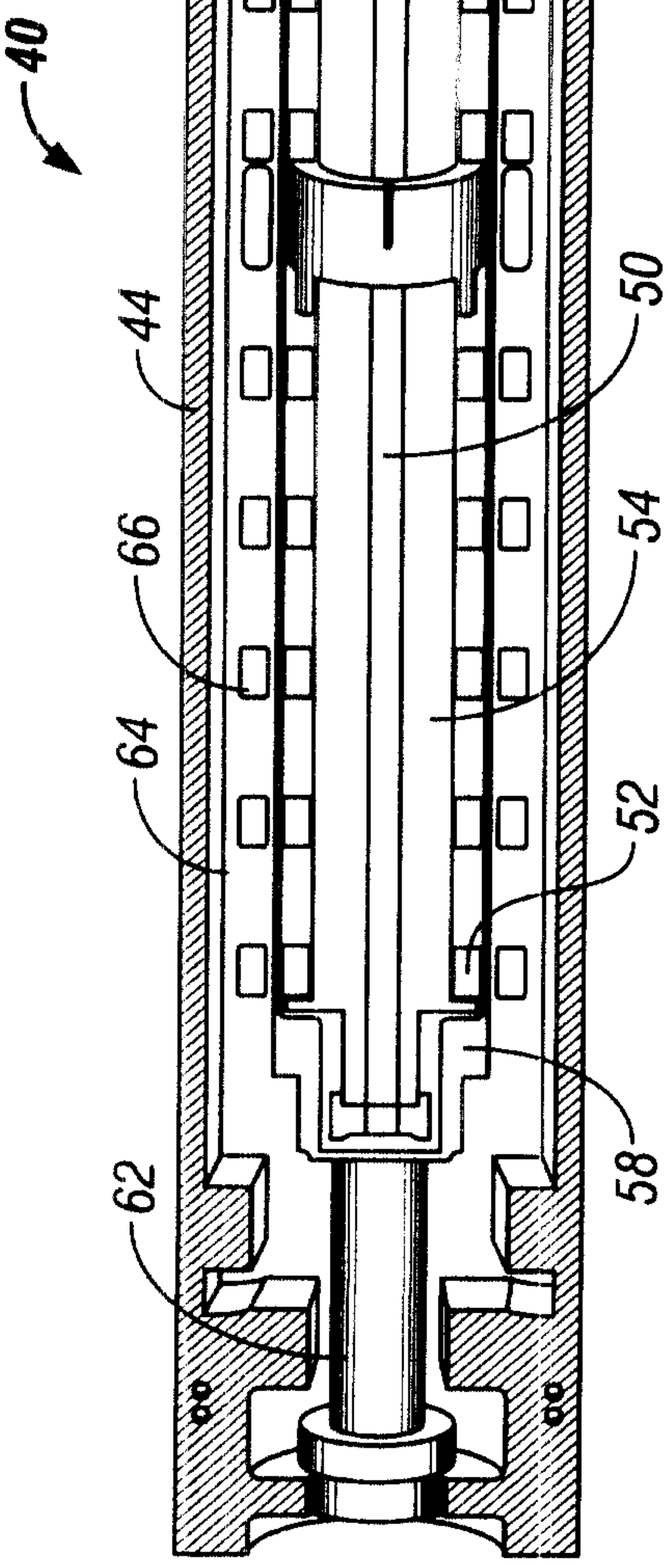


FIG. 10

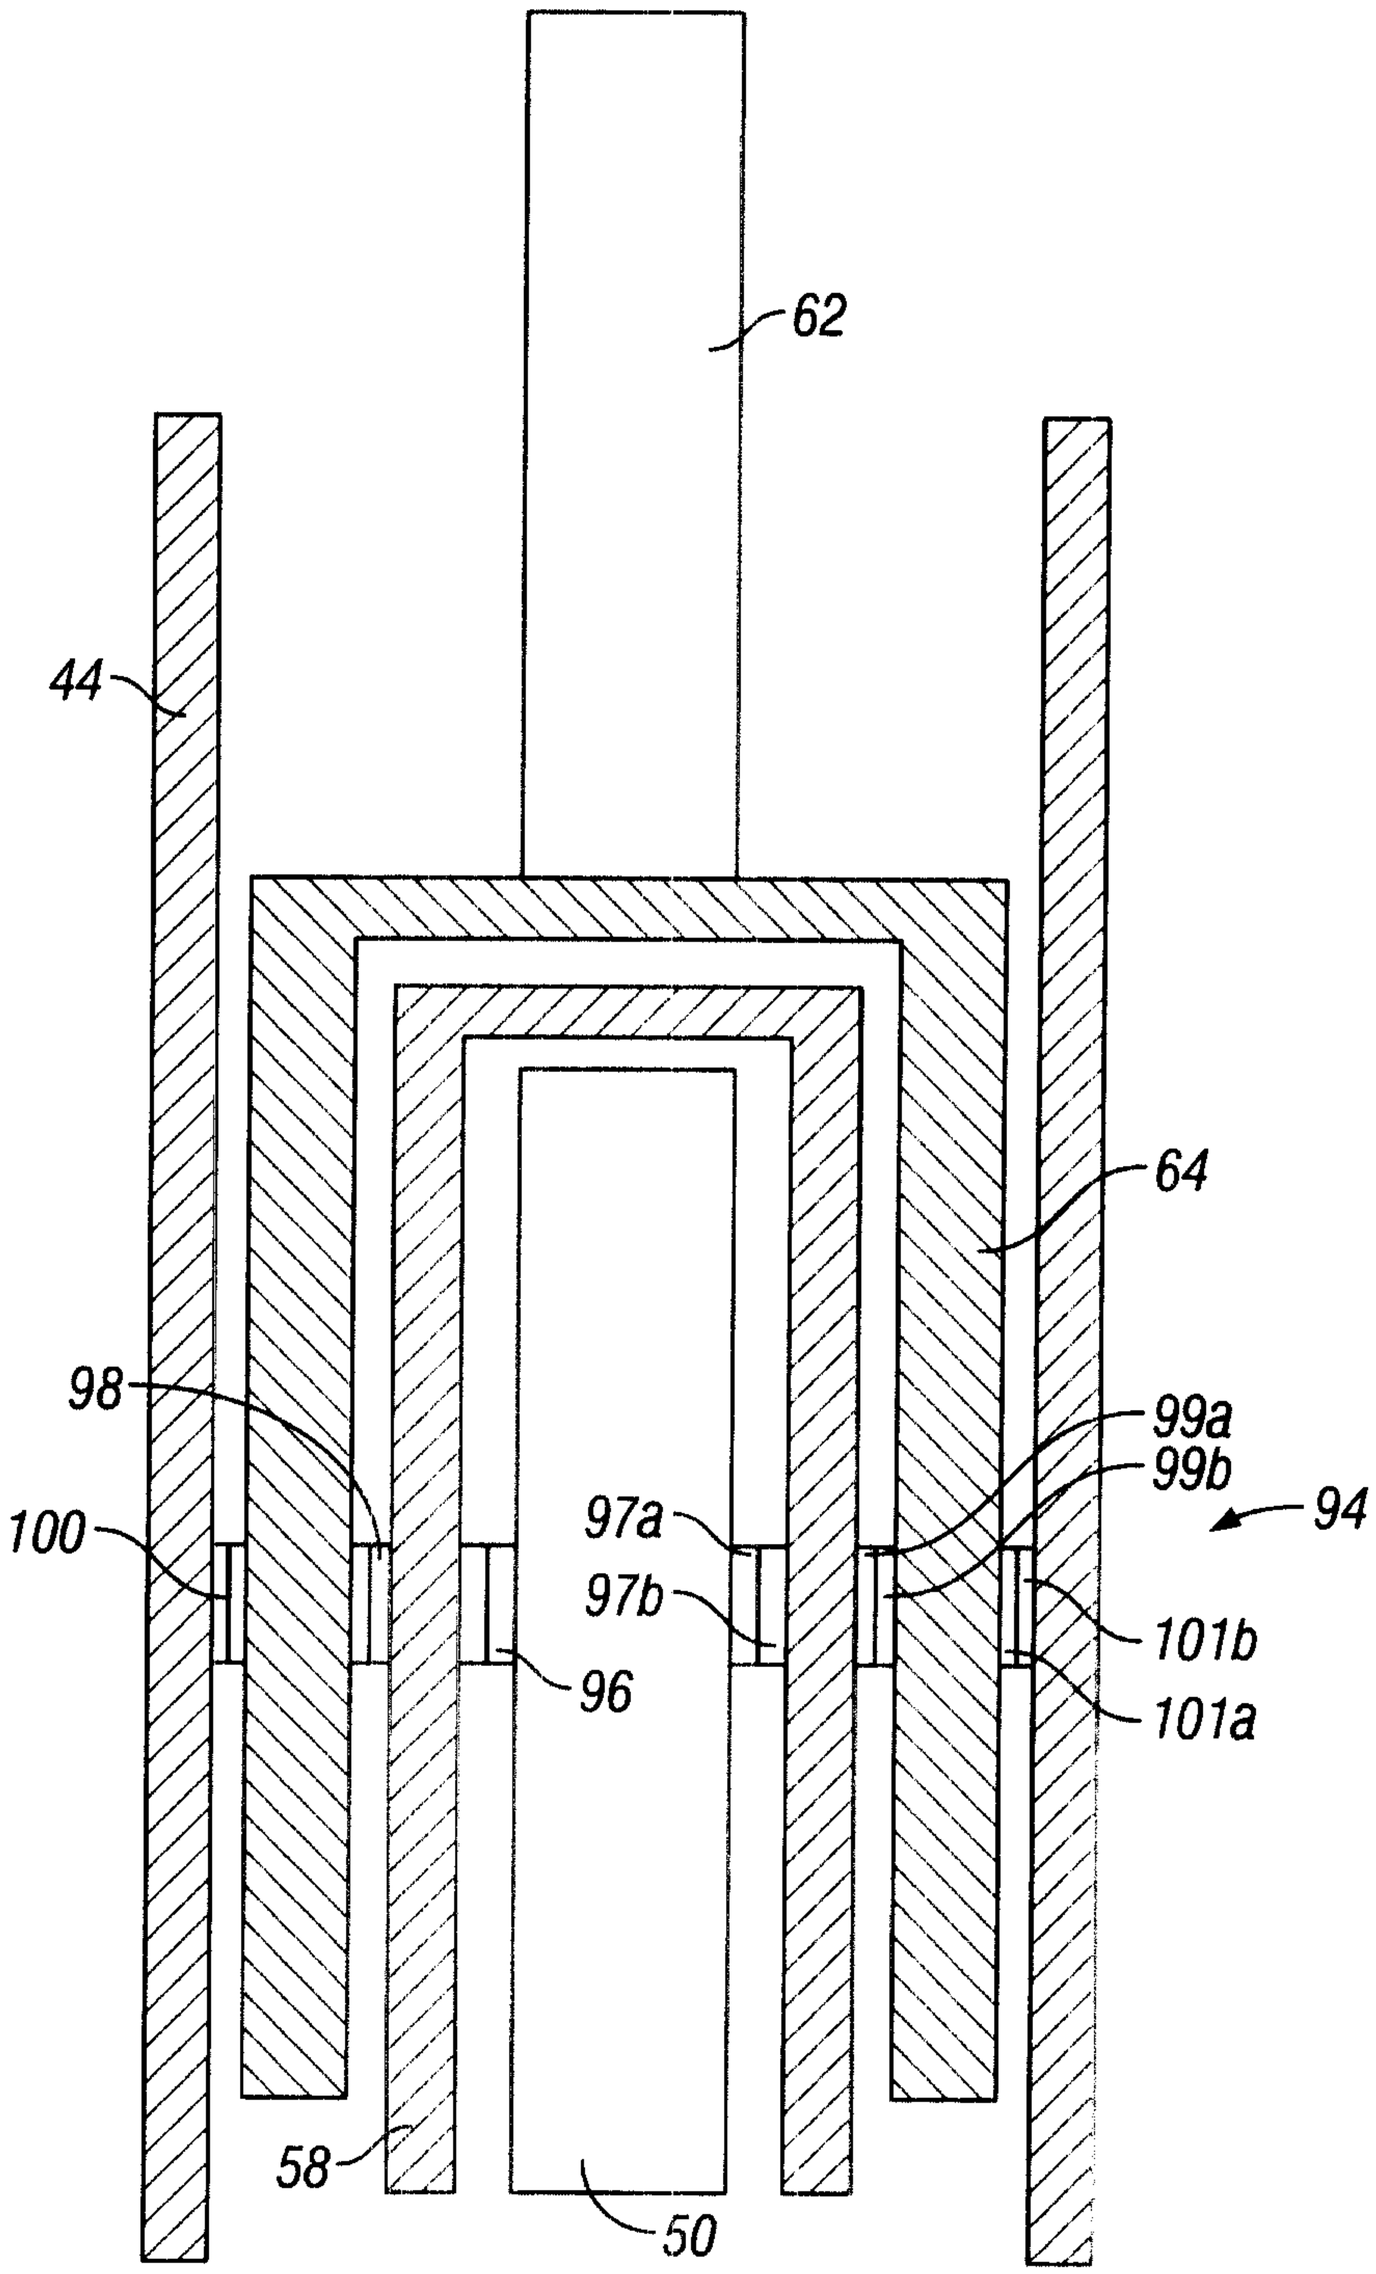


FIG. 11

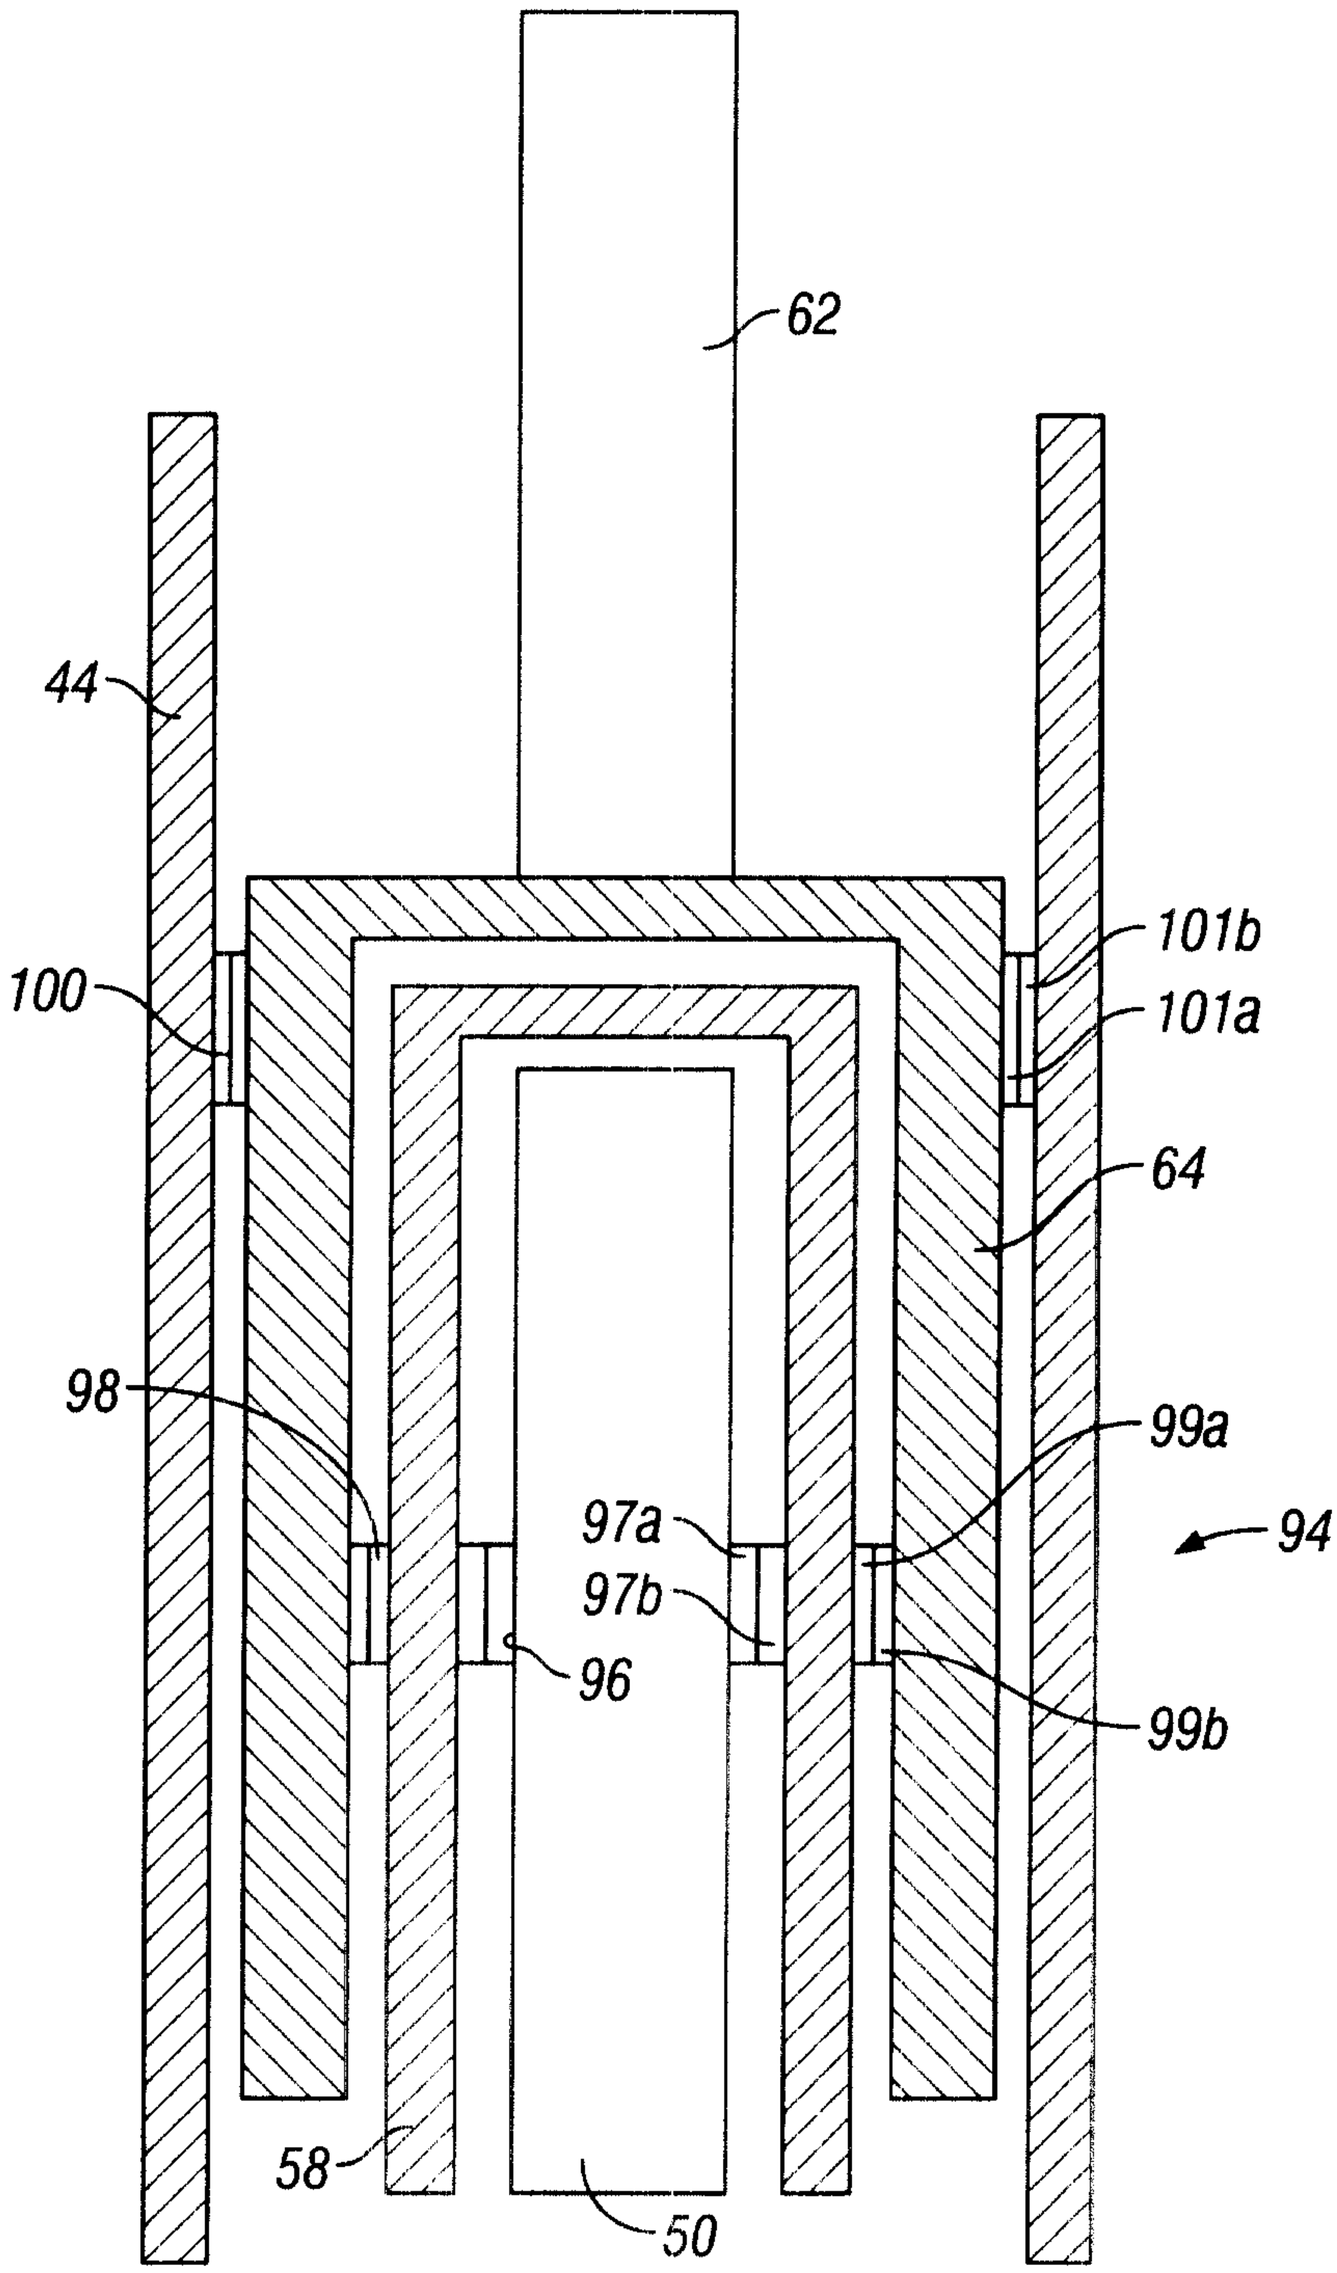


FIG. 12

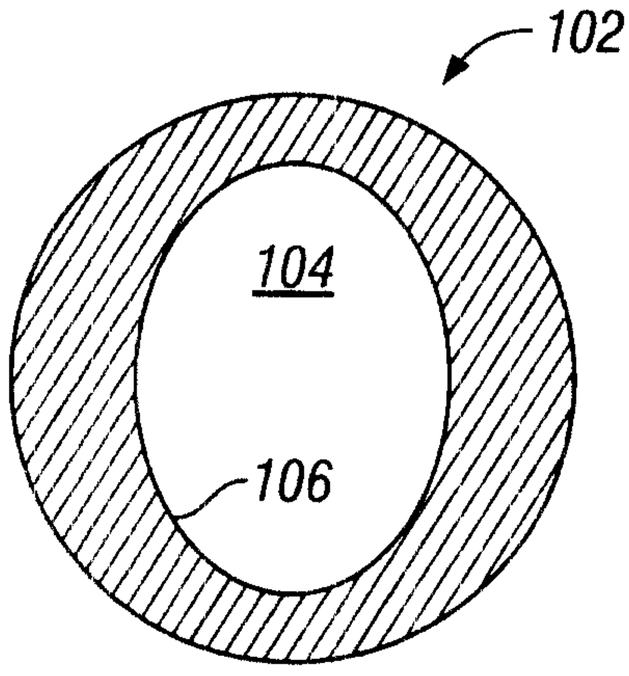


FIG. 13

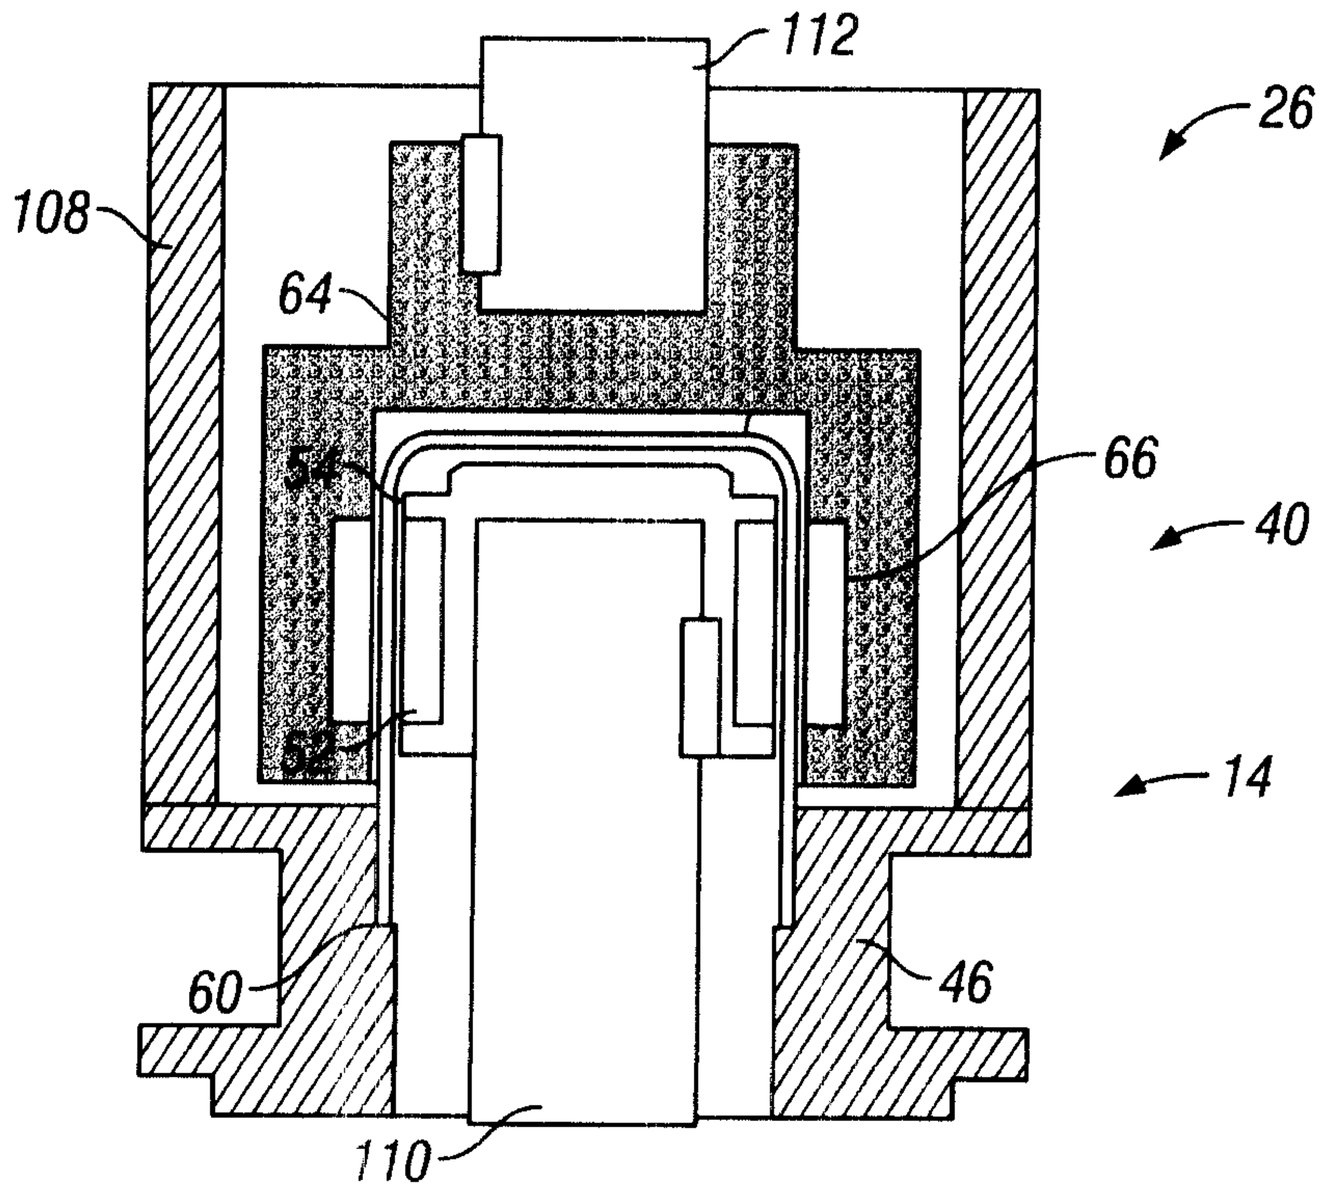
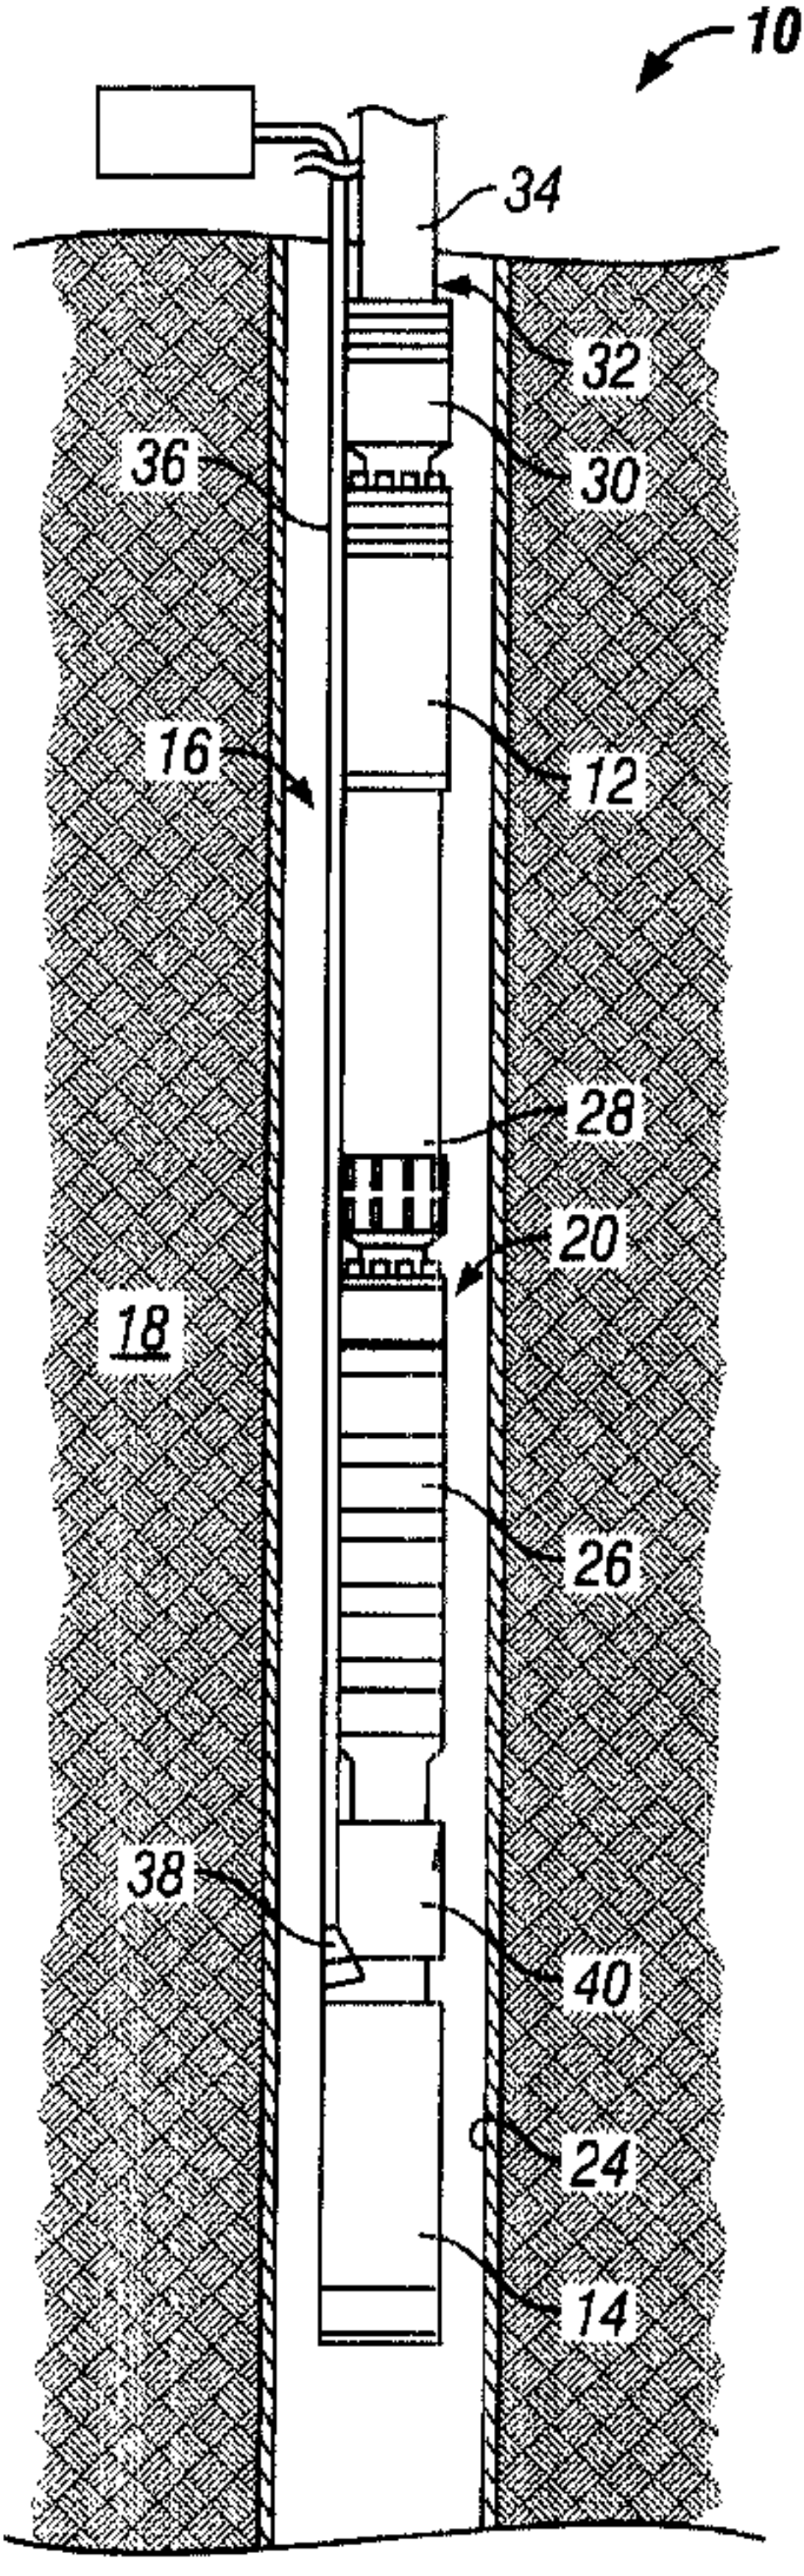


FIG. 14


10
34
32
36
30
16
12
28
20
18
26
38
40
24
14