

(51) International Patent Classification:
B29C 43/16 (2006.01)(21) International Application Number:
PCT/IB2014/002658(22) International Filing Date:
19 September 2014 (19.09.2014)

(25) Filing Language: English


(26) Publication Language: English

(30) Priority Data:
61/879,789 19 September 2013 (19.09.2013) US(71) Applicant: **MAGNA INTERNATIONAL INC.**
[CA/CA]; 337 Magna Drive, Aurora, ON L4G 7K1 (CA).

(72) Inventors; and

(71) Applicants (*for US only*): **WILKES, Richard, John**
[CA/CA]; 10 Ontario Street, Alliston, ON L9R 1H8 (CA).
ZELINA, Owen, Michael [CA/CA]; 53 Tessler Crescent,
Brampton, ON L6X 4P7 (CA). **NIU, Xiaoping** [CA/CA];
90 Rushingbrook Drive, Richmond Hill, ON L4B 1G2
(CA).(74) Agent: **GOWLING LAFLEUR HENDERSON LLP**;
Suite 1600, 1 First Canadian Place, 100 King Street West,
Toronto, Ontario M5X 1G5 (CA).(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).**Published:**— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

(54) Title: HIGH-PRESSURE DIE CASTING APPARATUS AND METHOD

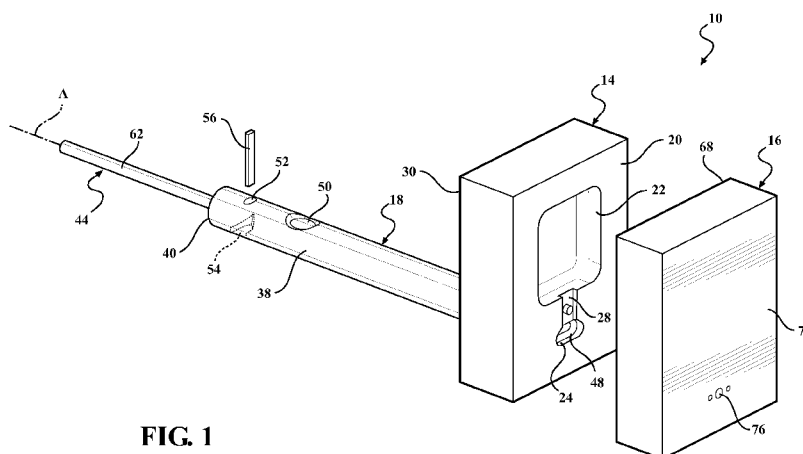**FIG. 1**(57) **Abstract:** A high-pressure die casting apparatus includes a shot sleeve extending through a first die half to a molding surface, and a plunger received in the shot sleeve. The shot sleeve includes a side wall presenting a fluid passageway and a partial end wall disposed in a fixed position relative to the side wall. The partial end wall defines a wall opening adjacent the molding surface. Fluid is poured into the shot sleeve while the die apparatus is open, and the partial end wall prevents the fluid from flowing out of the shot sleeve. The plunger then presses the material into the mold cavity until only a portion of the material remains in the shot sleeve and blocks the wall opening. After the solidified material is ejected from the apparatus, the portion of material blocking the wall opening prevents lubricant from entering the shot sleeve.

HIGH-PRESSURE DIE CASTING APPARATUS AND METHOD

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This PCT Patent Application claims the benefit of U.S. Provisional Patent Application Serial No. 61/879,789 filed September 19, 2013, entitled “High Pressure Die Casting Apparatus And Method,” the entire disclosure of the application being considered part of the disclosure of this application and hereby incorporated by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The invention relates generally to an apparatus and method for high-pressure die casting.

2. Related Art

[0002] High-pressure die casting is oftentimes used to manufacture parts formed of metal or another material. A high-pressure die casting apparatus typically includes a first die half and a second die half each presenting a molding surface. When the die apparatus is closed, the molding surfaces present a mold cavity therebetween. A shot sleeve extends through one of the die halves and conveys molten material to the mold cavity. In a conventional high-pressure die casting process, the molten material is not poured into the shot sleeve until the die apparatus is closed, otherwise the molten material will flow out of the shot sleeve causing a potential safety issue and causing the casting process to fail.

[0003] U.S. Patent Application Publication No. 2009/0211724 (the ‘724 publication) discloses a die casting device and method providing reduced cycle times and thus an advantage over the conventional casting process. The die casting device includes molding surfaces presenting a mold cavity therebetween, a shot sleeve having an opening along one of the molding surfaces, and a slider disposed along the molding surface adjacent

the opening of the shot sleeve. The slider at least partially seals the opening while molten material is poured into the shot sleeve. Thus, the molten material can be poured into the shot sleeve when the die casting device is still open, which reduces the cycle time. After the solidified part is ejected from the device and the excess material is removed from the shot sleeve, the method includes spraying a lubricant onto the molding surfaces in preparation for the next casting cycle. However, there are several potential problems associated with the device and method described in the '724 publication which could increase cycle time and decrease productivity. For example, the slider could malfunction and may not correctly align with the opening of the shot sleeve. The slider could also cause excessive material flashes or blockage along the opening of the shot sleeve, due to high-pressure and dynamic impact of the material against the slider. In addition, the lubricant sprayed onto the molding surfaces could become entrapped in the shot sleeve.

SUMMARY OF THE INVENTION

[0004] The invention provides a die apparatus for die casting. The die apparatus comprises a first die half having a first molding surface and a second die half having a second molding surface, and the molding surfaces present a mold cavity therebetween. A shot sleeve extends through the first die half to the first molding surface and includes a side wall presenting a fluid opening for conveying fluid. The side wall extends to a partial end wall which defines at least one wall opening for allowing fluid to flow from the fluid opening toward the mold cavity. The partial end wall prevents the fluid from flowing out of the shot sleeve and thus allows the fluid to be poured into the shot sleeve when the die apparatus is still open. A plunger is disposed in the shot sleeve for pressing the fluid through the at least one wall opening and into the mold cavity. According to one embodiment, a material separator is disposed along one of the molding surfaces and is movable relative to the molding surface. In another embodiment, at least one hold pin

extends upwardly from the second molding surface, and each of the hold pins is axially aligned with one of the wall openings.

[0005] The invention also provides a die casting method. The method comprises disposing fluid in the shot sleeve while the first molding surface is spaced from the second molding surface, and then moving at least one of the die halves toward the other to present the mold cavity therebetween. The method next includes pressing the fluid through the wall opening of the shot sleeve into the mold cavity until only a portion of the fluid remains in the shot sleeve and blocks the wall opening. The method then includes moving at least one of the die halves away from the opposite die half while the portion of the fluid blocks the wall opening and is at least partially molten.

[0006] The apparatus and method of the present invention provides several advantages over conventional die apparatuses and methods used for die casting, such as the die casting device and method described in the '724 publication. The stationary partial end wall of the shot sleeve allows the fluid to be poured into the shot sleeve while the die apparatus is still open, for example while spraying lubricant onto the molding surfaces. Furthermore, the die apparatus can be re-opened before the biscuit fully solidifies, which also reduces the cycle time. In addition, after the solidified material is ejected from the die casting apparatus, the portion of material remaining in the shot sleeve blocks the at least one wall opening and thus prevents the lubricant spray from entering the shot sleeve, which improves productivity of the casting process.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Other advantages of the present invention will be readily appreciated, as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

[0008] Figure 1 is a perspective view of a die apparatus in an open position at the beginning of a casting process according to a first exemplary embodiment;

[0009] Figure 2 is a cross-sectional view of the exemplary die apparatus of Figure 1;

[0010] Figure 2A is an enlarged view of a portion of the die apparatus of Figure 2 showing a die opening of a first die half and a wall opening of a shot sleeve;

[0011] Figure 2B is an enlarged view of another portion of the die apparatus of Figure 2 showing a serrated surface of a plunger head;

[0012] Figure 2C is an enlarged view of yet another portion of the die apparatus of Figure 2 showing a hold pin disposed in a second die half;

[0013] Figure 2D is a front perspective view of a plunger head having a dove tail design;

[0014] Figure 3 is a cross-sectional view of the first exemplary die apparatus showing fluid disposed in the shot sleeve while the die apparatus is open;

[0015] Figure 4 is a cross-sectional view of the first exemplary die apparatus showing fluid disposed in the shot sleeve when the die apparatus is closed;

[0016] Figure 5 is a cross-sectional view of the first exemplary die apparatus showing fluid pressed into a mold cavity by the plunger and a biscuit remaining in the shot sleeve when the die apparatus is closed;

[0017] Figure 6 is a cross-sectional view of the first exemplary die apparatus after the die apparatus is opened and the biscuit is separated from the solidified material on the molding surface;

[0018] Figure 7 is a cross-sectional view of the first exemplary die apparatus after the solidified material is ejected from the molding surface and after the biscuit is removed from the shot sleeve;

[0019] Figure 8 is a perspective view of the die apparatus in the open position at the beginning of the casting process according to a second exemplary embodiment;

[0020] Figure 9 is a cross-sectional view of the second exemplary die apparatus showing fluid disposed in the shot sleeve while the die apparatus is open;

[0021] Figure 9A is an enlarged view of a portion of the upper die half of the die apparatus of Figure 9;

[0022] Figure 9B is an enlarged view of a portion of the lower die half of the die apparatus of Figure 9;

[0023] Figure 10 is a cross-sectional view of the second exemplary die apparatus showing fluid disposed in the shot sleeve when the die apparatus is closed;

[0024] Figure 11 is a cross-sectional view of the second exemplary die apparatus showing fluid pressed into the mold cavity by the plunger and the biscuit remaining in the shot sleeve when the die apparatus is closed;

[0025] Figure 12 is a cross-sectional view of the second exemplary die apparatus after the die apparatus is open, solidified material is ejected from the molding surface, and the biscuit is removed from the shot sleeve.

DETAILED DESCRIPTION OF THE ENABLING EMBODIMENT

[0026] The invention provides a die apparatus **10** for die casting of parts **12**, such as high-pressure die casting of chassis or body components for automotive vehicles. The die apparatus **10** is typically used to cast metal parts, such as parts formed of aluminum. However, the die apparatus **10** can also be used to cast parts formed of other materials. The die apparatus **10** comprises a first die half **14**, a second die half **16**, and shot sleeve **18** which are capable of providing a reduced cycle time and increased productivity. A perspective view of the die apparatus **10** according to a first exemplary embodiment is shown in Figure

1. Figures 2-7 are cross-sectional views of the first exemplary die apparatus **10** during different stages of the casting process.

[0027] In the exemplary embodiment of Figures 1-7, the first die half **14** comprises a block with a first molding surface **20** facing the second die half **16**. The first die half **14** is fixed in position relative to the second die half **16**, and the two die halves **14**, **16** provide a mold cavity therebetween when the die apparatus **10** is closed. Alternatively, the first die half **14** could be movable, and the second die half **16** could be fixed. The first molding surface **20** of the first die half **14** presents contour for shaping any type of fluid, which is typically a molten material. In the first exemplary embodiment, the first molding surface **20** presents a recessed area **22** for receiving the molten material and shaping the molten material into the part **12**. The shape and dimensions of the first molding surface **20** vary depending on the part **12** to be formed. The first molding surface **20** also presents a die opening **24** for receiving the molten metal from the shot sleeve **18**. A channel **28** extends from the die opening **24** to the recessed area **22** for conveying the molten material from the die opening **24** to the recessed area **22**. In the exemplary embodiment of Figures 1-7, the dimensions of the recessed area **22** are greater than the dimensions of the die opening **24** and greater than the dimensions of the channel **28**. However, the depth of the die opening **24** and the depth of the channel **28**, relative to the first molding surface **20**, are approximately equal.

[0028] The first die half **14** also includes a back surface **30** opposite the first molding surface **20**. A sleeve opening **32** for receiving the shot sleeve **18** extends continuously from the back surface **30** to the first molding surface **20**. In the first exemplary embodiment, the die opening **34** is part of, or in fluid communication with, the sleeve opening **32** so that the molten material can flow continuously through the shot sleeve **18** and the die opening **24** to the first molding surface **20**. The sleeve opening **32** also

extends to a support ledge **26** formed in the first die half **14** and defining the die opening **24**. The support ledge **26** is disposed parallel to the first molding surface **20**, as best shown in Figure 2A. The shot sleeve **18** is designed to fit securely in the sleeve opening **32** against the support ledge **26**. The sleeve opening **32** and the die opening **24** each present a cross-sectional area extending parallel to the first molding surface **20**, and the cross-sectional area of the die opening **24** is less than the cross-sectional area of the remaining portions of the rest of the sleeve opening **32**. In the exemplary embodiment, the sleeve opening **32** presents a cylindrical shape between the back surface **30** and the die opening **24**, and the cross-sectional area of the die opening **24** is approximately half of the cross-sectional area of the sleeve opening **32**. The support ledge **26** of the first die half **14** is designed to support the shot sleeve **18** and space the shot sleeve **18** from the first molding surface **20**. In the exemplary embodiment, the support ledge **26** extends parallel to the first molding surface **20** and traverse to the sleeve opening **32**. As shown in Figure 2A, the die opening **24** is tapered such that the cross-sectional area of the die opening **24** increases slightly in a direction moving toward the first molding surface **20**.

[0029] The first die half **14** also defines a material separator opening **34**, which in this embodiment is push pin opening, extending continuously from the back surface **30** to the channel **28** of the first molding surface **20**. The material separator opening **34** also presents a cross-sectional area parallel to the first molding surface **20**, which is less than the cross-sectional area of the sleeve opening **32**. A material separator **36**, which in this embodiment is a push pin, fits tightly in the material separator opening **34** and is capable of moving toward and away from the first molding surface **20**. At the end of the casting process, the material separator **36** assists in separating the portion of material remaining in the shot sleeve **18** from the material disposed between the first and second molding surfaces

20, 68. The material separator **36** also assists in ejecting the solidified material from the first molding surface **20**.

[0030] As stated above, the shot sleeve **18** is received in the sleeve opening **32** of the first die half **14** and conveys the molten material to the first molding surface **20**. In the exemplary embodiment, the shot sleeve **18** includes a side wall **38** extending along a center axis **A** from a first end **40** to a second end **42**. The side wall **38** also extends circumferentially around the center axis **A** and thus presents a tubular shape. The side wall **38** of the shot sleeve **18** also forms a fluid passage along the center axis **A** for conveying the molten material toward the mold cavity. The first end **40** of the shot sleeve **18** is open for receiving a plunger **44**, which will be discussed further below.

[0031] The shot sleeve **18** also includes a partial end wall **46** located at the second end **42** of the shot sleeve **18** to partially close the second end **42** and prevent the molten material from flowing to the first molding surface **20** when the die apparatus **10** is open. Thus, the molten material can be poured into the shot sleeve **18** when the die apparatus **10** is still open, unlike other die apparatuses which must be closed before the molten material is poured into the shot sleeve. The partial end wall **46** is disposed in a stationary, fixed position relative to the side wall **38**. The partial end wall **46** and the side wall **38** can comprise a homogenous, one-piece structure, or can comprise separate pieces fixed to one another. Unlike other die apparatuses with sliding end walls to expose the fluid passage, the partial end wall **46** of the present invention does not move relative to the side wall **38**. When the shot sleeve **18** is disposed in the sleeve opening **32** of the first die half **14**, the partial end wall **46** is disposed on and aligned with the support ledge **26** of the first die half **14**, as best shown in Figure 2A. The partial end wall **46** presents a cross-sectional area disposed parallel to said first molding surface **20** which is typically equal to or greater than one third of the cross-sectional area of the fluid passage. In an alternate embodiment, the

support ledge **26** could be removed, and the partial end wall **46** could present a portion the first molding surface **20**.

[0032] The side wall **38** and partial end wall **46** of the shot sleeve **18** together define a wall opening **48**, which is aligned with the die opening **24**, to allow the molten material to flow from the shot sleeve **18** into the mold cavity when the die apparatus **10** is closed. The wall opening **48** is typically disposed on one side of the shot sleeve **18**, and the partial end wall **46** is disposed on the other side. Like the die opening **24**, the wall opening **48** has a cross-sectional area extending parallel to the first molding surface **20**. In the first exemplary embodiment, the cross-sectional area of the wall opening **48** is approximately half of the cross-sectional area of the sleeve opening **32**. The partial end wall **46** and side wall **38** of the shot sleeve **18** are tapered around the wall opening **48**, such that the cross-sectional area of the wall opening **48** increases slightly in a direction moving toward the first molding surface **20**, just like the die opening **24**. The aligned wall opening **48** and die opening **24** can together be referred to as a sprue opening, because during the casting process, the molten material in the form of a sprue is disposed in those aligned openings **24**, **48**.

[0033] The side wall **38** of the shot sleeve **18** includes a pouring hole **50** for receiving the molten material. In the exemplary embodiment, the pouring hole **50** is located closer to the first end **40** than the second end **42**. The pouring hole **50** is also disposed on the same side of the shot sleeve **18** as the wall opening **48**, so that the partial end wall **46** prevents the molten material poured into the shot sleeve **18** from entering the mold cavity until the plunger **44** presses the material through the wall opening **48**.

[0034] In the first exemplary embodiment, the side wall **38** of the shot sleeve **18** also includes a receiving hole **52** on the same side as the pouring hole **50**. The receiving hole **52** is located between the pouring hole **50** and the first end **40**. A biscuit knock out

hole **54** is also provided in the shot sleeve **18**, directly opposite the receiving hole **52**. The receiving hole **52** receives a biscuit knock out component **56**, in this case a push pin, which is designed to push a portion of the material, referred to as a biscuit **58**, through the biscuit knock out hole **54**. This process is discussed further below.

[0035] The die apparatus **10** also comprises the plunger **44** received in the fluid passage of the shot sleeve **18** for pressing the molten material through the wall opening **48** of the shot sleeve **18** and into the mold cavity. As shown in the Figures, the plunger **44** includes a plunger rod **62** attached to a plunger head **64**. The plunger head **64** has the same shape as the fluid passage of the shot sleeve **18**, and a cross-sectional area approximately equal to that of the fluid passage, and thus fits tightly against the side wall **38** of the shot sleeve **18**. The plunger head **64** is capable of sliding along the side wall **38** toward the partial end wall **46** to press the molten material through the shot sleeve **18**. The plunger head **64** preferably presents a serrated surface **66** facing the partial end wall **46** for engaging the molten material during the casting process, which will be discussed further below. The serrated surface **66** includes serrations or notches for engaging the material. In the exemplary embodiment, the serrations comprise a dove tail design, as best shown in Figures 2B and 2D.

[0036] The die apparatus **10** of the first exemplary embodiment further includes the second die half **16**, which is aligned with the first die half **14** and movable relative to the first die half **14**. At the start of the casting process, the second die half **16** and first die half **14** are spaced from one another, which is referred to as the die apparatus **10** being open. The molten metal is poured into the shot sleeve **18** while the die apparatus **10** is open. Next, the second die half **16** moves toward the first die half **14** until the two halves **14**, **16** engage one another and present the mold cavity therebetween. This is referred to as the die

apparatus **10** being closed. The plunger **44** then presses the molten material into the mold cavity to form the part **12**.

[0037] As shown in the Figures, the second die half **16** also comprises a block of material with a second molding surface **68** facing and aligned with the first molding surface **20**, so that the molding surfaces **20**, **68** form the mold cavity therebetween when the die apparatus **10** is closed. The second molding surface **68** presents a contour for shaping the molten material, which in this case is a protruded area **70** having a shape and dimensions that match the recessed area **22** of the first die half **14**. However, the portion of the second molding surface **68** surrounding the protruded area **70** is flat and does not include any feature corresponding to the channel **28** or the die opening **24** of the first die half **14**.

[0038] The second die half **16** also includes a second back surface **72** opposite the second molding surface **68**. A hold pin opening **74** extends through the second die half **16** to the second molding surface **68**. In the exemplary embodiment, the hold pin opening **74** is aligned with the die opening **24** of the first die half **14**. Also, the cross-sectional area of the hold pin opening **74** is less than the cross-sectional area of the die opening **24**. A hold pin **76** is disposed in the hold pin opening **74** and remains in a fixed position throughout the casting process. The hold pin **76** is axially aligned with the die opening **24** of the first die half **14** and the wall opening **48** of the shot sleeve **18**. The hold pin **76** also has an enlarged head which is disposed slightly above the second molding surface **68** and tapers toward the second molding surface **68**, as best shown in Figure 2C. When the die apparatus **10** is closed, the head of the hold pin **76** is disposed in the die opening **24**, but not the wall opening **48**. During the casting process, the molten material flows around the hold pin **76** and into the mold cavity. The hold pin **76** increases the pressure along the die opening **24** and thus increases the rate at which the molten material flows into the mold cavity. The hold pin **76** also holds the part **12** on the molding surface **68** when the die apparatus **10** first

opens and before the part **12** is ejected, so that the part **12** does not immediately fall off the molding surface **68** when the second die half **16** moves away from the first die half **14**. A distributor, which is typically located in the moving die half and aligned with the opening of the shot sleeve, for guiding the molten material through the shot sleeve to the mold cavity, can be eliminated in the inventive die apparatus **10**. Ejection pins **78** are also typically received in the second die half **16**, as shown in Figure 7. The ejection pins **78** move upwardly and outwardly of the second molding surface **68** to eject the part **12** at the end of the casting process.

[0039] The invention also provides a method for die casting using the first exemplary die apparatus **10**. As shown in Figures 1 and 2, the method begins with the die apparatus **10** in the open position, wherein the first die half **14** and the second die half **16** are spaced from one another. The plunger **44** is received in the shot sleeve **18** such that the plunger head **64** is located between the pouring hole **50** and the receiving hole **52**. The serrated surface **66** of the plunger head **64** is aligned with an edge of the pouring hole **50** and does not block the pouring hole **50**. Also in the starting position, the biscuit knock out component **56** is outside of the receiving hole **52**, and the enlarged end of the hold pin **76** is disposed slightly past the second molding surface **68**.

[0040] While the die apparatus **10** is still open, the method includes pouring molten material, or another fluid, through the pouring hole **50** into the shot sleeve **18**. The molten material flows through the fluid passage toward the partial end wall **46** and the wall opening **48** of the shot sleeve **18**. The amount of molten material poured into the shot sleeve **18** and the rate at which the molten material is poured is such that the molten material remains below the wall opening **48** of the partial end wall **46** while the die apparatus **10** is still open. The molten material is poured into the shot sleeve **18** until it rises to a level along the partial end wall **46** which is slightly below the wall opening **48**, as shown in Figure 3. The partial

end wall **46** and the support ledge **26** of the upper die half **14** prevent the molten material from flowing out of the shot sleeve **18** onto the first molding surface **20**.

[0041] After the molten material is poured into the shot sleeve **18**, the method includes closing the die apparatus **10** by moving the second die half **16** toward the first die half **14** while maintaining the first die half **14** in a fixed position. Figure 4 shows the exemplary die apparatus **10** in the closed position with the molten material in the shot sleeve **18**. When the die apparatus **10** is closed, the outer edges of the first molding surface **20** engage the outer edges of the second molding surface **68**. Also, when the die apparatus **10** is closed, the recessed area **22** of the first molding surface **20** is slightly spaced from the protruded area **70** of the second molding surface **68**; and the die opening **24** and the channel **28** of the first molding surface **20** are slightly spaced from the opposing second molding surface **68** such that the first die half **14** and the second die half **16** form the mold cavity therebetween. As shown in Figure 4, when the die apparatus **10** is closed, the end face of the material separator **36** is aligned with the first molding surface **20**. Also, the enlarged end of the hold pin **76** is disposed slightly above the second molding surface **68** and is axially aligned with the die opening **24** of the first die half **14** and the wall opening **48** of the shot sleeve **18**.

[0042] The method next includes pushing the molten material through the wall opening **48** of the shot sleeve **18**, through the die opening **24** of the first die half **14**, around and past the enlarged head of the hold pin **76**, and into the mold cavity. This step includes moving the plunger **44** past the pouring hole **50** and toward the partial end wall **46** of the shot sleeve **18** so that the plunger head **64** pushes the molten material through wall opening **48**. As shown in Figure 5, the molten material flows into the mold cavity, fills the mold cavity, and conforms to the shape of molding surfaces **20**, **68**. The molten material fills the entire volume of the mold cavity along the recessed area **22**, the channel **28**, and the die

opening **24**. The plunger **44** stops moving before the serrated surface **66** of the plunger head **64** reaches the partial end wall **46** of the shot sleeve **18**, as shown in Figure 5. Thus, a portion of the molten material remains in the shot sleeve **18** and fills the fluid passage of the shot sleeve **18** between the serrated surface **66** of the plunger head **64** and the partial end wall **46**. The molten material extends continuously from the serrated surface **66** through the wall opening **48** and through die opening **24** to the mold cavity. The amount of material disposed along the recessed area **22** is referred to as the part **12**. The amount of material disposed in the wall opening **48** and die opening **24**, and along the channel **28** of the first die half **14**, is referred to as a runner **80**. The portion of material that remains in the shot sleeve **18** between the plunger head **64** and the partial end wall **46**, after the plunger **44** stops moving, is referred to as the biscuit **58**.

[0043] After the mold cavity is filled and the plunger **44** stops moving toward the partial end wall **46** of the shot sleeve **18**, the second die half **16** moves away from the first die half **14** such that the die apparatus **10** is open again. This step is conducted after the runner **80** and the part **12** are solidified, but while the biscuit **58** is still at least partially molten and not fully solidified. As soon the second die half **16** begins moving away from the first die half **14**, the biscuit **58** separates from the runner **80**, as shown in Figure 6. The material separator **36** assists with the separation of the biscuit **58** from runner **80** by pressing against the runner **80** as the second die half **16** begins moving away from the first die half **14**. The pressure applied to the runner **80** by the material separator **36** causes the biscuit **58** and runner **80** to separate from one another at the wall opening **48**, as shown in Figure 6. The biscuit **58** formed when the second die half **16** moves away from the first die half **14** has a generally flat surface extending continually along the partial end wall **46** and continuously along the wall opening **48** of the shot sleeve **18**. Thus, the biscuit **58** completely covers and seals the wall opening **48** of the shot sleeve **18**.

[0044] The method next includes allowing the runner **80** and part **12** to solidify on the second molding surface **68** of the second die half **16**, and then ejecting the solidified runner **80** and part **12** from the second die half **16**. As shown in Figure 7, the ejection pins **78** move upward past the second molding surface **68** to push the part **12** and runner **80** away from the second molding surface **68**. The pressure applied to the part **12** and the runner **80** by the ejection pins **78** causes the part **12** and runner **80** to disengage from the hold pin **76** and the protruded area **70** of the second molding surface **68**. The plunger **44** remains in the forward position during the ejecting step so that the serrated surface **66** of the plunger head **64** engages the biscuit **58** while the biscuit **58** solidifies. The biscuit **58** completely covers the wall opening **48** of the shot sleeve **18** during the ejecting step, both before and after the biscuit **58** is solidified.

[0045] After the runner **80** and part **12** are ejected from the die apparatus **10**, the method includes spraying the molding surfaces **20, 68** with a lubricant in preparation for the next casting cycle. During the spraying step, the plunger **44** remains in the forward position so that the serrated surface **66** of the plunger head **64** still engages the biscuit **58**, and the solidified biscuit **58** completely covers the wall opening **48** of the shot sleeve **18**. The biscuit **58** seals the wall opening **48** and prevents any lubricant from entering the shot sleeve **18** during the spraying step, which is an advantage over the process described in the '724 publication.

[0046] After the molding surfaces **20, 68** are sprayed with the lubricant, the method includes moving the plunger **44** away from the second end **42** and back toward the first end **40** of the shot sleeve **18**. During this step, the serrated surface **66** of the plunger head **64** remains secured to the solidified biscuit **58** and pulls the biscuit **58** away from the partial end wall **46** and toward the first end **40** of the shot sleeve **18**. The dove tail design is preferred for holding the biscuit **58** while moving the biscuit **58** toward the first end **40** of

the shot sleeve **18**. The plunger **44** moves toward the first end **40** of the shot sleeve **18** until the biscuit **58** is aligned with the biscuit knock out hole **54** and the serrated surface **66** of the plunger head **64** is disposed between the biscuit knockout hole **54** and the first end **40** of the shot sleeve **18**, as shown in Figure 7.

[0047] The method next includes removing the solidified biscuit **58** from the shot sleeve **18** so that the shot sleeve **18** is free of material and is ready for the next casting cycle. This step includes pushing the biscuit **58** vertically through the biscuit knock out hole **54** and out of the shot sleeve **18**. In the exemplary embodiment, the biscuit knock out component **56** moves through the receiving hole **52** and pushes the biscuit **58** vertically out of the shot sleeve **18**. As shown in Figure 7, the serrated surface **66** of the plunger head **64** with the dove tail design is aligned with the receiving hole **52**, and the knock out component **56** slides along the dove tail design. The dove tail design guides the knock out component **56** through the shot sleeve **18**. Alternatively, the biscuit **58** can be removed horizontally, for example through the first or second end **40, 42** of the shot sleeve **18**.

[0048] After the biscuit **58** is removed from the shot sleeve **18**, the die apparatus **10** is ready for the next casting cycle. The method includes repeating the steps of pouring the molten material into the shot sleeve **18** while the die apparatus **10** is still open; followed by closing the die apparatus **10**; pushing the molten material into the mold cavity; opening the die apparatus **10**; ejecting the part **12**; and spraying the lubricant on the molding surfaces **20, 68** while the biscuit **58** blocks the wall opening **48** of the tubular sleeve **18**, as described above.

[0049] A perspective view of a die apparatus **110** according to a second exemplary embodiment is shown in Figure 8. Figures 9-12 are cross-sectional views of the second exemplary die apparatus **110** during different stages of the casting process.

[0050] In the second exemplary embodiment, the first die half **114** again comprises a block with the first molding surface **120** facing the second die half **116**. The first die half **114** is fixed in position relative to the second die half **116**, and the two die halves **114**, **116** provide a mold cavity therebetween when the die apparatus **110** is closed. The contour of the first molding surface **120** and the second molding surface **168** is different from the contour shown in Figures 1-7 and thus form a part **112** having a different design.

[0051] In the second exemplary embodiment, the die opening **124** of the first die half **114** is much larger than the die opening **14** of the first exemplary embodiment, and the support ledge **126** is a separate piece attached to the remaining block of the first die half **114**. Also in this embodiment, the material separator **136** is received in the die opening **124** and is spaced from the partial end wall **146** of the shot sleeve **118** by a spacer plate **182**. Instead of a single wall opening **48**, the partial end wall **146** defines a plurality of the wall openings **148** for allowing molten material, or another fluid, to flow from the shot sleeve **118** toward the mold cavity. The partial end wall **146** is again disposed in a stationary, fixed position relative to the side wall **138**. Preferably, the cross-sectional area of the partial end wall **146** is equal to or greater than one third of the cross-sectional area of the fluid passage.

[0052] The material separator **136** of the second exemplary embodiment comprises a break plate which is movable in a direction perpendicular to the first molding surface **120** toward the second molding surface **168**. A hydraulic or mechanical drive is typically used to move the material separator **136** relative to the first molding surface **120**. As best shown in Figure 9a, the material separator **136** of the second exemplary embodiment includes a plurality of connection openings **184**, and the spacer plate **182** includes a plurality of spacer openings **186** each aligned with one of the wall openings **148** for allowing molten material to flow from the shot sleeve **118**, through the spacer plate **182** and the material separator

136 into the mold cavity. Like the wall opening **48** and die opening **24** of the first exemplary embodiment, the wall openings **148**, connection openings **184**, and spacer openings **186** each present a cross-sectional area which increases in a direction moving toward the first molding surface **120**. The aligned wall opening **148**, connection opening **184**, and spacer opening **186** can together be referred to as a sprue opening, because during the casting process, the molten material in the form of a sprue is disposed in those aligned openings **148, 184, 186**.

[0053] Also in the apparatus **110** of the second embodiment, a plurality of hold pins **176** are disposed in the second die half **116**, and each hold pin **176** is aligned with one of the wall openings **148**. Unlike the hold pins **76** of the first embodiment, the hold pins **176** of the second embodiment present a cross-sectional area decreasing in a direction moving toward the first die half **114**. In addition, the hold pins **176** are movable relative to the second molding surface **168** and thus can assist in ejecting the finished part **112** from the second molding surface **168**.

[0054] As in the first exemplary embodiment, the shot sleeve **118** is received in the sleeve opening **132** of the first die half **114** and conveys the molten material toward the first molding surface **120**. The shot sleeve **118** again includes a pouring hole **150** for receiving the molten material which is located closer to the first end **140** than the second end **142** and is disposed on the same side of the shot sleeve **118** as the wall openings **148**. However, in this embodiment, the shot sleeve **118** is shorter and does not include the receiving hole **52** or the biscuit knock out hole **54**. Thus, instead of removing the biscuit **158** through the biscuit knock out hole **54**, the plunger **144** with the attached biscuit **158** is removed horizontally through the first end **140** of the shot sleeve **118**, and then the biscuit **158** is detached from the plunger head **164** by the knock out component **156**, which in this case is a knock out plate. Alternatively, the biscuit **158** can be removed vertically from the shot

sleeve **118**, for example by incorporating the biscuit knock out hole **54** is and receiving hole **52** into the shot sleeve **118**.

[0055] The apparatus **110** of the second exemplary embodiment further includes a shuttle **188** for moving the plunger **144** relative to the shot sleeve **118**. A tip ring **190** is disposed around the head **164** of the plunger **144**, and the shuttle **188** is designed to hold the plunger head **164** and tip ring **190** tightly against rotation. The plunger head **164** again includes the serrated surface **166**, preferably a dove tail design, as best shown in Figures 2, 2B, and 2D to engage the material in the shot sleeve **118**.

[0056] When the apparatus **110** of the second exemplary embodiment is used, the casting process begins by the shuttle **188** moving the plunger head **164** into the shot sleeve **118** such that the shuttle **188** and the plunger head **164** engage the first end **140** of the shot sleeve **118**, as shown in Figure 9. The molten material is then poured into the shot sleeve **118** while the die apparatus **110** is opened. Once the die apparatus **110** closes, the plunger head **164** slides through the shot sleeve **118** and presses the molten material through the wall openings **148** into the mold cavity, as shown in Figures 10 and 11. The die apparatus **110** then re-opens while the biscuit **158** is at least partially molten, and the material separator **136** separates the biscuit **158** from the rest of the material shaped between the first and second die halves **114**, **116**. The solidified material separated from the biscuit comprises the part **112**, the runner **180**, and a sprue **192**, as shown in Figure 12. The hold pins **176** can be moved relative to the second molding surface **168** to assist in ejecting the solidified material from the apparatus **110**. Once the solidified material is ejected, the molding surfaces **120**, **168** are sprayed with a lubricant. During the lubrication step, the biscuit **158** blocks the wall openings **148** and prevents the lubricant from entering the shot sleeve **118**. After the lubrication step, the shuttle **188** removes the plunger **144** from the shot sleeve **118** along with the solidified biscuit **158**, and the biscuit knock out component

156, which in this embodiment removes the biscuit **158** from the plunger head **164**, as shown in Figure 12.

[0057] Obviously, many modifications and variations of the present invention are possible in light of the above teachings and may be practiced otherwise than as specifically described with within the scope of the following claims.

CLAIMS**In the Claims:**

Claim 1. A die apparatus for die casting, comprising:

- a first die half having a first molding surface;
- a second die half having a second molding surface facing said first molding surface to present a mold cavity therebetween;
- a shot sleeve extending through said first die half toward said first molding surface;
- said shot sleeve including a side wall presenting a fluid opening for conveying fluid,
- said side wall extending to a partial end wall, the partial end wall defining at least one wall opening for allowing fluid to flow from said fluid opening toward said mold cavity;
- a plunger disposed in said shot sleeve for pressing fluid through said at least one wall opening; and
- a material separator disposed along one of said molding surfaces and movable relative to said molding surface.

Claim 2. The die apparatus of Claim 1, wherein said fluid passage presents a cross-sectional area disposed parallel to said first molding surface, said partial end wall of said shot sleeve presents a cross-sectional area greater than or equal to one third of said cross-sectional area of said fluid passage, and said partial end wall of said shot sleeve is disposed in a fixed position relative to said side wall and said first molding surface.

Claim 3. The die apparatus of Claim 1, wherein said material separator is a push pin received in said first die half and disposed along said first molding surface, and said push pin is movable in a direction perpendicular to said first molding surface.

Claim 4. The die apparatus of Claim 1, wherein said material separator is a break plate received in said first die half between said partial end wall of said shot sleeve and said first molding surface, said break plate is movable in a direction perpendicular to said first molding surface, said break plate defines at least one connection opening extending therethrough, and each connection opening is axially aligned with one of said wall openings for allowing fluid to flow from said shot sleeve through said break plate and toward said mold cavity.

Claim 5. The die apparatus of Claim 1, wherein said first die half comprises a block of material disposed in a fixed position relative to said second die half;

said first molding surface includes a contour for shaping the fluid;

said first die half includes a first back surface facing opposite said first molding surface and a sleeve opening extending continuously from said first back surface to said first molding surface;

said sleeve opening includes at least one die opening extending toward said first molding first, each of said die openings being axially aligned with one of said wall openings for conveying fluid from said fluid opening of said shot sleeve toward said first molding surface;

said first die half includes a support ledge disposed parallel to said first molding surface and defining said at least one die opening and spacing said shot sleeve from said first molding surface;

said first die half defines a material separator opening along said first molding surface for receiving said material separator;

said material separator is movable in a direction perpendicular to said first molding surface;

said side wall of said shot sleeve extends along a center axis from a first end to a second end and circumferentially around said center axis to form said fluid passage;

said fluid passage presents a cross-sectional area extending perpendicular to said center axis and parallel to said first molding surface;

said first end of said shot sleeve is open and receives said plunger;

said partial end wall of said shot sleeve is disposed in a fixed position and stationary relative to said side wall of said shot sleeve and said first molding surface;

said partial end wall of said first die presents a cross-sectional area extending perpendicular to said center axis and parallel to said first molding surface, and said cross-sectional area of said partial end wall is greater than or equal to one third of said cross-sectional area of said fluid passage, and said partial end wall is disposed along one side of said shot sleeve;

each of said wall openings of said shot sleeve presents a cross-section area extending perpendicular to said center axis and parallel to said first molding surface, said cross-sectional area of each wall opening is less than said cross-sectional area of said axially aligned die opening, and said cross-sectional area of each wall opening increases in a direction moving toward said axially aligned die opening;

said side wall of said shot sleeve defines a pouring hole disposed on a side of said shot sleeve opposite said partial end wall for receiving the fluid;

said plunger includes a plunger head presenting a cross-sectional area approximately equal to said cross-sectional area of said fluid passage of said shot sleeve;

said plunger head includes a serrated surface facing said second die half for engaging material contained in said shot sleeve;

at least one hold pin is received in said second die half and extends upwardly from said second molding surface, each of said hold pins is axially aligned with one of said die openings and one of said wall openings;

said second die half comprises a block of material aligned with and movable relative to said first die half;

said second molding surface presents a contour for shaping said fluid;

said second die half includes a second back surface facing opposite said second molding surface; and

said second die half defines at least one hold pin opening along said second molding surface, and each hold pin opening receives one of said hold pins.

Claim 6. A die apparatus for die casting, comprising:

a first die half having a first molding surface;

a second die half having a second molding surface facing said first molding surface to present a mold cavity therebetween;

a shot sleeve extending through said first die half toward said first molding surface, said shot sleeve including a side wall presenting a fluid opening for conveying fluid;

said side wall extending to a partial end wall, said partial end wall defining at least one wall opening for allowing fluid to flow from said fluid opening toward said mold cavity;

a plunger disposed in said shot sleeve for pressing fluid through said at least one wall opening; and

at least one hold pin extending upwardly from said second molding surface, and each of said hold pins being axially aligned with one of said wall openings.

Claim 7. The die apparatus of claim 6, wherein said hold pin includes an enlarged head presenting a cross-sectional area increasing in a direction moving toward said first die half.

Claim 8. The die apparatus of claim 6, wherein said hold pin presents a cross-sectional area decreasing in a direction moving toward said first die half.

Claim 9. A die casting method, comprising the steps of:
providing a die apparatus including a first die half having a first molding surface spaced from and facing a second molding surface of a second die half, and a shot sleeve disposed in the first die half, wherein the shot sleeve includes a partial end wall defining a wall opening for allowing fluid to flow from the shot sleeve toward the first molding surface;

disposing fluid in the shot sleeve while the first molding surface is spaced from the second molding surface;

moving at least one of the die halves toward the opposite die half to present a mold cavity therebetween;

pressing the fluid through the wall opening of the shot sleeve into the mold cavity until only a portion of the fluid remains in the shot sleeve and blocks the wall opening;

allowing the portion of fluid remaining in the shot sleeve to solidify into a solidified material; and

moving at least one of the die halves away from the opposite die half while the portion of fluid or material blocks the wall opening and is at least partially molten.

Claim 10. The method of claim 9 including spraying lubricant on at least one of the first and second molding surfaces while the portion of fluid or material blocks the wall opening.

Claim 11. The method of claim 9, wherein the step of disposing fluid in the shot sleeve includes pouring the fluid along one side of the shot sleeve so that the fluid contacts the partial end wall without flowing through the wall opening.

Claim 12. The method of claim 9 including separating the material disposed on the first die half from the material disposed on the second die half after the fluid disposed on the first and second die halves solidifies.

Claim 13. The method of claim 12, wherein the separating step includes using a push pin received in the first die half to separate the material disposed on the first die half from the material disposed on the second die half, and using the push pin to press the solidified material away from the first molding surface.

Claim 14. The method of claim 12, wherein the separating step includes using a break plate received in the first die half between the partial end wall of said shot sleeve and the first molding surface to separate the material disposed on the first die half from the material disposed on the second die half, and using the break plate to press the solidified material away from the first molding surface.


Claim 15. The method of claim 12, wherein a plunger including a serrated surface is disposed in the shot sleeve, and the step of pressing the fluid through the wall

opening includes engaging the fluid with the serrated surface and sliding the plunger toward the wall opening; and further including:

allowing the portion of fluid to solidify into a solidified material along the serrated surface of the plunger;

sliding the plunger away from the wall opening; and

removing the solidified portion of material from the serrated surface of the plunger.

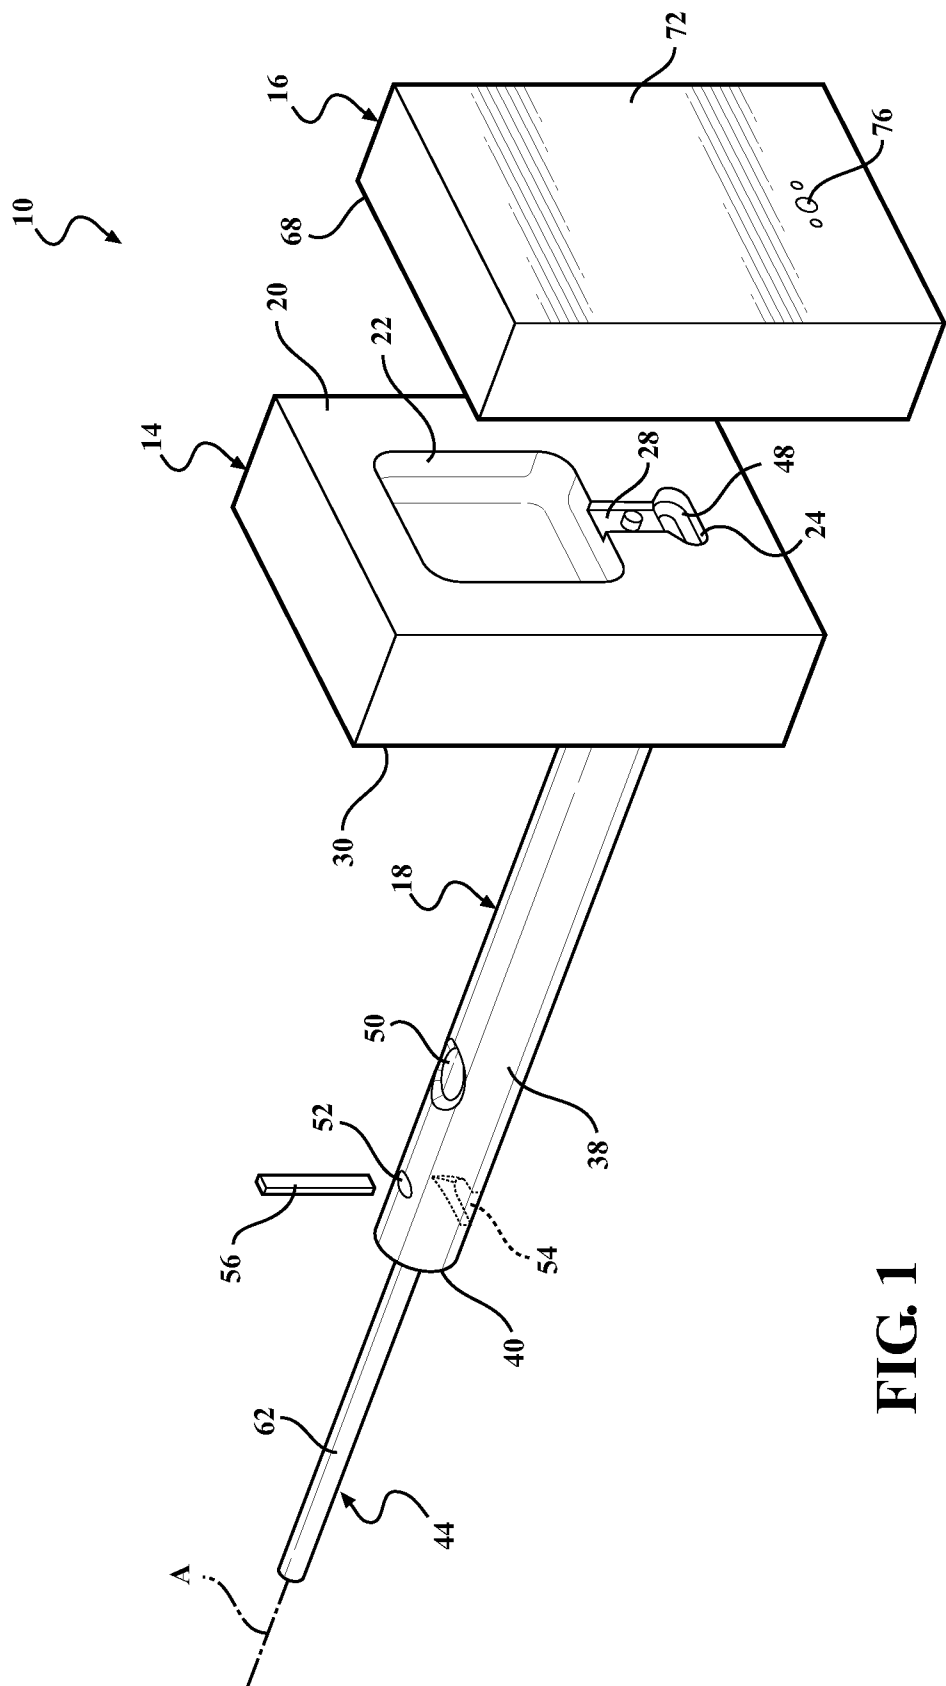

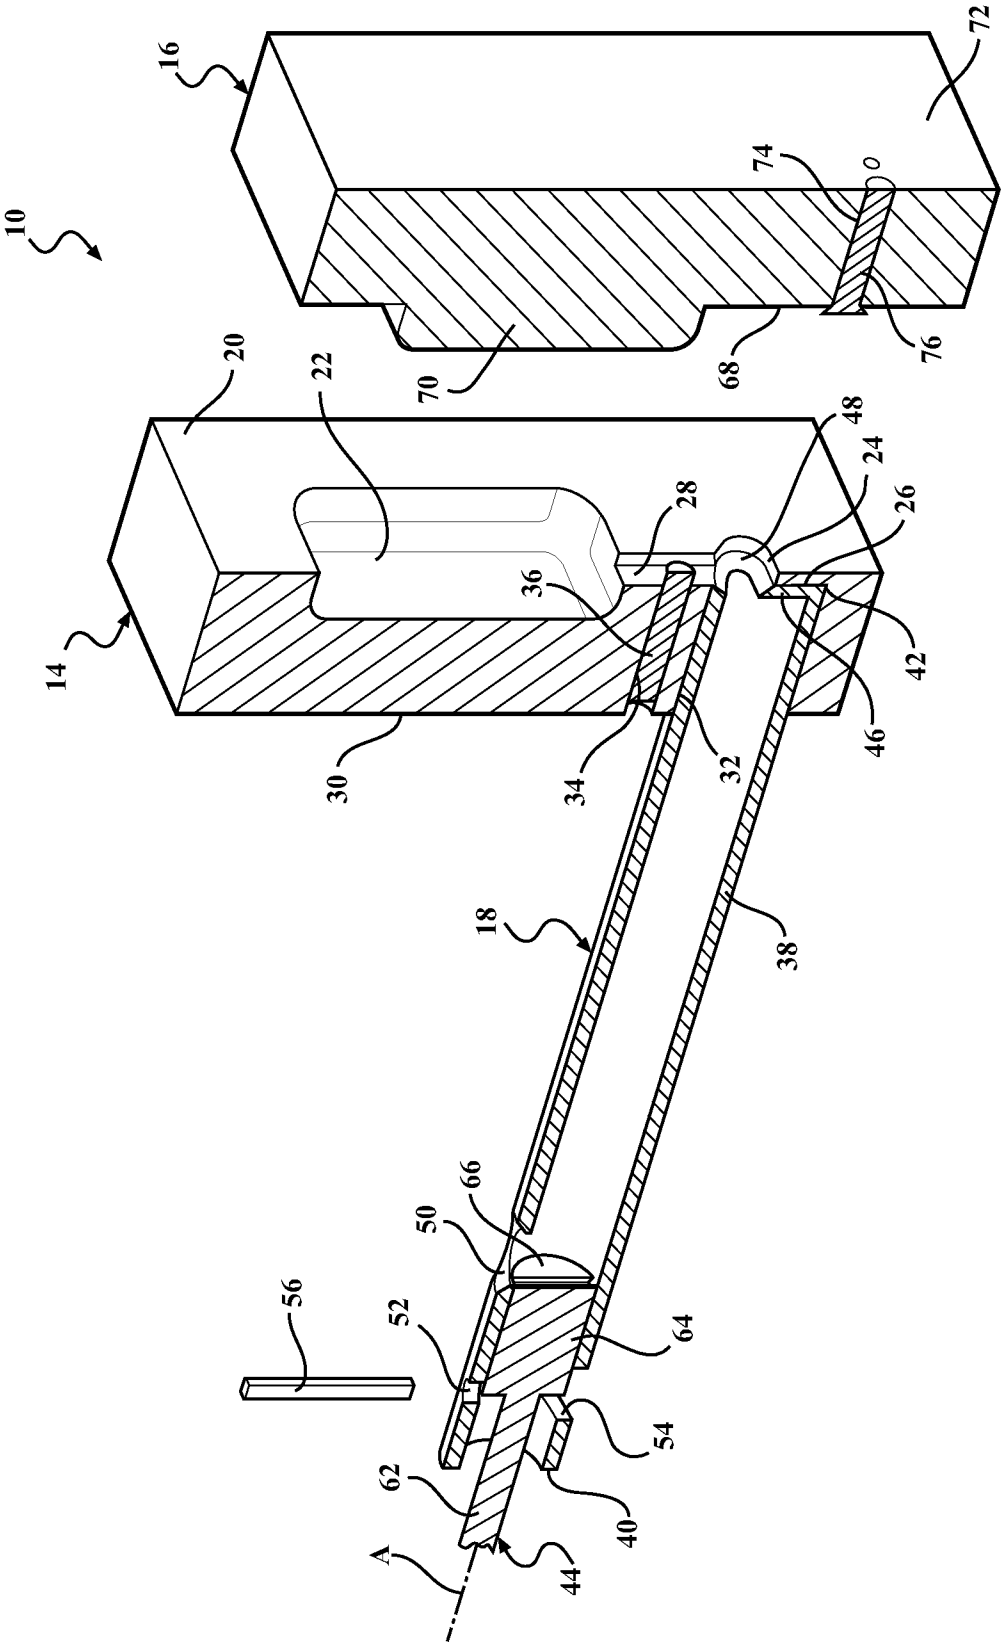


FIG. 2

FIG. 2A

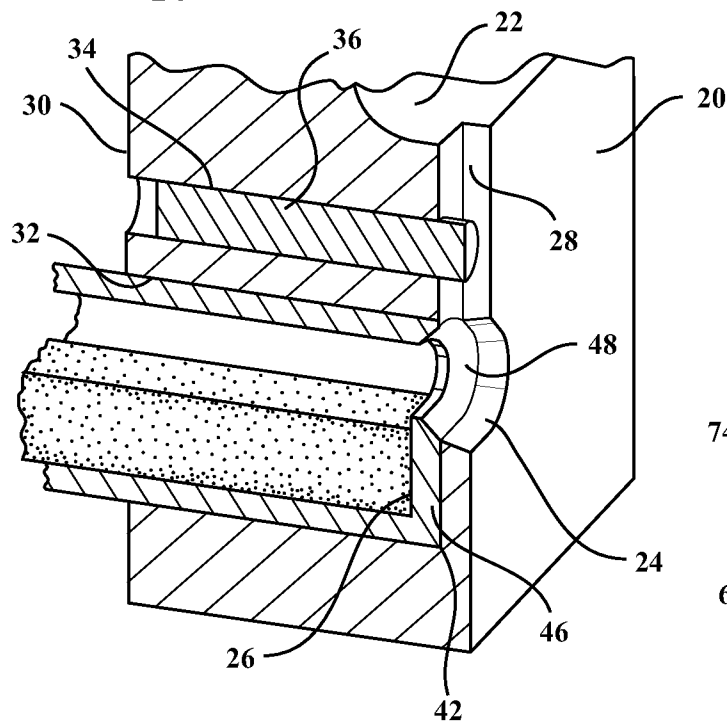
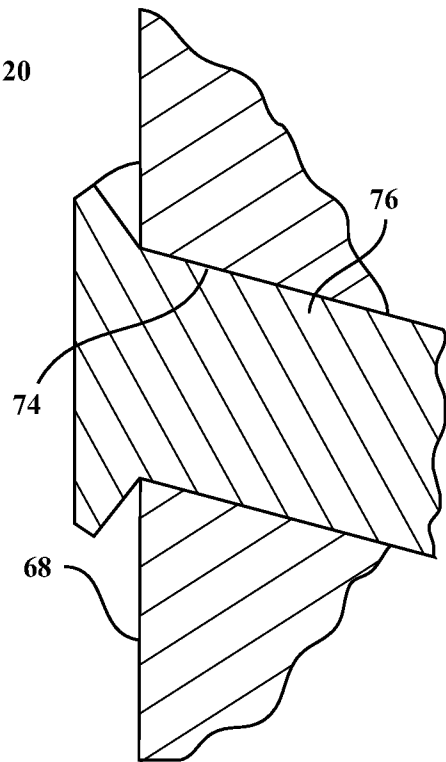


FIG. 2B

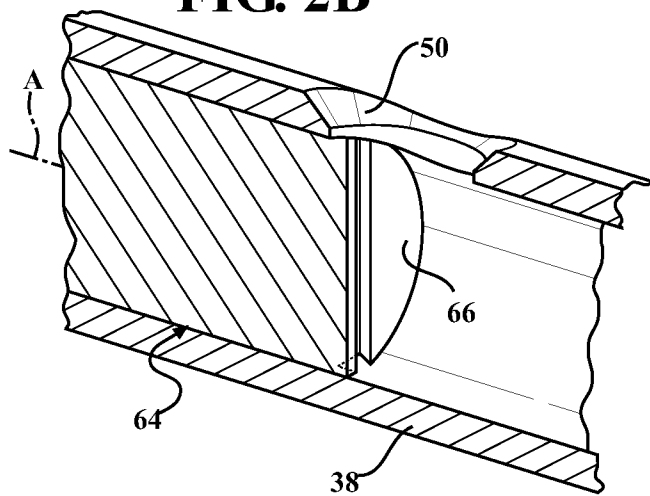
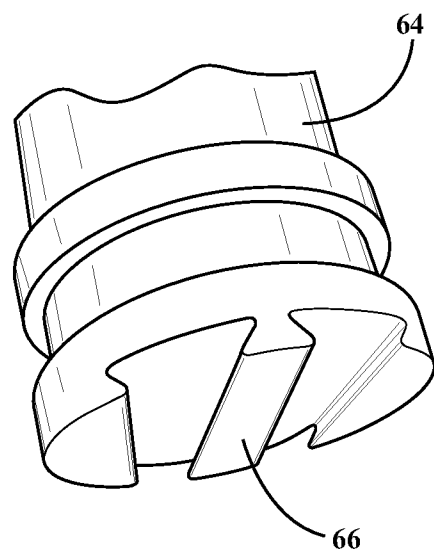
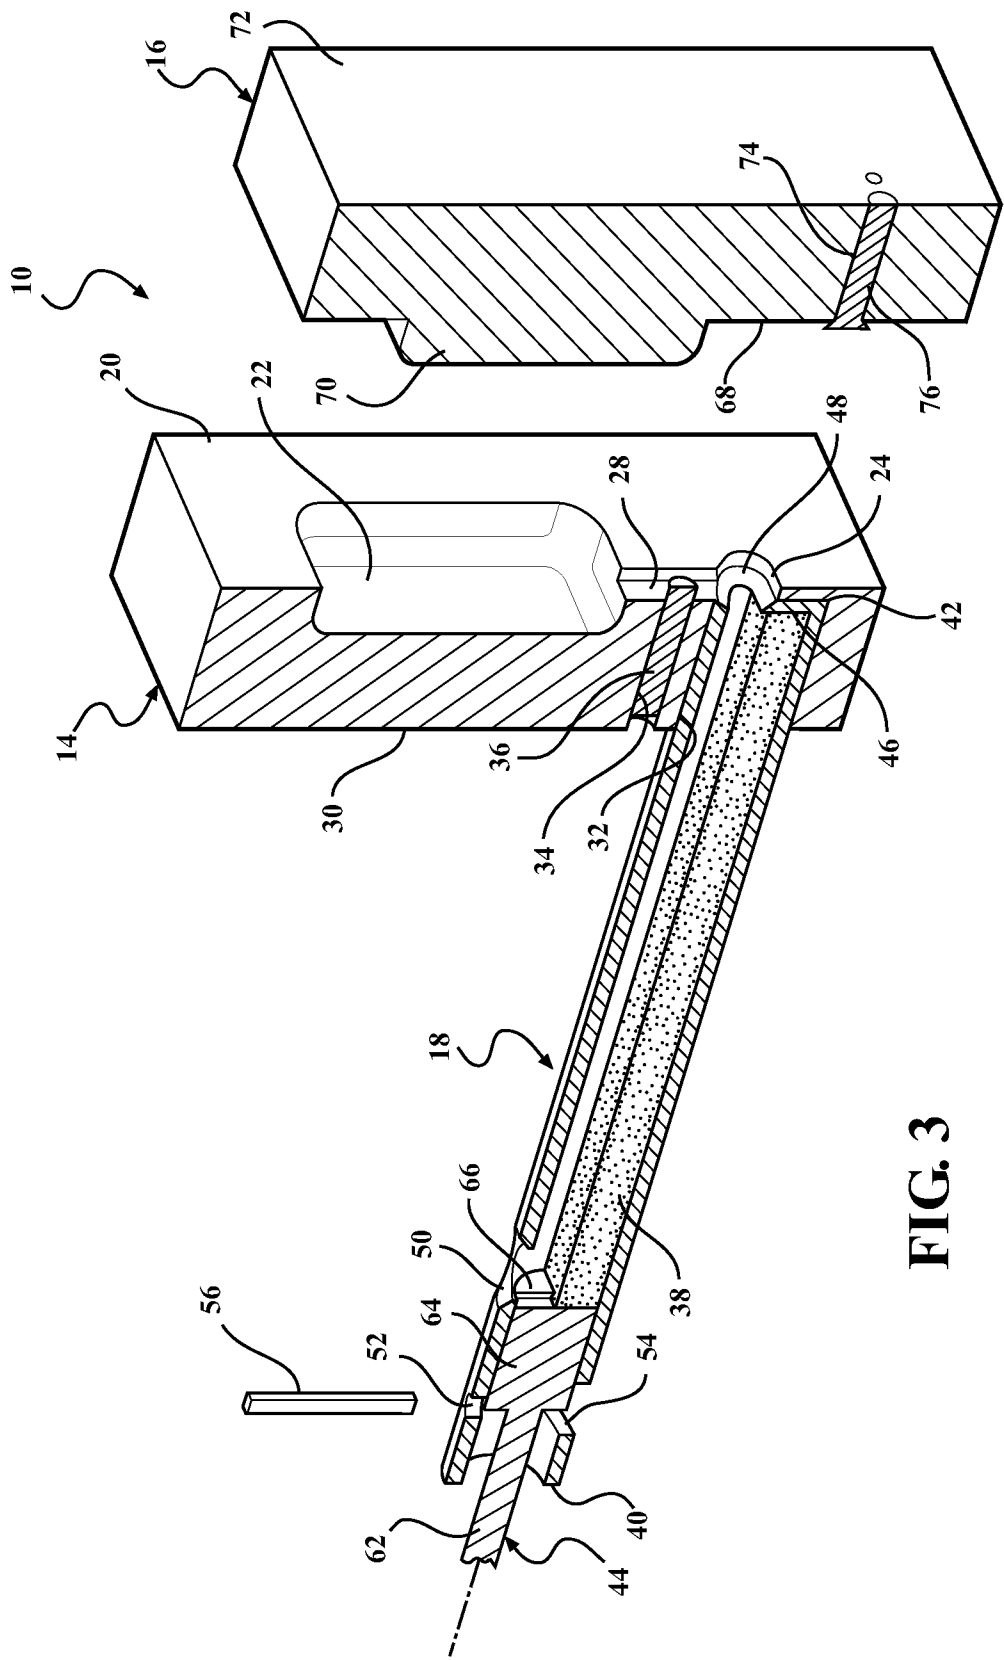


FIG. 2C

FIG. 2D





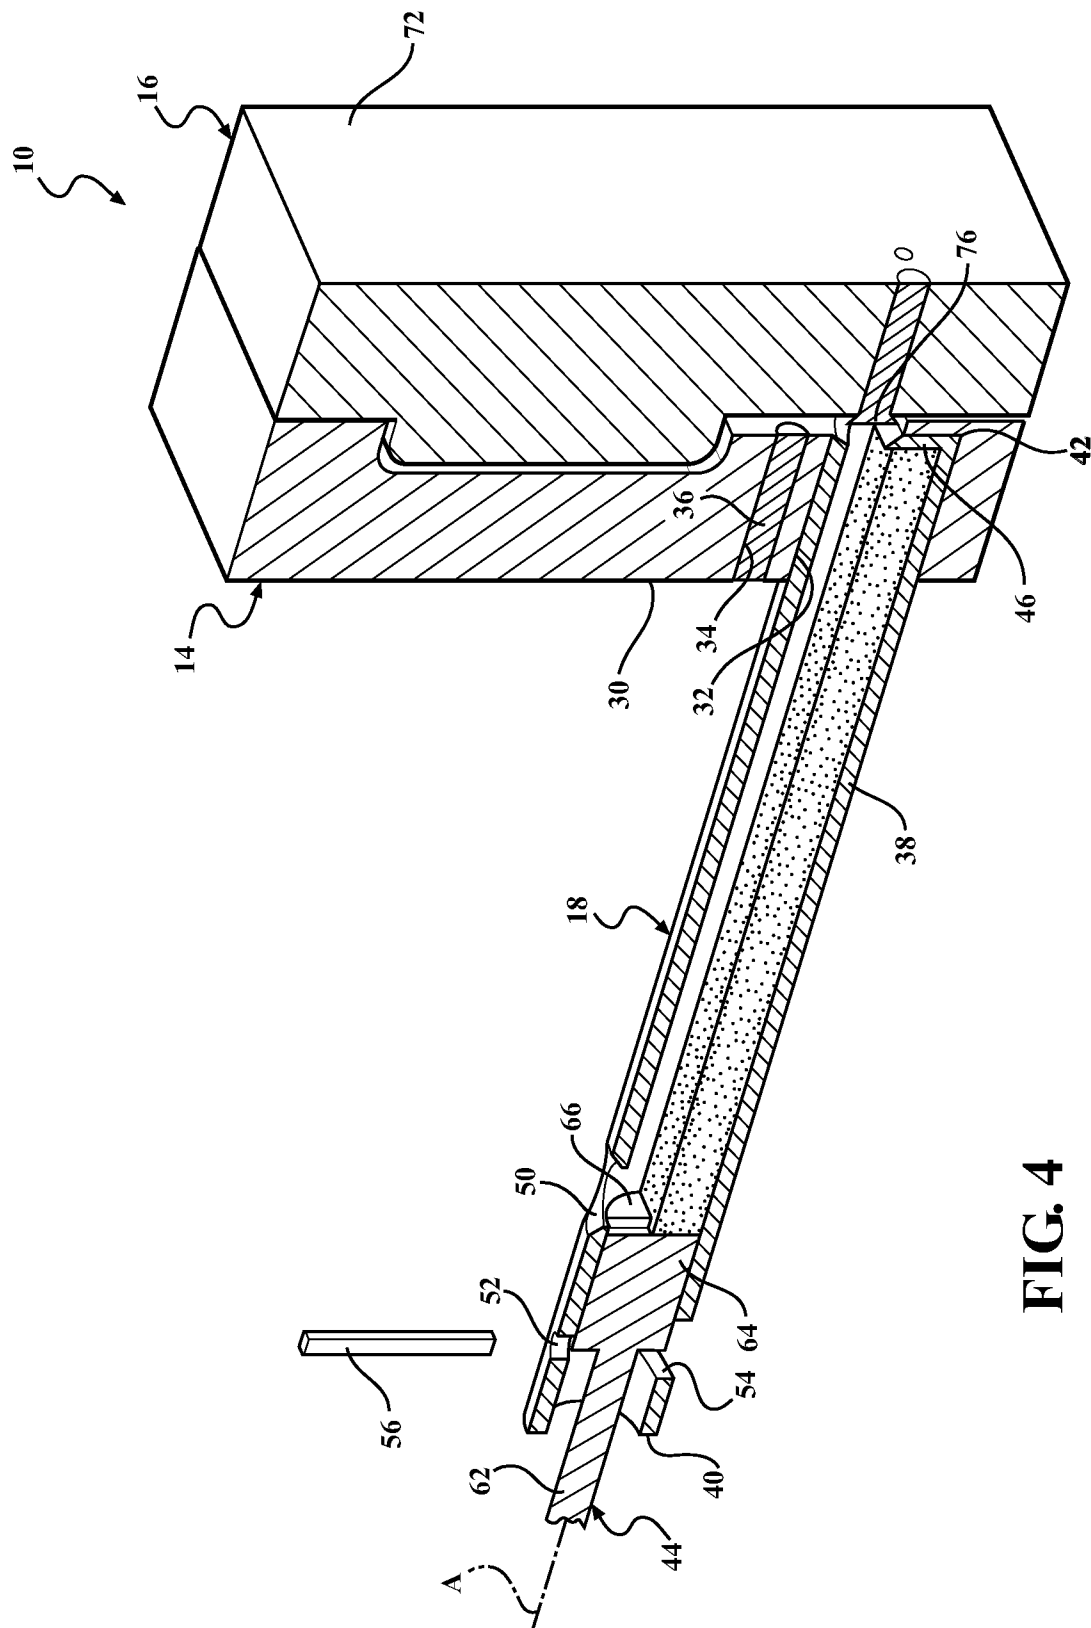


FIG. 4

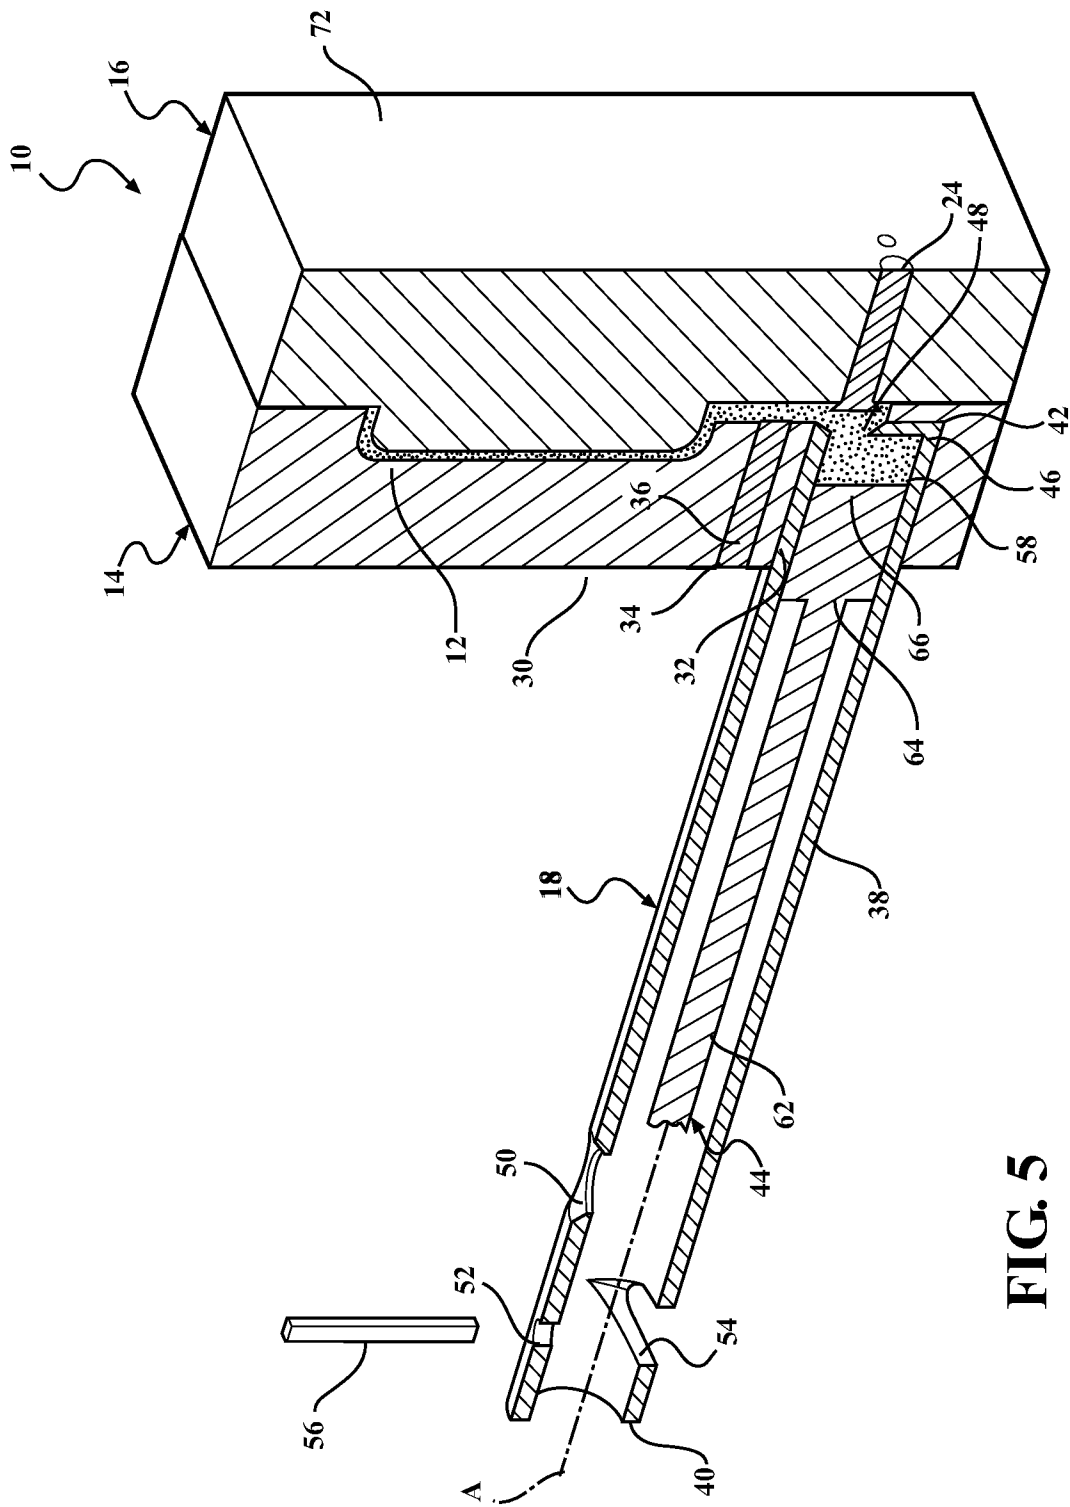


FIG. 5

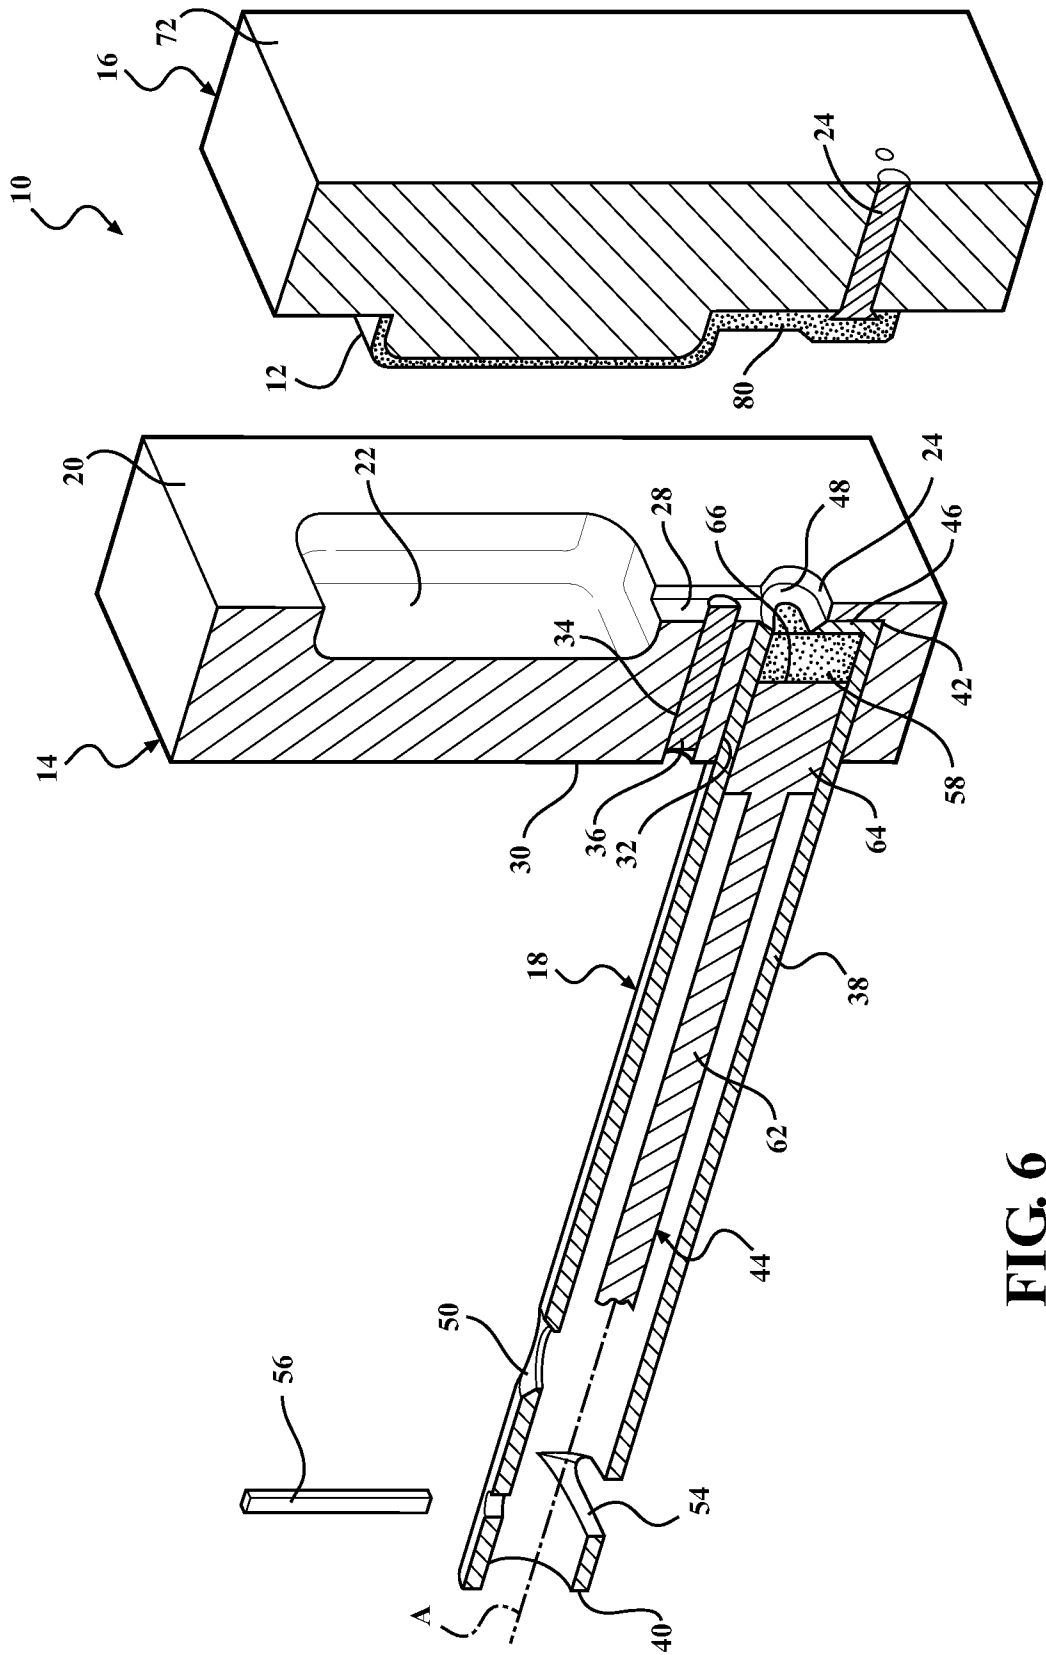
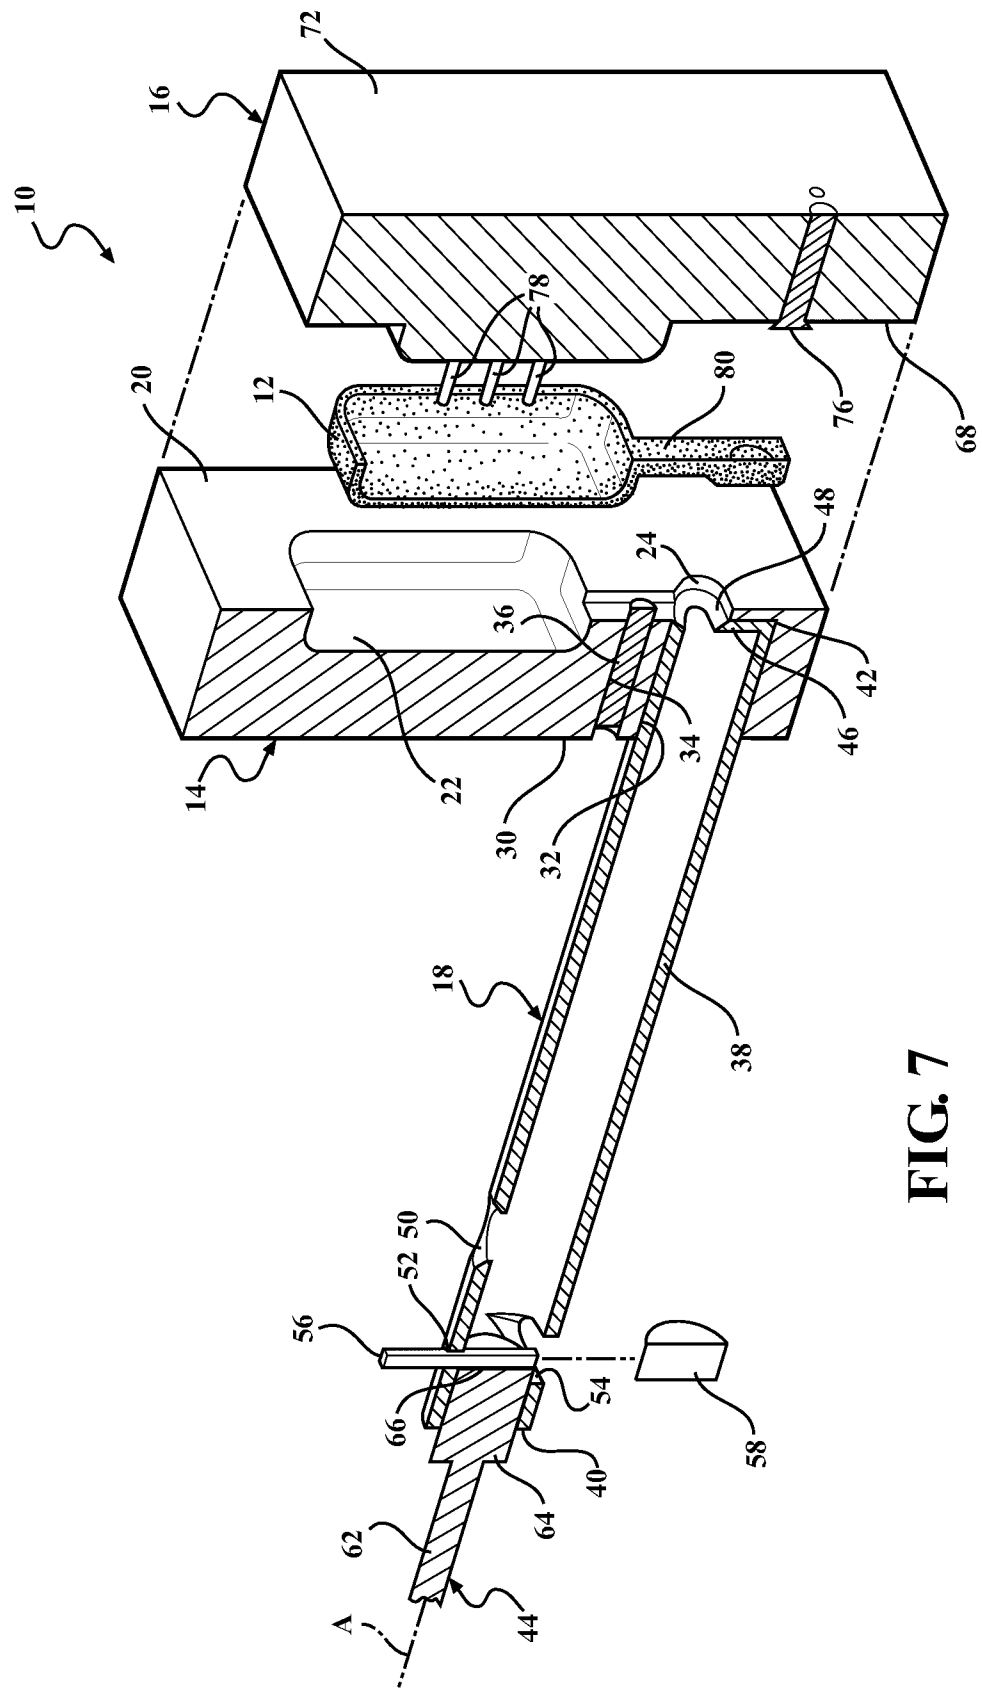


FIG. 6



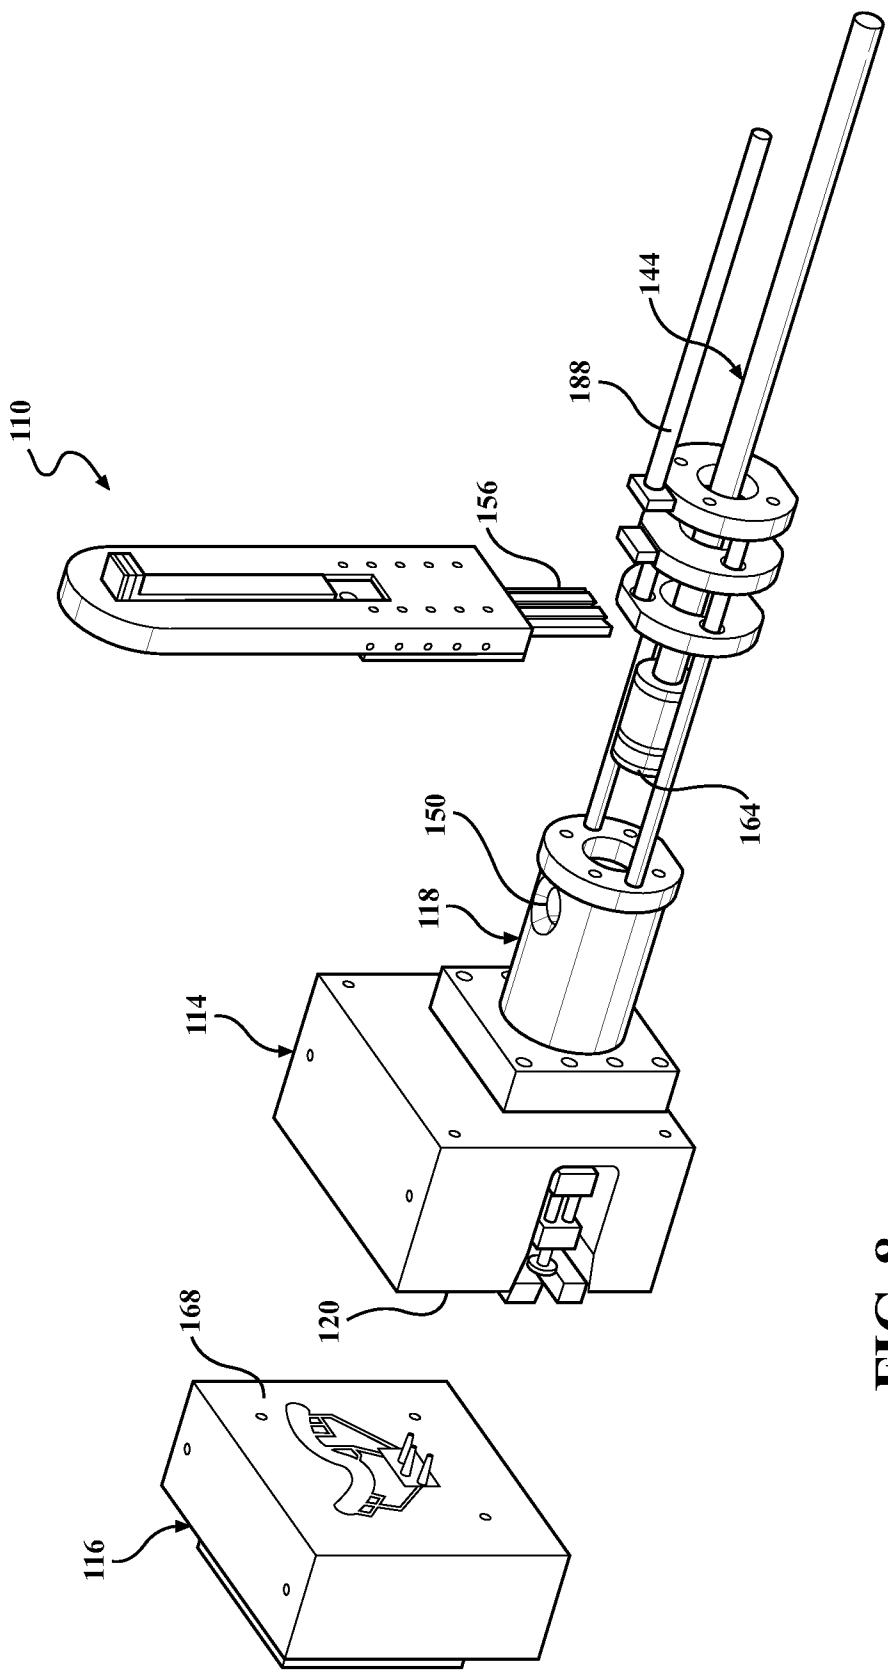
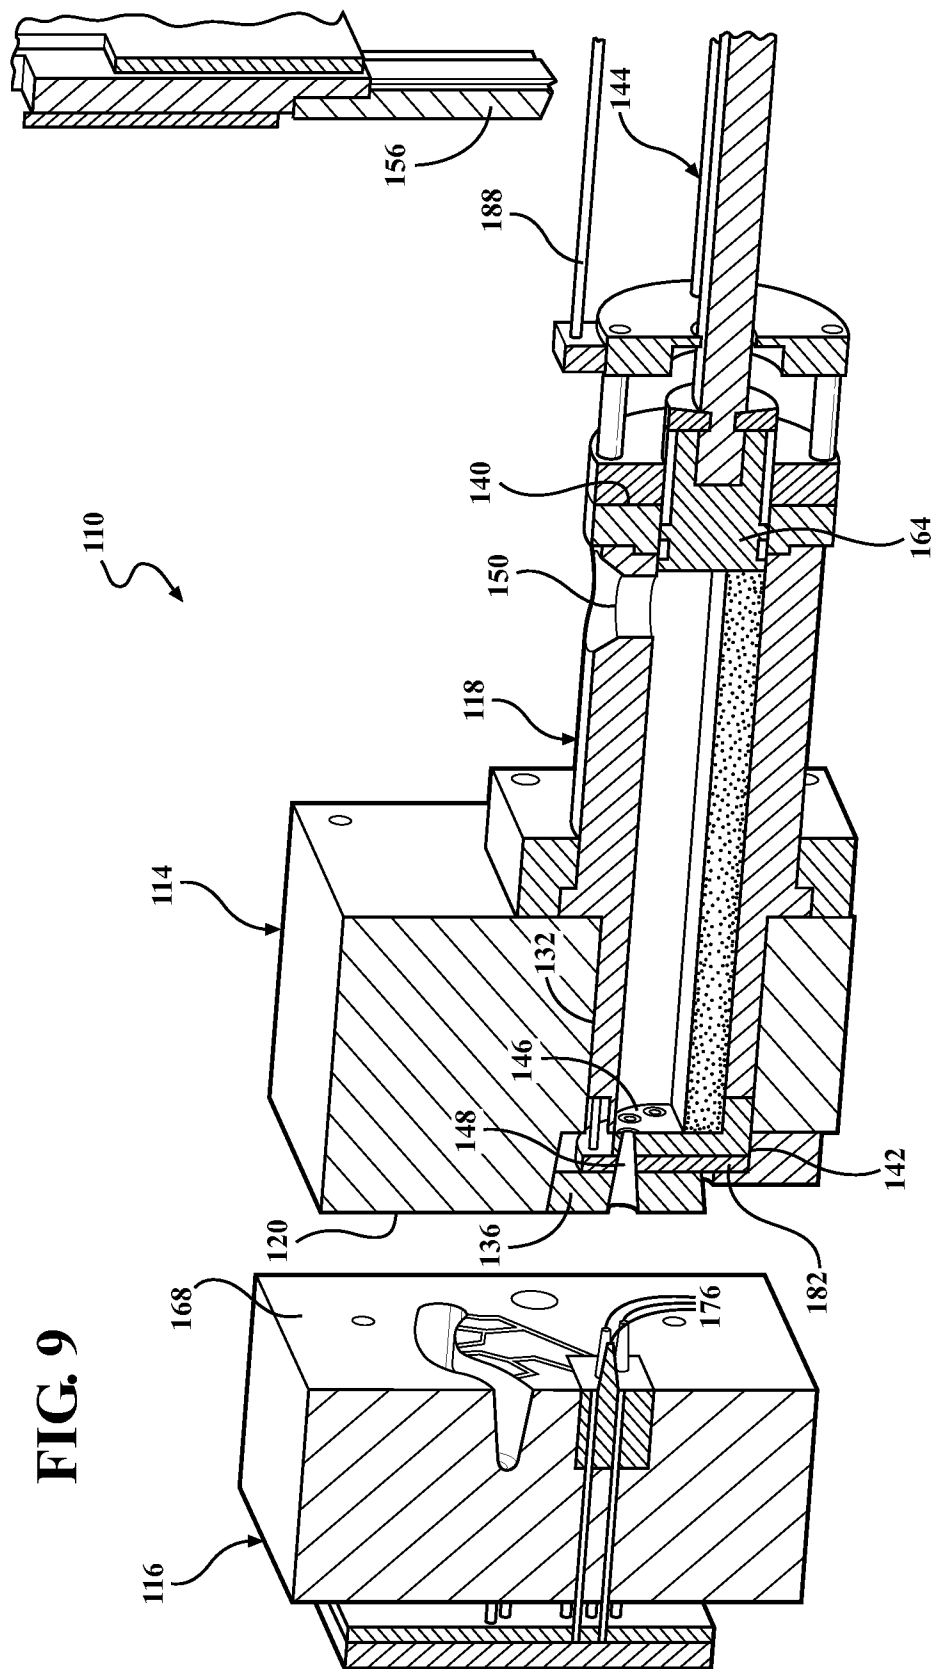


FIG. 8

FIG. 9



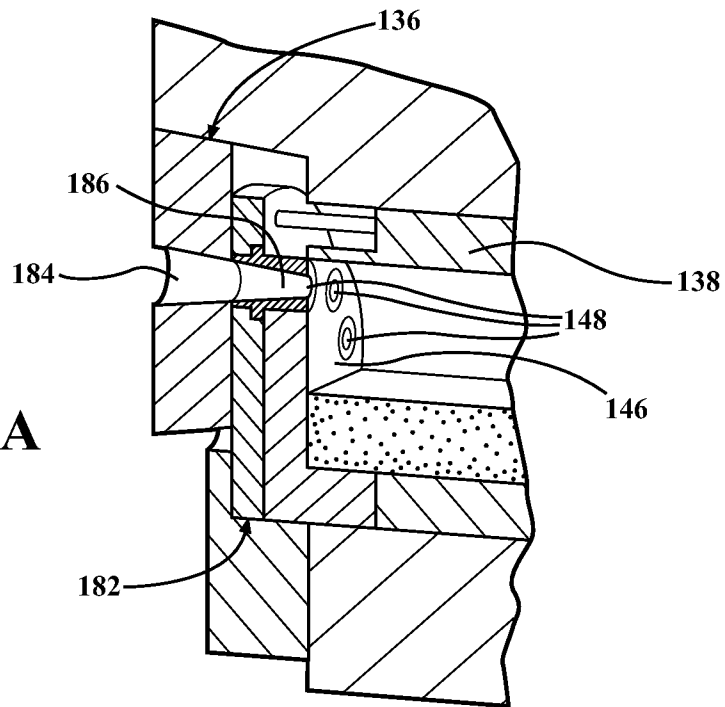


FIG. 9A

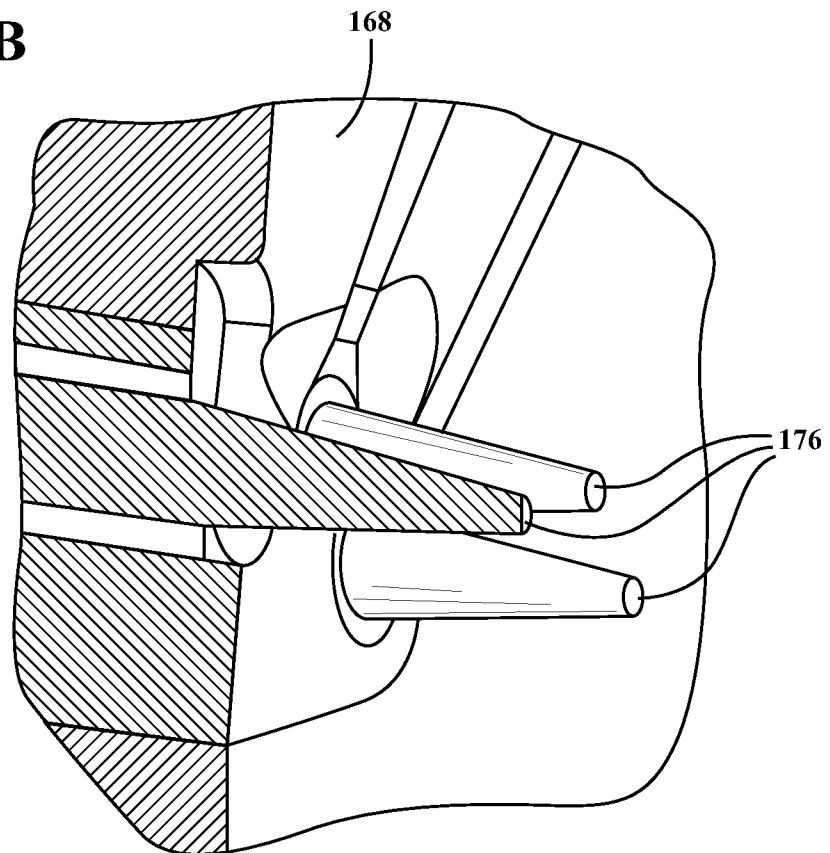


FIG. 9B

FIG. 10

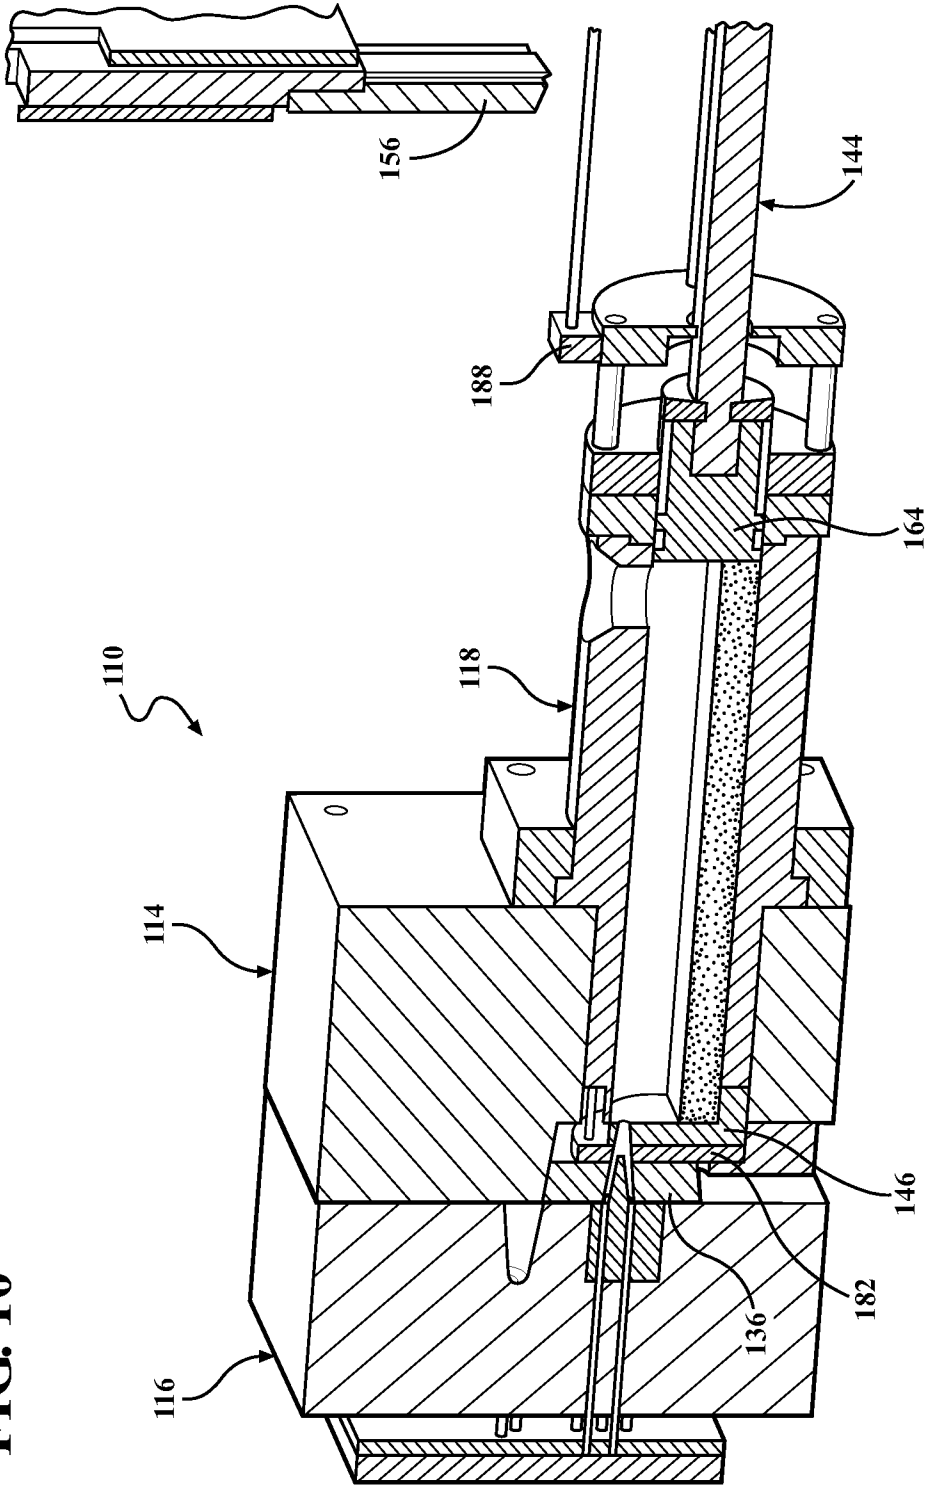


FIG. 11

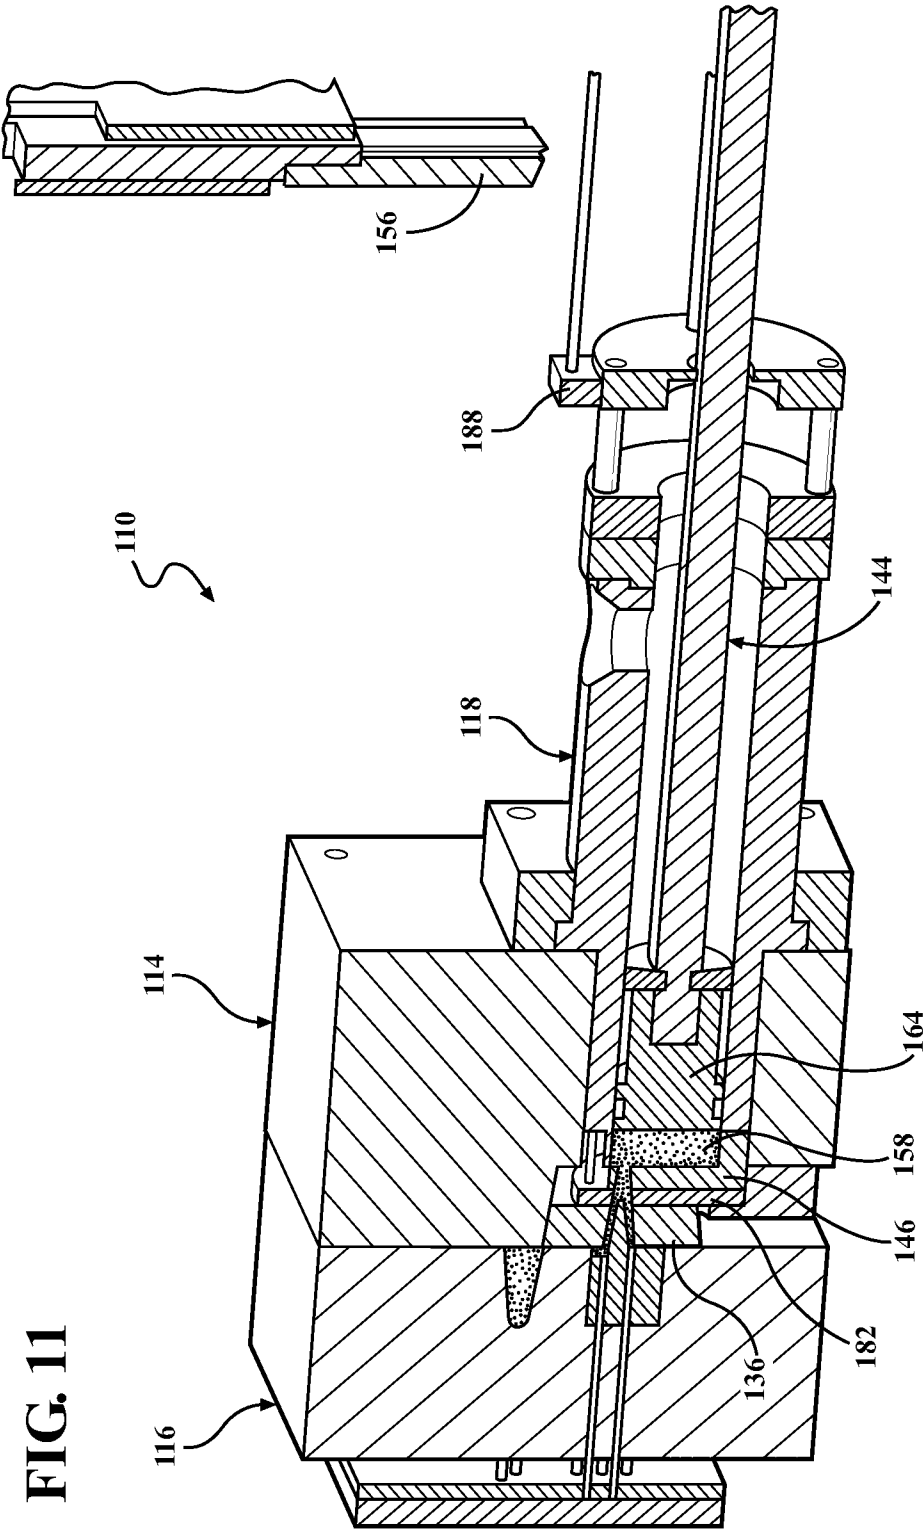


FIG. 12

