


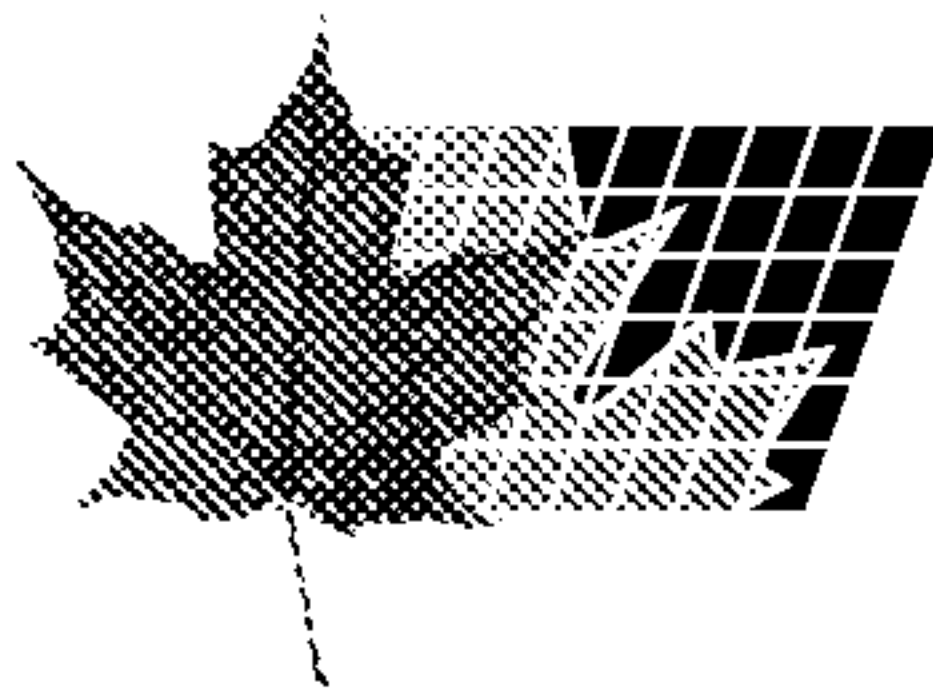

(72) GEERKENS, CHRISTIAN, DE

(72) HARTMANN, RALF, DE

(72) HILD, BERTHOLD, DE

(72) WATZLAW, MEINHARD, DE


(71) SMS SCHLOEMANN-SIEMAG AKTIENGESELLSCHAFT, DE

(51) Int.Cl.⁷ B22D 11/128, F15B 13/02

(30) 1998/08/14 (198 36 843.7) DE

(54) **PROCEDE POUR LE REGLAGE HYDRAULIQUE DES
ROULEAUX DES SEGMENTS DE GUIDAGE DU BRIN D'UNE
INSTALLATION DE COULEE CONTINUE**

(54) **DEVICE FOR HYDRAULICALLY ADJUSTING THE ROLLERS
OF STRAND GUIDING SEGMENTS OF A CONTINUOUS
CASTING INSTALLATION**

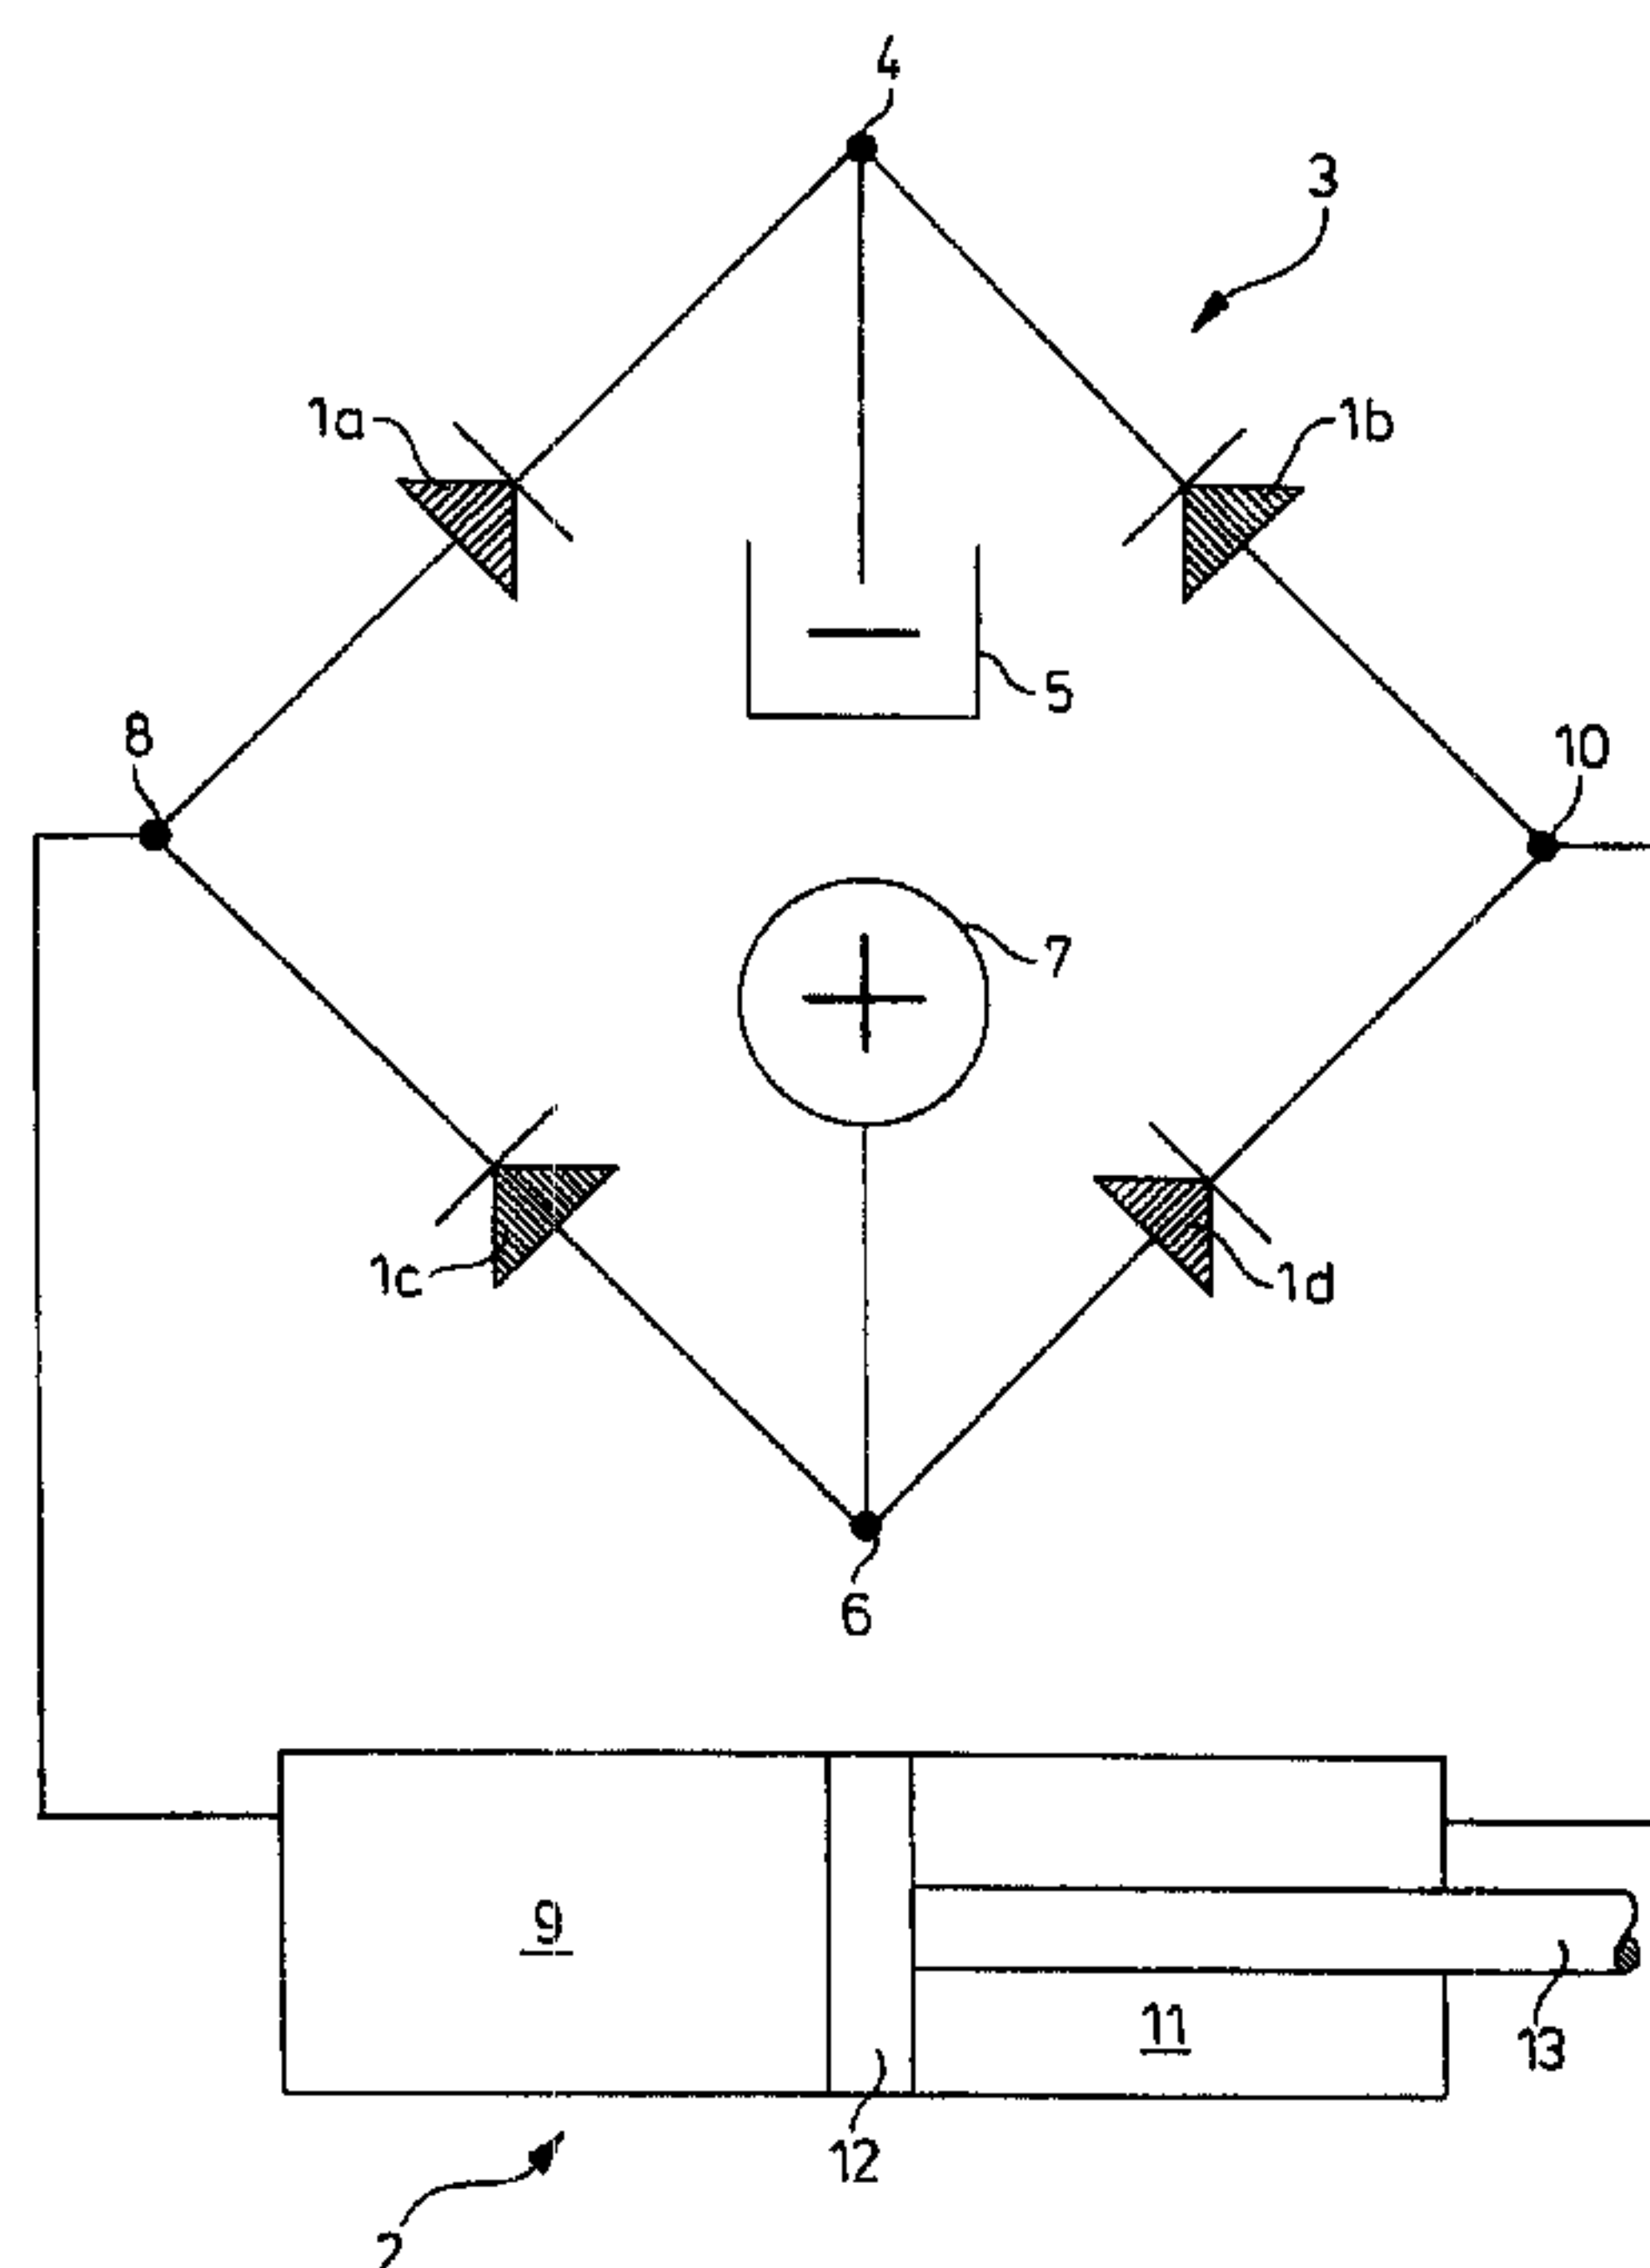

(57) The invention relates to a device for hydraulically adjusting components, especially the rollers of strand guiding segments of a continuous casting installation with hydraulic cylinders (2) which are subdivided into a cylinder chamber (9) and an annular cylinder chamber (11) by each one piston (12) comprising a piston rod (13). The cylinder chambers (9, 11) can be alternatively, reciprocally and simultaneously connected to a pressure source (7) and to a pressure sink (5) by control elements. The disadvantages of prior art continuous valves used as control elements, primarily their high level of sensitivity with regard to cleanness and lubricity of the working fluid, are avoided in that control valves are provided as control elements. Said control valves are non-sensitive with regard to cleanness and to the use of an oil-in-water emulsion used as a working fluid.

ABSTRACT

The invention relates to a device for hydraulically adjusting components, especially the rollers of strand guiding segments of a continuous casting installation with hydraulic cylinders (2) which are subdivided into a cylinder chamber (9) and an annular cylinder chamber (11) by each one piston (12) comprising a piston rod (13). The cylinder chambers (9, 11) can be alternatively, reciprocally and simultaneously connected to a pressure source (7) and to a pressure sink (5) by control elements. The disadvantages of prior art continuous valves used as control elements, primarily their high level of sensitivity with regard to cleanness and lubricity of the working fluid, are avoided in that control valves are provided as control elements. Said control valves are non-sensitive with regard to cleanness and to the use of an oil-in-water emulsion used as a working fluid.

**DEVICE FOR HYDRAULICALLY ADJUSTING THE ROLLERS OF STRAND
GUIDING SEGMENTS OF A CONTINUOUS CASTING INSTALLATION**

The invention has the object to provide a hydraulic system for adjusting continuous strand guiding segments which has a comparatively minimal requirement with regard to the purity of the working liquid and the minimal fire danger.

The object is solved in that as control members on-off valves are provided. On-off valves are either closed or open while proportional servo valves can also be in any intermediate position. Accordingly, on-off valves can withstand coarse dirt particles without clogging, while the possible opening of a proportional servo valve requires a clean working medium in order to prevent seat soiling. Moreover, in contrast to the proportional servo valves, the valve pistons of the on-off valves do not require precise fit because in the open state they are centered on a stop and in the closed state on the seat. Accordingly, the requirement with regard to purity and, moreover, to the lubrication action of the working fluid in the case of on-off valves is significantly lower than in the case of proportional servo valves. This means a reduced expenditure for filtering and the problem-free use of water-oil emulsions as a working liquid. In addition to the reduced expenditure for the on-off valves and for the type as well as the cleaning of the working liquid, the fire safety is a decisive advantage of the solution according to the invention.

By arrangement of four on-off valves in a full bridge circuit, a simple guiding and minimal length of the hydraulic lines with corresponding minimal installation expenditure are achieved.

It is also advantageous that the on-off valves are controllable by a three-step controller. The three-step controller operates only

with the positions plus, minus, and zero. In the plus position, one of the on-off valve pairs is excited, in the minus position the other one, while in the zero position both on-off valve pairs are without current and thus closed. This results in a simple control configuration.

Since the on-off valves have a throttle, an adjustment of the piston position without overswinging can be realized despite the fully open on-off valves.

It is also advantageous when the on-off valves can be controlled by pulse width modulation. While in the three-step control the opening time interval of the on-off valves as a whole can be varied, the number of constant, short opening intervals is variable in connection with the pulse width modulation (variable pulse-duty factor). This is realized, similar to the three-step control, by means of discrete switching signals of a separate electronic hardware or by means of software of a computer. This optimizes the pulse-duty factor in the direction of switching frequency reduction. In the pulse width modulation, as in the case of the three-step control, an outlet on-off valve and an inlet on-off valve are always controlled at the same time since the inflow volume of one cylinder chamber corresponds always to the outflow volume of the other one.

It is moreover advantageous that each piston is connected by means of a connecting rod with a position transducer which triggers the control when the piston position surpasses an upper or a lower limit value. The position transducer allows a closed control circuit for the piston position. In this connection, a simple

configuration and a simple startup of the three-step controller results based on the determination of hysteresis of the permissible piston position by an upper and lower limit value thereof.

Since the four on-off valves are combined to an on-off valve block, a space-saving, cost-efficient configuration of the on-off valves is provided.

Further features of the invention result from the claims, the subsequent figure description and the drawings, in which embodiments of the invention are schematically illustrated.

It is shown in:

- Fig. 1 a circuit diagram of the bridge circuit of the hydraulic oil circulation of a hydraulic cylinder;
- Fig. 2 a circuit diagram of the hydraulic oil circulation and the control of the on-off valves of a hydraulic cylinder;
- Fig. 3 a simplified circuit diagram of the hydraulic oil circulation and the control of the on-off valves of the four hydraulic cylinders of a strand guiding segment;
- Fig. 4 like Fig. 3, but with perspective illustration of a strand guiding element.

Fig. 1 shows the on-off valves (1a, b, c, d), connected in a bridge circuit, of the hydraulic circuit of a hydraulic cylinder (2) which are combined to a valve block (3). The on-off valves (1a, b) can

be connected via a first connecting point (4) with a pressure sink (5), the on-off valves (1c, d) via a second connecting point (6) with a pressure source (7). The on-off valves (1a, c) are connected moreover via a third connecting point (8) with a cylinder chamber (9), the on-off valves (1b, d) via a fourth connecting point (10) to an annular cylinder chamber (11) of the hydraulic cylinder (2). The cylinder chamber (9) and the annular cylinder chamber (11) are seal-tightly separated by a piston (12). The piston has a piston rod (13) projecting from the annular cylinder chamber (11). Fig. 1 shows the very compact configuration of the valve block (3) which is realized with minimal expenditure.

In Fig. 2, a valve block with a hydraulic cylinder (2) and a simplified illustration of the electric control of the on-off valves (1a, b, c, d) are illustrated. Fig. 2 shows also the connecting points (4, 6, 8, 10) for connecting the on-off valves (1a, b, c, d) with the pressure sink (5) and the pressure source (7), the cylinder chamber (9) as well as the annular cylinder chamber (11). The piston (12) is connected by a connecting rod (14) with a position transducer (15) which indicates the respective position of the piston (12) relative to the hydraulic cylinder (2). Each one of the on-off valves (1a, b, c, d) has a solenoid (16) which is connected via electric lines (17a, b, c, d) with a three-step controller (18) or a pulse width modulator (19). The three-step controller (18) and pulse width modulator (19) are realized as electronic hardware or integrated as software in a computer (20). The on-off valves (1a, b, c, d) have springs (21) which effect their closing when the solenoid (16) is without current. The piston rods (13) are sealed by glands (22) which also serve for supporting the hydraulic cylinders (2) on one half of the strand

guiding segments (35, Fig. 4). They support on their free ends a swivel head (23) for connecting them with the other half of the strand guiding segments (35).

Fig. 3 shows a simplified circuit diagram of the hydraulic oil circulation and the control of the valve blocks (3) for the four hydraulic cylinders (2) of a strand guiding segment (35, Fig. 4). In the same way, it is also possible to adjust leveling machines and saws. A switch cabinet (24) is connected with a computer whose software controls the on-off valve blocks (3) by means of three-step controllers or pulse width modulation. The switch cabinet (24) has inter alia a network card (26), a central processing unit (CPU) (27), a memory (28), an interface (29), for example, a SSI interface for establishing a connection to the position transducer (15), a digital/analog converter or switching amplifier (30) for the on-off valve signals, a digital input/output (31) for a control panel (32) on site and for a strip terminal (33) for connecting the signals of the device; in addition, a mains supply circuit (34) is provided.

Fig. 4 shows basically the same as Fig. 3 but with a strand guiding segment (35) in a perspective illustration. The latter has rollers (36) between which the cast strand (37) to be guided is positioned. The rollers have supports (38). The latter are adjusted by the hydraulic cylinders (2) and the pistons (12) by means of the piston rod (13). Pressure transducers (39) for monitoring the process are mounted in the hydraulic lines between the on-off valve blocks (3) and the hydraulic cylinders (2). Their signals are collected together with the signals of the on-off valve block (3) in an input/output component (40) and transmitted to the digital/analog

converter (30). The signals of the position transducer (15) are then transmitted to the interface (29).

The device according to the invention functions as follows. When the position transducer (15) shows a deviation from the nominal position of the rollers (36), the nominal position is adjusted again, once a certain upper or lower limit value is surpassed, by controlling the corresponding on-off valves (1a, b, c, d) via three-step control or pulse width modulation.

By employing the on-off valves instead of proportional servo valves a water/oil emulsion can be used as the working liquid so that the fire danger in the case of leakage is reduced. Moreover, a microfine filtration of the working liquid is no longer needed so that the device according to the invention is less expensive with regard to initial installation cost and operation.

Claims

1. A device for hydraulic adjustment of components, in particular, rollers (36) of strand guiding segments (35) of a strand casting device, comprising hydraulic cylinders (2) which are separated by a piston (12) with piston rod (13) into a cylinder chamber (9) and an annular cylinder chamber (11), respectively, wherein the cylinder chambers (9, 11) can be connected by control members alternately and in opposite directions as well as simultaneously with a pressure source (7) and a pressure sink (5), characterized in that on-off valves (1a, b, c, d) are provided as control members.
2. The device according to claim 1, characterized in that each hydraulic cylinder (2) has four switching valves (1a, b, c, d) connected in a full bridge circuit.
3. The device according to claim 1 or 2, characterized in that the on-off valves (1a, b, c, d) can be controlled by a three-step controller.
4. The device according to one or more of the preceding claims, characterized in that the on-off valves (1a, b, c, d) have a throttle.
5. The device according to claim 1 or 2, characterized in that the on-off valves (1a, b, c, d) are controllable by pulse width modulation.

6. The device according to one or more of the claims 3 to 5, characterized in that each piston (12) is connected by a connecting rod (14) to a position transducer (15) which triggers the control after surpassing an upper or lower limit value of the piston position.
7. The device according to one or more of the claims 1 to 6, characterized in that the four on-off valves (1a, b, c, d) are combined to an on-off valve block (3).



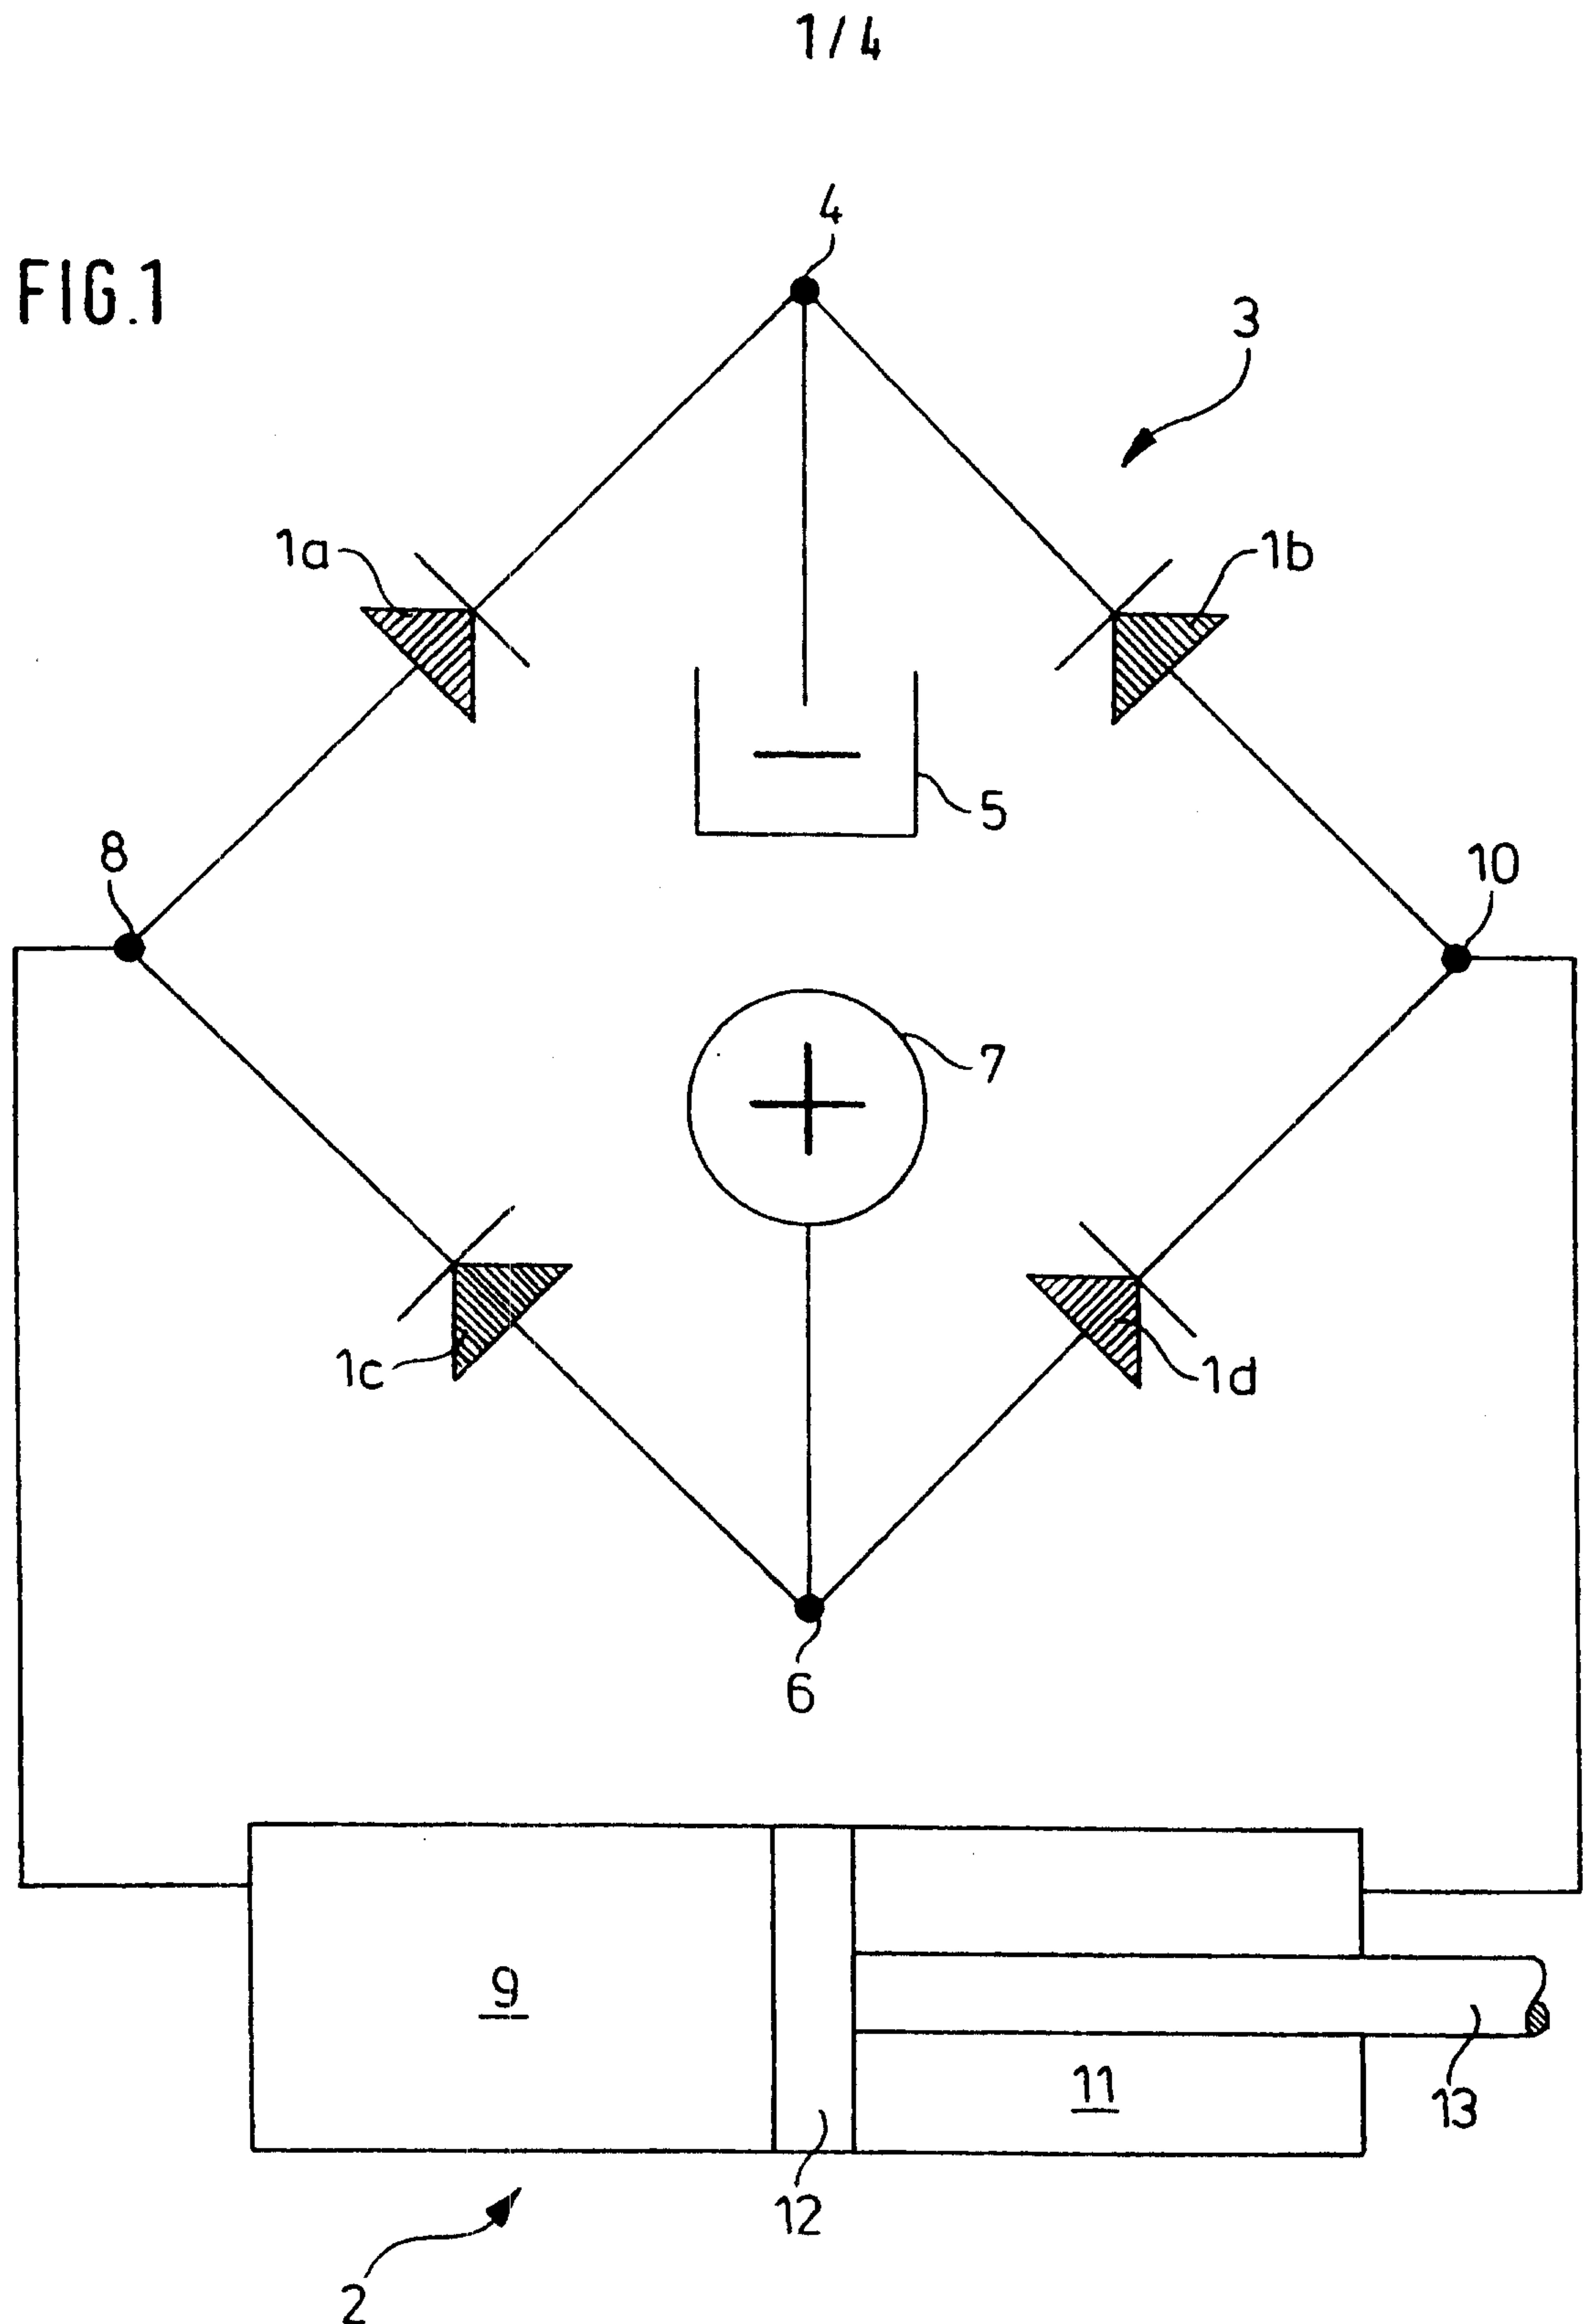


FIG. 2

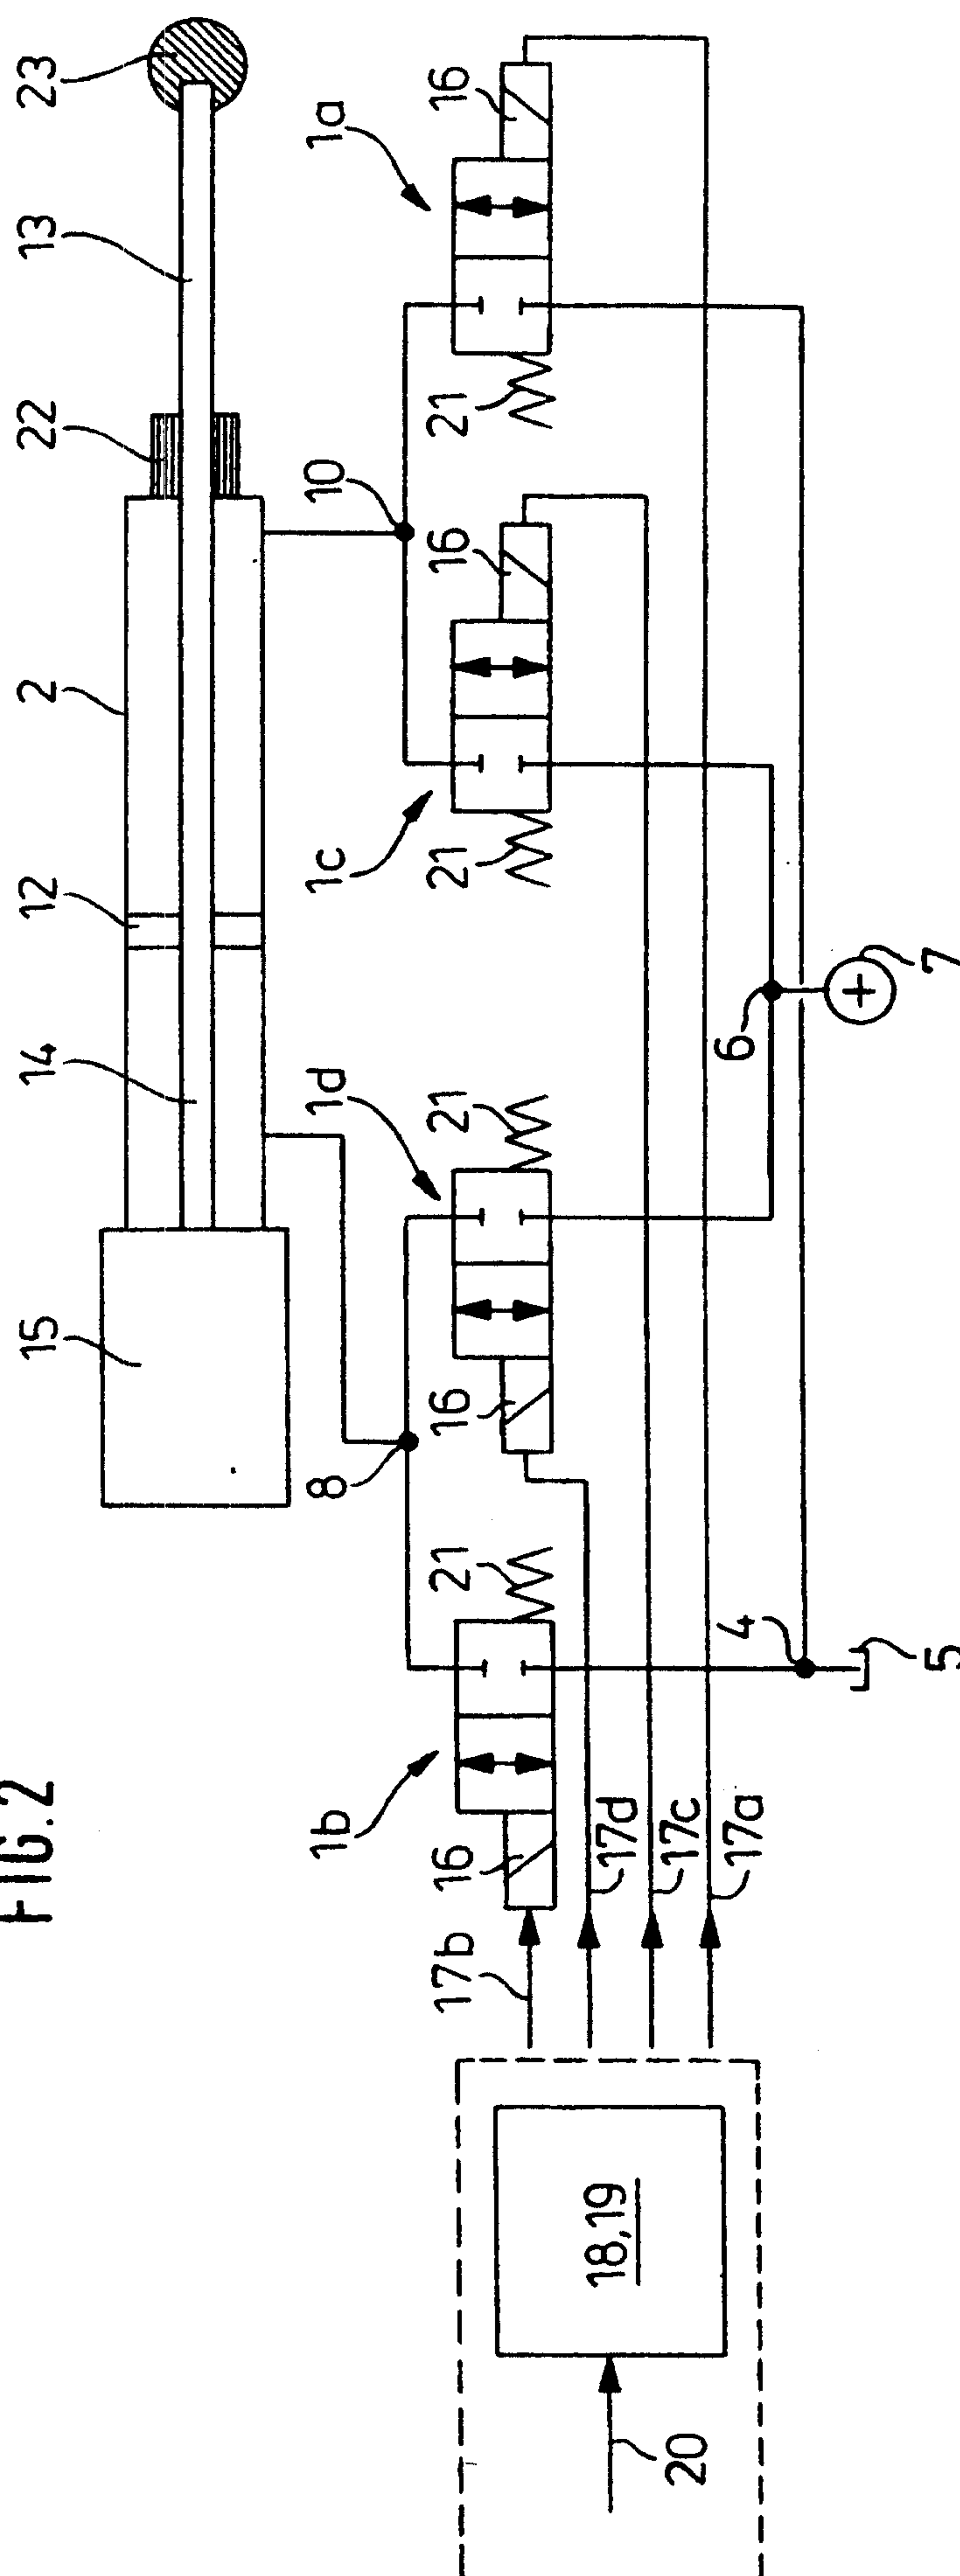

3/4

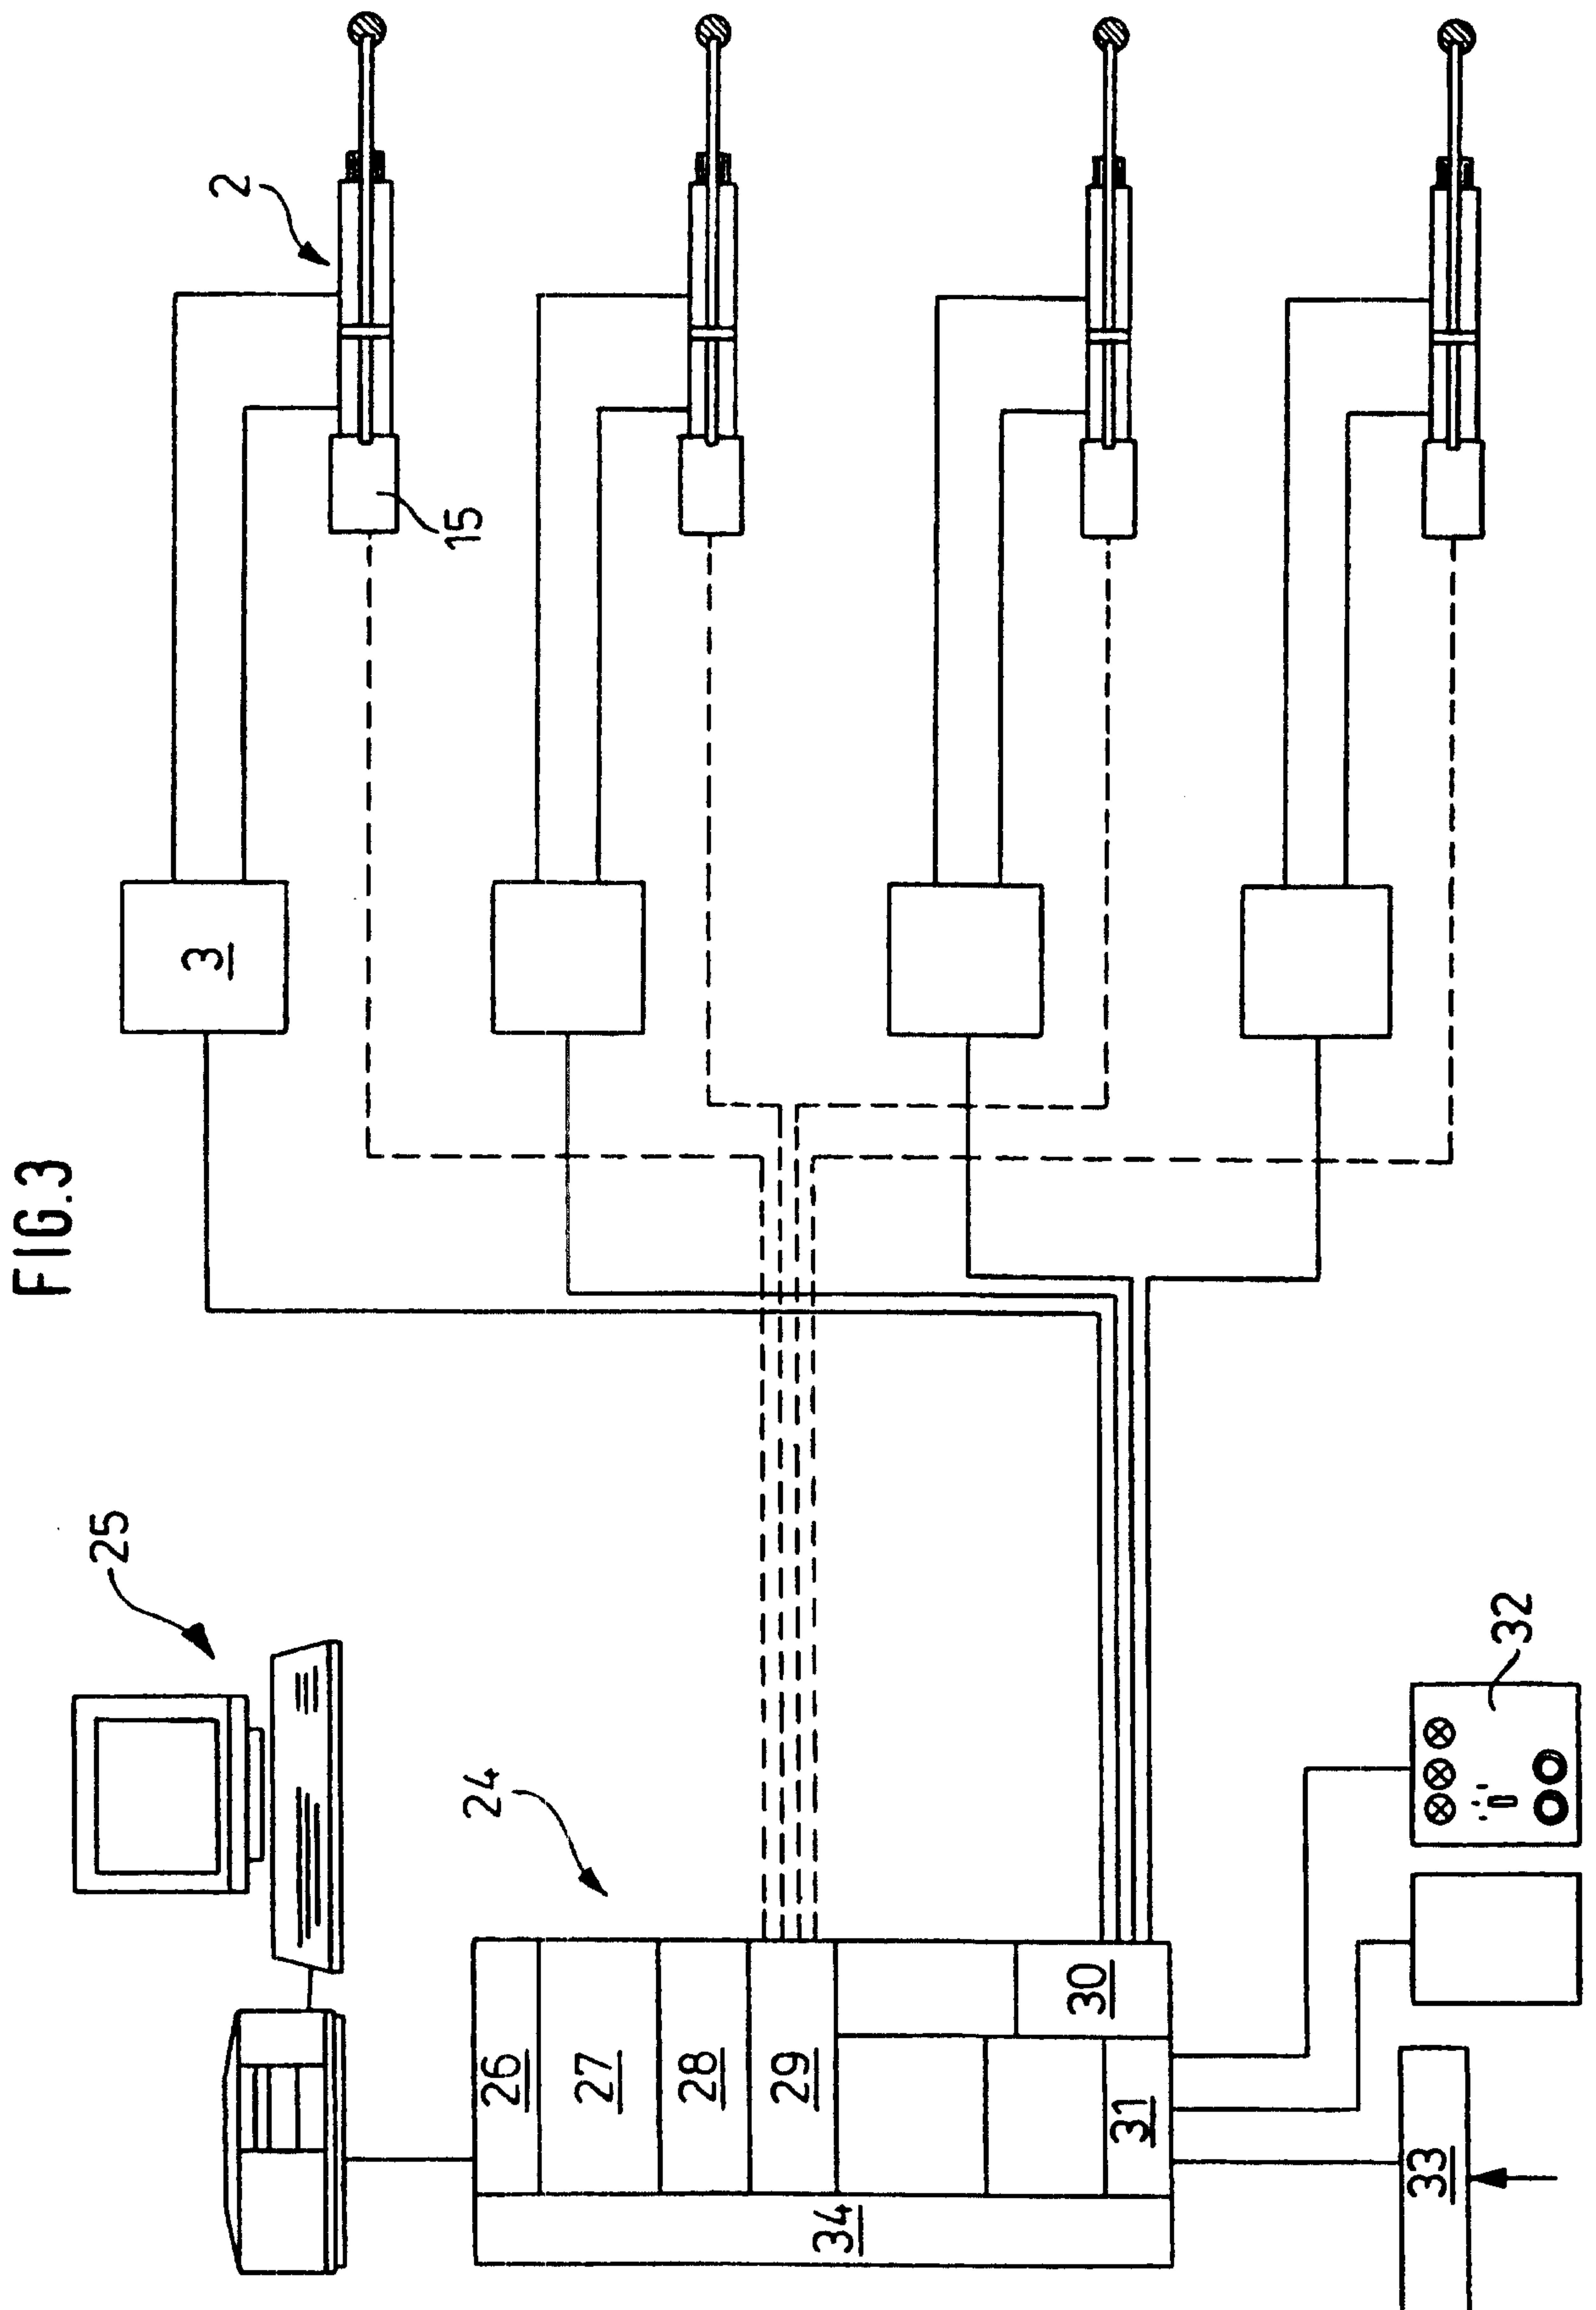

4/4

FIG. 4

