




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B65D 35/22	A1	(11) International Publication Number: WO 98/24705 (43) International Publication Date: 11 June 1998 (11.06.98)
(21) International Application Number: PCT/US97/22187 (22) International Filing Date: 3 December 1997 (03.12.97) (30) Priority Data: 60/032,339 4 December 1996 (04.12.96) US 08/978,891 26 November 1997 (26.11.97) US (71) Applicant: COLGATE-PALMOLIVE COMPANY [US/US]; 300 Park Avenue, New York, NY 10022 (US). (72) Inventors: MACK, Robert; 1 Grandview Circle, Flemington, NJ 08822 (US). McKINNEY, James, C.; 1048 Pinehurst Drive, Peachtree City, GA 30269 (US). CONNAN, Patrick, Andre; 19 Chrystal Drive, Lebanon, NJ 08833 (US). (74) Agent: McGREAL, Michael, J.; Colgate-Palmolive Company, 909 River Road, Piscataway, NJ 08855-1343 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: DUAL CHAMBER TUBULAR CONTAINER**(57) Abstract**

The dual chamber tubular container is closed at one end by a crimp seal (14) and at the other end has a dispensing opening with a dividing wall (18). This dividing wall is attached longitudinally to the tubular chamber sidewalls and extends from the crimp seal to the dispensing opening divider wall. The divider wall of the dispensing exit is offset from the crimp seal about 75° to about 110° and preferably about 90°. This enhances the uniform dispensing of the two contained substances.

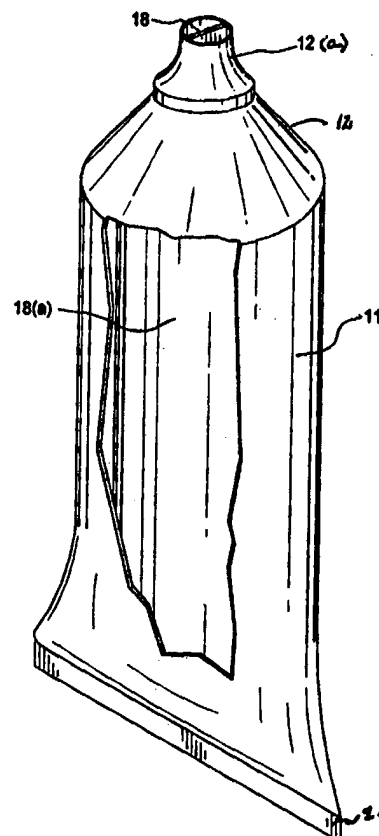

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DUAL CHAMBER TUBULAR CONTAINER**Field of the Invention**

5

This invention relates to dual chamber tubular containers and the structure of the divider wall. More particularly, this invention relates to dual chamber tubular containers and the relationship of a lower crimp seal and an upper exit divider wall.

10

Background of the Invention

15

Dual chamber tubular containers for the delivery of two different substances when the tube is squeezed are known. A continuing problem with regard to such containers is to achieve a uniform dispensing of each component from the tubular container. This is the case whether the tubular container is squeezed from near the top or the bottom, or from any position around the circumference of the tubular container. Uniform dispensing is a significant problem. However, there is a solution through the use of a tube divider wall which for a round tubular container is

20

- (1) greater in lateral dimension than the diameter of the tubular container;
- (2) generally "S" shaped with the ends of the "S" shape attached to the tubular container sidewall;
- (3) located longitudinally in the crimp seal; and
- (4) the crimp seal and the opposite end dispenser opening divider wall being about 75° to 110°, and preferably about 90° out of phase; that is, the plane of the dispenser exit divider wall is offset from the plane of the crimp seal by about 75° to 110°, or preferably about 90°.

30

The prior art is disclosed by U.S. Patent No. 1,894,115, U.S. Patent No. 3,788,520 and German Patent 2017292. In the two U.S. Patents, it is seen that the crimp seal and the dispensing exit divider wall are in the same plane. The divider wall is longitudinally situated in the crimp seal, but there is no angular offset of the crimp seal and the wall of the dispensing opening. One reason is that the divider wall does not have a sufficient lateral dimension. Another reason is that the prior art did not understand ways to achieve a highly uniform dispensing from essentially each chamber regardless of where the tubular container is squeezed to dispense the products. German Patent 2017292 discloses a tube where the crimp seal and the tube exit are in an angular offset. However, the divider wall is not longitudinally situated in the crimp seal.

Brief Summary of the Invention

Dual chamber tubular containers that are crimp sealed at one end and which dispense separately contained products at the other end will more uniformly dispense the products if the tube divider wall is located longitudinally in the crimp seal and the crimp seal and the dispensing end divider wall are offset by about 75° to about 110°, and preferably about 90°. The tubular container divider wall at a lower end will lie in a single layer laterally across the crimp seal; that is, it will be disposed within the crimp seal. Thus, in the crimp seal there will be a three layer seal. The divider wall will have a lateral dimension greater than the cross-section of the tube and will be generally in an "S" shape within the tube body.

The dispensing exit will be offset at the above angles from the crimp seal. Also, the divider web wall will be about one-half or more the circumference of the tubular container for a round tubular container. In this way the divider wall can be disposed within the crimp seal. The crimp seal usually will be a linear dimension of about one-half the circumference of the tube. Also, there is provided a sufficient lateral dimension to the divider wall so that the divider wall can adopt an "S" shape. The "S" shape

will be more pronounced adjacent the upper end of the tubular container. The net effect is a spiral like change of shape of the divider wall from the crimp seal up to and through the exit divider wall. The exit divider wall is connected to the inner divider wall of the tubular container so that the contained substances remain separate until the substances are dispensed.

This arrangement of the crimp seal and the divider wall in the nozzle exit of the tubular chamber provides for an ease in dispensing and a more uniform dispensing of the contained substances regardless of how the tube is held and squeezed. Since a tubular container having a crimp seal usually is held with the fingers on the tube body on each side of the crimp seal for dispensing, the nozzle exit will be aligned with the nozzle divider wall in a vertical position so that the substances are dispensed side by side. In this way the visual effectiveness of the uniformity of the dispensing constantly can be evaluated and the pressure applied to different parts of the tube varied to adjust the amount of product from each chamber.

Brief Description of the Invention

Figure 1 is a top plan view of the tubular container of this invention.

Figure 2 is a cross-sectional view of the tubular container at about the mid-point of the tubular container.

Figure 3 is a partial cut-away tubular container showing the structure of the divider wall.

Detailed Description of the Invention

The present invention is directed to a dual chamber tubular container having a lower crimp seal where the crimp seal and the dividing wall at the exit dispensing end are offset by about 75° to about 110°, and preferably

about 90°. The divider wall of the dual chamber container will be disposed within the crimp seal and will rotate so that it is offset about 75° to about 110°, and preferably about 90°, from the crimp seal at the dispensing exit. In order to be disposed within the crimp seal, the divider wall will have to be at least about one-half the circumference of the tubular container, and preferably more, when the tubular container is round. The divider wall also will be in an "S" shape with the divider wall rotating about 75° to about 110°, and preferably about 90°, as it passes from the crimp seal to the exit. This provides for a spiraling of the center wall as it extends from the crimp seal to the exit of the tubular container.

The present tubular container is shown in **Figure 1**. Tubular container **10** has sidewall **11** and shoulder **12**. The shoulder terminates in nozzle **16** which has an aperture having openings **20** and **22**. Divider wall **18** separates chamber **20** from **22**. The divider wall **18** extends downwardly to the crimp seal **14**. The crimp seal is shown as being offset 90° from the plane through the divider wall at the nozzle exit of the tubular chamber.

Figure 2 shows the divider wall **18(a)** at a point about halfway between the crimp seal **14** and the nozzle **16**. It is seen that the divider wall at this point has an "S" shape and has a length that is approximately one-half the circumference of the tubular container. In this way the divider wall **18(a)** can be disposed within the crimp seal **14**. This will produce a three layer seal. This divider wall has a high degree of flexibility.

It is preferred that the divider wall **18(a)** be substantially less in thickness than the sidewall **12** and that it be more pliable. The divider wall will have a thickness of about .05mm to about .15mm and preferably about .07mm to about .13mm. The sidewall will have a thickness of about 0.2mm to 0.8mm and preferably about 0.2mm to 0.6mm.

Figure 3 shows the divider wall in more detail in the full construction of the tube. It is seen that the divider wall extends down through the tube

to the crimp seal **14**. Further, the exit divider wall is shown offset from the crimp seal by about 90°C. There is a spiraling of the divider wall **18(a)** from the crimp seal up to and through the exit divider wall **18**. This spiral nature to the divider wall, the general "S" shape of the divider wall, and the relatively thin structure of the divider wall, all contribute to a uniform dispensing of products from each chamber of the tube. Uniform dispensing is a necessary feature for dual chamber and other multichamber tube containers. The cylindrical portion of the tube terminates in shoulder **12** and a nozzle **12(a)**.

The sidewalls and the inner divider web wall can be comprised of a single layer or multilayer laminate structure. The useful materials include polypropylene, polyethylene (high to low density), polybutadiene, ethylene vinyl alcohol, ethylene vinylacetate, vinylidene chloride, polyethylene terephthalate, polybutylene terephthalate, polyacrylonitrile and laminate structures that use layers of these materials. In many instances the sidewall will be a laminate structure while the web wall will be a monolayer. It is preferred that the divider web wall be as thin as possible which makes a monolayer, and a thin multilayer, useful. However, the divider web wall can be of a multilayer structure depending on the barrier and other properties desired for this wall.

The present invention can be modified as to sidewall and divider web wall materials and characteristics. However, any modifications which functionally produce the same tubular container are within the present invention.




Claims

What is claimed is:

- 5 1. A dual chamber tubular container having an outer wall, a crimp seal at one end and an exit at another end, a center divider wall extending from the crimp seal to said exit end, said center divider wall having a lateral dimension at least about one-half the circumference of said tubular container, the lower end of said divider wall being disposed
10 laterally within said crimp seal, said divider wall at said crimp seal being in a plane offset about 75° to about 110° from the plane of the divider wall at the exit end.
- 15 2. A dual chamber tubular container as in claim 1 wherein said divider wall has an "S" shape at a point about halfway between the crimp seal and the exit end.
- 20 3. A dual chamber tubular container as in claim 2 wherein said divider wall has a thickness less than said outer wall.
- 25 4. A dual chamber tubular container as in claim 2 wherein said divider wall and said outer wall are comprised of a multilayer film.
5. A dual chamber tubular container as in claim 1 wherein the plane of said divider wall at said crimp seal and the plane of said divider wall at said exit end is offset about 90°.
- 30 6. A dual chamber tubular container as in claim 5 wherein said divider wall has a thickness less than said outer wall.
7. A dual chamber tubular container as in claim 5 wherein said divider wall and said outer wall are comprised of a multilayer film.

8. A dual chamber tubular container as in claim 1 wherein said divider wall has a thickness less than said outer wall.
- 5 9. A dual chamber tubular container as in claim 1 wherein said divider wall and said outer wall are comprised of a multilayer film.
10. A dual chamber tubular container as in claim 1 wherein said divider wall is comprised of a monolayer film and said outer wall is comprised of a multilayer film.

10

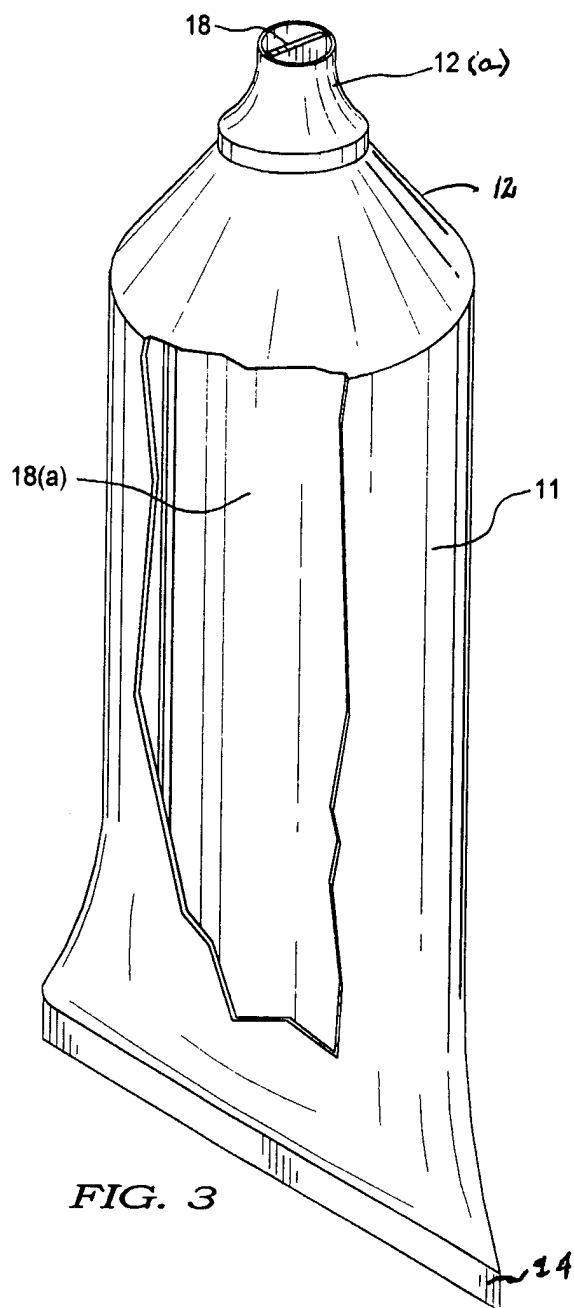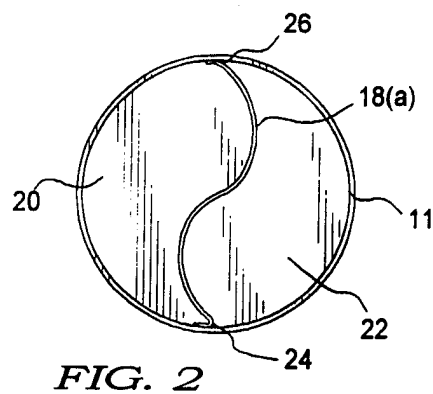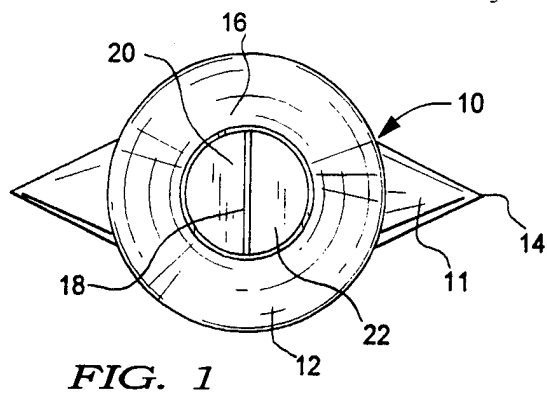

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/22187

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B65D35/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 961 154 A (DENTIFRICE BI-OXYNE) 8 May 1950	1, 5
Y	see page 1, line 43 - line 47; figures ---	2-4, 6-10
Y	US 5 307 954 A (GICK ET AL.) 3 May 1994 see column 7, line 23 - line 25 see column 7, line 61 - line 63; figures 7, 11 ---	2, 3, 6, 8
Y	US 3 991 294 A (EVANS) 9 November 1976 see figure 28 ---	4, 7, 9
A	see figure 34 ---	1
Y, P	US 5 628 429 A (USEN ET AL.) 13 May 1997 see column 5, line 57 - column 6, line 31; figure 4 -----	10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

30 March 1998

Date of mailing of the international search report

08/04/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bridault, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

In .ational Application No

PCT/US 97/22187

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 961154 A	06-05-50	NONE	
US 5307954 A	03-05-94	NONE	
US 3991294 A	09-11-76	US 3948704 A	06-04-76
		CA 1013982 A	19-07-77
		DE 2453503 A	15-05-75
		FR 2257405 A	08-08-75
		GB 1491052 A	09-11-77
		JP 50089478 A	17-07-75
US 5628429 A	13-05-97	AU 7472996 A	11-06-97
		WO 9718999 A	29-05-97