



(22) Date de dépôt/Filing Date: 2001/07/27

(41) Mise à la disp. pub./Open to Public Insp.: 2002/01/29

(45) Date de délivrance/Issue Date: 2008/05/13

(30) Priorité/Priority: 2000/07/29 (DE100 37 010.1)

(51) Cl.Int./Int.Cl. *H01B 7/38* (2006.01),
H01B 7/18 (2006.01)


(72) Inventeurs/Inventors:
GROGL, FERDINAND, DE;
MEHL, ALFRED, DE

(73) Propriétaire/Owner:
NEXANS, FR

(74) Agent: ROBIC

(54) Titre : CABLE AVEC AU MOINS UN ELEMENT DE TRANSMISSION

(54) Title: CABLE WITH AT LEAST ONE TRANSMISSION ELEMENT

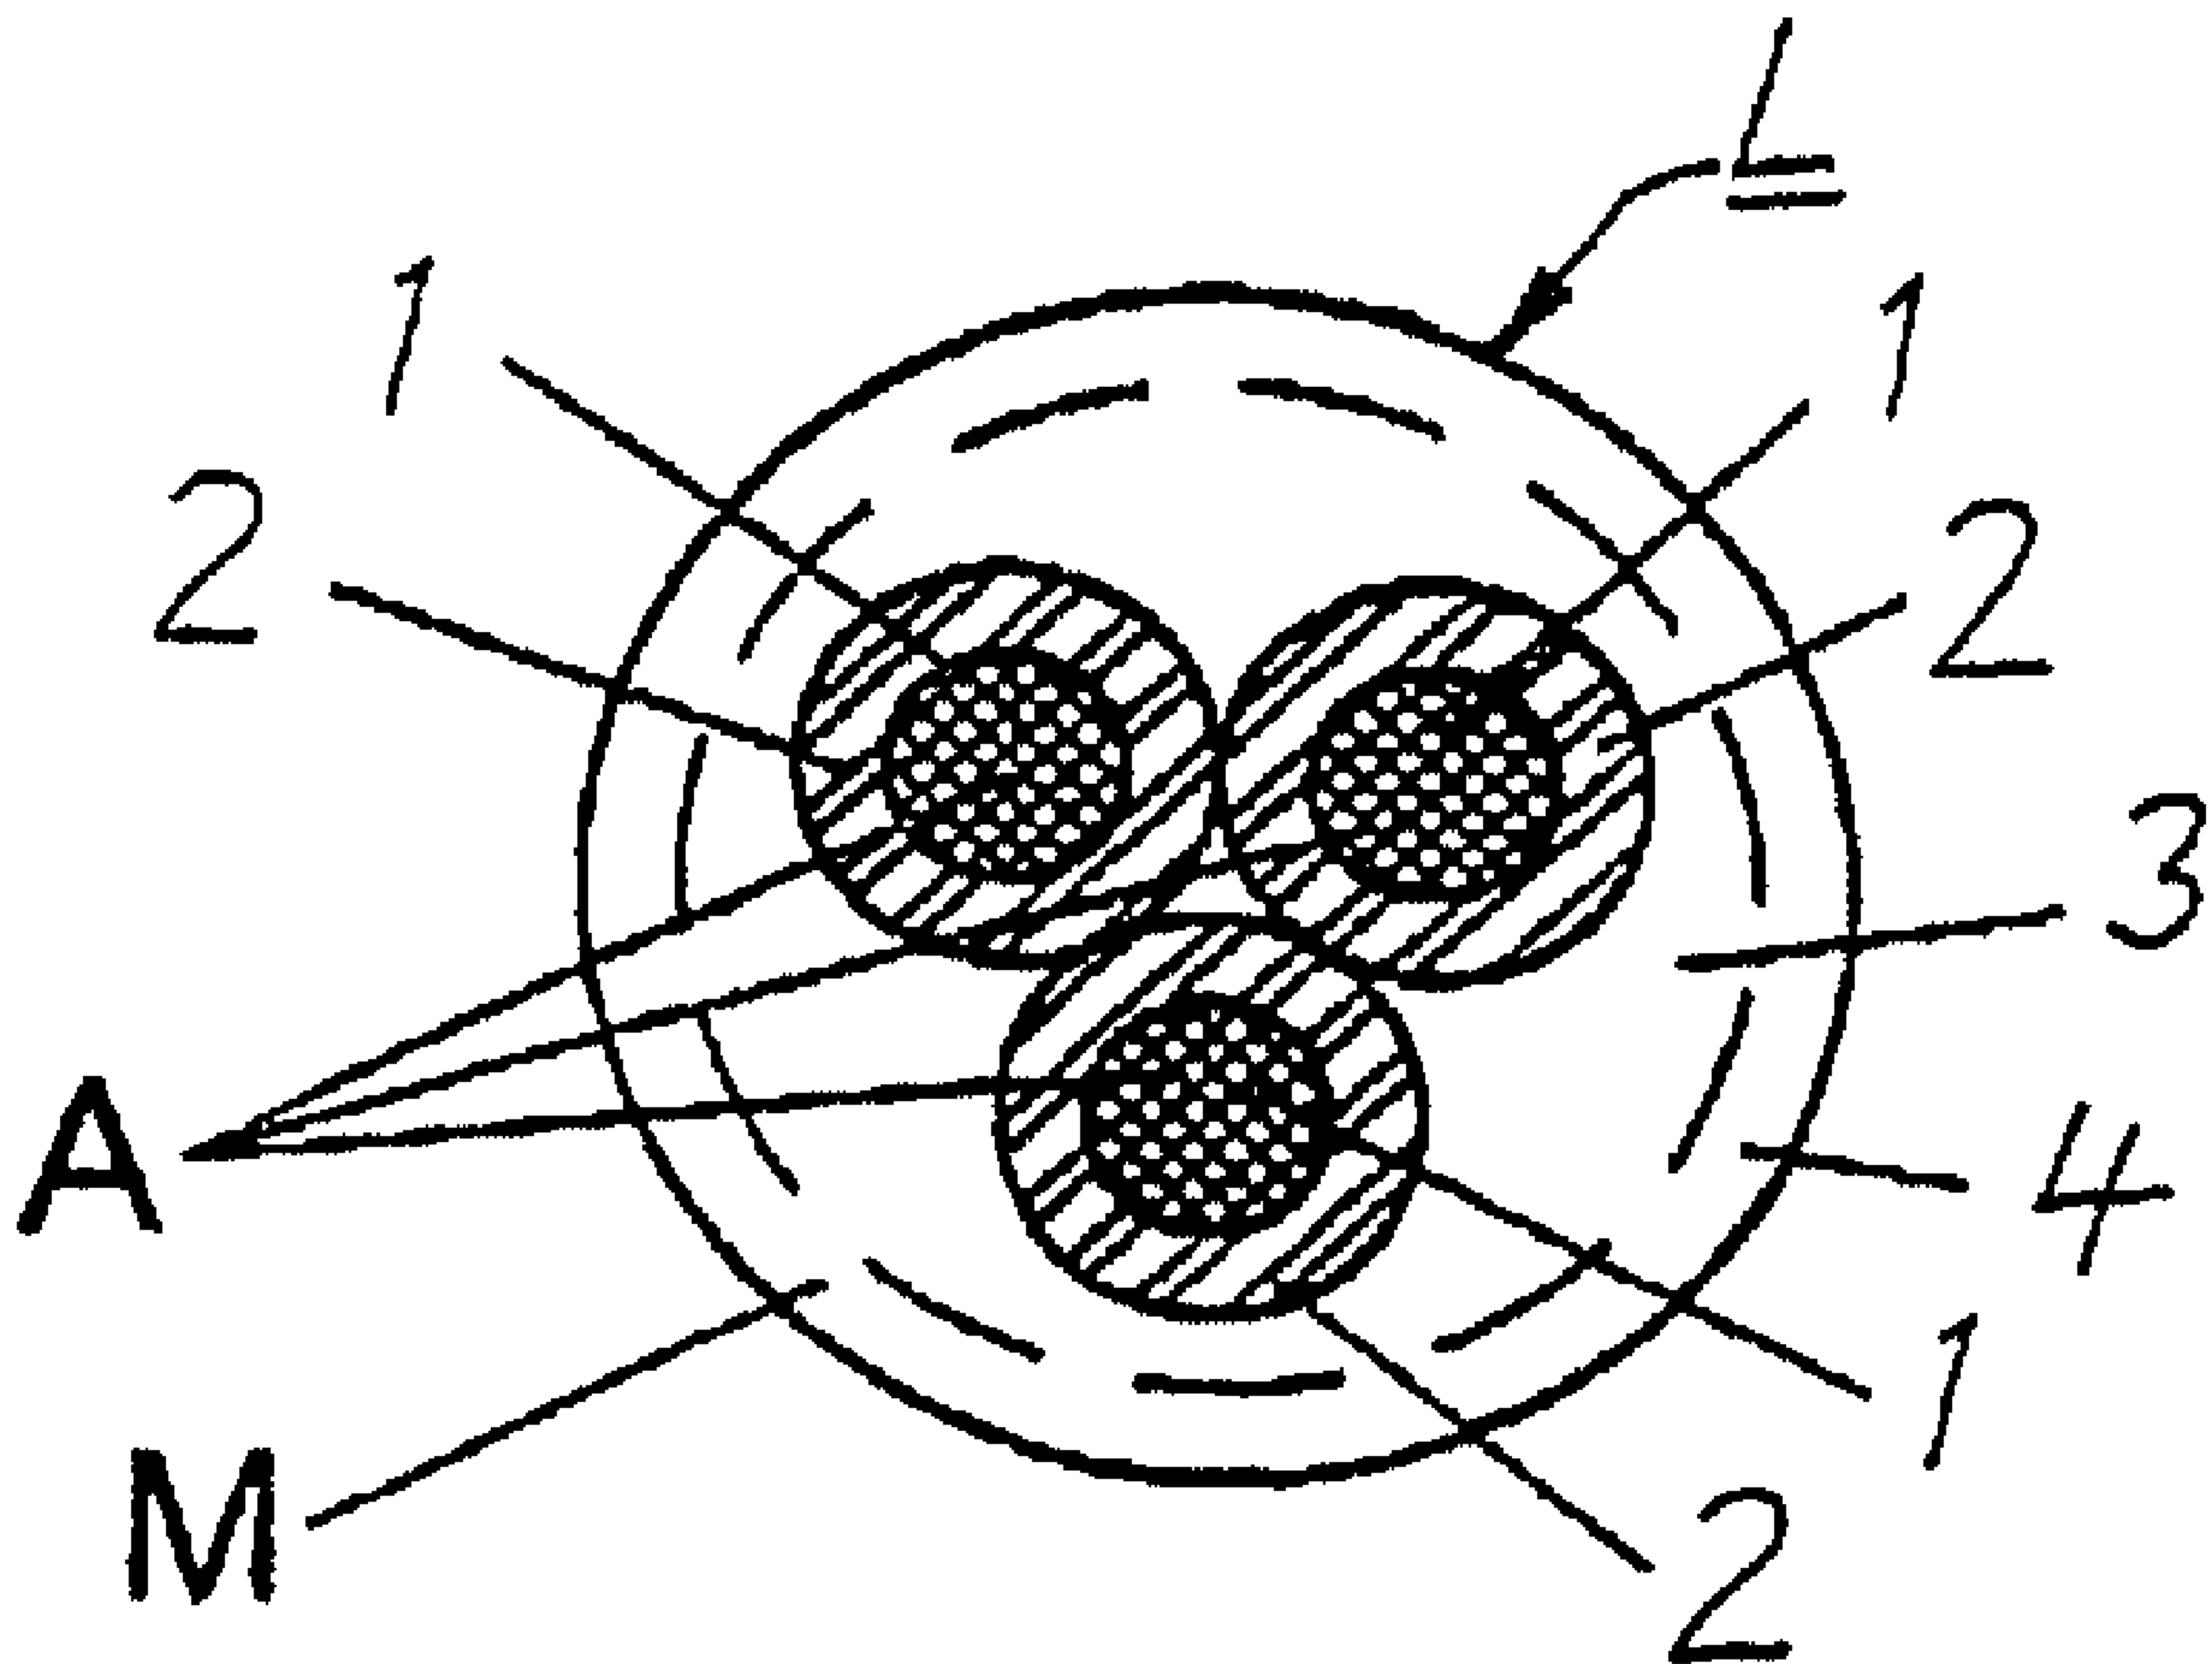

(57) Abrégé/Abstract:

Described is a cable with at least one transmission element (A), which is surrounded by a sheath (M) of insulation material. To simplify stripping of the insulation, the sheath (M) is composed of an inner layer (3) and an outer layer (4), which are firmly bonded

(57) **Abrégé(suite)/Abstract(continued):**

together. The values for tear resistance and elongation at break of the inner layer (3) are designed to be clearly lower than those of the outer layer (4).

Abstract

Described is a cable with at least one transmission element (A), which is surrounded by a sheath (M) of insulation material. To simplify stripping of the insulation, the sheath (M) is composed of an inner layer (3) and an outer layer (4), which are firmly bonded together. The values for tear resistance and elongation at break of the inner layer (3) are designed to be clearly lower than those of the outer layer (4).

Cable with at least one transmission element

Description

The invention relates to a cable with at least one transmission element, which is surrounded by a sheath of insulation material (DE 298 08 657 U1).

The cables to which the invention refers are used, for instance, in industrial automation systems as flexible power supply cables, as combined cables with power and control wires, and as control lines. Another possible field of application is the automobile technology. The "transmission element" can thus be a power core or a control or pilot core suitable for transmitting electrical or optical signals. Particularly important in these cables is the outer sheath, which must be able to withstand all possible mechanical, thermal and chemical stresses. Corresponding materials are known. Primarily thermoplastic elastomers (TPE), polyurethane (PU) or polyvinyl chloride (PVC) are used. These cables should furthermore be easy to strip from their insulation for connecting purposes, e.g., to join connectors.

The known cable according to the aforementioned utility model DE 298 08 657 U1 meets these requirements. It comprises two side-by-side electrical cores provided with differently colored insulation and surrounded with a wrapping, which is called a separator. An internal polyvinyl chloride sheath produced by extrusion and having a dimensionally precise cylindrical outer surface is put over the separator. The internal sheath is surrounded by a braid of tinned copper wires. For mechanical protection an outer polyvinyl chloride sheath is provided. The sheath of the cable can be readily severed by means of a special tool with a knife, which in working position penetrates the sheath structure exactly up to the separator. Production of this cable is very costly, however.

The object of the invention is to design the initially described cable in such a way that construction is simple and the insulation can be readily stripped without risk of injury to the conductor.

According to the invention, this object is attained in that

- the sheath comprises an inner layer and an outer layer which are firmly bonded together and
- the values for tear resistance and elongation at break of the inner layer are designed to be clearly lower than those of the outer layer.

This cable can be produced simply and without requiring special dimensional accuracy. It can be produced with conventional machines in a single pass, including the two layers for the sheath. The cable has an externally effective sheath with the desired or specified properties. But due to its special inner layer this sheath may be readily removed from the conductor, e.g., for connection purposes, without risking injury to the conductor. For this purpose, only the outer layer of the sheath must be completely severed. Minor nicking of the inner layer is of no consequence and may even be advantageous. The sheath can then be torn off at the cut. The cable is thus particularly suitable for semiautomatic or fully automatic prefabrication.

Exemplary embodiments of the subject of the invention are illustrated in the drawings in which:

Figs. 1 to 3 are cross sections through differently structured cables according to the invention,

Fig. 4 is a side elevation of the cable according to Fig. 3 with the insulation removed at one end,

Figs. 5 and 6 are cross sections of the cable in two additional embodiments.

The transmission element of the cable according to the invention—as previously mentioned—may be a power core, an electrical control core or an optical control

core. For the sake of simplicity, only the term "core" is used below. It covers all three variants.

In the simplest embodiment, cable L according to Fig. 1 is made of one electrical conductor 1, which is surrounded by a sheath M of an insulating material. In this case, sheath M is thus also the insulation for conductor 1. In a preferred embodiment, such a cable L has a relatively large conductor cross section, for instance 25 mm^2 . But the cable may also be a multi-core cable. This applies in principle also to a cable L in accordance with Fig. 2, in which conductor 1 is first provided with insulation 2, to which sheath M is then applied. The material used for insulation 2 is, for instance, polypropylene.

Sheath M is constructed of an inner layer 3 and an outer layer 4. The two layers 3 and 4 are firmly bonded together. They are preferably made of the same base material, e.g., a TPE, but have different properties due to additives that are added to the material of the inner layer 3. In a preferred embodiment, layers 3 and 4 may be applied to conductor 1 in the same pass, e.g., through tandem extrusion or coextrusion. This causes them to be directly and firmly bonded together. In the drawing, sheath M is not hatched. Its two-layer structure is indicated by a dashed line.

The inner layer 3 of sheath M compared to the outer layer 4 has both a significantly lower tear resistance and a significantly lower elongation at break. This may be achieved, for instance, by mixing additives into the corresponding base material, which in the extruded material have a strength-reducing and elongation-reducing effect. They may, for example, be polyolefins and chemically foamed additives. Furthermore, fillers or regenerators may be also used as additives, which in addition to the desired reduced strength and elongation values result in a reduced calorific value and thus impart a flame retardant effect to the extruded inner layer 3.

A necessary prerequisite is that the two layers 3 and 4, which are extruded separately but in the same production process, bond very well, i.e., inseparably and permanently. The bond must hold even during movements executed by cable L in operation.

The two layers 3 and 4 should have about the same thickness. In practice, the thickness ratio may be between about 60:40 and 40:60, where 60 applies to the outer layer 4. This ensures that both the mechanical and the chemical resistance of sheath M meet the requirements.

The tear resistance of inner layer 3, for instance, is only half of that of the outer layer 4. It is, for example, 20 N/mm². Its elongation at break, for instance, is smaller by a factor of "3" compared to outer layer 4. It is, e.g., about 150% compared to 500% of the outer layer 4.

Three examples of a material suitable for the inner layer 3 are given below:

Example 1

The base material is the TPE polyether urethane, which is mixed with an equal amount of a polyolefin elastomer.

Example 2

The mixture consists of 40% polyether urethane (TPE) as the base material and 30% of a polyolefin elastomer and 30% calcium carbonate as additives.

Example 3

The mixture consists of 50% polyether urethane (TPE) as the base material and 20% of a polyolefin, 29% calcium carbonate and 1% of an expanding agent as additives.

Cable L shown in cross section in Fig. 3 has three cores A that are stranded together. Core A consists of conductor 1 and insulation 2 surrounding it. Here,

they are jointly surrounded by sheath M. Conductors 1 are preferably flexible, electrical stranded conductors made of copper wires. Cable L is shown with three cores A. It may also have two or more than three cores A. Each core A may be constructed differently from the other cores. This is true, for instance, if both power cores and control cores are present in a cable L. The space intervals between the cores may be filled with a filler to produce an approximately circular circumferential area of the "core" of cable L, or with the material of sheath M surrounding cores A.

To strip the insulation from the end of cable L, only the outer layer 4 of the sheath M must be completely severed with a circular cut. Sheath M can then be pulled off in longitudinal direction of cable L, so that the three cores A are freed from sheath M. This is shown in Fig. 4. Any nicking of the inner layer 3 that may occur as the outer layer 4 is being severed can be advantageous for the tear-off.

In the embodiments of cable L according to Fig. 5 and 6 an electrical shield in the form of a braid or roping is disposed over the insulated conductor 1 or cores A. Prior to extruding sheath M, a separator 6 is advantageously placed around shield 5 to prevent penetration of the material of inner layer 3 of sheath M into shield 5. This is required for simple stripping of the insulation from cable L. Separator 6 is preferably made of a material that bonds with the inner layer 3 of sheath M.

In the embodiment of cable L according to Fig. 6 filler elements 7 are disposed in the space intervals between cores A. Prior to applying shield 5, a wrapping 8 is advantageously applied over cores A and filler elements 7 to serve as the base for shield 5. Wrapping 8 may be a nonwoven material, e.g., a nonwoven polyester.

Claims

1. Cable with at least one transmission element, which is surrounded by a sheath of insulation material, **characterized in that**
 - the sheath (M) comprises an inner layer (3) and an outer layer (4), which are firmly bonded together and
 - the values for tear strength and elongation at break of the inner layer (3) are designed to be clearly lower than those of the outer layer (4).
2. Cable as claimed in Claim 1, **characterized in that** the two layers (3, 4) of the sheath (M) are about equally thick.
3. Cable as claimed in Claim 1, **characterized in that** the thickness ratio of the outer layer (4) to the inner layer (3) is between 60:40 and 40:60.
4. Cable as claimed in Claim 1, **characterized in that** the tear resistance of the inner layer (3) is about half of that of the outer layer (4).
5. Cable as claimed in Claim 4, **characterized in that** the tear resistance of the inner layer (3) is about 20 N/mm².
6. Cable as claimed in Claim 1, **characterized in that** the elongation at break of the inner layer (3) is smaller by a factor of "3" than that of the outer layer (4).
7. Cable as claimed in Claim 6, **characterized in that** the elongation at break of the inner layer (3) is about 150%.

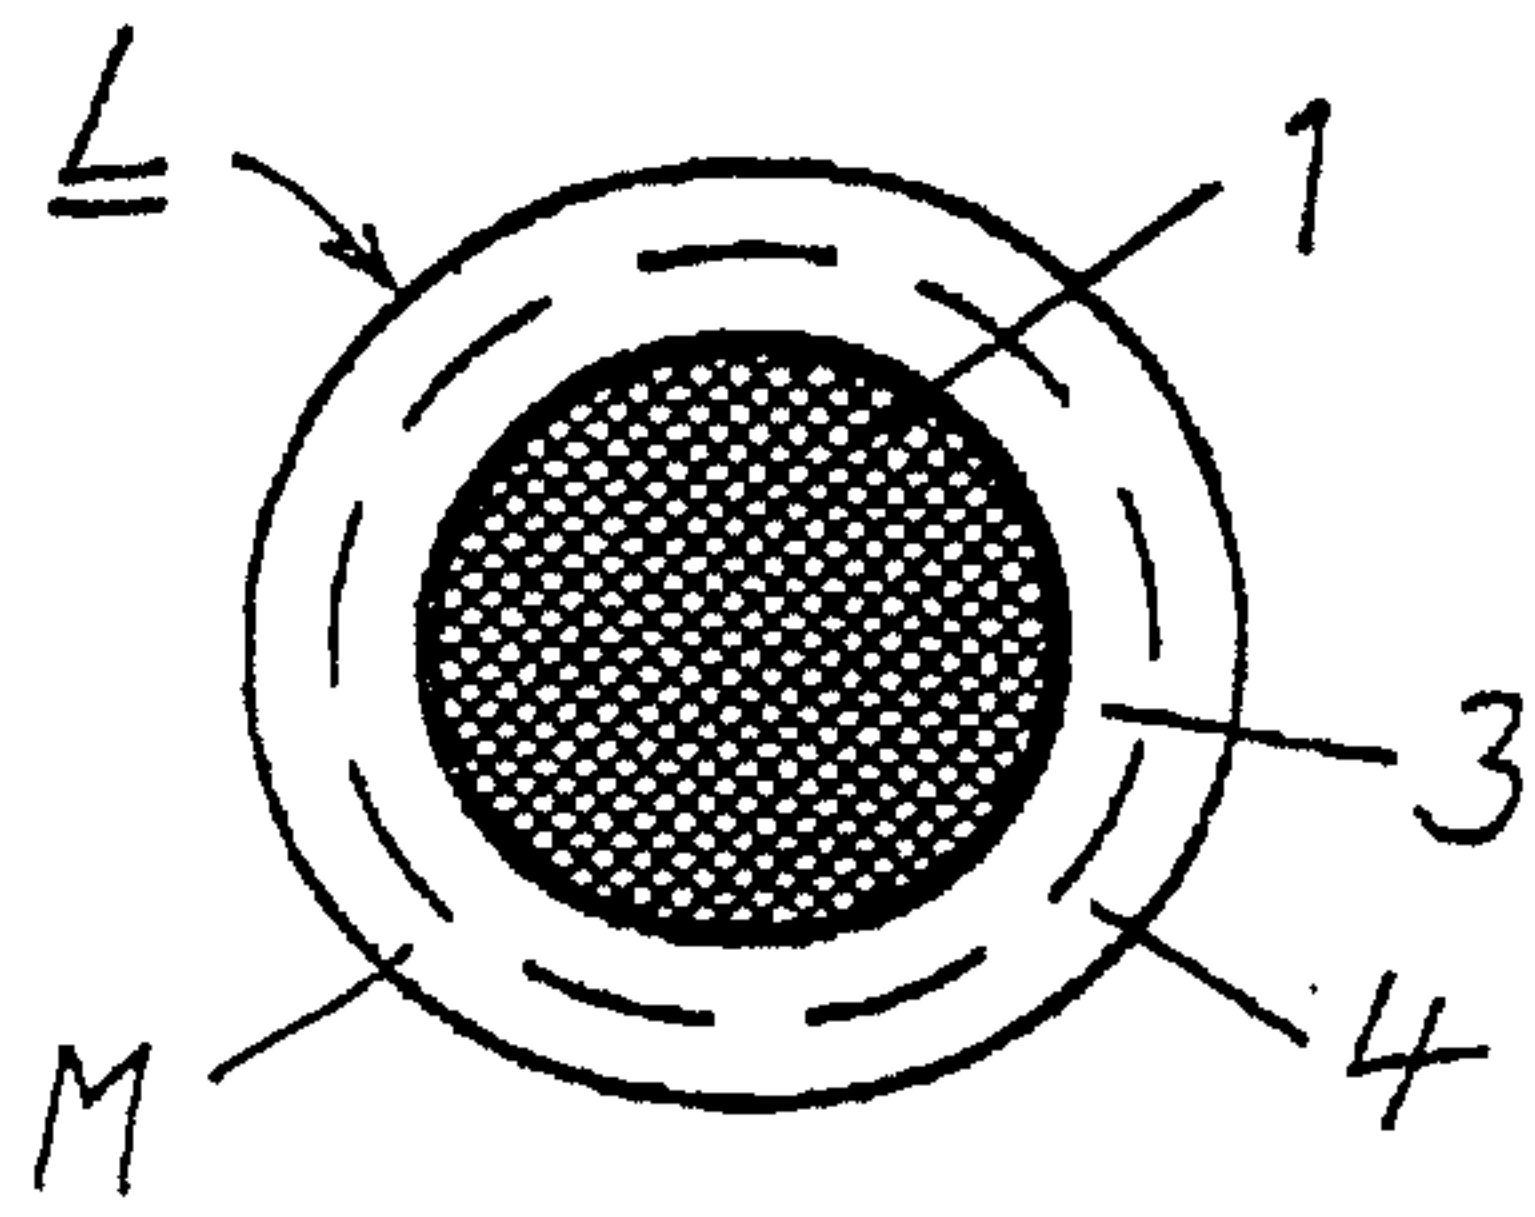


Fig. 1

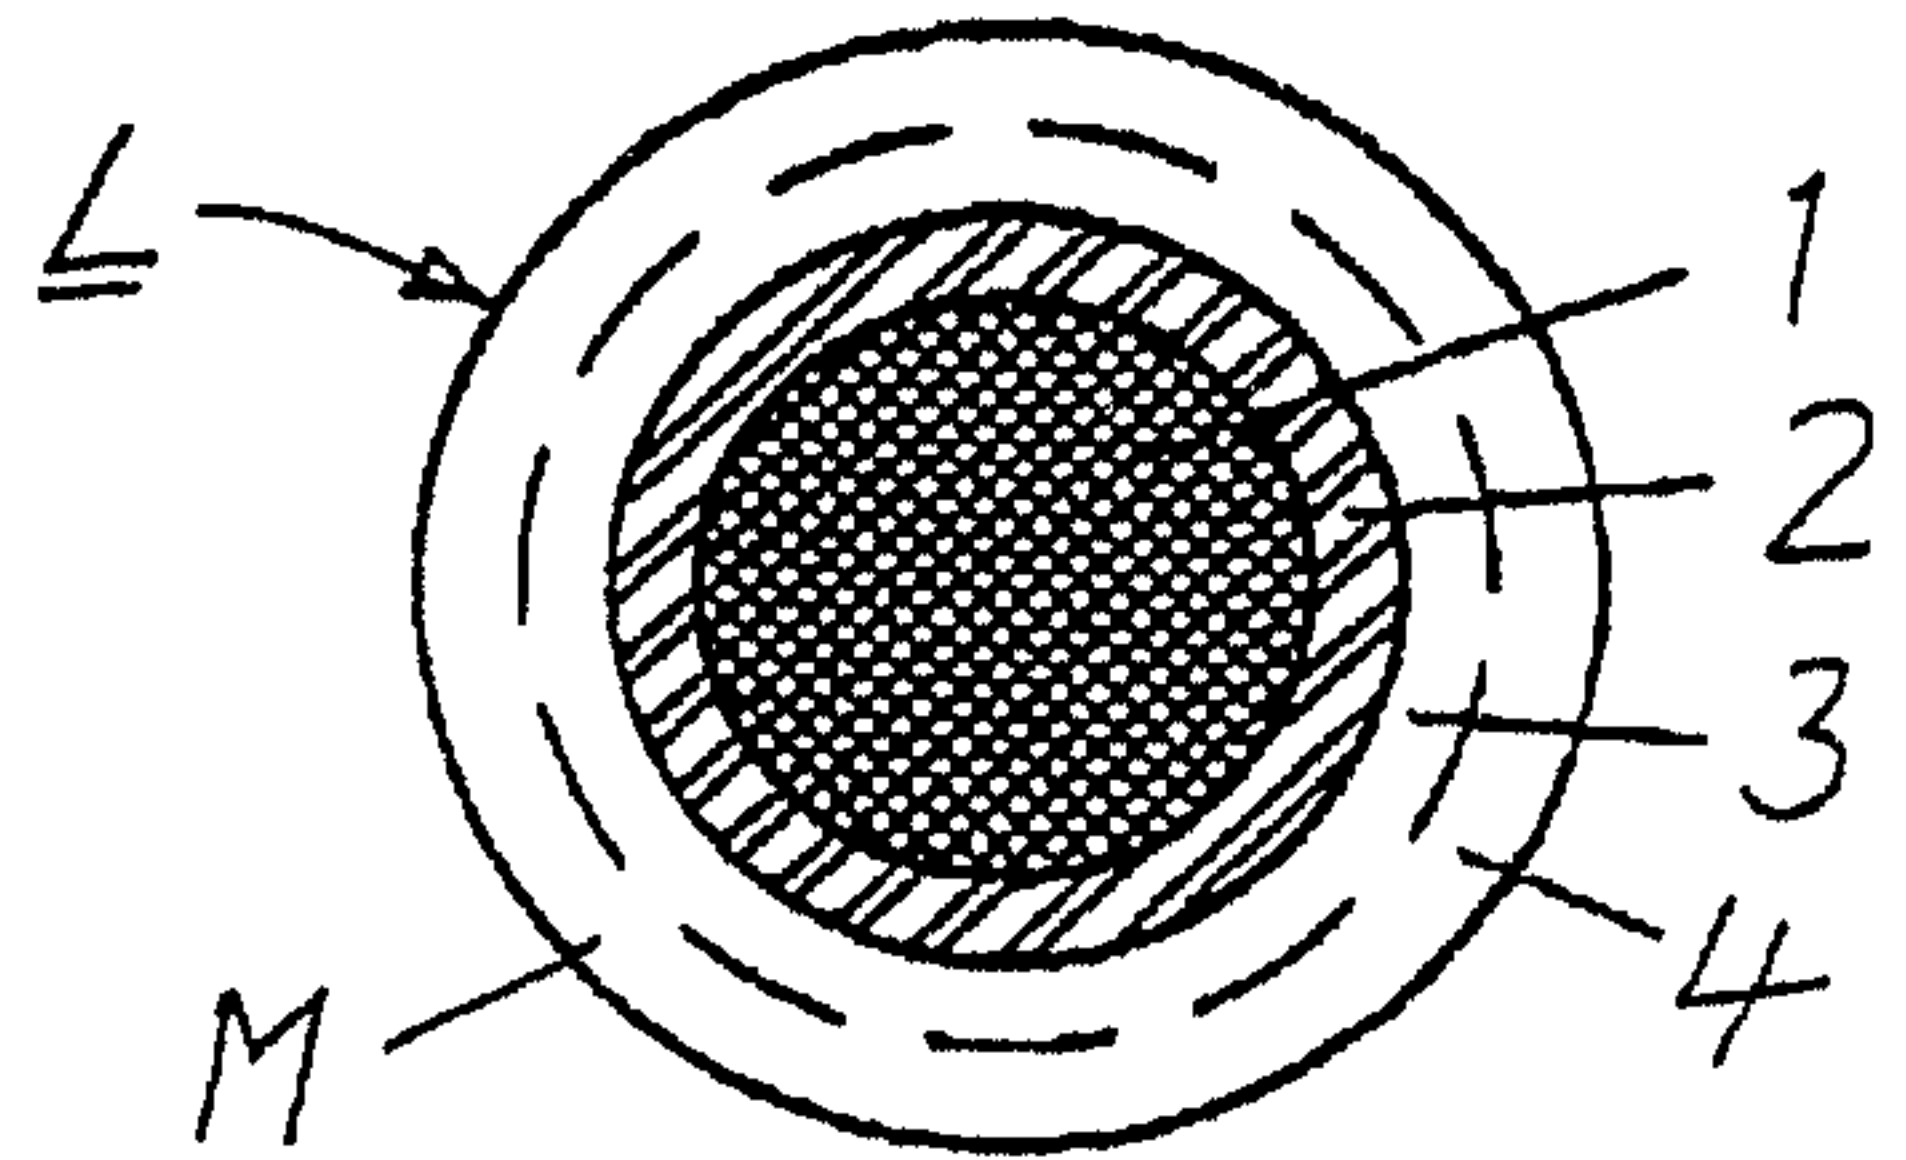


Fig. 2

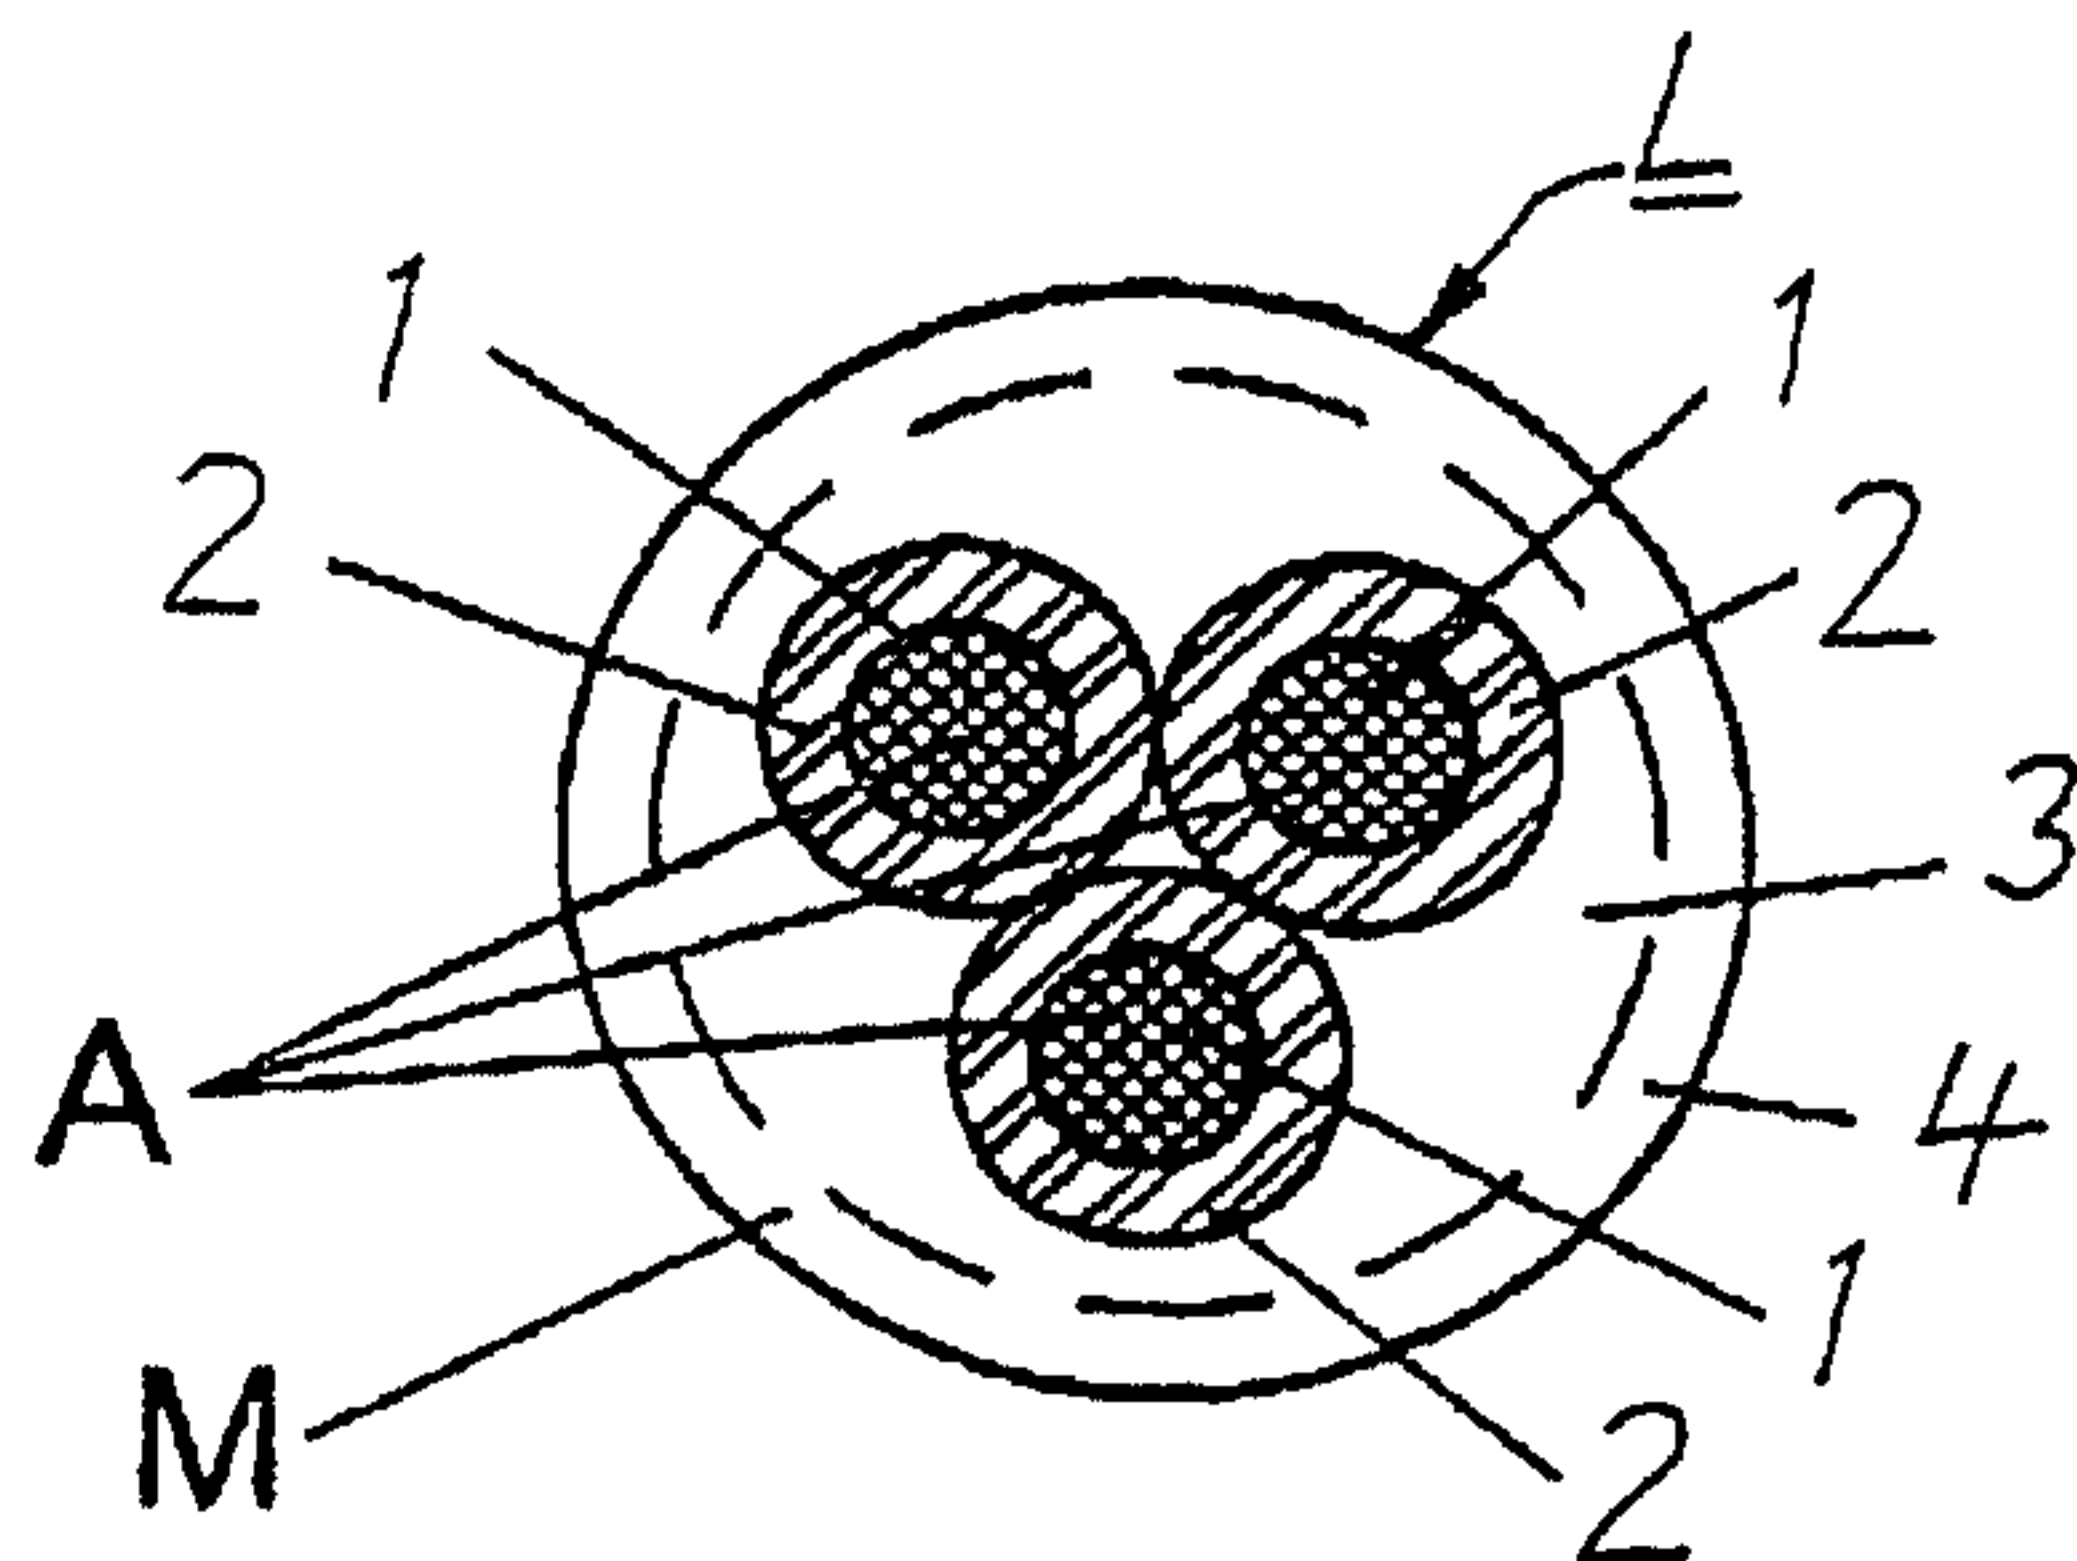


Fig. 3

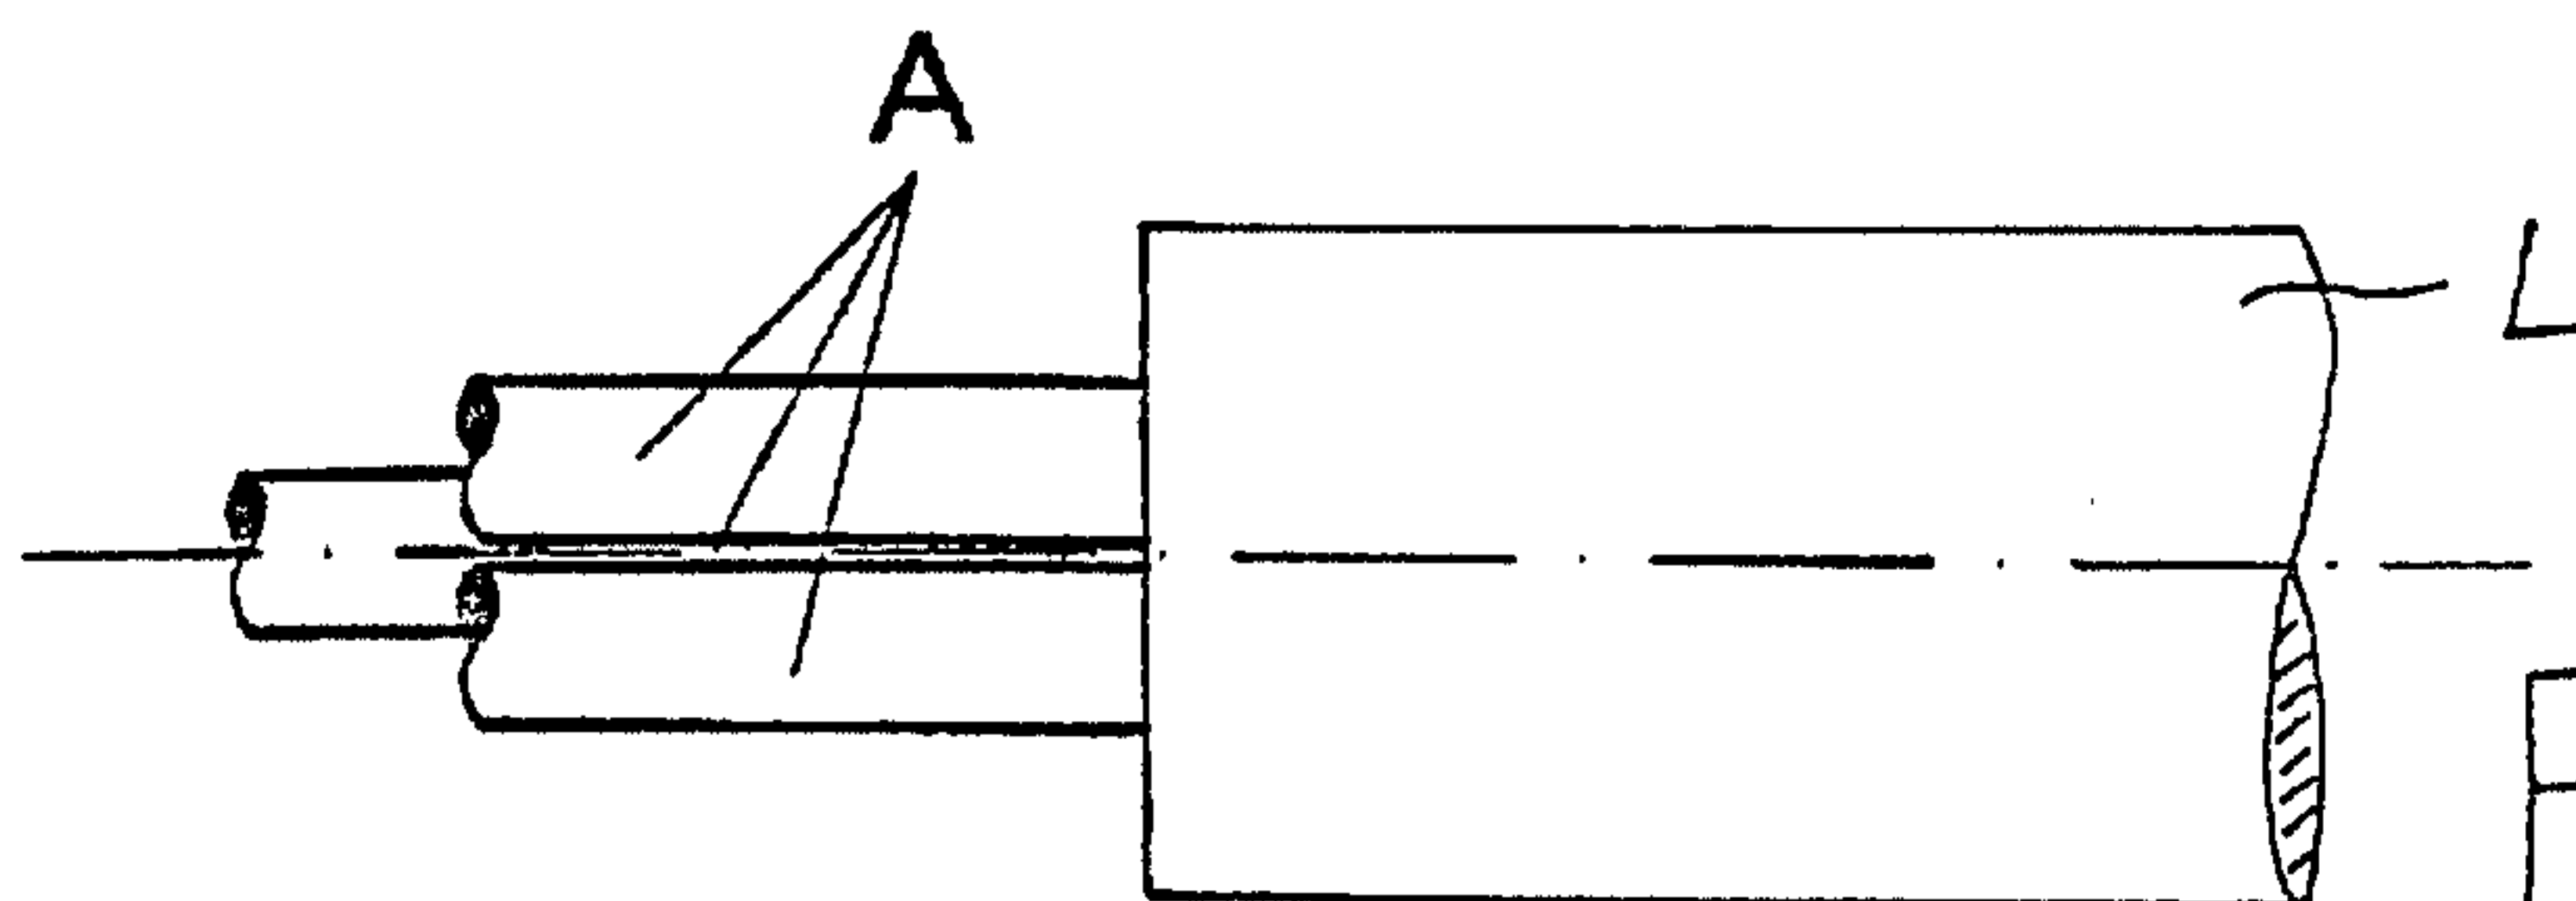


Fig. 4

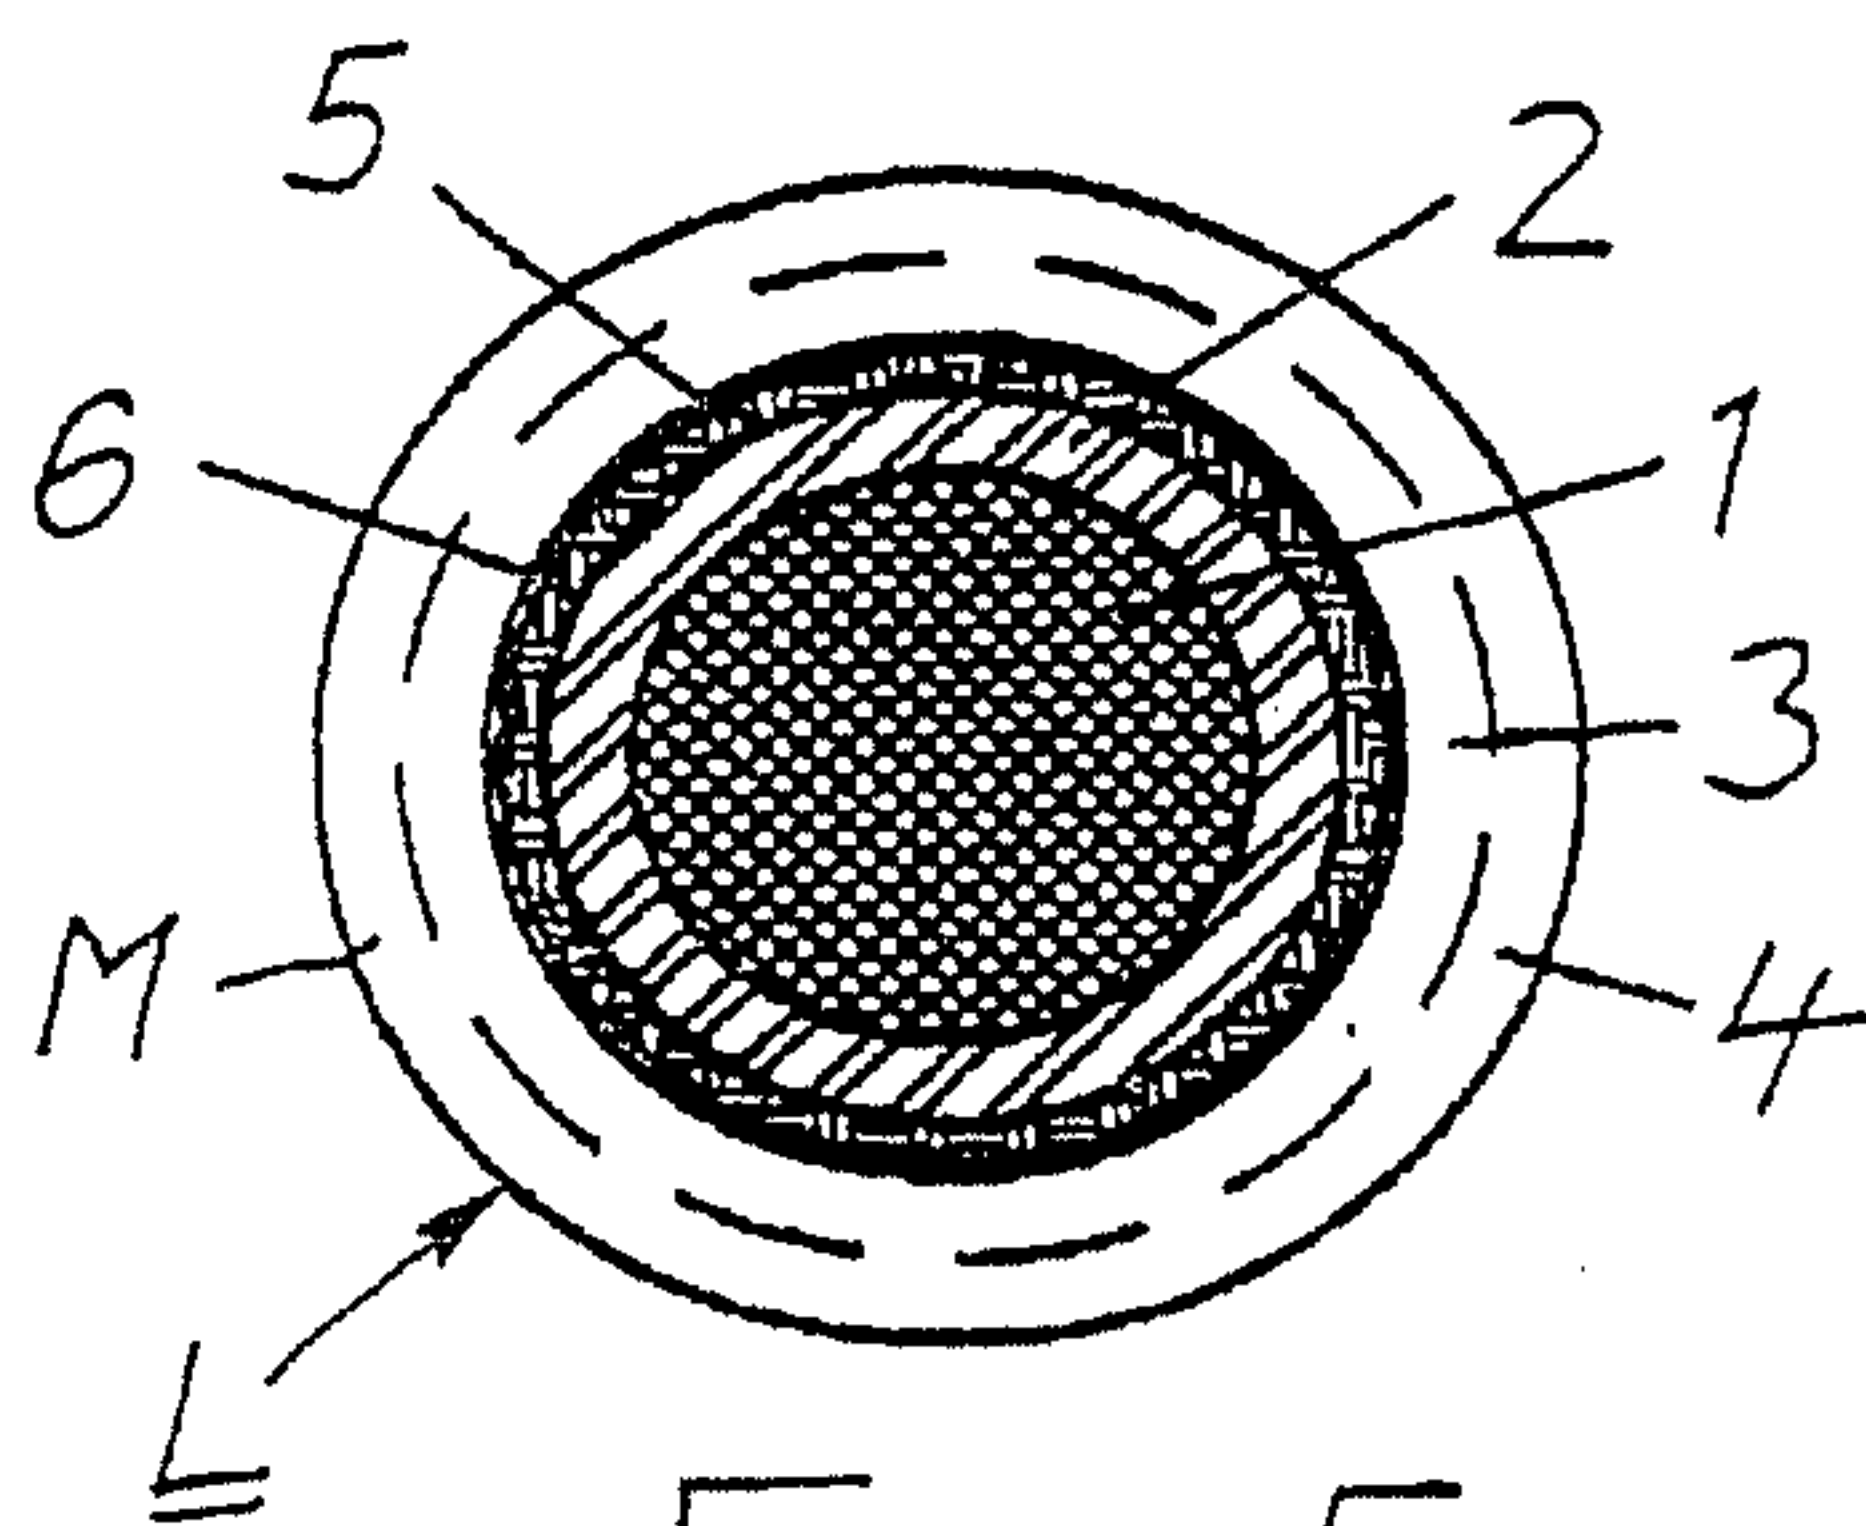


Fig. 5

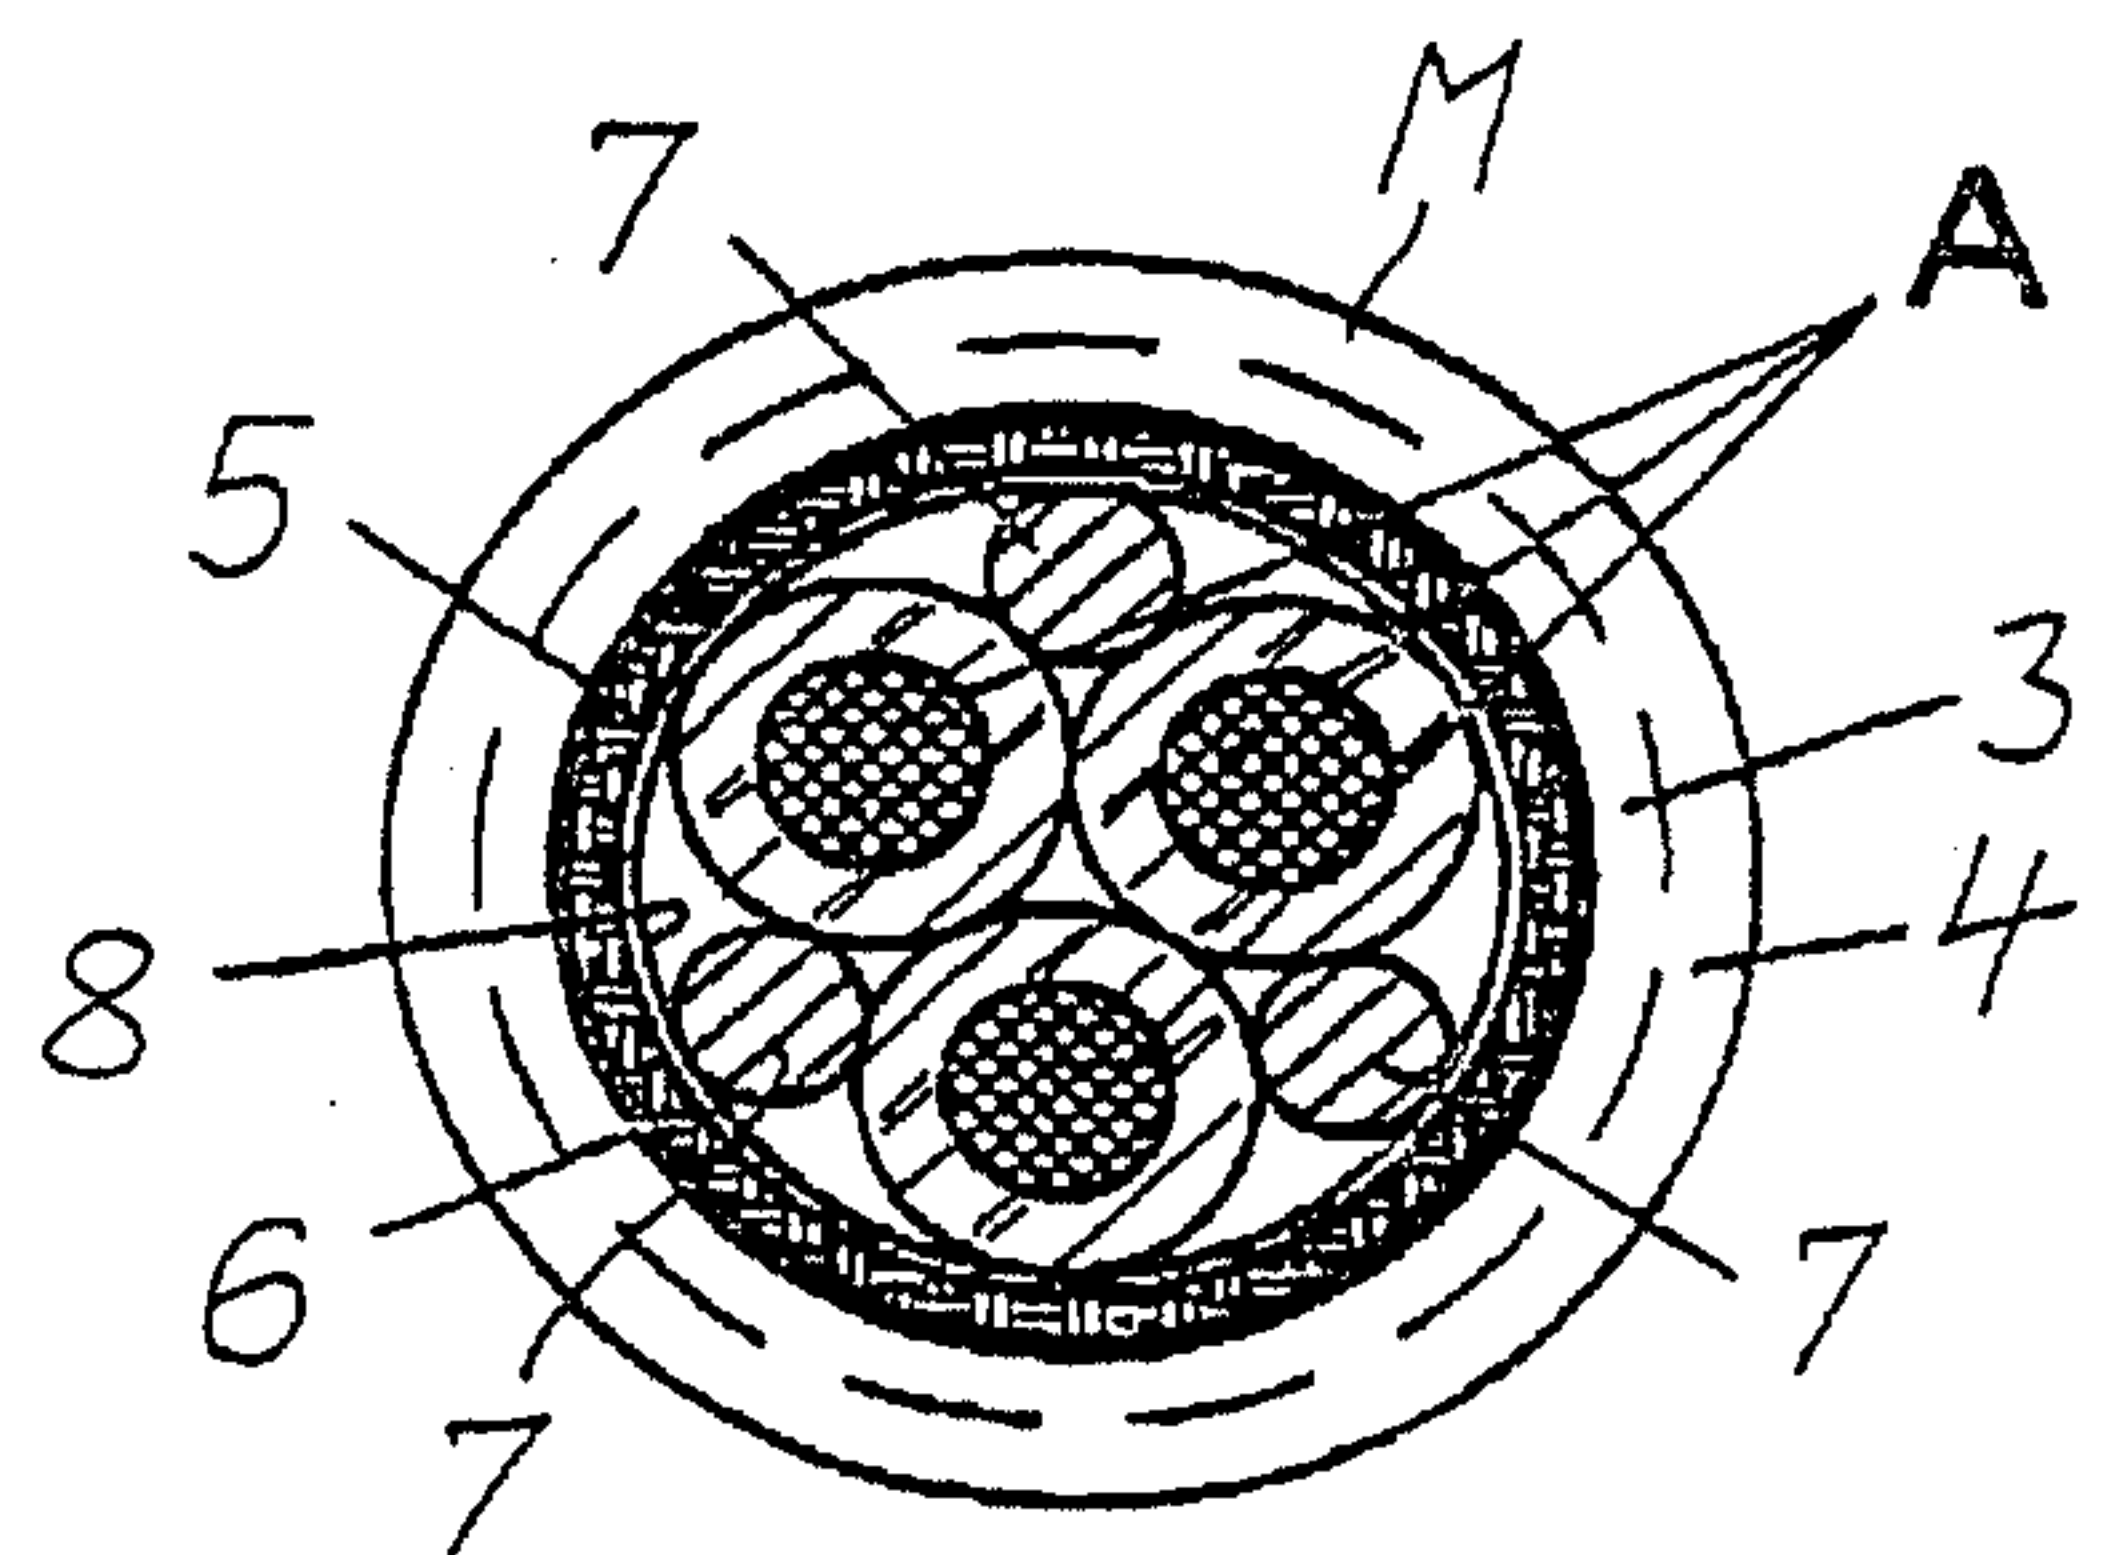


Fig. 6

