



(19) **United States**

(12) **Patent Application Publication**

**Paul et al.**

(10) **Pub. No.: US 2003/0130733 A1**

(43) **Pub. Date: Jul. 10, 2003**

(54) **NOVEL INTRAOCULAR LENS FOR REDUCING GLARE**

which is a continuation-in-part of application No. 09/086,882, filed on May 29, 1998, now Pat. No. 6,162,249.

(75) Inventors: **Marlene L. Paul**, Laguna Niguel, CA (US); **Daniel G. Brady**, San Juan Capistrano, CA (US); **Jim Deacon**, Goleta, CA (US); **Huawei Zhao**, Irvine, CA (US)

**Publication Classification**

(51) **Int. Cl.<sup>7</sup>** ..... **A61F 2/16**  
(52) **U.S. Cl.** ..... **623/6.17**

Correspondence Address:

**PETER J. GLUCK**  
**1700 E. ST. ANDREW PLACE**  
**SANTA ANA, CA 92799-5162 (US)**

(57) **ABSTRACT**

An intraocular lens implantable in an eye includes an optic for placement in the capsular bag of the eye and for directing light toward the retina of the eye. The optic has a central optical axis, an anterior face, an opposing posterior face and a peripheral edge between the faces. The peripheral edge has one or more curved or angled surfaces that reduce glare within the IOL. For instance, a rounded transition surface on the anterior side of the peripheral edge diffuses the intensity of reflected light, or a particular arrangement of straight edge surfaces refracts the light so as not to reflect, or does not reflect at all. The intersection of the peripheral edge and at least one of the anterior face and the posterior face, preferably both of such faces, forms a peripheral corner located at a discontinuity between the peripheral edge and the intersecting face or faces. The present IOLs inhibit cell growth from the eye in front of or in back of the optic and reduce glare obtained in the eye in which the IOL is located.


(73) Assignee: **ADVANCED MEDICAL OPTICS, INC.**, Santa Ana, CA (US)



(21) Appl. No.: **10/284,802**

(22) Filed: **Oct. 30, 2002**


**Related U.S. Application Data**

(63) Continuation of application No. 10/245,920, filed on Sep. 18, 2002, which is a continuation of application No. 09/507,602, filed on Feb. 18, 2000, now Pat. No. 6,468,306, which is a continuation of application No. 09/448,713, filed on Nov. 24, 1999, now abandoned,

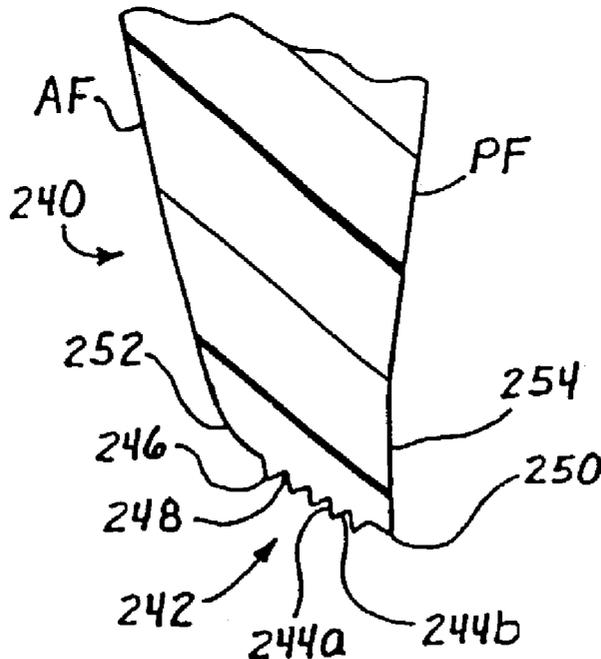


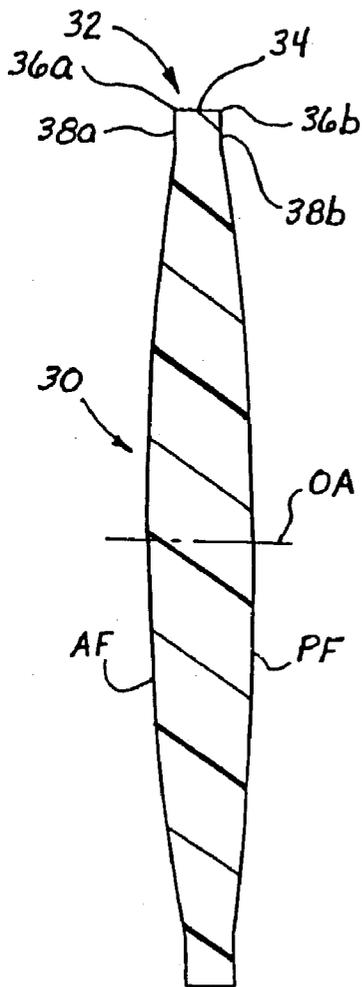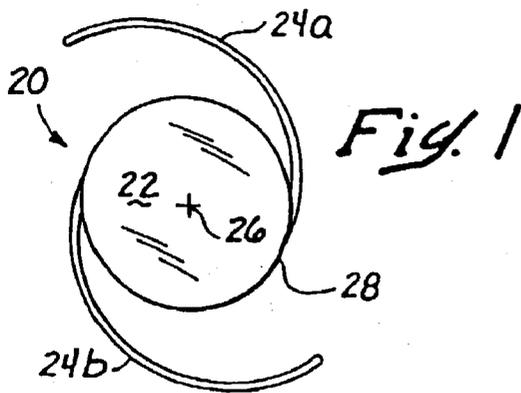

*Fig. 2*  
PRIOR ART

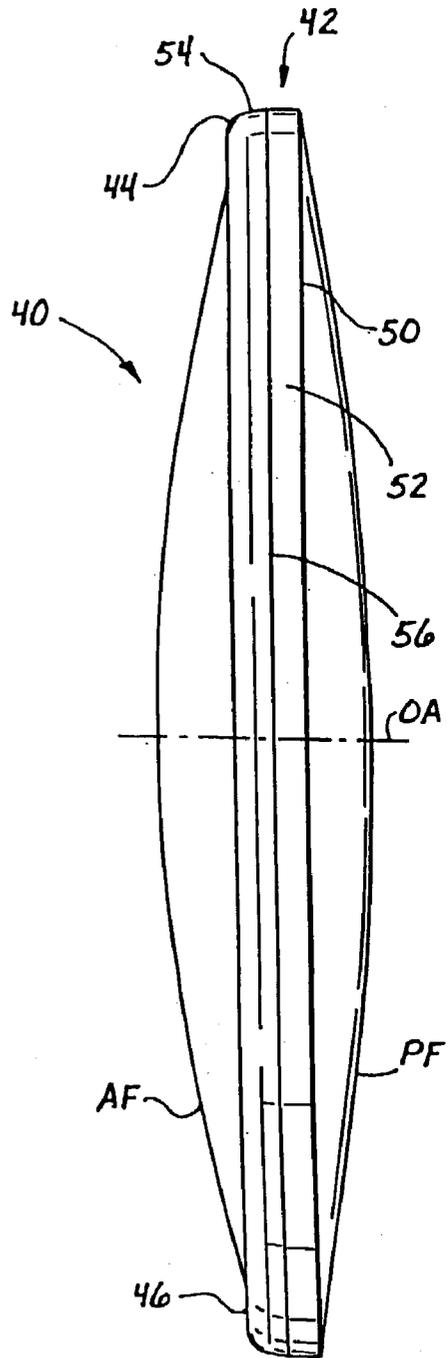



*Fig. 3*

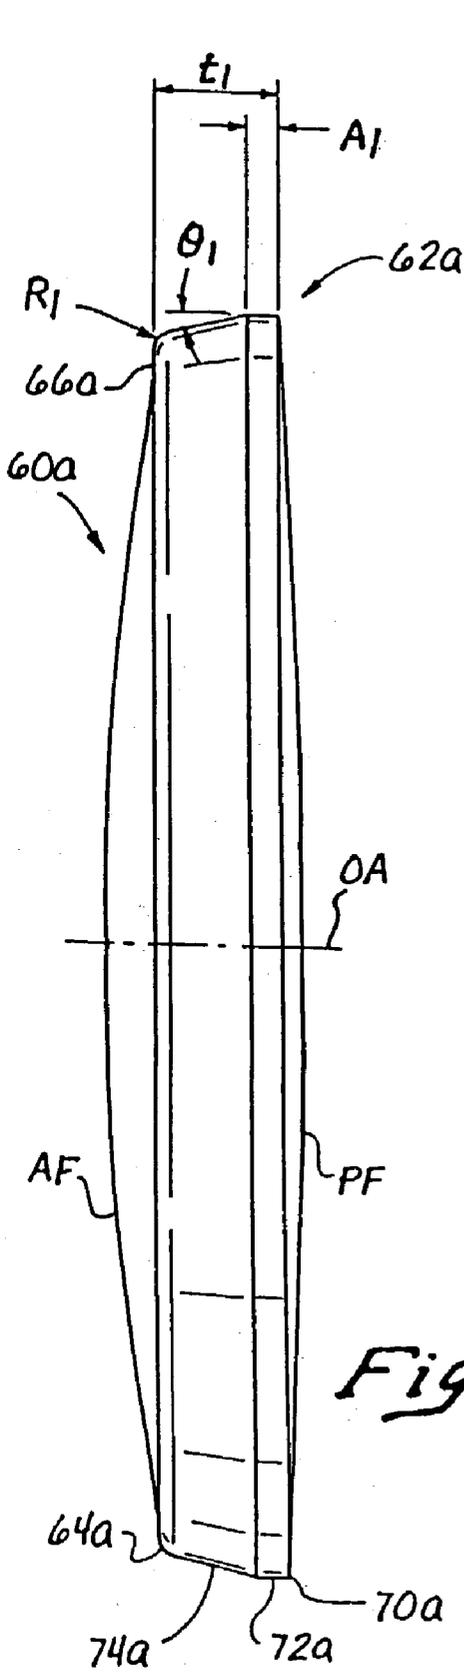


*Fig. 4*

*Fig. 5*

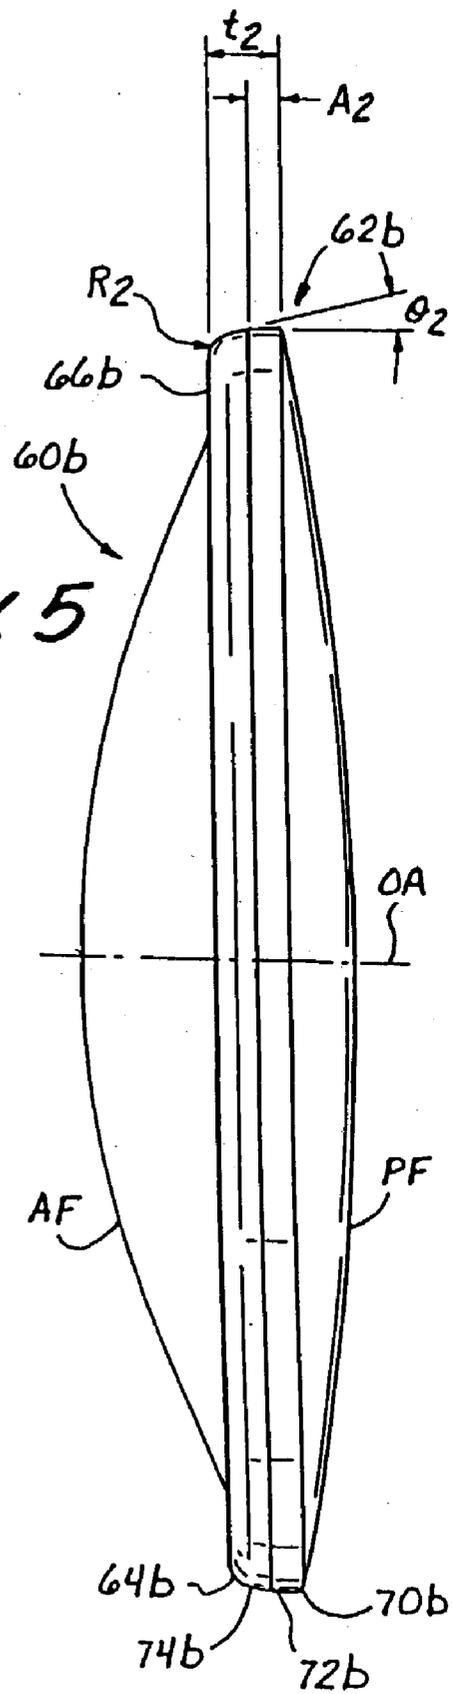


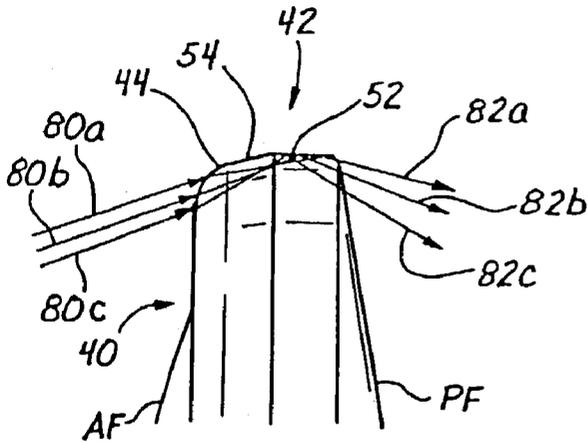


*Fig. 6*

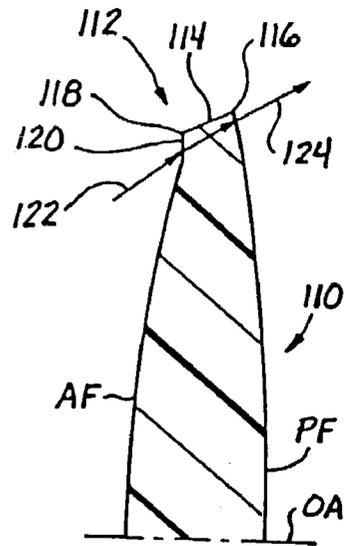

*Fig. 8*

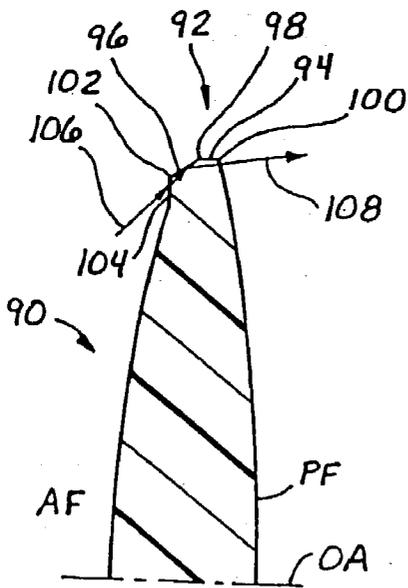

*Fig. 7*

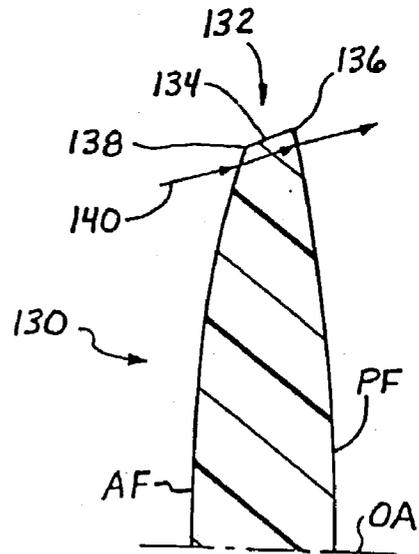

*Fig. 9*

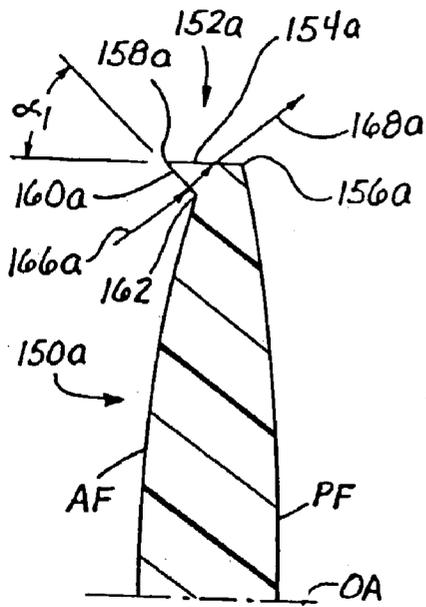


Fig. 10

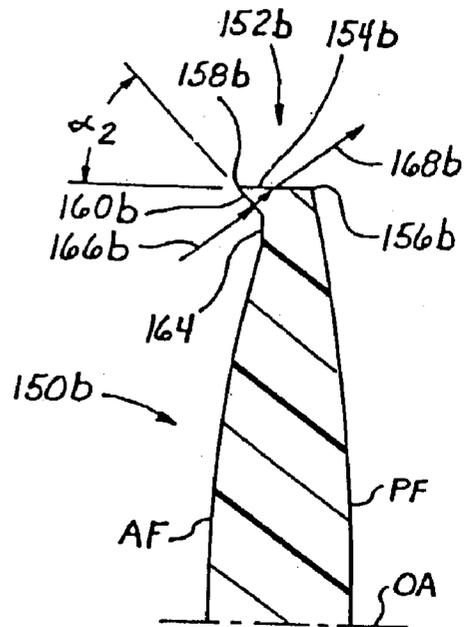


Fig. 11

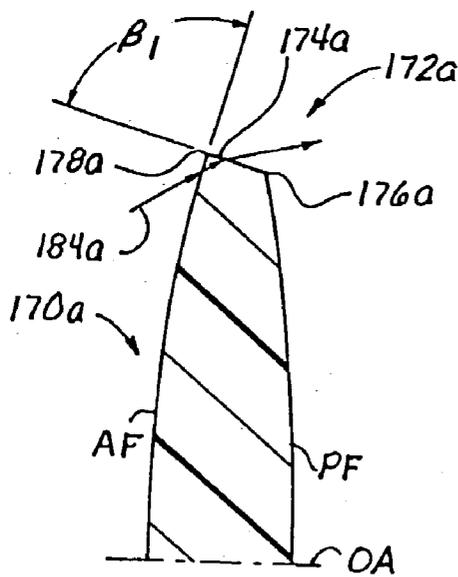


Fig. 12




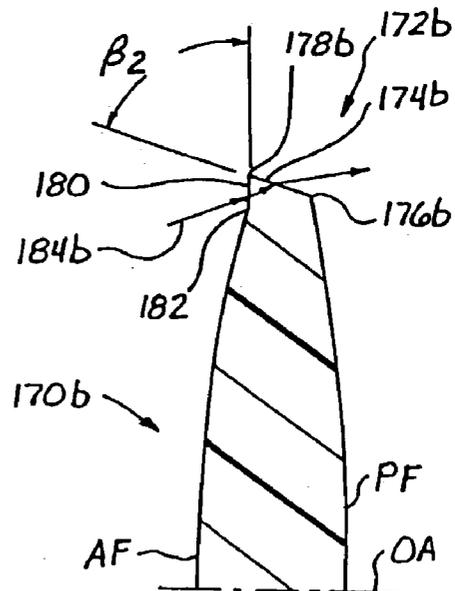


Fig. 13

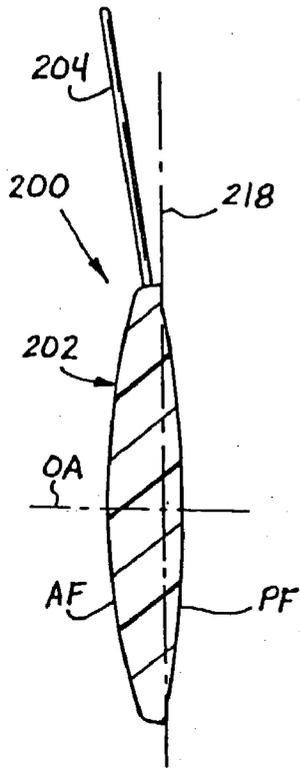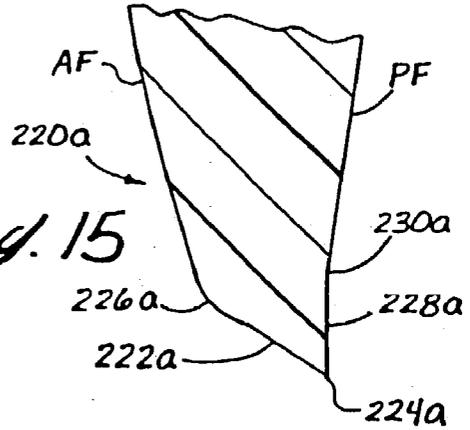


*Fig. 14B*

*Fig. 14A*

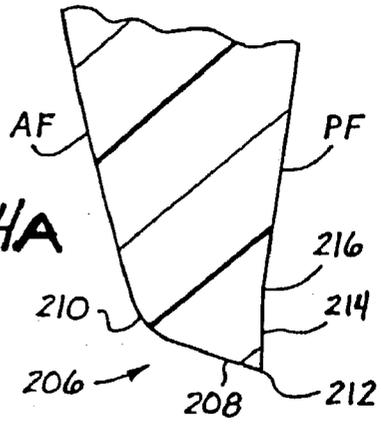


*Fig. 15*

*Fig. 16*

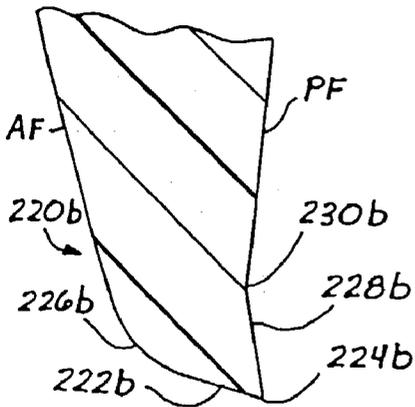

*Fig. 17*

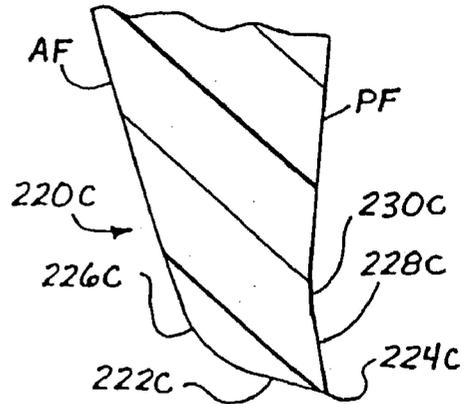











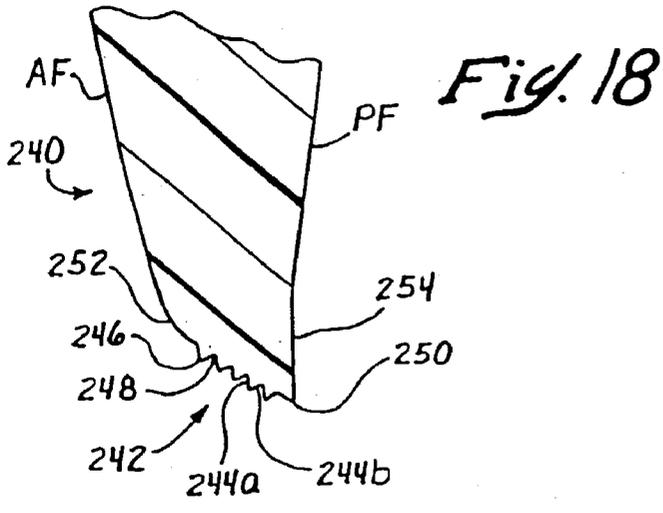


Fig. 19

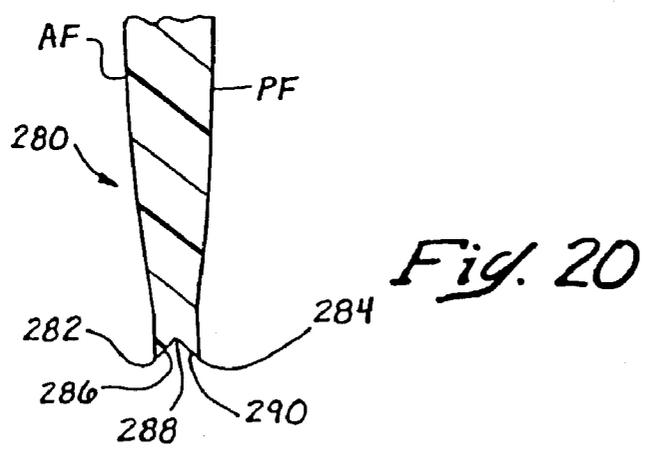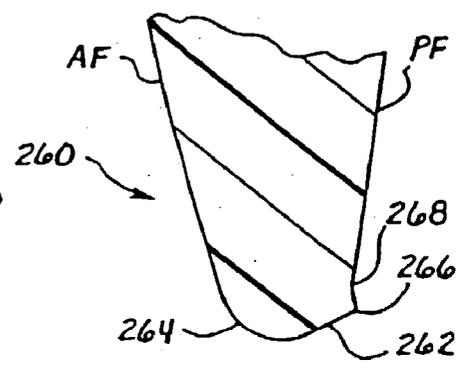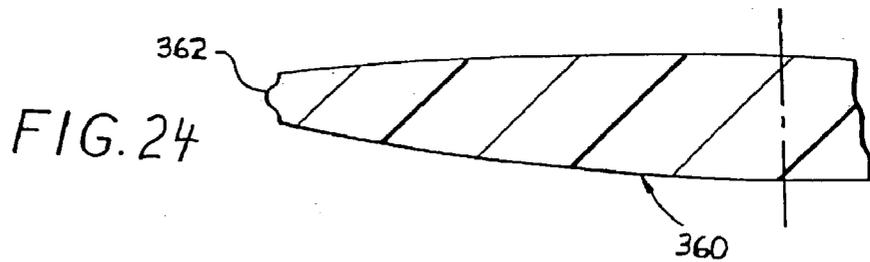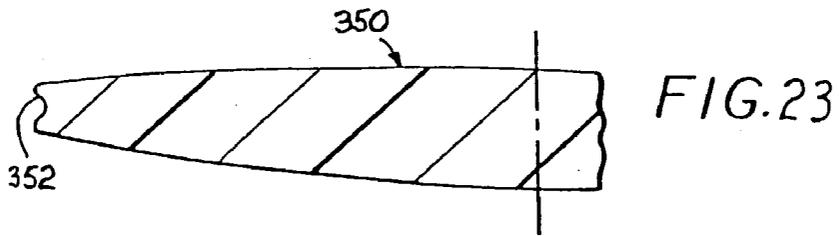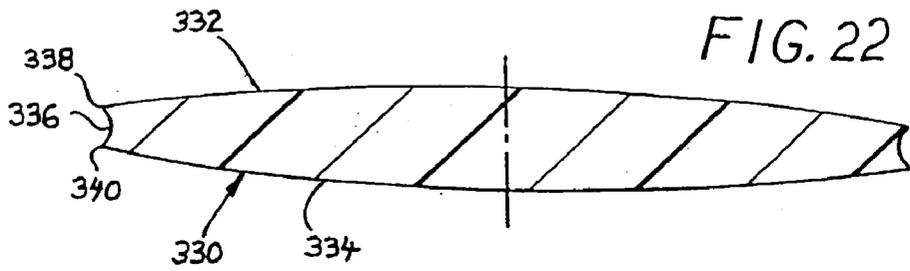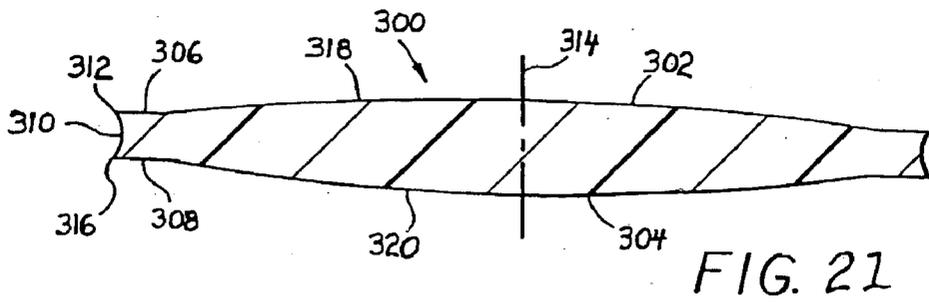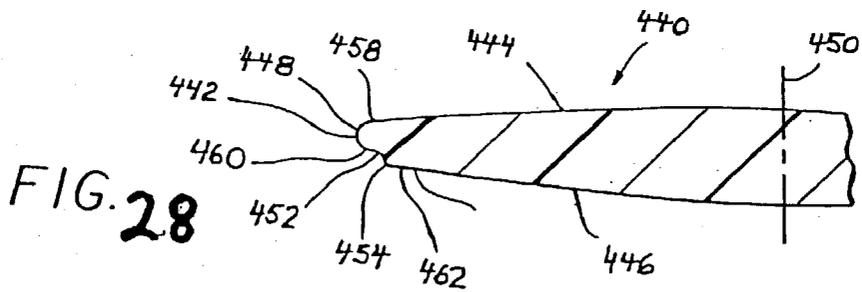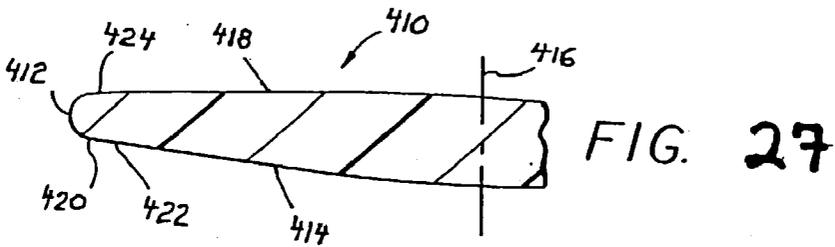

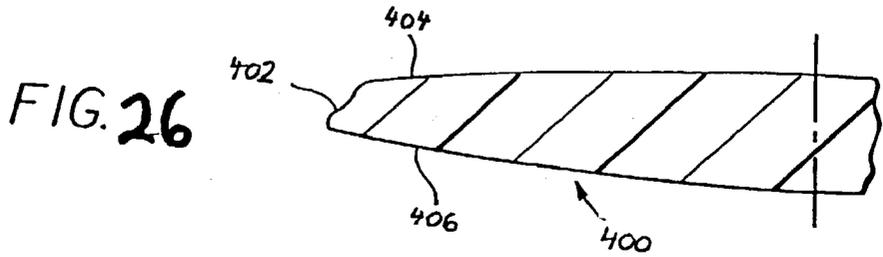

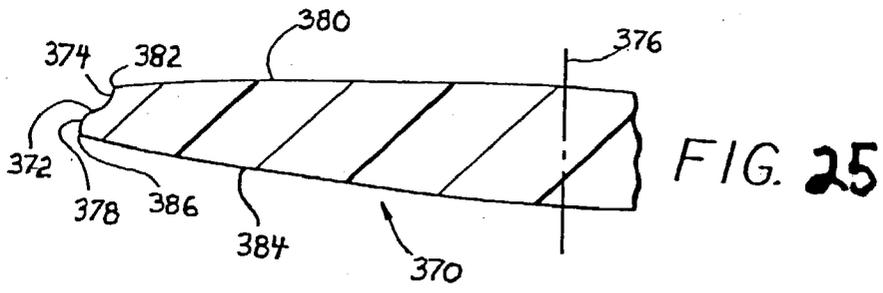

## NOVEL INTRAOCULAR LENS FOR REDUCING GLARE

### RELATED APPLICATION

[0001] The present application is a continuation of co-pending application Ser. No. 10/245,920, filed Sep. 17, 2002, which is a continuation of application Ser. No. 09/507,602, filed Feb. 18, 2000, now U.S. Pat. No. 6,483,306, issued Oct. 22, 2002, which is a continuation of application Ser. No. 09/448,713, filed Nov. 24, 1999, now abandoned, which is a continuation-in-part of application Ser. No. 09/086,882, filed May 29, 1998, now U.S. Pat. No. 6,162,249, issued Dec. 19, 2000. The disclosure of each of these applications and the patent is incorporated in its entirety by reference herein.

### BACKGROUND OF THE INVENTION

[0002] This invention relates to intraocular lenses (IOLs) and, more particularly, to IOLs which inhibit migration or growth of cells from the eye onto the IOL and reduce glare in the eye.

[0003] An intraocular lens is commonly used to replace the natural lens of a human eye when warranted by medical conditions. It is common practice to implant an IOL in a region of the eye known as the capsular bag or posterior capsule.

[0004] One potential concern with certain IOLs following implantation is that cells from the eye, particularly epithelial cells from the capsular bag, tend to grow in front of and/or in back of the optic of the IOL. This tends to block the optic of the IOL and to impair vision.

[0005] A common treatment for this condition is to use a laser to destroy the cells and a central region of the capsular bag. Although this treatment is effective, the laser is expensive and is not available throughout the world. There is also cost associated with the laser treatment as well as some patient inconvenience and risk of complications. Finally, the laser treatment may affect the performance of some IOLs.

[0006] Another potential concern after certain IOLs are implanted has to do with glare caused by light reflecting off of the IOLs, in particular, the edges of IOLs. Such glare can be an annoyance to the patient and may even lead to removal and replacement of the IOL.

[0007] It would be advantageous to provide IOLs which inhibit growth of cells from the eye onto the IOLs and/or which reduce glare caused by the IOLs in the eye.

### SUMMARY OF THE INVENTION

[0008] New IOLs have been discovered. Such IOLs are effective to inhibit cell growth, in particular epithelial cell growth, from the eye onto the optic of the IOLs. The IOLs are structured so as to reduce glare, in particular edge glare, in the eye resulting from the presence of the IOL. The present IOLs are straightforward in design and construction, are easily manufactured, can be implanted, or inserted in the eye using conventional techniques, and are effective and produce substantial benefits in use in the eye.

[0009] In one broad aspect of the present invention, the present IOLs are implantable in the eye and comprise an optic having a central optical axis, an anterior face, an opposing posterior face and a peripheral edge or edge surface between the faces. The optic is adapted for placement in the capsular bag of the eye and for directing light

toward the retina of the eye. In a very useful embodiment, the IOLs further comprise at least one fixation member, preferably two fixation members, and more preferably two elongated fixation members, coupled to the optic for use in fixing the IOLs in the eye.

[0010] In a preferred aspect, the present invention provides a reduced-glare intraocular lens implantable in the eye and including an optic adapted for placement in the capsular bag of the eye for directing light toward the retina of the eye. The optic has a central optical axis, an anterior face, an opposing posterior face, and a peripheral edge. The peripheral edge has at least one surface with a linear cross-sectional configuration that is oriented other than parallel to the central optical axis. Further, the peripheral edge and the anterior face, and/or the peripheral edge and the posterior face, intersect to form at least one peripheral edge corner located at a discontinuity between the peripheral edge and the intersecting anterior or posterior face. The peripheral edge may also include a rounded transition surface on its anterior side, wherein the peripheral edge corner is provided only between the peripheral edge and intersecting posterior face. The peripheral edge may also include two linear surfaces angled with respect to one another, wherein the other linear surface may be oriented parallel to the optical axis.

[0011] In another aspect of present invention, a reduced-glare intraocular lens implantable in an eye comprises an optic adapted for placement in the capsular bag of the eye and for directing light toward the retina of the eye. The optic has a central optical axis, an anterior face, and a posterior face. An outer edge of the optic is defined by a peripheral edge that includes, in cross-section, a linear surface that is non-parallel with respect to the optical axis and a posterior corner defining the posterior limit of the peripheral edge. Advantageously, cell growth from the eye in front of or in back of the optic is more inhibited relative to a substantially identical intraocular lens without the posterior corner, and reduced glare is obtained in the eye relative to a substantially identical intraocular lens having a peripheral linear surface that is parallel to the central optical axis. The optic may also include a convex surface on the peripheral edge defining a transition surface between the anterior face and the linear surface. A second linear surface that is parallel with respect to the optical axis may also be provided. In addition, the optic may include first and second linear surfaces, wherein the first linear surface is anteriorly-facing and second linear surface is parallel with respect to the optical axis.

[0012] In still a further embodiment of the present invention, an intraocular lens implantable in an eye includes an optic adapted for placement in the capsular bag of the eye and for directing light toward the retina of the eye. The optic includes a peripheral edge extending between an anterior face and a posterior face consisting only of a conical surface. The conical surface may be posteriorly-facing, wherein the conical surface is sufficiently angled with respect to the optical axis so as to increase transmission of light from the optic through the conical surface relative to a substantially identical intraocular lens with a peripheral edge consisting only of a surface parallel to the optical axis. Alternatively, a peripheral land extends between the anterior face and conical surface, wherein the conical surface is generally posteriorly-facing and wherein the conical surface and the peripheral land adjacent the conical surface define an acute included angle. In a still further form, the conical surface may be anteriorly-facing, wherein the conical surface is sufficiently angled with respect to the optical axis so as to

decrease the probability of light internal to the optic contacting the conical surface relative to a substantially identical intraocular lens with a peripheral edge consisting only of a surface parallel to the optical axis.

**[0013]** Another aspect of present invention is an intraocular lens including an optic defining a central optical axis, an anterior face, and a posterior face. A peripheral edge extending between the anterior face and the posterior face includes, in cross-section, a linear edge surface terminating at its anterior side in an anterior edge corner. An anterior land adjacent the anterior edge corner, wherein the linear edge surface and the anterior land define an acute included angle so as to increase transmission of light from the optic through the conical surface relative to a substantially identical intraocular lens with a linear edge surface and anterior land that define an included angle of 90° or more.

**[0014]** In a still further form, the present invention provides an intraocular lens having optic defining optical axis, an anterior face, and a posterior face. A peripheral edge stands between the anterior face and posterior face and includes, in cross-section, at least two linear edge surfaces that are not parallel to the optical axis. The two linear edge surfaces may be angled radially inwardly toward each other to meet an apex and together define a groove. Further, a plurality of such grooves may be provided by adjoining linear edge surfaces. A rounded transition surface extending between an anteriorly-facing edge surface and the anterior face of the optic may also be provided.

**[0015]** The peripheral edge of the present IOLs may have a substantially continuous curved configuration in the direction between the anterior and posterior faces of the optic, that is between the faces in a cross-sectional plane including the optical axis. Indeed, the entire peripheral edge may have a substantially continuous curved configuration in the direction between the anterior and posterior faces of the optic.

**[0016]** The peripheral edge of the present IOLs may have a curved surface, a flat surface that is either parallel to the optical axis or not, or a combination of flat and/or curved surfaces. For example, if a portion of the peripheral edge has a substantially continuous curved configuration, another portion, for example, the remaining portion, of the peripheral edge preferably has a linear configuration in the direction between the anterior and posterior faces of the optic which is not parallel to the optical axis.

**[0017]** The present IOLs preferably provide reduced glare in the eye relative to the glare obtained with a substantially identical IOL having a peripheral edge parallel (flat) to the central optical axis in the direction between the faces of the optic. One or more of at least part of the peripheral edge, a portion of the anterior face near the peripheral edge and a portion of the portion face near the peripheral edge may be at least partially opaque to the transmission of light, which opacity is effective in reducing glare. Such opacity can be achieved in any suitable manner, for example, by providing "frosting" or physically or chemically roughening selected portions of the optic.

**[0018]** In addition, the intersection of the peripheral edge and at least one or both of the anterior face and the posterior face forms a peripheral corner or corner edge located at a discontinuity between the peripheral edge and the intersecting face. Such peripheral corner, which may be considered a sharp, abrupt or angled peripheral corner, is effective in inhibiting migration or growth of cells from the eye onto the IOL. Preferably, the present IOLs, with one or two such

angled peripheral corners, provide that cell growth from the eye in front of or in back of the optic is more inhibited relative to a substantially identical IOL without the sharp, abrupt or angled peripheral corner or corners.

**[0019]** The peripheral edge and the intersecting face or faces intersect at an angle or angles, preferably in a range of about 45° to about 135°, more preferably in a range of about 60° to about 120°. In one embodiment, an obtuse angle (that is greater than 90° and less than 180°) of intersection is provided. Such angles of intersection are very effective in facilitating the inhibition of cell migration or growth onto and/or over the anterior face and/or posterior face of the optic of the present IOL.

**[0020]** In one very useful embodiment, at least one, conceivably both, of the anterior face and the posterior face has a peripheral region extending from the peripheral edge toward the central optical axis. The peripheral region or regions preferably are substantially planar, and may or may not be substantially perpendicular to the central optical axis. Preferably, only the anterior face has a peripheral region extending from the peripheral edge toward the central optical axis which is substantially planar, more preferably substantially perpendicular to the central optical axis. The peripheral region preferably has a radial dimension of at least about 0.1 mm, and more preferably no greater than about 2 mm.

**[0021]** The dimension of the optic parallel to the central optical axis between the anterior face and the posterior face preferably is smaller at or near the peripheral edge, for example, at the peripheral region or regions, than at the central optical axis.

**[0022]** In one embodiment, at least a part or a portion of the peripheral edge surface of the optic is generally convex relative to the central optical axis. Alternately, at least a part or a portion of the peripheral edge surface of the optic is generally concave relative to the central optical axis. In a particularly useful embodiment, a first portion of the peripheral edge surface is generally convex relative to the central optical axis and a second portion of the peripheral edge surface is generally concave relative to the optical axis.

**[0023]** Preferably, the peripheral edge and/or the peripheral region or regions circumscribe the central optical axis. The anterior face and the posterior face preferably are both generally circular in configuration, although other configurations, such as oval, elliptical and the like, may be employed. At least one of the anterior and posterior faces has an additional region, located radially inwardly of the peripheral region, which is other than substantially planar.

**[0024]** Each and every combination of two or more features described herein is included within the scope of the present invention provided that such features are not mutually inconsistent.

**[0025]** The invention, together with additional features and advantages thereof, may best be understood by reference to the following description taken in connection with the accompanying illustrative drawings in which like parts bear like reference numerals.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0026]** FIG. 1 is a plan view of one form of intraocular lens (IOL) constructed in accordance with the teachings of present invention.

[0027] FIG. 2 is a cross-sectional view of an optic of a prior art IOL.

[0028] FIG. 3 is an elevational view of an optic of an exemplary embodiment of an IOL of the present invention having a medium diopter value.

[0029] FIG. 4 is an elevational view of an optic of a further exemplary IOL of the present invention having a small diopter value.

[0030] FIG. 5 is an elevational view of an optic of a further exemplary IOL of the present invention having a large diopter value.

[0031] FIG. 6 is an elevational view of a peripheral edge region of the IOL of FIG. 3 showing the paths of a plurality of light rays passing therethrough.

[0032] FIG. 7 is a cross-sectional view of a peripheral edge region of an IOL of the present invention having an edge surface that is parallel to the optical axis, an anteriorly-facing edge surface that is not parallel to, the optical axis and an anterior peripheral land that is perpendicular to the optical axis.

[0033] FIG. 8 is a cross-sectional view of a peripheral edge region of an IOL of the present invention having an anteriorly-facing edge surface not parallel to the optical axis and an anterior peripheral land perpendicular to the optical axis.

[0034] FIG. 9 is a cross-sectional view of a peripheral edge region of an IOL of the present invention having an anteriorly-facing edge surface that is not parallel to the optical axis and no peripheral land.

[0035] FIG. 10 is a cross-sectional view of a peripheral edge region of an IOL of the present invention having an edge surface that is parallel to the optical axis and an anterior peripheral land that is not perpendicular to the optical axis.

[0036] FIG. 11 is a cross-sectional view of a peripheral edge region of an IOL of the present invention having an edge surface that is parallel to the optical axis, an anterior peripheral land that is perpendicular to the optical axis, and an anterior peripheral land that is not perpendicular to the optical axis.

[0037] FIG. 12 is a cross-sectional view of a peripheral edge region of an IOL of the present invention having a posteriorly-facing edge surface that is not parallel to the optical axis and no peripheral land.

[0038] FIG. 13 is a cross-sectional view of a peripheral edge region of an IOL of the present invention having a posteriorly-facing edge surface that is not parallel to the optical axis and an anterior peripheral land that is perpendicular to the optical axis.

[0039] FIG. 14a is a radial sectional view of an IOL of the present invention showing a fixation member extending from a peripheral edge.

[0040] FIG. 14b is an elevational view of a peripheral edge region of the IOL of FIG. 14a.

[0041] FIGS. 15-17 are elevational views of peripheral edge regions of IOLs of the present invention each having an anteriorly-facing edge surface that is not parallel to the

optical axis, a rounded transition surface between the edge surface and the anterior face of the IOL, and a posterior peripheral land.

[0042] FIG. 18 is an elevational view of a peripheral edge region of an IOL of the present invention having a baffle structure disposed along an anteriorly-facing edge surface.

[0043] FIG. 19 is an elevational view of a peripheral edge region of an IOL of the present invention having an anteriorly-facing edge surface and a rounded transition surface between the edge surface and the anterior face of the IOL.

[0044] FIG. 20 is an elevational view of a peripheral edge region of an IOL of the present invention having both anteriorly-and posteriorly-facing edge surfaces.

[0045] FIG. 21 is a cross-sectional view of the optic of an alternative IOL of the present invention.

[0046] FIG. 22 is a cross-sectional view of the optic of an alternate embodiment of an IOL in accordance with the present invention.

[0047] FIG. 23 is a partial cross-sectional view of the optic of a further embodiment of an IOL in accordance with the present invention.

[0048] FIG. 24 is a partial cross-sectional view of an additional embodiment of an IOL in accordance with the present invention.

[0049] FIG. 25 is a partial cross-sectional view of the optic of another embodiment of an IOL in accordance with the present invention.

[0050] FIG. 26 is a partial cross-sectional view of the optic of a further alternate embodiment of an IOL in accordance with the present invention.

[0051] FIG. 27 is a partial cross-sectional view of the optic of a still further embodiment of an IOL in accordance with the present invention.

[0052] FIG. 28 is a partial cross-sectional view of the optic of still another embodiment of an IOL in accordance with the present invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0053] FIG. 1 shows an IOL 20 which generally comprises an optic 22 and fixation members 24a and 24b. In this embodiment, the optic 22 may be considered as effective for focusing light on or near the retina of the eye. Optical axis 26 passes through the center of optic 22 in a direction generally transverse to the plane of the optic.

[0054] In this embodiment, the optic 22 is circular in plan and bi-convex approaching the optical axis 26. However, this configuration is merely illustrative as other configurations and shapes may be employed. The optic 22 may be constructed of any of the commonly employed materials used for rigid optics, such as polymethylmethacrylate (PMMA), or commonly employed materials used for resiliently deformable optics, such as silicone polymeric materials, acrylic polymeric materials, hydrogel-forming polymeric materials, mixtures thereof and the like.

[0055] The fixation members 24 a and 24 b in this embodiment are generally C-shaped and are integral with the optic

22. However, this is purely illustrative of the fixation members 24a and 24b as the fixation members may be of other configurations and/or may be separate members affixed to the optic 22 in any of a variety of conventional ways. Stated another way, the IOLs of the present invention may consist of one piece, with unitary optic and fixation members, or may be three or more pieces, with two or more fixation members connected to the optic. IOL 20 can be produced using conventional techniques well-known in the art.

[0056] Unless expressly described hereinafter, the general structural characteristics of IOL 20 apply to the other IOLs noted herein.

[0057] FIG. 2 illustrates an optic 30 of an IOL of the prior art having an optical axis OA, a convex anterior face AF, a convex posterior face PF, and a peripheral edge 32. The peripheral edge 32 is typically circular and has a constant cross-section circumscribing the optic 30. The optic 30 illustrated is of the square-cornered variety which provides some inhibition of cell growth onto the optic 30, a condition known as posterior capsule opacification (PCO). The peripheral edge 32 comprises an edge surface 34 that is parallel to the optical axis OA, and both anterior and posterior edge corners 36a, 36b, respectively. In addition, anterior and posterior lands 38a, 38b, extend between the anterior face AF and posterior face PF and respective edge corner 36a or 36b. Both the anterior and posterior lands 38a, 38b extend substantially perpendicularly with respect to the optical axis OA. Because of the parallel edge surface 34, the prior art optic 30 does not provide reduced edge glare as do the IOLs in accordance with the present invention.

[0058] In the present application, the terms anterior and posterior are used in their conventional sense; anterior refers to the front side of the eye, while posterior refers to the rear side. A number of surfaces of the intraocular lens of present invention are denoted either "anteriorly-facing" or "posteriorly-facing" to indicate their orientation with respect to the optical axis of the lens. For purpose of explanation, a surface that is parallel to the optical axis is neither anteriorly-facing or posteriorly-facing. A surface that is even slightly angled in one direction or the other can be identified with either the anterior or posterior side of the lens, depending on which side that surface faces.

[0059] FIG. 3 illustrates an optic 40 of an IOL of the present invention having an advantageous peripheral edge 42. The optic 40 defines an optical axis OA, a convex anterior face AF, and a convex posterior face PF. The peripheral edge 42 is desirably circular in shape, and has a constant cross-section circumscribing the optic 40. However, it should be understood by those skilled in the art that the peripheral edge 42 may not extend completely around the optic 40, and may be interrupted by alternative peripheral edge configurations, including combinations of peripheral edge configurations in accordance with the present invention.

[0060] The optic 40 is shown in elevational view to better illustrate the peripheral edge 42 in relation to the convex anterior face AF and posterior face PF. On the anterior side, the peripheral edge 42 includes a curved or rounded transition surface 44 leading to an anterior peripheral land or region 46 that is desirably linear and substantially perpendicular to the optical axis OA. On the posterior side, a discontinuous posterior edge corner 50 separates the peripheral

edge 42 from the posterior face PF, with no peripheral land. The edge corner 50 defines the posterior limit of the peripheral edge 42. The peripheral edge 42 further comprises an edge surface 52 that is linear and substantially parallel to the optical axis OA adjacent the posterior edge corner 50, and an anteriorly-facing edge surface 54 that is linear and non-parallel to the optical axis OA adjacent the rounded transition surface 44. A shallow corner or discontinuity 56 separates the parallel edge surface 52 from the non-parallel edge surface 54.

[0061] In this respect, the term discontinuity refers to a transition between two peripheral edge surfaces that is visible as a corner or peripheral line on the optic. Of course, all corners ultimately have a radius, but discontinuity in this regard pertains only to a corner that is visible as a discrete line as opposed to a more rounded region. In turn, "visible" in this regard refers to visible as seen by the naked eye, or with the assistance of certain low-power magnification devices, such as an ocular. Another way to define corners in the present sense is the intersection between two linear surfaces, at least with respect to the magnification shown in the drawings of the present application. Still another way to look at the effect of a discontinuity at the corner of the peripheral edge is that cell growth from the eye in front of or in back of the optic is more inhibited relative to a substantially identical intraocular lens without the discontinuity.

[0062] As used herein, the term "linear," used to refer to various edge surfaces, is in all cases as viewed through the cross-section of the particular edge. That is, the lenses of the present invention are generally circular, and the peripheral edges thus defined circular surfaces of revolution. A linear cross-sectional edge can therefore be defined a cylinder, or a conical surface. If the edge is parallel to the optical axis, the surface is cylindrical. On the other hand, if the surface is non-parallel with respect to the optical axis, the surface is conical. Therefore, a linear, non-parallel edge surface is conical, at least for a portion of the peripheral edge. It should be noted that, as mentioned above, the edge geometry around the periphery of any particular lens of the present invention may not be constant, and the edge surfaces disclosed herein should not be construed as necessarily extending in a constant configuration around the entire periphery of the lens.

[0063] Although the anterior peripheral land or region 46 is shown as being linear and substantially perpendicular to the optical axis OA, other configurations are contemplated. For example, the peripheral land 46 could be other than linear, i.e., convex or concave with respect to a plane through the medial plane of the optic. Or, the peripheral land 46 could be angled toward or away from the anterior side. Further, there may be more than one surface defining the peripheral land 46, such as a curved and a linear surface.

[0064] FIGS. 4 and 5 illustrate two further optics 60a and 60b that have substantially the same configuration as the optic 40 of FIG. 3. That is, both optics 60a and 60b have an optical axis OA, a convex anterior face AF, a convex posterior face PF, and a peripheral edge 62a, 62b, respectively. Each peripheral edge 62a, 62b, comprises, respectively, a rounded transition surface 64a, 64b, and anterior peripheral land 66a, 66b that is substantially perpendicular to the optical axis OA, a posterior edge corner 70a, 70b, an

edge surface **72a**, **72b** that is substantially parallel to the optical axis OA, and an anteriorly-facing edge surface **74a**, **74b** that is non-parallel to the optical axis OA.

[0065] FIGS. 3, 4 and 5 illustrate optics of similar configuration that have different dimensions based on their different magnitude of optical correction, or diopter value. The optic **40** of FIG. 3 has an intermediate correction diopter value of 20, the optic **60a** of FIG. 4 has a diopter value of 10, and the optic **60b** of FIG. 5 has a diopter value of 30. These relative diopter values are reflected in the relative convexity of each. That is, the smallest diopter value optic **40** shown in FIG. 4 has relatively shallow convex anterior face AF and posterior face PF. In contrast, the larger diopter value optic **60b** in FIG. 5 has a larger convexity for both the anterior face AF and posterior face PF.

[0066] Various dimensions for the respective peripheral edges of the exemplary optics shown in FIGS. 3-5 are also given in FIGS. 4 and 5. That is, the thickness of each peripheral edge is given as *t*, the thickness of the parallel edge surface is given as *A*, the angle of the non-parallel edge surface is given as  $\theta$ , and a radius of curvature of the transition surface is given as *R*.

[0067] The following tables provide exemplary values for these dimensions for the optics **60a** and **60b** of FIGS. 4 and 5. These dimensions are considered suitable for optics **60a** and **60b** that are made from silicone. It should be noted that the dimensions for the optic **40** of FIG. 3 are desirably approximately equal to those for the optic **60b** of FIG. 5. It should also be noted that the following dimensions are believed to provide certain benefits as far as reducing glare and PCO in IOLs, although not all the dimensions have been selected for either of those particular purposes. For example, some of the dimensions may be desirable to facilitate manufacturing of the respective IOL.

[0068] Table I provides exemplary values for optics that are made from acrylic.

TABLE I

EXEMPLARY DIMENSIONS FOR SILICONE IOLs							
<i>T</i> <sub>1</sub> (in)	<i>t</i> <sub>2</sub> (in)	<i>A</i> <sub>1</sub> (in)	<i>A</i> <sub>2</sub> (in)	$\theta$ <sub>1</sub>	$\theta$ <sub>2</sub>	<i>R</i> <sub>1</sub> (in)	<i>R</i> <sub>2</sub> (in)
.023-.027	.012-.007	.002-.007	.002-.007	13-17°	13-17°	.001-.003	.004-.006

[0069] Table II provides exemplary values for the same dimensions as shown in FIGS. 4-5, but for optics that are made from acrylic. In this case, the subscript "1" pertains to optics having a diopter value of 10, while the subscript "2" pertains to optics having a diopter value of either 20 or 30.

TABLE II

EXEMPLARY DIMENSIONS FOR ACRYLIC IOLs							
<i>t</i> <sub>1</sub> (in)	<i>t</i> <sub>2</sub> (in)	<i>A</i> <sub>1</sub> (in)	<i>A</i> <sub>2</sub> (in)	$\theta$ <sub>1</sub>	$\theta$ <sub>2</sub>	<i>R</i> <sub>1</sub> (in)	<i>R</i> <sub>2</sub> (in)
.015-.019	.013-.017	.002-.007	.002-.007	13-17°	13-17°	.004-.008	.004-.008

[0070] As is apparent from FIGS. 3-5, the convexity of the various lenses along the optical axis OA increases with

increasing diopter value (the posterior face and especially the anterior face are more highly convex). However, some surgeons prefer the intraocular lenses to have approximately the same volume or center thickness at the optical axis regardless of diopter power. This permits the surgeon to use the same surgical technique across the diopter range. Therefore, the present invention contemplates varying the overall diameter of the optic for different diopter values. That is, the center thickness of the intraocular lenses for different diopter values remains the same regardless of diameter. Therefore, the diameter of lenses having greater convexity should be reduced to reduce the center thickness, and the diameter of flatter lenses should be increased, both to an intermediate value. For example, the diameter of the lower diopter value optic **60a** shown in FIG. 4 may be increased so that the center thickness is closer to the intermediate diopter value optic **40** shown in FIG. 3. Likewise, the diameter of the higher diopter value optic **60b** shown in FIG. 5 may be decreased so that the center thickness is closer to the optic **40** shown in FIG. 3.

[0071] Therefore, the present invention contemplates a set of intraocular lenses having varying diopter values wherein the diameter of the optics varies generally inversely (although not necessarily linearly) with respect to the diopter value. In this way, a set of intraocular lenses having approximately the same center thickness can be provided to the surgeon to help make the implantation procedure more consistent and predictable. One example of a set of intraocular lenses may include the optics shown in FIGS. 3-5. The lower diopter lens **60a** of FIG. 4 may have a diameter of approximately 6.25 mm, the intermediate diopter lens **40** of FIG. 3 may have a diameter of 6.0 mm, and the higher diopter lens **60b** of FIG. 5 may have a diameter of 5.75 mm.

Advantageously, an increased diameter for lower diopter lenses corresponds to human physiology. That is, people who require lower diopter lenses typically have larger eyes, while people requiring high diopters tend to have smaller eyes.

[0072] FIG. 6 illustrates a section of the peripheral edge **42** of the optic **40** of FIG. 3 with a plurality of discrete light

rays **80a**, **80b**, **80c**, entering the peripheral edge from the anterior side. The refracted/reflected path of each light ray through the peripheral edge **42** is indicated, with the path of each light ray as it exits the peripheral edge **42** indicated as **82a**, **82b** and **82c**.

[0073] FIG. 6 thus illustrates the advantageous characteristic of the peripheral edge **42** in diffusing incoming parallel light rays so that the reflected light intensity is reduced. That is, any light that ordinarily would reflect back towards the optical axis at near its original intensity is instead diffused to reduce glare in the IOL. The present invention contemplates utilizing a curved or rounded transition surface, such as the surface **44**, in combination with one or more planar edge surfaces that are not parallel to the optical axis, such as the edge surface **54**. In the illustrated embodiment, the peripheral edge **42** further includes the edge surface **52** that is substantially parallel to the optical axis. It is believed that the combination of the rounded transition surface **44** on the anterior side leading to the anteriorly-facing edge surface **54** substantially reduces glare within the optic **40**.

[0074] FIGS. 7-9 each illustrates one half of an optic of an IOL in section having a configuration that reduces glare. In one design, incoming light is refracted so as to decrease the probability of light reflecting off the peripheral edge surfaces toward the optical axis relative to conventional lenses. In another design, incoming light reflects off of an internal peripheral edge surface at a shallow angle of incidence not toward the optical axis so as to decrease the probability of light reflecting off of other edge surfaces relative to conventional lenses. All of the optics disclosed in FIGS. 7-9 comprise an optical axis OA, a convex anterior face AF, and a convex posterior face PF.

[0075] An optic **90** seen in FIG. 7 includes a peripheral edge **92** having a first edge surface **94** that is linear and substantially parallel to the optical axis OA, and an anteriorly-facing second edge surface **96** that is linear and non-parallel to the optical axis. With respect to the partial cross-section of the optic **90** seen in FIG. 7, the anteriorly-facing second edge surface **96** is angled in the counter-clockwise (ccw) direction with respect to the optical axis OA. The edge surfaces **94** and **96** meet in the mid-portion of the peripheral edge **92** at a discontinuity **98**. A posterior edge corner **100** separates the peripheral edge **92** from posterior face PF, while an anterior edge corner **102** separates the peripheral edge from a peripheral land **104** that is substantially perpendicular to the optical axis.

[0076] An incoming light ray **106** is illustrated passing through the peripheral land **104** to reflect off the second edge surface **96** within the optic **90**. The resulting reflected ray **108** is deflected through the optic **90** so that it misses the first edge surface **94**. In this manner, a substantial portion of the light entering the optic **90** in the region of the peripheral edge **92** is reflected at a relatively shallow angle of incidence off of the second edge surface **96**, and is not reflected off the first edge surface **94** toward the optical axis OA. Thus, glare is reduced. To achieve this result, the anteriorly-facing second edge surface **96** is desirably angled at least about  $10^\circ$  with respect to the optical axis OA.

[0077] FIG. 8 illustrates an optic **110** having a peripheral edge **112** comprising a **30** single anteriorly-facing edge surface **114** that is linear and non-parallel with respect to the optical axis OA. Thus, the optic **110** has a single conical

anteriorly-facing edge surface **114**. A posterior edge corner **116** separates the edge surface **114** from the posterior face PF, and an anterior edge corner **118** separates the edge surface **114** from a peripheral land **120** that is substantially perpendicular to the optical axis OA. An incoming light ray **122** is illustrated striking the peripheral land **120** and passing through the optic **110**. Because of the anteriorly-facing angle of the edge surface **114**, the light ray may refract slightly on passage through the optic **110**, as indicated at **124**, but will not reflect off the surface edge **114**. That is, the posterior edge corner **116** is located farther radially outward from the optical axis OA than the anterior edge corner **118** and a substantial portion of light passing into the region of the peripheral edge **112** simply passes through the material of the optic **110**. To achieve this result, the anteriorly-facing edge surface **114** is desirably angled at least about  $5^\circ$  with respect to the optical axis OA.

[0078] FIG. 9 illustrates an optic **130** that is substantially similar to the optic **110** of FIG. 8, with a peripheral edge **132** defined by a single anteriorly-facing edge surface **134** that is linear and non-parallel with respect to the optical axis OA. Thus, the optic **130** has a single conical anteriorly-facing edge surface **134**. Again, a posterior edge corner **136** separates the peripheral edge **132** from the posterior face PF. An anterior edge corner **138** separates the peripheral edge **132** from the anterior face AF, and there is no anterior peripheral land. The path of a light ray **140** passing through the region of the peripheral edge **132** illustrates the elimination of any reflection off a peripheral edge surface. That is, a substantial portion of light striking the optic **130** from the anterior side simply passes through the optic without reflecting toward the optical axis OA. To achieve this result, the anteriorly-facing edge surface **134** is desirably angled at least about  $5^\circ$  with respect to the optical axis OA.

[0079] FIGS. 10-13 illustrate a number of optics of the present invention that are configured to transmit internal light radially outward from their peripheral edges as opposed to reflecting it toward the optical axis. This can be done in a number of ways, all of which result in light hitting the peripheral edge from the interior of the optic at an angle that is less than the critical angle for the refractive index of the lens material. Again, each of the optics in FIGS. 10-13 includes an optical axis OA, a convex anterior face AF, and a convex posterior face PF.

[0080] FIGS. 10 and 11 illustrate two substantially similar optics **150a**, **150b** that will be given corresponding element numbers. Each of the optics **150a**, **150b** has a peripheral edge **152b**, **152b** defined by an edge surface **154a**, **154b** that is linear and substantially parallel to the optical axis OA. A posterior edge corner **156a**, **156b** separates the edge surface **154a**, **154b** from the respective posterior face PF. Both optics **150a**, **150b** include an acute anterior edge corner **158a**, **158b** separating the edge surface **154a**, **154b** from an anterior peripheral land **160a**, **160b**. The peripheral lands **160a**, **160b** are shown as linear and non-perpendicular with respect to the optical axis OA, but it should be understood that non-linear lands may perform equally as well, and may further diffuse the incoming light. The peripheral land **160a** of the optic **150a** of FIG. 10 joins with its anterior face AF at a discontinuity **162**. On the other hand, a peripheral land **164** that is linear and substantially perpendicular to the optical axis OA joins the peripheral land **160b**

of the optic **150b** of **FIG. 11** to its anterior face **AF**; that is, there are two peripheral lands **160b** and **164** on the optic **150b** of **FIG. 11**.

[0081] Incoming light rays **166a**, **166b** are illustrated in **FIGS. 10 and 11** striking the respective peripheral lands **160a**, **160b** and passing through the material of the respective optics **150a**, **150b** toward the edge surfaces **154a**, **154b**. Because of the particular angle of the peripheral lands **160a**, **160b**, the light rays strike the edge surfaces **154a**, **154b** at angles that are less than the critical angle for the refractive index of the lens material. Therefore, instead of reflecting off of the edge surfaces **154a**, **154b**, the light rays pass through the peripheral edges **152a**, **152b** as indicated by the exit rays **168a**, **168b**. The included angles between the edge surfaces **154a**, **154b** and the peripheral lands **160a**, **160b** are shown  $\alpha_1$  and  $\alpha_2$ . These angles are preferably less than  $90^\circ$ , more preferably within the range of about  $45^\circ$  to  $88^\circ$ , and most preferably within the range of about  $70^\circ$  to  $88^\circ$ . Of course, these ranges may differ depending on the refractive index of the material.

[0082] **FIGS. 12 and 13** illustrate similar optics **170a**, **170b** that each have a peripheral edge **172a**, **172b** defined by a posteriorly-facing edge surface **174a**, **174b** that is linear and non-parallel with respect to the optical axis **OA**. A posterior edge corner **176a**, **176b** separates the edge surface **174a**, **174b** from the posterior face **PF**. On the optic **170a** of **FIG. 12**, an anterior edge corner **178a** separates the edge surface **174a** from the anterior face **AF**, without a peripheral land. In contrast, as seen in **FIG. 13** an anterior edge corner **178b** separates the edge surface **174b** from a peripheral land **180** that is linear and substantially perpendicular to the optical axis **OA** of the optic **170b**. The peripheral land **180** meets the anterior face **AF** at a discontinuity **182**.

[0083] The angles of the anterior edge corners **178a** and **178b** are indicated at  $\beta_1$  and  $\beta_2$ . The magnitude of the angle  $\beta_1$  depends both on the convexity of the anterior face **AF** and the angle of the posteriorly-facing edge surface **174a** with respect to the optical axis **OA**. The anterior face **AF** may have widely differing convexities, but desirably the posteriorly-facing edge surface **174a** is at least  $2^\circ$  (clockwise in the drawing) with respect to the optical axis **OA**. Therefore, the angle  $\beta_1$  is preferably less than about  $120^\circ$ , and more preferably are within the range of about  $70^\circ$  to  $120^\circ$ . The magnitude of the angle  $\beta_2$  seen in **FIG. 13** depends both on the angle of the peripheral land **180** and the angle of the posteriorly-facing edge surface **174b** with respect to the optical axis **OA**. The peripheral land **180** is shown as linear and perpendicular with respect to the optical axis **OA**, but it should be understood that non-linear and non-parallel lands may perform equally as well. Desirably the posteriorly-facing edge surface **174b** is at least  $2^\circ$  (clockwise in the drawing) with respect to the optical axis **OA**. Therefore, the angle  $\beta_2$  is preferably acute, and more preferably is within the range of about  $30^\circ$  to  $88^\circ$ . Of course, these ranges may differ depending on the refractive index of the material.

[0084] **FIGS. 12 and 13** illustrate incoming light rays **184a**, **184b** that strike the anterior side of the respective optic **170 a**, **170 b** adjacent the peripheral edges **172a**, **172b** and subsequently pass through the material of the optic and through the edge surfaces **174a**, **174b** without reflection. Again, this phenomenon is caused by the angles at which the light rays strike the edge surfaces **174a**, **174b**, which are

lower than the critical angle for the refractive index of the lens material. As a result, the light rays simply pass through the peripheral edges **172a**, **172b** without reflecting back towards the optical axis **OA**.

[0085] **FIG. 14a** illustrates a further embodiment of an IOL **200** of the present invention having an optic **202** and a plurality of fixation members **204** extending radially outward therefrom, only one of which is shown. **FIG. 14b** is an enlargement of a peripheral edge region of the optic **202**. As always, the optic **202** includes an optical axis **OA**, a convex anterior face **AF**, and a convex posterior face **PF**.

[0086] With reference to **FIG. 14b**, the optic **202** includes a peripheral edge **206** defined by an anteriorly-facing edge surface **208** that is linear and non-parallel with respect to the optical axis **OA**. A curved or rounded transition surface **210** smoothly blends the linear edge surface **208** to the convex anterior face **AF**. An acute posterior edge corner **212** separates the edge surface **208** from a peripheral land **214** that is linear and substantially perpendicular to the optical axis **OA**. The peripheral land **214** joins with the convex posterior face **PF** at a discontinuity **216**. **FIG. 14a** illustrates a plane **218** coincident with the circular posterior edge corner **212**. This plane represents a separation line between two mold halves used to form the optic **202**. In this manner, the acute peripheral edge corner **212** can be easily formed between the mold halves.

[0087] The embodiment shown in **FIGS. 14a** and **14b** incorporates a combination of several advantageous features previously described. That is, the rounded transition surface **210** tends to diffuse light rays entering from the anterior side, as described above with respect to the embodiment of **FIGS. 3-5**. In addition, the edge surface **208** is angled in such a manner that some of the light passing through the transition surface **210** will not even strike it, and the light that does will be reflected at a relatively shallow angle of incidence that reduces glare.

[0088] **FIGS. 15-17** illustrate the peripheral edges of three optics **220a**, **220b**, **220c** having similar shapes. The optic **220a** of **FIG. 15** has a peripheral edge defined by an anteriorly-facing surface **222a** that is linear and non-parallel with respect to the optical axis, an acute posterior edge corner **224a**, and a rounded anterior transition surface **226a** blending with the anterior face **AF**. A peripheral land **228a** that is generally perpendicular with respect to the optical axis extends between the posterior face **PF** and the edge corner **224a**, and joins with the posterior face **PF** at a discontinuity **230a**. The included angle between the surface **222a** and the peripheral land **228a** is relatively small, and the rounded transition surface **226a** protrudes slightly outward from the surface **222a**.

[0089] The peripheral edge of the optic **220b** shown in **FIG. 16** also includes an anteriorly-facing surface **222b** that is linear and non-parallel with respect to the optical axis, an acute posterior edge corner **224b**, and a rounded anterior transition surface **226b** blending with the anterior face **AF**. A peripheral land **228b** that is not perpendicular to the optical axis extends between the posterior face **PF** and the edge corner **224b**. The peripheral land **228b** joins with the posterior face **PF** at a discontinuity **230b**. The included angle between the surface **222b** and the peripheral land **228b** is slightly larger than that shown in **FIG. 15**, primarily because the surface **222b** has a shallower angle with respect to the optical axis than the surface **222a**.

[0090] The peripheral edge of the optic **220c** shown in **FIG. 17** also includes an anteriorly-facing surface **222c** that is linear and non-parallel with respect to the optical axis, an acute posterior edge corner **224c**, and a rounded anterior transition surface **226c** blending with the anterior face AF. A peripheral land **228c** that is not perpendicular to the optical axis extends between the posterior face PF and the edge corner **224c**. The peripheral land **228c** joins with the posterior face PF at a discontinuity **230c**. The optic **220c** is fairly similar to the optic **220b**, but has a slightly less convex posterior face PF.

[0091] **FIG. 18** illustrates the peripheral edge of an optic **240** having a saw-tooth or baffled edge surface **242**. The edge surface **242** is generally aligned to face the anterior side of the optic **240** and includes multiple tooth facets or surfaces **244a** and **244b** defining peaks **246** and troughs **248**. Each tooth surface **244a** is desirably parallel to the other surfaces on the same side of each tooth, as is each tooth surface **244b** with respect to the others on the other side of each tooth. The peripheral edge of the optic **240** further includes a posterior edge corner **250** and a rounded transition surface **252** blending into the anterior face AF. A peripheral land **254** that is generally perpendicular to the optical axis extends between the posterior face PF and the edge corner **250**.

[0092] Still with reference to **FIG. 18**, light striking the peripheral edge of the optic **240** from the anterior side is scattered and diffused upon passage through the baffled edge surface **242** and the rounded transition surface **252**. This helps reduce glare within the optic **240**. In addition, the edge surface **242** is angled so as to be non-parallel with respect to the optical axis, and thus some of the light rays internal to the optic **240** will not even strike this edge surface to further reduce glare.

[0093] An optic **260** that includes a linear posteriorly-facing edge surface **262** is seen in **FIG. 19**. The peripheral edge of the optic **260** comprises the edge surface **262**, a rounded transition surface **264** blending to the anterior face AF, and a peripheral edge corner **266** adjacent a short peripheral land **268**. The advantages of the posteriorly-facing edge surface **262** were described previously with respect to **FIGS. 12 and 13**, and primarily involved light being transmitted through the edge surface as opposed to being internally reflected off of it. Of course, light that is transmitted through the edge surface **262** as opposed to being reflected off of it cannot contribute to glare. In addition, the rounded transition surface **264** helps to diffuse light rays striking the peripheral edge, thus further reducing glare.

[0094] **FIG. 20** illustrates an optic **280** having both an anterior edge corner **282** and posterior edge corner **284**. A posteriorly-facing edge surface **286** extends from the anterior edge corner **282** to an apex **288**, and an anteriorly-facing edge surface **290** extends between the apex and the posterior edge corner **284**. The apex **288** defines the midpoint of a groove, and the resulting configuration in cross-section is something like a forked-tongue. A pair of peripheral lands **292a**, **292b** extends between the edge corners **282**, **284** and the respective anterior and posterior faces of the optic **280**. The peripheral lands **292a**, **292b** are desirably perpendicular to the optical axis. Again, the provision of linear edge surfaces that are non-parallel with respect to the optical axis

helps reduce glare within the optic **280**. Furthermore, the relatively sharp edge corners **282**, **284** helps reduce PCO by inhibiting cell growth on both the anterior and posterior sides of the optic **280**.

[0095] Another embodiment of the invention seen in **FIG. 21** has an optic **300** with an anterior face **302**, a posterior face **304**, an anterior peripheral region **306**, a posterior peripheral region **308** and a peripheral edge surface **310**. The peripheral edge surface **310** has a continuously curved, concave configuration, for example, in cross-section. The peripheral edge surface **310** intersects anterior peripheral region **306** at anterior peripheral corner edge **312** at an angle of about 70°. Corner edge **312** is at a discontinuity between anterior face **302** (anterior peripheral region **306**) and peripheral edge surface **310**, and circumscribes optical axis **314**. Peripheral edge surface **310** intersects posterior peripheral region **308** at posterior peripheral corner edge **316** at an angle of about 70°. Corner edge **316** is at a discontinuity between posterior face **304** (posterior peripheral region **308**) and peripheral edge surface **310**, and circumscribes optical axis **314**.

[0096] The anterior and posterior peripheral regions **306** and **308** extend radially inwardly, for example, for a distance of about 0.1 mm to about 1.0 mm or more (about 0.5 mm as shown in **FIG. 21**), from the peripheral edge surface **310**, and peripheral corner edge **312** and **316** respectively, and are substantially planar, more particularly, substantially perpendicular to the optical axis **314** of optic **300**. Anterior face **302** includes an additional anterior region **318** which is convex, not planar. Posterior face **304** includes an additional posterior region **320** which also is convex, not planar. The dimension of optic **300** between anterior face **302** and posterior face **304** at the peripheral regions **306** and **308** is smaller than the same dimension at the optical axis **314**.

[0097] It is found that implanting an IOL having the optic **300** in the capsular bag of an eye effectively inhibits or retards cell migration or growth, for example, of epithelial cell migration or growth, from the eye onto and/or over the anterior and posterior faces **302** and **304** of optic **300**. In addition, it is found that a reduced amount of edge glare is obtained with an IOL having the optic **300** implanted in the capsular bag of the eye.

[0098] Without wishing to limit the invention to any particular theory of operation, it is believed that an IOL having the optic **300** provides for inhibition of cell migration or growth onto and/or over the optic **300** because of the sharp or abrupt peripheral corner edges **312** and **316**. Thus, it is believed that the cells from the eye have a reduced tendency to grow onto and/or over the anterior face **302** and posterior face **304** relative to a substantially identical IOL without such peripheral corner edge. In addition, it is believed that the reduced glare obtained using an IOL having the optic **300** results from the curved configuration of the peripheral edge surface **310**. Thus, an IOL having the optic **300** including the substantially continuously curved peripheral edge surface **310** provides reduced glare relative to a substantially similar IOL having a peripheral edge surface which is substantially parallel, for example, in cross-section, to the optical axis of the IOL.

[0099] **FIG. 22** illustrates an alternate embodiment of an IOL in accordance with the present invention. This IOL has

an optic shown generally at 330. Except as expressly described herein, optic 330 is structured and functions similarly to optic 300.

[0100] The principal difference between the optic 330 and the optic 300 relates to the shape of the anterior face 332 and the shape of posterior face 334. Specifically, anterior face 332 is convex throughout, and optic 330 does not include a substantially planar anterior peripheral region. This convex anterior face 332 intersects peripheral edge surface 336 at sharp anterior peripheral corner edge 338. Similarly, posterior face 334 is convex throughout, and optic 330 does not include a substantially planar posterior peripheral region. This convex posterior face 334 intersects peripheral edge surface 336 at sharp posterior peripheral corner edge 340. The specific configuration of anterior face 332 and posterior face 334 can be independently provided to address the needs of any given specific application including the following factors; the vision correction or corrections desired, the size of optic 330, the size of the eye in which an IOL having optic 330 is to be placed and the like factors. Optic 330 inhibits or retards cell migration or growth and provides a reduced amount of edge glare as does the optic 300, described above.

[0101] FIG. 23 illustrates a further embodiment of an IOL in accordance with the present invention. This IOL has an optic shown generally at 350. Except as expressly described herein, optic 350 is structured and functions similarly to optic 330.

[0102] The principal difference between optic 350 and optic 330 relates to the shape of peripheral edge surface 352. Specifically, the curvature of peripheral edge surface 352 is more complex relative to the curvature of peripheral edge surface 336. In particular, the curvature of edge surface 352 varies substantially continuously while the curvature of edge surface 336 is a substantially constant concave arc (in cross-section). Peripheral edge surface 352 is configured to reduce the amount of edge glare obtained with optic 350 in the eye relative to, for example, IOL 30 of FIG. 2. The specific configuration or curvature of peripheral edge surface 352 is provided to address the needs of a specific application, including the following factors: the size of the optic 350, the size of the eye in which an IOL having the optic 330 is to be placed and the like factors.

[0103] FIG. 24 illustrates an additional embodiment of the present invention. The IOL illustrated in FIG. 24 has an optic shown generally at 360. Except as expressly described herein, optic 360 is structured and functions similarly to optic 330.

[0104] The primary difference between optic 360 and optic 330 relates to the configuration of peripheral edge surface 362. Specifically, the curvature of peripheral edge surface 362 varies substantially continuously (in a manner which is substantially the reverse of the curvature of peripheral edge surface 352 of optic 350) while the curvature of edge 336 is a substantially constant concave arc (in cross-section). The peripheral edge surface 362 of optic 360 is effective in reducing the glare caused by the presence of optic 360 in the eye relative to the glare obtained with IOL 30 of FIG. 2 in the eye.

[0105] FIG. 25 illustrates an additional embodiment of an IOL in accordance with the present invention. Except as expressly described herein, this IOL, having an optic shown generally at 370 is structured and functions similarly to optic 330.

[0106] The primary difference between optic 370 and optic 330 relates to the configuration of the peripheral edge surface 372. Specifically, peripheral edge surface 372 includes a first portion 374 which is concave relative to the optical axis 376 of optic 370. Peripheral edge surface 372 also includes a second portion 378 which is convex relative to the optical axis 376 of optic 370. Thus, the curvature of the peripheral edge surface of the present IOLs, for example, peripheral edge surface 372 of optic 370, can be relatively complex. Peripheral edge surface 372 is effective to provide reduced glare in the eye relative to IOL 30 of FIG. 2. In addition, it should be noted that the peripheral edge surface 372 intersects anterior face 380 at anterior peripheral corner edge 382 at an angle of about 90°. Similarly, the peripheral edge surface 372 intersects posterior peripheral region 384 at posterior peripheral corner edge 386 at an angle of about 90°.

[0107] Optic 370, as with all of the IOLs in accordance with the present invention, is effective in inhibiting or retarding cell migration or growth from the eye onto or over the optic 370.

[0108] FIG. 26 illustrates a further alternate embodiment of an IOL in accordance with the present invention. This IOL has an optic shown generally at 400. Except as expressly described herein, optic 400 is structured and functions substantially similarly to optic 330.

[0109] The primary differences between optic 400 and optic 330 relate to the configuration of peripheral edge surface 402 and the configuration of the intersection between anterior face 404 and peripheral edge surface 402 of optic 400. Specifically, peripheral edge surface 402 has a continuously curved configuration somewhat similar to peripheral edge surface 372 of optic 370. Also, the anterior face 404 intersects peripheral edge surface 402 on a curve (that is on a continuity not at a discontinuity). In other words, the intersection of anterior face 404 and peripheral edge surface 402 is smooth or continuous, not sharp or discontinuous.

[0110] Optic 400 is effective in reducing the amount of glare obtained with optic 400 in the eye relative to IOL 30 of FIG. 2 in the eye. Also, optic 370 is effective in retarding or inhibiting migration from the eye onto and/or over cell growth or migration from the eye onto and/or over the posterior face 406 of optic 400.

[0111] FIG. 27 illustrates a still further embodiment of an IOL in accordance with the present invention. Except as expressly described herein, this IOL, having an optic shown generally at 410 is structured and functions similarly to optic 330.

[0112] The primary difference between optic 410 and optic 330 relates to the configuration of the peripheral edge surface 412 and to the configuration of posterior face 414. Specifically, peripheral edge surface 412 is convex relative to the optical axis 416 of optic 410. Peripheral edge surface 412 does not intersect anterior face 418 at a sharp or discontinuous corner edge, but does intersect posterior face 414 at an obtuse angle at posterior peripheral corner 420. Posterior face 414 includes a peripheral region 422 which is substantially perpendicular to optical axis 416. Anterior face 418 includes a peripheral region 424 which is roughened to be at least partially opaque to the transmission of light. The

combination of the convex peripheral edge surface 412 and the at least partially opaque peripheral region 424 is particularly effective in reducing glare, for example, from corner 420, obtained with an IOL having optic 410 in the eye.

[0113] FIG. 28 illustrates still another embodiment of an IOL in accordance with the present invention. This IOL has an optic shown generally at 440. Except as expressly described herein, optic 440 is structured and functions substantially similarly to optic 330.

[0114] The primary differences between optic 440 and optic 330 relate to the configuration of peripheral edge surface 442, the configuration of the intersection between anterior face 444 and peripheral edge surface 442 of optic 440 and the configuration of posterior face 446. Peripheral edge surface 442 includes a first portion 448 which is convex relative to optic axis 450 of optic 440. Peripheral edge surface 442 also includes a second portion 452 which transitions from first portion 448 and intersects posterior face 446 at corner 454. Peripheral edge surface 442 does not intersect anterior face 444 at a sharp or discontinuance corner edge. Posterior face 446 includes a peripheral region 456 which is substantially perpendicular to optical axis 450. Anterior face 444 includes the peripheral region 458 which is roughened to be at least partially opaque to the transmission of light. Region 460 of peripheral edge surface 442 and region 462 of posterior face 446 are also roughened to be at least partially opaque to the transmission of light. The combination of the peripheral edge surface 442 and the at least partially opaque regions 458, 460, 462 is particularly effective in reducing glare, for example, from corner edge 454, obtained with optic 440 in the eye.

[0115] In addition to designing the geometry of the peripheral edge of the intraocular lenses of the present invention to reduce glare and posterior capsule opacification (PCO), the edges and surfaces near the edges may be "textured" or frosted to cause scatter of light impinging on the peripheral region. Such scattering helps reduce edge glare. In addition, use of texture in combination with various edge geometries may help reduce PCO. Various texturing regimens may be used, as described in U.S. Pat. No. 5,693,094, entitled IOL for Reducing Secondary Opacification, hereby expressly incorporated by reference. With respect to specific embodiments, IOLs made of silicone desirably include texturing/frosting on at least one edge surface as well as on a peripheral region of the posterior face, or intermediate land. Acrylic IOLs, on the other hand, desirably include texturing/frosting on at least one edge surface, and preferably on an edge surface that is parallel to the optical axis.

[0116] The intraocular lenses of the present invention may be manufactured using a variety of techniques, including injection molding, compression molding, lathing, and milling. Those of skill in the art will understand how to form the mold dies, or program the cutting tools to shape the lenses in accordance with present invention. Importantly, care must be taken to avoid rounding the various corners or discontinuities for the particular optic during the polishing process. Therefore, the corners must be masked or otherwise protected while the lens is being polished. Alternatively, the unmasked lens may be polished and then the various edge surfaces re-cut to insure sharp corners.

[0117] With reference back to FIG. 1, the design of the fixation members 24a, 24b may play an important role in

reducing the risk of PCO for any particular lens. That is, the fixation members 24a, 24b must be designed such that during capsular contraction, there is enough axial movement and accompanying bias of the lens against the posterior capsule to seal the capsule around the posterior edge corners of the lens. A variety of fixation members 24a, 24b are known in the art that can provide the required posterior bias to the lens. The precise configuration of the fixation members 24a, 24b may vary depending on the overall lens diameter, the diameter of the optic, the angle of the fixation member, the stiffness of the fixation member material, the gauge of the fixation member, the geometry of the fixation member, and the way in which the fixation member is attached to the lens.

[0118] The present invention very effectively provides IOLs which inhibit cell growth or migration, in particular epithelial cell growth or migration from a capsular bag, onto and/or over the IOL optics. In addition, the IOLs produce reduced glare, in particular edge glare, relative to a lens having a peripheral edge which is substantially parallel, in cross-section, to the optical axis of the IOL optic. These benefits are achieved with IOLs which are easily manufactured and inserted in the eye. Such IOLs can be made of any suitable material, and provide effective performance and substantial benefits to the patient.

[0119] While this invention has been described with respect to various specific examples and embodiments, it is to be understood that the invention is not limited thereto and that it can be variously practiced within the scope of the following claims.

What is claimed is:

1. An intraocular lens that reduces glare from incoming light rays, comprising:

a centered optic sized and adapted for placement in the capsular bag of an eye and shaped to direct light toward the retina of the eye, the optic having:

a central optical axis;

an anterior face and an opposed posterior face;

a corrective portion through both faces for focusing light rays striking the anterior face onto the retina of the eye; and

a peripheral edge surface between at least the anterior and posterior faces and circumscribing the optic that includes at least one portion that is at least partially opaque to the transmission of light to help reduce glare from incoming light rays; and,

a peripheral corner edge located at a discontinuity between the peripheral edge surface and the posterior face for inhibiting cell growth onto the optic; and

at least one fixation member extending outward from the optic and adapted to locate the optic in the eye.

2. The intraocular lens of claim 1, wherein the peripheral edge surface includes a convex portion located adjacent the anterior face that is at least partially opaque to the transmission of light.

3. The intraocular lens of claim 1, wherein, from the anterior face to the posterior face, the peripheral edge surface comprises, in sequence, a convex portion, a portion with a linear cross-sectional configuration, and the periph-

eral corner edge, and wherein the entire peripheral edge surface is at least partially opaque to the transmission of light to help reduce glare from incoming light rays.

4. The intraocular lens of claim 1, wherein, from the anterior face to the posterior face, the peripheral edge surface comprises, in sequence, a convex portion, two portions with linear cross-sectional configurations one which describes a cylindrical surface around the optical axis and the other which describes a partial conical surface around the optical axis, and the peripheral corner edge, and wherein the entire peripheral edge surface is at least partially opaque to the transmission of light to help reduce glare from incoming light rays.

5. The intraocular lens of any of claims 2, 3, or 4, wherein any portion of the peripheral edge surface that is at least partially opaque to the transmission of light is physically roughened.

6. The intraocular lens any of claims 2, 3, or 4, wherein any portion of the peripheral edge surface that is at least partially opaque to the transmission of light is chemically roughened.

7. The intraocular lens any of claims 2, 3, or 4, wherein any portion of the peripheral edge surface that is at least partially opaque to the transmission of light is frosted.

8. The intraocular lens any of claims 2, 3, or 4, wherein any portion of the peripheral edge surface that is at least partially opaque to the transmission of light is textured.

9. The intraocular lens of claim 1, wherein the anterior face includes an anterior peripheral region between the corrective portion and the peripheral edge surface that is at least partially opaque to the transmission of light to help reduce glare from incoming light rays.

10. The intraocular lens of claim 9, wherein the anterior peripheral region is substantially planar and perpendicular to the central optical axis.

11. The intraocular lens of claim 1, wherein the posterior face includes a posterior peripheral region between the corrective portion and the peripheral edge surface that is at least partially opaque to the transmission of light to help reduce glare from incoming light rays.

12. The intraocular lens of claim 1, wherein the peripheral corner edge is formed by an angle at the intersection of the peripheral edge surface and the posterior face of between about 45°-135°.

13. The intraocular lens of claim 1, wherein the optic has a Diopter power of at least 20.

14. An intraocular lens that inhibits cell growth thereon and reduces glare from incoming light rays, comprising:

a centered optic sized and adapted for placement in the capsular bag of an eye and shaped to direct light toward the retina of the eye, the optic having:

a central optical axis;

an anterior face and an opposed posterior face;

a corrective portion through both faces for focusing light rays striking the anterior face onto the retina of the eye; and

a peripheral edge surface between the anterior and posterior faces and circumscribing the optic, the peripheral edge surface having a curved portion located on the anterior side of the peripheral edge surface adjacent the anterior face for reducing glare from incoming light rays, and wherein at least a portion of the peripheral edge surface is at least

partially opaque to the transmission of light to help reduce glare from incoming light rays; and

at least one fixation member extending outward from the optic and adapted to locate the optic in the eye.

15. The intraocular lens of claim 14, wherein the curved portion is convex.

16. The intraocular lens of claim 14, wherein the curved portion is concave.

17. The intraocular lens of claim 14, wherein the portion of the peripheral edge surface that is at least partially opaque to the transmission of light is physically roughened.

18. The intraocular lens of claim 14, wherein the portion of the peripheral edge surface that is at least partially opaque to the transmission of light is chemically roughened.

19. The intraocular lens of claim 14, wherein the portion of the peripheral edge surface that is at least partially opaque to the transmission of light is frosted.

20. The intraocular lens of claim 14, wherein the portion of the peripheral edge surface that is at least partially opaque to the transmission of light is textured.

21. The intraocular lens of claim 14, wherein the anterior face includes an anterior peripheral region between the corrective portion and the peripheral edge surface that is at least partially opaque to the transmission of light to help reduce glare from incoming light rays.

22. The intraocular lens of claim 21, wherein the anterior peripheral region is substantially planar and perpendicular to the central optical axis.

23. The intraocular lens of claim 14, wherein the posterior face includes a posterior peripheral region between the corrective portion and the peripheral edge surface that is at least partially opaque to the transmission of light to help reduce glare from incoming light rays.

24. The intraocular lens of claim 14, wherein the optic further includes a peripheral corner edge located at a discontinuity between the peripheral edge surface and the posterior face for inhibiting cell growth onto the optic.

25. The intraocular lens of claim 24, wherein the peripheral corner edge is formed by an angle at the intersection of the peripheral edge surface and the posterior face of between about 45°-135°.

26. The intraocular lens of claim 14, wherein the optic has a Diopter power of at least 20.

27. The intraocular lens of claim 14, wherein the peripheral edge surface further includes at least one surface with a linear cross-sectional configuration.

28. The intraocular lens of claim 27, wherein the peripheral edge surface includes two surfaces with linear cross-sectional configurations, one which describes a cylindrical surface around the optical axis and the other which describes a partial conical surface around the optical axis.

29. The intraocular lens of claim 28, wherein, from the anterior face to the posterior face, the peripheral edge surface comprises, in sequence, the curved portion, the partial conical surface, and the cylindrical surface.

30. The intraocular lens of claim 29, wherein the entire peripheral edge surface is at least partially opaque to the transmission of light.

31. The intraocular lens of claim 30, wherein the anterior face includes an anterior peripheral region between the corrective portion and the peripheral edge surface that is at least partially opaque to the transmission of light to help reduce glare from incoming light rays.