




(86) Date de dépôt PCT/PCT Filing Date: 2013/09/17
 (87) Date publication PCT/PCT Publication Date: 2014/03/27
 (45) Date de délivrance/Issue Date: 2020/08/25
 (85) Entrée phase nationale/National Entry: 2015/03/16
 (86) N° demande PCT/PCT Application No.: CA 2013/000794
 (87) N° publication PCT/PCT Publication No.: 2014/043790
 (30) Priorité/Priority: 2012/09/19 (US61/702,918)

(51) Cl.Int./Int.Cl. *F03G 7/06* (2006.01)
 (72) Inventeurs/Inventors:
 STEINER, THOMAS WALTER, CA;
 MEDARD DE CHARDON, BRIAC, CA;
 GOTTFRIED, KRISTJAN TOD, CA;
 KLOPFER, RONALD GREGORY, CA
 (73) Propriétaire/Owner:
 ETALIM INC., CA
 (74) Agent: SMART & BIGGAR LLP

(54) Titre : APPAREIL TRANSDUCTEUR THERMO-ACOUSTIQUE COMPRENANT UNE CONDUITE DE TRANSMISSION

(54) Title: THERMOACOUSTIC TRANSDUCER APPARATUS INCLUDING A TRANSMISSION DUCT

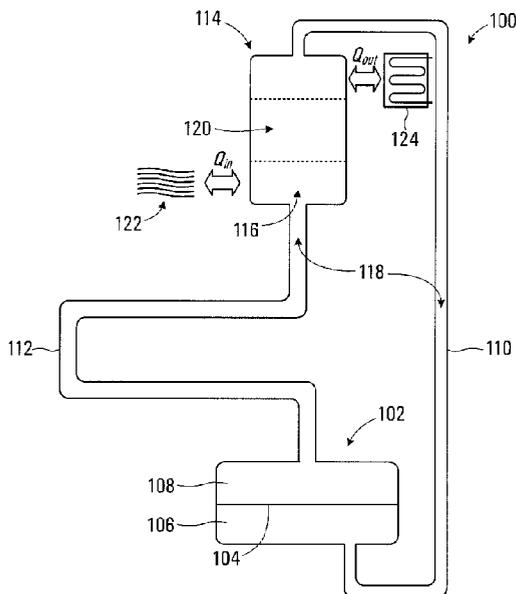

(57) **Abrégé/Abstract:**

A thermoacoustic transducer includes a mechanical converter providing power conversion between acoustic and mechanical power and includes a diaphragm defining a compression and an expansion chamber. A thermal converter including a flow passage having a regenerator portion is thermally coupled for conversion between acoustic and thermal power. The mechanical converter is in fluid communication with the flow passage through transmission ducts completing an acoustic power loop having a volume containing a working gas. A transmission duct cross-sectional area is less than a regenerator flow area, which is less than a diaphragm surface area. The diaphragm undergoes resilient displacement causing pressure oscillations within the volume. The power loop is configured to cause one location along the loop to have anti-phase pressure oscillations to pressure oscillations in the mechanical converter.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2014/043790 A1(43) International Publication Date
27 March 2014 (27.03.2014)(51) International Patent Classification:
F03G 7/06 (2006.01)

(21) International Application Number:

PCT/CA2013/000794

(22) International Filing Date:

17 September 2013 (17.09.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/702,918 19 September 2012 (19.09.2012)

US

(71) Applicant: ETALIM INC. [CA/CA]; 62 West 8th Avenue, Vancouver, British Columbia V5Y 1M7 (CA).

(72) Inventors: **STEINER, Thomas Walter**; 110 North MacDonald Avenue, Burnaby, British Columbia V5C 1T7 (CA). **MEDARD DE CHARDON, Briac**; 1042 East 11th Avenue, Vancouver, British Columbia V5T 2G2 (CA). **GOTTFRIED, Kristjan Tod**; #404-2370 West 2nd Avenue, Vancouver, British Columbia V6K 1J2 (CA). **KLOPFER, Ronald Gregory**; 3512 Calder Avenue, North Vancouver, British Columbia V7N 3R9 (CA).(74) Agents: **CRAMER, Owen W.** et al.; Smart & Biggar, 2300-1055 West Georgia Street, Vancouver, British Columbia V6E 3P3 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,

[Continued on next page]

(54) Title: THERMOACOUSTIC TRANSDUCER APPARATUS INCLUDING A TRANSMISSION DUCT

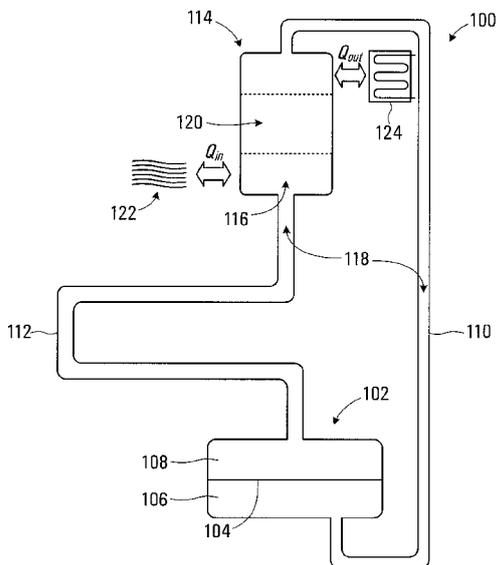


FIG. 1

(57) Abstract: A thermoacoustic transducer includes a mechanical converter providing power conversion between acoustic and mechanical power and includes a diaphragm defining a compression and an expansion chamber. A thermal converter including a flow passage having a regenerator portion is thermally coupled for conversion between acoustic and thermal power. The mechanical converter is in fluid communication with the flow passage through transmission ducts completing an acoustic power loop having a volume containing a working gas. A transmission duct cross-sectional area is less than a regenerator flow area, which is less than a diaphragm surface area. The diaphragm undergoes resilient displacement causing pressure oscillations within the volume. The power loop is configured to cause one location along the loop to have anti-phase pressure oscillations to pressure oscillations in the mechanical converter.



WO 2014/043790 A1

WO 2014/043790 A1

TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

THERMOACOUSTIC TRANSDUCER APPARATUS INCLUDING A TRANSMISSION DUCT

BACKGROUND OF THE INVENTION

1. Field of Invention

This invention relates generally to thermoacoustic transducers and more particularly to a thermoacoustic transducer for converting between thermal energy and mechanical energy.

2. Description of Related Art

Thermoacoustic transducers may be configured to operate as a heat engine where thermal energy is received and the transducer converts the thermal energy into mechanical energy, which may be used to drive an electrical generator, for example. Alternatively a thermoacoustic transducer may be configured to operate as a heat pump where mechanical energy is received and the transducer converts the mechanical energy into a thermal energy transfer from lower temperature to higher temperature.

Thermoacoustic transducers may implement the Stirling cycle using displaceable diaphragms to produce useful power density and operating efficiency. When configured as a heat engine, increases in efficiency may be achieved by increasing a temperature differential between a hot side and a cold side of the transducer. However such temperature increases may require implementation of a more complex structural architecture and/or the use of specialized high temperature materials.

SUMMARY OF THE INVENTION

In accordance with one aspect of the invention there is provided a thermoacoustic transducer apparatus. The apparatus includes a mechanical converter operable to provide power conversion between acoustic power and mechanical power. The mechanical converter includes at least one diaphragm defining a compression chamber and an expansion chamber within the mechanical converter, the at least one diaphragm having a diaphragm surface area. The apparatus also includes a thermal converter including a flow passage having a regenerator portion thermally coupled to provide power conversion between acoustic power and thermal power, the regenerator portion having a regenerator flow area. The mechanical converter is in fluid communication with the flow passage of the thermal converter through transmission ducts extending between the compression chamber and the flow passage and between the expansion chamber and the flow

-2-

passage respectively. The transmission ducts complete an acoustic power loop through the flow passage between the compression chamber and the expansion chamber. The acoustic power loop has a working volume for containing a working gas and being operable to facilitate acoustic power flow between the compression chamber and the expansion chamber. A cross-sectional area of the transmission ducts is less than the regenerator flow area and the regenerator flow area is less than the diaphragm surface area. The at least one diaphragm is operable to undergo resilient displacement to cause pressure oscillations within the working volume and the acoustic power loop is configured to cause at least one location along the acoustic power loop to have pressure oscillations that have an anti-phase relation to pressure oscillations in the mechanical converter.

The flow passage of the thermal converter may include a plurality of the regenerator portions configured for parallel flow and the regenerator flow area may include an overall area associated with the plurality of the regenerator portions.

The mechanical converter may include a plurality of mechanical converters configured in parallel and the diaphragm surface area may include an overall diaphragm surface area associated with the plurality of mechanical converters.

The first cross-sectional area of the transmission ducts may be at least about **10** times less than the diaphragm surface area.

The transmission duct between the compression chamber and the flow passage may have a first cross-sectional area and the transmission duct between the expansion chamber and the flow passage may have a second cross-sectional area and the first cross-sectional area may be less than the second cross-sectional area.

The transmission ducts may have respective lengths that may be selected to cause a phase change of about **360** degrees between pressure oscillations in the compression chamber and pressure oscillations in the expansion chamber.

The transmission ducts may have respective lengths that are selected to cause an initial phase change about **360** degrees between pressure oscillations in the compression chamber and pressure oscillations in the expansion chamber, and at least one additional **360** degree phase

-3-

change between pressure oscillations in the compression chamber and pressure oscillations in the expansion chamber such that an overall phase change through the acoustic power loop has the same effect as the initial phase change.

The apparatus may further include a mechanical spring coupled to the at least one diaphragm and the resilient displacement may occur at a resonant frequency that is in part dependent on an overall stiffness acting on the at least one diaphragm, the overall stiffness including at least a diaphragm stiffness, a gas stiffness due to working gas bearing on the at least one diaphragm, and the mechanical spring stiffness, and a contribution to the overall stiffness associated with the mechanical spring stiffness may include at least half of the overall stiffness.

A change in temperature in the transmission ducts may result in a change of speed of sound associated with acoustic power flow within the acoustic power loop and the respective lengths of the transmission ducts may be configured such that relative proportions of the gas stiffness and the mechanical spring stiffness in the overall stiffness cause the change in speed of sound to be at least partially offset by a corresponding change in the resonant frequency such that the phase change between the pressure oscillations in the compression chamber and the pressure oscillations in the expansion chamber due to the change in the speed of sound are at least partially compensated.

The mechanical converter may be housed within a pressure vessel and the at least one diaphragm may be coupled to an external energy system for transfer of mechanical power between the external energy system and the at least one diaphragm, the external energy system being disposed outside of the pressure vessel, and the resonant frequency may be further dependent on an overall mass including at least a diaphragm mass and an external mass associated with the coupling to the external energy system, the external mass being greater than the diaphragm mass.

The external energy system may include one of an electric generator, and a prime mover.

The mechanical spring may include a resilient wall portion coupled between the at least one diaphragm and a chamber wall of one of one of the compression chamber and the expansion chamber, the resilient wall portion being operable to provide a seal for containing working gas within the chamber while facilitating the resilient displacement of the at least one diaphragm.

-4-

The resilient wall portion may include a cylindrical tube extending between the at least one diaphragm and the chamber wall, the tube being configured to elastically deform in a direction generally aligned with a cylindrical axis of the tube.

The cylindrical tube may include a first cylindrical tube portion coupled to the at least one diaphragm and a second cylindrical tube portion coupled to the chamber wall, the first and second cylindrical tube portions being coaxially disposed and coupled together to form a folded cylindrical tube.

An extent of at least one of the compression chamber and the expansion chamber may be selected to provide a desired acoustic impedance for facilitating acoustic coupling between the chamber and the respective transmission duct.

The mechanical converter may be configured to cause a volumetric flow between the compression chamber and the transmission duct extending between the compression chamber and the flow passage that differs from a volumetric flow between the expansion chamber and the transmission duct extending between the expansion chamber and the flow passage.

The compression chamber and the expansion chamber may be configured to direct gas flows within the respective chambers in a direction generally parallel to a surface of the at least one diaphragm.

The at least one diaphragm may have a thickness profile across the diaphragm that may be selected to cause stress concentrations in the diaphragm to be reduced.

A static pressure associated with the working gas may be at least about **80 Bar**.

An operating frequency associated with the periodic flow of the working gas may be at least about **300 Hertz**.

At least a portion of at least one of the transmission ducts may include a plurality of ducts disposed to provide parallel fluid communication between the respective chamber and the flow passage of the thermal converter.

-5-

The flow passage of the thermal converter may further include a first heat exchanger portion in thermal communication with one of an external thermal energy source for receiving thermal energy and transferring the thermal energy to working gas flowing through the flow passage, and an external thermal energy sink for transferring thermal energy from the working gas flowing through the flow passage to the external thermal energy sink.

The thermal converter may include a thermal buffer for reducing heat transfer between the thermal converter and the mechanical converter, the thermal buffer being in fluid communication between the flow passage and the transmission duct extending between the expansion chamber and the flow passage.

During acoustic power flow between the compression chamber and the expansion chamber a standing wave component and a traveling wave component may be established within the acoustic power loop and the cross-sectional areas of the transmission ducts may be selected to cause the relative magnitudes of the standing wave component and traveling wave component to be apportioned to minimize overall losses in the apparatus.

The thermal converter may be disposed within a housing charged to a gas pressure approximately equivalent to a mean working pressure of the working gas.

The mechanical converter may be a first mechanical converter and may further include a second mechanical converter having at least one diaphragm defining a compression chamber and an expansion chamber within the second mechanical converter, the second mechanical converter being in fluid communication with the flow passage of the thermal converter through transmission ducts extending between the compression chamber of the second mechanical converter and the flow passage and between the expansion chamber of the second mechanical converter and the flow passage respectively, the transmission ducts completing a second acoustic power loop through the flow passage between the compression chamber and the expansion chamber of the second mechanical converter.

The first and second mechanical converters may be configured such that one of a) the expansion chamber of the first mechanical converter and the expansion chamber of the second mechanical converter includes a common expansion chamber extending between the at least one diaphragm of the first mechanical converter and the at least one diaphragm of the second mechanical

-6-

converter, and b) the compression chamber of the first mechanical converter and the compression chamber of the second mechanical converter includes a common compression chamber extending between the at least one diaphragm of the first mechanical converter and the at least one diaphragm of the second mechanical converter.

At least a portion of at least one of the transmission ducts may include a plurality of ducts disposed to provide parallel fluid communication between the flow passage of the thermal converter and the respective chambers.

At least one of the transmission ducts may include a common portion providing fluid communication between the respective chambers and the flow passage of the thermal converter.

Resilient displacement of the at least one diaphragm associated with the first mechanical converter may generate periodic forces directed along a first axis and resilient displacement of the at least one diaphragm associated with the second mechanical converter may generate periodic forces directed along a second axis and the first and second mechanical converters may be disposed such that the first axis and second axis are generally oriented to cause the respective periodic forces to substantially cancel each other.

The first axis and second axis may be generally coaxially aligned.

The at least one diaphragm may include a compression chamber diaphragm and an expansion chamber diaphragm, the respective compression chamber and expansion chamber diaphragms being mechanically coupled to move substantially in unison to act as the diaphragm of the mechanical converter.

At least one of the transmission ducts may include an inner wall that flexes in response to the pressure oscillations within the acoustic power loop and may further include an outer wall disposed about the inner wall and defining an isolating volume between the inner and outer wall, the isolating volume being charged to a lower static pressure than the working gas pressure and being operable to attenuate sound/vibration generated by the flexing of the inner wall.

The thermal converter may include at least a first thermal converter and a second thermal converter each having an associated flow passage and the apparatus may further include a

-7-

transmission duct extending between the respective flow passages of the first and second thermal converters and forming part of the acoustic power loop.

Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

In drawings which illustrate embodiments of the invention,

- Figure 1 is a schematic view of a thermoacoustic transducer apparatus in accordance with one embodiment of the invention;
- Figure 2 is a cross-sectional schematic view of an embodiment of a mechanical converter for implementing the apparatus shown in Figure 1;
- Figure 3 is a cross-sectional schematic view of an embodiment of a thermal converter for implementing the apparatus shown in Figure 1;
- Figure 4 is a series of graphs representing results of an operating simulation of the apparatus shown in Figures 1 – 3;
- Figure 5 is a complex plane phasor representation of pressures acting on a diaphragm of the mechanical converter shown in Figure 2;
- Figure 6 are graphs of calculated output power and calculated operating efficiency of the apparatus shown in Figures 1 – 3 as a function of working gas temperature;
- Figure 7 is a schematic view of an alternative embodiment of a mechanical converter for implementing the apparatus shown in Figure 1;
- Figure 8 is a schematic view of a thermoacoustic apparatus in accordance with another embodiment of the invention;

-8-

- Figure 9 is a schematic view of a thermoacoustic apparatus in accordance with another embodiment of the invention;
- Figure 10 is a schematic view of a thermoacoustic apparatus in accordance with another embodiment of the invention;
- Figure 11 is a schematic view of a thermoacoustic apparatus in accordance with a another embodiment of the invention including a transmission duct embodiment for use in any one of the above embodiments;
- Figure 12 is a schematic view of a thermoacoustic apparatus in accordance with a another embodiment of the invention; and
- Figure 13 is a schematic view of a thermoacoustic apparatus including an alternative thermal converter embodiment of the invention.

DETAILED DESCRIPTION

Referring to Figure 1, a thermoacoustic transducer apparatus according to a first embodiment of the invention is shown generally at **100**. The apparatus **100** includes a mechanical converter **102** operable to provide power conversion between acoustic power and mechanical power. The mechanical converter **102** includes a diaphragm **104** defining a compression chamber **106** and an expansion chamber **108** within the mechanical converter. The diaphragm has an associated diaphragm surface area A_S .

The apparatus **100** also includes a thermal converter **114** including a flow passage **116**. The flow passage **116** includes a regenerator portion **120** thermally coupled to provide power conversion between acoustic power and thermal power. The regenerator portion **120** has a regenerator flow area A_R .

The mechanical converter **102** is in fluid communication with the flow passage **116** of the thermal converter **114** through transmission ducts **110** and **112**. The transmission duct **110** extends between the compression chamber **106** and the flow passage **116**, while the transmission duct **112** extends between the expansion chamber **108** and the flow passage. The transmission ducts **110**

-9-

and **112** complete an acoustic power loop **118** through the flow passage between the compression chamber **106** and the expansion chamber **108**. The acoustic power loop **118** has a working volume for containing a working gas and is operable to facilitate acoustic power flow between the compression chamber and the expansion chamber. The working volume in the acoustic power loop **118** is thus made up of the volumes within the compression and expansion chambers **106** and **108**, the volumes of transmission ducts **110** and **112**, and the volume of the flow passage **116** in the thermal converter **114**. In one embodiment the working gas in the working volume comprises helium at a static pressure p_m of about **80** bar.

In one embodiment the transmission duct **110** and/or transmission duct **112** may have a cylindrical wall, but in other embodiments the ducts may have non-cylindrical walls. The transmission duct **110** has a first cross-sectional area A_1 and the transmission duct **112** has a second cross-sectional area A_2 . In the embodiment shown, the transmission ducts **110** and **112** are shown as having a uniform cross-section along the length of the respective ducts, however in other embodiment the cross-section of the ducts may vary along their respective lengths.

During operation of the apparatus **100**, the diaphragm **104** is operable to undergo resilient displacement to cause pressure oscillations within the acoustic power loop **118**, and the working gas pressure within the working volume will thus swing between $p_m \pm |\rho|$, where $|\rho|$ is the differential pressure swing amplitude. When the diaphragm **104** is displaced so as to cyclically reduce and expand a volume of the compression chamber **106**, the resulting compression and rarefaction in the working gas produces acoustic power which propagates through the transmission duct **110** to the thermal converter **114**.

In one embodiment the regenerator portion **120** of the thermal converter **114** is configured to receive thermal energy from an external source **122** and to transfer thermal energy to an external sink **124**, and to convert a portion of the thermal energy into acoustic energy for operation of the apparatus as a heat engine. The regenerator portion **120** of the thermal converter **114** then operates to convert thermal energy Q_{in} provided from the external source **122** into acoustic energy, thereby amplifying the acoustic power traveling through the regenerator portion **120** of the thermal converter **114**. The amplified acoustic power leaving the thermal converter **114** propagates along transmission duct **112** back to the mechanical converter **102**, where it is received in the expansion chamber **108**. Pressure oscillations due to the amplified acoustic power in the expansion chamber **108** are operable to cyclically displace the diaphragm **104**, thereby transferring acoustic power

-10-

back to the compression chamber **106**. The diaphragm **104** may be coupled to transmit mechanical power to an external system (not shown in Figure 1). The amplification of acoustic power in the thermal converter **114** thus provides sufficient power for sustaining periodic movement of the diaphragm **104**, while also providing useful mechanical output power. The process described above operates at a natural frequency associated with the apparatus **100**.

Alternatively for operation of the apparatus as a heat pump, mechanical power is transmitted to the diaphragm **104** to cause the cyclic displacement of the diaphragm. The regenerator portion **120** of the thermal converter **114** is configured to receive acoustic energy generated within the apparatus **100** and to convert the acoustic energy into a transfer of thermal energy from the external source **122** to external sink **124**, at higher temperature than the temperature of the external source **122**.

The regenerator portion **120** of the thermal converter **114** has an associated regenerator flow area A_R , and in the embodiment shown the diaphragm surface area A_S is greater than the regenerator flow area. In this embodiment, the regenerator flow area A_R is also greater than the first and second cross-sectional areas A_1 and A_2 of the respective transmission ducts **110** and **112**.

In other embodiments the flow passage **116** of the thermal converter **114** may include a plurality of regenerator portions **120** configured for parallel flow and the regenerator flow area A_R may include an overall area associated with the plurality of the regenerator portions. Similarly, the mechanical converter **102** may include a plurality of mechanical converters configured in parallel and the diaphragm surface area A_S may include an overall diaphragm surface area associated with the plurality of mechanical converters.

The acoustic power loop **118** is further configured to cause at least one location along the loop to have pressure oscillations that have an anti-phase relation to pressure oscillations in the mechanical converter **102**. The acoustic power loop **118** may be configured such that pressure oscillations have an approximately anti-phase relation to pressure oscillations in the mechanical converter **102** within the regenerator portion **120** of the thermal converter **114**, such that viscous losses within the regenerator are reduced.

The transmission ducts **110** and **112** act as transmission lines carrying the acoustic power from the compression chamber **106** to the regenerator portion **120** of the thermal converter **114** and back to the expansion chamber **108**. In general, acoustic energy waves propagating through a gas-filled

-11-

duct will experience a phase change that depends on the constitution and temperature of the gas, and on the cross-sectional area of the duct. If the duct has a bore of varying cross-sectional area then the rate of change of pressure phase will vary along the duct. Acoustic energy waves propagating through a duct will thus experience a change of oscillating pressure phase between an entrance and an exit of the duct.

In one embodiment, the transmission duct **110** and transmission duct **112** each have respective lengths selected to cause a pressure oscillation phase change of about **360** degrees along the acoustic path between the compression chamber **106** and the expansion chamber **108**.

It should be readily appreciated that the respective lengths of the transmission ducts **110** and **112** may also be increased to provide an overall phase change along the transmission ducts that corresponds to the above phase change ranges while including an additional **360** degree phase change. As an example, the lengths of the transmission ducts **110** and **112** may be selected to provide a phase change of about **720** degrees, which apart from additional duct losses would result in the same pressure oscillation phase change between the compression chamber **106** and the expansion chamber **108**. The transmission ducts **110** and **112** may thus have respective lengths that are selected to cause an initial phase change of about **360** degrees between pressure oscillations in the compression chamber **106** and pressure oscillations in the expansion chamber **108**, and at least one additional **360** degree phase change such that an overall phase change through the acoustic power loop **118** has the same effect as the initial phase change. The additional length of the transmission ducts **110** and **112** may facilitate positioning the mechanical converter **102** remotely from the thermal converter **114** by including one or more multiples of **360** degree pressure phase change along the acoustic power loop **118**.

The pressure oscillations within the acoustic power loop **118** have associated working gas flow oscillations and the transmission ducts **110** and **112** may have respective lengths selected to dispose the flow passage **116** of the thermal converter **114** proximate a location within the acoustic power loop where the flow oscillations have a flow velocity that is close to a minimum flow velocity. In one embodiment the apparatus **100** may be configured such that a frequency of the pressure oscillations is about **500**Hz. For helium working gas at a temperature of about **50°C**, the wavelength of sound at **500** Hz operating frequency is about **2.1** meters, and under these conditions the length of each of the transmission ducts **110** and **112** may be about **1** meter. The apparatus **100** may thus be configured such that the mechanical converter **102** and thermal

-12-

converter **114** are spaced apart, which is advantageous when the apparatus is required to be configured for operation in conjunction with a furnace or other equipment that provides the external source **122** and/or external sink **124**.

Mechanical converter

A schematic cross sectional view of an embodiment for implementing the mechanical converter **102** is shown generally at **200**. Referring to Figure **2**, the mechanical converter **200** includes a housing **202** enclosing a compression chamber **204** and an expansion chamber **206**. The compression chamber **204** and expansion chamber **206** are separated by a diaphragm **208**. In this embodiment the diaphragm **208** comprises a resilient wall **210** supported at a periphery **212** of the housing **202** and configured to facilitate displacement in a direction aligned with a central axis **214** of the mechanical converter **200**. The diaphragm **208** has a lower surface **218**, which during displacement of the wall causes a volume of the compression chamber **204** to be varied. Similarly, the diaphragm **208** has an upper surface **216**, which during displacement of the wall causes a volume of the expansion chamber **206** to be varied. The wall **210** of the diaphragm **208** has a thickness profile across the diaphragm that is selected to cause stress concentrations in the diaphragm to be reduced.

In the schematic view of Figure **2**, spacing between elements of the mechanical converter **200** has been increased for illustrative purposes. In practice, a longitudinal extent of the compression and expansion chambers **204** and **206** along the axis **214** may only be in the region of about **1** mm and a corresponding displacement of the diaphragm **208** may have a peak amplitude of about **200** μm , for example. The resilient wall **210** of the diaphragm **208** may be fabricated from steel, which is capable of providing an infinite fatigue life under these operating conditions.

The mechanical converter **200** further includes an input/output shaft **220**. In this embodiment the shaft **220** is coupled between the diaphragm **208** and an external energy system **222**. During operation of the apparatus **100**, the diaphragm **208** undergoes periodic displacement for coupling energy between the mechanical converter **200** and the external energy system **222**. When the mechanical converter **200** is configured to operate as part of a heat engine, the external energy system **222** may comprise an electrical generator for converting mechanical energy into electrical energy. For example, in the embodiment shown the external energy system **222** may comprise a linear alternator, which generates an alternating current. Alternatively, when the mechanical converter **200** is configured to operate as a heat pump, the external energy system **222** may

-13-

comprise a prime mover such as an electro-mechanical actuator for imparting a mechanical driving force to the diaphragm **208**.

The mechanical converter **200** also includes a mechanical spring **224** coupled between the diaphragm **208** and the housing **202**. In this embodiment, the mechanical spring **224** includes a resilient outer cylindrical wall portion **226** and a resilient inner cylindrical wall portion **228** coaxially disposed and joined by an annular wall portion **230** to form a folded cylindrical tube spring. The outer cylindrical wall portion **226** is connected to the housing **202** and the inner cylindrical wall portion **228** is connected to the diaphragm **208** and the tube spring is configured to elastically deform in a direction generally aligned with a central axis **214**. In this embodiment the inner, outer, and annular wall portions **226**, **228**, and **230** of the mechanical spring **224** are also operable to provide a seal for containing working gas within the compression chamber **204** while facilitating displacement of the diaphragm **208**.

The compression chamber **204** of the mechanical converter **200** is in fluid communication with the transmission duct **110** and the expansion chamber **206** is in fluid communication with the transmission duct **112**. In the embodiment shown in Figure 2, the transmission duct **112** is coaxially disposed such that gas flows within the expansion chamber **206** are symmetrically oriented about the central axis **214**. While symmetrically oriented flows have the advantage of being simpler to characterize using a mathematical model, in other embodiments the thermoacoustic transducer apparatus **100** may have a non-symmetric flow. In the embodiment of Figure 2, the transmission duct **110** is shown as being offset from the central axis **214**, but in other embodiments the transmission duct may be offset even further toward or at an edge of the compression chamber **204**. In yet another embodiment, the transmission duct **110** may include a plurality of offset transmission ducts to minimize local flow concentration and local losses. The transmission duct **110** may thus comprise a plurality of duct lengths in communication with the compression chamber **204** and disposed about the central axis **214**. For example, gas flow may be directed through a manifold disposed proximate the periphery **212** of the compression chamber **204** to the transmission duct **110**. The manifold may include multiple branches for symmetrically directing gas flow between the periphery **212** and transmission duct **110**, thus causing path lengths associated with the flows to have a generally similar length. Similarly, in the expansion chamber **206**, gas flow may also be directed via a manifold disposed proximate the periphery **212** of the chamber to the transmission duct **112** and the manifold may include multiple branches for symmetrically directing gas flow between the periphery **212** and the transmission duct **112**.

-14-

The mechanical converter **200** shown in Figure 2 is configured for significantly different flow than conventional inline piston or diaphragm thermoacoustic transducer systems. In such systems flow is generally perpendicular to the piston or diaphragm surface. In the embodiments disclosed herein, the resilient wall **210** of the diaphragm **208** provides a very limited displacement and as a result the compression and expansion chambers **204** and **206** are substantially planar and have a radius to height ratio that may be in the region of **100:1**. The mechanical converter has high acoustic impedance (i.e. large pressure oscillations in proportion to the flow oscillations within the chambers **204** and **206**). Working gas flow within the chambers **204** and **206** is thus predominantly along the surface of the diaphragm **208** generally parallel to the upper surface **216** and lower surface **218** the diaphragm.

The compression and expansion chambers **204** and **206** also provide an additional acoustic compliance in the acoustic power loop **118** that affects the flows between the chambers and the respective transmission ducts **110** and **112**. In effect a larger flow into either of the chambers **204** and **206** may be accommodated by configuring the respective chamber to provide a larger acoustic compliance through increased chamber volume. For an increased chamber volume a larger flow is required to charge the chamber to a given pressure. Also, flows into the chambers do not need to be completely in phase with the velocity of the diaphragm **208**. Configuration of the compression and expansion chambers **204** and **206** thus facilitates independent adjustment of flows between the chambers and the respective transmission ducts **110** and **112** by changing the height of the respective chambers.

Thermal Converter

Referring to Figure 3, an embodiment for implementing the thermal converter **114** in Figure 1 is shown generally at **300**. In this embodiment, the thermal converter **300** includes a first heat exchanger **302**, a regenerator **304**, and a second heat exchanger **306**. The regenerator **304** extends between and is in fluid communication with the first heat exchanger **302** and the second heat exchanger **306**. The first heat exchanger **302** is in fluid communication with the transmission duct **110** via a first plenum **308**. The second heat exchanger **306** is operable to receive thermal energy Q_{in} from the external source **122** and thermal energy Q_{out} is removed from the first heat exchanger **302** and transferred to the external sink **124**. General considerations for configuring the first heat exchanger **302**, regenerator **304**, and second heat exchanger **306** are disclosed in "Thermoacoustics," G. W. Swift, **2002** Acoustical Society of America, Melville NY,

-15-

In this embodiment, the thermal converter **300** also includes a thermal buffer **310** in fluid communication between second plenum **312** and the transmission duct **112**. In this embodiment the thermal buffer **310** includes a duct having a profiled wall **314** that is shaped to reduce convective heat transfer through circulating gas flows within the duct during operation of the apparatus **100**.

The thermal converter also includes a housing **316** having walls **318**, which may be fabricated from conventional steel. The housing **316** defines an insulating volume **320** that surrounds the first heat exchanger **302**, regenerator **304**, second heat exchanger **306**, and thermal buffer **310** and extends to the walls **318** of the housing. The first heat exchanger **302**, regenerator **304**, and second heat exchanger **306** are enclosed within a regenerator housing **334** having walls **336**. The regenerator housing **334** provides fluid connections to the transmission duct **110** and the thermal buffer **310** and the first and second plenums **308** and **312** are defined within the walls **336** of the regenerator housing.

During operation of the apparatus **100**, portions of the regenerator **304**, second heat exchanger **306**, and thermal buffer **310** generally operate at a temperature differential with respect to an ambient temperature T_a of an environment **322** surrounding the housing **316**. For example, when operating the apparatus **100** as a heat engine, the thermal energy received at the second heat exchanger **306** causes the temperature of at least the second heat exchanger **306**, portions of the regenerator **304**, and a portion of the thermal buffer **310** to be elevated above an ambient temperature T_a . The insulating volume **320** may be filled with an insulating material, such as a porous ceramic material, which acts to insulate components in the thermal converter having temperatures different than the ambient temperature T_a of the environment **322**. The insulating volume **320** and thermal buffer **310** thus operate to reduce heat transfer to the walls **318** of the housing **316**, such that the walls remain at a temperature close to the ambient temperature T_a . In one embodiment, the insulating volume **320** may be charged with an insulating gas to approximately the same static pressure as the working gas static pressure p_m . Advantageously, charging the insulating volume **320** to generally the same static pressure as the working gas reduces stresses on the profiled wall **314** of the thermal buffer, the walls **336** of the regenerator housing **334**, and walls of the transmission duct **110**. Furthermore, the stress on these walls is then purely cyclical and high temperature creep is then no longer a concern. This allows these walls to be substantially thinner, thereby reducing heat conduction along the walls. In one

-16-

embodiment, the gas used to charge the insulating volume **320** may be an insulating gas such as argon rather than the working gas, which will further reduce the heat transfer to the walls **318** of the housing **316**. During operation of the apparatus **100** the housing **316** remains at a temperature near an ambient temperature of the environment **322** and even though the static pressure in the insulating volume **320** acts on the walls **318**, creep is less of a concern due to the near ambient temperature operation of the walls.

The transmission duct **110** feeds through the housing **316** at a first port **324**. During operation of the apparatus **100**, a temperature of the gas in the compression chamber **204** and in the transmission duct **110** is not significantly elevated above ambient temperature and thus the first port **324** is not required to withstand a significant temperature differential. The transmission duct **112** feeds through the housing **316** at a second port **326**, which is also not required to withstand a significant temperature differential since the insulating volume **320** reduces heat transfer to the walls **318** of the housing **316** and the thermal buffer **310** reduces heat transfer to the transmission duct **112**.

Advantageously when the apparatus **100** is configured as a heat engine most of the components of the thermal converter **300** that operate at elevated temperature are thermally insulated within the housing **316** and the operating temperature of walls **318** of the housing **316** are not significantly elevated over ambient temperature T_a . The thermal buffer **310** also reduces heat transfer along the transmission duct **112** to the expansion chamber **108**. In this embodiment, the thermal converter includes a temperature isolating feedthrough **338** for receiving thermal energy Q_{in} from the external source **122**, which when operating as a heat engine is at a substantially higher temperature than an ambient temperature of the environment **322**. In one embodiment, the thermal energy Q_{in} could be provided through a hot heat exchange fluid loop or through combustion of a fuel gas, for example (not shown). The second heat exchanger **306** receives thermal energy Q_{in} from the external energy source and transfers heat to working gas flowing through the second heat exchanger into or out of the regenerator **304**.

The regenerator **304** alternatively receives thermal energy from working gas passing through the regenerator and delivers thermal energy to the working gas. The regenerator **304** may be fabricated from a matrix material having a flow channel radius selected to provide sufficiently low flow friction losses while providing for efficient heat transfer between the gas flowing through the regenerator and the matrix material. The regenerator matrix material should have a low thermal

conductivity in the direction of the axis **328** for reducing heat conduction through the regenerator to the first heat exchanger **302**. Suitable matrix materials for the regenerator **304** may include porous materials such as porous ceramic or packed spheres, or materials having discrete flow channels such as a micro capillary array. Alternatively, a stacked wire screen or wound wire regenerator, may also be used. Some suitable regenerator matrix materials are described in US Patent **4,416,114** to Martini.

The first heat exchanger **302** receives heat from working gas flowing through the first heat exchanger and the heat is removed from the thermal converter by an external heat exchange system such as a liquid cooling loop (not shown), which would be in thermal communication with the first heat exchanger.

The thermal buffer **310** is configured to maintain a temperature-stratified column of working gas that allows the transmission of acoustic power in the working gas through the thermal buffer **310**, while minimizing parasitic heat transfer between an end **330** of the thermal buffer proximate the second plenum **312** and an end **332** of the thermal buffer proximate the second port **326**. Parasitic heat transfers would include heat conduction in the walls **314** of the thermal buffer **310**, gravity driven convective flow, acoustically driven streaming, and thermoacoustic bucket brigade heat transfer along the walls of the thermal buffer. Such parasitic heat transfers are further described in Swift (referenced above). For a heat engine, the end **330** would be at an elevated temperature over the end **332**, which is in thermal communication with the walls **318** of the housing **316** and would thus generally remain at a temperature near an ambient temperature of the environment **322**. In other embodiments, the thermal buffer **310** may include a secondary heat exchanger proximate the end **332** for thermally anchoring the working gas temperature at end **332** at near the housing temperature. For a heat pump implementation of the apparatus **100**, the end **330** would be at a lower temperature than the end **332**.

The thermal buffer **310** may include a flow straightener (not shown) between the second plenum **312** and end **330** for reducing Rayleigh streaming within the thermal buffer at the transition between the second plenum and the thermal buffer. For the embodiment shown a flow straightener should not be required at the transition between the thermal buffer **310** and the transmission duct **112**, since there is no abrupt change in diameter or direction of the thermal buffer and hence no jetting of the gas flow at this transition.

When operating the apparatus **100** as a heat engine, the end **330** of the thermal buffer **310** may have to withstand high operating temperatures, in which case at least a portion of the thermal buffer would generally be fabricated from a high temperature material, such as a ceramic material, refractory metal, or high nickel content super alloy. Advantageously, since the thermal buffer **310** is disposed inside the housing **316** which may be changed to a pressure p_m , the thermal buffer is only subjected to the differential pressure amplitude $\pm|p|$ and not the full static pressure p_m , thus significantly reducing high temperature creep effects on the thermal buffer material.

In general the profile of the walls **314** of the thermal buffer is selected to promote the temperature-stratified column of working gas by suppressing acoustically driven streaming. Determination of a specific profile for the profiled wall **314** may be in accordance with calculations provided for a tapered pulse tube disclosed in US Patent **5,953,920** to Swift et al. The profiled wall **314** of the thermal buffer **310** shown in Figure **3** has a cross-sectional dimension that reduces between the end **330** and the end **332**. In the embodiment shown the cross-sectional dimension changes in generally linear proportion along the profiled wall **314** of the thermal buffer **310**. In other embodiments, the cross-sectional dimension may change non-linearly or may even increase, depending on the specific flow conditions and temperature gradients within the thermal converter **300**.

Inclusion of the thermal buffer **310** imposes a constraint on the orientation of the thermal converter **300**, in that the thermal buffer must be oriented with a hot end of the two ends **330** and **332** being upwardly directed to reduce gravity driven convection. Such gravity driven convection would generally result in a significant parasitic heat transfer between the ends **330** and **332** of the thermal buffer **310**.

Transmission ducts

The mechanical converter **200** and thermal converter **300**, when connected by the transmission ducts **110** and **112**, form a thermoacoustic transducer apparatus such as that shown at **100** in Figure **1**. The transmission ducts **110** and **112** are generally configured to provide a desired performance and operating efficiency of the apparatus. In the embodiments disclosed herein, the acoustic power loop **118** is configured to establish both a standing wave component and a traveling wave component. The standing wave component is superimposed on the travelling wave and has out of phase pressure and flow amplitudes that constrain the length of the transmission ducts **110** and **112**, but do not contribute to acoustic power flow through the acoustic power loop

-19-

118. At the same time, the travelling wave component is responsible for power flow through the acoustic power loop **118**, but remains substantially unaltered by passage through the ducts, except for a slight decrease in amplitude due to the additional viscous and relaxation losses within the ducts. The addition of the transmission ducts **110** and **112** facilitates adjustment of a ratio between the standing wave component and the travelling wave component such that acoustic losses in the mechanical converter **200** and thermal converter **300** are reduced as a fraction of output power. However, the transmission ducts **110** and **112** themselves introduce additional losses. Selection of a length and cross sectional area of the transmission ducts **110** and **112** involves balancing of losses in the ducts against the reduction of losses in the mechanical and thermal converters **200** and **300** within the acoustic power loop **118** and against structural constraints to achieve an overall desired performance of the apparatus.

Periodic movement of the diaphragm **208** results in some portion of volume of the compression chamber **204** and expansion chamber **206** being swept by the diaphragm elements, while remaining portions of the working volume within the respective chambers, the transmission ducts **110** and **112**, and the thermal converter **300** represent an unswept volume portion of the working volume. Conventional Stirling engines are one example of a thermoacoustic transducer that is generally configured to minimize the unswept volume proportion to increase an overall compression ratio of the apparatus, thereby increasing operating efficiency. Accordingly, in a conventional configuration any duct length between the mechanical converter **200** and thermal converter **300** would be minimized or even eliminated to reduce unswept volume. Inclusion of additional lengths of duct such as the transmission ducts **110** and **112** thus significantly increases the unswept volume proportion. However the overall length of the transmission ducts **110** and **112** may be selected such that the effect of the additional unswept volume of the transmission ducts and other unswept portions of the working volume are substantially eliminated apart from additional viscous and relaxation losses associated with inclusion of the transmission ducts **110** and **112**.

For example, if the transmission ducts **110** and **112** have a length selected to cause a phase change of about **360** degrees through the acoustic power loop **118**, then the phase relationship between pressure and flow oscillations within the compression chamber **204** and expansion chamber **206** would be essentially unchanged when compared to a conventionally configured apparatus having a minimized unswept volume.

-20-

In one embodiment, the length of the transmission ducts **110** and **112** may be slightly reduced to compensate not only for the added unswept volume in the transmission ducts, but also for other unswept volumes within the mechanical converter **200** and thermal converter **300**. For example the overall lengths of the transmission ducts **110** and **112** may be selected to cause a phase change of less than **360** degrees, which would also compensate for these other unswept volumes within the working volume. Accordingly in this embodiment most of the unswept volume can be effectively removed from the acoustic power loop **118** thus making it possible to provide for an optimal compression ratio irrespective of the actual working volume thereby increasing the efficiency and specific power produced by the apparatus. As may be readily appreciated, increasing the compression ratio by physically removing unswept volumes is particularly difficult and severely constrains engine architecture. Advantageously, in this embodiment, unswept volume is effectively cancelled through appropriate selection of the length of the transmission ducts **110** and **112** rather than being physically removed.

The specific embodiment of the mechanical converter **200** shown in Figure 2 effectively corresponds to an alpha-configuration Stirling engine, in which the compression and expansion chambers each have a diaphragm (or piston) and the dual diaphragms are typically mechanically linked so as to cause a phase difference between displacements of the respective diaphragms. In the mechanical converter **200**, the single diaphragm **208** replaces the linked diaphragms of the conventional alpha-configuration Stirling and the necessary phase difference is provided through selection of the lengths of the transmission ducts **110** and **112**. For example, in one embodiment, the transmission duct **110** and transmission duct **112** have respective lengths selected to cause a phase difference between pressure oscillations in the compression chamber **204** and pressure oscillations in the expansion chamber **206** of at least about **285** degrees and less than about **345** degrees. Conveniently, a range of **285** degrees and less than about **345** degrees also substantially falls within a phase change range that addresses the unswept volume, as described above. Advantageously, the inclusion of transmission ducts **110** and **112** thus facilitates the use of a single diaphragm **208**, while simplifying the structural configuration of the mechanical converter.

One significant loss within the acoustic power loop **118** occurs within the matrix of the regenerator **304** of the thermal converter **300**, which has narrow flow channel radius that results in increased viscous flow losses through the regenerator. The acoustic power at the any location along the acoustic power loop **118** may be expressed by the following relation:

-21-

$$P_a = \frac{1}{2} \operatorname{Re}[p \cdot \tilde{U}], \quad \text{Eqn 1}$$

where:

P_a is the acoustic power;

p is the pressure phasor; and

\tilde{U} is the complex conjugate of the volumetric flow phasor.

Due to the standing wave within the acoustic power loop **118**, the relative amplitudes of the pressure oscillations (p) and flow oscillations (\tilde{U}) vary through the power loop. In the embodiment of the mechanical converter **200** shown in Figure 2, the diaphragm **208** is relatively stiff and is configured for small operating displacements and as such generates relatively low flow oscillation amplitude within the compression and expansion chambers **204** and **206** and relatively high pressure oscillation amplitude. As disclosed above, the acoustic power loop is configured to cause at least one location along the acoustic power loop **118** to have pressure oscillations that have an anti-phase relation to pressure oscillations in the mechanical converter **200**. The location where this anti-phase relation occurs thus corresponds to a location of high pressure oscillation amplitude and low flow oscillation amplitude. In this embodiment the regenerator **304** of the thermal converter **300** is disposed proximate this location, since viscous losses are proportional to the square of the flow oscillation amplitude. Accordingly, disposing the thermal converter proximate the location along the acoustic power loop **118** where pressure oscillations have an approximately anti-phase relation to pressure oscillations in the mechanical converter **200** may at least partially compensate for the increased viscous and relaxation losses introduced by inclusion of the transmission ducts **110** and **112**.

In general, the first cross-sectional area A_1 of the transmission duct **110** and the second cross-sectional area A_2 of the transmission duct **112** are selected to cause the relative magnitudes of the standing wave component and traveling wave component to be apportioned to minimize overall losses in the apparatus.

The resilient wall **210** of the diaphragm **208** is formed as a relatively thick and stiff steel flexure configured to be mechanically resonant at the operating frequency of the thermoacoustic transducer apparatus. For long operating lifetime the resilient wall **210** is designed such that flexure stresses remain below an infinite fatigue maximum stress associated with the material of the wall. Volumetric flows caused by oscillating displacement of the diaphragm **208** are

-22-

proportional to the surface area A_s and the displacement amplitude of the diaphragm which is generally small resulting in generally low flow amplitudes within the compression chamber **204** and expansion chamber **206**. Accordingly, for a given acoustic power, frequency, diaphragm area A_s , and diaphragm displacement, relatively high pressure oscillation amplitudes are required in the compression chamber **204** and expansion chamber **206**. The impedance of the compression chamber **204** and expansion chamber **206** is proportional to the ratio of pressure amplitude to flow amplitude, causing the compression and expansion chambers of the mechanical converter to have high acoustic impedance.

The standing wave component of the acoustic power flow is established by selection of the dimensions of the transmission ducts **110** and **112** so as to cause an acoustic impedance mismatch between the mechanical converter **200**, thermal converter **300**, and the transmission ducts. A duct has a characteristic impedance given by:

$$Z_t = \frac{\rho_m c_0}{A_{ff}} \quad \text{Eqn 2}$$

where ρ_m is the density of the working gas, c_0 is the velocity of sound in the working gas, and A_{ff} is the free flow cross-sectional area of the duct. Viscous and relaxation losses within the duct reduce with increasing duct area A_{ff} since a greater acoustic power can then be transmitted at lower pressure oscillation amplitude and correspondingly increased volumetric flow oscillation amplitude. However, as disclosed above, viscous losses are greatest with the regenerator **304**, and it is thus desirable to cause some intentional impedance mismatch between the mechanical converter **200**, thermal converter **300** and the transmission ducts **110** and **112** to establish the location along the acoustic power loop **118** where pressure oscillations have an anti-phase relation to pressure oscillations in the mechanical converter **200** for reducing regenerator viscous losses. The addition of the standing wave component reduces losses in the regenerator **304** by increasing ρ and reducing \dot{U} while leaving the acoustic power P_a generally unchanged (in Eqn 1 above). Relaxation losses that are proportional to the square of the pressure amplitude $|p|$ are almost absent in the regenerator **304**, and are thus not significantly increased by the standing wave component. However viscous losses are proportional to the square of volumetric flow and are significantly decreased. Accordingly, in the embodiments shown the first cross-sectional area A_1 of the transmission duct **110** and the second cross-sectional area A_2 of the transmission duct **112** are at least about **10** times less than the surface area A_s of the diaphragm **208**. The first cross-sectional area A_1 of the transmission duct **110** may also be less than the second cross-sectional area A_2 of the transmission duct **112**, since the transmission duct **112** is disposed after the thermal converter

-23-

300 in the acoustic power loop **118** and must thus accommodate a higher power flow than the transmission duct **110**.

In one embodiment the area A_1 of the transmission duct **110** may be about half of the area A_2 of the transmission duct **112**. For example, the area A_2 may be about 7 cm^2 , the area A_1 may be about 3.5 cm^2 , and the surface area of the diaphragm A_s may be about 80 cm^2 . The regenerator **304** may have a regenerator flow area A_R of about 70 cm^2 , which is less than the area A_s and greater than the areas A_1 and A_2 .

When combined with the relatively high operating frequency (i.e. above **300** Hz, and typically **500** Hz) for the thermoacoustic transducer apparatus disclosed herein, the reduction in the duct areas A_1 and A_2 in comparison to the areas A_s and A_R of the mechanical converter **200** and thermal converter **300** provides additional advantages over conventional lower frequency thermoacoustic transducers. High frequency operation reduces the lengths of the transmission ducts **110** and **112** for a desired phase change between compression and expansion chambers **204** and **206** and also provides a corresponding reduction in duct losses and duct mass. The reduced duct areas A_1 and A_2 permits the wall thickness to be reduced while still providing sufficient thickness to withstand the hoop stress caused by the pressure differential between the working gas pressure p_m and the lower pressure outside the ducts. Wall thickness for a circular cross-section duct generally scales with the duct radius for a given working pressure p_m but the duct mass scales with the square of duct radius. Accordingly, for the thermoacoustic transducer apparatus embodiments disclosed herein, the mass of the transmission ducts **110** and **112** represents a substantially smaller proportion of the overall mass of the apparatus than for comparative thermoacoustic transducer configurations operating at low frequency and with large duct diameters.

The inclusion of transmission ducts **110** and **112** provides several advantages and satisfies constraints associated with configuring thermoacoustic transducers. For example, the transmission ducts **110** and **112** address unswept volume issues, provide for optimal location of the thermal converter **300** along the acoustic power loop **118**, and facilitate separation of the mechanical converter **200** from the thermal converter. For the Alpha-type mechanical converter embodiment shown in Figure 2, the transmission ducts **110** and **112** also provide the necessary phase shift between pressure oscillations in the compression and expansion chambers **204** and **206**. Additionally, configuration of the apparatus to operate at relatively high frequencies, reduces the necessary length of the transmission ducts **110** and **112** and therefore the associated losses.

-24-

In one embodiment the operating frequency of the transducer apparatus is selected such that losses in the transmission ducts **110** and **112** are less than losses in the regenerator **304**. In one exemplary embodiment the operating frequency is at least about **300** Hz and may be about **500** Hz, or may be higher than **500** Hz.

Operating simulation

The operation of the thermoacoustic transducer apparatus as a heat engine is further described with further reference to Figure **4**, which includes results of computer simulations for a thermoacoustic transducer apparatus such as that shown in Figures **1 – 3**. The simulation results are depicted as a series of graphs **400**, **402**, **404**, and **406** in which the x-axis represents locations along the acoustic power loop **118** through the apparatus extending from the periphery **212** of the compression chamber **204**, through the compression chamber, through the transmission duct **110**, first plenum **308**, first heat exchanger **302**, regenerator **304**, second heat exchanger **306**, second plenum **312**, thermal buffer **310**, transmission duct **112**, and through the expansion chamber **206** to the periphery **212**. Since the end to end length of the acoustic power loop **118** is dominated by the length of the transmission ducts **110** and **112** and the thermal buffer **310**, for illustrative purposes these portions of the acoustic power loop have been plotted on the x-axis at $1/10^{\text{th}}$ scale in the graphs **400 – 406**. The thermal converter **300** is disposed such that the regenerator **304** is at a location along the acoustic power loop where pressure oscillations have an approximate anti-phase relation to pressure oscillations in the mechanical converter **200**.

In the graph **400**, volumetric flow amplitude U in liters per second is plotted against acoustic power loop location. In the graph **402**, pressure amplitude $|\rho|$ is plotted against acoustic power loop location. Flow oscillations in the compression chamber **204** comprise predominantly pressure oscillations and minimal flow oscillations, while oscillations at a location approximately one-quarter of the way along the transmission duct **110** comprise predominantly flow oscillations and minimal pressure oscillations. This is illustrated in the graphs **400** and **402** where locations of maxima in flow amplitude U generally correspond to locations of minima in pressure amplitude, and vice versa. The volumetric flow amplitude U is zero at outer periphery **212** of the compression chamber **204** and expansion chamber **206**, where the flow is constrained by the wall of housing **202**. Flow amplitude U increases towards the center of the compression and expansion chambers **204** and **206** due to the motion of the diaphragm **208**. The volumetric flow amplitude U in each of the transmission ducts **110** and **112** increases to a maximum as pressure amplitude $|\rho|$ is converted to

-25-

flow amplitude (i.e. at a flow velocity anti-node) and then decreases again as the inertia of the flow is converted back to pressure amplitude.

Acoustic power P_a may be computed from the volumetric flow and pressure amplitude in accordance with Eqn 1 above and is plotted against acoustic power loop location in the graph 404. The acoustic power P_a increases through the compression chamber 204 due to the motion of the diaphragm 208, and is generally constant through the transmission duct 110, first plenum 308, and first heat exchanger 302. The acoustic power P_a is then amplified in the regenerator 304, and is then generally constant through the second heat exchanger 306, second plenum 312, thermal buffer 310, and transmission duct 112. Acoustic power is then absorbed in the expansion chamber 206 to cause motion of the diaphragm 208, thus transferring acoustic power back to the compression chamber 204 and completing the acoustic power loop through the thermoacoustic transducer apparatus.

The phase the pressure and flow oscillations are plotted on the graph 406 against acoustic power loop location. The phase Φ_p of the pressure oscillations is shown as a solid line and phase Φ_u of the flow oscillations as a broken line. In this embodiment the difference in pressure oscillation phase Φ_p between each of the compression chamber 204 and the expansion chamber 206 and the regenerator is about 145 degrees. Additionally pressure oscillations at a point 408 are anti-phase or 180 degrees out of phase with pressure oscillations in the expansion chamber 206 and pressure oscillations at a point 410 are anti-phase or 180 degrees out of phase with pressure oscillations in the compression chamber 204.

Temperature Dependence

As disclosed above, the transmission ducts 110 and 112 are configured to provide phase change between the compression chamber 204 and the expansion chamber 206. The phase change introduced by a duct, such as the ducts 110 and 112, is dependent on wavelength, which is given by:

$$\lambda = \frac{c}{f}, \quad \text{Eqn 3}$$

where f is the operating frequency of the thermoacoustic apparatus and c is the speed of sound within the ducts. The speed of sound c is given by:

$$c = \sqrt{\gamma R_m T}, \quad \text{Eqn 4}$$

-26-

where γ is the gas isentropic constant, R_m is the mass gas constant, and T is the temperature in degrees Kelvin. In operation of the thermoacoustic transducer apparatus the transmission ducts **110** and **112** will be close to ambient temperature, which may change over time causing the working gas in the ducts to have a corresponding change in temperature. The change of temperature of the working gas in the ducts **110** and **112** will cause a change in the speed of sound c within the ducts **110** and **112**, which in turn causes a change in the pressure phase shift that is imparted by the ducts. For a thermoacoustic transducer optimized for a specific operating phase change between the compression and expansion chambers **204** and **206**, a phase change due to an ambient temperature change of as little as 5°C may result in a significant reduction in output power and efficiency of the apparatus.

By substituting Eqn **4** into Eqn **3**, the wavelength as a function of working gas temperature T and frequency f may be written as:

$$\lambda = \frac{\sqrt{\gamma R_m T}}{f}, \quad \text{Eqn 5}$$

In the mechanical converter **200** shown in Figure **2**, the diaphragm **208** is coupled to the housing **202** via a mechanical spring **224**. Resilient displacement of the diaphragm **208** occurs at a resonant frequency that is dependent on an overall stiffness acting on the diaphragm. The overall stiffness acting on the diaphragm **208** includes a mechanical stiffness due to the resilient wall **210**, the stiffness of the mechanical spring **224**, and a gas stiffness due to working gas pressure amplitudes bearing on surfaces **216** and **218** of the diaphragm **208**.

In one embodiment, the respective lengths of the transmission ducts **110** and **112** are configured such that relative proportions of the gas stiffness and the mechanical spring stiffness in the overall stiffness cause the change in speed of sound with temperature to be at least partially offset by a corresponding change in the diaphragm resonant frequency. From Eqn **5** above it should be evident that if the diaphragm resonant frequency f increases with increasing temperature T , the effect of the temperature change on wavelength λ is at least partially offset such that the phase change between the pressure oscillations in the compression chamber **204** and the pressure oscillations in the expansion chamber **206** are at least partially compensated. In one embodiment, configuring the mechanical spring **224** to provide a mechanical stiffness contribution of at least half of the overall stiffness provides for compensation for changes in temperature over a relatively wide range of ambient temperatures.

-27-

Referring to Figure 5, a complex plane diagram including phasor representations of the oscillating pressures p_c and p_e acting on respective surfaces **218** and **216** of the diaphragm **208** is shown at **500**. The diagram **500** also includes phasor representations of the diaphragm displacement z and diaphragm velocity v . Since the pressure phasors p_c and p_e act on opposite sides of the diaphragm **208**, the net force on the diaphragm is equal to the diaphragm effective area multiplied by the vector difference of p_c and p_e , which is shown at a force phasor F in the diagram **500**. The angle $\Delta\Phi$ represents the pressure phase change through the acoustic power loop **118** between the compression and expansion chambers **204** and **206**, which in the diagram **500** is assumed to have been determined as an optimal operating phase change for efficient operation in one particular embodiment of the apparatus.

The projection of the force phasor F on the velocity v shown by the horizontal broken line **502** corresponds to the component of the force on the diaphragm **208** that produces output power, which is given by:

$$P_{out} = \frac{1}{2} \cdot \text{Re}[F \cdot \tilde{v}]. \quad \text{Eqn 6}$$

The phasor F thus needs to be located in upper half of the complex plane of the diagram **500** in order for the apparatus to produce output power. A projection of force phasor F on the real axis (Re) shown by the vertical the diaphragm motion shown by the vertical broken line **504** is negative, and thus corresponds to a gas stiffness component or gas spring component, which acts to oppose the motion of the diaphragm z . A positive force projection would instead correspond to a negative gas spring that may alternatively be understood to be an additional effective mass. A gas force contribution in the described embodiments may produce a positive, near zero, or negative gas stiffness. The gas stiffness works in parallel with the mechanical stiffness and determines the operating frequency of the apparatus. The operating frequency is given by:

$$f = \frac{1}{2\pi} \sqrt{\frac{k_m + k_g}{M}}, \quad \text{Eqn 7}$$

where k_m is the mechanical stiffness acting on the diaphragm **208** and k_g is the gas stiffness acting on the diaphragm. M is the overall mass associated with the diaphragm **208**, which may include the diaphragm mass and an external mass associated with the coupling to the external energy system **222**.

Following the pressure phasor from the compression chamber **204** to the expansion chamber **206** corresponds to rotating p_c clockwise onto p_e by approximately 285 degrees in the embodiment

-28-

shown, which corresponds to the phase change predominantly imparted by the transmission ducts **110** and **112**. However, as the temperature T in the transmission ducts **110** and **112** increases, the wavelength λ also increases and p_e would thus be rotated by a smaller angle relative to p_c and end up closer to the horizontal axis causing the resultant force phasor F to move closer to the horizontal axis. The gas stiffness contribution would thus increase, and from Eqn **7** above the frequency f would also increase. From Eqn **5**, increased frequency f reduces the wavelength λ thus tending to return the phase change toward the optimal operating phase change $\Delta\Phi$. Conversely, decreasing working gas temperature T within the ducts **110** and **112** cause the force phasor F to be rotated closer to the vertical axis, thus decreasing the gas stiffness contribution. The decreased gas stiffness contribution results in a decrease of the frequency f , which tends to counteract the temperature reduction. In order to keep the frequency f real and in a band around a desired operating frequency, the mechanical stiffness k_m must be substantially larger than the expected range of the gas stiffness k_g , which varies substantially with temperature.

In general, for a larger possible gas stiffness contribution to the overall stiffness acting on the diaphragm **208** a smaller net rotation of the force phasor F is required to counteract the effect of the temperature change and the closer the operating phase change would remain to the optimal operating phase change $\Delta\Phi$. However, the possible gas stiffness component of the overall stiffness is determined by the area of the diaphragm **208** and by the magnitudes of the pressure phasors p_c and p_e on either side of the diaphragm. Diaphragm area is generally determined in accordance with a desired power output for the apparatus while the pressure phasors p_c and p_e result from optimization of the apparatus to produce a desired efficiency and power output, thus constraining the possible gas stiffness component of overall stiffness acting on the diaphragm **208** to a range that by itself would not be sufficient to raise the engine operating frequency f to an optimum frequency. The mechanical stiffness provided by the additional mechanical spring **224** raises the frequency f into an optimum operating range.

Additionally, as disclosed above the gas stiffness represents a component of the overall stiffness that varies predominantly with frequency over a range of stiffness values. If the possible gas stiffness component of overall stiffness acting on the diaphragm **208** is too large, the overall stiffness would also be able to vary over a large range, which may facilitate operation of the thermoacoustic transducer apparatus at a low resonant frequency that is much lower than the intended resonant frequency or at a higher harmonic of the intended resonant frequency. For a weak mechanical stiffness k_m a negative gas stiffness contribution k_g may result in a negative total

-29-

stiffness, which would prevent operation of the thermoacoustic apparatus. Advantageously, configuration of the mechanical spring **224** to provide a mechanical stiffness component of at least about half of the overall stiffness acting on the diaphragm **208** reduces the range of values that the overall stiffness acting on the diaphragm **208** may assume thus preventing operation at unintended frequencies. Configuration of the mechanical spring **224** to provide sufficient stiffness thus ensures operation at a single well defined frequency. The well defined frequency also has a desired temperature dependence due to the presence of the gas stiffness component in the overall stiffness.

The resonant frequency of the diaphragm **208** is further dependent on an overall mass associated with the diaphragm including at least a mass of the resilient wall **210** of the diaphragm and an external mass associated with the coupling to the external energy system **222**. Advantageously, the use of a spring tube mechanical spring **224** permits the coupling to be disposed outside the housing **202** that contains the working gas.

As an example, for an apparatus configured as shown in Figure **1** – Figure **3**, it has been calculated that frequency would need to increase by about **1** Hz for each degree Celsius increase in temperature in the transmission ducts **110** and **112**. Accordingly, if it is desired to accommodate a wide temperature operating range of $\pm 50^\circ\text{C}$, the operating frequency would have to vary by about $\pm 10\%$, which may be achieved if the overall stiffness acting on the diaphragm **208** varies by about $\pm 20\%$. A maximum magnitude gas stiffness component $|k_{g,\text{max}}|$ at a limit of the temperature operating range having values that range between $0.2k_m \leq |k_{g,\text{max}}| < k_m$ relative to the mechanical stiffness component k_m would provide the necessary range of variation of about $\pm 20\%$.

Advantageously, configuration of the mechanical converter **200** to provide the required gas stiffness component occurs within the existing working volume of the apparatus and a selected pressure phase difference $\Delta\Phi$ across the diaphragm **208** and thus introduces no additional losses. In contrast, many prior art gas springs are implemented using an additional chamber volume having an associated increased relaxation loss at the walls of the added volume.

Referring to Figure **6**, a graph of calculated output power of the apparatus as a function of the working gas temperature T in the transmission ducts **110** and **112** is shown at **600**. A graph of calculated operating efficiency (expressed as a fraction of Carnot efficiency) as a function of the

-30-

working gas temperature T in the transmission ducts **110** and **112** is shown at **602**. The triangle symbols represent fixed operating frequency operation without implementation of the temperature compensation disclosed above, and show that the apparatus only produces useful operating power over a narrow range of temperatures. The circle symbols represent variable operating frequency operation in which the temperature compensation as disclosed above is implemented and shows useful operating power output over a significantly wider range of temperatures.

As noted above, the force phasor F must be located in upper half of the complex plane and for optimal operating efficiency of this particular embodiment would have a phasor angle α of about **135** degrees at about **60°C**. Accordingly, in the graph **602** the operating efficiency reduces more rapidly above **60°C** when the force phasor F approaches the horizontal axis and the projection of F onto the velocity v tends to zero, corresponding to an abrupt drop off of operating power generation.

Operating efficiency reduces more slowly below **60°C** when the force phasor F is almost vertical, corresponding to a maximum projection of F onto velocity v and thus maximum power out (although not at peak efficiency) and a very small or even negative gas stiffness contribution. Under these conditions, the gas stiffness contribution changes very rapidly with changing force phasor angle α , which corresponds to a region where the frequency compensation for working gas temperature changes is most effective. For a widest operating temperature range of this embodiment it would be advantageous to configure the transmission ducts **110** and **112** for a phase angle α that is less than **135** degrees, which would result in slightly reduced efficiency at the midpoint of the temperature operating range, but an overall wider temperature operating range.

Alternative mechanical converter

Referring to Figure **7**, a schematic cross sectional view of an alternative embodiment for implementing the mechanical converter **102** is shown generally at **700**. The embodiment of the mechanical converter **700** shown in Figure **7** generally corresponds to a beta-configuration Stirling transducer. The mechanical converter **700** includes a housing **702**, which encloses a compression chamber **704** and an expansion chamber **706**. The compression chamber **704** and expansion chamber **706** are separated by a displacer **708**, which acts to vary a volume of the chambers **704** and **706**. The displacer **708** comprises a resilient wall supported at a periphery **710** of the housing **702** and configured to facilitate displacement in a direction aligned with a central axis **712** of the mechanical converter **700**.

-31-

The mechanical converter **700** also includes a diaphragm **714** and the compression chamber **704** extends between the displacer **708** and the diaphragm **714**. In the embodiment shown, the diaphragm **714** also comprises a resilient wall supported at the periphery **710** of the housing **702**.

In the schematic view of Figure 7, the spacing between elements of the mechanical converter **700** has been increased for illustrative purposes. In practice, a longitudinal extent of the expansion and compression chambers **706** and **704** along the axis **712** may only be in the region of about 1 mm for example. Correspondingly, movements of the displacer **708** and diaphragm **714** would generally have a peak amplitude of about 200 μm .

The mechanical converter **700** further includes an input/output shaft **716**. In this embodiment the shaft **716** is coupled between the diaphragm **714** and an external energy system **718**. During operation, the diaphragm **714** undergoes periodic displacement for coupling energy between the mechanical converter **700** and the external energy system **718**.

In this embodiment the mechanical converter **700** also includes a mechanical spring with is configured as a cylindrical tube spring **722** coupled between the diaphragm **714** and the housing **702**. The tube spring **722** includes an outer cylindrical wall **724** and an inner cylindrical wall **726** joined by an annular wall **728** such that the cylindrical tube spring is folded back on itself. The outer cylindrical wall **724** is connected to the housing **702** and the inner cylindrical wall **726** is connected to the diaphragm **714**. The tube spring **722** is operable to elastically deform in a direction generally aligned with the axis **712** in response to forces imparted on the tube spring by the diaphragm **714**.

The mechanical converter **700** also includes a bounce chamber **730** for containing a pressurized gas volume bearing on an outer surface **732** of the diaphragm **714**. The bounce chamber is charged to a gas pressure of $p_B \approx p_m$, which at least partially balances forces acting on an inner surface **734** of the diaphragm **714** due to the static pressure p_m by providing a counter-force on the outer surface **732** of the diaphragm **714**. The bounce chamber **730** is defined between the housing **702**, the outer surface **732** of the diaphragm **714**, and the cylindrical tube spring **722**. In one embodiment a deliberate leak may be introduced between the bounce chamber **730** and the compression chamber **704** in the form of a narrow equalization conduit **736** such as a ruby pinhole. The equalization conduit **736** facilitates gaseous communication between the working gas in the

-32-

apparatus and the gas volume in the bounce chamber **730**. The equalization conduit **736** is sized to permit static pressure equalization between the working gas and the gas volume while being sufficiently narrow to prevent significant gaseous communication at time periods corresponding to an operating frequency of the transducer apparatus.

In the embodiment shown in Figure **7** where the diaphragm **714** comprises a resilient wall, the tube spring **722** may be configured such that restorative forces provided by the elastic deformation of the tube spring operate in conjunction with restorative forces due to the resilience of the diaphragm, loading of the diaphragm by the working gas and the bounce chamber **730**, and the loading due to the input/output shaft **716** to cause the diaphragm to have a desired natural frequency.

In this embodiment the input/output shaft **716** includes a hollow bore **720** for receiving a portion of the transmission duct **110**, which in this embodiment is located coaxial with the central axis **712** and extends through the bore and through the diaphragm **714** to provide for fluid communication between the compression chamber **704** and the transmission duct **112**. The transmission duct **110** when centrally located provides for a symmetric flow and symmetric acoustic path length between the compression chamber **704** and the transmission duct **112**.

In the embodiment shown the transmission duct **110** is connected to the diaphragm **714** and consequently must be configured to facilitate motion of the diaphragm during operation. In one embodiment the transmission duct **110** may include a compliant portion configured to undergo axial compression and extension. The compliant portion of the transmission duct **110** would thus provide an additional spring force acting on the diaphragm **714**, which should be taken into account in configuring the mechanical converter **700** for a desired natural frequency of the diaphragm. The mechanical converter **700** may also include a mechanical anchor **738** disposed at a location along the transmission duct **110**, thus permitting a portion of the transmission duct extending between the diaphragm **714** and the mechanical anchor to act as the compliant portion. Portions of the transmission duct **110** including a bend **740** that are disposed below the mechanical anchor in Figure **2** are constrained from moving and would thus not be subjected to periodic strains that may cause premature fatigue failure.

In other embodiments (not shown) gas flow may be directed via a manifold disposed proximate the periphery **710** of the compression chamber **704** to the transmission duct **110**. The manifold may

-33-

include multiple branches for symmetrically directing gas flow between the periphery **710** and the transmission duct **110**, thus causing acoustic path lengths associated with the flows to have a generally similar length leading to a consistent phase relationship during operation of the apparatus. Similarly, in the expansion chamber **706**, gas flow may also be directed via a manifold disposed proximate the periphery **710** of the chamber to the transmission duct **112** and the manifold may include multiple branches for symmetrically directing gas flow between the periphery **710** and the transmission duct **112**.

In operation, when the displacer **708** and diaphragm **714** move so as to produce pressure oscillations within the compression chamber **704**, the resulting compression and rarefaction in the working gas produces acoustic power which flows through the transmission duct **110** to the thermal converter **300** (shown in Figure 3), through the first port **324** and to the first plenum **308**. Referring to Figure 3, the thermal converter **300** operates to convert thermal energy Q_m provided from an external heat source into acoustic energy, thereby amplifying the acoustic power traveling through the first heat exchanger **302**, regenerator **304**, and second heat exchanger **306**. The amplified acoustic power leaving the thermal converter **300** through the thermal buffer **310** and the second port **326** propagates along the transmission duct **112** back to the mechanical converter **700**, where it is received in the expansion chamber **706**. Pressure oscillations due to the amplified acoustic power in the expansion chamber **706** are operable to cause movement of the displacer **708**, thereby transferring almost all the acoustic power back to the compression chamber **704**. Pressure oscillations in the compression chamber **704** also cause the diaphragm **714** and the input/output shaft **716** to be displaced. A phase of the mechanical motion of the displacer **708** relative to a phase of the pressure oscillation in the compression chamber **704** is such that acoustic power is delivered to the working gas in the compression chamber by the displacer **708**, while the phase of the mechanical motion of the diaphragm **714** is such that it removes acoustic power from the gas in the compression chamber. The process described above operates at a natural frequency associated with the apparatus **100**, thus causing periodic motion of the input/output shaft **716**. Motion of the input/output shaft **716** may be coupled to an external energy system **718** for extracting mechanical energy from the apparatus. The amplification of acoustic power thus provides sufficient power for sustaining periodic movement of the displacer **708** and diaphragm **714**, while also providing useful output power at the diaphragm **714** for driving the input/output shaft **716**.

-34-

Alternative embodiments

A schematic cross sectional view of a further embodiment for implementing the mechanical converter **102** is shown generally at **800** in Figure 8. Referring to Figure 8, the mechanical converter **800** includes a compression chamber **806** having a diaphragm **808** coupled to a shaft **810**. The mechanical converter **800** also includes an expansion chamber **812** having a diaphragm **814** coupled to the shaft **810**. The compression chamber **806** and expansion chamber **812** each have respective bounce chambers **816** and **818**, and cylindrical tube springs **820** and **822**, generally implemented as described above in connection with the embodiment shown in Figure 2. The mechanical converter **800** also includes an external energy system **824**. The compression chamber **806** and expansion chamber **812** each have respective chamber walls **826** and **828**, and the embodiment shown further includes a housing **830**. The housing **830** extends between the respective chamber walls for supporting the compression and expansion chambers in spaced apart relation and also encloses the external energy system **824**.

The compression chamber **806** is in fluid communication with the transmission duct **110** and the expansion chamber **812** is in fluid communication with the transmission duct **112**. The transmission ducts **110** and **112** are shown in Figure 1. The shaft **810** extends between the compression chamber diaphragm **808** and the expansion chamber diaphragm **814** and provides a direct mechanical coupling for coupling energy between the respective diaphragms. The shaft **810** thus causes operating displacements of the expansion chamber diaphragm **814** to lead the compression chamber diaphragm **808** by a phase angle of **180** degrees.

Another embodiment of a thermoacoustic transducer apparatus is shown in Figure 9 at **900**. In the embodiment shown in Figure 2, the transmission duct **110** is in fluid communication with the compression chamber **204** at a close to central location, thus causing generally symmetric gas flow within the compression chamber. Referring to Figure 9, the apparatus **900** includes a mechanical converter **902** and a thermal converter **904**. The apparatus **900** also includes a transmission duct **908**, which provides fluid communication between a compression chamber **914** of the mechanical converter **902** and the thermal converter **904**. The transmission duct **908** includes a plurality of duct lengths (of which two duct lengths **910** and **912** are shown) disposed to provide parallel fluid communication between the compression chamber **912** and the thermal converter **904**. The duct lengths **910** and **912** are fluidly coupled at peripheral locations to the compression chamber **914**, to promote generally more symmetrical gas flow within the compression chamber thus causing acoustic path lengths associated with the flows to have a generally similar length leading to a

-35-

consistent phase relationship during periodic flow of the working gas. The apparatus **900** also includes a transmission duct **906** extending between the mechanical converter and the thermal converter

The acoustic impedance of a transmission duct is inversely proportional to cross-section area, but in the embodiment shown in Figure **9** is split among parallel transmission ducts **910** and **912**. Using multiple ducts to implement the transmission duct **908** increases the duct wall area and thus increases the relaxation loss on the walls and the viscous shear loss along the walls. However geometrical constraints may make it more desirable to couple flow between the mechanical converter **902** at the edges of the compression chamber **914** rather than from a single central port, in which case multiple transmission ducts **910** and **912** result in a more symmetrical flow in the mechanical converter **902**, maintain more uniform flow phase differences, and avoid large local losses due to flow crowding.

Referring to Figure **10**, a further embodiment of the apparatus of Figure **1** is shown at **1000**. The apparatus **1000** includes a first mechanical converter **1002**, a second mechanical converter **1004**, and a single thermal converter **1006**. The first mechanical converter **1002** is in fluid communication with the thermal converter **1006** through a transmission duct **1008** and the second mechanical converter **1004** is in fluid communication with the thermal converter **1006** through a transmission duct **1010**. The apparatus **1000** also includes a common transmission duct **1012** in fluid communication with the thermal converter **1006**, a transmission duct **1014** between the first mechanical converter **1002** and the common transmission duct **1012**, and a transmission duct **1016** between the second mechanical converter **1004** and the common transmission duct. The transmission duct **1016** and transmission duct **1014** feed into the common transmission duct **1012** through a wye joint **1018** that provides a smooth transition that minimizes local losses. Additionally the wye joint **1018** may be located at a low volumetric flow locations in order to further minimize local losses. Advantageously, the apparatus **1000** facilitates use of a single thermal converter **1006** with two mechanical converters **1002** and **1004**. In other embodiment more than two mechanical converters may be configured in fluid communication with the single thermal converter **1006**. The thermal converter **300** is required to operate at high temperatures and therefore may include expensive materials that increase the cost of this component.

-36-

In the embodiments shown in Figure 9 and Figure 10 the mechanical converters 902, 1002 and 1004 may be implemented using either the mechanical converter 200 shown in Figure 2 or the mechanical converter 700 shown in Figure 7 or the mechanical converter 800 shown in Figure 8.

Acoustic operating noise

During operation of the mechanical converter 200 shown in Figure 2 as a heat engine, movements of the diaphragm 208 in one direction along the axis 214 will impart a housing 202 motion in an opposite direction. Similarly, for the mechanical converter 700 shown in Figure 7, movements of the displacer 708 and diaphragm 714 along the axis 712 will impart unbalanced forces on the housing 702. The forces imparted on the housing 202 or 702 will generally cause the housing to vibrate at the operating frequency of the apparatus 100, thus generating acoustic noise in the form of a single frequency tone at the operating frequency (for example at about 500 Hz). In some embodiments a sound power associated with the generated noise may be in the region of 100 dBm, which may prohibit operation in some noise sensitive environments such as residential housing, for example.

Referring to Figure 11, a thermoacoustic apparatus in accordance with another embodiment of the invention is shown generally at 1100. The apparatus 1100 includes a first mechanical converter 1102 and a second mechanical converter 1104. The mechanical converters 1102 and 1104 are each configured generally as disclosed above in connection with the mechanical converter 200. The apparatus 1100 also includes a thermal converter 1106. The first mechanical converter 1102 includes an expansion chamber 1108 in fluid communication with the thermal converter 1106 through a transmission duct 1110 and a transmission duct 1112. The second mechanical converter 1104 includes an expansion chamber 1114 in fluid communication with the thermal converter 1106 through a transmission duct 1116 and the transmission duct 1112. The transmission duct 1112 thus provides a common duct for gas flow associated with both expansion chambers 1108 and 1114 of the respective first and second mechanical converters 1102 and 1104. The cross-sectional area of the transmission duct 1112 is generally larger than the transmission ducts 1110 and 1116 to accommodate flow of greater acoustic power through this common duct length. The first mechanical converter 1102 also includes a compression chamber 1118 in fluid communication with the thermal converter 1106 through a transmission duct 1120 and a transmission duct 1122 and the second mechanical converter 1104 includes a compression chamber 1124 in fluid communication with the thermal converter through a transmission duct 1126 and the transmission duct 1122.

-37-

The use of the first mechanical converter **1102** and second mechanical converter **1104** configured as shown in Figure **10** provides motion cancellation for reducing acoustic noise. Since both mechanical converters **1102** and **1104** are driven from the same thermal converter, frequency matched operation is guaranteed and phase matched operation is achievable provided the transmission ducts **1110** and **1116**, **1120** and **1126** are of equal length. In operation of the apparatus **1100**, the first mechanical converter **1102** and second mechanical converter **1104** may have slight operating differences due variations in manufacturing and assembly, which may cause the mechanical converters to have slightly different amplitudes or phases of motion resulting in incomplete cancellation of forces. In one embodiment, the motion of the first and second mechanical converters **1102** and **1104** may be balanced to account for such minor differences by adjusting the length of one or more of the transmission ducts **1110**, **1116**, **1120**, and/or **1126**, for example. The motion of the diaphragms of the mechanical converters **1102** and **1104** are responsive to small changes in transmission duct length, which may thus be used to balance the motions of the mechanical converters. In addition to or as an alternative to changing a physical length of the transmission ducts **1110**, **1116**, **1120**, and/or **1126**, small changes in acoustic path length may also be achieved by changing a cross-sectional profile of the respective ducts. Changes in cross-sectional profile may be used to make a small one-time adjustment to acoustic path length by, for example, swaging a portion of duct to a smaller cross-section duct using an external compression tool. Other small adjustments to the mechanical resonators in the system formed by the diaphragm, attached springs, and masses or by adjustments in the electrical systems attached to each of the mechanical resonators may also be used to achieve balanced operation.

While balancing of mechanical converters and external energy systems in accordance with the embodiment of Figure **11** may substantially eliminate housing vibration, other sources of acoustic noise generation such as oscillation of the walls of pressurized volumes that are subject to the working gas pressure oscillations may still generate noise having significant audible level. For example, a **2m** length of transmission duct (about **1** wavelength in helium at **500 Hz**) would emit about **90 dBm** of sound power due to expansion and contraction of the duct walls in response to pressure oscillations. While the wall thickness would generally be sufficiently thick to reduce hoop stress to a safe level as prescribed for pressure vessels, thus providing sufficient wall strength for withstanding the working pressure and pressure oscillations, it would not be practical to eliminate noise generation by thickening the walls alone.

-38-

In Figure **11** the transmission ducts **1120** and **1126** and the transmission duct **1112** have inner walls that are each enclosed by respective outer walls **1130**, **1132**, and **1134**, which are spaced apart from the transmission ducts to define isolating volumes **1136** and **1138** surrounding the respective transmission ducts. The transmission ducts **1120** and **1126** and **1112** are configured to withstand the full working pressure $p_m \pm |\rho|$. The volumes **1136** and **1138** are charged to a pressure p_a corresponding to an atmospheric pressure of the surrounding environment. Acoustic noise produced by periodic movement of walls of the transmission ducts **1120**, **1126** and **1112** due to the working pressure oscillations would generate significant sound level. However a resulting oscillating pressure within the volumes **1136** and **1138** at the mean pressure p_a is very small. Furthermore, there is no substantial pressure differential between the volumes **1136** and **1138** and the environment and thus the outer walls **1130**, **1132**, and **1134** do not require any significant mechanical stiffness on the scale of what is required for the inner wall and would not experience any appreciable periodic movement resulting in very low external noise level. In one embodiment, the outer walls **1130**, **1132**, and **1134** may be fabricated from a plastic material, for example.

Referring to Figure **12**, a thermoacoustic apparatus in accordance with another embodiment of the invention is shown generally at **1200**. The apparatus **1200** includes a first mechanical converter **1202** and a second mechanical converter **1204**. The apparatus **1100** also includes a thermal converter **1206**. Each of the first and second mechanical converters has a respective diaphragm **1208** and **1210**, which define a common expansion chamber **1212** extending between the diaphragms. In this embodiment, the apparatus **1200** further includes a manifold **1214** disposed at a periphery of the common expansion chamber **1212** and operable to provide fluid communication between the common expansion chamber and thermal converter **1206** through one or more transmission ducts. In this embodiment two transmission ducts **1216** and **1218** are shown, but in general the apparatus **1200** may include a plurality of transmission ducts symmetrically disposed in communication with the manifold **1214**.

While in the embodiment shown in Figure **12**, the apparatus **1200** is configured having a common expansion chamber **1212**, in other embodiments the apparatus may be configured to have a common compression chamber.

Multiple thermal converters

Referring to Figure 13, a thermoacoustic apparatus in accordance with another embodiment of the invention is shown generally at 1300. The apparatus 1300 includes a mechanical converter 1302, a first thermal converter 1304, and a second thermal converter 1306. In one embodiment the mechanical converter 1302 may have a beta-configuration such as that shown in Figure 7, while in other embodiments the mechanical converter may have an alpha-configuration such as that shown in Figure 2. The mechanical converter may also comprise multiple mechanical converters in parallel as in the balanced embodiment of Figure 11. The mechanical converter 1302 is in fluid communication with the first thermal converter 1304 through a transmission duct 1308 and with the second thermal converter 1306 through a transmission duct 1310. The first thermal converter 1304 is in fluid communication with the second thermal converter 1306 through a transmission duct 1312.

The first thermal converter 1304 is configured to receive thermal energy from a first external source 1314 while the second thermal converter 1306 is configured to receive thermal energy from a second external source 1316. In one embodiment the first and second external sources of thermal energy 1314 and 1316 are provided by combustion of a fuel gas, such as biogas for example, where the first external source 1314 may comprise a high temperature portion of heat generated by the gas combustion, while the second external source 1316 may comprise a low temperature portion of heat produced during the gas combustion. Accordingly the first thermal converter 1304 would be configured for high temperature operation while the second thermal converter 1306 would be configured for lower temperature operation. The combined effect of the first and second thermal converters 1304 and 1306 would result in a greater portion of available thermal energy from the gas combustion being used by the apparatus 1300

The embodiment of Figure 13 where two or more thermal converters operate at different temperatures is advantageous for efficient extraction of heat from combustion exhaust in a waste heat application. In general, significant heat cannot be extracted from a gas stream without dropping the temperature of the stream significantly. In embodiments that include only a single thermal converter, a choice must be made between operating at high temperature with high thermal converter efficiency while allowing most of the heat to exit un-recovered or operating at a low temperature and lower thermal conversion efficiency while capturing more of the available heat in the stream. In embodiments that include multiple thermal converters, portions of heat may be

-40-

captured at a cascade of decreasing temperatures and more optimally converted while at the same time capturing a greater fraction of the available heat in the stream.

The embodiment of Figure 13 also provides an alternate method of capturing more available heat of from combustion of a fuel such as a gas or liquid fuel, for example when the heat input to the thermal converter is a dedicated burner. Traditionally, in order to operate at high temperature with a high efficiency thermal converter, combustion air must be preheated by using an exhausted stream in a counter flow recuperator that transfers a majority of the remaining heat in the exhaust stream to the incoming combustion air. Omitting the recuperator would generally result in an inefficient combustion system, as substantial remaining heat in the exhaust stream (given the high operating temperature of the thermal converter) would be wasted. One problem with implementing a recuperator is the need for large areas of costly high temperature materials, which may be subject to oxidization and hot corrosion. Pre-heating of the combustion air also results in higher combustion temperatures leading to exponentially greater nitrogen oxide (NO_x) production. Advantageously, the embodiment of Figure 13 may be used to implement a system in which efficiencies remain high without preheating combustion air to high temperature, since instead of a recuperator the first high temperature thermal converter may be followed with one or more lower temperature thermal converters thereby capturing more of the heat without compromising the efficiency of the highest temperature stage.

In one embodiment the length of the transmission duct 1312, may be selected such that the acoustic path length corresponds to a whole number of wavelengths at the operating frequency. For example, if the transmission duct 1308 has a length corresponding to about one wavelength at the operating frequency, the first and second thermal converters 1304 and 1306 would each be located such that a flow velocity amplitude of the working gas is near a minimum through the thermal converter. The overall length of the transmission duct made up by the transmission duct 1308, second transmission duct 1310, and transmission duct 1312, would thus be approaching two-wavelengths at the operating frequency.

In other embodiments additional thermal converters may be added. For example three thermal converters in series may be in fluid communication through transmission duct lengths having an acoustic path of about a half wavelength each for an overall transmission duct length between the first and last thermal converters of one-wavelength at the operating frequency. Each thermal converter would be located at a point of minimum flow velocity amplitude of the working gas.

-41-

The embodiments disclosed above by including transmission ducts provide several advantages and also provide some flexibility in configuration of the apparatus **100** shown in Figure 1. For example, the transmission ducts may be configured to place components that operate at high temperatures within the thermal converter, while the mechanical converter operates at a significantly reduced temperature. This has the advantage of facilitating additional flexibility in the selection of materials for the mechanical converter, since the materials are not required to withstand high operating temperatures. Additionally, transmission ducts may be branched or paralleled so that lengths of transmission duct may be used to facilitate configuration of multiple mechanical converters for operation with a single shared thermal converter. This facilitates configuration of the mechanical converters as shown in Figure 11 for reducing acoustic noise generation by the apparatus. Operation of one or more mechanical converters with multiple thermal converters in parallel or series (Fig. 13) is also enabled by the embodiment shown. The transmission ducts also provide a convenient means for tuning the mechanical converters for optimal operation by varying an acoustic path length of the transmission duct or a portion thereof.

The embodiments disclosed above, by including transmission ducts permit the mechanical converter to operate at near ambient temperature. This provides advantages over mechanical converters closely coupled to thermal converters as in traditional Stirling engines or refrigerators that operate at high or low temperatures, which may require significant thermal insulation. Thermal insulation generally increases an overall size of the transducer apparatus. Furthermore, while the transmission ducts introduce some additional losses, configuration of the transducer apparatus in accordance with embodiments of the invention disclosed herein may offset the additional losses and in some embodiments provide increased power density. Increased power density would allow the apparatus to have a reduced size for the same power output. For example, a mechanical converter configured to include a diaphragm having a diameter of about **140** mm may be capable of generating an output power of about **3** kW.

While specific embodiments of the invention have been described and illustrated, such embodiments should be considered illustrative of the invention only and not as limiting the invention as construed in accordance with the accompanying claims.

-42-

What is claimed is:**1.** A thermoacoustic transducer apparatus comprising:

a mechanical converter operable to provide power conversion between acoustic power and mechanical power, the mechanical converter including at least one diaphragm defining a compression chamber and an expansion chamber within the mechanical converter, the at least one diaphragm having a diaphragm surface area;

a thermal converter including a flow passage having a regenerator portion thermally coupled to provide power conversion between acoustic power and thermal power, the regenerator portion having a regenerator flow area;

the mechanical converter being in fluid communication with the flow passage of the thermal converter through transmission ducts extending between the compression chamber and the flow passage and between the expansion chamber and the flow passage respectively, the transmission ducts completing an acoustic power loop through the flow passage between the compression chamber and the expansion chamber, the acoustic power loop having a working volume for containing a working gas and being operable to facilitate acoustic power flow between the compression chamber and the expansion chamber;

wherein a cross-sectional area of the transmission ducts is less than the regenerator flow area and the regenerator flow area is less than the diaphragm surface area; and

wherein the at least one diaphragm is operable to undergo resilient displacement to cause pressure oscillations within the working volume and wherein the acoustic power loop is configured to cause at least one location along the acoustic power loop to have pressure oscillations that have an anti-phase relation to pressure oscillations in the mechanical converter.

2. The apparatus of claim 1 wherein the flow passage of the thermal converter comprises a plurality of the regenerator portions configured for parallel flow and wherein the regenerator

-43-

flow area comprises an overall area associated with the plurality of the regenerator portions.

3. The apparatus of claim 1 wherein the mechanical converter comprises a plurality of mechanical converters configured in parallel and wherein the diaphragm surface area comprises an overall diaphragm surface area associated with the plurality of mechanical converters.
4. The apparatus of claim 1 wherein the cross-sectional area of the transmission ducts is at least about **10** times less than the diaphragm surface area.
5. The apparatus of claim 4 wherein the wherein the transmission duct between the compression chamber and the flow passage has a first cross-sectional area and wherein the transmission duct between the expansion chamber and the flow passage has a second cross-sectional area and wherein the first cross-sectional area is less than the second cross-sectional area.
6. The apparatus of claim 1 wherein the transmission ducts have respective lengths that are selected to cause a phase change of about **360** degrees between pressure oscillations in the compression chamber and pressure oscillations in the expansion chamber.
7. The apparatus of claim 1 wherein the transmission ducts have respective lengths that are selected to cause:
 - an initial phase change of about **360** degrees between pressure oscillations in the compression chamber and pressure oscillations in the expansion chamber; and
 - at least one additional **360** degree phase change between pressure oscillations in the compression chamber and pressure oscillations in the expansion chamber such that an overall phase change through the acoustic power loop has the same effect as the initial phase change.
8. The apparatus of claim 1 wherein the apparatus further comprises a mechanical spring coupled to the at least one diaphragm and wherein the resilient displacement occurs at a

-44-

resonant frequency that is in part dependent on an overall stiffness acting on the at least one diaphragm, the overall stiffness including at least a diaphragm stiffness, a gas stiffness due to working gas bearing on the at least one diaphragm, and the mechanical spring stiffness, and wherein a contribution to the overall stiffness associated with the mechanical spring stiffness comprises at least half of the overall stiffness.

9. The apparatus of claim 8 wherein a change in temperature in the transmission ducts results in a change of speed of sound associated with acoustic power flow within the acoustic power loop and wherein the respective lengths of the transmission ducts are configured such that relative proportions of the gas stiffness and the mechanical spring stiffness in the overall stiffness cause the change in speed of sound to be at least partially offset by a corresponding change in the resonant frequency such that the phase change between the pressure oscillations in the compression chamber and the pressure oscillations in the expansion chamber due to the change in the speed of sound is at least partially compensated.
10. The apparatus of claim 8 wherein the mechanical converter is housed within a pressure vessel and wherein the at least one diaphragm is coupled to an external energy system for transfer of mechanical power between the external energy system and the at least one diaphragm, the external energy system being disposed outside of the pressure vessel, and wherein the resonant frequency is further dependent on an overall mass including at least a diaphragm mass and an external mass associated with the coupling to the external energy system, and wherein the external mass is greater than the diaphragm mass.
11. The apparatus of claim 10 wherein the external energy system comprises one of:
 - an electric generator; and
 - a prime mover.
12. The apparatus of claim 8 wherein the mechanical spring comprises a resilient wall portion coupled between the at least one diaphragm and a chamber wall of one of one of the compression chamber and the expansion chamber, the resilient wall portion being operable

-45-

to provide a seal for containing working gas within the chamber while facilitating the resilient displacement of the at least one diaphragm.

13. The apparatus of claim 12 wherein the resilient wall portion comprises a cylindrical tube extending between the at least one diaphragm and the chamber wall, the tube being configured to elastically deform in a direction generally aligned with a cylindrical axis of the tube.
14. The apparatus of claim 13 wherein the cylindrical tube comprises a first cylindrical tube portion coupled to the at least one diaphragm and a second cylindrical tube portion coupled to the chamber wall, the first and second cylindrical tube portions being coaxially disposed and coupled together to form a folded cylindrical tube.
15. The apparatus of claim 1 wherein an extent of at least one of the compression chamber and the expansion chamber is selected to provide a desired acoustic impedance for facilitating acoustic coupling between the chamber and the respective transmission duct.
16. The apparatus of claim 1 wherein the mechanical converter is configured to cause a volumetric flow between the compression chamber and the transmission duct extending between the compression chamber and the flow passage that differs from a volumetric flow between the expansion chamber and the transmission duct extending between the expansion chamber and the flow passage.
17. The apparatus of claim 1 wherein the compression chamber and the expansion chamber are configured to direct gas flows within the respective chambers in a direction generally parallel to a surface of the at least one diaphragm.
18. The apparatus of claim 1 wherein the at least one diaphragm has a thickness profile across the diaphragm that is selected to cause stress concentrations in the diaphragm to be reduced.
19. The apparatus of claim 1 wherein a static pressure associated with the working gas is at least about **80 Bar**.

-46-

- 20.** The apparatus of claim 1 wherein an operating frequency associated with the periodic flow of the working gas is at least about **300** Hertz.
- 21.** The apparatus of claim 1 wherein at least a portion of at least one of the transmission ducts comprises a plurality of ducts disposed to provide parallel fluid communication between the respective chamber and the flow passage of the thermal converter.
- 22.** The apparatus of claim 1 wherein the flow passage of the thermal converter further comprises a first heat exchanger portion in thermal communication with one of:
- an external thermal energy source for receiving thermal energy and transferring the thermal energy to working gas flowing through the flow passage; and
 - an external thermal energy sink for transferring thermal energy from the working gas flowing through the flow passage to the external thermal energy sink.
- 23.** The apparatus of claim 1 wherein the thermal converter comprises a thermal buffer for reducing heat transfer between the thermal converter and the mechanical converter, the thermal buffer being in fluid communication between the flow passage and the transmission duct extending between the expansion chamber and the flow passage.
- 24.** The apparatus of claim 1 wherein during acoustic power flow between the compression chamber and the expansion chamber a standing wave component and a traveling wave component are established within the acoustic power loop and wherein the cross-sectional areas of transmission ducts are selected to cause the relative magnitudes of the standing wave component and traveling wave component to be apportioned to minimize overall losses in the apparatus.
- 25.** The apparatus of claim 1 wherein the thermal converter is disposed within a housing charged to a gas pressure approximately equivalent to a mean working pressure of the working gas.
- 26.** The apparatus of claim 1 wherein the mechanical converter comprises a first mechanical converter and further comprising:

-47-

a second mechanical converter having at least one diaphragm defining a compression chamber and an expansion chamber within the second mechanical converter, the second mechanical converter being in fluid communication with the flow passage of the thermal converter through transmission ducts extending between the compression chamber of the second mechanical converter and the flow passage and between the expansion chamber of the second mechanical converter and the flow passage respectively, the transmission ducts completing a second acoustic power loop through the flow passage between the compression chamber and the expansion chamber of the second mechanical converter.

- 27.** The apparatus of claim 26 wherein the first and second mechanical converters are configured such that one of:
- a) the expansion chamber of the first mechanical converter and the expansion chamber of the second mechanical converter comprise a common expansion chamber extending between the at least one diaphragm of the first mechanical converter and the at least one diaphragm of the second mechanical converter; and
 - b) the compression chamber of the first mechanical converter and the compression chamber of the second mechanical converter comprise a common compression chamber extending between the at least one diaphragm of the first mechanical converter and the at least one diaphragm of the second mechanical converter.
- 28.** The apparatus of claim 26 wherein at least a portion of at least one of the transmission ducts comprises a plurality of ducts disposed to provide parallel fluid communication between the flow passage of the thermal converter and the respective chambers.
- 29.** The apparatus of claim 26 wherein at least one of the transmission ducts comprises a common portion providing fluid communication between the respective chambers and the flow passage of the thermal converter.

-48-

30. The apparatus of claim 26 wherein resilient displacement of the at least one diaphragm associated with the first mechanical converter generates periodic forces directed along a first axis and resilient displacement of the at least one diaphragm associated with the second mechanical converter generates periodic forces directed along a second axis and wherein the first and second mechanical converters are disposed such that the first axis and second axis are generally oriented to cause the respective periodic forces to substantially cancel each other.
31. The apparatus of claim 30 wherein the first axis and second axis are generally coaxially aligned.
32. The apparatus of claim 1 wherein the at least one diaphragm comprises a compression chamber diaphragm and an expansion chamber diaphragm, the respective compression chamber and expansion chamber diaphragms being mechanically coupled to move substantially in unison to act as the diaphragm of the mechanical converter.
33. The apparatus of claim 1 wherein at least one of the transmission ducts comprises an inner wall that flexes in response to the pressure oscillations within the acoustic power loop and further comprising an outer wall disposed about the inner wall and defining a isolating volume between the inner and outer wall, the isolating volume being charged to a lower static pressure than the working gas pressure and being operable to attenuate sound/vibration generated by the flexing of the inner wall.
34. The apparatus of claim 1 wherein the thermal converter comprises at least a first thermal converter and a second thermal converter each having an associated flow passage and further comprising a transmission duct extending between the respective flow passages of the first and second thermal converters and forming part of the acoustic power loop.

1/9

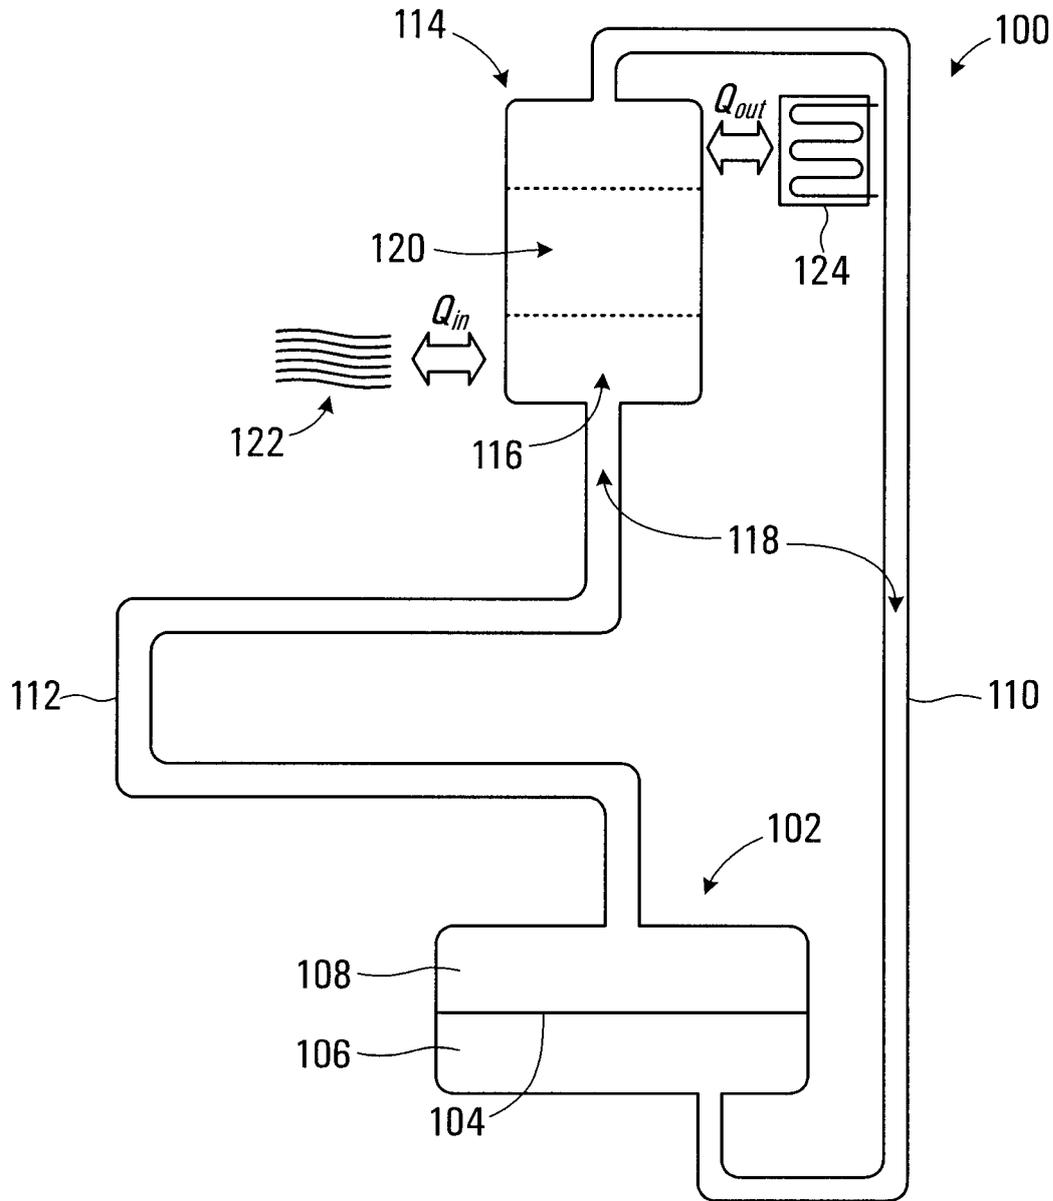


FIG. 1

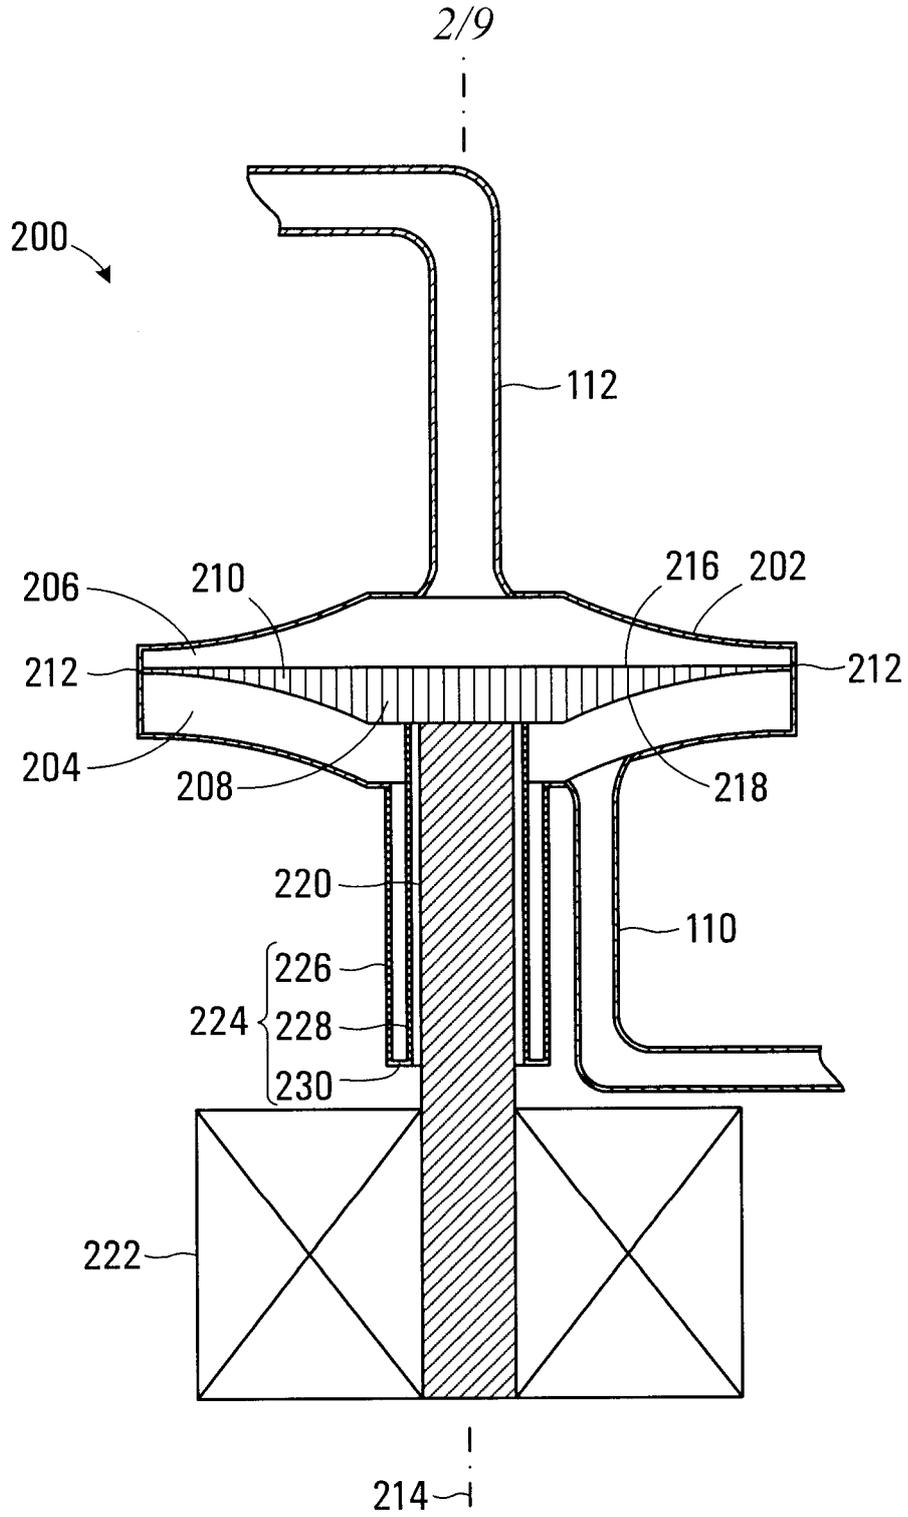


FIG. 2

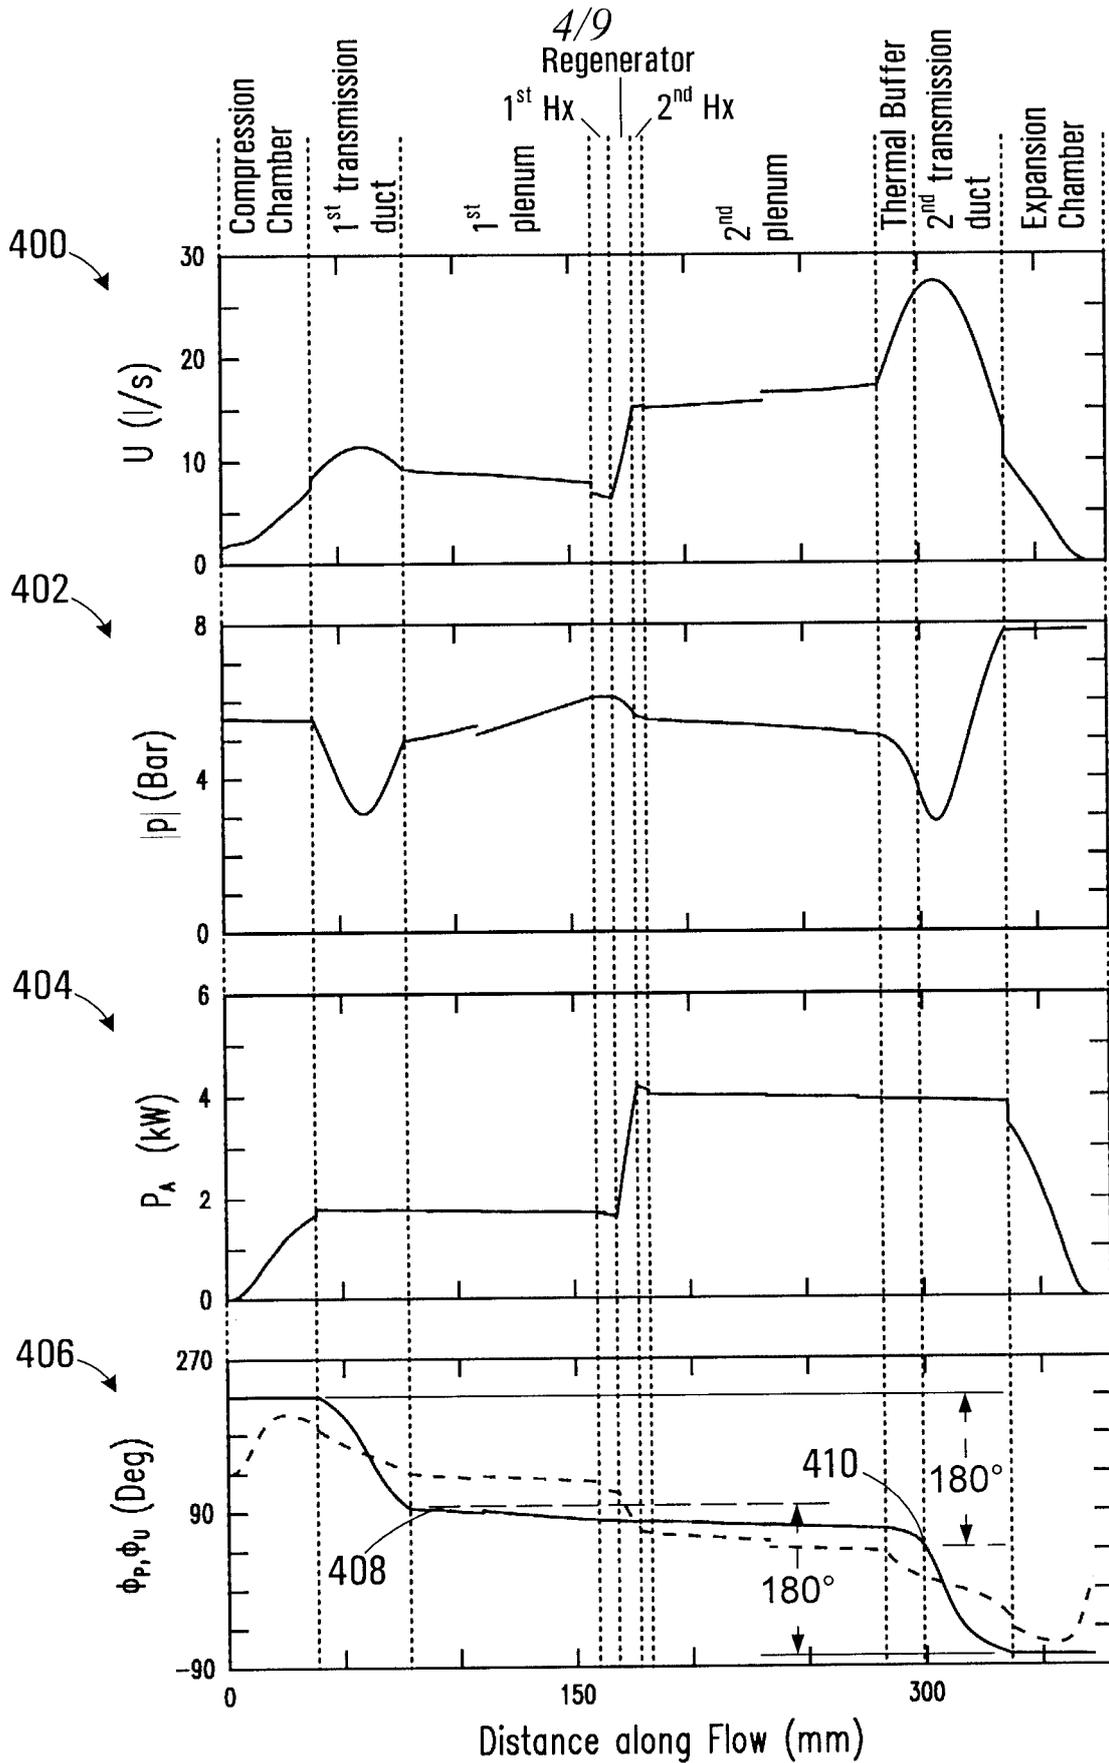


FIG. 4

+

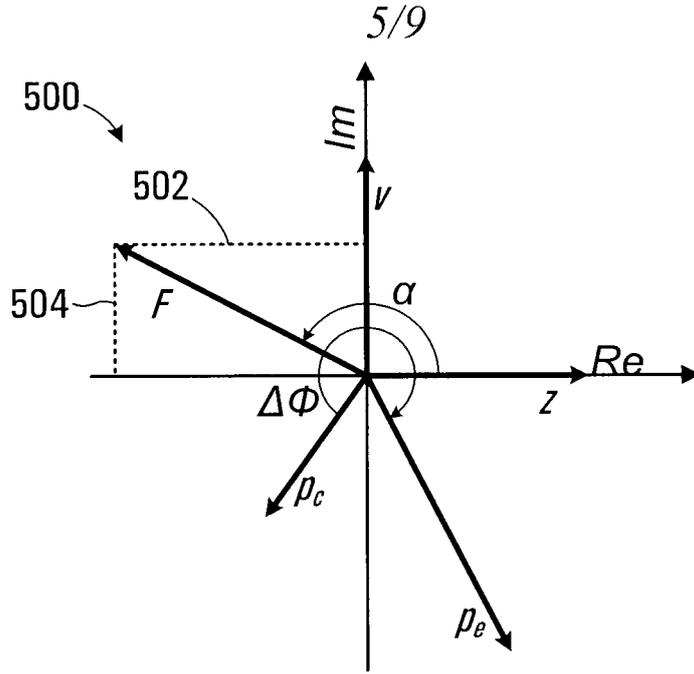


FIG. 5

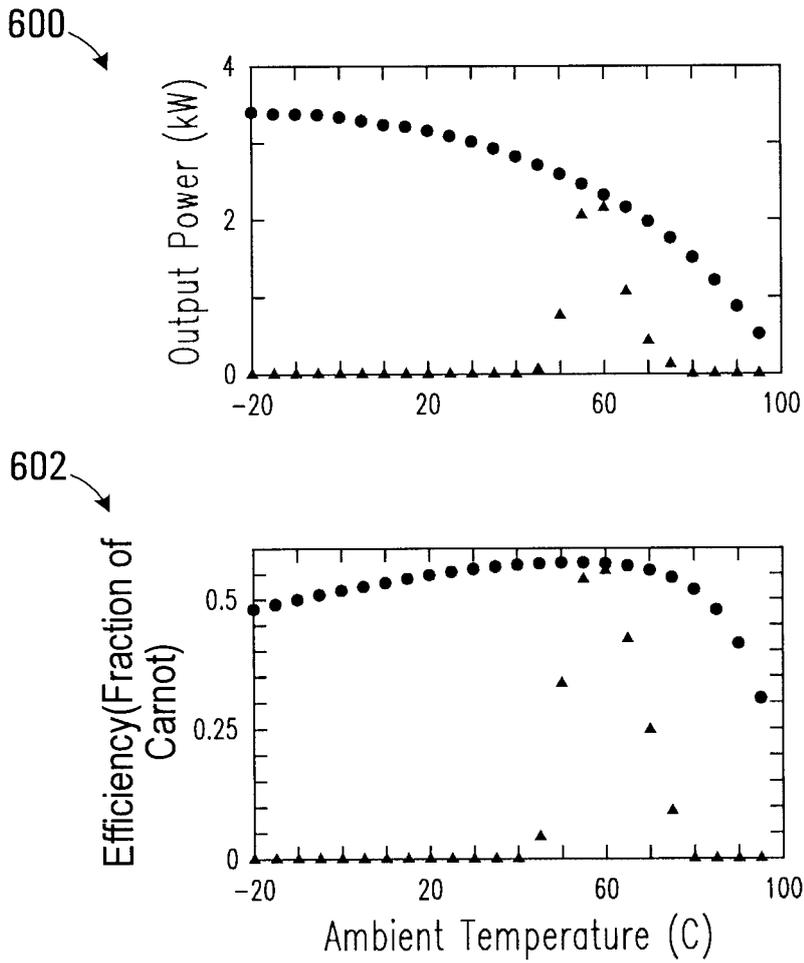


FIG. 6

+

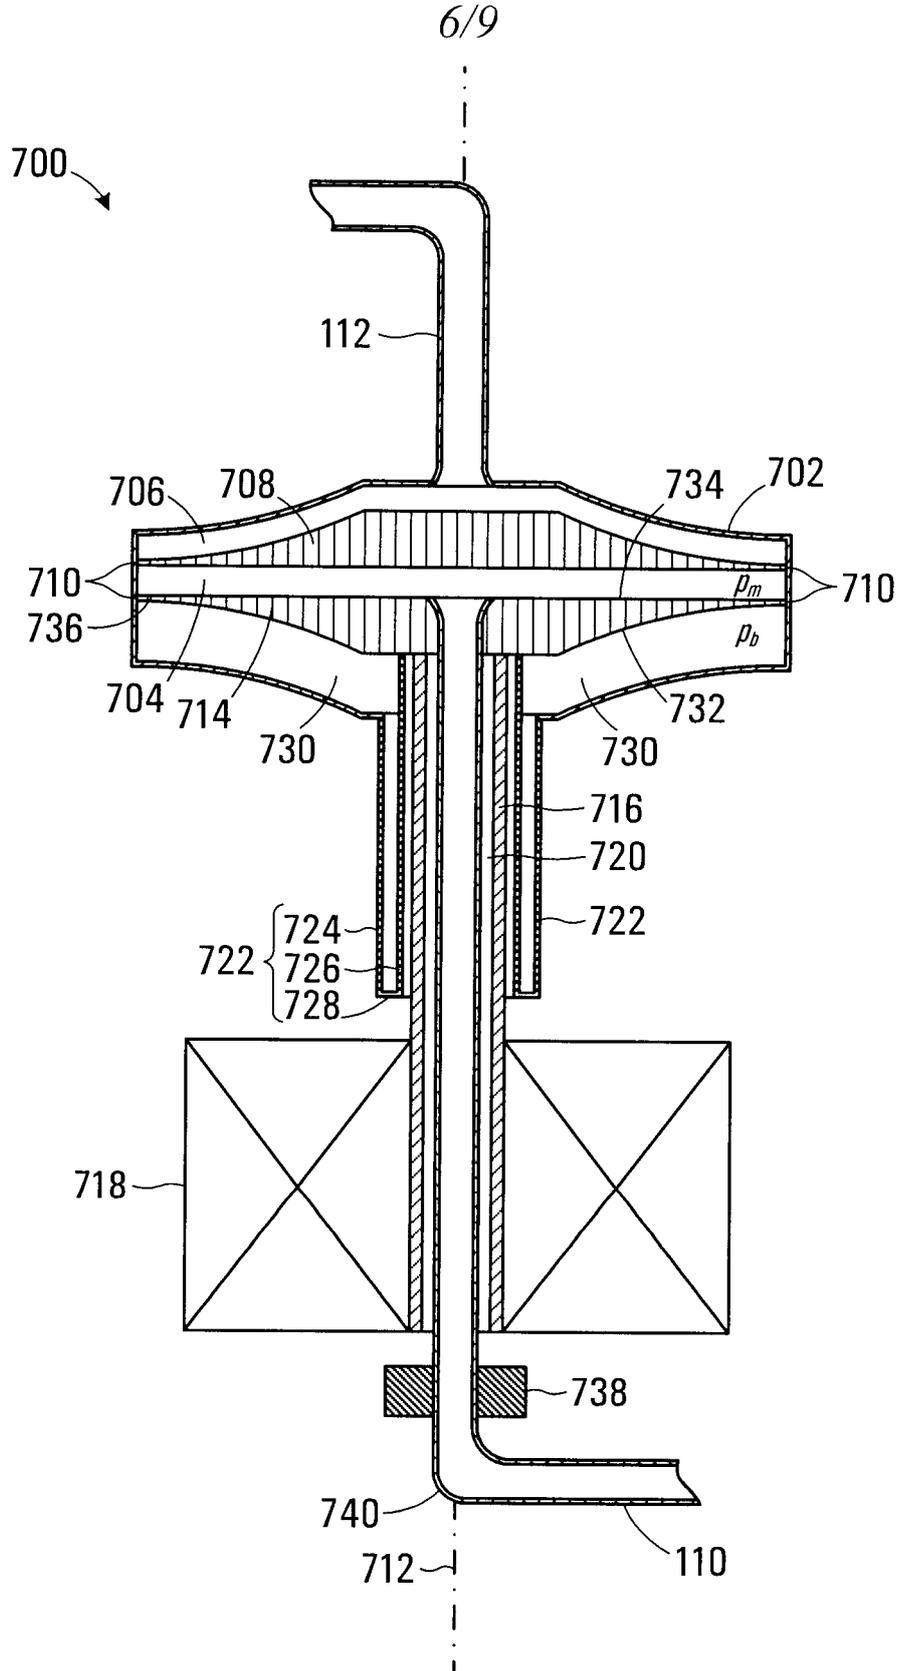


FIG. 7

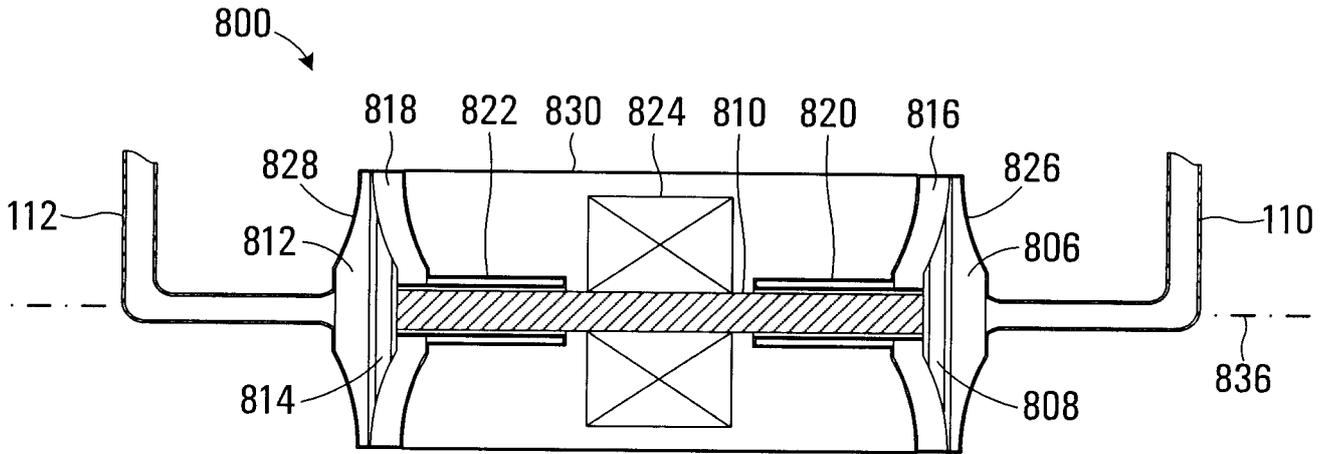


FIG. 8

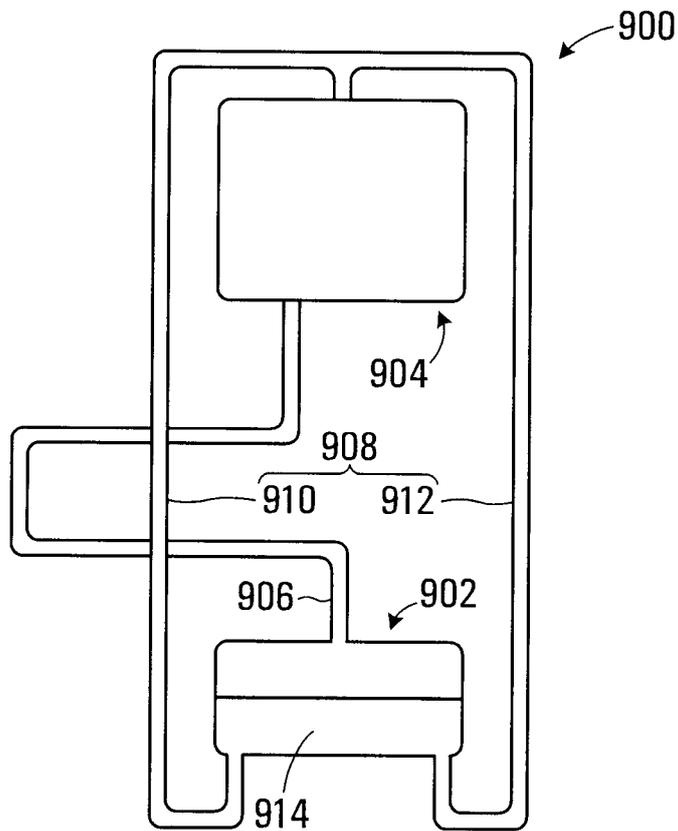


FIG. 9



+

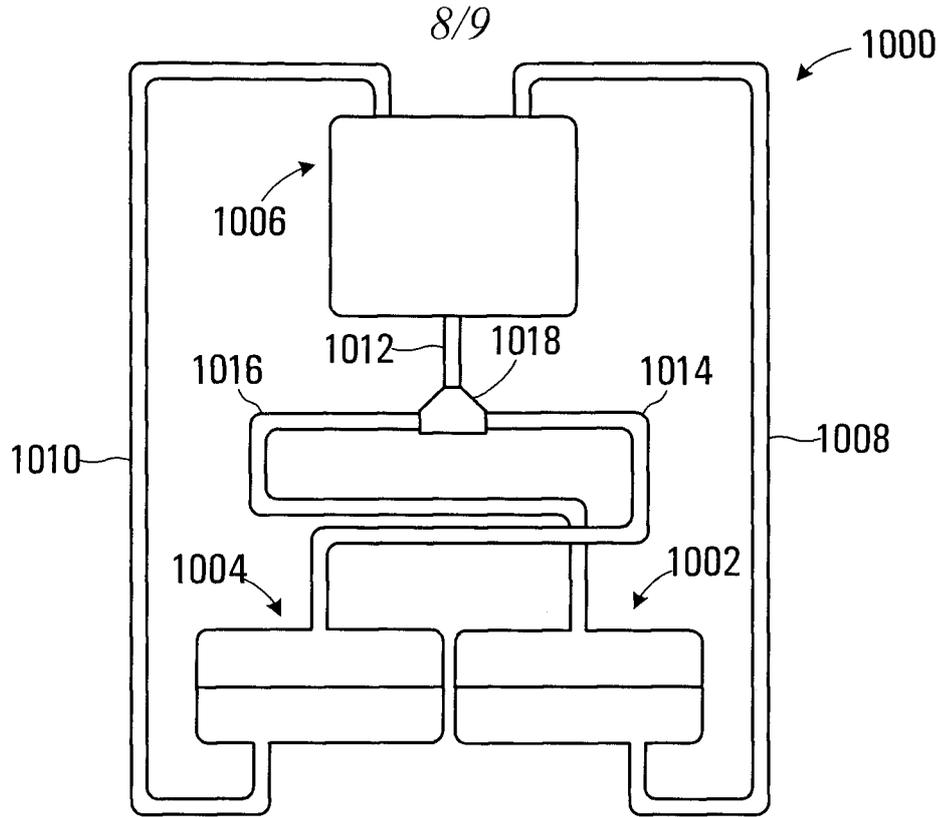


FIG. 10

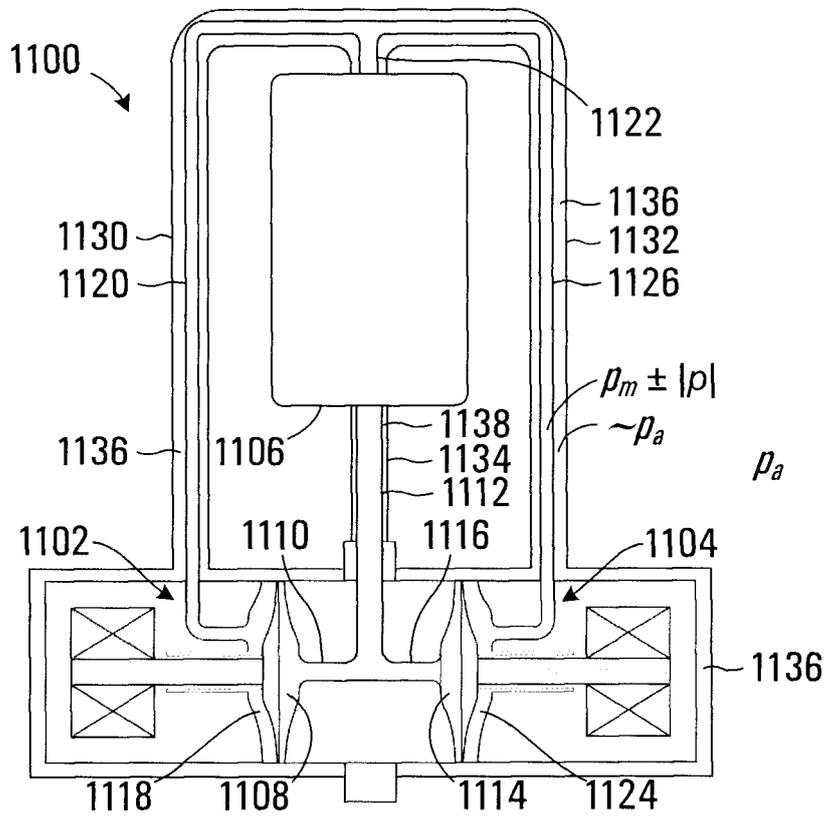


FIG. 11

+

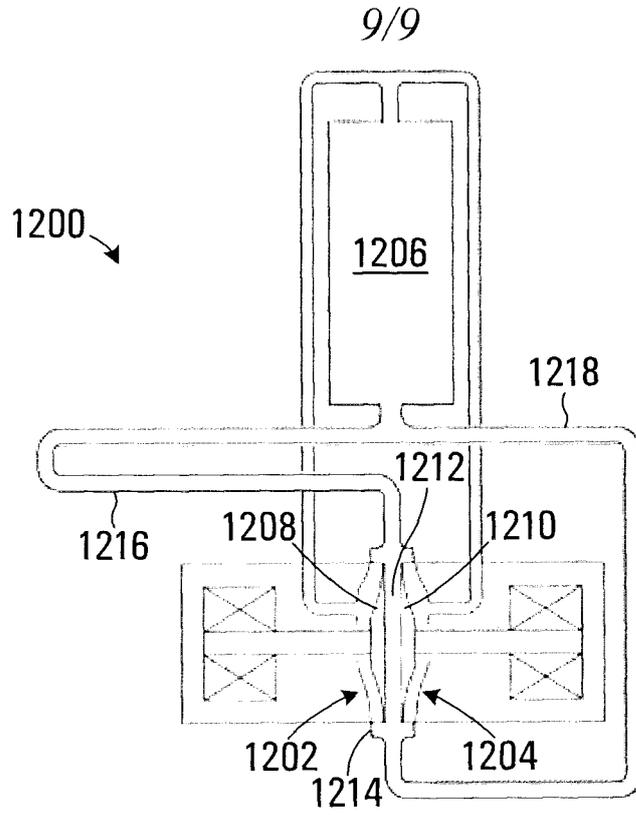


FIG. 12

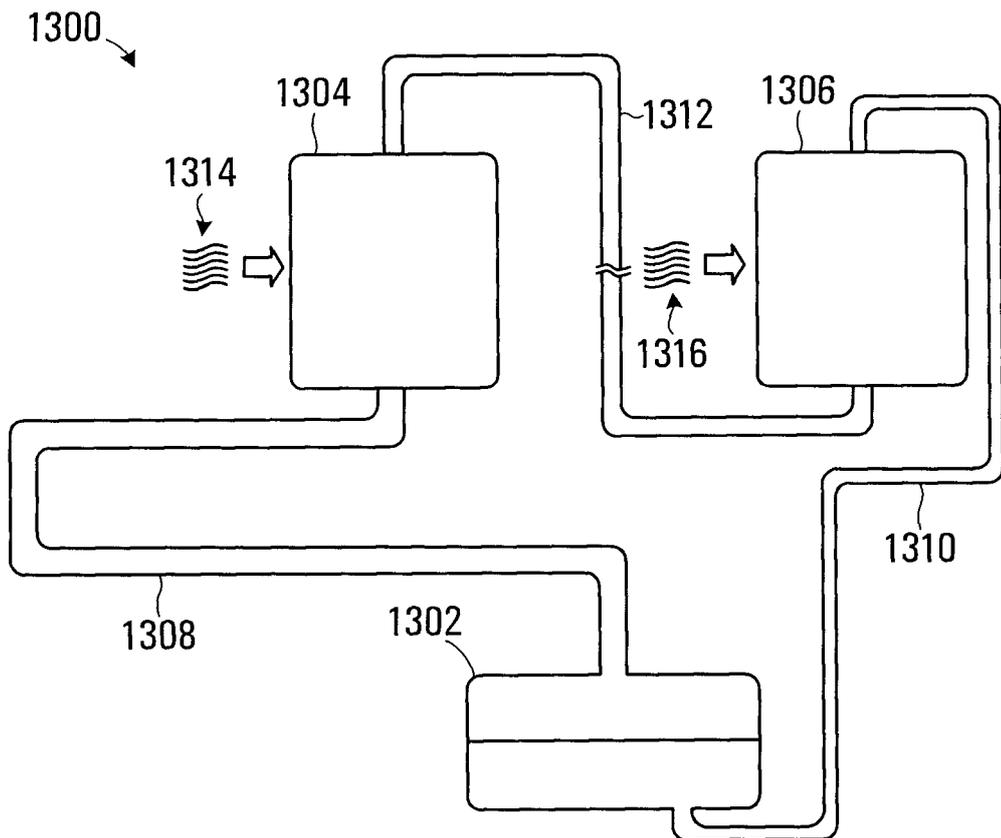


FIG. 13



