




US 20090082972A1

(19) **United States**(12) **Patent Application Publication**
Lapstun(10) **Pub. No.: US 2009/0082972 A1**(43) **Pub. Date: Mar. 26, 2009**(54) **CODING PATTERN HAVING CELL
TRANSLATIONS IDENTIFIABLE IN
DIFFERENT ORIENTATIONS****Publication Classification**(51) **Int. Cl.**
G06F 19/00 (2006.01)(52) **U.S. Cl.** **702/19**(57) **ABSTRACT**(75) **Inventor: Paul Lapstun, Balmain (AU)**

Correspondence Address:

**SILVERBROOK RESEARCH PTY LTD
393 DARLING STREET
BALMAIN 2041 (AU)**(73) **Assignee: Silverbrook Research Pty Ltd**(21) **Appl. No.: 12/178,629**(22) **Filed: Jul. 24, 2008****Related U.S. Application Data**(60) **Provisional application No. 60/974,077, filed on Sep.
21, 2007.**

A substrate having a coding pattern disposed on a surface thereof. The coding pattern comprises: a plurality of target elements defining a target grid; a plurality of data elements contained in each cell of the grid; and a plurality of tags. Each tag is defined by a plurality of contiguous cells and comprises respective tag data encoded by data elements. Each cell comprises a pair of registration symbols, each encoded by a respective set of the data elements. The set of data elements identifies a translation of the cell relative to a tag containing the cell. Further, each set of data elements maps to a first translation code symbol value when read in a first orientation, and maps to a second translation code symbol value when read in a second orientation. Thus, the translation of the cell relative to the tag is identifiable in either of the first or second orientations.

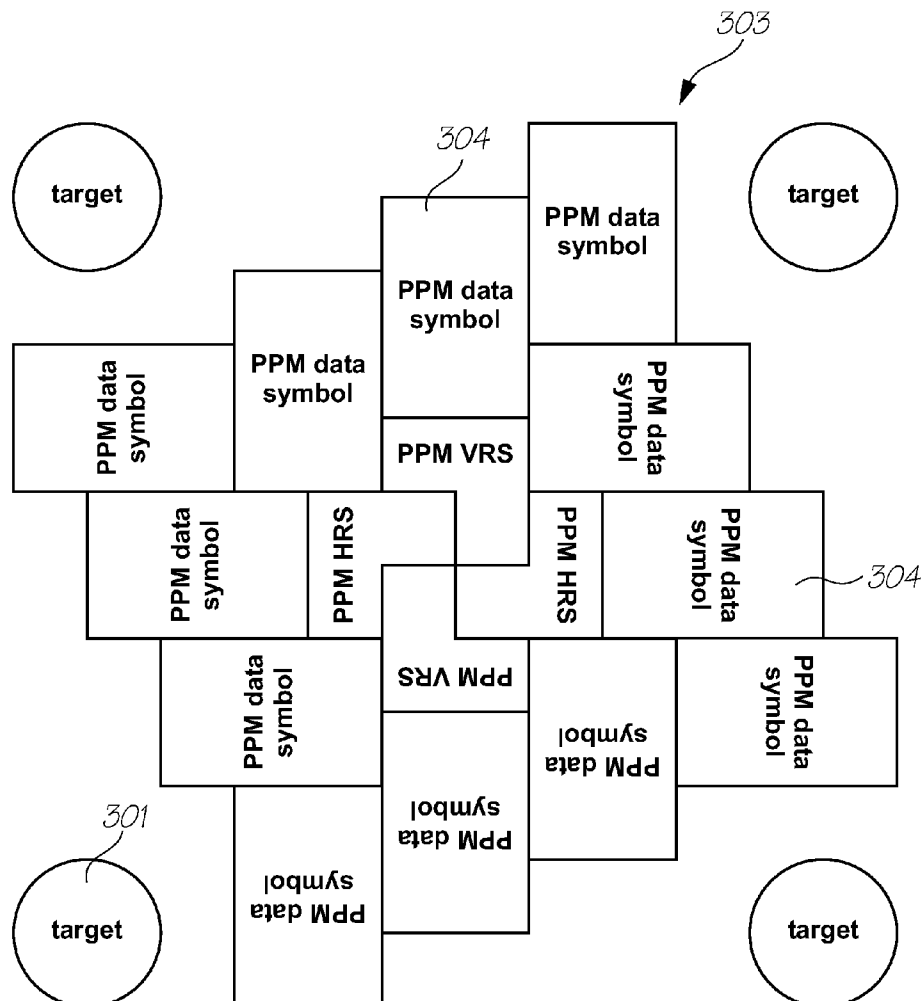

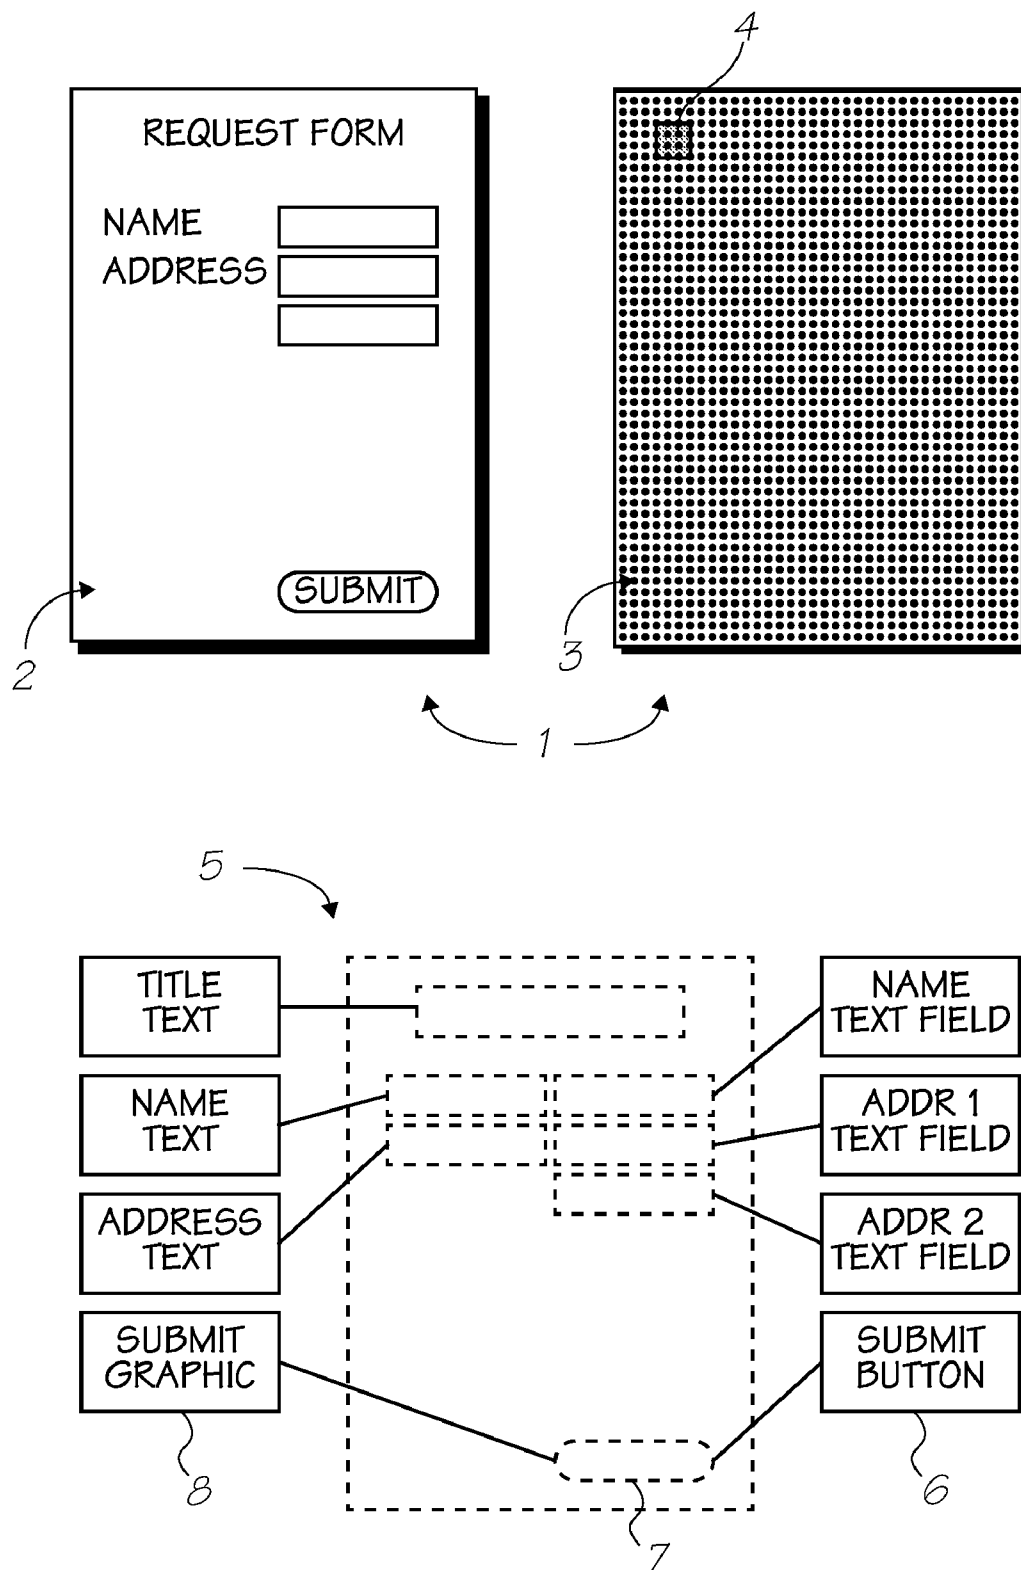


FIG. 1

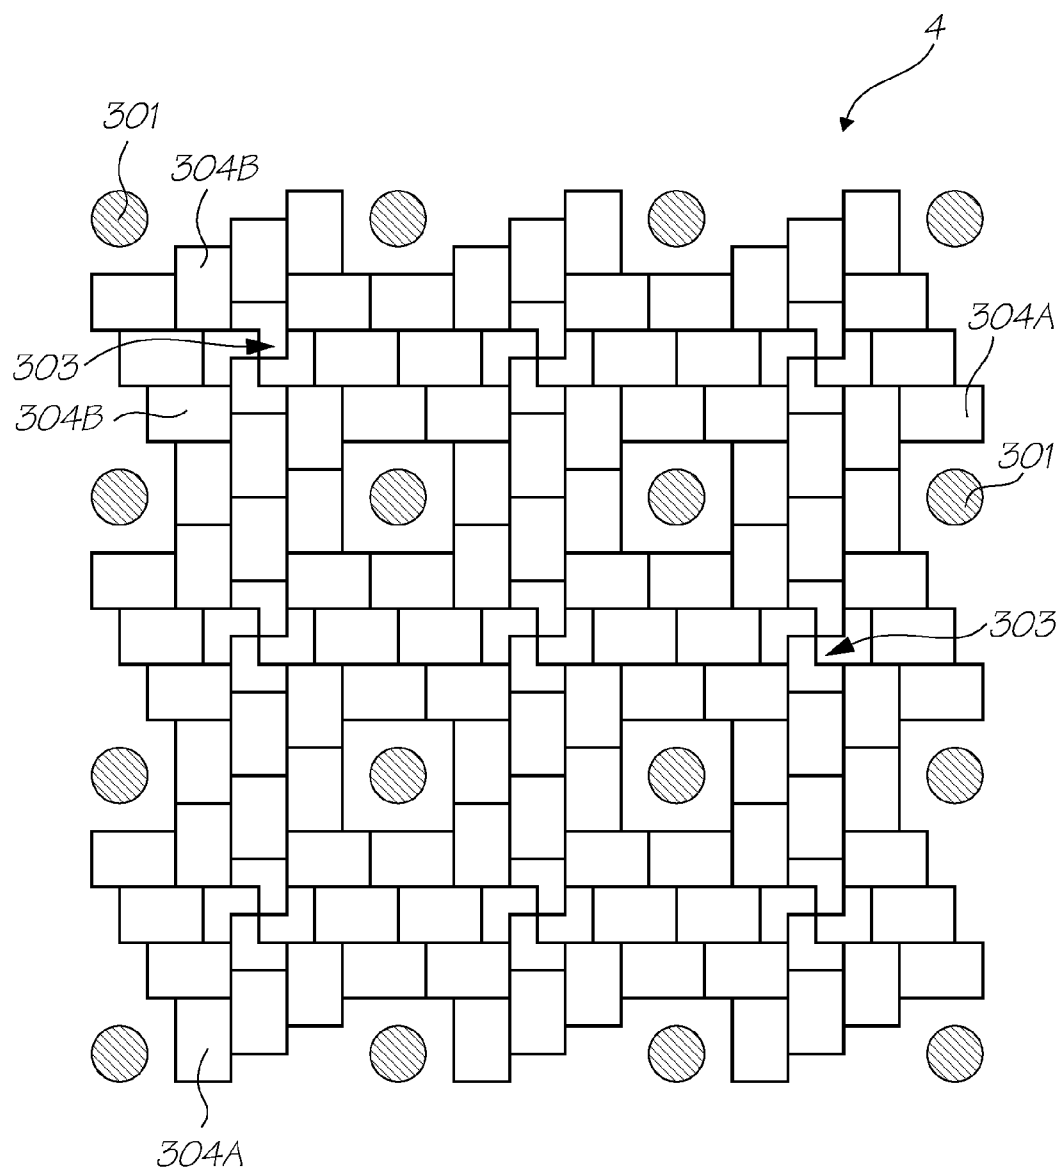


FIG. 3

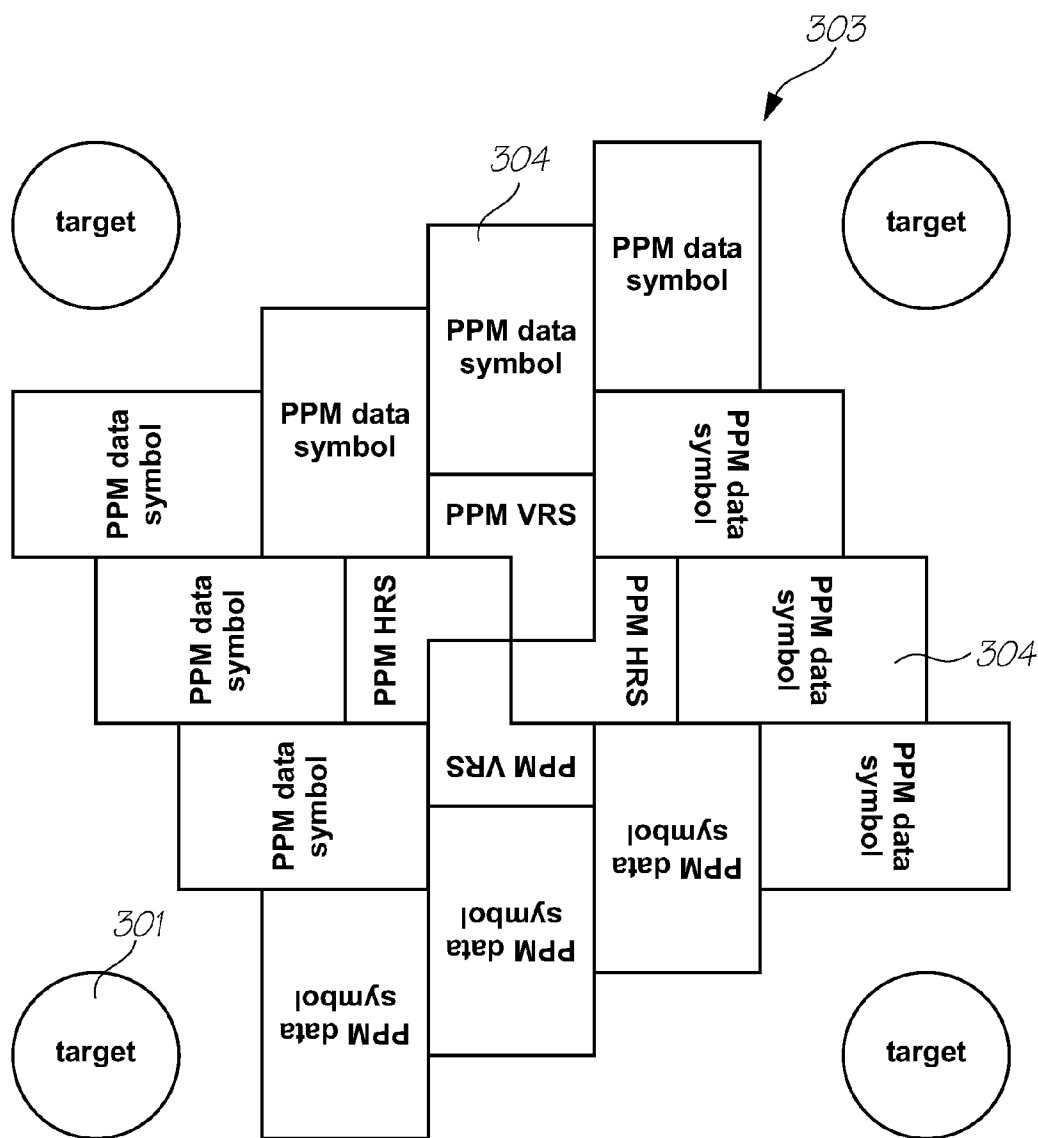


FIG. 4




FIG. 5




FIG. 6

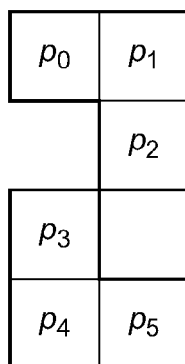


FIG. 7

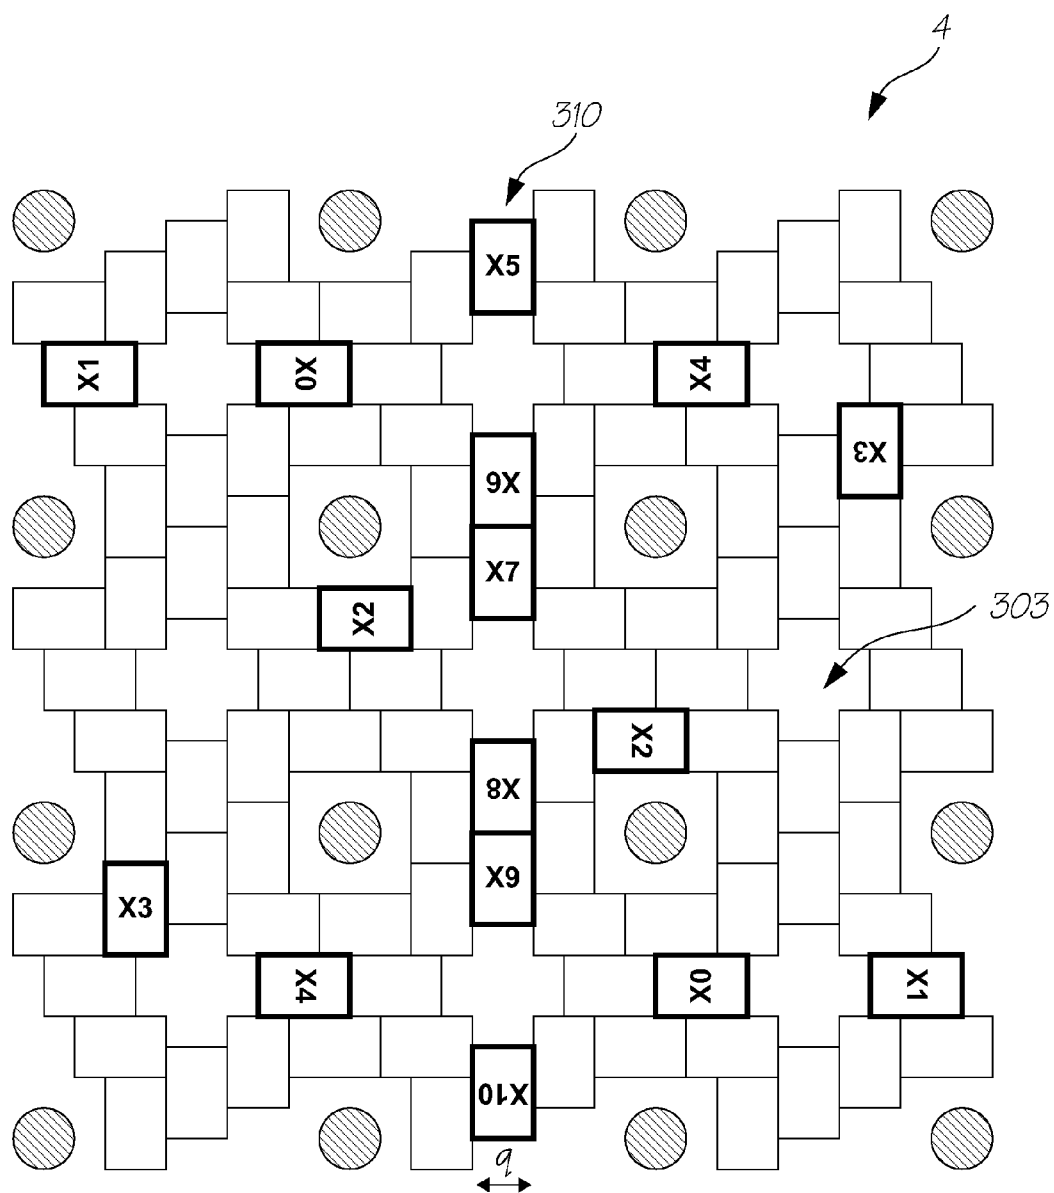


FIG. 8

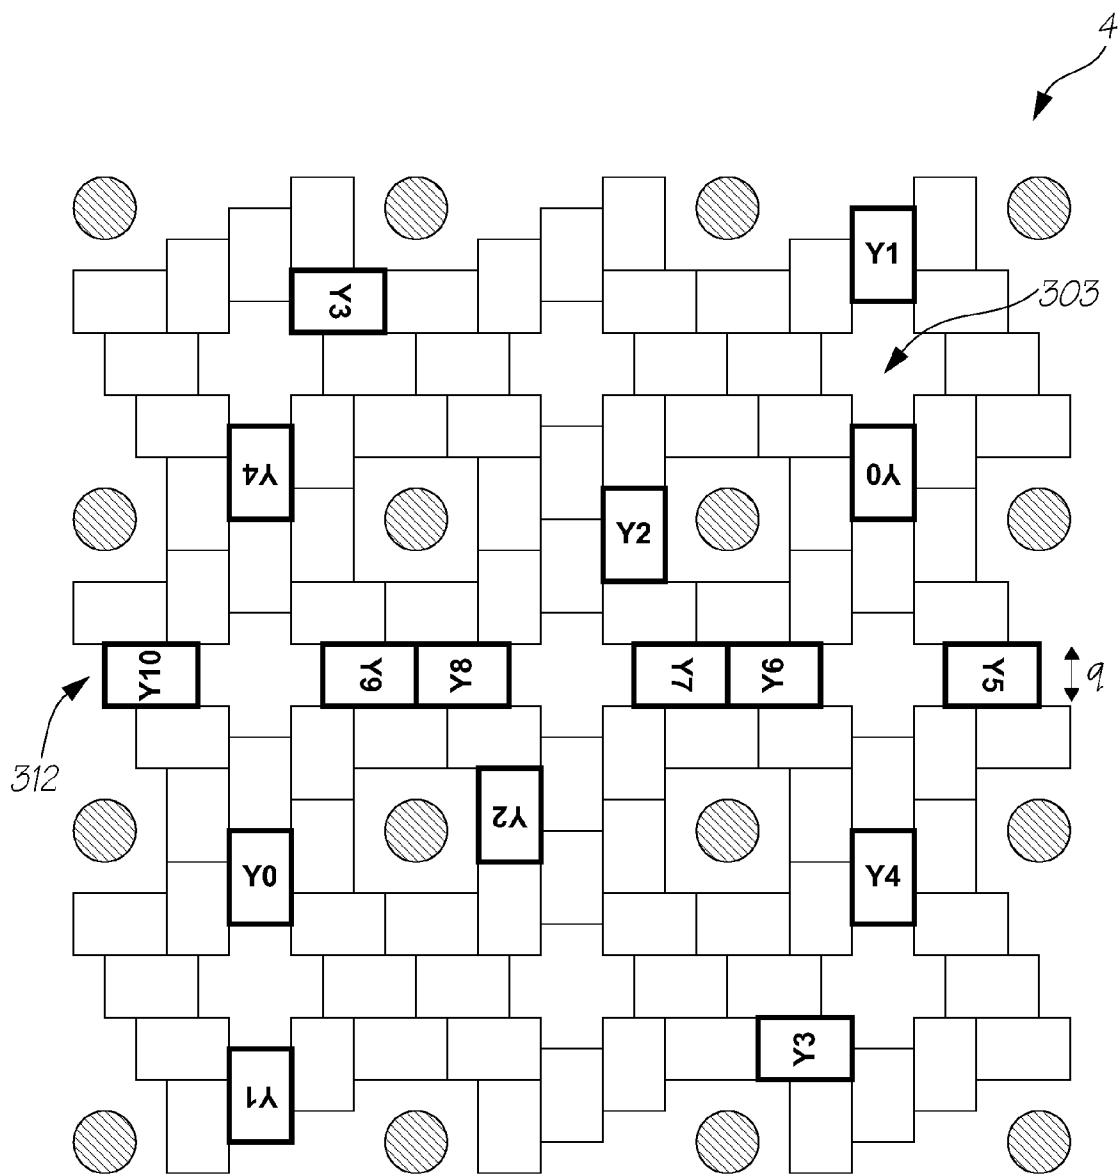


FIG. 9

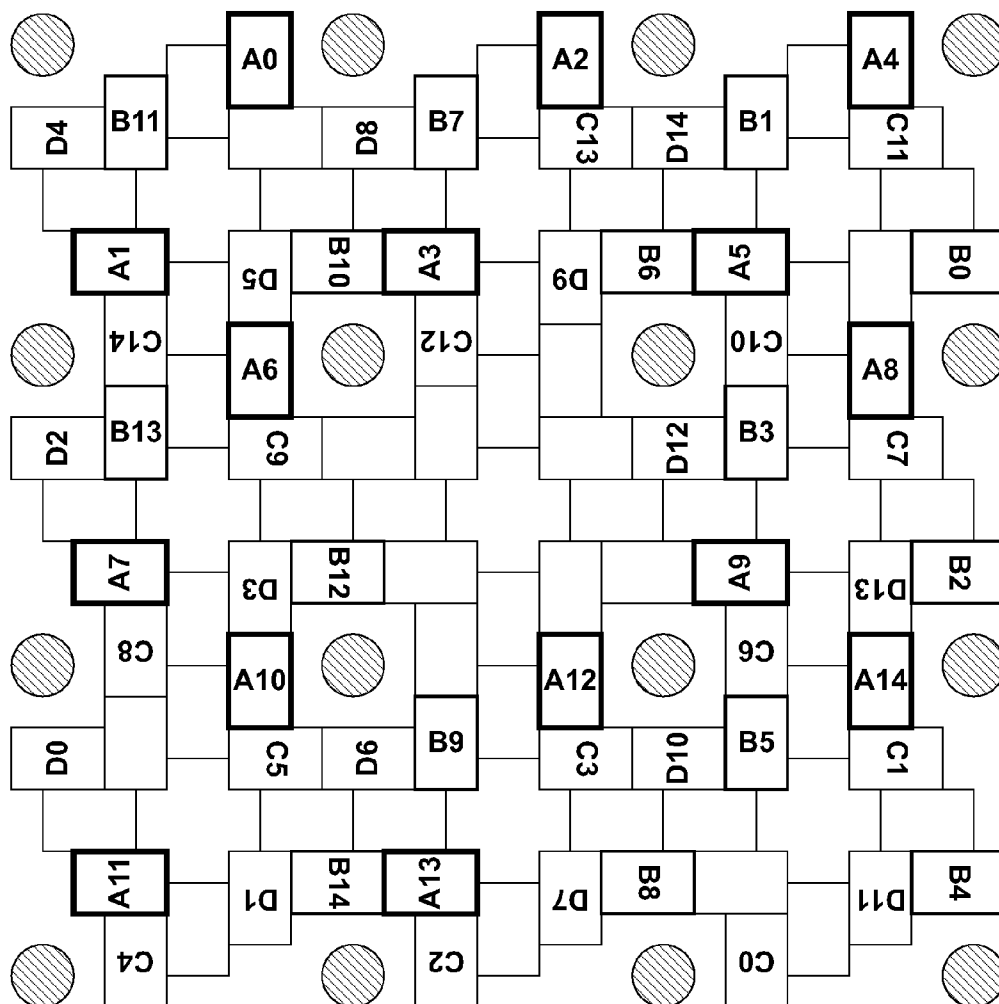


FIG. 10

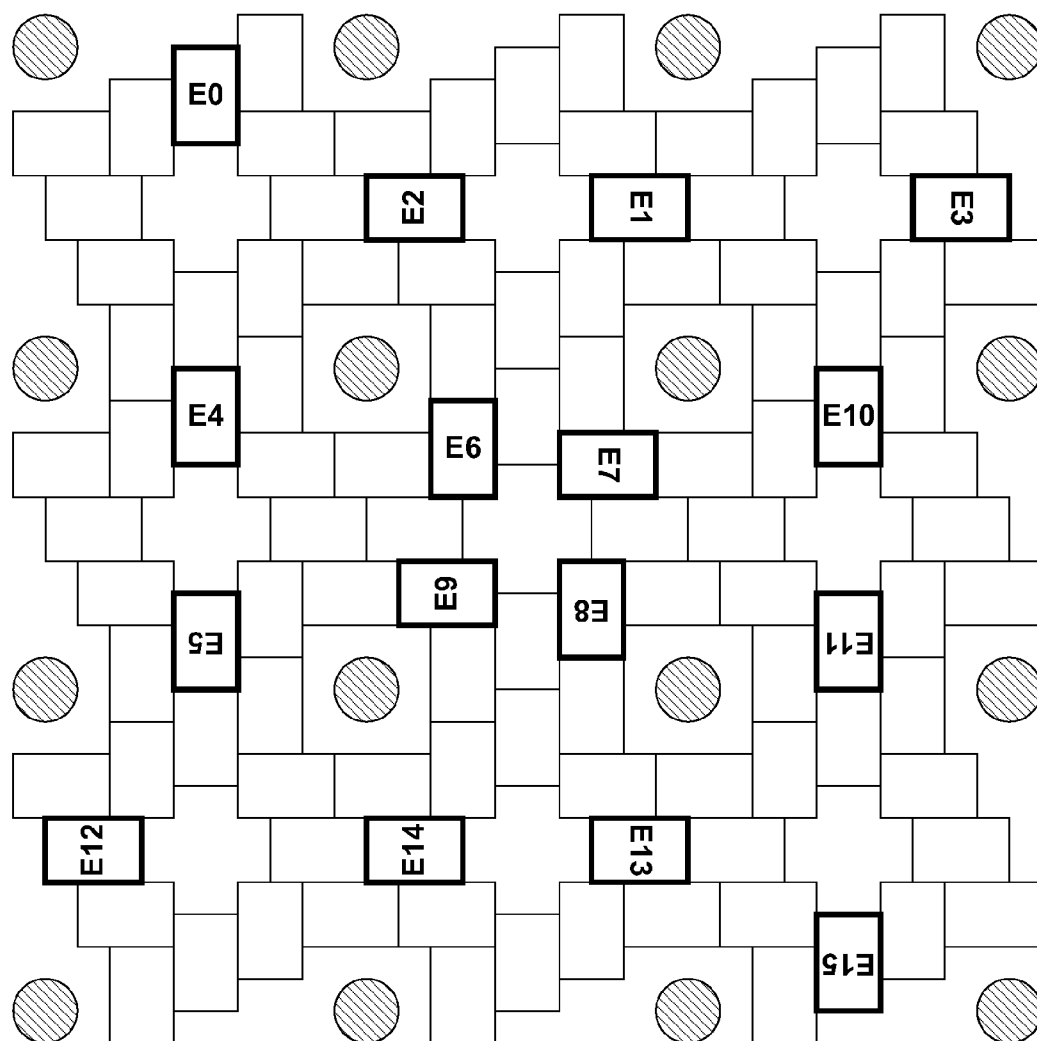


FIG. 11

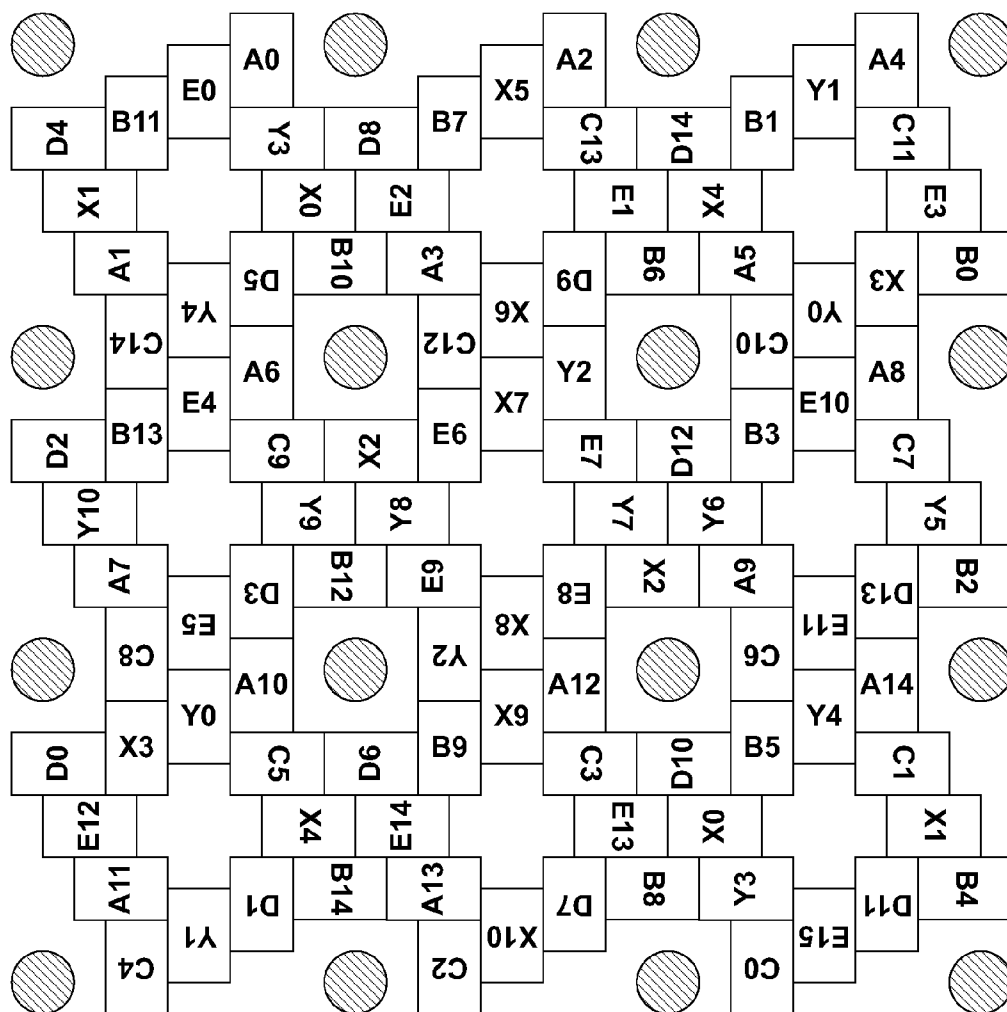


FIG. 12

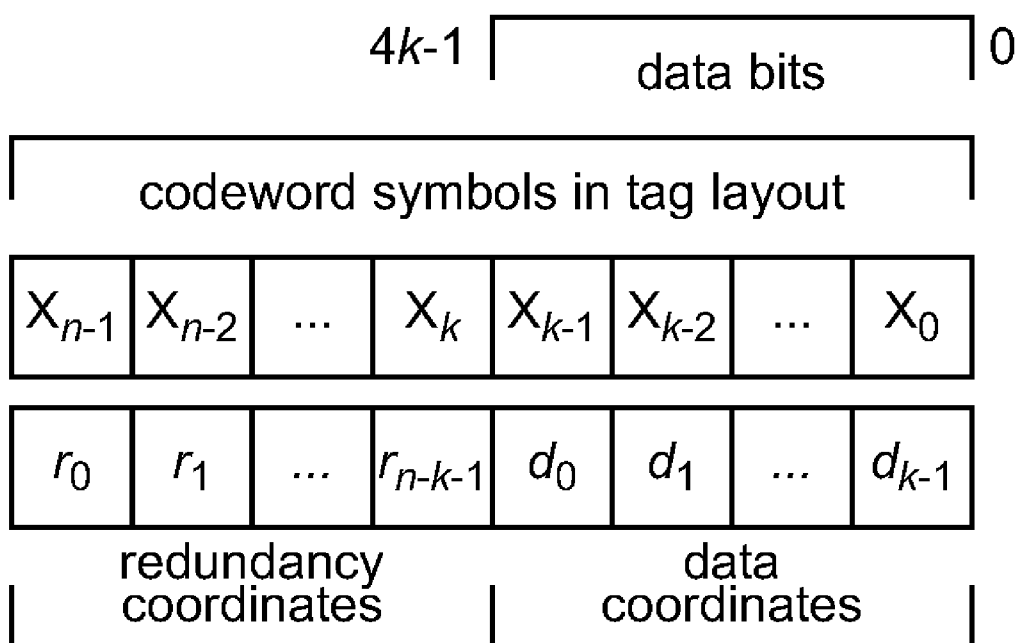


FIG. 13

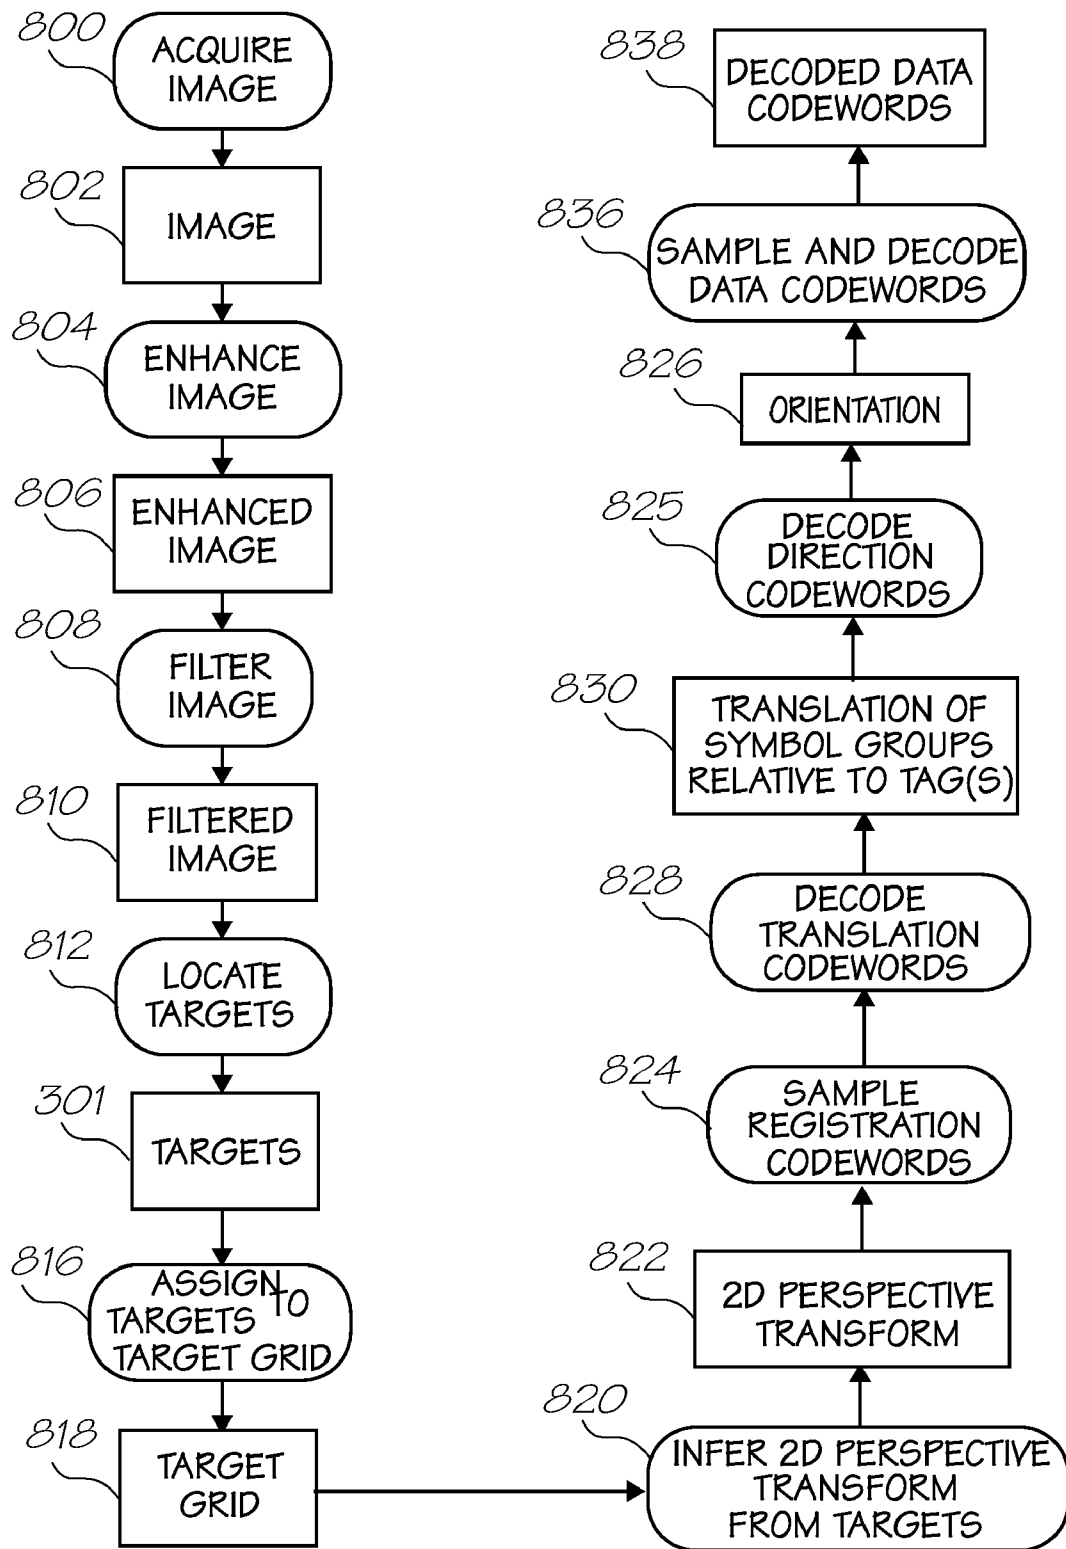


FIG. 14

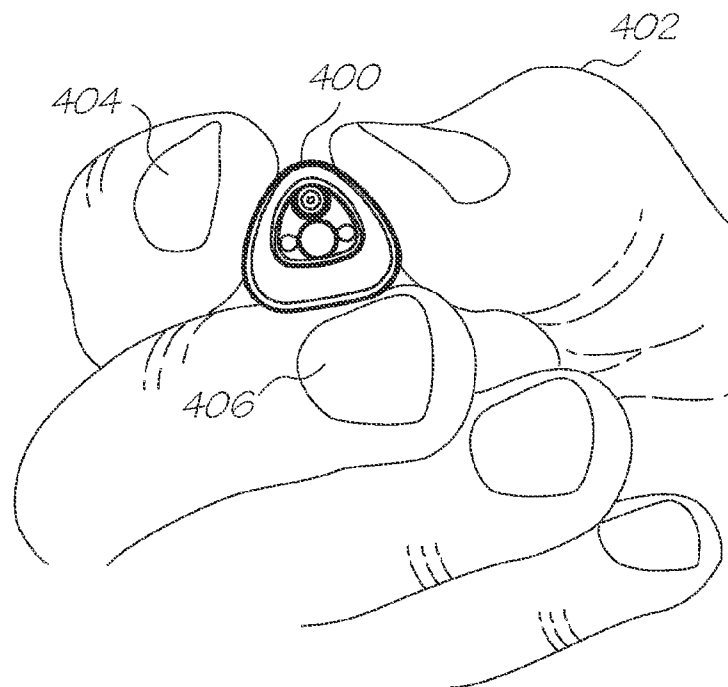


FIG. 15

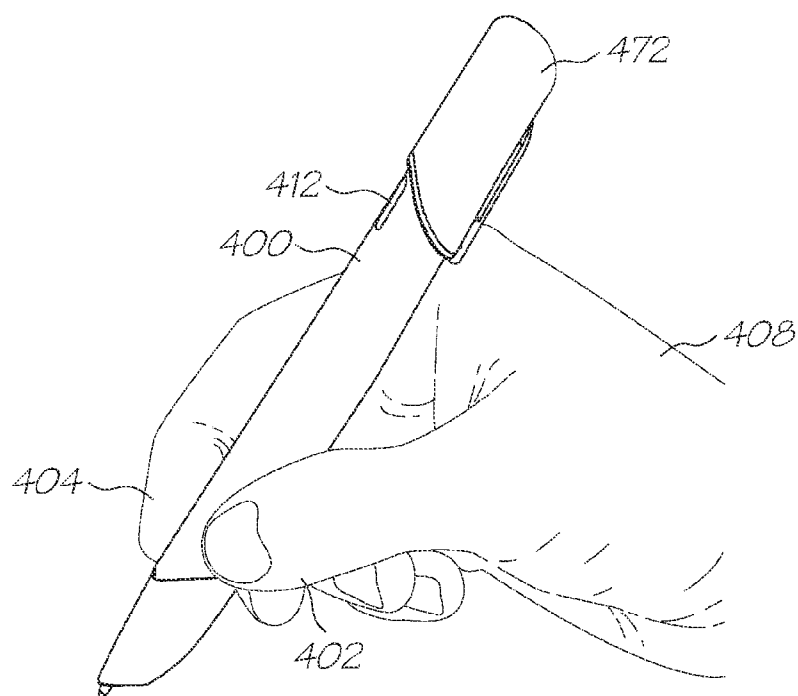
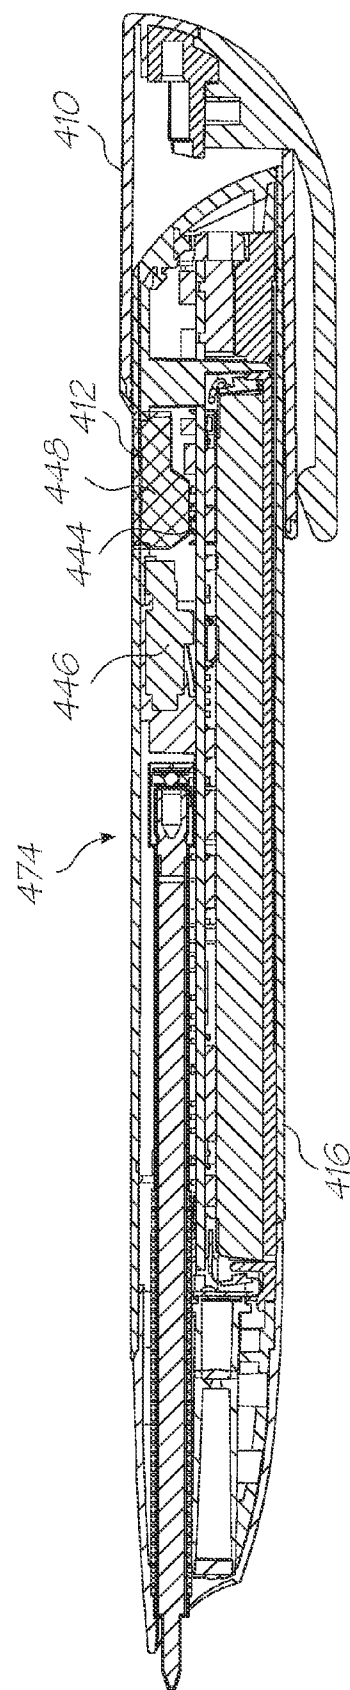
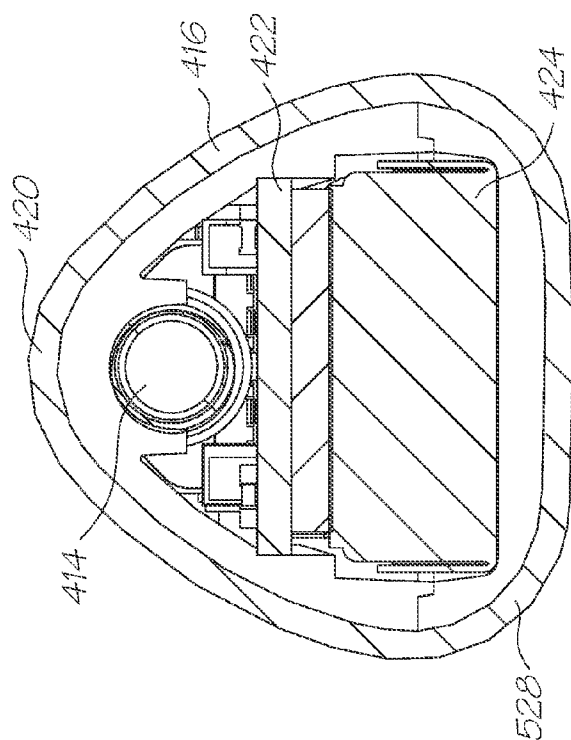


FIG. 16



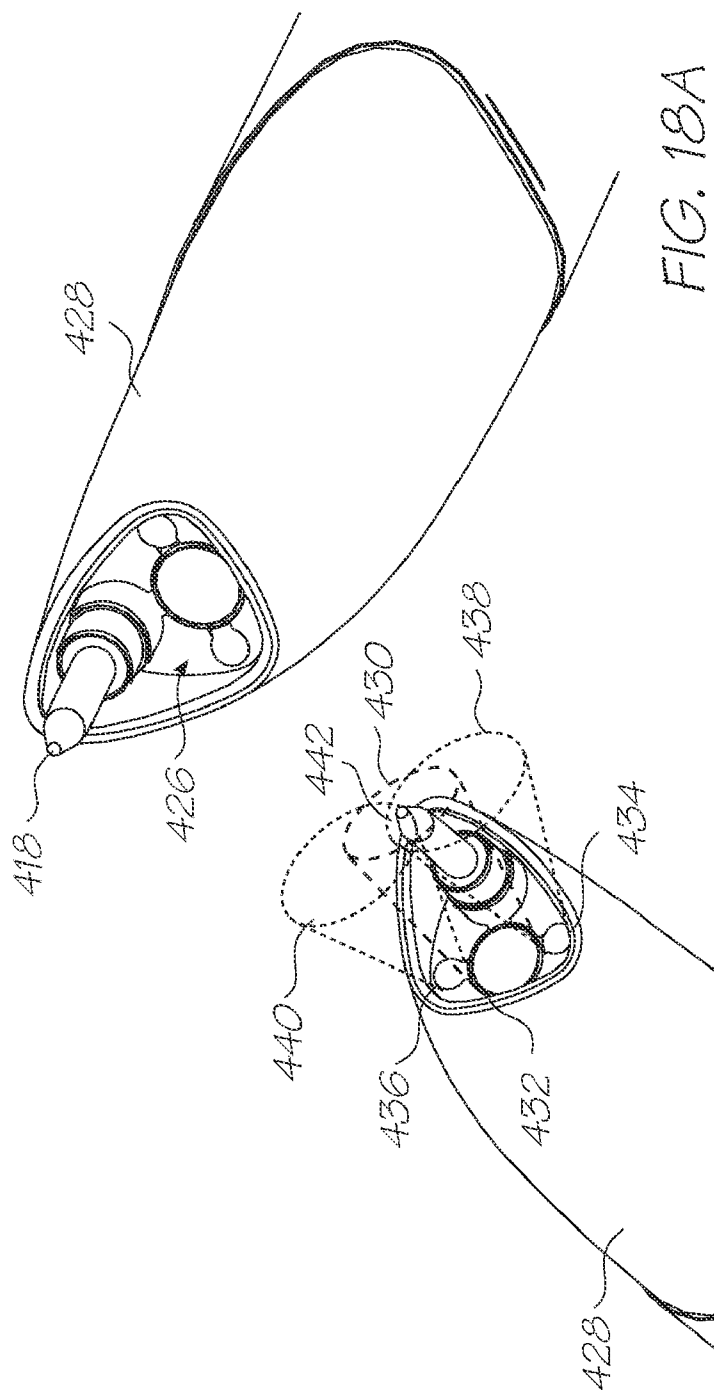


FIG. 18B

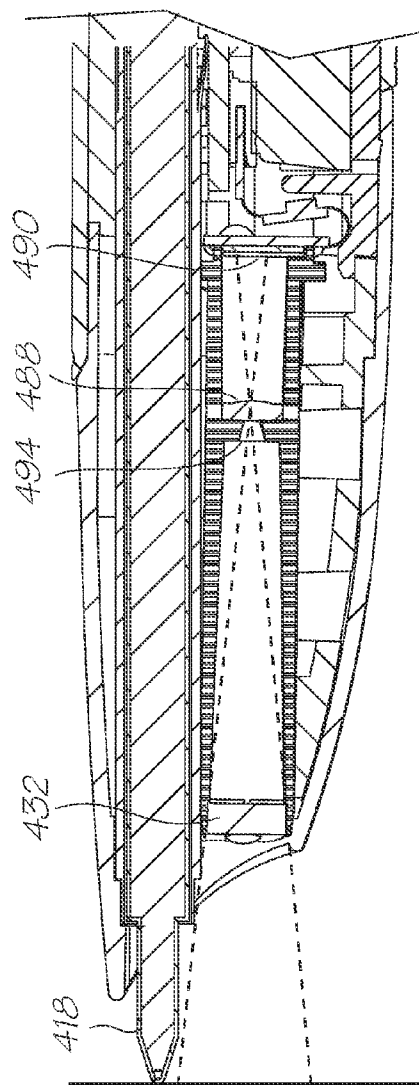


FIG. 20A

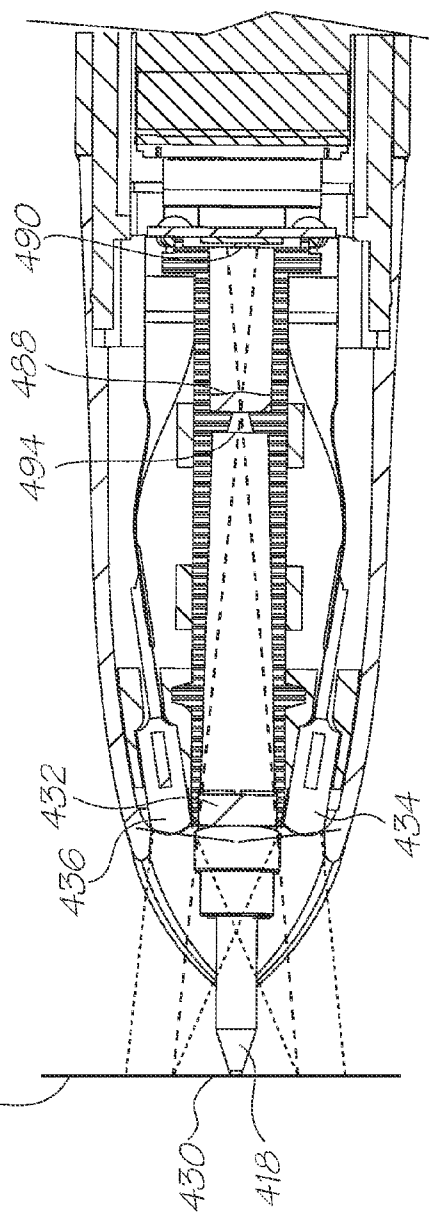


FIG. 20B

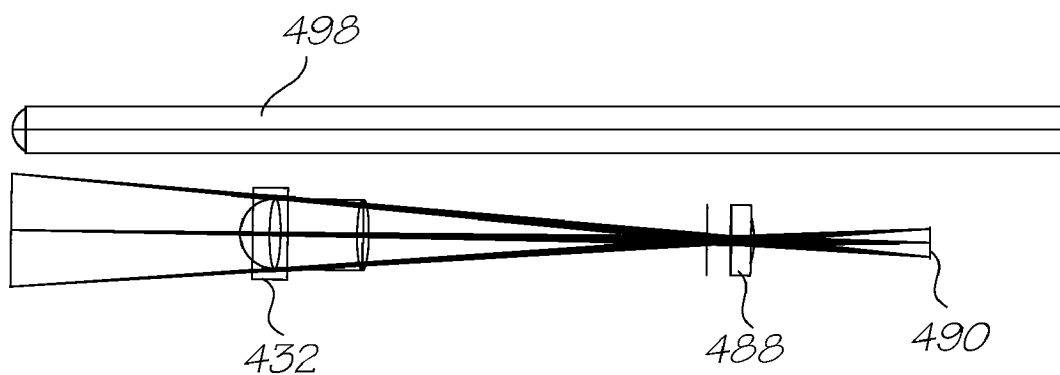


FIG. 21

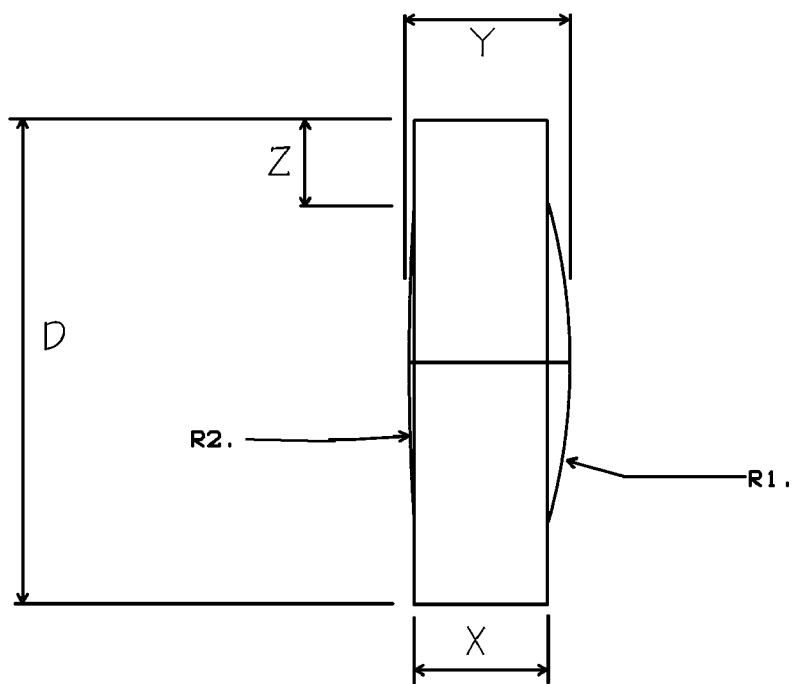


FIG. 22

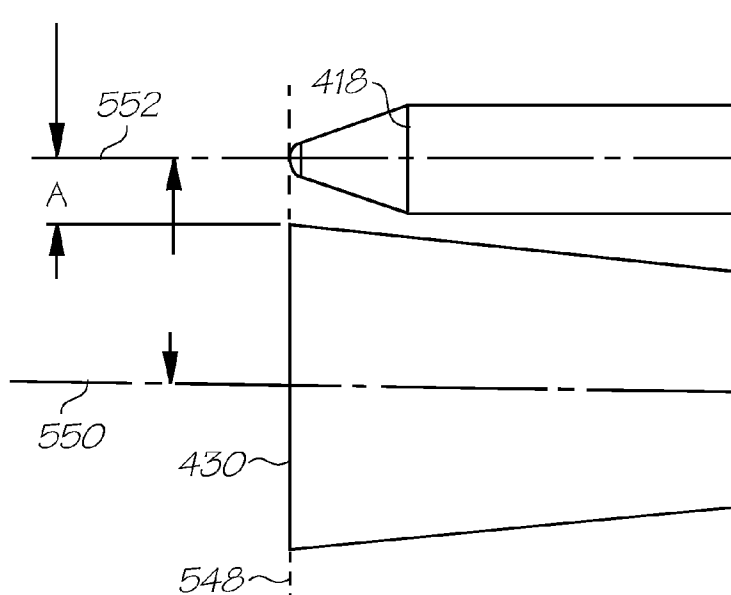


FIG. 23

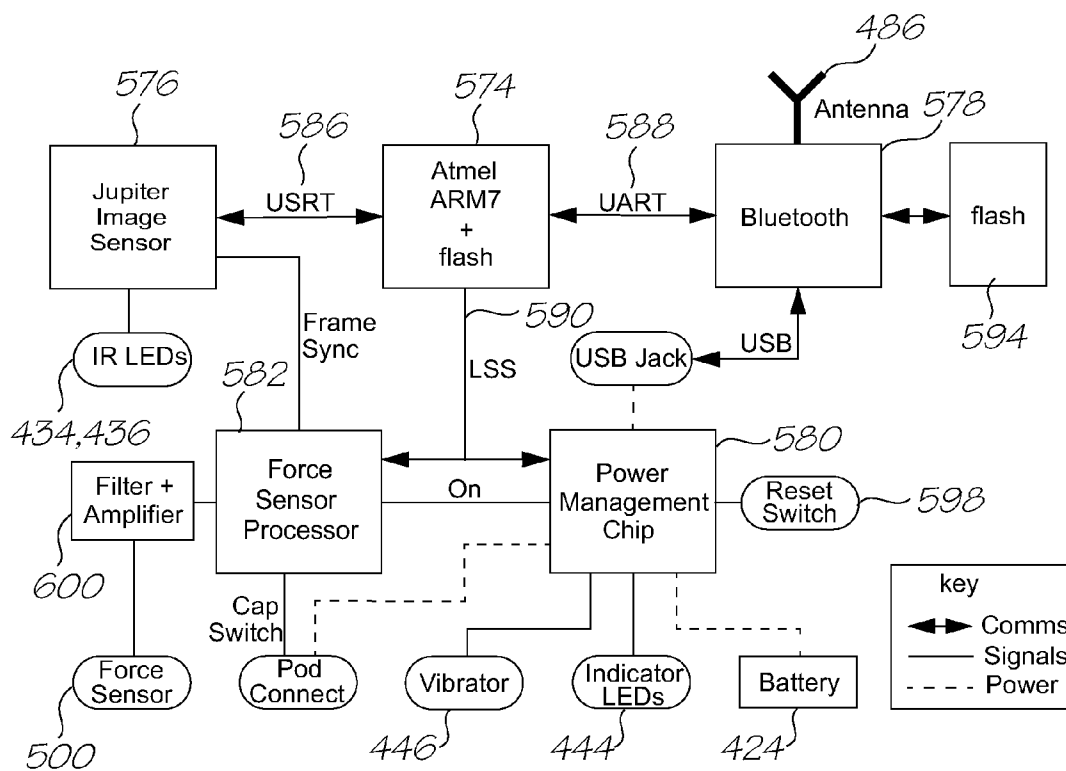


FIG. 24

CODING PATTERN HAVING CELL TRANSLATIONS IDENTIFIABLE IN DIFFERENT ORIENTATIONS

CROSS-REFERENCE TO RELATED PATENT APPLICATIONS

[0001] The present application claims the right of priority under 35 U.S.C. §119(e) based on U.S. Provisional Patent Application No. 60/974,077, filed Sep. 21, 2007 which is incorporated by reference herein in its entirety as if fully set forth herein.

CO-PENDING APPLICATIONS

[0002] The following applications have been filed by the Applicant simultaneously with the present application:

NPT087US	NPT088US	NPT089US	NPT090US	NPT092US	NPT093US
NPT094US	NPT095US	NPT097US	NPS151US	NPP090US	NPP091US
NPP092US	NPP093US	NPP094US	NPP095US	NPP096US	NPP097US
NPS149US	NPS150US	NPZ032US	NPZ033US	NPP099US	NPP100US
NPP101US	NPP102US	NPP103US	NPP104US	NPP105US	NPP106US
NPP107US	NPP108US				

[0003] The disclosures of these co-pending applications are incorporated herein by reference. The above applications have been identified by their filing docket number, which will be substituted with the corresponding application number, once assigned.

CROSS REFERENCES

[0004] The following patents or patent applications filed by the applicant or assignee of the present invention are hereby incorporated by cross-reference.

10/815621	10/815635	10/815647	11/488162	10/815636	11/041652	11/041609
11/041556	10/815609	7204941	7278727	10/913380	7122076	7156289
09/575197	6720985	7295839	09/722174	7068382	7094910	7062651
6644642	6549935	6987573	6727996	6760119	7064851	6290349
6428155	6785016	6831682	6741871	6965439	10/932044	6870966
6474888	6724374	6788982	7263270	6788293	6737591	09/693514
10/778056	10/778061	11/193482	7055739	6830196	7182247	7082562
10/409864	7108192	10/492169	10/492152	10/492168	10/492161	7308148
6957768	7170499	11856061	11/672522	11/672950	11/754310	12015507
7148345	12025746	12025762	12025765	10/407212	6902255	6755509

FIELD OF INVENTION

[0005] The present invention relates to a position-coding pattern on a surface.

BACKGROUND

[0006] The Applicant has previously described a method of enabling users to access information from a computer system via a printed substrate e.g. paper. The substrate has a coding pattern printed thereon, which is read by an optical sensing device when the user interacts with the substrate using the sensing device. A computer receives interaction data from the sensing device and uses this data to determine what action is being requested by the user. For example, a user may make

make handwritten input onto a form or make a selection gesture around a printed item. This input is interpreted by the computer system with reference to a page description corresponding to the printed substrate.

[0007] It would be desirable to improve the coding pattern on the substrate so as to maximize usage of images captured by the sensing device. SUMMARY OF INVENTION

[0008] In a first aspect the present invention provides a substrate having a coding pattern disposed on a surface thereof, said coding pattern comprising:

[0009] a plurality of target elements defining a target grid, said target grid comprising a plurality of cells, wherein neighboring cells share target elements;

[0010] a plurality of data elements contained in each cell; and

[0011] a plurality of tags, each tag being defined by at least one cell, each tag comprising respective tag data encoded by data elements,

[0012] wherein each cell comprises a plurality of registration symbols encoded by a respective set of said data elements, each registration symbol identifying a respective direction component of an orientation such that said plurality of registration symbols in said cell together identify said orientation, wherein said orientation is an orientation of a layout of said tag data with respect to said target grid.

[0013] Optionally, each cell comprises first and second orthogonal registration symbols, said first registration symbol identifying a first direction component of said orientation, and said second registration symbol identifying a second direction component of said orientation, such that said first and second orthogonal registration symbols together identify said orientation.

[0014] Optionally, said set of data elements is represented by multi-pulse position modulation.

[0015] Optionally, said set of data elements consists of m macrodots, each of said macrodots occupying a respective position from a plurality of predetermined possible positions p within said cell, the respective positions of said macrodots representing one of a plurality of possible registration symbol values for said registration symbol.

[0016] Optionally, m is 2 or more and $p > m$.

[0017] Optionally, m is 2 and p is 6 so as to provide 15 possible registration symbol values.

[0018] Optionally, a plurality of said registration symbol values are mapped to a direction code symbol value, said direction code symbol value representing a direction component of said orientation.

[0019] Optionally, said orientation is one of four possible orientations, said orientation being identifiable via a pair of 1-bit direction code symbol values.

[0020] Optionally, said each registration symbol value read in a first orientation is reversed when read in an opposite second orientation.

[0021] Optionally, each registration symbol value maps to a "0" direction code symbol value when read in said first orientation, and maps to a "1" direction code symbol value when read in said second orientation, such that determination of the orientation of said tag data is independent of an orientation in which said registration symbol is read.

[0022] Optionally, each registration symbol further identifies at least one of:

[0023] a translation of said cell relative to a tag containing said cell; and

[0024] a flag.

[0025] Optionally, each registration symbol value maps to an identical flag code symbol value irrespective of an orientation of reading said registration symbol.

[0026] Optionally, each tag is square and comprises M^2 contiguous square cells, wherein M is an integer having a value of at least 2.

[0027] Optionally, M registration symbols in a row of M cells define a cyclic position code having minimum distance M , said code being defined by a first translation codeword.

[0028] Optionally, M registration symbols in a column of M cells define a cyclic position code having minimum distance M , said code being defined by a second translation codeword.

[0029] Optionally, each tag comprises N cells, and at least N registration symbols form a third translation codeword with minimum distance N , wherein N is an integer having a value of at least 4.

[0030] Optionally, any tag-sized portion of said coding pattern is guaranteed to contain at least N registration symbols, thereby capturing said third translation codeword.

[0031] Optionally, each tag comprises N cells, and at least N first registration symbols form a first direction code with minimum distance N , wherein N is an integer having a value of at least 4.

[0032] Optionally, at least N second registration symbols form a second direction code with minimum distance N , wherein N is an integer having a value of at least 4.

[0033] Optionally, said cells are arranged such that any tag-sized portion of said coding pattern is guaranteed to contain said first and second direction codes.

[0034] In a second aspect the present invention provides a substrate having a coding pattern disposed on a surface thereof, said coding pattern comprising:

[0035] a plurality of target elements defining a target grid, said target grid comprising a plurality of cells, wherein neighboring cells share target elements;

[0036] a plurality of data elements contained in each cell; and

[0037] a plurality of tags, each tag being defined by a plurality of contiguous cells, each tag comprising respective tag data encoded by a respective set of said data elements,

[0038] wherein each cell comprises one or more registration symbols encoded by a respective set of said data elements, said one or more registration symbols identifying:

[0039] a translation of said cell relative to a tag containing said cell; and

[0040] an orientation of a layout of said tag data with respect to said target grid.

[0041] Optionally, each cell comprises a first and second registration symbols, said first registration symbol identifying a first orthogonal translation of said cell, said second registration symbol identifying a second orthogonal translation of said cell.

[0042] Optionally, said first registration symbol identifies a first direction component of said orientation, and said second registration symbol identifies a second direction component of said orientation, such that said first and second orthogonal registration symbols together identify said orientation via said first and second direction components.

[0043] Optionally, each tag is square and comprises M^2 contiguous square cells, wherein M is an integer having a value of at least 2.

[0044] Optionally, M registration symbols in a row of M cells define a cyclic position code having minimum distance M , said code being defined by a first translation codeword.

[0045] Optionally, M registration symbols in a column of M cells define a cyclic position code having minimum distance M , said code being defined by a second translation codeword.

[0046] Optionally, each tag comprises N cells, and at least N registration symbols form a third translation codeword with minimum distance N , wherein N is an integer having a value of at least 4.

[0047] Optionally, any tag-sized portion of said coding pattern is guaranteed to contain at least N registration symbols, thereby capturing said third translation codeword.

[0048] Optionally, said orientation is one of four possible orientations identifiable via a pair of 1-bit direction code symbol values.

[0049] Optionally, each tag comprises N cells, and at least N first registration symbols form a first direction code with minimum distance N , wherein N is an integer having a value of at least 4.

[0050] Optionally, at least N second registration symbols form a second direction code with minimum distance N , wherein N is an integer having a value of at least 4.

[0051] Optionally, said orientation is identifiable from said first and second direction codes.

[0052] Optionally, said cells are arranged such that any tag-sized portion of said coding pattern is guaranteed to contain said first and second direction codes.

[0053] Optionally, said registration symbol further identifies a flag for said tag.

[0054] Optionally, said data elements are macrodots.

[0055] Optionally, a portion of data is represented by m macrodots, each of said macrodots occupying a respective position from a plurality of predetermined possible positions p within said cell, the respective positions of said macrodots representing one of a plurality of possible data values.

[0056] Optionally, said portion of data is a Reed-Solomon symbol.

[0057] Optionally, each cell defines a symbol group, each symbol group comprising a plurality of Reed-Solomon symbols encoded by a plurality of said data elements.

[0058] Optionally, m is an integer of 2 or more, and $p \geq 2m$.

[0059] Optionally, said tag data is encoded as a local code-word comprised of a set of said Reed-Solomon symbols.

[0060] In a third aspect the present invention provides a method of imaging a coding pattern disposed on a surface of a substrate, said method comprising the steps of:

[0061] (a) capturing an image of a portion of said coding pattern, said coding pattern comprising:

[0062] a plurality of target elements defining a target grid, said target grid comprising a plurality of cells, wherein neighboring cells share target elements;

[0063] a plurality of data elements contained in each cell; and

[0064] a plurality of tags, each tag being defined by at least one cell, each tag comprising respective tag data encoded by a respective set of said data elements,

[0065] wherein each cell comprises a plurality of registration symbols encoded by a respective set of said data elements, each registration symbol identifying a respective direction component of an orientation of a layout of said tag data with respect to said target grid; and

[0066] (b) sampling and decoding a plurality of said registration symbols contained in said imaged portion;

[0067] (c) determining, from the decoded registration symbols, the orientation of the layout of the tag data relative to the target grid; and

[0068] (d) using said determined orientation to sample and decode said tag data.

[0069] Optionally, each cell comprises first and second orthogonal registration symbols, said first registration symbol identifying a first direction component of said orientation, and said second registration symbol identifying a second direction component of said orientation, such that said first and second orthogonal registration symbols together identify said orientation.

[0070] Optionally, said orientation is one of four possible orientations, said orientation being identifiable via a pair of 1-bit orthogonal direction components.

[0071] Optionally, each tag is defined by a plurality of contiguous cells

[0072] Optionally, each registration symbol further identifies:

[0073] a translation of said cell relative to a tag containing said cell.

[0074] Optionally, each tag comprises N cells, and at least N first registration symbols form a first direction code with minimum distance N , wherein N is an integer having a value of at least 4.

[0075] Optionally, at least N second registration symbols form a second direction code with minimum distance N , wherein N is an integer having a value of at least 4.

[0076] Optionally, said cells are arranged such that any tag-sized portion of said coding pattern is guaranteed to contain said first and second direction codes.

[0077] Optionally, each registration symbol further identifies a flag for said tag.

[0078] Optionally, the method further comprising the step of identifying a position using the decoded tag data.

[0079] In a further aspect the present invention provides a system for imaging a coding pattern disposed on a surface of a substrate, said system comprising:

[0080] (A) said substrate, wherein said coding pattern comprises:

[0081] a plurality of target elements defining a target grid, said target grid comprising a plurality of cells, wherein neighboring cells share target elements;

[0082] a plurality of data elements contained in each cell; and

[0083] a plurality of tags, each tag being defined by at least one cell, each tag comprising respective tag data encoded by a respective set of said data elements,

[0084] wherein each cell comprises a plurality of registration symbols encoded by a respective set of said data elements, each registration symbol identifying a respective direction component of an orientation of a layout of said tag data with respect to said target grid; and

[0085] (B) an optical reader comprising:

[0086] an image sensor for capturing an image of a portion of said coding pattern; and

[0087] a processor configured for:

[0088] (i) sampling and decoding a plurality of said registration symbols contained in said imaged portion;

[0089] (ii) determining, from the decoded registration symbols, the orientation of the layout of the tag data relative to the target grid; and

[0090] (iii) using said determined orientation to sample and decode said tag data.

[0091] Optionally, each cell comprises first and second orthogonal registration symbols, said first registration symbol identifying a first direction component of said orientation, and said second registration symbol identifying a second direction component of said orientation, such that said first and second orthogonal registration symbols together identify said orientation.

[0092] Optionally, said orientation is one of four possible orientations, said orientation being identifiable via a pair of 1-bit orthogonal direction components.

[0093] Optionally, each tag is defined by a plurality of contiguous cells

[0094] Optionally, each registration symbol further identifies:

[0095] a translation of said cell relative to a tag containing said cell.

[0096] Optionally, each tag comprises N cells, and at least N first registration symbols form a first direction code with minimum distance N , wherein N is an integer having a value of at least 4.

[0097] Optionally, at least N second registration symbols form a second direction code with minimum distance N , wherein N is an integer having a value of at least 4.

[0098] Optionally, said cells are arranged such that any tag-sized portion of said coding pattern is guaranteed to contain said first and second direction codes.

[0099] Optionally, each registration symbol further identifies a flag for said tag.

[0100] Optionally, said processor is further configured for:

[0101] identifying a position using the decoded tag data.

[0102] In a fourth aspect the present invention provides a method of imaging a coding pattern disposed on a surface of a substrate, said method comprising the steps of:

[0103] (a) capturing an image of a portion of said coding pattern, said coding pattern comprising:

- [0104] a plurality of target elements defining a target grid, said target grid comprising a plurality of cells, wherein neighboring cells share target elements;
- [0105] a plurality of data elements contained in each cell; and
- [0106] a plurality of tags, each tag being defined by a plurality of contiguous cells, each tag comprising respective tag data encoded by a respective set of said data elements,
- [0107] wherein each cell comprises one or more registration symbols encoded by a respective set of said data elements, said one or more registration symbols identifying:
 - [0108] a translation of said cell relative to a tag containing said cell; and
 - [0109] an orientation of a layout of said tag data with respect to said target grid;
 - [0110] (b) sampling and decoding a plurality of said registration symbols contained in said imaged portion;
 - [0111] (c) determining, from the decoded registration symbols, said orientation and said translation; and
 - [0112] (d) using said orientation and said translation to sample and decode said tag data.
- [0113] Optionally, each cell comprises a first and second registration symbols, said first registration symbol identifying a first orthogonal translation of said cell, said second registration symbol identifying a second orthogonal translation of said cell, and wherein said imaged portion contains both first and second registration symbols.
- [0114] Optionally, said first registration symbol identifies a first direction component of said orientation, and said second registration symbol identifies a second direction component of said orientation, such that said first and second orthogonal registration symbols together identify said orientation via said first and second direction components.
- [0115] Optionally, each tag is square and comprises M^2 contiguous square cells, wherein M is an integer having a value of at least 2.
- [0116] Optionally, M registration symbols in a row of M cells define a cyclic position code having minimum distance M , said code being defined by a first translation codeword.
- [0117] Optionally, M registration symbols in a column of M cells define a cyclic position code having minimum distance M , said code being defined by a second translation codeword.
- [0118] Optionally, each tag comprises N cells, and at least N registration symbols form a third translation codeword with minimum distance N , wherein N is an integer having a value of at least 4.
- [0119] Optionally, said imaged portion of said coding pattern is guaranteed to contain at least N registration symbols, thereby capturing said third translation codeword.
- [0120] Optionally, said orientation is one of four possible orientations identifiable via a pair of 1-bit direction components.
- [0121] Optionally, said registration symbol further identifies a flag for said tag, and said flag is used to sample and decode said tag data.
- [0122] In a further aspect the present invention provides a system for imaging a coding pattern disposed on a surface of a substrate, said system comprising:
- [0123] (A) said substrate, wherein said coding pattern comprises:
 - [0124] a plurality of target elements defining a target grid, said target grid comprising a plurality of cells, wherein neighboring cells share target elements;
 - [0125] a plurality of data elements contained in each cell; and
 - [0126] a plurality of tags, each tag being defined by at least one cell, each tag comprising respective tag data encoded by a respective set of said data elements,
- [0127] wherein each cell comprises a plurality of registration symbols encoded by a respective set of said data elements, each registration symbol identifying a respective direction component of an orientation of a layout of said tag data with respect to said target grid; and
- [0128] (B) an optical reader comprising:
 - [0129] an image sensor for capturing an image of a portion of said coding pattern; and
 - [0130] a processor configured for:
 - [0131] (i) sampling and decoding a plurality of said registration symbols contained in said imaged portion;
 - [0132] (ii) determining, from the decoded registration symbols, the orientation of the layout of the tag data relative to the target grid; and
 - [0133] (iii) using said determined orientation to sample and decode said tag data.
- [0134] Optionally, each cell comprises first and second orthogonal registration symbols, said first registration symbol identifying a first direction component of said orientation, and said second registration symbol identifying a second direction component of said orientation, such that said first and second orthogonal registration symbols together identify said orientation.
- [0135] Optionally, said orientation is one of four possible orientations, said orientation being identifiable via a pair of 1-bit orthogonal direction components.
- [0136] Optionally, each tag is defined by a plurality of contiguous cells
- [0137] Optionally, each registration symbol further identifies:
 - [0138] a translation of said cell relative to a tag containing said cell.
- [0139] Optionally, each tag comprises N cells, and at least N first registration symbols form a first direction code with minimum distance N , wherein N is an integer having a value of at least 4.
- [0140] Optionally, at least N second registration symbols form a second direction code with minimum distance N , wherein N is an integer having a value of at least 4.
- [0141] Optionally, said cells are arranged such that any tag-sized portion of said coding pattern is guaranteed to contain said first and second direction codes.
- [0142] Optionally, each registration symbol further identifies a flag for said tag.
- [0143] Optionally, said processor is further configured for:
 - [0144] identifying a position using the decoded tag data.
- [0145] In a fifth aspect the present invention provides a substrate having a coding pattern disposed on a surface thereof, said coding pattern comprising:
 - [0146] a plurality of target elements defining a target grid, said target grid comprising a plurality of cells, wherein neighboring cells share target elements;
 - [0147] a plurality of data elements contained in each cell; and

- [0148] a plurality of tags, each tag being defined by a plurality of contiguous cells, each tag comprising respective tag data encoded by data elements,
- [0149] wherein each cell comprises at least one registration symbol encoded by a respective set of said data elements, said set of data elements identifying a translation of said cell relative to a tag containing said cell,
- [0150] wherein each set of data elements maps to a first translation code symbol value when read in a first orientation, and maps to a second translation code symbol value when read in a second orientation which is different from said first orientation, such that said translation of said cell relative to said tag is identifiable in either of said first or second orientations.
- [0151] Optionally, said second orientation is rotated 180 degrees from said first orientation.
- [0152] Optionally, said set of data elements is represented by multi-pulse position modulation.
- [0153] Optionally, said set of data elements consists of m macrodots, each of said macrodots occupying a respective position from a plurality of predetermined possible positions p within said cell, the respective positions of said macrodots representing one of a plurality of possible registration symbol values for said registration symbol.
- [0154] Optionally, m is 2 or more and $p > m$.
- [0155] Optionally, m is 2 and p is 6 so as to provide 15 possible registration symbol values.
- [0156] Optionally, a plurality of said registration symbol values are mapped to each translation code symbol value.
- [0157] Optionally, said second orientation reverses each registration symbol value with respect to said first orientation.
- [0158] Optionally, each tag contains an odd number of cells aligned in a row or column, and wherein a registration symbol contained in a central cell of said row or column is represented by a registration symbol value which maps to identical first and second translation code symbol values.
- [0159] Optionally, each tag contains a plurality of cells aligned in a row or column, each row or column having a first cell at one end and a second cell at an opposite end, said first cell containing a first registration symbol represented by a first registration symbol value which maps to a first translation symbol code value in said first orientation, said second cell containing a second registration symbol represented by a second registration symbol value which maps to a second translation code symbol value in said first orientation, wherein said first translation code symbol value and said second translation code symbol value are interchanged in said second orientation.
- [0160] Optionally, each registration symbol further identifies at least one of:
- [0161] an orientation of a layout of said tag data with respect to said target grid;
 - [0162] a direction component of said orientation; and
 - [0163] a flag code.
- [0164] Optionally, each cell comprises first and second registration symbols, said first registration symbol identifying a first orthogonal translation of said cell, said second registration symbol identifying a second orthogonal translation of said cell.
- [0165] Optionally, each tag is square and comprises M^2 contiguous square cells, wherein M is an integer having a value of at least 2.
- [0166] Optionally, M registration symbols in a row of M cells define a cyclic position code having minimum distance M , said code being defined by a first translation codeword.
- [0167] Optionally, M registration symbols in a column of M cells define a cyclic position code having minimum distance M , said code being defined by a second translation codeword.
- [0168] Optionally, each tag comprises N cells, and at least N registration symbols form a third translation codeword with minimum distance N , wherein N is an integer having a value of at least 4.
- [0169] Optionally, any tag-sized portion of said coding pattern is guaranteed to contain at least N registration symbols, thereby capturing said third translation codeword.
- [0170] Optionally, said tag data is encoded by one or more Reed-Solomon symbols.
- [0171] Optionally, each cell defines a symbol group, each symbol group comprising a plurality of Reed-Solomon symbols encoded by a plurality of said data elements.
- [0172] Optionally, said tag data is encoded as a local codeword comprised of a set of said Reed-Solomon symbols.
- [0173] In a sixth aspect the present invention provides a method of imaging a coding pattern disposed on a surface of a substrate, said method comprising the steps of:
- [0174] (a) capturing an image of a portion of said coding pattern, said coding pattern comprising:
 - [0175] a plurality of target elements defining a target grid, said target grid comprising a plurality of cells, wherein neighboring cells share target elements;
 - [0176] a plurality of data elements contained in each cell; and
 - [0177] a plurality of tags, each tag being defined by a plurality of contiguous cells, each tag comprising respective tag data encoded by data elements,
 - [0178] wherein each cell comprises at least one registration symbol encoded by a respective set of said data elements, said set of data elements identifying a translation of said cell relative to a tag containing said cell;
 - [0179] (b) sampling one or more registration symbols contained in said imaged portion;
 - [0180] (c) mapping each set of data elements to a first translation code symbol value when read in a first orientation or a second translation symbol code value when read in a second orientation;
 - [0181] (d) determining the translation from the mapped set of data elements; and
 - [0182] (e) using the translation to sample and decode said tag data.
- [0183] Optionally, second orientation is rotated 180 degrees from said first orientation.
- [0184] Optionally, said set of data elements is represented by multi-pulse position modulation.
- [0185] Optionally, said set of data elements consists of m macrodots, each of said macrodots occupying a respective position from a plurality of predetermined possible positions p within said cell, the respective positions of said macrodots representing one of a plurality of possible registration symbol values for said registration symbol.
- [0186] Optionally, m is 2 and p is 6 so as to provide 15 possible registration symbol values.
- [0187] Optionally, a plurality of said registration symbol values are mapped to each translation code value.
- [0188] Optionally, said second orientation reverses each registration symbol value with respect to said first orientation.

[0189] Optionally, each tag contains an odd number of cells aligned in a row or column, and wherein a registration symbol contained in a central cell of said row or column is represented by a registration symbol value which maps to identical first and second translation code symbol values.

[0190] Optionally, each tag contains a plurality of cells aligned in a row or column, each row or column having a first cell at one end and a second cell at an opposite end, said first cell containing a first registration symbol represented by a first registration symbol value which maps to a first translation symbol code value in said first orientation, said second cell containing a second registration symbol represented by a second registration symbol value which maps to a second translation code symbol value in said first orientation, wherein said first translation code symbol value and said second translation code symbol value are interchanged in said second orientation.

[0191] Optionally, the method further comprising the step of decoding, from each registration symbol, at least one of:

[0192] an orientation of a layout of said tag data with respect to said target grid;

[0193] a direction component of said orientation; and

[0194] a flag code.

[0195] In another aspect the present invention provides a system for imaging a coding pattern disposed on a surface of a substrate, said system comprising:

[0196] (A) said substrate, wherein said coding pattern comprises:

[0197] a plurality of target elements defining a target grid, said target grid comprising a plurality of cells, wherein neighboring cells share target elements;

[0198] a plurality of data elements contained in each cell; and

[0199] a plurality of tags, each tag being defined by a plurality of contiguous cells, each tag comprising respective tag data encoded by data elements,

[0200] wherein each cell comprises at least one registration symbol encoded by a respective set of said data elements, said set of data elements identifying a translation of said cell relative to a tag containing said cell; and

[0201] (B) an optical reader comprising:

[0202] an image sensor for capturing an image of a portion of said coding pattern; and

[0203] a processor configured for:

[0204] (i) sampling one or more registration symbols contained in said imaged portion;

[0205] (ii) mapping each set of data elements to a first translation code symbol value when read in a first orientation or a second translation code symbol value when read in a second orientation;

[0206] (iii) determining the translation from the mapped set of data elements; and

[0207] (iv) using the translation to sample and decode said tag data.

[0208] Optionally, second orientation is rotated 180 degrees from said first orientation.

[0209] Optionally, said set of data elements is represented by multi-pulse position modulation.

[0210] Optionally, said set of data elements consists of m macrodots, each of said macrodots occupying a respective position from a plurality of predetermined possible positions p within said cell, the respective positions of said macrodots

representing one of a plurality of possible registration symbol values for said registration symbol.

[0211] Optionally, m is 2 or more and $p > m$.

[0212] Optionally, a plurality of said registration symbol values are mapped to each translation code value.

[0213] Optionally, said second orientation reverses each registration symbol value with respect to said first orientation.

[0214] Optionally, each tag contains an odd number of cells aligned in a row or column, and wherein a registration symbol contained in a central cell of said row or column is represented by a registration symbol value which maps to identical first and second translation code symbol values.

[0215] Optionally, each tag contains a plurality of cells aligned in a row or column, each row or column having a first cell at one end and a second cell at an opposite end, said first cell containing a first registration symbol represented by a first registration symbol value which maps to a first translation symbol code value in said first orientation, said second cell containing a second registration symbol represented by a second registration symbol value which maps to a second translation code symbol value in said first orientation, wherein said first translation code symbol value and said second translation code symbol value are interchanged in said second orientation.

[0216] Optionally, said processor is further configured for decoding, from each registration symbol, at least one of:

[0217] an orientation of a layout of said tag data with respect to said target grid;

[0218] a direction component of said orientation; and

[0219] a flag code.

BRIEF DESCRIPTION OF DRAWINGS

[0220] Preferred and other embodiments of the invention will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

[0221] FIG. 1 is a schematic of a the relationship between a sample printed netpage and its online page description;

[0222] FIG. 2 shows an embodiment of basic netpage architecture with various alternatives for the relay device;

[0223] FIG. 3 shows the structure of a tag;

[0224] FIG. 4 shows a group of twelve data symbols and four targets;

[0225] FIG. 5 shows the layout of a 2-6 PPM and 3-6 PPM data symbol;

[0226] FIG. 6 shows the spacing of macrodot positions;

[0227] FIG. 7 shows the layout of a 2-6 PPM registration symbol;

[0228] FIG. 8 shows a semi-replicated x-coordinate codeword X;

[0229] FIG. 9 shows a semi-replicated y-coordinate codeword Y;

[0230] FIG. 10 shows common codewords A, B, C and D, with codeword A shown in bold outline;

[0231] FIG. 11 shows an optional codeword E;

[0232] FIG. 12 shows the layout of a complete tag;

[0233] FIG. 13 shows the layout of a Reed-Solomon codeword;

[0234] FIG. 14 is a flowchart of image processing;

[0235] FIG. 15 shows a nib and elevation of the pen held by a user;

[0236] FIG. 16 shows the pen held by a user at a typical incline to a writing surface;

[0237] FIG. 17 is a lateral cross section through the pen;

[0238] FIG. 18A is a bottom and nib end partial perspective of the pen;

[0239] FIG. 18B is a bottom and nib end partial perspective with the fields of illumination and field of view of the sensor window shown in dotted outline;

[0240] FIG. 19 is a longitudinal cross section of the pen;

[0241] FIG. 20A is a partial longitudinal cross section of the nib and barrel molding;

[0242] FIG. 20B is a partial longitudinal cross section of the IR LED's and the barrel molding;

[0243] FIG. 21 is a ray trace of the pen optics adjacent a sketch of the ink cartridge;

[0244] FIG. 22 is a side elevation of the lens;

[0245] FIG. 23 is a side elevation of the nib and the field of view of the optical sensor; and

[0246] FIG. 24 is a block diagram of the pen electronics.

DETAILED DESCRIPTION OF PREFERRED AND OTHER EMBODIMENTS

1.1 Netpage System Architecture

[0247] In a preferred embodiment, the invention is configured to work with the netpage networked computer system, a detailed overview of which follows. It will be appreciated that not every implementation will necessarily embody all or even most of the specific details and extensions discussed below in relation to the basic system. However, the system is described in its most complete form to reduce the need for external reference when attempting to understand the context in which the preferred embodiments and aspects of the present invention operate.

[0248] In brief summary, the preferred form of the netpage system employs a computer interface in the form of a mapped surface, that is, a physical surface which contains references to a map of the surface maintained in a computer system. The map references can be queried by an appropriate sensing device. Depending upon the specific implementation, the map references may be encoded visibly or invisibly, and defined in such a way that a local query on the mapped surface yields an unambiguous map reference both within the map and among different maps. The computer system can contain information about features on the mapped surface, and such information can be retrieved based on map references supplied by a sensing device used with the mapped surface. The information thus retrieved can take the form of actions which are initiated by the computer system on behalf of the operator in response to the operator's interaction with the surface features.

[0249] In its preferred form, the netpage system relies on the production of, and human interaction with, netpages. These are pages of text, graphics and images printed on ordinary paper, but which work like interactive webpages. Information is encoded on each page using ink which is substantially invisible to the unaided human eye. The ink, however, and thereby the coded data, can be sensed by an optically imaging sensing device and transmitted to the netpage system. The sensing device may take the form of a clicker (for clicking on a specific position on a surface), a pointer having a stylus (for pointing or gesturing on a surface using pointer strokes), or a pen having a marking nib (for marking a surface with ink when pointing, gesturing or writing on the surface). References herein to "pen" or "netpage pen" are provided by

way of example only. It will, of course, be appreciated that the pen may take the form of any of the sensing devices described above.

[0250] In one embodiment, active buttons and hyperlinks on each page can be clicked with the sensing device to request information from the network or to signal preferences to a network server. In one embodiment, text written by hand on a netpage is automatically recognized and converted to computer text in the netpage system, allowing forms to be filled in. In other embodiments, signatures recorded on a netpage are automatically verified, allowing e-commerce transactions to be securely authorized. In other embodiments, text on a netpage may be clicked or gestured to initiate a search based on keywords indicated by the user.

[0251] As illustrated in FIG. 1, a printed netpage 1 can represent an interactive form which can be filled in by the user both physically, on the printed page, and "electronically", via communication between the pen and the netpage system. The example shows a "Request" form containing name and address fields and a submit button. The netpage 1 consists of graphic data 2, printed using visible ink, and a surface coding pattern 3 superimposed with the graphic data. The surface coding pattern 3 comprises a collection of tags 4. One such tag 4 is shown in the shaded region of FIG. 1, although it will be appreciated that contiguous tags 4, defined by the coding pattern 3, are densely tiled over the whole netpage 1.

[0252] The corresponding page description 5, stored on the netpage network, describes the individual elements of the netpage. In particular it describes the type and spatial extent (zone) of each interactive element (i.e. text field or button in the example), to allow the netpage system to correctly interpret input via the netpage. The submit button 6, for example, has a zone 7 which corresponds to the spatial extent of the corresponding graphic 8.

[0253] As illustrated in FIG. 2, a netpage sensing device 400, such as the pen described in Section 3, works in conjunction with a netpage relay device 601, which is an Internet-connected device for home, office or mobile use. The pen 400 is wireless and communicates securely with the netpage relay device 601 via a short-range radio link 9. In an alternative embodiment, the netpage pen 400 utilizes a wired connection, such as a USB or other serial connection, to the relay device 601.

[0254] The relay device 601 performs the basic function of relaying interaction data to a page server 10, which interprets the interaction data. As shown in FIG. 2, the relay device 601 may, for example, take the form of a personal computer 601a, a netpage printer 601b or some other relay 601c (e.g. personal computer or mobile phone incorporating a web browser).

[0255] The netpage printer 601b is able to deliver, periodically or on demand, personalized newspapers, magazines, catalogs, brochures and other publications, all printed at high quality as interactive netpages. Unlike a personal computer, the netpage printer is an appliance which can be, for example, wall-mounted adjacent to an area where the morning news is first consumed, such as in a user's kitchen, near a breakfast table, or near the household's point of departure for the day. It also comes in tabletop, desktop, portable and miniature versions. Netpages printed on-demand at their point of consumption combine the ease-of-use of paper with the timeliness and interactivity of an interactive medium.

[0256] Alternatively, the netpage relay device 601 may be a portable device, such as a mobile phone or PDA, a laptop or desktop computer, or an information appliance connected to

a shared display, such as a TV. If the relay device **601** is not a netpage printer **601b** which prints netpages digitally and on demand, the netpages may be printed by traditional analog printing presses, using such techniques as offset lithography, flexography, screen printing, relief printing and rotogravure, as well as by digital printing presses, using techniques such as drop-on-demand inkjet, continuous inkjet, dye transfer, and laser printing.

[0257] As shown in FIG. 2, the netpage sensing device **400** interacts with a portion of the tag pattern on a printed netpage **1**, or other printed substrate such as a label of a product item **251**, and communicates, via a short-range radio link **9**, the interaction to the relay device **601**. The relay **601** sends corresponding interaction data to the relevant netpage page server **10** for interpretation. Raw data received from the sensing device **400** may be relayed directly to the page server **10** as interaction data. Alternatively, the interaction data may be encoded in the form of an interaction URI and transmitted to the page server **10** via a user's web browser **601c**. The web browser **601c** may then receive a URI from the page server **10** and access a webpage via a webserver **201**. In some circumstances, the page server **10** may access application computer software running on a netpage application server **13**.

[0258] The netpage relay device **601** can be configured to support any number of sensing devices, and a sensing device can work with any number of netpage relays. In the preferred implementation, each netpage sensing device **400** has a unique identifier. This allows each user to maintain a distinct profile with respect to a netpage page server **10** or application server **13**.

[0259] Digital, on-demand delivery of netpages **1** may be performed by the netpage printer **601b**, which exploits the growing availability of broadband Internet access. Netpage publication servers **14** on the netpage network are configured to deliver print-quality publications to netpage printers. Periodical publications are delivered automatically to subscribing netpage printers via pointcasting and multicasting Internet protocols. Personalized publications are filtered and formatted according to individual user profiles.

[0260] A netpage pen may be registered with a netpage registration server **11** and linked to one or more payment card accounts. This allows e-commerce payments to be securely authorized using the netpage pen. The netpage registration server compares the signature captured by the netpage pen with a previously registered signature, allowing it to authenticate the user's identity to an e-commerce server. Other biometrics can also be used to verify identity. One version of the netpage pen includes fingerprint scanning, verified in a similar way by the netpage registration server.

1.2 Netpages

[0261] Netpages are the foundation on which a netpage network is built. They provide a paper-based user interface to published information and interactive services.

[0262] As shown in FIG. 1, a netpage consists of a printed page (or other surface region) invisibly tagged with references to an online description **5** of the page. The online page description **5** is maintained persistently by the netpage page server **10**. The page description describes the visible layout and content of the page, including text, graphics and images. It also describes the input elements on the page, including buttons, hyperlinks, and input fields. A netpage allows markings made with a netpage pen on its surface to be simultaneously captured and processed by the netpage system.

[0263] Multiple netpages (for example, those printed by analog printing presses) can share the same page description. However, to allow input through otherwise identical pages to be distinguished, each netpage may be assigned a unique page identifier. This page ID has sufficient precision to distinguish between a very large number of netpages.

[0264] Each reference to the page description **5** is repeatedly encoded in the netpage pattern. Each tag (and/or a collection of contiguous tags) identifies the unique page on which it appears, and thereby indirectly identifies the page description **5**. Each tag also identifies its own position on the page. Characteristics of the tags are described in more detail below.

[0265] Tags are typically printed in infrared-absorptive ink on any substrate which is infrared-reflective, such as ordinary paper, or in infrared fluorescing ink. Near-infrared wavelengths are invisible to the human eye but are easily sensed by a solid-state image sensor with an appropriate filter.

[0266] A tag is sensed by a 2D area image sensor in the netpage sensing device, and the tag data is transmitted to the netpage system via the nearest netpage relay device **601**. The pen **400** is wireless and communicates with the netpage relay device **601** via a short-range radio link. It is important that the pen recognize the page ID and position on every interaction with the page, since the interaction is stateless. Tags are error-correctably encoded to make them partially tolerant to surface damage.

[0267] The netpage page server **10** maintains a unique page instance for each unique printed netpage, allowing it to maintain a distinct set of user-supplied values for input fields in the page description **5** for each printed netpage **1**.

2. Netpage Tags

2.1 Tag Data Content

[0268] Each tag **4** identifies an absolute location of that tag within a region of a substrate.

[0269] Each interaction with a netpage should also provide a region identity together with the tag location. In a preferred embodiment, the region to which a tag refers coincides with an entire page, and the region ID is therefore synonymous with the page ID of the page on which the tag appears. In other embodiments, the region to which a tag refers can be an arbitrary subregion of a page or other surface. For example, it can coincide with the zone of an interactive element, in which case the region ID can directly identify the interactive element.

[0270] As described in the Applicant's previous applications (e.g. U.S. Pat. No. 6,832,717), the region identity may be encoded discretely in each tag **4**. As will be described in more detail below, the region identity may be encoded by a plurality of contiguous tags in such a way that every interaction with the substrate still identifies the region identity, even if a whole tag is not in the field of view of the sensing device.

[0271] Each tag **4** should preferably identify an orientation of the tag relative to the substrate on which the tag is printed. Orientation data read from a tag enables the rotation (yaw) of the pen **101** relative to the substrate to be determined

[0272] A tag **4** may also encode one or more flags which relate to the region as a whole or to an individual tag. One or more flag bits may, for example, signal a sensing device to provide feedback indicative of a function associated with the immediate area of the tag, without the sensing device having

to refer to a description of the region. A netpage pen may, for example, illuminate an “active area” LED when in the zone of a hyperlink.

[0273] A tag **4** may also encode a digital signature or a fragment thereof. Tags encoding (partial) digital signatures are useful in applications where it is required to verify a product’s authenticity. Such applications are described in, for example, US Publication No. 2007/0108285, the contents of which is herein incorporated by reference. The digital signature may be encoded in such a way that it can be retrieved from every interaction with the substrate. Alternatively, the digital signature may be encoded in such a way that it can be assembled from a random or partial scan of the substrate.

[0274] It will, of course, be appreciated that other types of information (e.g. tag size etc) may also be encoded into each tag or a plurality of tags, as will be explained in more detail below.

2.2 General Tag Structure

[0275] As described above in connection with FIG. 1, the netpage surface coding generally consists of a dense planar tiling of tags. In the present invention, each tag **4** is represented by a coding pattern which contains two kinds of elements. Referring to FIGS. 3 and 4, the first kind of element is a target element. Target elements in the form of target dots **301** allow a tag **4** to be located in an image of a coded surface, and allow the perspective distortion of the tag to be inferred. The second kind of element is a data element in the form of a macrodot **302** (see FIG. 6). The macrodots **302** encode data values. As described in the Applicant’s earlier disclosures (e.g. U.S. Pat. No. 6,832,717), the presence or absence of a macrodot was used to represent a binary bit. However, the tag structure of the present invention encodes a data value using multi-pulse position modulation, which is described in more detail in Section 2.3.

[0276] The coding pattern **3** is represented on the surface in such a way as to allow it to be acquired by an optical imaging system, and in particular by an optical system with a narrow-band response in the near-infrared. The pattern **3** is typically printed onto the surface using a narrowband near-infrared ink.

[0277] FIG. 3 shows the structure of a complete tag **4** with target elements **301** shown. The tag **4** is square and contains sixteen target elements. Those target elements **301** located at the edges and corners of the tag (twelve in total) are shared by adjacent tags and define the perimeter of the tag. In contrast with the Applicant’s previous tag designs, the high number of target elements **301** advantageously facilitates accurate determination of a perspective distortion of the tag **4** when it is imaged by the sensing device **101**. This improves the accuracy of tag sensing and, ultimately, position determination.

[0278] The tag **4** consists of a square array of nine symbol groups **303**. Symbol groups **303** are demarcated by the target elements **301** so that each symbol group is contained within a square defined by four target elements. Adjacent symbol groups **303** are contiguous and share targets.

[0279] Since the target elements **301** are all identical, they do not demarcate one tag from its adjacent tags. Viewed purely at the level of target elements, only symbol groups **303**, which define cells of a target grid, can be distinguished—the tags **4** themselves are indistinguishable by viewing only the target elements. Hence, tags **4** must be aligned with the target grid as part of tag decoding.

[0280] The tag **4** is designed to allow all tag data, with the exception of an embedded data object (see Section 2.9.3), to

be recovered from an imaging field of view substantially the size of the tag. This implies that any data unique to the tag **4** must appear four times within the tag—i.e. once in each quadrant or quarter; any data unique to a column or row of tags must appear twice within the tag—i.e. once in each horizontal half or vertical half of the tag respectively; and any data common to a set of tags needs to appear once within the tag.

2.3 Symbol Groups

[0281] As shown in FIG. 4, each of the nine symbol groups **303** comprises twelve data symbols **304**, each data symbol being part of a codeword. In addition, each symbol group **303** comprises a pair of registration symbols—a vertical registration symbol (‘VRS’) and a horizontal registration symbol (‘HRS’). These allow the orientation and/or translation of the tag in the field of view to be determined. Translation refers to the translation of tag(s) relative to the symbol groups **303** in the field of view. In other words, the registration symbols enable alignment of the ‘invisible’ tags with the target grid.

[0282] Each data symbol **304** is a multi-pulse position modulated (PPM) data symbol. Typically, each PPM data symbol **304** encodes a single 4-bit Reed-Solomon symbol using either 2 or 3 macrodots in any of 6 positions { $p_0, p_1, p_2, p_3, p_4, p_5$ }, i.e. using 2-6 or 3-6 pulse-position modulation (PPM). However, it will be appreciated that other forms of multi-PPM encoding are equally possible.

[0283] 3-6 PPM has a range of 20 codes, or 4.3 bits, and is used for Reed-Solomon redundancy symbols. 2-6 PPM has a range of 15 codes, or 3.9 bits, and is used for Reed-Solomon data symbols. 4-bit Reed-Solomon data symbols are converted to base 15 prior to encoding to reduce the number of required codes per symbol to 15.

[0284] FIG. 5 shows the layout for a 2-6 PPM or 3-6 PPM data symbol **304**.

[0285] Table 1 defines the mapping from 2-6 PPM symbol values to Reed-Solomon symbol values.

TABLE 1

2-6 PPM to Reed-Solomon symbol mapping	
2-6 PPM symbol value (p_5-p_0)	Corresponding Reed-Solomon symbol value (base 15)
000011	0
000101	1
000110	2
001001	3
001010	4
001100	5
010001	6
010010	7
010100	8
011000	9
100001	a
100010	b
100100	c
101000	d
110000	e

[0286] Table 2 defines the mapping from 3-6 PPM symbol values to Reed-Solomon symbol values. Unused symbol values can be treated as erasures.

TABLE 2

3-6 PPM to Reed-Solomon symbol mapping	
3-6 PPM symbol value (p ₅ p ₀)	Corresponding Reed-Solomon symbol value (base 16)
000111	unused
001011	unused
001101	0
001110	1
010011	2
010101	3
010110	4
011001	5
011010	6
011100	7
100011	8
100101	9
100110	a
101001	b
101010	c
101100	d
110001	e
110010	f
110100	unused
111000	unused

2.4 Targets and Macrodots

[0287] The spacing of macrodots **302** in both dimensions, as shown in FIG. 6, is specified by the parameter *s*. It has a nominal value of 127 μm , based on 8 dots printed at a pitch of 1600 dots per inch.

[0288] Only macrodots **302** are part of the representation of a symbol **304** in the pattern. The outline of a symbol **304** is shown in, for example, FIGS. 3 and 4 merely to elucidate more clearly the structure of a tag **4**.

[0289] A macrodot **302** is nominally square with a nominal size of ($\frac{1}{8}$) *s*. However, it is allowed to vary in size by $\pm 10\%$ according to the capabilities of the device used to produce the pattern.

[0290] A target **301** is nominally circular with a nominal diameter of ($\frac{1}{2}$) *s*. However, it is allowed to vary in size by $\pm 10\%$ according to the capabilities of the device used to produce the pattern.

[0291] Each symbol group **303** has a width of 10 *s*. Therefore, each tag **4** has a width of 30 *s* and a length of 30 *s*. However, it should be noted from FIG. 3 that the tag **4** is configured so that some data symbols **304A** extend beyond the perimeter edge of the tag **4** by one macrodot unit (1 *s*), and interlock with complementary symbol groups **304B** from adjacent tags. This arrangement provides a tessellated pattern of data symbols **304** within the target grid. From a data acquisition standpoint, tessellation of data symbols in this way increases the effective length of each tag **4** by one macrodot unit.

[0292] The macrodot spacing, and therefore the overall scale of the tag pattern, is allowed to vary by 127 μm and 120 μm according to the capabilities of the device used to produce the pattern. Any deviation from the nominal scale is recorded in each tag (in a tag size ID field) to allow accurate generation of position samples.

[0293] These tolerances are independent of one another. They may be refined with reference to particular printer characteristics.

2.5 Field of View

[0294] As mentioned above, the tag **4** is designed to allow all tag data to be recovered from an imaging field of view roughly the size of the tag. Any data common to a set of contiguous tags only needs to appear once within each tag, since fragments of the common data can be recovered from adjacent tags. Any data common only to a column or row of tags must appear twice within the tag—i.e. once in each horizontal half or vertical half of the tag respectively. And any data unique to the tag must appear four times within the tag—i.e. once in each quadrant.

[0295] Although data which is common to a set of tags, in one or both spatial dimensions, may be decoded from fragments from adjacent tags, pulse-position modulated values are best decoded from spatially-coherent samples, since this allows raw sample values to be compared without first being normalized. This implies that the field of view must be large enough to contain two complete copies of each such pulse-position modulated value. The tag is designed so that the maximum extent of a pulse-position modulated value is three macrodots. Making the field of view at least as large as the tag plus three macrodot units guarantees that pulse-position modulated values can be coherently sampled.

[0296] The only exceptions are the translation codes described in the next section, which are four macrodot units long. However, these are highly redundant and the loss of up to four symbols at the edge of the field of view is not a problem.

2.6 Encoded Codes and Codewords

[0297] In this following section (Section 2.6), each symbol in FIGS. 8 to 12 is shown with a unique label. The label consists of an alphabetic prefix which identifies which codeword the symbol is part of, and a numeric suffix which indicates the index of the symbol within the codeword. For simplicity only data symbols **304** are shown, not registration symbols.

[0298] Although some symbol labels are shown rotated to indicate the symmetry of the layout of certain codewords, the layout of each symbol is determined by its position within a symbol group and not by the rotation of the symbol label (as described in, for example, the Applicant's US Publication No. 2006/146069).

2.6.1 Registration Symbols

[0299] Each registration symbol is encoded using 2-6 PPM. FIG. 7 shows the layout of the registration symbol.

[0300] As shown in FIG. 4, the horizontal and vertical registration symbols each appear once within a symbol group. The registration symbols of an entire tag typically indicate the vertical and horizontal translation of the tag by coding two orthogonal translation codes, and the orientation of the tag by coding two orthogonal direction codes.

[0301] Each registration symbol also encodes a one-bit symbol of a flag code (see Section 2.6.2).

[0302] Table 3 defines the mapping from 2-6 PPM registration symbol values to flag code, direction code and translation code symbol values.

TABLE 3

2-6 PPM registration symbol values to flag code, direction code and translation code symbol mapping			
2-6 PPM symbol value {p ₅ -p ₀ }	flag code symbol value	direction code symbol value	translation code symbol value
001, 001	0	0	0
000, 011	1		
100, 010	0	1	
011, 000	1		
001, 010	0	0	1
000, 101	1		
010, 100	0	1	
101, 000	1		
010, 001	0	0	2
000, 110	1		
100, 100	0	1	
110, 000	1		
001, 100		unused	
010, 010			
100, 001			

[0303] Each row of symbol groups and each column of symbol groups encodes a three-symbol 3-ary cyclic position code. (The Applicant's cyclic position codes are described in U.S. Pat. No. 7,082,562, the contents of which is herein incorporated by reference). The code consists of the codeword (0, 1, 2) and its cyclic shifts. The code has a minimum distance of 3, allowing a single symbol error to be corrected. The codes of an entire tag form a code with a minimum distance of 9, allowing 4 symbol errors to be corrected. If additional symbols are visible within the field of view then they can be used for additional redundancy.

[0304] The translation code symbol in the middle of the codeword (i.e. 1) is mapped to a set of 2-6 PPM symbol values that are each other's reverse, while the two translation code symbols at the ends of the codeword (i.e. 0 and 2) are each mapped to a set of 2-6 PPM symbol values that are the reverses of the 2-6 PPM symbol values in the other set. Thus a 0 read upside-down (i.e. rotated 180 degrees) becomes a 2, and vice versa, while a 1 read upside-down remains a 1. This allows translation to be determined independently of rotation.

[0305] Each 2-6 PPM symbol value and its reverse map to opposite direction code symbol values. The vertical registration symbols of an entire tag encode 9 symbols of a vertical direction code. This has a minimum distance of 9, allowing 4 symbol errors to be corrected. The horizontal registration symbols of an entire tag encode 9 symbols of a horizontal direction code. This has a minimum distance of 9, allowing 4 symbol errors to be corrected. If additional symbols are visible within the field of view then they can be used for additional redundancy. Any erasures detected during decoding of a translation code can also be used during decoding of a direction code, and vice versa. Together the orthogonal direction codes allow the orientation of the tag to be determined.

[0306] The top left corner of an un-rotated tag is identified by a symbol group whose translation symbols are both zero and whose direction symbols are both zero.

2.6.2 Flag Code

[0307] The flag symbol consists of one bit of data, and is encoded in each vertical and horizontal registration symbol, as shown in Table 3.

[0308] The flag symbol is unique to a tag and is therefore coded redundantly in each quadrant of the tag. Since the flag symbol is encoded in each registration symbol, it appears eight times within each quadrant. Eight symbols form a code with a minimum distance of 8, allowing 3 errors to be corrected. If additional symbols are visible within the field of view then they can be used for additional redundancy. Any erasures detected during decoding of translation and/or direction codes can also be used during decoding of the flag code, and vice versa.

2.6.3 Coordinate Data

[0309] The tag contains an x-coordinate codeword and a y-coordinate codeword used to encode the x and y coordinates of the tag respectively. The codewords are of a shortened 2^4 -ary (10, p) Reed-Solomon code, where p can vary from 2 to 5. The tag therefore encodes between 8 and 20 bits of information for each coordinate. This reduces to 7.8 to 19.5 bits once base-15 conversion occurs.

[0310] Each x coordinate codeword is replicated twice within the tag—in each horizontal half (“north” and “south”), and is constant within the column of tags containing the tag. Likewise, each y coordinate codeword is replicated twice within the tag—in each vertical half (“east” and “west”), and is constant within the row of tags containing the tag. This guarantees that an image of the tag pattern large enough to contain a complete tag is guaranteed to contain a complete instance of each coordinate codeword, irrespective of the alignment of the image with the tag pattern. The instance of either coordinate codeword may consist of fragments from different tags.

[0311] It should be noted that, in the present invention, some coordinate symbols are not replicated and are placed on the dividing line between the two halves of the tag. This arrangement saves tag space since there are not two complete replications of each x-coordinate codeword and each y-coordinate codeword contained in a tag. Since the field of view is at least three macrodot units larger than the tag (as discussed in Section 2.10), the coordinate symbols placed on the dividing line (having a width 2 macrodot units) are still captured when the surface is imaged. Hence, each interaction with the coded surface still provides the tag location.

[0312] The layout of the x-coordinate codeword is shown in FIG. 8. The layout of the y-coordinate codeword is shown in FIG. 9. It can be seen that x-coordinate symbols X4, X5, X6, X7, X8 and X9 are placed in a central column 310 of the tag 4, which divides the eastern half of the tag from the western half. Likewise, the y-coordinate symbols Y4, Y5, Y6, Y7, Y8 and Y9 are placed in a central row 312 of the tag 4, which divides the northern half of the tag from the southern half.

[0313] The central column 310 and central row 312 each have a width q, which corresponds to a width of 2 s, where s is the macrodot spacing.

2.6.4 Common Data

[0314] The tag contains four codewords A, B, C and D which encode information common to a set of contiguous tags in a surface region. The codewords are of a 2^4 -ary (15, 9) Reed-Solomon code. The tag therefore encodes up to 144 bits of information common to a set of contiguous tags. This reduces to 140 bits once base-15 conversion occurs.

[0315] The common codewords are replicated throughout a tagged region. This guarantees that an image of the tag pattern

large enough to contain a complete tag is guaranteed to contain a complete instance of each common codeword, irrespective of the alignment of the image with the tag pattern. The instance of each common codeword may consist of fragments from different tags.

[0316] The layout of the common codewords is shown in FIG. 10. The codewords have the same layout, rotated 90 degree relative to each other.

2.6.5 Optional Data

[0317] The tag optionally contains a codeword E. This codeword may be used to encode a secret-key signature or a fragment of an embedded data object. These are discussed further in Sections 2.9.4 and Section 2.9.3 respectively. The codeword is of a 2^4 -ary (15, 9) Reed-Solomon code.

[0318] The layout of the optional codeword is shown in FIG. 11.

2.6.6 Secret-Key Signature

[0319] The tag optionally contains an entire secret-key digital signature common to a set of contiguous tags in a surface region. The signature consists of sixteen 2^4 -ary symbols (i.e. symbol E15 is also used). The tag therefore optionally encodes up to 64 bits of secret-key signature data.

[0320] The signature is replicated throughout a tagged region. This guarantees that an image of the tag pattern large enough to contain a complete tag is guaranteed to contain a complete instance of the signature, irrespective of the alignment of the image with the tag pattern. The instance of the signature may consist of fragments from different tags.

[0321] The signature, if present, is encoded in the E codeword described in Section 2.6.5.

[0322] Digital signatures are discussed further in Section 2.9.4.

2.6.7 Complete Tag

[0323] FIG. 12 shows the layout of the data of a complete tag, with each symbol group comprising ten data symbols. The vertical and horizontal registration symbols are not shown in FIG. 12.

2.7 Reed-Solomon Encoding

2.7.1 Reed-Solomon Codes

[0324] All data is encoded using a Reed-Solomon code defined over $GF(2^4)$. The code has a natural length n of 15. The dimension k of the code is chosen to balance the error correcting capacity and data capacity of the code, which are $(n-k)/2$ and k symbols respectively.

[0325] The code may be punctured, by removing high-order redundancy symbols, to obtain a code with reduced length and reduced error correcting capacity. The code may also be shortened, by replacing high-order data symbols with zeros, to obtain a code with reduced length and reduced data capacity. Both puncturing and shortening can be used to obtain a code with particular parameters. Shortening is preferred, where possible, since this avoids the need for erasure decoding.

[0326] The code has the following primitive polynomial:

$$p(x)=x^4+x+1$$

[0327] The code has the following generator polynomial:

$$g(x) = \prod_{i=1}^{n-k} (x + \alpha^i)$$

[0328] For a detailed description of Reed-Solomon codes, refer to Wicker, S. B. and V. K. Bhargava, eds., *Reed-Solomon Codes and Their Applications*, IEEE Press, 1994.

2.7.2 Codeword Organization

[0329] As shown in FIG. 13, redundancy coordinates r_i and data coordinates d_i of the code are indexed from left to right according to the power of their corresponding polynomial terms. The symbols X_i of a complete codeword are indexed from right to left to match the bit order of the data. The bit order within each symbol is the same as the overall bit order.

2.7.3 Code Instances

[0330] Table 4 defines the parameters of the different codes used in the tag.

TABLE 4

Codeword instances					
name	description	length (n)	dimension (k)	error- correcting capacity (symbols)	data capacity ^a (bits)
X, Y	coordinate codewords (see Section 2.6.3)	10^b	5	2	19.5
			4	3	15.6
			3	3	11.7
			2	4	7.8
A, B, C, D	common codewords (see Section 2.6.4)	15	9	3	35
E	optional codeword (see Section 2.6.5)	15	9	3	35

^atakes into account symbol-wise conversion to base 15 to allow 2-6 PPM

encoding
^bshortened

2.8 Tag Coordinate Space

[0331] The tag coordinate space has two orthogonal axes labelled x and y respectively. When the positive x axis points to the right then the positive y axis points down.

[0332] The surface coding does not specify the location of the tag coordinate space origin on a particular tagged surface, nor the orientation of the tag coordinate space with respect to the surface. This information is application-specific. For example, if the tagged surface is a sheet of paper, then the application which prints the tags onto the paper may record the actual offset and orientation, and these can be used to normalize any digital ink subsequently captured in conjunction with the surface.

[0333] The position encoded in a tag is defined in units of tags. By convention, the tag position is taken to be the position of the top left target in each tag.

2.9 Tag Information Content

2.9.1 Field Definitions

[0334] Table 5 defines the information fields embedded in the surface coding.

TABLE 5

Field Definitions		
field	width (bits)	description
<u>unique to tag</u>		
active area flag	1	A flag indicating whether the area ^a immediately surrounding a tag intersects an active area.
x coordinate	7.8-19.5	The unsigned x coordinate of the tag ^b .
y coordinate	7.8-19.5	The unsigned y coordinate of the tag ^b .
common to tagged region		
encoding format	4	The format of the encoding. 0: the present encoding. Other values are reserved
region flags	12	Flags controlling the interpretation of region data (see Table 6).
coordinate precision	2	A value (p) indicating the precision of x and y coordinates according to the formula $8 + 4p$.
macrodot size ID	4	The ID of the macrodot size.
coordinate width ID	2	The ID of the width (w) of the x and y coordinates. 0: 7.8 bits 1: 11.7bits 2: 15.6 bits 3: 19.5 bits
region ID	6	The ID of the region ID space. 0: Netpage 1: EPC Other values are reserved for future use.
secret-key signature	96	The ID of the region containing the tags.
CRC (Cyclic Redundancy Check)	64	An optional secret-key signature of the region.

^athe diameter of the area, centered on the tag, is nominally 2.5 times the diagonal size of the tag; this is to accommodate the worst-case distance between the nib position and the imaged tag

^ballows a coordinate value range of 857 mm (large enough for an A1 sheet) to 28.9 km for the nominal tag size of 3.81 mm (based on the nominal macrodot size and 30 macrodots per tag)

^cCCITT CRC-16 [see ITU, Interface between Data Terminal Equipment (DTE) and Data Circuit-terminating Equipment (DCE) for terminals operating in the packet mode and connected to public data networks by dedicated circuit, ITU-T X.25 (10/96)], computed in bit order on raw codeword data (see Table 4).

[0335] An active area is an area within which any captured input should be immediately forwarded to the corresponding Netpage server **10** for interpretation. This also allows the Netpage server **10** to signal to the user that the input has had an immediate effect. Since the server has access to precise region definitions, any active area indication in the surface coding can be imprecise so long as it is inclusive.

TABLE 6

Region flags	
bit	meaning
0	Region is interactive, i.e. x and y-coordinates are present.
1	Region is active, i.e. the entire region is an active area. Otherwise active areas are identified by individual tags' active area flags.
2	Region ID is not serialized ^a .
3	Region has secret-key signature (see Section 2.9.4)
4	Region has embedded data.

TABLE 6-continued

Region flags	
bit	meaning
5	Embedded data is a public-key signature (see Sections 2.9.3 and 2.9.4).
6	Page description is associated with region is public. Otherwise page description is private.
other	Reserved for future use. Must be zero.

^aFor an EPC this means that the serial number is replaced by a layout number, to allow the package design associated with a product to vary over time (see US 2007/0108285, the contents of which is herein incorporated by reference).

2.9.2 Mapping of Fields to Codewords

[0336] Table 7 defines how the information fields map to codewords.

TABLE 7

Mapping of fields to codewords				
codeword	codeword bits	field	width	field bits
X	w-1:0	x coordinate	w	all
Y	w-1:0	y coordinate	w	all
A	15:0	CRC ^a	16	all
B	34:16	region ID	19	18:0
	3:0	encoding format	4	all
	15:4	region flags	12	all
	19:16	macrodot size ID	4	all
	21:20	coordinate width ID	2	all
	27:22	region ID space ID	6	all
C	34:28	region ID	7	25:19
	34:0	region ID	35	60:26
	all	data fragment	35	all
	all ^b	secret-key signature	64	all

^athe CRC is computed in bit order on the data portions of the A, B, C and D codewords, in that order, excluding the CRC field itself

^bentire codeword is used for data i.e. there is no redundancy

[0337] As shown in Table 7, codeword E either contains a data fragment or a secret-key signature. These are described in Section 2.9.3 and Section 2.9.4 respectively. The secret-key signature is present in a particular tag if the "region has secret-key signature" flag in the region flags is set, and the tag's active area flag is set. The data fragment is present if the "region contains embedded data" flag in the region flags is set and the tag's active area flag is not set.

[0338] When the region flags indicate that a particular codeword is absent then the codeword is not coded in the tag pattern, i.e. there are no macrodots representing the codeword. This applies to the X, Y and E codewords.

2.9.3 Embedded Data Object

[0339] If the "region contains embedded data" flag in the region flags is set then the surface coding contains embedded data. The embedded data is encoded in multiple contiguous tags' data fragments, and is replicated in the surface coding as many times as it will fit.

[0340] The embedded data is encoded in such a way that a random and partial scan of the surface coding containing the embedded data can be sufficient to retrieve the entire data. The scanning system reassembles the data from retrieved

fragments, and reports to the user when sufficient fragments have been retrieved without error.

[0341] As shown in Table 8, each block has a data capacity of 170-bits. The block data is encoded in the data fragments of a contiguous group of six tags arranged in a 3×2 rectangle.

[0342] The block parameters are as defined in Table 8. The E codeword of each tag may encode a fragment of the embedded data.

TABLE 8

parameter	Block parameters	
	value	description
w	3	The width of the block, in tags
h	2	The height of the block, in tags.
b	170	The data capacity of the block, in bits

[0343] If the E codeword of a particular tag does not contain a fragment of the embedded data, then the pen 101 can discover this implicitly by the failure of the codeword to decode, or explicitly from the tag's active area flag.

[0344] Data of arbitrary size may be encoded into a superblock consisting of a contiguous set of blocks, typically arranged in a rectangle. The size of the superblock may be encoded in each block.

[0345] The superblock is replicated in the surface coding as many times as it will fit, including partially along the edges of the surface coding.

[0346] The data encoded in the superblock may include, for example, more precise type information, more precise size information, and more extensive error detection and/or correction data.

2.9.4 Digital Signatures

[0347] As described in Section 2.6.6, a region may contain a digital signature.

[0348] If the <region has a secret-key signature> flag in the region flags is set, then the region has a secret-key digital signature. In an online environment the secret-key signature can be verified, in conjunction with the region ID, by querying a server with knowledge of the secret-key signature or the corresponding secret key.

[0349] If the region contains embedded data and the <embedded data is a public-key signature> flag in the region flag is set, then the surface coding contains an embedded public-key digital signature of the region ID.

[0350] In an online environment any number of signature fragments can be used, in conjunction with the region ID and optionally the secret-key signature, to validate the public-key signature by querying a server with knowledge of the full public-key signature or the corresponding private key.

[0351] In an offline (or online) environment the entire public-key signature can be recovered by reading multiple tags, and can then be verified using the corresponding public signature key. The actual length and type of the signature are determined from the region ID during signature validation i.e. typically from a previously-retrieved digital signature associated with a sequence of region IDs.

[0352] Digital signature verification is discussed in the Applicant's US Publication No. 2007/0108285, the contents of which are herein incorporated by reference.

2.10 Tag Imaging and Decoding

[0353] The minimum imaging field of view required to guarantee acquisition of data from an entire tag has a diameter

of 46.7 s (i.e. $((3 \times 10) + 3) \sqrt{2}$ s), allowing for arbitrary rotation and translation of the surface coding in the field of view. Notably, the imaging field of view does not have to be large enough to guarantee capture of an entire tag—the arrangement of the data symbols within each tag ensures that a any square portion of length $(1 + 3 \text{ s})$ captures the requisite information in full, irrespective of whether a whole tag is actually visible in the field-of-view. As used herein, 1 is defined as the length of a tag.

[0354] In terms of imaging the coding pattern, the imaging field-of-view is typically a circle. Accordingly, the imaging field-of-view should preferably have diameter of at least $(1 + 3 \text{ s}) \sqrt{2}$ and less than two tag diameters. Importantly, the field-of-view is not required to be at least two tag diameters, in contrast with prior art tag designs, because it is not essential in the present invention to capture an entire tag in the field of view.

[0355] The extra three macrodot units ensure that pulse-position modulated values can be decoded from spatially coherent samples. Furthermore, the extra three macrodot units ensure that all requisite data symbols can be read with each interaction. These include the coordinate symbols from a central column or row of a tag (see Section 2.6.3) having a width of 2 s, and data symbols 304A extending from the perimeter edges of each tag by one macrodot unit (1 s).

[0356] In the present context, a “tag diameter” is given to mean the length of a tag diagonal.

[0357] Given a maximum macrodot spacing of 127 microns, this gives a required field of view of 5.93 mm.

[0358] FIG. 14 shows a tag image processing and decoding process flow up to the stage of sampling and decoding the data codewords. Firstly, a raw image 802 of the tag pattern is acquired (at 800), for example via an image sensor such as a CCD image sensor, CMOS image sensor, or a scanning laser and photodiode image sensor. The raw image 802 is then typically enhanced (at 804) to produce an enhanced image 806 with improved contrast and more uniform pixel intensities. Image enhancement may include global or local range expansion, equalization, and the like. The enhanced image 806 is then typically filtered (at 808) to produce a filtered image 810. Image filtering may consist of low-pass filtering, with the low-pass filter kernel size tuned to obscure macrodots 302 but to preserve targets 301. The filtering step 808 may include additional filtering (such as edge detection) to enhance target features 301. Encoding of data codewords 304 using pulse position modulation (PPM) provides a more uniform coding pattern 3 than simple binary dot encoding (as described in, for example, U.S. Pat. No. 6,832,717). Advantageously, this helps separate targets 301 from data areas, thereby allowing more effective low-pass filtering of the PPM-encoded data compared to binary-coded data.

[0359] Following low-pass filtering, the filtered image 810 is then processed (at 812) to locate the targets 301. This may consist of a search for target features whose spatial relationship is consistent with the known geometry of the tag pattern. Candidate targets may be identified directly from maxima in the filtered image 810, or may be the subject of further characterization and matching, such as via their (binary or grayscale) shape moments (typically computed from pixels in the enhanced image 806 based on local maxima in the filtered image 810), as described in U.S. Pat. No. 7,055,739, the contents of which are herein incorporated by reference.

[0360] The identified targets **301** are then assigned (at **816**) to a target grid **818**. Each cell of the grid **818** contains a symbol group **303**, and several symbol groups will of course be visible in the image. At this stage, individual tags **4** will not be identifiable in the target grid **818**, since the targets **301** do not demarcate one tag from another.

[0361] To allow macrodot values to be sampled accurately, the perspective transform of the captured image must be inferred. Four of the targets **301** are taken to be the perspective-distorted corners of a square of known size in tag space, and the eight-degree-of-freedom perspective transform **822** is inferred (at **820**), based on solving the well-understood equations relating the four tag-space and image-space point pairs. Calculation of the 2D perspective transform is described in detail in, for example, Applicant's U.S. Pat. No. 6,832,717, the contents of which is herein incorporated by reference.

[0362] Since each image will typically contain at least 16 targets arranged in a square grid, the accuracy of calculating the 2D perspective transform is improved compared to the Applicant's previous tag designs described in, for example, U.S. Pat. No. 6,832,717. Hence, more accurate position calculation can be achieved with the tag design of the present invention.

[0363] The inferred tag-space to image-space perspective transform **822** is used to project each known macrodot position in tag space into image space. Since all bits in the tags are represented by PPM-encoding, the presence or absence of each macrodot **302** can be determined using a local intensity reference, rather than a separate intensity reference. Thus, PPM-encoding provides improved data sampling compared with pure binary encoding.

[0364] The next stage determines the translation and orientation of the tag(s), or portions thereof, in the field of view relative to the target grid **818**. Two or more orthogonal registration symbols ('VRS' and 'HRS') are sampled (at **824**), to allow decoding of the orthogonal translation codewords and the orthogonal direction codewords.

[0365] Decoding of two or more orthogonal translation codewords (at **828**) is used to determine the translation **830** of tags(s) in the field of view relative to the target grid **818**. This enables alignment of the tags **4** with the target grid **818**, thereby allowing individual tag(s), or portions thereof, to be distinguished in the coding pattern **3** in the field of view. Since each symbol group **303** contains orthogonal registration symbols, multiple translation codes can be decoded to provide robust translation determination. As described in Section 2.6.1, the translation code is a cyclic position code. Since each row and each column of a tag contains M symbol groups, the code has minimum distance MxM. This allows very robust determination of the alignment of tags **4** with the target grid **818**. The alignment needs to be both robust and accurate since there are many possible alignments when each tag **4** contains multiple symbol groups **303**.

[0366] Likewise, at least two orthogonal direction codes are decoded (at **825**) to provide the orientation **826**. As described in Section 2.6.1, since N vertical registration symbols in a tag form 30 a vertical direction code with minimum distance N, the vertical direction code is capable of correcting (N-1)/2 errors. The horizontal direction code is similarly capable of correcting (N-1)/2 errors using N horizontal registration symbols. Hence, orientation determination is very robust and capable of correcting errors, depending on the number of registration symbols sampled.

[0367] Once initial imaging and decoding has yielded the 2D perspective transform, the orientation, and the translation of tag(s) relative to the target grid, the data codewords **304** can then be sampled and decoded (at **836**) to yield the requisite decoded codewords **838**.

[0368] Decoding of the data codewords **304** typically proceeds as follows:

- [0369] sample common Reed-Solomon codewords
- [0370] decode common Reed-Solomon codewords
- [0371] verify common tag data CRC
- [0372] on decode error flag bad region ID sample
- [0373] determine encoding type, and reject unknown encoding
- [0374] determine region flags
- [0375] determine region ID
- [0376] determine x and y coordinate widths from coordinate width ID
- [0377] sample and decode x and y coordinate Reed-Solomon codewords
- [0378] determine tag x-y location from codewords
- [0379] determine nib x-y location from tag x-y location and perspective transform taking into account macrodot size (from macrodot size ID)
- [0380] sample and decode four or more flag symbols to determine active area flag
- [0381] determine active area status of nib location with reference to active area flag
- [0382] encode region ID, nib x-y location, and nib active area status in digital ink ("interaction data")
- [0383] route digital ink based on region flags

[0384] The skilled person will appreciate that the decoding sequence described above represents one embodiment of the present invention. It will, of course, be appreciated that the interaction data sent from the pen 101 to the netpage system may include other data e.g. digital signature (see Section 2.9.4), pen mode (see US 2007/125860), orientation data, pen ID, nib ID etc.

[0385] An example of interpreting interaction data, received by the netpage system from the netpage pen **101**, is discussed briefly above. A more detailed discussion of how the netpage system may interpret interaction data can be found in the Applicant's previously-filed applications (see, for example, US 2007/130117 and US 2007/108285, the contents of which are herein incorporated by reference).

3. Netpage Pen

3.1 Functional Overview

[0386] The active sensing device of the netpage system may take the form of a clicker (for clicking on a specific position on a surface), a pointer having a stylus (for pointing or gesturing on a surface using pointer strokes), or a pen having a marking nib (for marking a surface with ink when pointing, gesturing or writing on the surface). For a description of various netpage sensing devices, reference is made to U.S. Pat. No. 7,105,753; U.S. Pat. No. 7,015,901; U.S. Pat. No. 7,091,960; and US Publication No. 2006/0028459, the contents of each of which are herein incorporated by reference.

[0387] It will be appreciated that the present invention may utilize any suitable optical reader. However, the Netpage pen **400** will be described herein as one such example.

[0388] The Netpage pen **400** is a motion-sensing writing instrument which works in conjunction with a tagged

Netpage surface (see Section 2). The pen incorporates a conventional ballpoint pen cartridge for marking the surface, an image sensor and processor for simultaneously capturing the absolute path of the pen on the surface and identifying the surface, a force sensor for simultaneously measuring the force exerted on the nib, and a real-time clock for simultaneously measuring the passage of time.

[0389] While in contact with a tagged surface, as indicated by the force sensor, the pen continuously images the surface region adjacent to the nib, and decodes the nearest tag in its field of view to determine both the identity of the surface, its own instantaneous position on the surface and the pose of the pen. The pen thus generates a stream of timestamped position samples relative to a particular surface, and transmits this stream to the Netpage server 10. The sample stream describes a series of strokes, and is conventionally referred to as digital ink (DIInk). Each stroke is delimited by a pen down and a pen up event, as detected by the force sensor. More generally, any data resulting from an interaction with a Netpage, and transmitted to the Netpage server 10, is referred to herein as “interaction data”.

[0390] The pen samples its position at a sufficiently high rate (nominally 100 Hz) to allow a Netpage server to accurately reproduce hand-drawn strokes, recognize handwritten text, and verify hand-written signatures.

[0391] The Netpage pen also supports hover mode in interactive applications. In hover mode the pen is not in contact with the paper and may be some small distance above the surface of the paper (or other substrate). This allows the position of the pen, including its height and pose to be reported. In the case of an interactive application the hover mode behaviour can be used to move a cursor without marking the paper, or the distance of the nib from the coded surface could be used for tool behaviour control, for example an air brush function.

[0392] The pen includes a Bluetooth radio transceiver for transmitting digital ink via a relay device to a Netpage server. When operating offline from a Netpage server the pen buffers captured digital ink in non-volatile memory. When operating online to a Netpage server the pen transmits digital ink in real time.

[0393] The pen is supplied with a docking cradle or “pod”. The pod contains a Bluetooth to USB relay. The pod is connected via a USB cable to a computer which provides communications support for local applications and access to Netpage services.

[0394] The pen is powered by a rechargeable battery. The battery is not accessible to or replaceable by the user. Power to charge the pen can be taken from the USB connection or from an external power adapter through the pod. The pen also has a power and USB-compatible data socket to allow it to be externally connected and powered while in use.

[0395] The pen cap serves the dual purpose of protecting the nib and the imaging optics when the cap is fitted and signaling the pen to leave a power-preserving state when uncapped.

3.2 Ergonomics and Layout

[0396] FIG. 15 shows a rounded triangular profile gives the pen 400 an ergonomically 1.5 comfortable shape to grip and use the pen in the correct functional orientation. It is also a practical shape for accommodating the internal components.

A normal pen-like grip naturally conforms to a triangular shape between thumb 402, index finger 404 and middle finger 406.

[0397] As shown in FIG. 16, a typical user writes with the pen 400 at a nominal pitch of about 30 degrees from the normal toward the hand 408 when held (positive angle) but seldom operates a pen at more than about 10 degrees of negative pitch (away from the hand). The range of pitch angles over which the pen 400 is able to image the pattern on the paper has been optimized for this asymmetric usage. The shape of the pen 400 helps to orient the pen correctly in the user's hand 408 and to discourage the user from using the pen “upside-down”. The pen functions “upside-down” but the allowable tilt angle range is reduced.

[0398] The cap 410 is designed to fit over the top end of the pen 400, allowing it to be securely stowed while the pen is in use. Multi colour LEDs illuminate a status window 412 in the top edge (as in the apex of the rounded triangular cross section) of the pen 400 near its top end. The status window 412 remains un-obscured when the cap is stowed. A vibration motor is also included in the pen as a haptic feedback system (described in detail below).

[0399] As shown in FIG. 17, the grip portion of the pen has a hollow chassis molding 416 enclosed by a base molding 528 to house the other components. The ink cartridge 414 for the ball point nib (not shown) fits naturally into the apex 420 of the triangular cross section, placing it consistently with the user's grip. This in turn provides space for the main PCB 422 in the centre of the pen and for the battery 424 in the base of the pen. By referring to FIG. 18A, it can be seen that this also naturally places the tag-sensing optics 426 unobtrusively below the nib 418 (with respect to nominal pitch). The nib molding 428 of the pen 400 is swept back below the ink cartridge 414 to prevent contact between the nib molding 428 and the paper surface when the pen is operated at maximum pitch.

[0400] As best shown in FIG. 18B, the imaging field of view 430 emerges through a centrally positioned IR filter/window 432 below the nib 418, and two near-infrared illumination LEDs 434, 436 emerge from the two bottom corners of the nib molding 428. Each LED 434, 436 has a corresponding illumination field 438, 440.

[0401] As the pen is hand-held, it may be held at an angle that causes reflections from one of the LED's that are detrimental to the image sensor. By providing more than one LED, the LED causing the offending reflections can be extinguished.

[0402] Specific details of the pen mechanical design can be found in US Publication No. 2006/0028459, the contents of which are herein incorporated by reference.

3.3 Pen Feedback Indications

[0403] FIG. 19 is a longitudinal cross section through the centre-line of the pen 400 (with the cap 410 stowed on the end of the pen). The pen incorporates red and green LEDs 444 to indicate several states, using colours and intensity modulation. A light pipe 448 on the LEDs 444 transmit the signal to the status indicator window 412 in the tube molding 416. These signal status information to the user including power-on, battery level, untransmitted digital ink, network connection on-line, fault or error with an action, detection of an key “active area” flag, detection of an “embedded data” flag, further data sampling to required to acquire embedded data, acquisition of embedded data completed etc.

[0404] A vibration motor **446** is used to haptically convey information to the user for important verification functions during transactions. This system is used for important interactive indications that might be missed due to inattention to the LED indicators **444** or high levels of ambient light. The haptic system indicates to the user when:

[0405] The pen wakes from standby mode

[0406] There is an error with an action

[0407] To acknowledge a transaction

3.4 Pen Optics

[0408] The pen incorporates a fixed-focus narrowband infrared imaging system. It utilizes a camera with a short exposure time, small aperture, and bright synchronized illumination to capture sharp images unaffected by defocus blur or motion blur.

TABLE 6

Optical Specifications	
Magnification	~0.225
Focal length of lens	6.0 mm
Viewing distance	30.5 mm
Total track length	41.0 mm
Aperture diameter	0.8 mm
Depth of field	~6.5 mm
Exposure time	200 us
Wavelength	810 nm
Image sensor size	140 × 140 pixels
Pixel size	10 um
Pitch range	~15 to 45 deg
Roll range	~30 to 30 deg
Yaw range	0 to 360 deg
Minimum sampling rate	2.25 pixels per macrodot
Maximum pen velocity	0.5 m/s

¹Allowing 70 micron blur radius

²Illumination and filter

³Pitch, roll and yaw are relative to the axis of the pen

[0409] Cross sections showing the pen optics are provided in FIGS. 20A and 20B. An image of the Netpage tags printed on a surface **548** adjacent to the nib **418** is focused by a lens **488** onto the active region of an image sensor **490**. A small aperture **494** ensures the available depth of field accommodates the required pitch and roll ranges of the pen **400**.

[0410] First and second LEDs **434** and **436** brightly illuminate the surface **549** within the field of view **430**. The spectral emission peak of the LEDs is matched to the spectral absorption peak of the infrared ink used to print Netpage tags to maximize contrast in captured images of tags. The brightness of the LEDs is matched to the small aperture size and short exposure time required to minimize defocus and motion blur.

[0411] A longpass IR filter **432** suppresses the response of the image sensor **490** to any coloured graphics or text spatially coincident with imaged tags and any ambient illumination below the cut-off wavelength of the filter **432**. The transmission of the filter **432** is matched to the spectral absorption peak of the infrared ink to maximize contrast in captured images of tags. The filter also acts as a robust physical window, preventing contaminants from entering the optical assembly **470**.

3.5 Pen Imaging System

[0412] A ray trace of the optic path is shown in FIG. 21. The image sensor **490** is a CMOS image sensor with an active

region of 140 pixels squared. Each pixel is 10 μ m squared, with a fill factor of 93%. Turning to FIG. 22, the lens **488** is shown in detail. The dimensions are:

[0413] D=3 mm

[0414] R1=3.593 mm

[0415] R2=15.0 mm

[0416] X=0.8246 mm

[0417] Y=1.0 mm

[0418] Z=0.25 mm

[0419] This gives a focal length of 6.15 mm and transfers the image from the object plane (tagged surface **548**) to the image plane (image sensor **490**) with the correct sampling frequency to successfully decode all images over the specified pitch, roll and yaw ranges. The lens **488** is biconvex, with the most curved surface facing the image sensor. The minimum imaging field of view **430** required to guarantee acquisition of sufficient tag data with each interaction is dependent on the specific coding pattern. The required field of view for the coding pattern of the present invention is described in Section 2.10.

[0420] The required paraxial magnification of the optical system is defined by the minimum spatial sampling frequency of 2.25 pixels per macrodot for the fully specified tilt range of the pen **400**, for the image sensor **490** of 10 μ m pixels. Typically, the imaging system employs a paraxial magnification of 0.225, the ratio of the diameter of the inverted image at the image sensor to the diameter of the field of view at the object plane, on an image sensor **490** of minimum 128×128 pixels. The image sensor **490** however is 140×140 pixels, in order to accommodate manufacturing tolerances. This allows up to $\pm 120 \mu$ m (12 pixels in each direction in the plane of the image sensor) of misalignment between the optical axis and the image sensor axis without losing any of the information in the field of view.

[0421] The lens **488** is made from Poly-methyl-methacrylate (PMMA), typically used for injection moulded optical components. PMMA is scratch resistant, and has a refractive index of 1.49, with 90% transmission at 810 nm. The lens is biconvex to assist moulding precision and features a mounting surface to precisely mate the lens with the optical barrel molding **492**.

[0422] A 0.8 mm diameter aperture **494** is used to provide the depth of field requirements of the design.

[0423] The specified tilt range of the pen is 15.0 to 45.0 degree pitch, with a roll range of 30.0 to 30.0 degrees. Tilting the pen through its specified range moves the tilted object plane up to 6.3 mm away from the focal plane. The specified aperture thus provides a corresponding depth of field of 6.5 mm, with an acceptable blur radius at the image sensor of 16 μ m.

[0424] Due to the geometry of the pen design, the pen operates correctly over a pitch range of 33.0 to 45.0 degrees.

[0425] Referring to FIG. 23, the optical axis **550** is pitched 0.8 degrees away from the nib axis **552**. The optical axis and the nib axis converge toward the paper surface **548**. With the nib axis **552** perpendicular to the paper, the distance A between the edge of the field of view **430** closest to the nib axis and the nib axis itself is 1.2 mm.

[0426] The longpass IR filter **432** is made of CR-39, a lightweight thermoset plastic heavily resistant to abrasion and chemicals such as acetone. Because of these properties, the filter also serves as a window. The filter is 1.5 mm thick,

with a refractive index of 1.50. Each filter may be easily cut from a large sheet using a CO₂ laser cutter.

3.6 Electronics Design

[0427]

TABLE 3

Electrical Specifications	
Processor	ARM7 (Atmel AT91FR40162) running at 80 MHz with 256 kB SRAM and 2 MB flash memory
Digital ink storage capacity	5 hours of writing
Bluetooth	1.2
Compliance	
USB Compliance	1.1
Battery standby time	12 hours (cap off), >4 weeks (cap on)
Battery writing time	4 hours of cursive writing (81% pen down, assuming easy offload of digital ink)
Battery charging time	2 hours
Battery Life	Typically 300 charging cycles or 2 years (whichever occurs first) to 80% of initial capacity.
Battery Capacity/Type	~340 mAh at 3.7 V, Lithium-ion Polymer (LiPo)

[0428] FIG. 24 is a block diagram of the pen electronics. The electronics design for the pen is based around five main sections. These are:

- [0429] the main ARM7 microprocessor **574**,
- [0430] the image sensor and image processor **576**,
- [0431] the Bluetooth communications module **578**,
- [0432] the power management unit IC (PMU) **580** and
- [0433] the force sensor microprocessor **582**.

3.6.1 Microprocessor

[0434] The pen uses an Atmel AT91FR40162 microprocessor (see Atmel, *AT91 ARM Thumb Microcontrollers—AT91FR40162 Preliminary*, <http://www.keil.com/dd/docs/datashts/atmel/at91fr40162.pdf>) running at 80 MHz. The AT91FR40162 incorporates an ARM7 microprocessor, 256 kBytes of on-chip single wait state SRAM and 2 MBytes of external flash memory in a stack chip package.

[0435] This microprocessor **574** forms the core of the pen **400**. Its duties include:

- [0436] setting up the Jupiter image sensor **584**,
- [0437] decoding images of Netpage coding pattern (see Section 2.10), with assistance from the image processing features of the image sensor **584**, for inclusion in the digital ink stream along with force sensor data received from the force sensor microprocessor **582**,
- [0438] setting up the power management IC (PMU) **580**,
- [0439] compressing and sending digital ink via the Bluetooth communications module **578**, and
- [0440] programming the force sensor microprocessor **582**.

[0441] The ARM7 microprocessor **574** runs from an 80 MHz oscillator. It communicates with the Jupiter image sensor **576** using a Universal Synchronous Receiver Transmitter (USRT) **586** with a 40 MHz clock. The ARM7 **574** communicates with the Bluetooth module **578** using a Universal

Asynchronous Receiver Transmitter (UART) **588** running at 115.2 kbaud. Communications to the PMU **580** and the Force Sensor microprocessor (FSP) **582** are performed using a Low Speed Serial bus (LSS) **590**. The LSS is implemented in software and uses two of the microprocessor's general purpose IOs.

[0442] The ARM7 microprocessor **574** is programmed via its JTAG port.

3.6.2 Image Sensor

[0443] The 'Jupiter' Image Sensor **584** (see US Publication No. 2005/0024510, the contents of which are incorporated herein by reference) contains a monochrome sensor array, an analogue to digital converter (ADC), a frame store buffer, a simple image processor and a phase lock loop (PLL). In the pen, Jupiter uses the USRT's clock line and its internal PLL to generate all its clocking requirements. Images captured by the sensor array are stored in the frame store buffer. These images are decoded by the ARM7 microprocessor **574** with help from the 'Callisto' image processor contained in Jupiter. The Callisto image processor performs, inter alia, low-pass filtering of captured images (see Section 2.10 and US Publication No. 2005/0024510) before macrodot sampling and decoding by the microprocessor **574**.

[0444] Jupiter controls the strobing of two infrared LEDs **434** and **436** at the same time as its image array is exposed. One or other of these two infrared LEDs may be turned off while the image array is exposed to prevent specular reflection off the paper that can occur at certain angles.

3.6.3 Bluetooth Communications Module

[0445] The pen uses a CSR BlueCore4-External device (see CSR, *BlueCore4-External Data Sheet rev c*, 6 Sep. 2004) as the Bluetooth controller **578**. It requires an external 8 Mbit flash memory device **594** to hold its program code. The BlueCore4 meets the Bluetooth v1.2 specification and is compliant to v0.9 of the Enhanced Data Rate (EDR) specification which allows communication at up to 3 Mbps.

[0446] A 2.45 GHz chip antenna **486** is used on the pen for the Bluetooth communications.

[0447] The BlueCore4 is capable of forming a UART to USB bridge. This is used to allow USB communications via data/power socket **458** at the top of the pen **456**.

[0448] Alternatives to Bluetooth include wireless LAN and PAN standards such as IEEE 802.11 (Wi-Fi) (see IEEE, 802.11 *Wireless Local Area Networks*, <http://grouper.ieee.org/groups/802/11/index.html>), IEEE 802.15 (see IEEE, 802.15 *Working Group for WPAN*, <http://grouper.ieee.org/groups/802/15/index.html>), ZigBee (see ZigBee Alliance, <http://www.zigbee.org>), and WirelessUSB Cypress (see *WirelessUSB LR 2.4-GHz DSSS Radio SoC*, <http://www.cypress.com/cfuploads/img/products/cywusb6935.pdf>), as well as mobile standards such as GSM (see GSM Association, <http://www.gsmworld.com/index.shtml>), GPRS/EDGE, *GPRS Platform*, <http://www.gsmworld.com/technology/gprs/index.shtml>), CDMA (see CDMA Development Group, <http://eee.edg.org/>, and Qualcomm, <http://www.qualcomm.com>), and UMTS (see 3rd Generation Partnership Project (3GPP), <http://www.3gpp.org>).

3.6.4 Power Management Chip

[0449] The pen uses an Austria Microsystems AS3603 PMU **580** (see Austria Microsystems, *AS3603 Multi-Stan-*

ard Power Management Unit Data Sheet v2.0). The PMU is used for battery management, voltage generation, power up reset generation and driving indicator LEDs and the vibrator motor.

[0450] The PMU **580** communicates with the ARM7 microprocessor **574** via the LSS bus **590**.

3.6.5 Force Sensor Subsystem

[0451] The force sensor subsystem comprises a custom Hokuriku force sensor **500** (based on Hokuriku, HFD-500 *Force Sensor*, <http://www.hdk.co.jp/pdf/eng/e1381AA.pdf>), an amplifier and low pass filter **600** implemented using op-amps and a force sensor microprocessor **582**.

[0452] The pen uses a Silicon Laboratories C8051F330 as the force sensor microprocessor **582** (see Silicon Laboratories, C8051F330/1 MCUData Sheet, rev 1.1). The C8051F330 is an 8051 microprocessor with on chip flash memory, 10 bit ADC and 10 bit DAC. It contains an internal 24.5 MHz oscillator and also uses an external 32.768 kHz tuning fork.

[0453] The Hokuriku force sensor **500** is a silicon piezoresistive bridge sensor. An op-amp stage **600** amplifies and low pass (anti-alias) filters the force sensor output. This signal is then sampled by the force sensor microprocessor **582** at 5 kHz.

[0454] Alternatives to piezoresistive force sensing include capacitive and inductive force sensing (see Wacom, "Variable capacity condenser and pointer", US Patent Application 20010038384, filed 8 Nov. 2001, and Wacom, Technology, <http://www.wacom-components.com/english/tech.asp>).

[0455] The force sensor microprocessor **582** performs further (digital) filtering of the force signal and produces the force sensor values for the digital ink stream. A frame sync signal from the Jupiter image sensor **576** is used to trigger the generation of each force sample for the digital ink stream. The temperature is measured via the force sensor microprocessor's **582** on chip temperature sensor and this is used to compensate for the temperature dependence of the force sensor and amplifier. The offset of the force signal is dynamically controlled by input of the microprocessor's DAC output into the amplifier stage **600**.

[0456] The force sensor microprocessor **582** communicates with the ARM7 microprocessor **574** via the LSS bus **590**. There are two separate interrupt lines from the force sensor microprocessor **582** to the ARM7 microprocessor **574**. One is used to indicate that a force sensor sample is ready for reading and the other to indicate that a pen down/up event has occurred.

[0457] The force sensor microprocessor flash memory is programmed in-circuit by the ARM7 microprocessor **574**.

[0458] The force sensor microprocessor **582** also provides the real time clock functionality for the pen **400**. The RTC function is performed in one of the microprocessor's counter timers and runs from the external 32.768 kHz tuning fork. As a result, the force sensor microprocessor needs to remain on when the cap **472** is on and the ARM7 **574** is powered down. Hence the force sensor microprocessor **582** uses a low power LDO separate from the PMU **580** as its power source. The real time clock functionality includes an interrupt which can be programmed to power up the ARM7 **574**.

[0459] The cap switch **602** is monitored by the force sensor microprocessor **582**. When the cap assembly **472** is taken off (or there is a real time clock interrupt), the force sensor

microprocessor **582** starts up the ARM7 **572** by initiating a power on and reset cycle in the PMU **580**.

3.7 Pen Software

[0460] The Netpage pen software comprises that software running on microprocessors in the Netpage pen **400** and Netpage pod.

[0461] The pen contains a number of microprocessors, as detailed in Section 3.6. The Netpage pen software includes software running on the Atmel ARM7 CPU **574** (hereafter CPU), the Force Sensor microprocessor **582**, and also software running in the VM on the CSR BlueCore Bluetooth module **578** (hereafter pen BlueCore). Each of these processors has an associated flash memory which stores the processor specific software, together with settings and other persistent data. The pen BlueCore **578** also runs firmware supplied by the module manufacturer, and this firmware is not considered a part of the Netpage pen software.

[0462] The pod contains a CSR BlueCore Bluetooth module (hereafter pod BlueCore). The Netpage pen software also includes software running in the VM on the pod BlueCore.

[0463] As the Netpage pen **400** traverses a Netpage tagged surface **548**, a stream of correlated position and force samples are produced. This stream is referred to as DInk. Note that DInk may include samples with zero force (so called "Hover DInk") produced when the Netpage pen is in proximity to, but not marking, a Netpage tagged surface.

[0464] The CPU component of the Netpage pen software is responsible for DInk capture, tag image processing and decoding (in conjunction with the Jupiter image sensor **576**), storage and offload management, host communications, user feedback and software upgrade. It includes an operating system (RTOS) and relevant hardware drivers. In addition, it provides a manufacturing and maintenance mode for calibration, configuration or detailed (non-field) fault diagnosis. The Force Sensor microprocessor **582** component of the Netpage pen software is responsible for filtering and preparing force samples for the main CPU. The pen BlueCore VM software is responsible for bridging the CPU UART **588** interface to USB when the pen is operating in tethered mode. The pen BlueCore VM software is not used when the pen is operating in Bluetooth mode.

[0465] The pod BlueCore VM software is responsible for sensing when the pod is charging a pen **400**, controlling the pod LEDs appropriately, and communicating with the host PC via USB.

[0466] For a detailed description of the software modules, reference is made to US Publication No. 2006/0028459, the contents of which are herein incorporated by reference.

[0467] The present invention has been described with reference to a preferred embodiment and number of specific alternative embodiments. However, it will be appreciated by those skilled in the relevant fields that a number of other embodiments, differing from those specifically described, will also fall within the spirit and scope of the present invention. Accordingly, it will be understood that the invention is not intended to be limited to the specific embodiments described in the present specification, including documents incorporated by cross-reference as appropriate. The scope of the invention is only limited by the attached claims.

1. A substrate having a coding pattern disposed on a surface thereof, said coding pattern comprising:

- a plurality of target elements defining a target grid, said target grid comprising a plurality of cells, wherein neighboring cells share target elements;
- a plurality of data elements contained in each cell; and
- a plurality of tags, each tag being defined by a plurality of contiguous cells, each tag comprising respective tag data encoded by data elements,

wherein each cell comprises at least one registration symbol encoded by a respective set of said data elements, said set of data elements identifying a translation of said cell relative to a tag containing said cell,

wherein each set of data elements maps to a first translation code symbol value when read in a first orientation, and maps to a second translation code symbol value when read in a second orientation which is different from said first orientation, such that said translation of said cell relative to said tag is identifiable in either of said first or second orientations.

2. The substrate of claim 1, wherein said second orientation is rotated 180 degrees from said first orientation.

3. The substrate of claim 1, wherein said set of data elements is represented by multi-pulse position modulation.

4. The substrate of claim 3, wherein said set of data elements consists of m macrodots, each of said macrodots occupying a respective position from a plurality of predetermined possible positions p within said cell, the respective positions of said macrodots representing one of a plurality of possible registration symbol values for said registration symbol.

5. The substrate of claim 4, wherein m is 2 or more and $p > m$.

6. The substrate of claim 4, wherein m is 2 and p is 6 so as to provide 15 possible registration symbol values.

7. The substrate of claim 4, wherein a plurality of said registration symbol values are mapped to each translation code symbol value.

8. The substrate of claim 4, wherein said second orientation reverses each registration symbol value with respect to said first orientation.

9. The substrate of claim 8, wherein each tag contains an odd number of cells aligned in a row or column, and wherein a registration symbol contained in a central cell of said row or column is represented by a registration symbol value which maps to identical first and second translation code symbol values.

10. The substrate of claim 8, wherein each tag contains a plurality of cells aligned in a row or column, each row or column having a first cell at one end and a second cell at an

opposite end, said first cell containing a first registration symbol represented by a first registration symbol value which maps to a first translation symbol code value in said first orientation, said second cell containing a second registration symbol represented by a second registration symbol value which maps to a second translation code symbol value in said first orientation, wherein said first translation code symbol value and said second translation code symbol value are interchanged in said second orientation.

11. The substrate of claim 1, wherein each registration symbol further identifies at least one of:

- an orientation of a layout of said tag data with respect to said target grid;
- a direction component of said orientation; and
- a flag code.

12. The substrate of claim 1, wherein each cell comprises first and second registration symbols, said first registration symbol identifying a first orthogonal translation of said cell, said second registration symbol identifying a second orthogonal translation of said cell.

13. The substrate of claim 1, wherein each tag is square and comprises M^2 contiguous square cells, wherein M is an integer having a value of at least 2.

14. The substrate of claim 13, wherein M registration symbols in a row of M cells define a cyclic position code having minimum distance M , said code being defined by a first translation codeword.

15. The substrate of claim 13, wherein M registration symbols in a column of M cells define a cyclic position code having minimum distance M , said code being defined by a second translation codeword.

16. The substrate of claim 1, wherein each tag comprises N cells, and at least N registration symbols form a third translation codeword with minimum distance N , wherein N is an integer having a value of at least 4.

17. The substrate of claim 16, wherein any tag-sized portion of said coding pattern is guaranteed to contain at least N registration symbols, thereby capturing said third translation codeword.

18. The substrate of claim 1, wherein said tag data is encoded by one or more Reed-Solomon symbols.

19. The substrate of claim 18, wherein each cell defines a symbol group, each symbol group comprising a plurality of Reed-Solomon symbols encoded by a plurality of said data elements.

20. The substrate of claim 18, wherein said tag data is encoded as a local codeword comprised of a set of said Reed-Solomon symbols.

* * * * *