

(51) International Patent Classification:

H04N 13/117 (2018.01) *H04N 13/282* (2018.01)*H04N 13/363* (2018.01)

(21) International Application Number:

PCT/KR2019/003890

(22) International Filing Date:

02 April 2019 (02.04.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

201841012500 02 April 2018 (02.04.2018) IN

201841012500 28 March 2019 (28.03.2019) IN


(71) Applicant: SAMSUNG ELECTRONICS CO., LTD.

[KR/KR]; 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677 (KR).

(72) Inventors: BHORASKAR, Anand; #2870, Orion Building, Bagmane Constellation Business Park, Outer Ring

Road, Doddanekundi Circle, Marathahalli Post, Bangalore 560037 (IN). **ANIL, Kshirsagar Sumit**; #2870, Orion Building, Bagmane Constellation Business Park, Outer Ring Road, Doddanekundi Circle, Marathahalli Post, Bangalore 560037 (IN). **VANDROTTI, Basavaraja Shanthappa**; #2870, Orion Building, Bagmane Constellation Business Park, Outer Ring Road, Doddanekundi Circle, Marathahalli Post, Bangalore 560037 (IN). **KUMAR, Amit**; #2870, Orion Building, Bagmane Constellation Business Park, Outer Ring Road, Doddanekundi Circle, Marathahalli Post, Bangalore 560037 (IN). **CHOI, Cheolhee**; 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677 (KR). **GWAK, Jinpyo**; 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677 (KR). **JANA, Sandeep**; #2870, Orion Building, Bagmane Constellation Business Park, Outer Ring Road, Doddanekundi Circle, Marathahalli Post, Bangalore 560037 (IN). **KUMAR, Batchu Sudheer**; #2870, Orion Building, Bagmane Constellation Business Park, Outer Ring Road,

(54) Title: METHOD AND SYSTEM FOR HANDLING 360 DEGREE IMAGE CONTENT

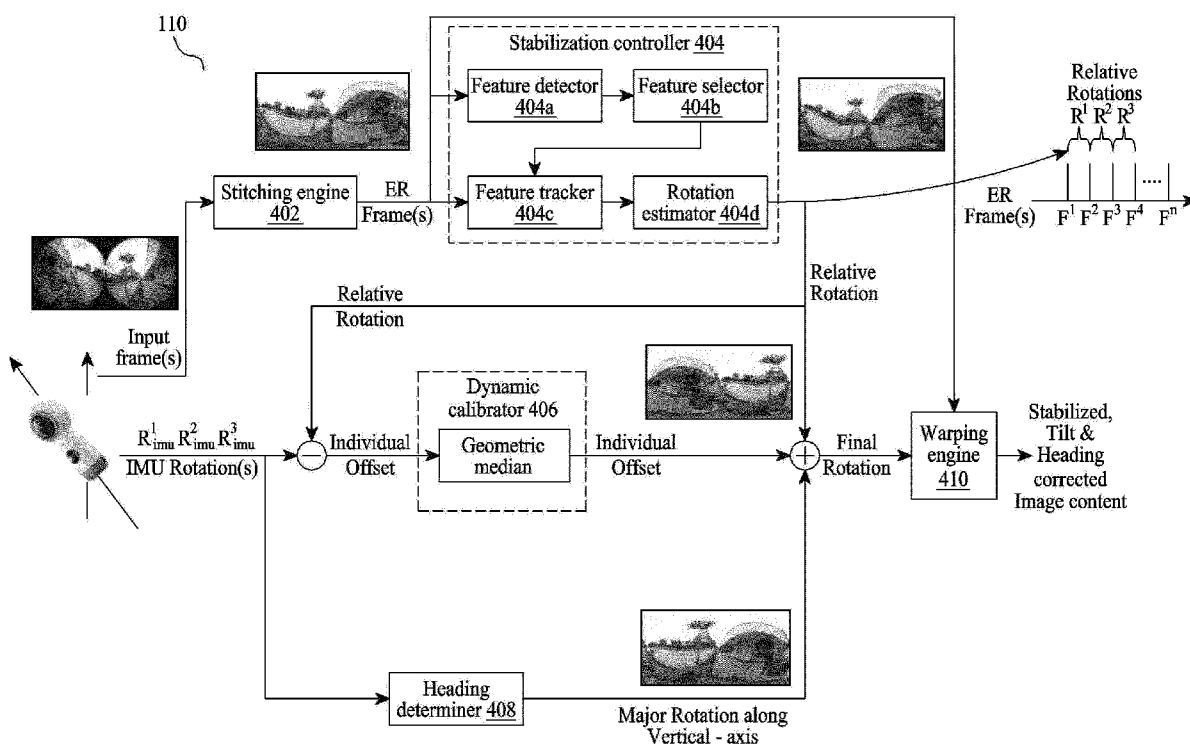

(57) Abstract: An apparatus and method are provided for handling 360 degree image content captured by a 360 degree camera. A method includes obtaining, by an electronic device, a sequence of 360 degree projection format image frames associated with the 360 degree image content and inertial measurement unit (IMU) rotation data associated with the 360 degree image content, computing, by the electronic device, a relative rotation of the 360 degree image content, and applying, by the electronic device, the relative rotation to at least one of the 360 degree projection format image frames to stabilize the 360 degree image content.



Doddanekundi Circle, Marathahalli Post, Bangalore 560037
(IN).

(74) **Agent: LEE, Keon-Joo** et al.; Mihwa Bldg., 16 Dachak-ro
9-gil, Chongro-gu, Seoul 03079 (KR).

(81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

Description

Title of Invention: METHOD AND SYSTEM FOR HANDLING 360 DEGREE IMAGE CONTENT

Technical Field

- [1] The present disclosure relates generally to an image processing system, and more particularly, to a method and system for handling 360 degree image content.

Background Art

- [2] When a user of an electronic device captures a 360 degree video, the electronic device might be held tilted and experience inadvertent tremors. Consequently, the captured 360 degree videos, which are not aligned vertically, and might create an unpleasant viewing experience to the user.
- [3] Further, rotational information obtained from inertial measurement unit (IMU) sensors (e.g., a gyroscope and an accelerometer) is noisy and can create delay. A computer vision based method and system to stabilize 360 degree video exists, but resultant stabilized 360 degree video is still not tilt corrected effectively. Computer vision based methods and systems for tilt correction are either difficult to realize in real time and are often less accurate for scenarios having no vertical or horizontal edges.
- [4] Further, existing methods and systems for capturing 360 degree video have many bottlenecks, namely, losing the heading information (e.g., directional information or the like).
- [5] For example, in a scenario in which the 360 degree video is stabilized by aligning subsequent frames with respect to a first frame, if a person is driving along a curved road with the 360 degree video camera mounted on a bike, after some time, the stabilized video's front direction will not match with the road which will create a bad user experience.
- [6] As another example, the 360 degree video might not be vertically aligned if at a start of a video the user inadvertently holds the camera at 45 degrees to the vertical. consequently, the stabilized video will stay tilted by 45 degrees, and a viewer (e.g., using virtual reality (VR) goggles) will have to tilt their head to see the video. This also results in a bad user experience.

Disclosure of Invention

Solution to Problem

- [7] Accordingly, the present disclosure is provided to address at least the problems and/or disadvantages described above and to provide at least the advantages described below.
- [8] An aspect of the present disclosure is to provide a method and apparatus for handling

a 360 degree image content.

- [9] Another aspect of the present disclosure is to provide a method and apparatus that obtain a sequence of 360 degree projection format image frames associated with 360 degree image content and IMU rotation data associated with the 360 degree image content, where the 360 degree image content is captured by a 360 degree camera.
- [10] Another aspect of the present disclosure is to provide a method and apparatus that determine a first relative rotation angle for each of 360 degree projection format image frames with respect to a first 360 degree projection format image frame by tracking a set of feature points in each of the 360 degree projection format image frames.
- [11] Another aspect of the present disclosure is to provide a method and apparatus that determine a second relative rotation angle for each of 360 degree projection format image frames with respect to a first 360 degree projection format image frame by using IMU rotation data.
- [12] Another aspect of the present disclosure is to provide a method and apparatus that determine an individual offset for each of 360 degree projection format image frames.
- [13] Another aspect of the present disclosure is to provide a method and apparatus that estimate a universal offset by calculating geometric median of the individual offset values for each of 360 degree projection format image frames or continuously predicting universal offset using a signal processing filter.
- [14] Another aspect of the present disclosure is to provide a method and apparatus that determine an individual offset for each of 360 degree projection format image frames as a measure of difference between a relative rotation angle and an IMU rotation angle.
- [15] Another aspect of the present disclosure is to provide a method and apparatus that compute a relative rotation of 360 degree image content.
- [16] Another aspect of the present disclosure is to provide a method and apparatus that apply a relative rotation to each one of 360 degree projection format image frames to stabilize 360 degree image content.
- [17] Another aspect of the present disclosure is to provide a method and apparatus that estimate an angle difference value between yaw values of successive frames.
- [18] Another aspect of the present disclosure is to provide a method and apparatus that determine an angle difference value with a pre-determined threshold value.
- [19] Another aspect of the present disclosure is to provide a method and apparatus that apply a relative rotation to each one of 360 degree projection format image frames in order to maintain a head direction of 360 degree image content.
- [20] In accordance with an aspect of the present disclosure, a method is provided for handling 360 degree image content captured by a 360 degree camera. The method includes obtaining, by an electronic device, a sequence of 360 degree projection format image frames associated with the 360 degree image content and inertial measurement

unit (IMU) rotation data associated with the 360 degree image content; computing, by the electronic device, a relative rotation of the 360 degree image content; and applying, by the electronic device, the relative rotation to at least one of the 360 degree projection format image frames.

[21] In accordance with another aspect of the present disclosure, a method is provided for handling a 360 degree image content captured by a 360 degree camera. The method includes obtaining, by an electronic device, a sequence of 360 degree projection format image frames associated with the 360 degree image content and inertial measurement unit (IMU) rotation data associated with the 360 degree image content; estimating, by the electronic device, an angle difference value between yaw values of successive 360 degree projection format image frames; comparing, by the electronic device, the angle difference value with a pre-determined threshold value; and applying, by the electronic device, a relative rotation to at least one of the 360 degree projection format image frames, based on a result of the comparing.

[22] In accordance with another aspect of the present disclosure, an electronic device is provided for handling a 360 degree image content captured by a 360 degree camera. The electronic device includes a processor; a memory; and a 360 degree image content handler, coupled with the processor and the memory, configured to obtain a sequence of 360 degree projection format image frames associated with the 360 degree image content and inertial measurement unit (IMU) rotation data associated with the 360 degree image content; compute a relative rotation of the 360 degree image content; and apply the relative rotation to at least one of the 360 degree projection format image frames.

[23] In accordance with another aspect of the present disclosure, an electronic device is provided for handling a 360 degree image content captured by a 360 degree camera. The electronic device includes a processor; a memory; and a 360 degree image content handler, coupled with the processor and the memory, configured to obtain a sequence of 360 degree projection format image frames associated with the 360 degree image content and inertial measurement unit (IMU) rotation data associated with the 360 degree image content; estimate an angle difference value between yaw values of successive 360 degree projection format image frames; compare the angle difference value with a pre-determined threshold value; and apply a relative rotation to at least one of the 360 degree projection format image frames, based on a result of the comparing.

Brief Description of Drawings

[24] This above and other aspects, features, and advantages of certain embodiments of the present disclosure will be more apparent from the following detailed description taken

in conjunction with the accompanying drawings, in which:

- [25] FIG. 1 illustrates various problems that occur during various image capturing techniques;
- [26] FIG. 2 illustrates a relative rotation of a camera in a 360 degree image content;
- [27] FIG. 3 illustrates an electronic device for handling 360 degree image content, according to an embodiment;
- [28] FIG. 4 illustrates a 360 degree image content handler included in an electronic device, according to an embodiment;
- [29] FIG. 5 is a flow diagrams illustrating an operation for handling 360 degree image content, according to an embodiment;
- [30] FIG. 6 is a flow diagrams illustrating an operation for handling 360 degree image content, according to an embodiment;
- [31] FIG. 7 illustrates an operation of feature point selection and detection, according to an embodiment;
- [32] FIG. 8 illustrates a distortion correction based on a feature point selection, according to an embodiment;
- [33] FIG. 9A illustrates a conventional output of a feature detection;
- [34] FIG. 9B illustrates an output of a feature detection, according to an embodiment;
- [35] FIG. 10 illustrates feature point selection using an IMU, according to an embodiment;
- [36] FIG. 11 illustrates dynamic recalibration, according to an embodiment;
- [37] FIG. 12A illustrates a 360 degree image without video stabilization, according to an embodiment;
- [38] FIG. 12B illustrates a 360 degree image with video stabilization, according to an embodiment;
- [39] FIG. 12C illustrates a 360 degree image with video stabilization and maintaining heading direction, according to an embodiment;
- [40] FIG. 12D illustrates a 360 degree image without heading correction, according to an embodiment;
- [41] FIG. 12E illustrates a 360 degree image heading correction, according to an embodiment;
- [42] FIG. 13 illustrates a 360 degree image with tilt correction, according to an embodiment;
- [43] FIG. 14 illustrates orientation error correction in a 360 degree video, according to an embodiment;
- [44] FIG. 15 illustrates a method for stabilizing and tilt correcting 360 degree image content, according to an embodiment;
- [45] FIG. 16 illustrates a 360 camera removing shakiness and performing tilt correction,

according to an embodiment;

[46] FIG. 17 illustrates a 360 camera removing shakiness and performing tilt correction, according to an embodiment; and

[47] FIG. 18 illustrates a 360 camera removing shakiness and performing tilt correction, according to an embodiment.

Mode for the Invention

[48] Various embodiments of the present disclosure will now be described in detail with reference to the accompanying drawings. In the following description, specific details such as detailed configuration and components are merely provided to assist the overall understanding of these embodiments of the present disclosure. Therefore, it should be apparent to those skilled in the art that various changes and modifications of the embodiments described herein can be made without departing from the scope and spirit of the present disclosure. In addition, descriptions of well-known functions and constructions are omitted for clarity and conciseness.

[49] Also, the various embodiments described herein are not necessarily mutually exclusive, as some embodiments can be combined with one or more other embodiments to form new embodiments.

[50] The term "or" as used herein, refers to a non-exclusive or, unless otherwise indicated.

[51] Examples used herein are intended merely to facilitate an understanding of ways in which the embodiments herein can be practiced and to further enable those skilled in the art to practice the embodiments herein. Accordingly, the examples should not be construed as limiting the scope of the embodiments herein.

[52] As is traditional in the field, embodiments may be described and illustrated in terms of blocks which carry out a described function or functions. These blocks, which may be referred to herein as managers, units, modules, hardware components, etc., are physically implemented by analog and/or digital circuits such as logic gates, integrated circuits, microprocessors, microcontrollers, memory circuits, passive electronic components, active electronic components, optical components, hardwired circuits, etc., and may optionally be driven by firmware and software. The circuits may be embodied in one or more semiconductor chips, or on substrate supports such as printed circuit boards and the like. The circuits constituting a block may be implemented by dedicated hardware, or by a processor (e.g., one or more programmed microprocessors and associated circuitry), or by a combination of dedicated hardware to perform some functions of the block and a processor to perform other functions of the block.

[53] Each block of the embodiments may be physically separated into two or more interacting and discrete blocks without departing from the scope of the disclosure. Likewise, the blocks of the embodiments may be physically combined into

more complex blocks without departing from the scope of the disclosure.

[54] The accompanying drawings are used to help easily understand various technical features and it should be understood that the embodiments presented herein are not limited by the accompanying drawings. As such, the present disclosure should be construed to extend to any alterations, equivalents and substitutes in addition to those which are particularly set out in the accompanying drawings.

[55] Although numerical terms, e.g., first, second, etc., may be used to describe various elements, these elements should not be limited by these terms. These terms are generally only used to distinguish one element from another.

[56] In accordance with an embodiment, a method is provided for handling 360 degree image content captured by a 360 degree camera. The method includes obtaining, by an electronic device, sequence of 360 degree projection format image frames associated with the 360 degree image content and IMU rotation data associated with the 360 degree image content. Further, the method includes computing, by the electronic device, a relative rotation of the 360 degree image content, and applying, by the electronic device, the relative rotation to each one of the 360 degree projection format image frame to stabilize the 360 degree image content.

[57] For example, the method can be used to stabilize, correct tilt, and maintain heading direction in a robust and effective manner while recording 360 degree video captured by the electronic device.

[58] FIG. 1 illustrates various problems that occur using various image capturing techniques.

[59] Referring to FIG. 1, image a illustrates a video capturing by a 360 camera. Due to various reasons, the 360 camera provides an unintended rotation while capturing the video.

[60] Image b illustrates complete video in an equi-rectangular format, which is a standard format for storing 360 degree video.

[61] Image c illustrates a frame affected due to tremors/vibrations and tilt, which results in uncomfortable viewing.

[62] Image d illustrates IMU based tilt correction, which results in jitters due to imperfect IMU information with uncomfortable viewing.

[63] Image e illustrates stabilized frames, which are not aligned with real horizon. This also results into uncomfortable viewing.

[64] In the existing methods illustrated in FIG. 1, the video stabilization procedure does not take care of tilt correction. The video stabilization procedure aligns subsequent frames to remove shakiness/tremors, which does not ensure that a video output is tilt corrected.

[65] Further, a conventional tilt correction procedure generates unstabilized video. For

example, if an electronic device applies IMU relative rotation to a video, although tilt would be corrected, inherent noise in an IMU sensor results in jittery output.

[66] Further, conventional video stabilization procedure and the tilt correction procedure do not maintain a heading direction. For example, if a user turns (e.g., makes a left turn), the output video should also reflect the turn.

[67] FIG. 2 illustrates a relative rotation of a camera in 360 degree image content.

[68] Referring to FIG. 2, a relative rotation angle (e.g., a 3D angle or the like) is provided for each of the received frames with respect to a first frame of a sequence of frames. The relative rotation angle is computed by tracking feature points in each frames. Specifically, FIG. 2 shows a relative rotation among 2 frames.

[69] FIG. 3 illustrates an electronic device for handling 360 degree image content, according to an embodiment.

[70] Referring to FIG. 3, an electronic device 100 may be, but not limited to, a smart phone, a tablet computer, a drone-mounted camera, a head-mounted camera, a handheld camera, a mobile device, a personal digital assistance (PDA), a multimedia device, a video device, a smart watch, etc.

[71] The electronic device 100 includes a 360 degree image content handler 110, a communicator 120, a memory 130, a processor 140, a signal processing filter 150, and an inertial measurement unit (IMU) 160.

[72] The processor 140 is coupled with the 360 degree image content handler 110, the communicator 120, the memory 130, the signal processing filter 150, and an inertial measurement unit 160.

[73] The 360 degree image content handler 110 obtains a sequence of 360 degree projection format image frames associated with the 360 degree image content and IMU rotation data associated with the 360 degree image content. The 360 degree image content is captured by the 360 degree camera. The IMU rotation data is obtained by the inertial measurement unit 160 (e.g., a gyroscope, an accelerometer, etc.).

[74] The various projection formats, which are known to represent the 360 degree image content, include an equi-rectangular format, an Icosahedron format, an octahedral format, a cube mapping format, etc.

[75] After obtaining the sequence of 360 degree projection format image frames associated with the 360 degree image content and the IMU rotation data associated with the 360 degree image content, the 360 degree image content handler 110 determines a first relative rotation angle for each of the 360 degree projection format image frames with respect to a first 360 degree projection format image frame by tracking a set of feature points in each of the 360 degree projection format image frames. The set of feature points tracked will be explained in more detail below with reference to FIGs. 7 and 8.

- [76] Further, the 360 degree image content handler 110 determines a second relative rotation angle for each of the 360 degree projection format image frames with respect to the first 360 degree projection format image frame by using the IMU rotation data. Further, the 360 degree image content handler 110 determines an individual offset for each of the 360 degree projection format image frames.
- [77] The individual offset for each of the 360 degree projection format image frames may be determined as a measure of difference between the relative rotation angle and the IMU rotation angle.
- [78] Further, the 360 degree image content handler 110 estimates a universal offset by calculating geometric median of the individual offset values for each of the 360 degree projection format image frames or by continuously predicting universal offset using the signal processing filter 150. The determination of the universal offset and individual offset are explained in more detail below with reference to FIG. 11.
- [79] Further, the 360 degree image content handler 110 computes the relative rotation of the 360 degree image content.
- [80] After computing the relative rotation of the 360 degree image content, the 360 degree image content handler 110 applies the relative rotation to each one of the 360 degree projection format image frame to stabilize the 360 degree image content.
- [81] Further, the 360 degree image content handler 110 estimates an angle difference value between yaw values of successive frames, and determines the angle difference value with a pre-determined threshold value.
- [82] The angle difference value with the pre-determined threshold value may be determined by detecting whether an angle difference of yaw values of first and second 360 degree projection format image frames is less than the pre-determined threshold value, and compensating the yaw value of the second frame.
- [83] The angle difference value with the pre-determined threshold value may be determined by detecting whether an angle difference of yaw values of first and second 360 degree projection format image frames is greater than the pre-determined threshold value, and smoothing a yaw value of the second frame.
- [84] Further, the 360 degree image content handler 110 applies the relative rotation to each one of the 360 degree projection format image frame to maintain a head direction of the 360 degree image content.
- [85] The processor 140 execute instructions stored in the memory 130 to perform various processes. The communicator 120 communicates between internal hardware components and with external devices via one or more networks.
- [86] The memory 130 stores instructions to be executed by the processor 140. The memory 130 may include non-volatile storage elements, e.g., magnetic hard discs, optical discs, floppy discs, flash memories, or forms of electrically programmable

memories (EPROM) or electrically erasable and programmable (EEPROM) memories.

- [87] In addition, the memory 130 may be considered a non-transitory storage medium. The term "non-transitory" indicates that the storage medium is not embodied in a carrier wave or a propagated signal. However, the term "non-transitory" should not be interpreted that the memory 130 is non-movable.
- [88] The memory 130 may be configured to store large amounts of information.
- [89] A non-transitory storage medium may store data that can, over time, change (e.g., in Random Access Memory (RAM) or cache).
- [90] Although the FIG. 3 illustrates the electronic device 100 including certain components, the present disclosure is not limited thereto. For example, the electronic device 100 may include less or more components.
- [91] Further, the names of the components in FIG. 3 are used only for illustrative purposes and do not limit the scope of the disclosure.
- [92] One or more the components can be combined together to perform same or substantially similar function to handle the 360 degree image content.
- [93] FIG. 4 illustrates a 360 degree image content handler, according to an embodiment.
- [94] Referring to FIG. 4, a 360 degree image content handler 110 includes a stitching engine 402, a stabilization controller 404, a dynamic calibrator 406, a heading determiner 408 and a warping engine 410. The stabilization controller 404 includes a feature detector 404a, a feature selector 404b, a feature tracker 404c, and a rotation estimator 404d.
- [95] The stitching engine 402 process the input Equi-Rectangular(ER) frame and generates the 360 degree image by stitching the images. Further, the stabilization controller 404 obtains a sequence of 360 degree projection format image frames associated with the 360 degree image content and the IMU rotation data associated with the 360 degree image content.
- [96] After obtaining the sequence of 360 degree projection format image frames associated with the 360 degree image content and the IMU rotation data associated with the 360 degree image content, the stabilization controller 404 determines the first relative rotation angle for each of the 360 degree projection format image frames with respect to the first 360 degree projection format image frame by tracking the set of feature points in each of the 360 degree projection format image frames using at least one of the feature detector 404a, the feature selector 404b, and the feature tracker 404c. The stabilization controller 404 determines the second relative rotation angle for each of the 360 degree projection format image frames with respect to the first 360 degree projection format image frame by using the IMU rotation data by the rotation estimator 404d. The stabilization controller 404 determines the individual offset for each of the 360 degree projection format image frames.

- [97] Further, the stabilization controller 404 estimates the universal offset by calculating geometric median of the individual offset values for each of the 360 degree projection format image frames or by continuously predict the universal offset using the dynamic calibrator 406. Further, the stabilization controller 404 computes the relative rotation of the 360 degree image content.
- [98] After computing the relative rotation of the 360 degree image content, the stabilization controller 404 applies the relative rotation to each one of the 360 degree projection format image frame to stabilize the 360 degree image content.
- [99] The heading determiner 408 estimates the angle difference value between yaw values of successive frames. Further, the heading determiner 408 determines the angle difference value with the pre-determined threshold value. The heading determiner 408 applies the relative rotation to each one of the 360 degree projection format image frame in order to maintain the head direction of the 360 degree image content.
- [100] The warping engine 410 provides the stabilized, tilt corrected, and heading corrected image content.
- [101] Although the FIG. 4 illustrates various hardware components of the 360 degree image content handler 110, the present disclosure is not limited thereto. For example, the 360 degree image content handler 110 may include fewer or more components. Further, the la names of the components do not limit the scope of the disclosure. One or more components can be combined together to perform same or substantially similar function to handle s handle the 360 degree image content.
- [102] FIG. 5 is a flow diagram illustrating an operation for handling 360 degree image content, according to an embodiment.
- [103] Referring to FIG. 5, at step 502, an electronic device, e.g., the 360 degree image content handler 110, obtains a sequence of 360 degree projection format image frames associated with 360 degree image content and IMU rotation data associated with the 360 degree image content.
- [104] At step 504, the 360 degree image content handler 110 computes the relative rotation of the 360 degree image content.
- [105] At 506, the 360 degree image content handler 110 applies the relative rotation to each one of the 360 degree projection format image frame to stabilize the 360 degree image content.
- [106] FIG. 6 is a flow diagram illustrating an operation for handling 360 degree image content, according to an embodiment.
- [107] Referring to FIG. 6, at 602, an electronic device, e.g., the 360 degree image content handler 110, obtains a sequence of 360 degree projection format image frames associated with 360 degree image content and IMU rotation data associated with the 360 degree image content.

- [108] At step 604, the 360 degree image content handler 110 estimates the angle difference value between yaw values of successive 360 degree projection format image frames.
- [109] At step 606, the 360 degree image content handler 110 determines the angle difference value with the pre-determined threshold value.
- [110] At step 608, the 360 degree image content handler 110 applies the relative rotation to each one of the 360 degree projection format image frames in order to maintain the head direction of the 360 degree image content.
- [111] The various actions, acts, blocks, steps, etc., in the flow diagrams of FIGs. 5 and 6 may be performed in the order presented, in a different order, or simultaneously. Further, in some embodiments, some of the actions, acts, blocks, steps, or the like may be omitted, added, modified, skipped, etc., without departing from the scope of the disclosure.
- [112] FIG. 7 illustrates feature point selection and detection, according to an embodiment.
- [113] Referring to FIG. 7, in order to estimate better video stabilization, global motion estimated and local motion is discarded. The global motion is a motion in a scene while capturing the video and the local motion is a motion in an object while capturing the video.
- [114] An electronic device applies the feature based procedure to estimate the relative rotation and ensure to represent only global motion. The global motion is correctly estimated when the feature points are evenly distributed. In the electronic device, the input ER image is split into multiple grids, (e.g., a 10x10 grid). The electronic device estimates the feature points in each grid and keeps only the top best feature points (e.g., keeps only the top 3 points), which helps reduce complexity. Further, the electronic device tracks the detected points in the next few frames (e.g., 5 frames).
- [115] The electronic device retains only feature points that are available in all of the frames. The electronic device computes the rotation or correction matrix for the frames.
- [116] Further, the electronic device applies the feature detection on the last rotated frame and repeats the above procedure.
- [117] In the case of low light scenes, the electronic device detects the feature and detects that performance is very poor, Thereafter, the electronic device uses only IMU data for correction.
- [118] In order to decide whether or not the frame is suitable for vision-based stabilization, a threshold may be applied. The electronic device may set a threshold, which is at least one feature point in N (e.g., 15) grids. Whenever the frame does not satisfy the condition, then only IMU data is applied for correction.
- [119] FIG. 8 illustrates distortion correction based on feature point selection, according to an embodiment.

- [120] Referring to FIG. 8, each image patch is projected in a spherical domain. The spherical representation is converted to 2d image by projecting on a tangent plane. In order to provide the better accuracy of the video, the feature detection is done on the undistorted patch.
- [121] FIG. 9A illustrates a conventional output of a feature detection. Based on existing methods, a large number of points are clustered in a textured area.
- [122] FIG. 9B illustrates an output of a feature detection, according to an embodiment.
- [123] Referring to FIG. 9B, the points are better distributed by enforcing grid based feature detection.
- [124] FIG. 10 illustrates feature point selection using IMU, according to an embodiment.
- [125] Referring to FIG. 10, a method can be used to discard feature points that have local motion and select the feature points that have global motion for better estimation of relative rotation between the frames. In the method, the electronic device receives IMU relative rotation angles and ER frames. The electronic device tracks the feature points from the first frame to the second frame. Further, the electronic device applies the IMU relative rotation angle to transform feature points in first frame to their expected position.
- [126] The electronic device determines the angle between the positions of tracked feature points in the second frame with their expected position and compare the angular displacement with a pre-determined threshold. The electronic device accepts the feature point if difference is less than threshold and classifies the feature points as global motion. The electronic device rejects the feature point if difference is less than threshold and classifies the feature point as the local motion.
- [127] As illustrated in the FIG. 10, for each tracked point, a line is drawn from the tracked point to the "expected position according to IMU Rotation". The points in frame 1 have a higher displacement than threshold, hence, are rejected (local motion), and the points in frame 2 are accepted as global motion.
- [128] FIG. 11 illustrates dynamic recalibration, according to an embodiment.
- [129] Referring to FIG. 11, a method can be used to dynamically recalibrate an offset evaluation interval based on a deviation of an estimate offset from individual offset values. In the methods, an electronic device receives the offset values over evaluation interval and estimates offset for them. The electronic device evaluates the mean of absolute differences between individual offset values and estimate offset. The electronic device then compares the mean with a predetermined threshold by keeping the offset evaluation interval high, if mean is smaller than threshold. The electronic device 100 compares the mean with a predetermined threshold by keeping interval lower, if mean is greater than threshold.
- [130] FIG. 12A illustrates a 360 degree image without video stabilization. FIG. 12B il-

illustrates a 360 degree image with video stabilization. FIG. 12C illustrates a 360 degree image with video stabilization and maintaining heading direction. FIG. 12D illustrates a 360 degree image without heading correction. FIG. 12E illustrates a 360 degree image with heading correction.

[131] FIG. 13 illustrates a 360 degree image with tilt correction, according to an embodiment.

[132] Referring to FIG. 13, row a indicates the unintended shake/tilt of camera as demonstrated in 5 subsequent frames. Row b indicates the 5 frame of input video that is affected by the shakiness/tremors and tilt while recording 3600 videos, and results in uncomfortable viewing.

[133] Row c indicates a relative rotation computed from a feature point (i.e., successive frames are aligned with first reference frame so that the shakiness is removed but frames tilted).

[134] Row d indicates that relative rotations computed from IMU, where the tilt is corrected but shakiness is present due to IMU noise.

[135] Row e indicates a final rotation computed using 'Universal offset from the IMU' & 'Relative rotation from feature points', which results in removing the shakiness as well as correcting the tilt to provide better pleasant viewing experience.

[136] FIG. 14 illustrates orientation error correction in a 360 degree video, according to an embodiment.

[137] Referring to FIG. 14, row (a) indicates images with no stabilization, row (b) indicates images with stabilization, but without tilt correction, and row (c) indicates images with both tilt correction and stabilization.

[138] As illustrated in FIG. 14, an electronic device receives sequence of stitched 360 degree frames and corresponding IMU rotation data (e.g., inertial measurement unit - gyroscope and accelerometer), and computes the relative rotation angle (e.g., 3D angle) for each of the received frames with respect to a first frame of the sequence of frames. The relative rotation angle is computed from tracked feature points between two or more frames using geometric transformation techniques for, e.g., epipolar geometry.

[139] Further, the electronic device determines the offset for each of the frames by calculating the difference between the relative rotation angle and the IMU rotation angle and estimating the universal offset by using geometric median of determined offsets for each of the frames or by using linear quadratic estimator. The electronic device applies the estimated universal offset to each of the frame to vertically align the frame to correct the orientation errors in the 360 degree video.

[140] FIG. 15 illustrates a method for stabilizing and tilt correcting an output in 360 degree image content, according to an embodiment.

- [141] Referring to FIG. 15, an electronic device can be used to estimate an offset between IMU and vision, despite high errors, in order to provide a stabilized and tilt corrected output. In the input video, an arrow represents the vertical direction in the video. The IMU values are given by the sensor. If only IMU rotation values are used to stabilize the video, the IMU values try to align frames to vertical, but because of errors in the IMU values, the output video is not stable. If the relative rotation is used, the video is stabilized but all frames are aligned to the first frame as the vision does not have information about true vertical direction.
- [142] FIGs. 16-18 illustrate a 360 camera removing shakiness and performing tilt correction, according to embodiments.
- [143] Referring to FIG. 16, a 360 degree camera is mounted on a drone to capture video. During flight, the drone may not remain perfectly horizontal. Consequently, there are chances of misalignment between the successive frames. Due to vibration of the motor, atmospheric condition, piloting error, etc., the drone may not be in stable condition for recording.
- [144] Frame a of FIG. 16 indicates the frame without tilt correction, and frame b of FIG. 16 indicates the frame with tilt correction according to an embodiment.
- [145] Referring to FIG. 17, a 360 degree camera is mounted on a bike to capture video while riding. Similar to the drone of FIG. 16, while riding, the bike may not remain in a steady condition, and there are chances of misalignment between the successive frames.
- [146] In accordance with an embodiment of the disclosure, the 360 camera removes shakiness and any tilt issue, as well as maintains heading direction, which will reflect the turns taken by the user, thus giving the user a pleasant experience as illustrated in the FIG. 17.
- [147] Referring to FIG. 18, a 360 degree camera removes shakiness and corrects any tilt issue, as well as maintains a heading direction, in order to reflect turns taken by a user while the user is watching a video in an immersive mode (e.g., a VR mode, an augmented reality mode, etc.). This results in providing the better pleasant experience as illustrated in the FIG. 18.
- [148] The embodiments described herein can be implemented through at least one software program running on at least one hardware device and performing network management functions to control the elements.

Claims

- [Claim 1] A method for handling 360 degree image content captured by a 360 degree camera, the method comprising:
obtaining, by an electronic device, a sequence of 360 degree projection format image frames associated with the 360 degree image content and inertial measurement unit (IMU) rotation data associated with the 360 degree image content;
computing, by the electronic device, a relative rotation of the 360 degree image content; and
applying, by the electronic device, the relative rotation to at least one of the 360 degree projection format image frames.
- [Claim 2] The method of claim 1, wherein computing the relative rotation of the 360 degree image content comprises:
determining a first relative rotation angle for each of the 360 degree projection format image frames with respect to a first 360 degree projection format image frame by tracking a set of feature points in each of the 360 degree projection format image frames;
determining a second relative rotation angle for each of the 360 degree projection format image frames with respect to the first 360 degree projection format image frame by using the IMU rotation data;
determining an individual offset for each of the 360 degree projection format image frames;
estimating a universal offset by calculating geometric median of the individual offset values for each of the 360 degree projection format image frames or by continuously predicting the universal offset using a signal processing filter; and
computing the relative rotation of the 360 degree image content.
- [Claim 3] The method of claim 2, wherein the individual offset for each of the 360 degree projection format image frames is determined as a difference between the relative rotation angle and the IMU rotation angle.
- [Claim 4] The method of claim 1, further comprising:
estimating, by the electronic device, an angle difference value between yaw values of successive frames;
comparing, by the electronic device, the angle difference value with a pre-determined threshold value; and
applying, by the electronic device, the relative rotation to at least one of

the 360 degree projection format image frames, based on a result of the comparing.

[Claim 5]

The method of claim 4, wherein comparing the angle difference value with the pre-determined threshold value comprises:

detecting whether an angle difference of yaw values of first and second 360 degree projection format image frames is less than the pre-determined threshold value;

compensating the yaw value of the second frame, when the angle difference of the yaw values of first and second 360 degree projection format image frames is less than the pre-determined threshold value; and

smoothing a yaw value of the second frame, when the angle difference of the yaw values of first and second 360 degree projection format image frames is greater than the pre-determined threshold value.

[Claim 6]

A method for handling 360 degree image content captured by a 360 degree camera, the method comprising:

obtaining, by an electronic device, a sequence of 360 degree projection format image frames associated with the 360 degree image content and inertial measurement unit (IMU) rotation data associated with the 360 degree image content;

estimating, by the electronic device, an angle difference value between yaw values of successive 360 degree projection format image frames;

comparing, by the electronic device, the angle difference value with a pre-determined threshold value; and

applying, by the electronic device, a relative rotation to at least one of the 360 degree projection format image frames, based on a result of the comparing.

[Claim 7]

The method of claim 6, wherein comparing the angle difference value with the pre-determined threshold value comprises:

detecting whether an angle difference of yaw values of first and second 360 degree projection format image frames is less than the pre-determined threshold value;


compensating the yaw value of the second 360 degree projection format image frame, when the angle difference of the yaw values of first and second 360 degree projection format image frames is less than the pre-determined threshold value; and

smoothing a yaw value of the second frame, when the angle difference of the yaw values of first and second 360 degree projection


- format image frames is greater than the pre-determined threshold value.
- [Claim 8] The method of claim 6, further comprising:
computing, by the electronic device, a relative rotation of the 360 degree image content; and
applying, by the electronic device, the relative rotation to at least one of the 360 degree projection format image frames.
- [Claim 9] The method of claim 8, wherein computing the relative rotation of the 360 degree image content comprises:
determining a first relative rotation angle for each of the 360 degree projection format image frames with respect to a first 360 degree projection format image frame by tracking a set of feature points in each of the 360 degree projection format image frames;
determining a second relative rotation angle for each of the 360 degree projection format frames with respect to the first 360 degree projection format image frame by using the IMU rotation data;
determining an individual offset for each of the 360 degree projection format image frames;
estimating a universal offset by calculating geometric median of the individual offset values for each of the 360 degree projection format frames or by continuously predicting the universal offset using a signal processing filter; and
computing the relative rotation of the 360 degree image content.
- [Claim 10] The method of claim 9, wherein the individual offset for each of the 360 degree projection format image frames is determined as a difference between the relative rotation angle and the IMU rotation angle.
- [Claim 11] An electronic device for handling 360 degree image content captured by a 360 degree camera, the electronic device comprising:
a processor;
a memory; and
a 360 degree image content handler, coupled with the processor and the memory, configured to:
obtain a sequence of 360 degree projection format image frames associated with the 360 degree image content and inertial measurement unit (IMU) rotation data associated with the 360 degree image content;
compute a relative rotation of the 360 degree image content; and
apply the relative rotation to at least one of the 360 degree projection format image frames.

- [Claim 12] The electronic device of claim 11, wherein the 360 degree image content handler is further configured to be operated according to one of the methods in claims 2 to 5.
- [Claim 13] An electronic device for handling 360 degree image content captured by a 360 degree camera, the electronic device comprising:
a processor;
a memory; and
a 360 degree image content handler, coupled with the processor and the memory, configured to:
obtain a sequence of 360 degree projection format image frames associated with the 360 degree image content and inertial measurement unit (IMU) rotation data associated with the 360 degree image content;
estimate an angle difference value between yaw values of successive 360 degree projection format image frames;
compare the angle difference value with a pre-determined threshold value; and
apply a relative rotation to at least one of the 360 degree projection format image frames, based on a result of the comparing.
- [Claim 14] The electronic device of claim 13, wherein the 360 degree image content handler is further configured to be operated according to one of the methods in claims 7 to 10.


[Fig. 1]

Video capture	Equirectangular (ER) frame as input	What it would look like in VR	Output Video Only with IMU based tilt correction	Output Video Stabilization without tilt correction
				
a	b	c	d	e


[Fig. 2]

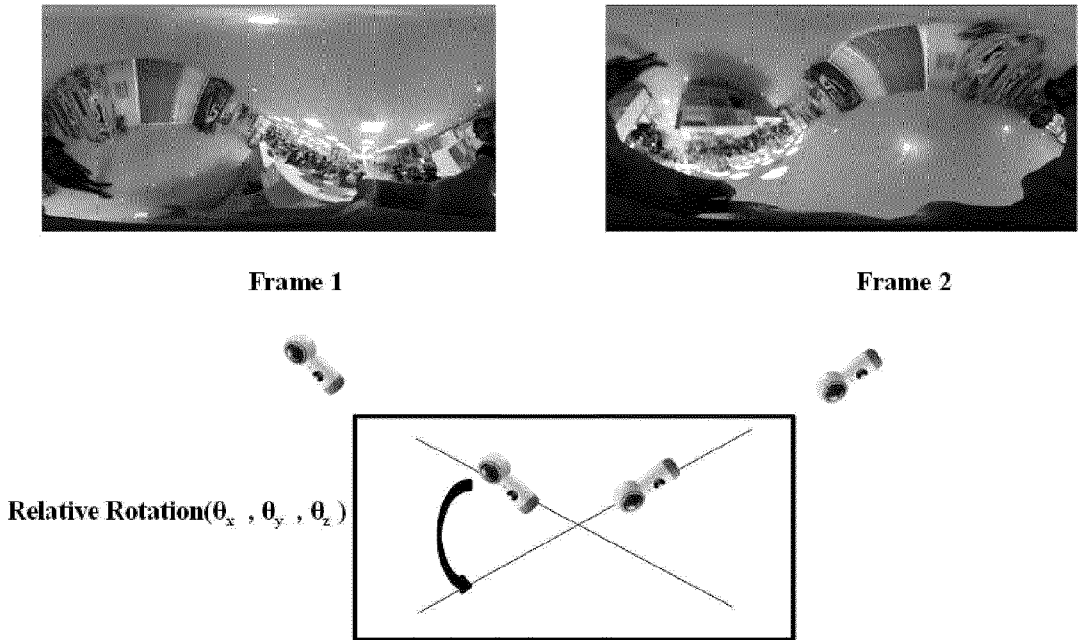


[Fig. 3]

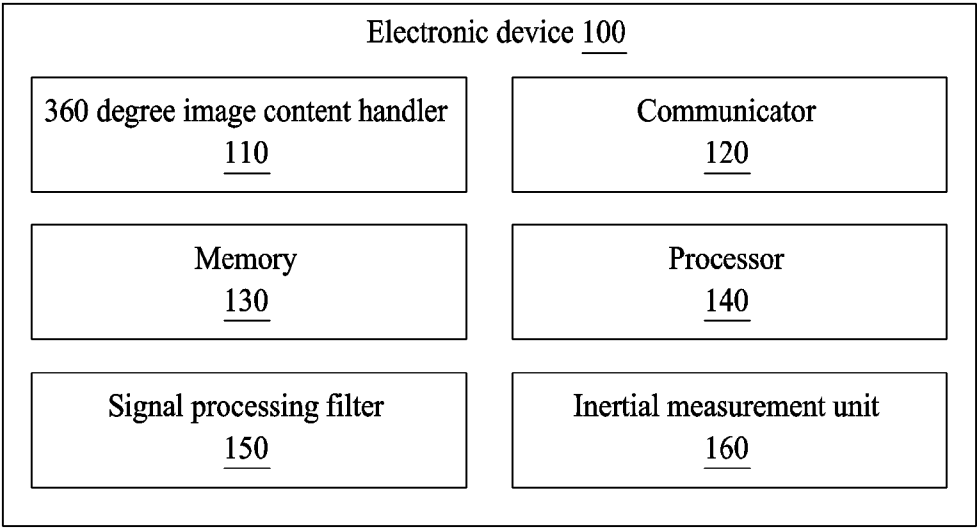


[Fig. 4]

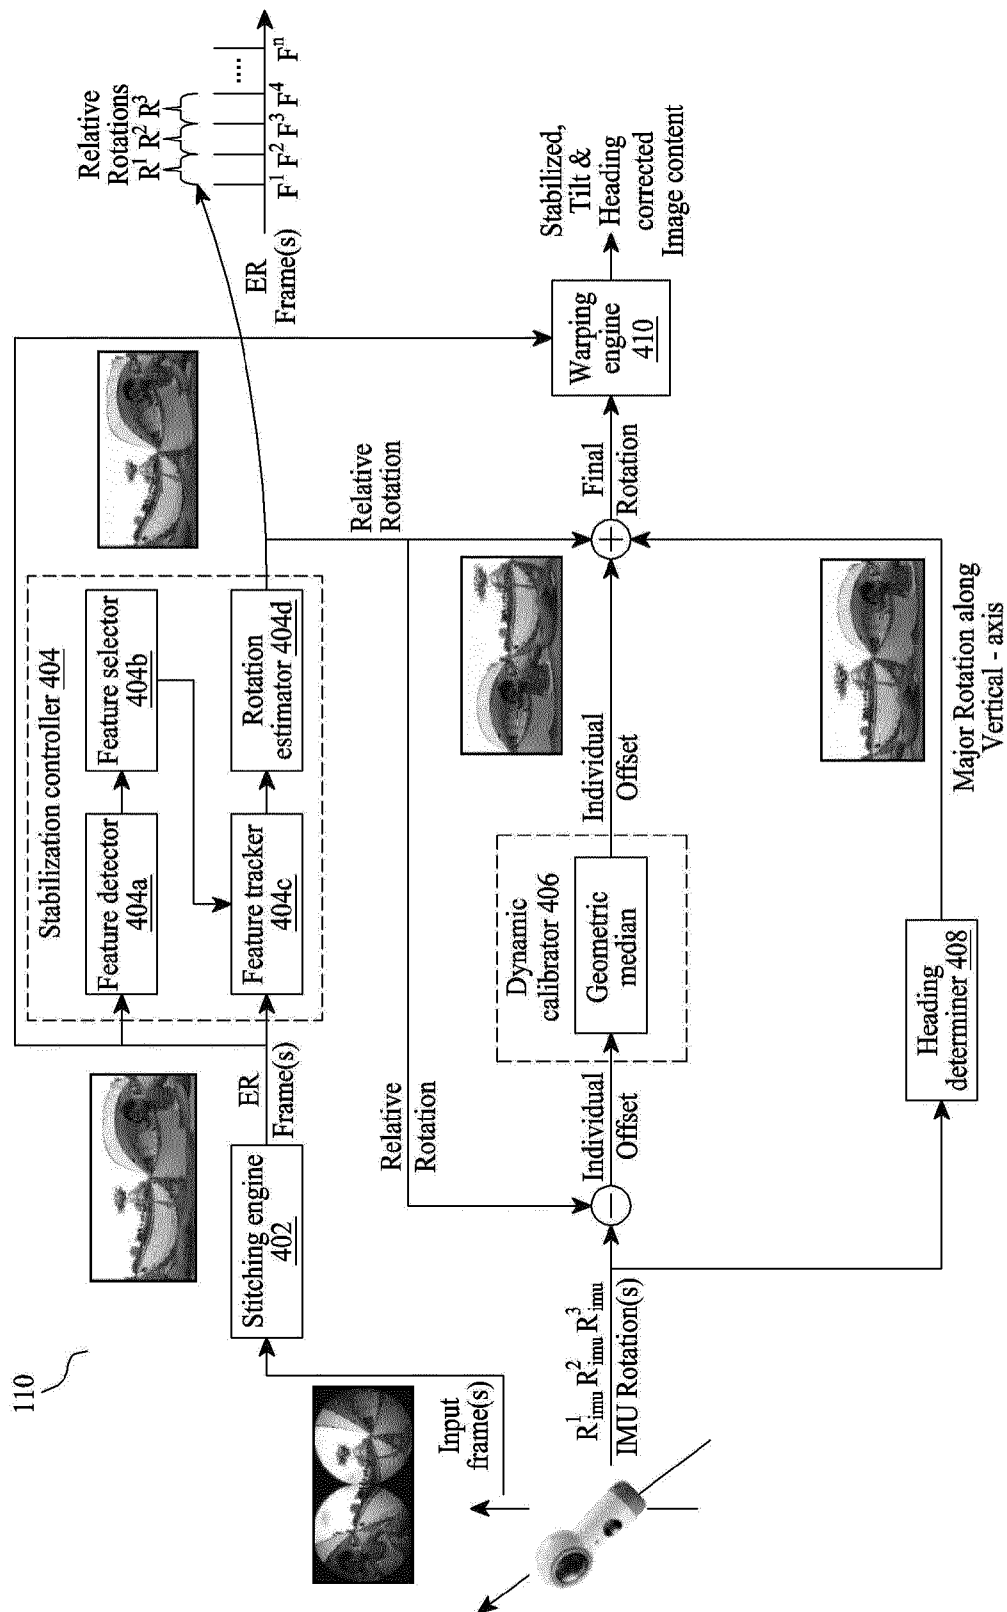


[Fig. 5]

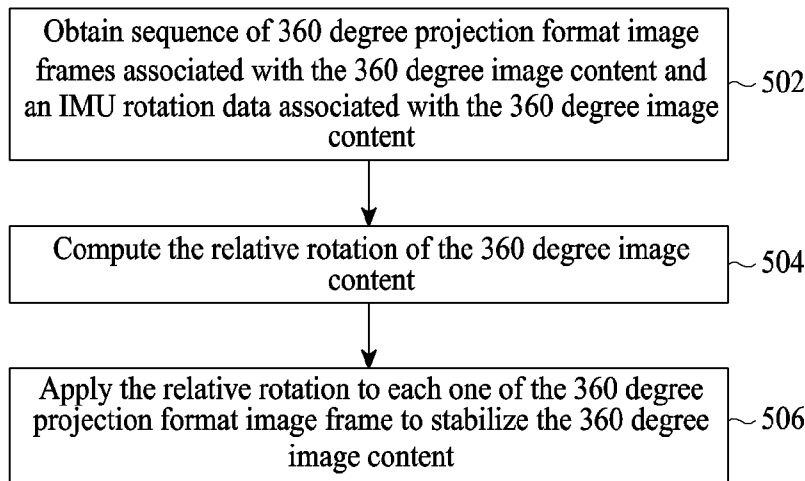


[Fig. 6]

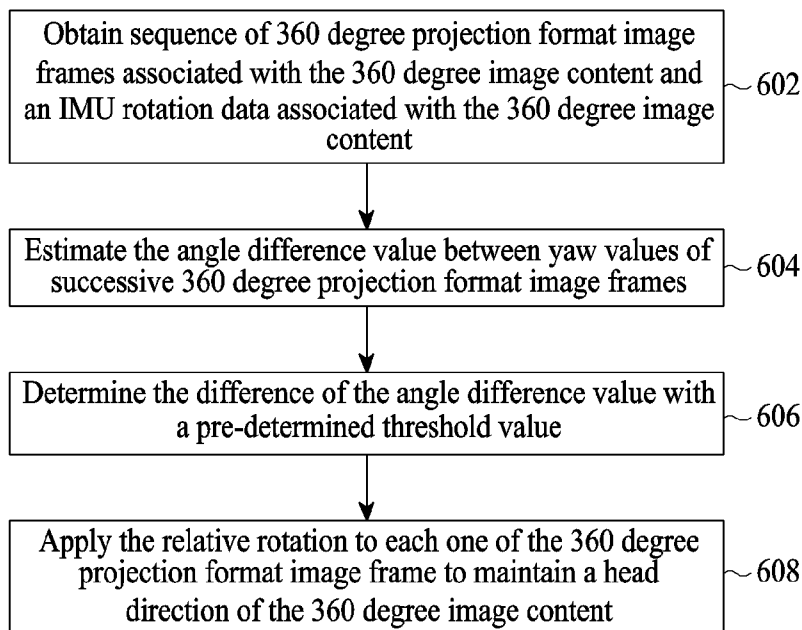

[Fig. 7]

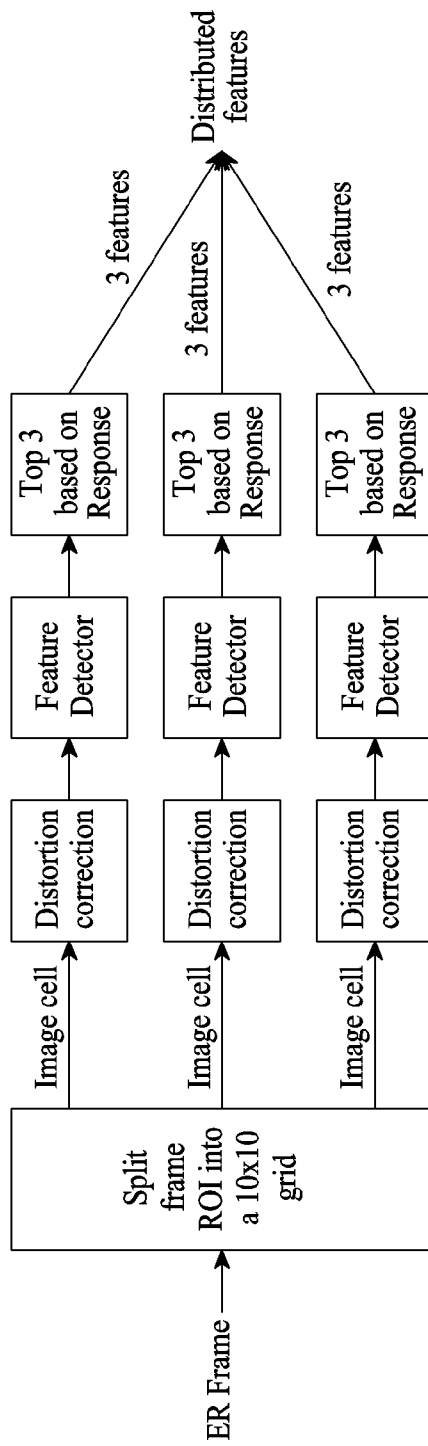


[Fig. 8]

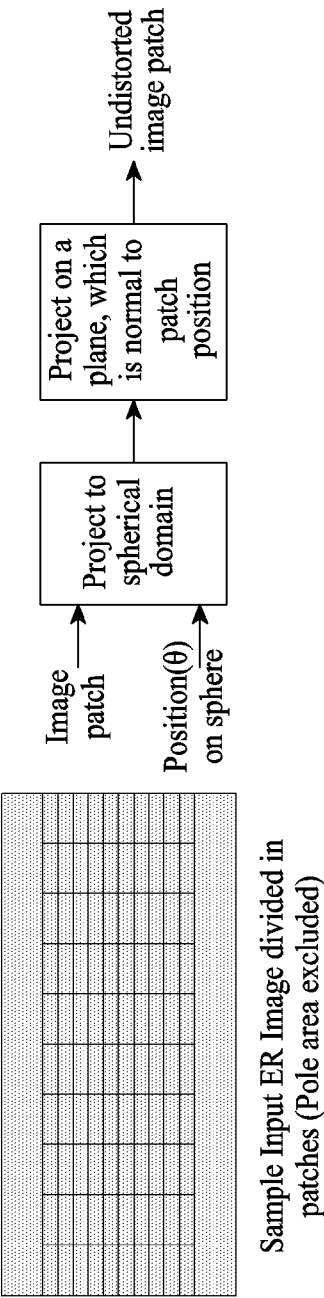


[Fig. 9A]



[Fig. 9B]

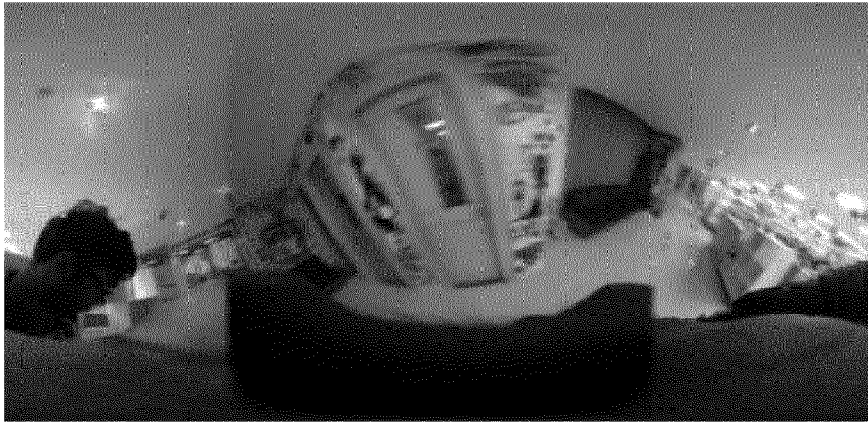

[Fig. 10]

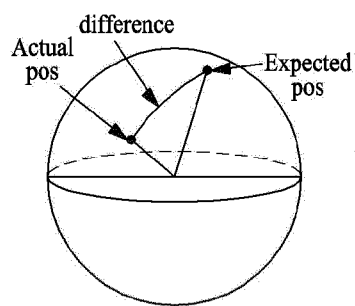


Points detected on frame 1 shown as circles in frame 1




Points tracked till frame 2 shown as circles in frame 2


[Fig. 11]

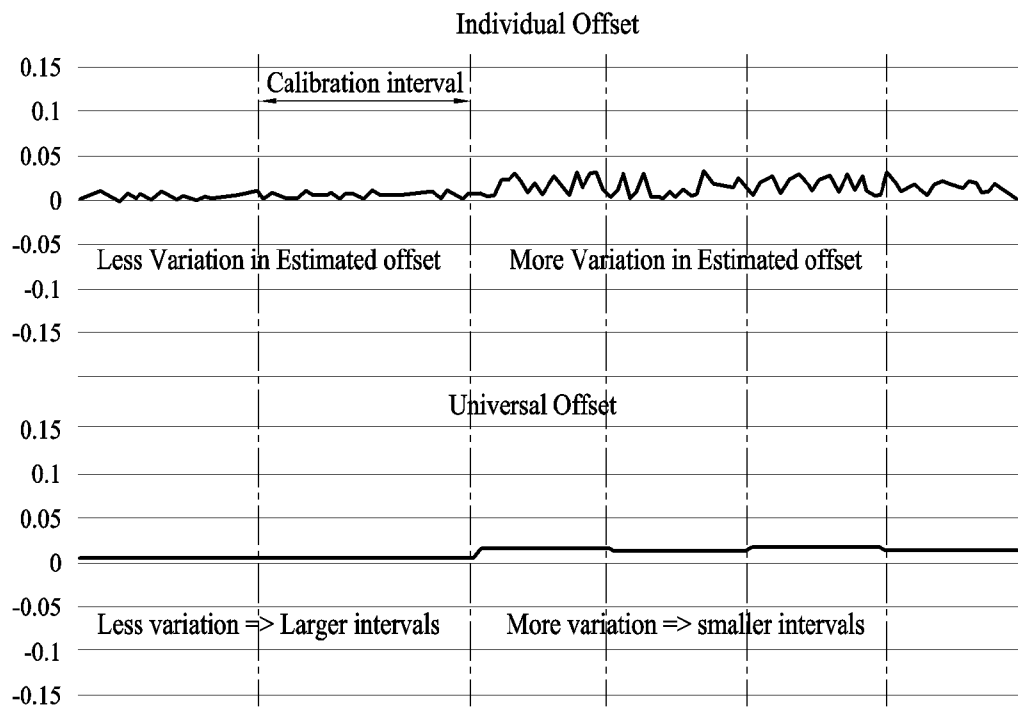


[Fig. 12A]



[Fig. 12B]



[Fig. 12C]















[Fig. 12D]



[Fig. 12E]



[Fig. 13]

Sequence of frames in 360° video				
Frame 1	Frame 2	Frame 3	Frame 4	Frame 5
				
a. Unintended camera shake/tilt				
				
b. Input Video				
				
c. Relative rotation computed from feature points				
				
d. Relative rotations computed from IMU				
				
e. Final Rotation computed				

[Fig. 14]



(a)




(b)




(c)

[Fig. 15]

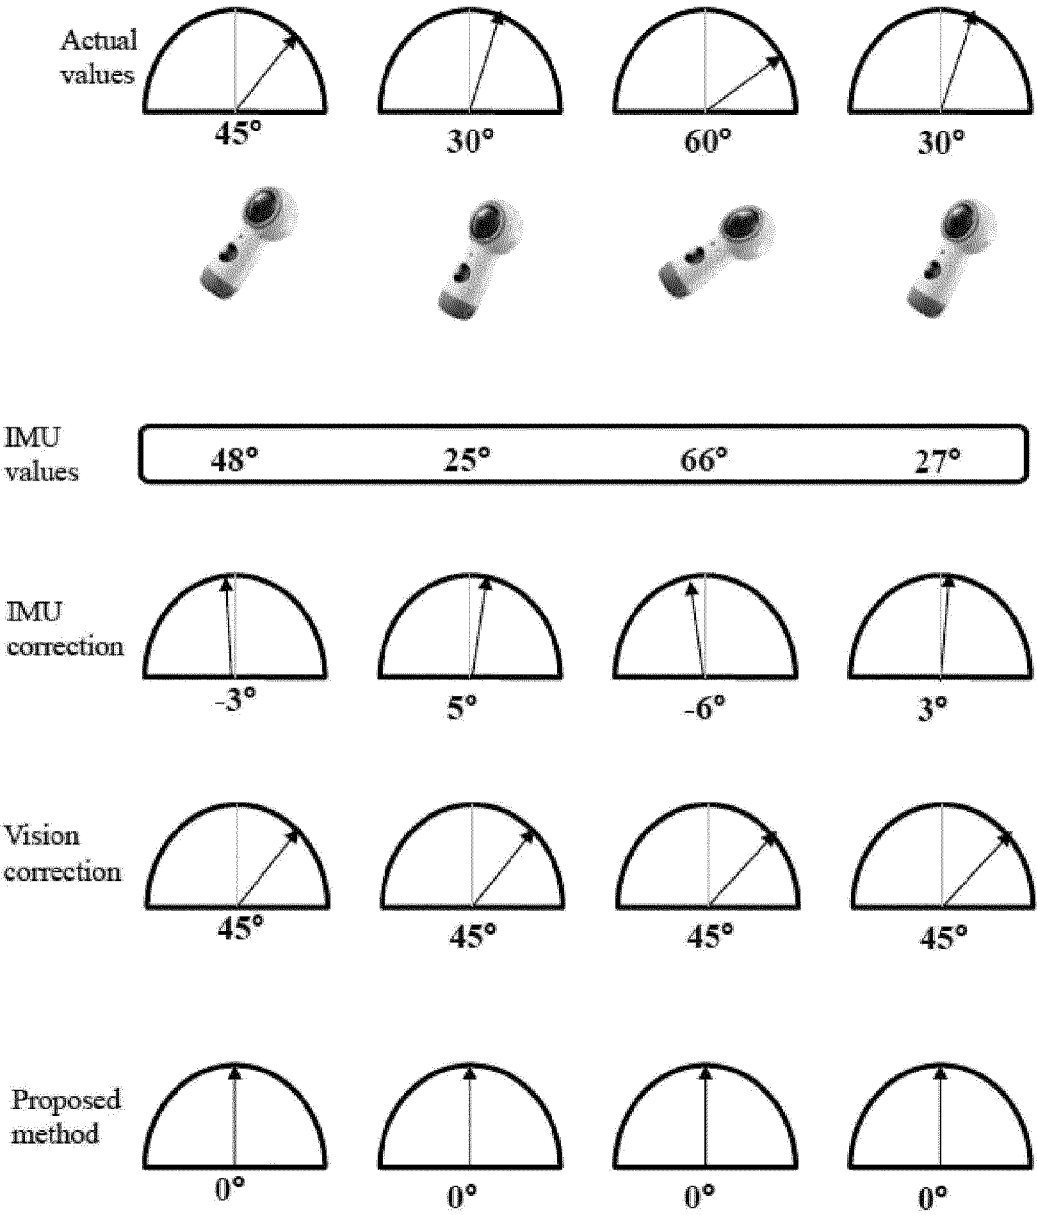


[Fig. 16]

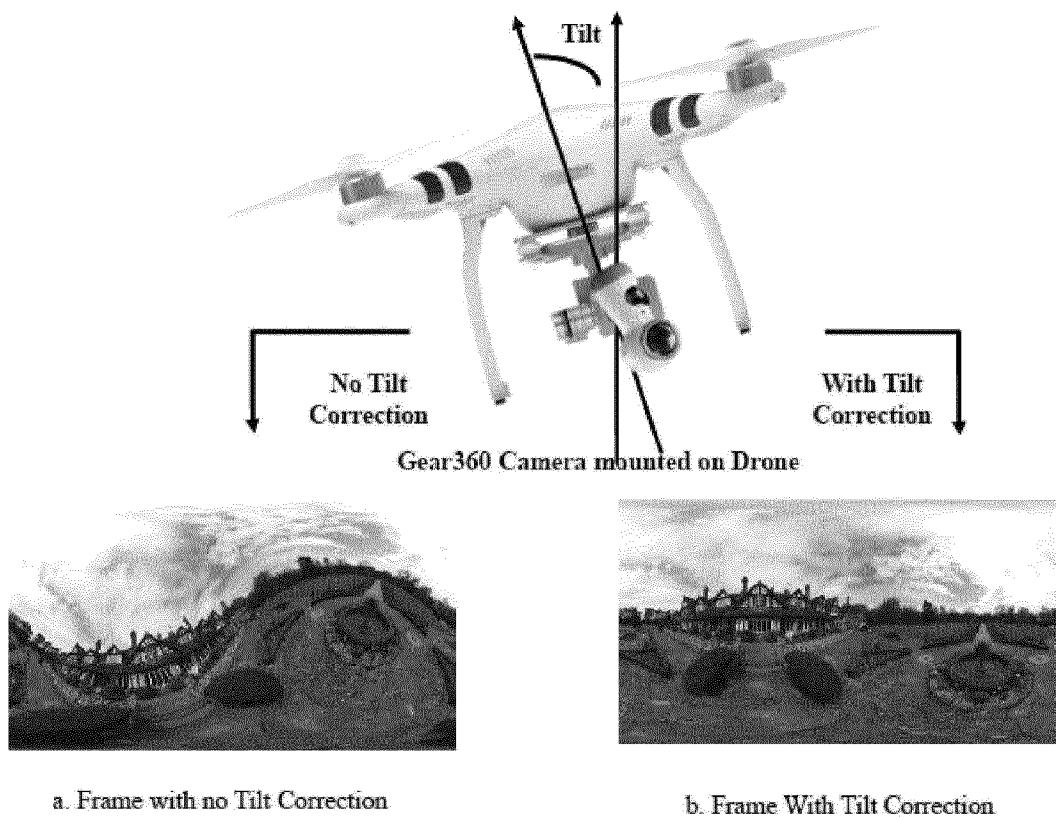

[Fig. 17]



[Fig. 18]

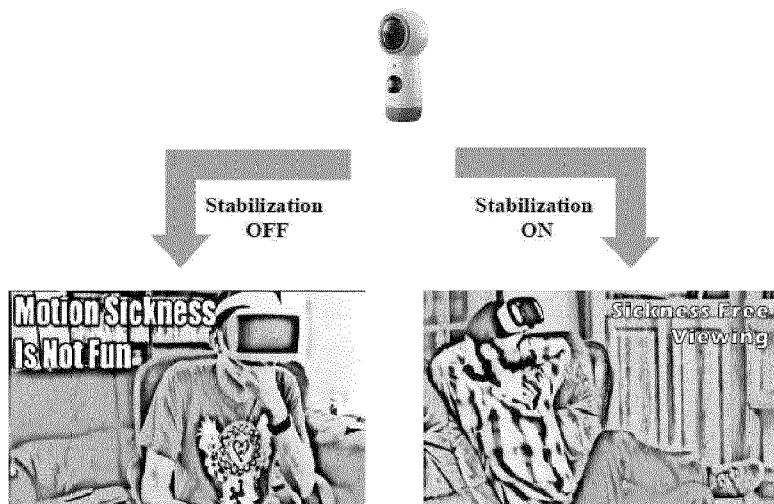

A. CLASSIFICATION OF SUBJECT MATTER**H04N 13/117(2018.01)i, H04N 13/363(2018.01)i, H04N 13/282(2018.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04N 13/117; G06F 3/0484; G06F 3/0488; G06T 3/00; H04N 1/387; H04N 13/04; H04N 19/46; H04N 19/597; H04N 7/00; H04N 13/363; H04N 13/282

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: 360 degree projection format image, inertial measurement unit (IMU), rotation data, relative rotation, individual offset, angle difference, feature point

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2013-0002807 A1 (MICHAEL VOGEL et al.) 03 January 2013 See paragraphs [0053]-[0055]; and figure 3E.	1, 11
Y		2-4, 6, 8-10, 12-14
A		5, 7
Y	US 2018-0007352 A1 (NOKIA TECHNOLOGIES OY) 04 January 2018 See paragraphs [0068]-[0070]; claims 2, 8-9; and figure 4.	2-4, 6, 8-10, 12-14
A	JP 2017-021430 A (KDDI CORP.) 26 January 2017 See paragraph [0009]; and figure 1.	1-14
A	US 2016-0092080 A1 (DISNEY ENTERPRISES, INC.) 31 March 2016 See paragraph [0046]; and figure 6.	1-14
A	WO 2018-045108 A1 (VID SCALE, INC.) 08 March 2018 See paragraph [0045]; and figure 5.	1-14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

04 July 2019 (04.07.2019)

Date of mailing of the international search report

05 July 2019 (05.07.2019)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

AHN, Jeong Hwan

Telephone No. +82-42-481-8633



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2019/003890

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2013-0002807 A1	03/01/2013	US 2010-0174507 A1 US 2011-0264405 A1 US 2014-0104602 A1 US 7991575 B2 US 8285512 B2 US 8600700 B2 US 9175955 B2	08/07/2010 27/10/2011 17/04/2014 02/08/2011 09/10/2012 03/12/2013 03/11/2015
US 2018-0007352 A1	04/01/2018	WO 2018-002882 A1	04/01/2018
JP 2017-021430 A	26/01/2017	JP 2018-021430 A5	31/05/2018
US 2016-0092080 A1	31/03/2016	US 9436369 B2	06/09/2016
WO 2018-045108 A1	08/03/2018	CN 109644279 A KR 10-2019-0054060 A TW 201813372 A	16/04/2019 21/05/2019 01/04/2018