



(86) Date de dépôt PCT/PCT Filing Date: 2015/05/19
(87) Date publication PCT/PCT Publication Date: 2015/11/26
(85) Entrée phase nationale/National Entry: 2016/11/15
(86) N° demande PCT/PCT Application No.: US 2015/031480
(87) N° publication PCT/PCT Publication No.: 2015/179342
(30) Priorités/Priorities: 2014/05/19 (US62/000,209);
2015/05/18 (US14/714,709)

(51) Cl.Int./Int.Cl. *C02F 1/14* (2006.01),
B01D 1/26 (2006.01), *B01D 5/00* (2006.01)
(71) Demandeur/Applicant:
D AND D MANUFACTURING, US
(72) Inventeurs/Inventors:
POLK, DALE, JR., US;
POLK, TIMOTHY, US
(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : SYSTÈME DE DISTILLATION SOLAIRE MULTI-EFFET ET PROCÉDES ASSOCIÉS

(54) Title: MULTI-EFFECT SOLAR DISTILLATION SYSTEM AND ASSOCIATED METHODS

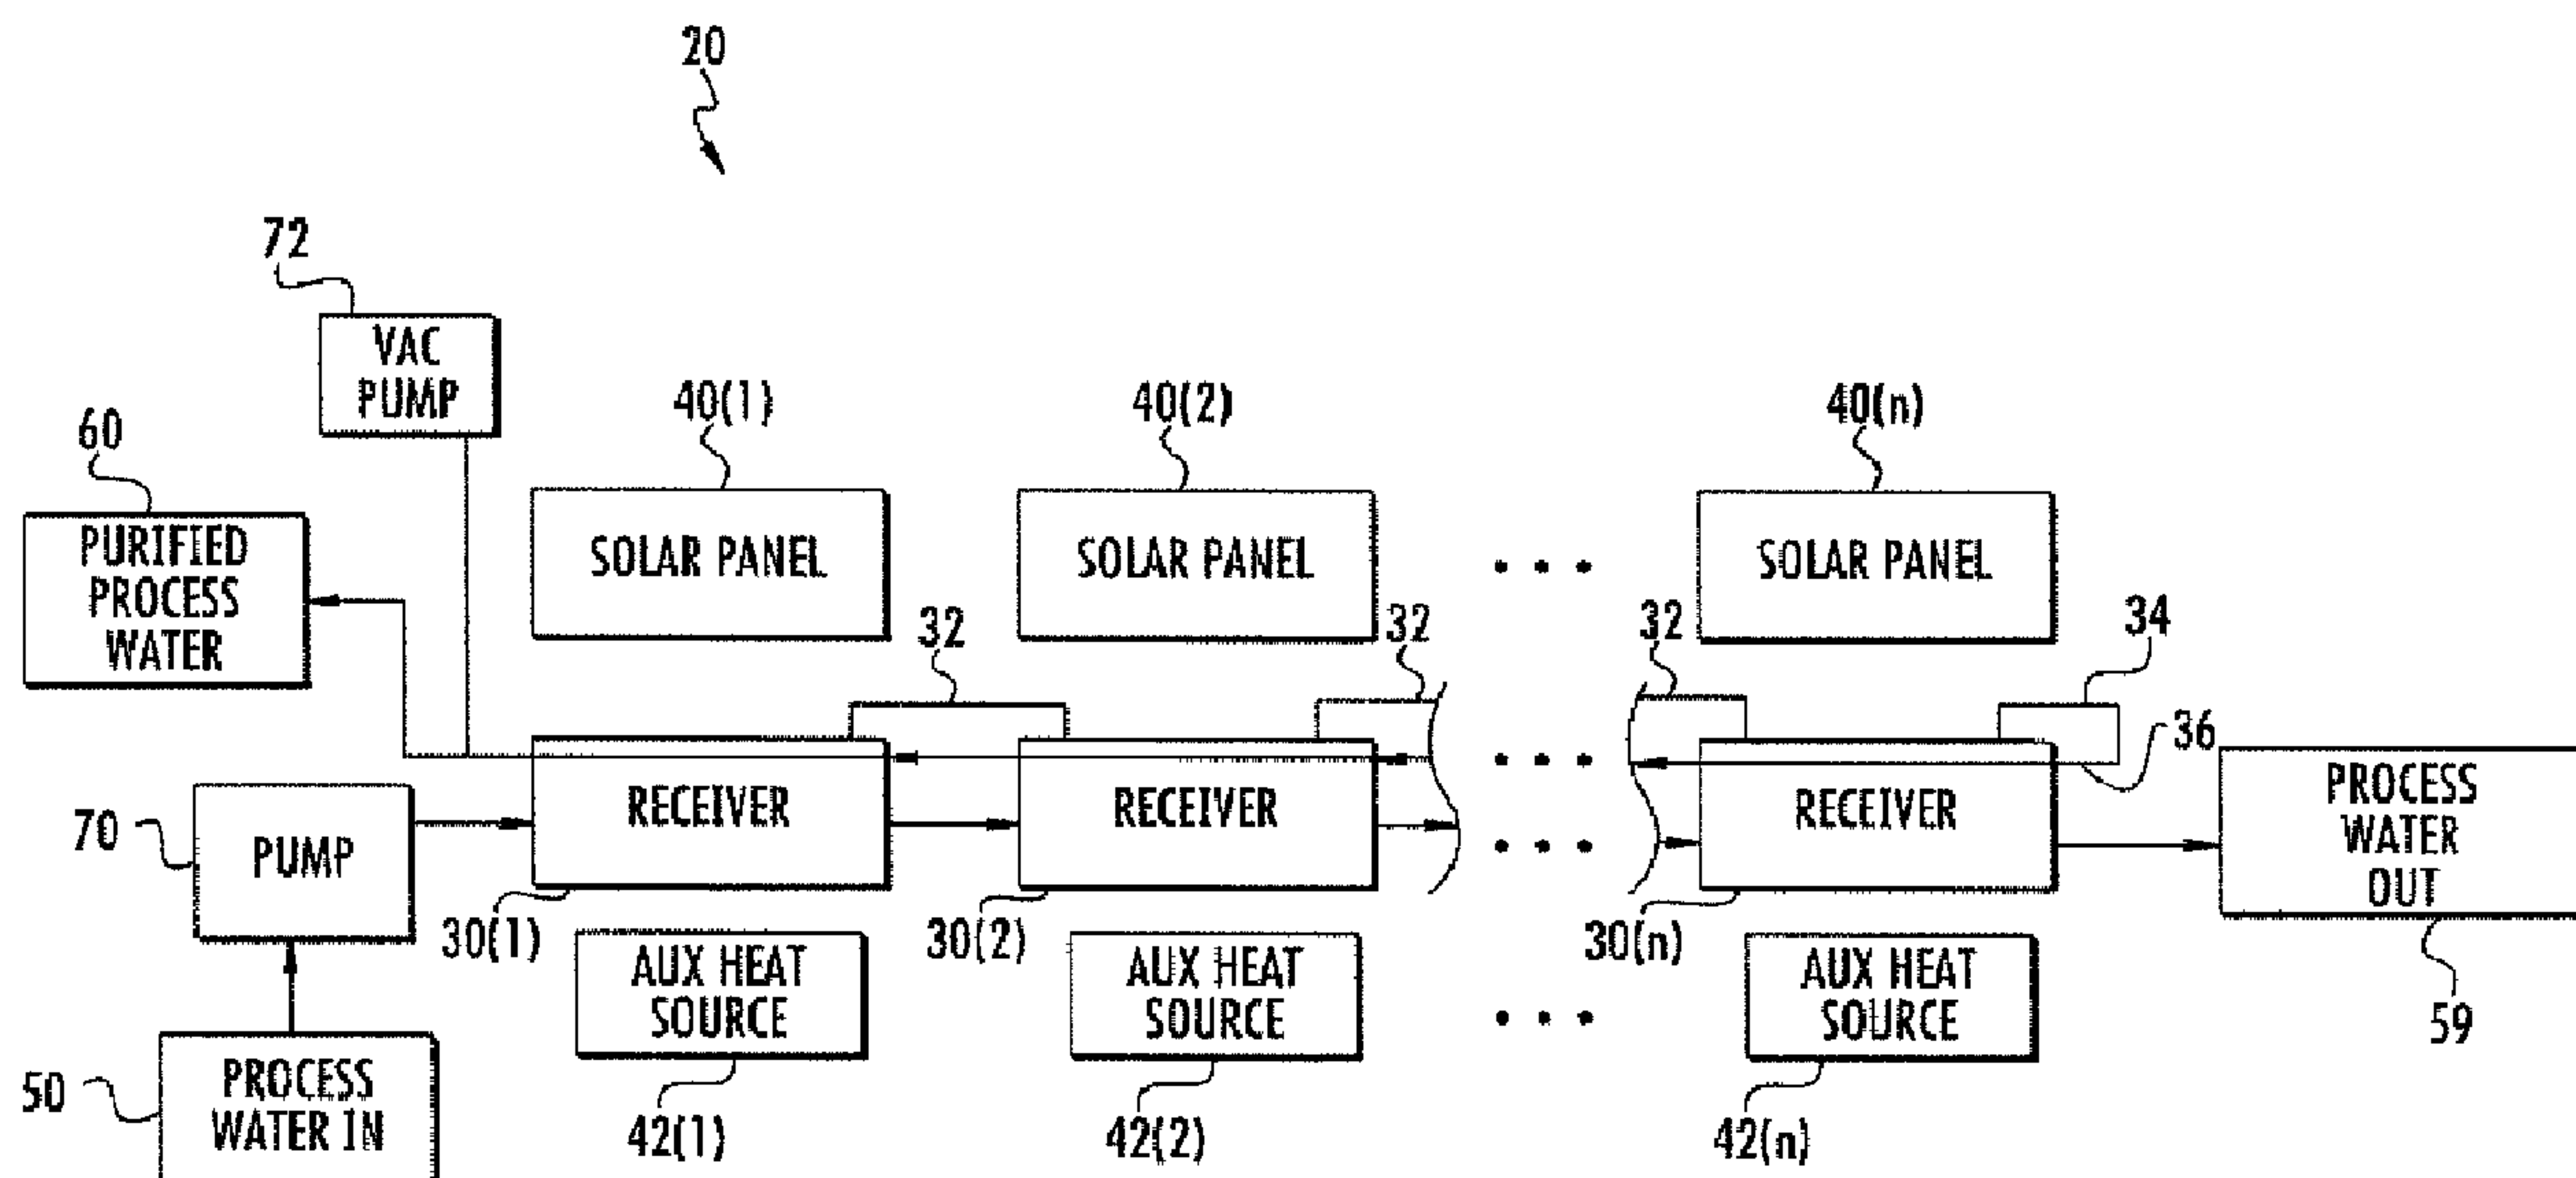


FIG. 1

(57) **Abrégé/Abstract:**

A solar distillation system includes solar panels, and receivers adjacent the solar panels to receive process water to be processed to purified process water. The process water flows from a first receiver to a last receiver and is heated by reflected sunlight. Vapor



(57) **Abrégé(suite)/Abstract(continued):**

tubes are coupled to the receivers, with each respective vapor tube coupled between adjacent receivers. Water vapor is generated as the process water is heated within each receiver. The water vapor flows via the respective vapor tubes between the adjacent receivers towards the last receiver. A return vapor tube is coupled to the last receiver. A distillation tube is coupled to the return vapor tube to receive the water vapor. The distillation tube extends through the receivers from the last receiver to the first receiver. As the water vapor travels through the distillation tube it changes to a liquid, with the liquid being the purified process water.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 November 2015 (26.11.2015)

WIPO | PCT

(10) International Publication Number
WO 2015/179342 A1

(51) International Patent Classification:

C02F 1/14 (2006.01) **B01D 5/00** (2006.01)
B01D 1/26 (2006.01)

(21) International Application Number:

PCT/US2015/031480

(22) International Filing Date:

19 May 2015 (19.05.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/000,209	19 May 2014 (19.05.2014)	US
14/714,709	18 May 2015 (18.05.2015)	US

(71) Applicant: **D AND D MANUFACTURING** [US/US];
1111 Norwoods Ave., Titusville, Florida 32796 (US).

(72) Inventors: **POLK, JR, Dale**; 1111 Norwoods Ave., Titusville, Florida 32796 (US). **POLK, Timothy**; 1111 Norwood Ave., Titusville, Florida 32796 (US).

(74) Agents: **TAYLOR, Michael W.** et al.; Allen Dyer, Doppelt, Milbrath & Gilchrist, P.A., 255 S. Orange Avenue, Suite 1401, Orlando, Florida 32802-3791 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MULTI-EFFECT SOLAR DISTILLATION SYSTEM AND ASSOCIATED METHODS

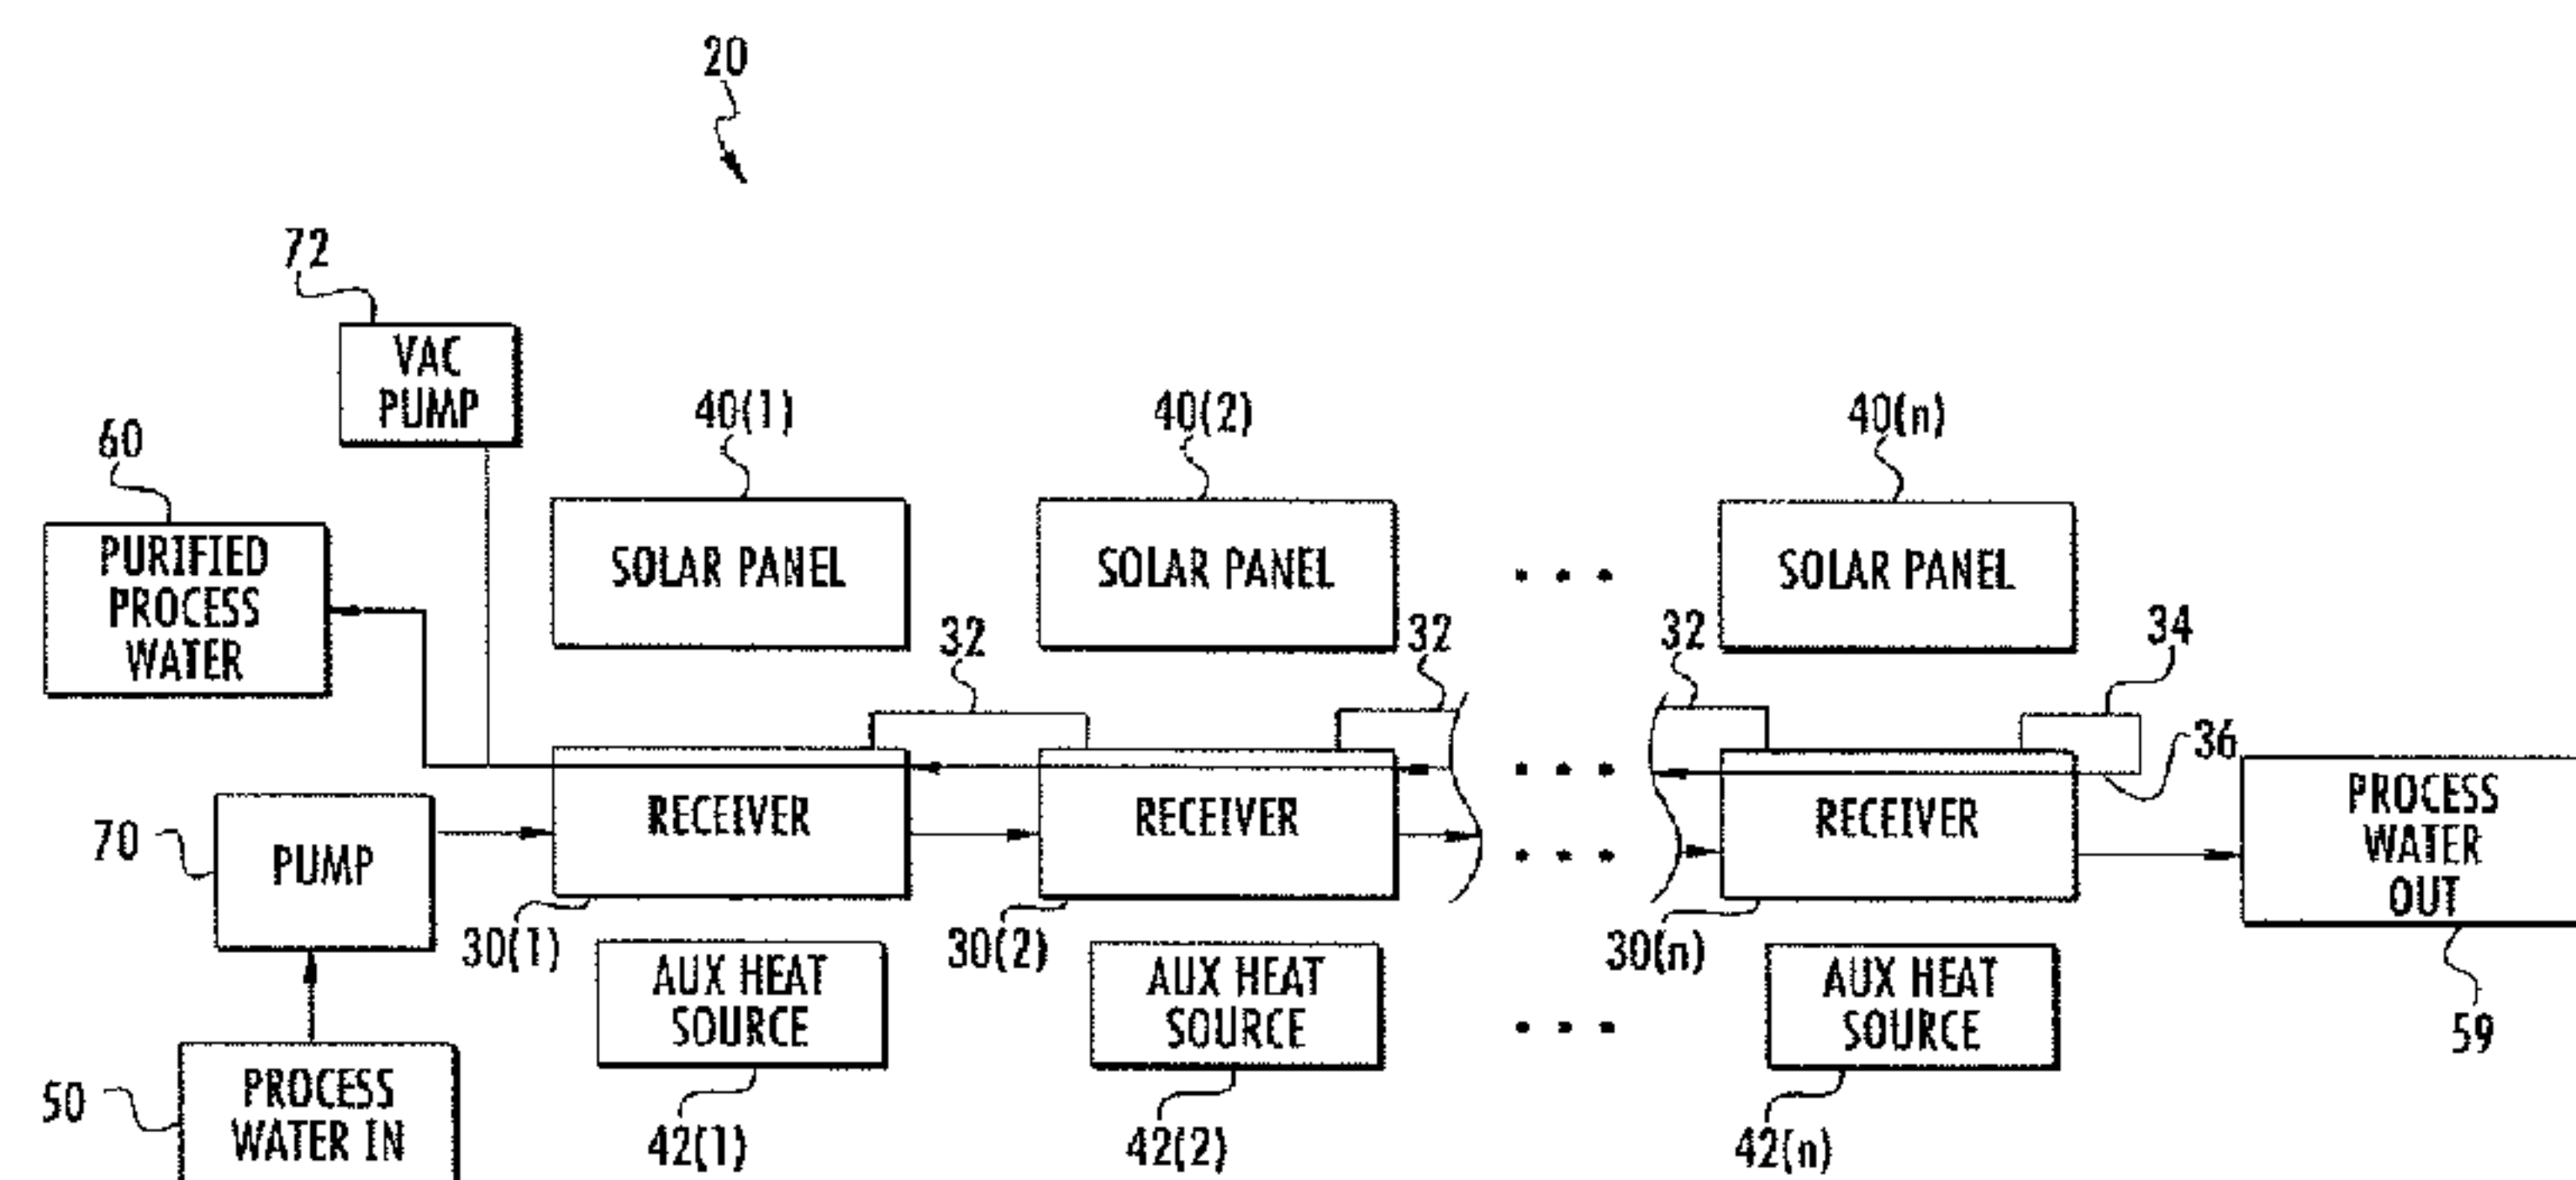


FIG. 1

(57) Abstract: A solar distillation system includes solar panels, and receivers adjacent the solar panels to receive process water to be processed to purified process water. The process water flows from a first receiver to a last receiver and is heated by reflected sunlight. Vapor tubes are coupled to the receivers, with each respective vapor tube coupled between adjacent receivers. Water vapor is generated as the process water is heated within each receiver. The water vapor flows via the respective vapor tubes between the adjacent receivers towards the last receiver. A return vapor tube is coupled to the last receiver. A distillation tube is coupled to the return vapor tube to receive the water vapor. The distillation tube extends through the receivers from the last receiver to the first receiver. As the water vapor travels through the distillation tube it changes to a liquid, with the liquid being the purified process water.

WO 2015/179342 A1

MULTI-EFFECT SOLAR DISTILLATION SYSTEM AND ASSOCIATED METHODS

Related Application

[0001] This application claims the benefit of U.S. Provisional Application Serial No. 62/000,209 filed May 19, 2014, U.S. Patent Application Serial No. 14/714,709 filed May 18, 2015 the entire contents of which are incorporated herein by reference.

Field of the Invention

[0002] The present invention relates to the field of water treatment, and, more particularly, to the distillation of water using solar power.

Background of the Invention

[0003] Fresh water is a critical need in many parts of the world. Other contaminated water or liquid, such as oil field frac water and industrial waste water, also needs to be processed before being disposed. A number of different methods have been developed for processing seawater or other contaminated water that is not portable to provide fresh water.

[0004] One approach is to use settling and filtration systems to remove relatively large impurities from the seawater or contaminated water. Filtration is also capable of removing smaller contaminants down to the size of bacteria, and perhaps even smaller particulates in certain cases. However, filtration systems capable of removing contaminants down to ionic size are quite costly, both in terms of manufacture and in maintenance as well.

[0005] An alternative method of water purification is distillation. Distillation works well in the removal of virtually all impurities from water. Distillation is used in many areas for the desalination of seawater. However, most distillation processes require considerable heat to produce sufficient evaporation since the water is heated to

boiling to accelerate the evaporation process. This is particularly true of large-scale distilling operations.

[0006] Passive sources of energy (e.g., solar energy) have been developed to produce the required heat for evaporation. One approach for a solar-powered distillation system to produce fresh water from seawater is disclosed in U.S. Patent No. 8,613,840. The solar-powered distillation system includes a heat-absorbent evaporation panel having mutually opposed evaporation surfaces. The panel is contained within a housing. Each side of the housing includes a lens panel. The lenses of each panel focus solar energy onto the respective surfaces of the evaporation panel. A mirror is positioned to each side of the housing to reflect solar energy onto the respective lens panels. Contaminated water enters the top of the housing to run down the surfaces of the evaporation panel. A fresh water collection pipe extends from the top of the housing to a collection tank. A scraper mechanism removes salt and/or other residue from the surfaces of the evaporation panel to allow the residue to be removed periodically from the bottom of the housing.

[0007] Another approach for a solar-powered distillation system is provided by WaterFX. Solar troughs reflect sunlight to a pipe filled with a heat transfer fluid (HTF), such as mineral oil. The heated mineral oil powers a heat pump. The heat is fed to a multi-effect or multi-stage distillation system that evaporates freshwater from the seawater or contaminated water. The multi-effect approach to evaporating freshwater is efficient since each stage essentially reuses the energy from a previous stage. The steam that is produced condenses into pure liquid water, and the remaining salt solidifies and can be removed.

[0008] Even in view of the above solar distillation approaches there is still a need to improve upon such a system for processing seawater or other contaminated water that is not portable to provide fresh water.

Summary of the Invention

[0009] A solar distillation system includes a plurality of solar panels configured to reflect sunlight, and a plurality of receivers adjacent the plurality of solar panels and configured to receive process water to be processed to purified process water. The plurality of receivers may comprise at least a first receiver and a last receiver, with the process water flowing from the first receiver to the last receiver and being heated by the reflected sunlight.

[0010] Vapor tubes may be coupled to the receivers, with each respective vapor tube being coupled between adjacent receivers. Water vapor is generated as the process water is heated within each receiver, with the water vapor flowing via the respective vapor tubes between the adjacent receivers towards the last receiver.

[0011] A return vapor tube may be coupled to the last receiver, and a distillation tube may be coupled to the return vapor tube to receive the water vapor. The distillation tube may extend through the plurality of receivers from the last receiver to the first receiver. As the water vapor travels through the distillation tube the water vapor changes to a liquid, with the liquid being the purified process water.

[0012] The plurality of receivers may be connected in series so that each receiver uses heat energy from a previous receiver to heat the process water, except for the first receiver. In other words, the process water may be heated in stages, with each receiver corresponding to a stage. A multi-stage or multi-effect approach to heating the process water is efficient since each stage essentially reuses the energy from a previous stage. As the process water is heated within each receiver, the water vapor is generated.

[0013] Each receiver may be filled by the process water except for an air gap so as to allow the water vapor to develop. The distillation tube may extend through each receiver below the air gap. The distillation tube may be in direct contact with the process water within each receiver, and as the water vapor changes to the liquid within the distillation tube heat is given off. The heat given off during this phase change may be provided to each stage, thus further increasing the efficiency of the solar distillation system. An output of the distillation tube provides the purified process water.

[0014] Each vapor tube may extend between the air gaps in adjacent receivers. Each receiver has a given volume, and the air gap may be about 10 to 20% of the given volume.

[0015] The plurality of solar panels may be configured as parabolic troughs, with the plurality of receivers being positioned within a focal point of the plurality of solar panels. Each receiver may have an I-shape or a double Y-shape.

[0016] The solar distillation system may further comprise a plurality of auxiliary heat sources adjacent the plurality of receivers. The solar distillation system may further comprise a vacuum coupled to the distillation tube to direct flow of the water vapor through the plurality of receivers and the distillation tube. The solar distillation system

may further comprise a pump coupled to the first receiver to control a flow rate of the process water through the plurality of receivers.

[0017] The process water may comprise at least one of sea water, frac water and waste water. The last receiver may output the process water that does not turn to water vapor.

[0018] A method for processing process water to purified process water using a solar distillation system as described above comprises is provided. The method comprises reflecting sunlight from the plurality of solar panels to the plurality of receivers, and providing the process water to the plurality of receivers. The process water flows from the first receiver to the last receiver and may be heated by the reflected sunlight. Water vapor may be generated within each receiver as the process water is heated, with the water vapor flowing via the respective vapor tubes between the adjacent receivers towards the last receiver. The method may further comprise providing the water vapor from the return vapor tube at the last receiver to the distillation tube, and as the water vapor travels through the distillation tube the water vapor changes to a liquid, with the liquid being the purified process water.

Brief Description of the Drawings

[0019] FIG. 1 is a block diagram of a multi-effect solar distillation system in accordance with the present invention.

[0020] FIG. 2 is a detailed view of the first and second receivers illustrated in FIG. 1.

[0021] FIG. 3 is a detailed view of the last receiver illustrated in FIG. 1.

[0022] FIG. 4 is a perspective view of one embodiment of the receivers and solar panels illustrated in FIG. 1.

[0023] FIG. 5 is a side view of one embodiment of the receiver illustrated in FIG. 1 having an I-shape.

[0024] FIG. 6 is a side view of another embodiment of the receiver illustrated in FIG. 1 having a Y-shape.

[0025] FIG. 7 is an exposed perspective view of another embodiment of the last receiver illustrated in FIG. 1 with an auger included therein.

[0026] FIG. 8 is an enlarged cross-sectional view of section 110" highlighted in FIG. 7.

[0027] FIG. 9 is a flowchart illustrating a method for processing process water to purified process water using a solar distillation system as illustrated in FIG. 1.

[0028] FIG. 10 is a block diagram of another embodiment of a multi-effect solar distillation system in accordance with the present invention.

Detailed Description of the Preferred Embodiments

[0029] The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout, and prime and double notations are used to indicate similar elements in alternative embodiments.

[0030] Referring initially to FIG. 1, a multi-effect solar distillation system 20 includes a plurality of receivers 30(1)-30(n) and a plurality of solar panels 40(1)-40(n) adjacent the plurality of receivers. Each receiver is positioned within a focal point of a respective solar panel.

[0031] The water to be processed will be generally referred to as process water 50. The process water 50 may be sea water, oil field frac water or industrial waste water, for example. The process water 50 is heated as it flows through each of the receivers 30(1)-30(n). As the process water 50 is heated, water vapor is generated, which will eventually provide purified process water 60.

[0032] The process water 50 is heated in stages, with each receiver corresponding to a stage. A multi-stage or multi-effect approach to heating the process water 50 is efficient since each stage essentially reuses the energy from a previous stage. As the process water 50 is heated within each receiver, water vapor is generated.

[0033] In the illustrated embodiment, a small percentage of the process water 50 is turned to vapor as it travels through the receivers 30(1)-30(n). This percentage may be within a range of about 10-20%, for example. The last receiver 30(n) directs the remaining process water 54 to the sea if it is sea water, or to a holding tank for further processing if it is oil field frac water or industrial waste water.

[0034] Water vapor flows between adjacent receivers 30(1), 30(2) via a vapor tube 32 connected therebetween. At the last receiver 30(n), a return vapor tube 34 is connected to a distillation tube 36. The return vapor tube 34 directs the vapor to an

input of the distillation tube 36. The distillation tube 36 extends through each of the receivers 30(1)-30(n) but is separate from the process water 52 circulating within each receiver.

[0035] As the water vapor travels through the distillation tube 36, it changes phases back to a liquid. The heat given off during this phase change is provided to each respective stage, thus further increasing the efficiency of the illustrated multi-effect solar distillation system 20. An output of the distillation tube 36 provides the purified process water 60.

[0036] Since the process water 50 flows through the receivers 30(1)-30(n) instead of a heat transfer fluid (HTF), the illustrated multi-effect solar distillation system 20 is also referred to as an "in-situ" multi-effect solar distillation system.

[0037] The process water 50 enters an input 33 of the first receiver 30(1) and fills the first receiver 30(1) except for an air gap 35 at the top so as to allow water vapor to develop, as illustrated in FIG. 2. The air gaps 35 may be about 10-20% of the volume of the receivers. The distillation tube 36 is positioned so that it is below the gap 35. As noted above, positioning the distillation tube 36 in contact with the process water 50 advantageously allows heat to be given off as the water vapor changes phases back to a liquid.

[0038] An output 37 of the first receiver 30(1) is connected to an input 33 of the second receiver 30(2). The process water 52 fills the second receiver 30(2) except for another air gap 35 at the top so as to allow water vapor to develop. This process continues for each of the receivers.

[0039] A vapor tube 32 couples together the air gaps 35 in any two adjacent receivers. In the illustrated example, a vapor tube 32 provides a passageway for the water vapor to travel from the air gap 35 in the first receiver 30(1) to the air gap 35 in the second receiver 30(2). This process continues for each of the receivers. At the last receiver 30(n), a return vapor tube 34 couples the air gap 35 therein to the distillation tube 36, as illustrated in FIG. 3.

[0040] As will now be discussed in greater detail, the multi-effect solar distillation system 20 includes multiple components for heating the process water 50 to the desired temperature. These components include a structure to preheat the process water, a parabolic trough for the capture of solar thermal energy, a circulation pump, a receiver with a large solar impingement area and a low interior volume, and a distillation tube.

[0041] To further improve heating of the process water **50**, the multi-effect solar distillation system **20** may include a vacuum pump or system **72** coupled to the distillation tube to help lower the boiling temperature of the process water **50** as well as provide direction to the flow of the water vapor. In addition, a plurality of auxiliary heat sources **42(1)-42(n)** may be positioned adjacent the plurality of receivers **30(1)-30(n)** to allow for low or no sun operation. The auxiliary heat sources **42(1)-42(n)** may be gas burners, for example.

[0042] Preheat can be accomplished by storing the process water **50** in a lined pond or tank with a large surface exposure area that is covered by a greenhouse style building. The building has sides and a roof made from a clear material that will let the ambient solar energy in and warm the stored process water **50**. The roof of the building may be shaped so as to channel any water vapor that will condense into a collector as this will be purified process water. The building may be constructed so that minimal heat and water vapor will be lost to the outside environment so as to increase efficiency.

[0043] The solar panels **40(1)-40(n)** may be configured as large aperture parabolic troughs, as illustrated in FIG. 4. Each parabolic trough includes a reflective material for directing the sunlight to a focal point. The reflective material may be glass mirrors or thin reflective film, for example. The parabolic troughs may be placed in series to allow for the heating of the process water **50** to a proper temperature.

[0044] A pump **70** moves the process water through the receivers **30(1)-30(n)**, as illustrated in FIG. 1. The pump **70** includes controls to vary the flow rate of the process water **50**. Control of the flow rate controls a rate of evaporation of the process water **50**. The flow rate of the process water **50** through the receivers **30(1)-30(n)** may be within a range of about 5-15 gallons per minutes, for example. As readily appreciated by those skilled in the art, the flow rate is selected so that a desired percentage of the process water vaporizes as it travels through the receivers **30(1)-30(n)**. As the flow rate is increased, then the number of receiver stages would also need to be increased to obtain the desired temperate to vaporize the process water **50**. The flow rate is inversely proportional to the energy absorbed by the receivers **30(1)-30(n)**.

[0045] The receivers **30(1)-30(n)** are configured to provide a large solar impingement area, yet have a low interior volume. The receivers **30(1)-30(n)** are located within the parabolic trough **40(1)-40(n)** so that the solar energy is reflected thereon from both

upper and lower halves of the parabolic trough. The receivers **30(1)-30(n)** are mounted so that they may be adjusted to aid in an optimum position to receive the solar energy.

[0046] A fill port or input **33** and an exit port of output **37** at a bottom of each receiver allows for the process water **50** to enter and exit. The receiver is not limited to any particular design. One example design of a receiver **30(1)** is an I-shape, as illustrated in FIG. 5. The I-shaped receiver **30(1)** is sized according to the corresponding parabolic trough **40(1)**. Example dimensions are 6 inch top and bottom sections centered perpendicular to a 12 inch vertical section. This structure is hollow on the inside to allow for the process water to be directed down the length of the receiver.

[0047] Several inches down from the top of the vertical sides would flare away from each other to increase the overall width to allow for the placement of the distillation or condensate tube **36**. The I-shaped receiver **30(1)** is sealed to collect the water vapor being created by the heating of the process water. The water level is controlled so that there will be a gap or void **35** at the top of the I-shaped receiver **30(1)** to allow for the collection of the water vapor. An opening at the top of the receiver **30(1)** directs the clean water vapor to a vapor tube **32** coupled to an adjacent receiver. The 6 inch wide top and bottom section of the receiver **30(1)** provides an additional area to capture solar energy. All dimensions are approximate and may be changed to ensure optimum solar impingement along the receiver **30(1)**.

[0048] Another example design of a receiver is a double Y-shaped receiver **30(1)'**, as illustrated in FIG. 6. The dimensions will be approximately 5.6 x 13 inches. This hollow double Y-shaped receiver **30(1)'** features a thin vertical chamber section with a Y-shaped section attached at both the top and bottom of the vertical section. Like the I-shaped receiver, the double Y-shaped receiver **30(1)'** is sealed to capture the water vapor upon heating and likewise features a condensate tube **36'** placed inside. An opening at the top of the receiver **30(1)'** directs the clean water vapor to a vapor tube coupled to an adjacent receiver.

[0049] As noted above, the distillation tube **36** extends through each of the receivers **30(1)-30(n)** but is separate from the process water **52** circulating within each receiver. The distillation tube **36** thus provides the outlet for the water vapor to escape the distillation chamber of the receiver. This tube could be directed to a heat exchanger where the incoming process water will pass over the tube to cool the

vapor so that water is formed and then collected into a purified water storage tank or pond. The distilled vapor in the condensate tube never intermingles with the process water.

[0050] The condensate tube runs "counter current" to the flow within the receiver. The condensate tube is formed within the receiver so that the flow of the steam is in an opposite direction to the process water. This allows the water vapor to release its heat into the flow of the process water to advantageously increase the efficiency of the cycle as the heat contained in the water vapor is returned into the cycle.

[0051] As noted above, the vacuum pump or system **72** may be used to lower the temperature at which water turns from a liquid into a vapor. A vacuum may also be applied to the port where the water vapor exits the receiver. The vacuum can be applied separately to each receiver or daisy chained in series. At the end of the vacuum line and before entering the vacuum pump **72**, the condensate will enter a separator to remove the distilled water from the air column.

[0052] As also noted above, a plurality of auxiliary heat sources **42(1)-42(n)** may be positioned underneath the plurality of receivers **30(1)-30(n)** to allow for low or no sun operation. The auxiliary heat sources **42(1)-42(n)** may be gas burners, for example, and when ignited, provides a heat source on the receivers **30(1)-30(n)** for the distillation process when solar conditions are not sufficient for the process to occur.

[0053] The pump **70** moves the process water throughout the receivers **30(1)-30(n)**. The pump **70** includes controls to vary the flow rate of the process water **50**. The flow of the process water may be slowed so that a much larger percentage of the process water is vaporized. As a result, salt or containments remaining from the evaporated process water accumulates to form a sludge in the last receiver **30(n)**". To force the sludge out of the last receiver **30(n)**", an auger **100**" is included therein. The auger **100**" forces the accumulated sludge out an exit port. The condensate tube **36**" runs through the center of the auger **100**". A motor **102**" coupled to the last receiver **30(n)**" drives the auger **100**".

[0054] To further increase the efficiency of collecting and directing solar energy to the receivers **30(1)-30(n)**, each solar panel **40(1)** may comprise a plurality of tunable solar collector panels carried by a base. Each solar collector panel may be tuned or biased in terms of position so that the sun's radiation as reflected from each solar collector panel is more accurately aligned on the focal line where the receiver **30(1)** is positioned so as to maximize the amount of energy received.

[0055] Collectively the solar collector panels may have a parabolic shape, and are separate from one another. Coupled to the solar collector panels are panel positioning devices. The panel positioning devices move the solar collector panels based on optical sensor devices that are used to determine alignment of the respective focal lines where the receivers are positioned so as to maximize the amount of energy received.

[0056] Yet another feature of the above-described receivers **30(1)-30(n)** is to position the metal receivers within within glass tube sections. The glass tube sections prevent heat from the metal receivers from escaping. Each glass tube section interfaces with an adjacent glass tube section via an expansion baffle. Metal seals at the ends of the glass tube sections are coupled to the expansion baffle. The expansion baffle allows for expansion and contraction of the metal seals so as to avoid breakage to the glass tube sections. A vacuum may also be pulled through the glass tube sections.

[0057] Even though process water **50** is flowing through the receivers **30(1)-30(n)**, a heat transfer fluid (HTF) may be flowed instead. The heated HTF would then power a heat pump. The heat may then be fed to a multi-effect or multi-stage distillation system that evaporates the freshwater from the seawater or contaminated water.

[0058] As an alternative to the condensate tube running "counter current" to the flow within the receivers, the condensate tube may run "co-current" to the flow within the receivers. The purified process water would exit the last receiver along with the process water out.

[0059] Another aspect is directed to a method for processing process water **50** to purified process water **60** using the solar distillation system **20**. From the start (Block **202**), the method comprises reflecting sunlight from the plurality of solar panels **40(1)-40(n)** to the plurality of receivers **30(1)-30(n)** at Block **204**. The process water **50** is provided to the plurality of receivers **30(1)-30(n)** at Block **206**, with the process water flowing from the first receiver **30(1)** to the last receiver **30(n)** and being heated by the reflected sunlight. Water vapor is generated at Block **208** within each receiver as the process water **50** is heated. The water vapor flows via the respective vapor tubes **32** between the adjacent receivers towards the last receiver **30(n)**. The water vapor is provided from the return vapor tube **34** at the last receiver **30(n)** to the distillation tube **36** at Block **210**. As the water vapor travels through the distillation tube **36** the water vapor changes to a liquid, with the liquid being the purified process water **60**. The method ends at Block **212**.

[0060] Another embodiment of a multi-effect solar distillation system **300** using a heat transfer fluid (HTF) will now be discussed in reference to FIG. 10. The illustrated multi-effect solar distillation system **320** includes a plurality of receivers **330(1)-330(n)** and a plurality of solar panels **440(1)-440(n)** adjacent the plurality of receivers. Each receiver is positioned within a focal point of a respective solar panel. Instead of heating the process water within the receivers **330(1)-330(n)** as with the above embodiment, a heat transfer fluid (HTF) is heated. The HTF may be mineral oil or glycol, for example.

[0061] An HTF storage **380** provides the HTF that flows through the receivers **330(1)-330(n)** to be heated. A pump **370** moves the HTF through the receivers **30(1)-30(n)**, and includes controls to vary the flow rate of the HTF.

[0062] The HTF is heated as it flows through each of the receivers **330(1)-330(n)**. As with the process water **50** above, the HTF is heated in stages, with each receiver corresponding to a stage. A multi-stage or multi-effect approach to heating the HTF is efficient since each stage essentially reuses the energy from a previous stage.

[0063] At the last receiver **330(n)**, the heated HTF is provided to a heat exchanger **382**. The process water **350** is also provided to the heat exchanger **382** for conversion to steam. The heat exchanger **382** may be a flash heat exchanger, for example, where the heated HTF is routed through a grid. The process water **350** is then splashed or sprayed onto the grid, which then turns to water vapor and/or steam. This type of heat exchanger **382** is also known as a flash exchanger, as readily appreciated by those skilled in the art. The process water **350** does not come in contact with the HTF.

[0064] The steam generated by the HTF heat exchanger **382** is directed to the distillation tube **336**. The distillation tube **336** extends through each of the receivers **330(1)-330(n)** but is separate from the HTF circulating within each receiver. The HTF provided at the output of the heat exchanger **382** is recirculated back to the HTF storage **380**.

[0065] As the steam travels through the distillation tube **336**, it changes phases back to a liquid. The heat given off during this phase change is provided to each respective stage, thus further increasing the efficiency of the illustrated multi-effect solar distillation system **320**. An output of the distillation tube **336** provides the purified process water **360**.

[0066] The distillation tube **336** is in contact with the HTF circulating within each receiver. The HTF advantageously allows heat to be given off as the water vapor changes phases back to a liquid. help lower the boiling temperature of the HTF as well as]

[0067] The multi-effect solar distillation system **320** may include a vacuum pump or system **372** coupled to the distillation tube **336** to provide direction to the flow of the water vapor. In addition, a plurality of auxiliary heat sources **342(1)-342(n)** may be positioned adjacent the plurality of receivers **330(1)-330(n)** to allow for low or no sun operation. The auxiliary heat sources **342(1)-342(n)** may be gas burners, for example.

[0068] The distillation (i.e., condensation) tube **336** runs "counter current" to the flow within the receiver. The condensate tube is formed within the receiver so that the flow of the steam is in an opposite direction to the HTF. This allows the water vapor to release its heat into the flow of the HTF to advantageously increase the efficiency of the cycle as the heat contained in the water vapor is returned into the cycle.

[0069] The auxiliary heat sources **342(1)-342(n)** may be gas burners, for example, and when ignited, provides a heat source on the receivers **330(1)-330(n)** for the distillation process when solar conditions are not sufficient for the process to occur.

[0070] Many modifications and other embodiments of the invention will come to the mind of one skilled in the art having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is understood that the invention is not to be limited to the specific embodiments disclosed, and that modifications and embodiments are intended to be included within the scope of the appended claims.

THAT WHICH IS CLAIMED:

1. A solar distillation system comprising:
 - a plurality of solar panels configured to reflect sunlight;
 - a plurality of receivers adjacent said plurality of solar panels and configured to receive process water to be processed to purified process water, said plurality of receivers comprising at least a first receiver and a last receiver, with the process water flowing from said first receiver to said last receiver and being heated by the reflected sunlight;
 - a plurality of vapor tubes coupled to said plurality of receivers, with each respective vapor tube coupled between adjacent receivers, and water vapor is generated as the process water is heated within each receiver, with the water vapor flowing via said respective vapor tubes between the adjacent receivers towards said last receiver;
 - a return vapor tube coupled to said last receiver; and
 - a distillation tube coupled to said return vapor tube to receive the water vapor, with said distillation tube extending through said plurality of receivers from said last receiver to said first receiver, and as the water vapor travels through said distillation tube the water vapor changes to a liquid, with the liquid being the purified process water.
2. The solar distillation system according to Claim 1 wherein said plurality of receivers are connected in series so that each receiver uses heat energy from a previous receiver to heat the process water, except for said first receiver.
3. The solar distillation system according to Claim 1 wherein each receiver is filled by the process water except for an air gap so as to allow the water vapor to develop.
4. The solar distillation system according to Claim 3 wherein said distillation tube extends through each receiver below the air gap.

5. The solar distillation system according to Claim 4 wherein said distillation tube is in direct contact with the process water within each receiver, and as the water vapor changes to the liquid within said distillation tube heat is given off.

6. The solar distillation system according to Claim 3 wherein each vapor tube extends between the air gaps in adjacent receivers.

7. The solar distillation system according to Claim 3 wherein each receiver has a given volume, and the air gap is about 10 to 20% of the given volume.

8. The solar distillation system according to Claim 1 wherein said plurality of solar panels are configured as parabolic troughs, with said plurality of receivers being positioned within a focal point of said plurality of solar panels.

9. The solar distillation system according to Claim 8 wherein each receiver has at least one of an I-shape and a double Y-shape.

10. The solar distillation system according to Claim 1 further comprising a plurality of auxiliary heat sources adjacent said plurality of receivers.

11. The solar distillation system according to Claim 1 further comprising a vacuum coupled to said distillation tube to direct flow of the water vapor through said plurality of receivers and said distillation tube.

12. The solar distillation system according to Claim 1 further comprising a pump coupled to said first receiver to control a flow rate of the process water through said plurality of receivers.

13. The solar distillation system according to Claim 1 wherein the process water comprises at least one of sea water, frac water and waste water.

14. The solar distillation system according to Claim 1 wherein said last receiver outputs the process water that does not turn to water vapor.

15. A method for processing process water to purified process water using a solar distillation system comprising a plurality of solar panels; a plurality of receivers adjacent the plurality of solar panels, the plurality of receivers comprising at least a first receiver and a last receiver; a plurality of vapor tubes coupled to the plurality of receivers, with each respective vapor tube coupled between adjacent receivers; a return vapor tube coupled to the last receiver; and a distillation tube coupled to the return vapor tube, with the distillation tube extending through the plurality of receivers from the last receiver to the first receiver, the method comprising:

reflecting sunlight from the plurality of solar panels to the plurality of receivers;

providing the process water to the plurality of receivers, with the process water flowing from the first receiver to the last receiver and being heated by the reflected sunlight;

generating water vapor within each receiver as the process water is heated, with the water vapor flowing via the respective vapor tubes between the adjacent receivers towards the last receiver; and

providing the water vapor from the return vapor tube at the last receiver to the distillation tube, and as the water vapor travels through the distillation tube the water vapor changes to a liquid, with the liquid being the purified process water.

15. The method according to Claim 14 wherein the plurality of receivers are connected in series so that each receiver uses heat energy from a previous receiver to heat the process water, except for the first receiver.

16. The method according to Claim 14 wherein each receiver is filled by the process water except for an air gap so as to allow the water vapor to develop.

17. The method according to Claim 16 wherein the distillation tube extends through each receiver below the air gap.

18. The method according to Claim 17 wherein the distillation tube is in direct contact with the process water within each receiver, and as the water vapor changes to the liquid within the distillation tube heat is given off.

19. The method according to Claim 14 wherein said plurality of solar panels are configured as parabolic troughs, with said plurality of receivers being positioned within a focal point of said plurality of solar panels.

20. The method according to Claim 14 wherein the solar distillation system further comprises a plurality of auxiliary heat sources adjacent the plurality of receivers, the method further comprising operating the plurality of heat sources to heat the process water within the plurality of receivers.

21. The method according to Claim 14 wherein the solar distillation system further comprises a vacuum coupled to the distillation tube, the method further comprising pulling a vacuum on the distillation tube to direct flow of the water vapor through the plurality of receivers and the distillation tube.

22. The method according to Claim 14 wherein the solar distillation system further comprises a pump coupled to the first receiver, the method further comprising operating the pump to control a flow rate of the process water through the plurality of receivers.

23. The method according to Claim 14 wherein the process water comprises at least one of sea water, frac water and waste water.

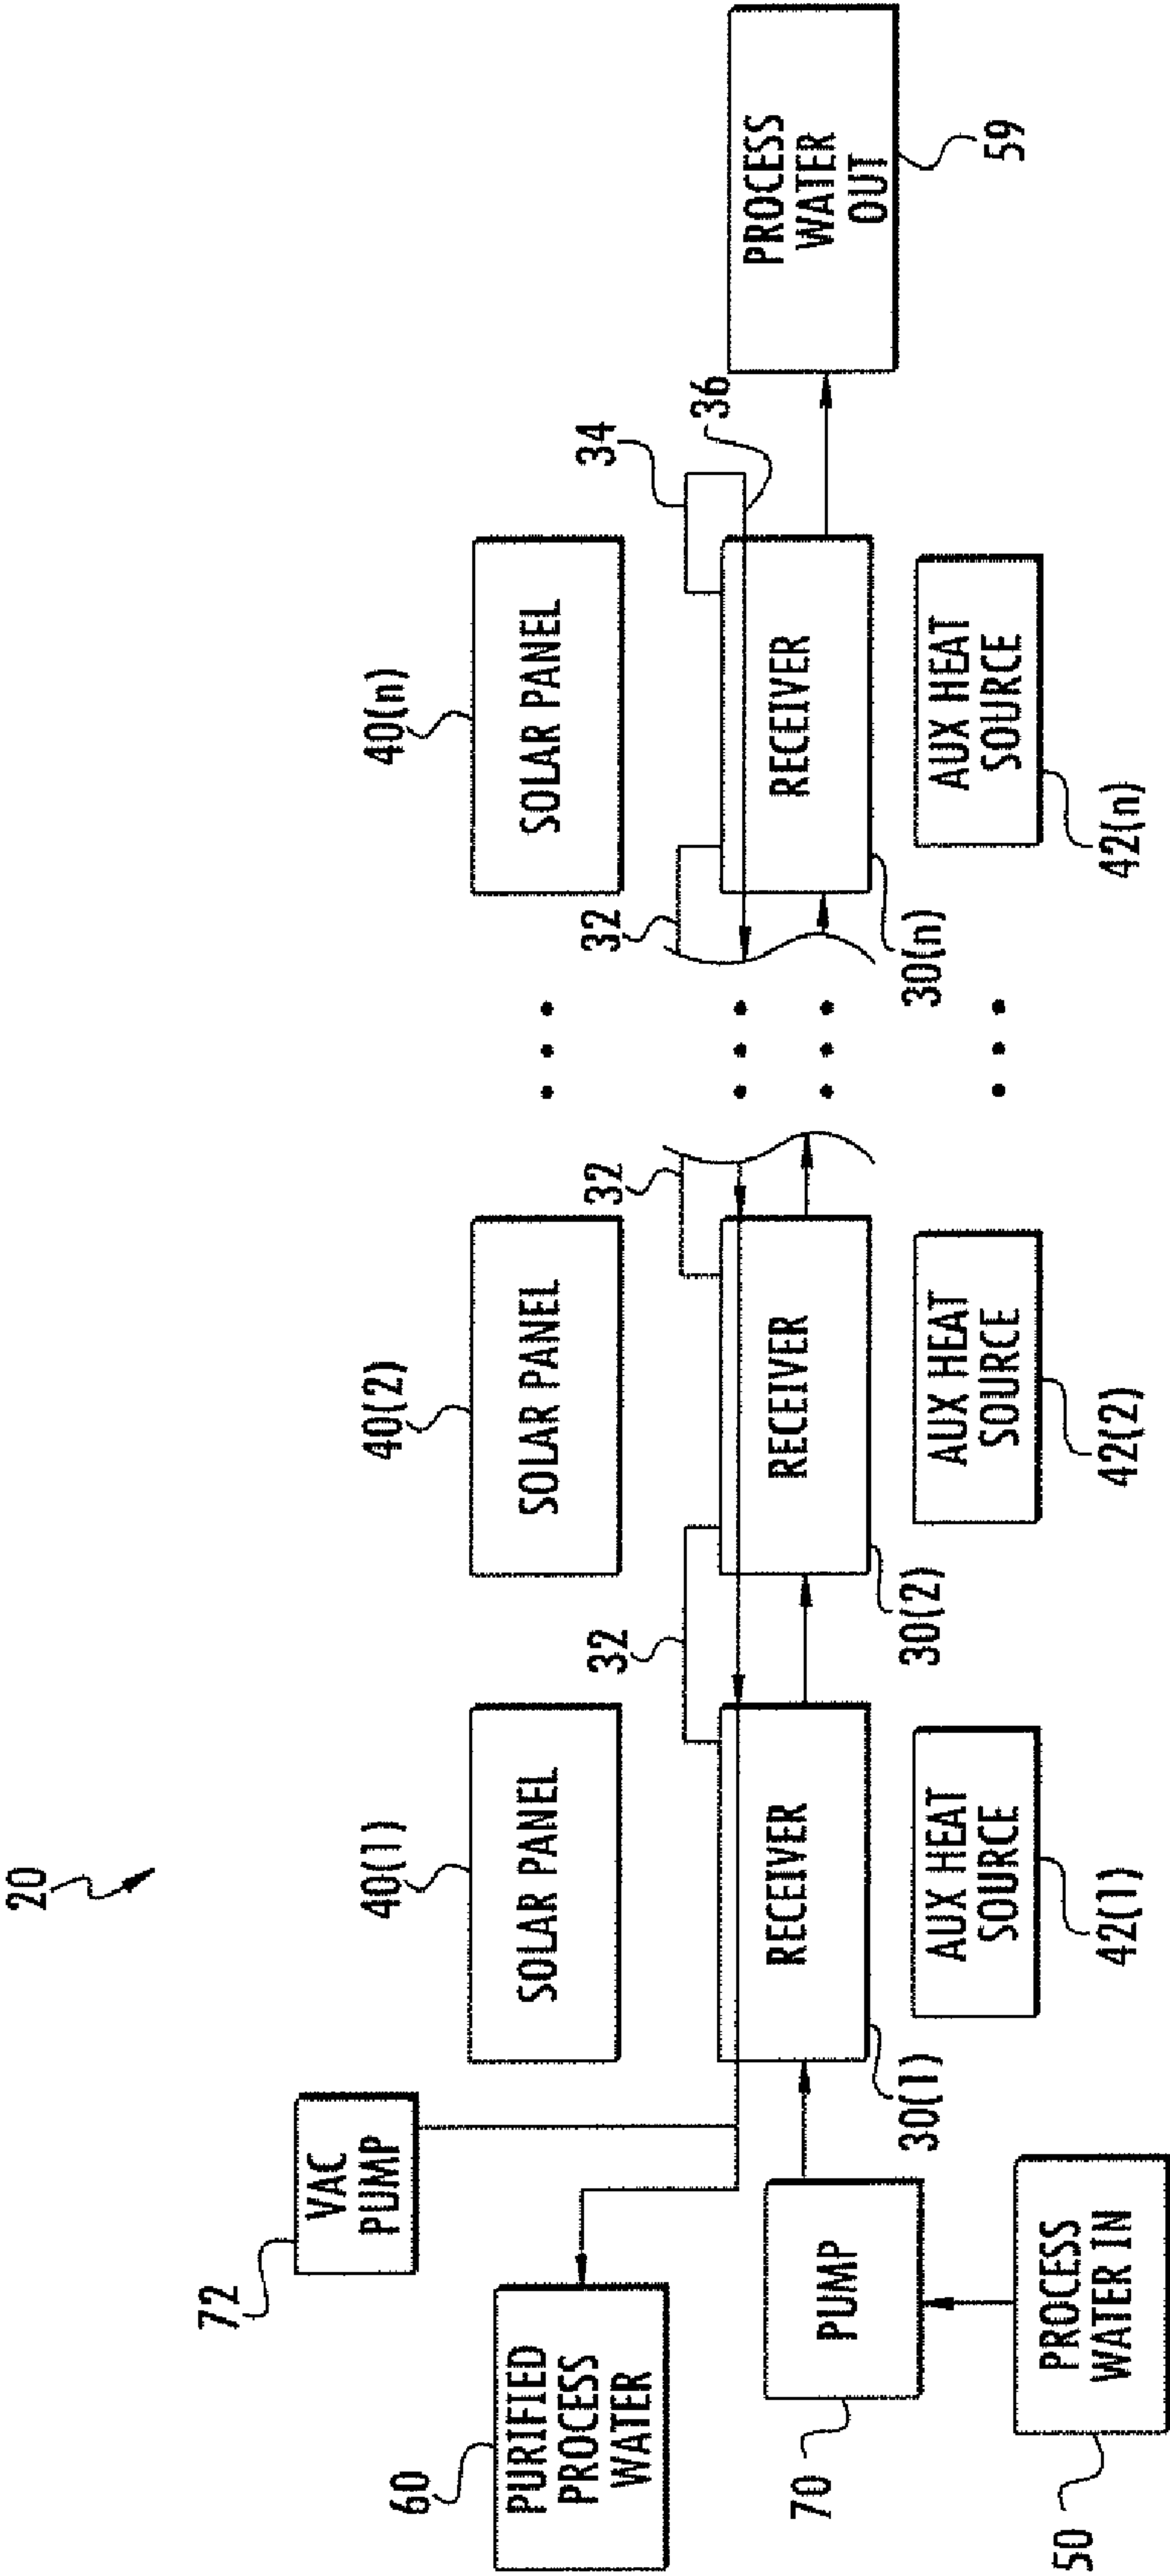


FIG. 1

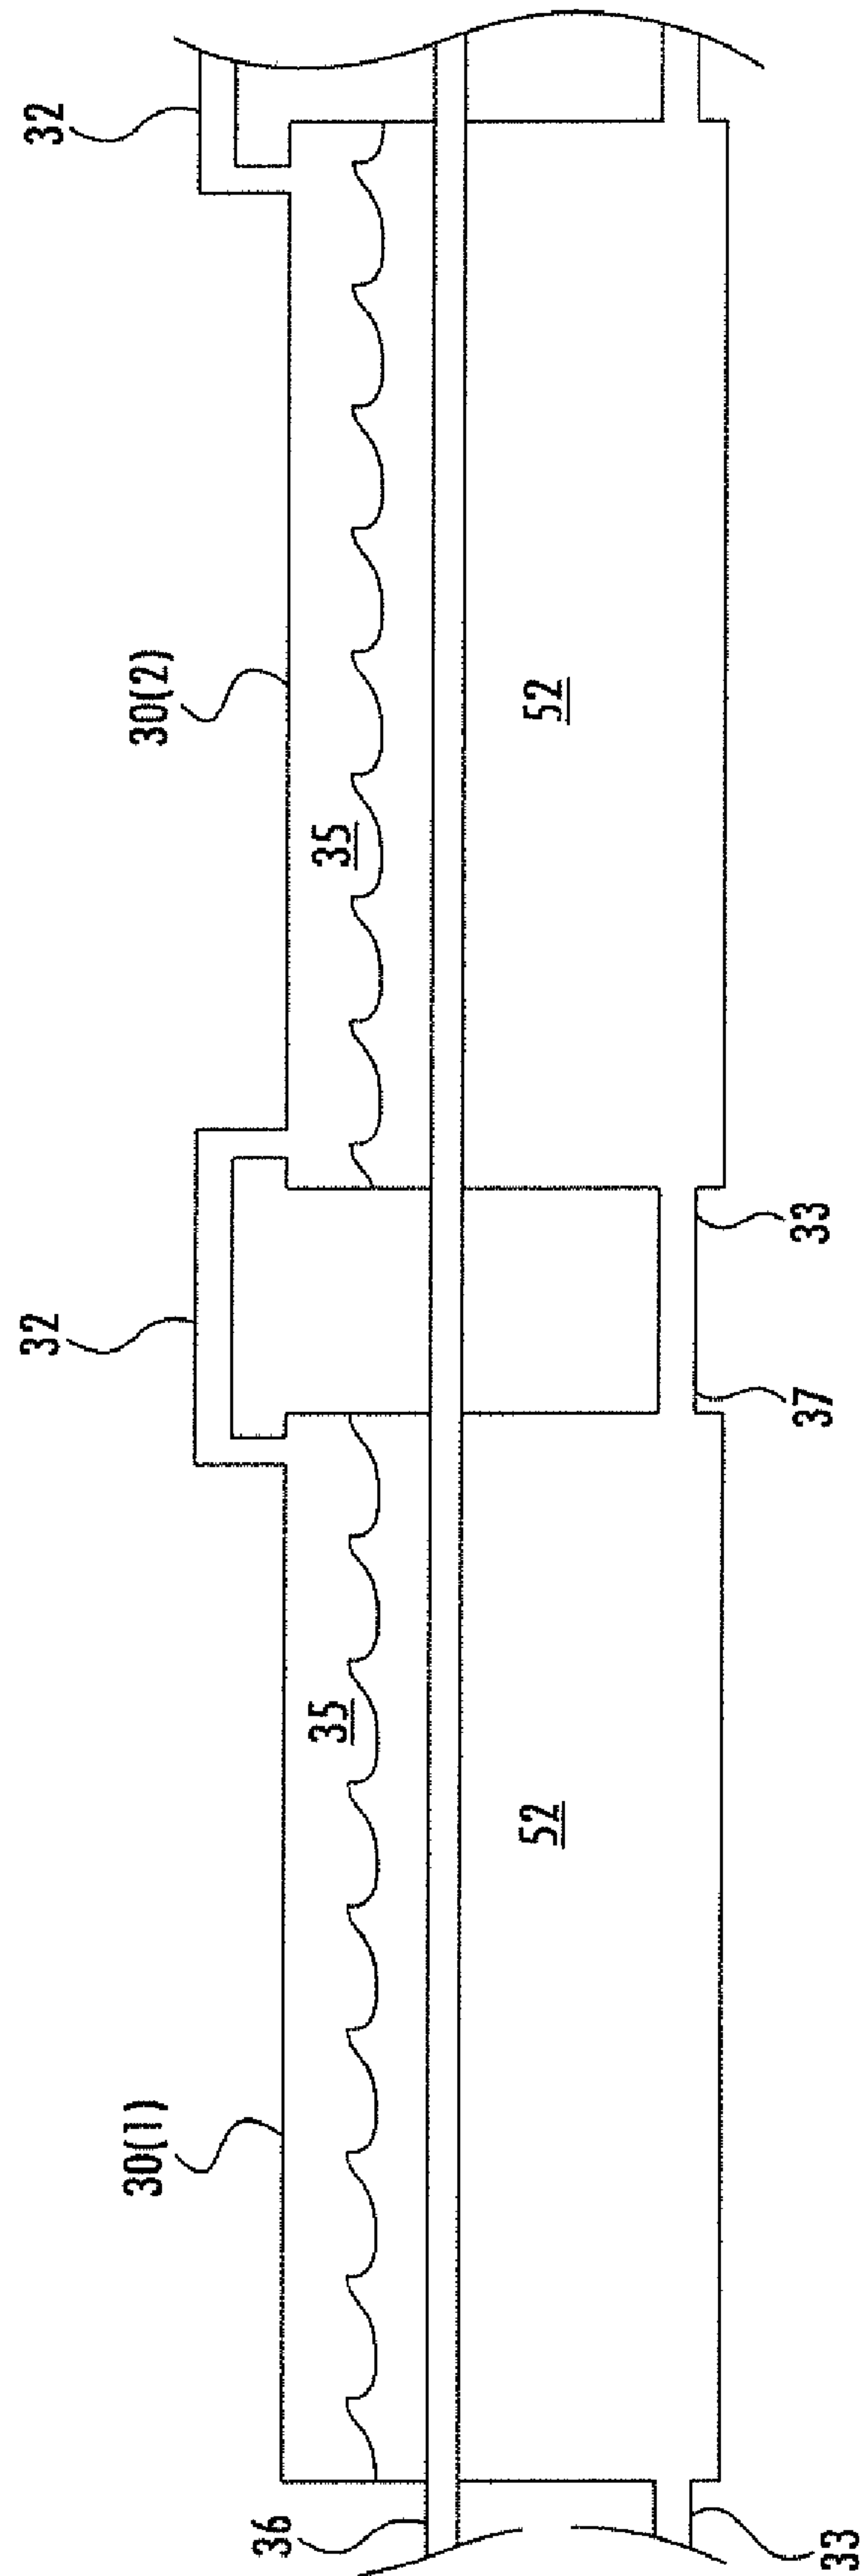


FIG. 2

3/9

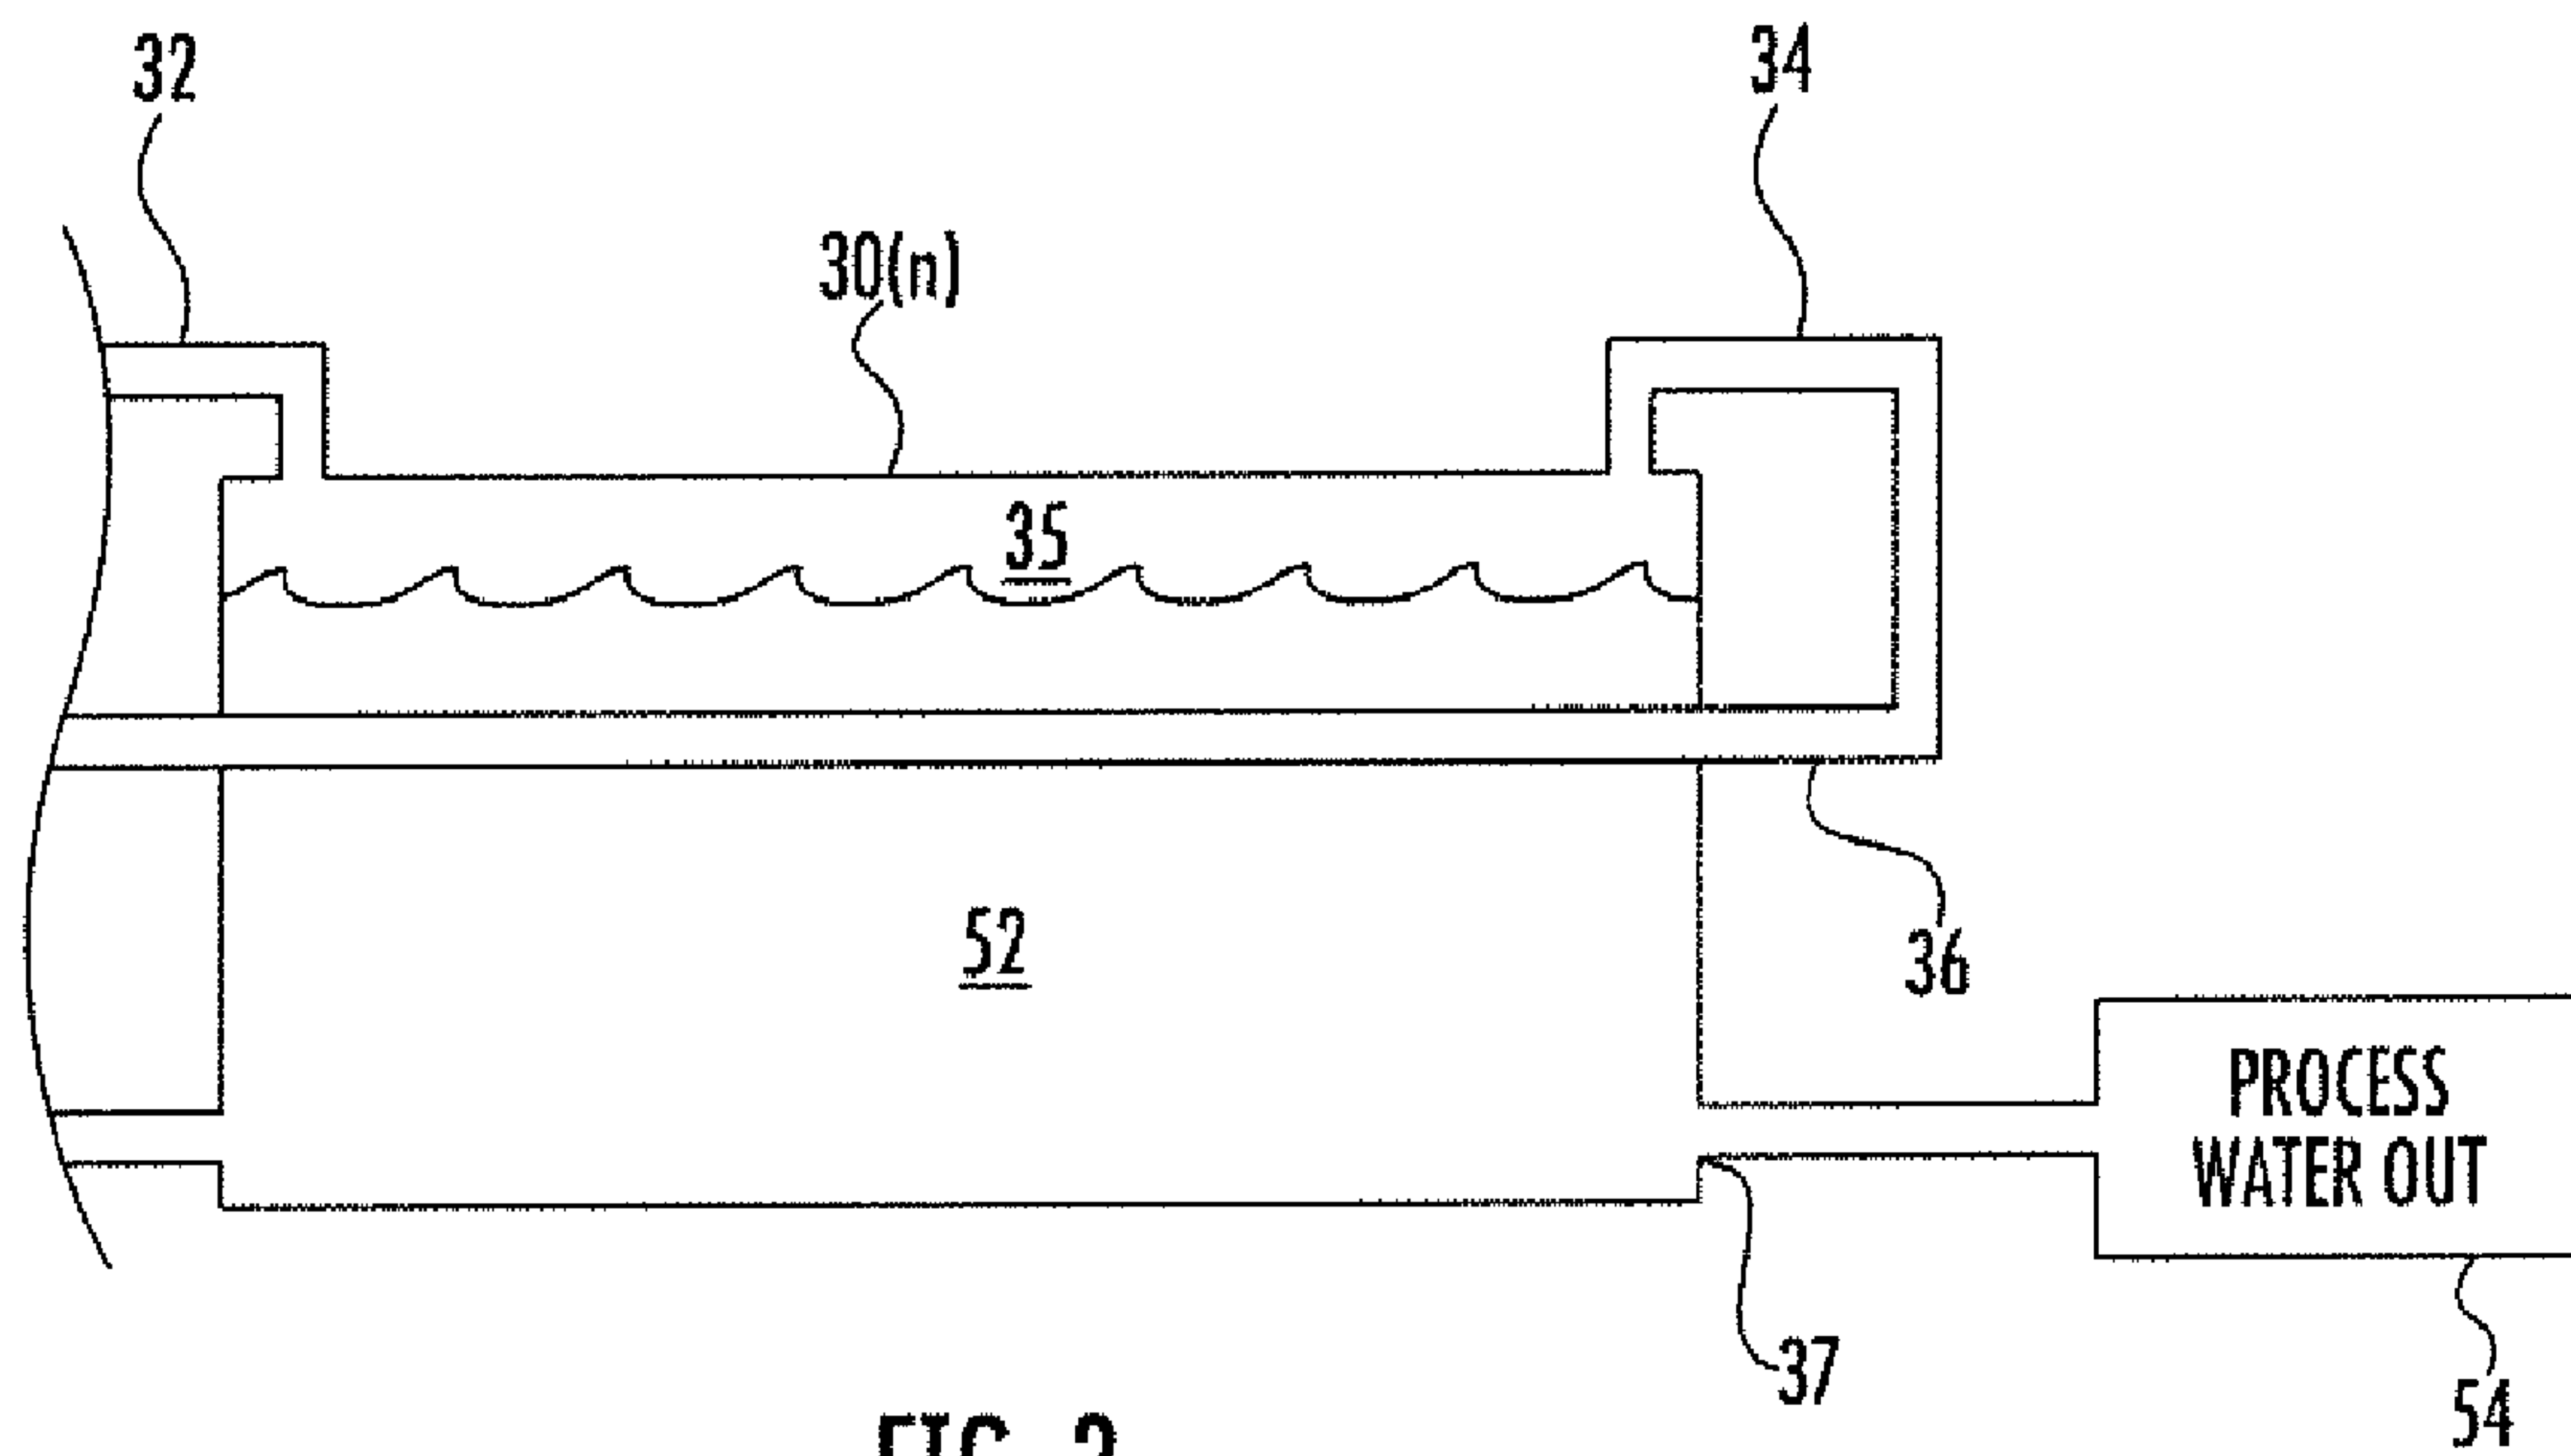


FIG. 3

4/9

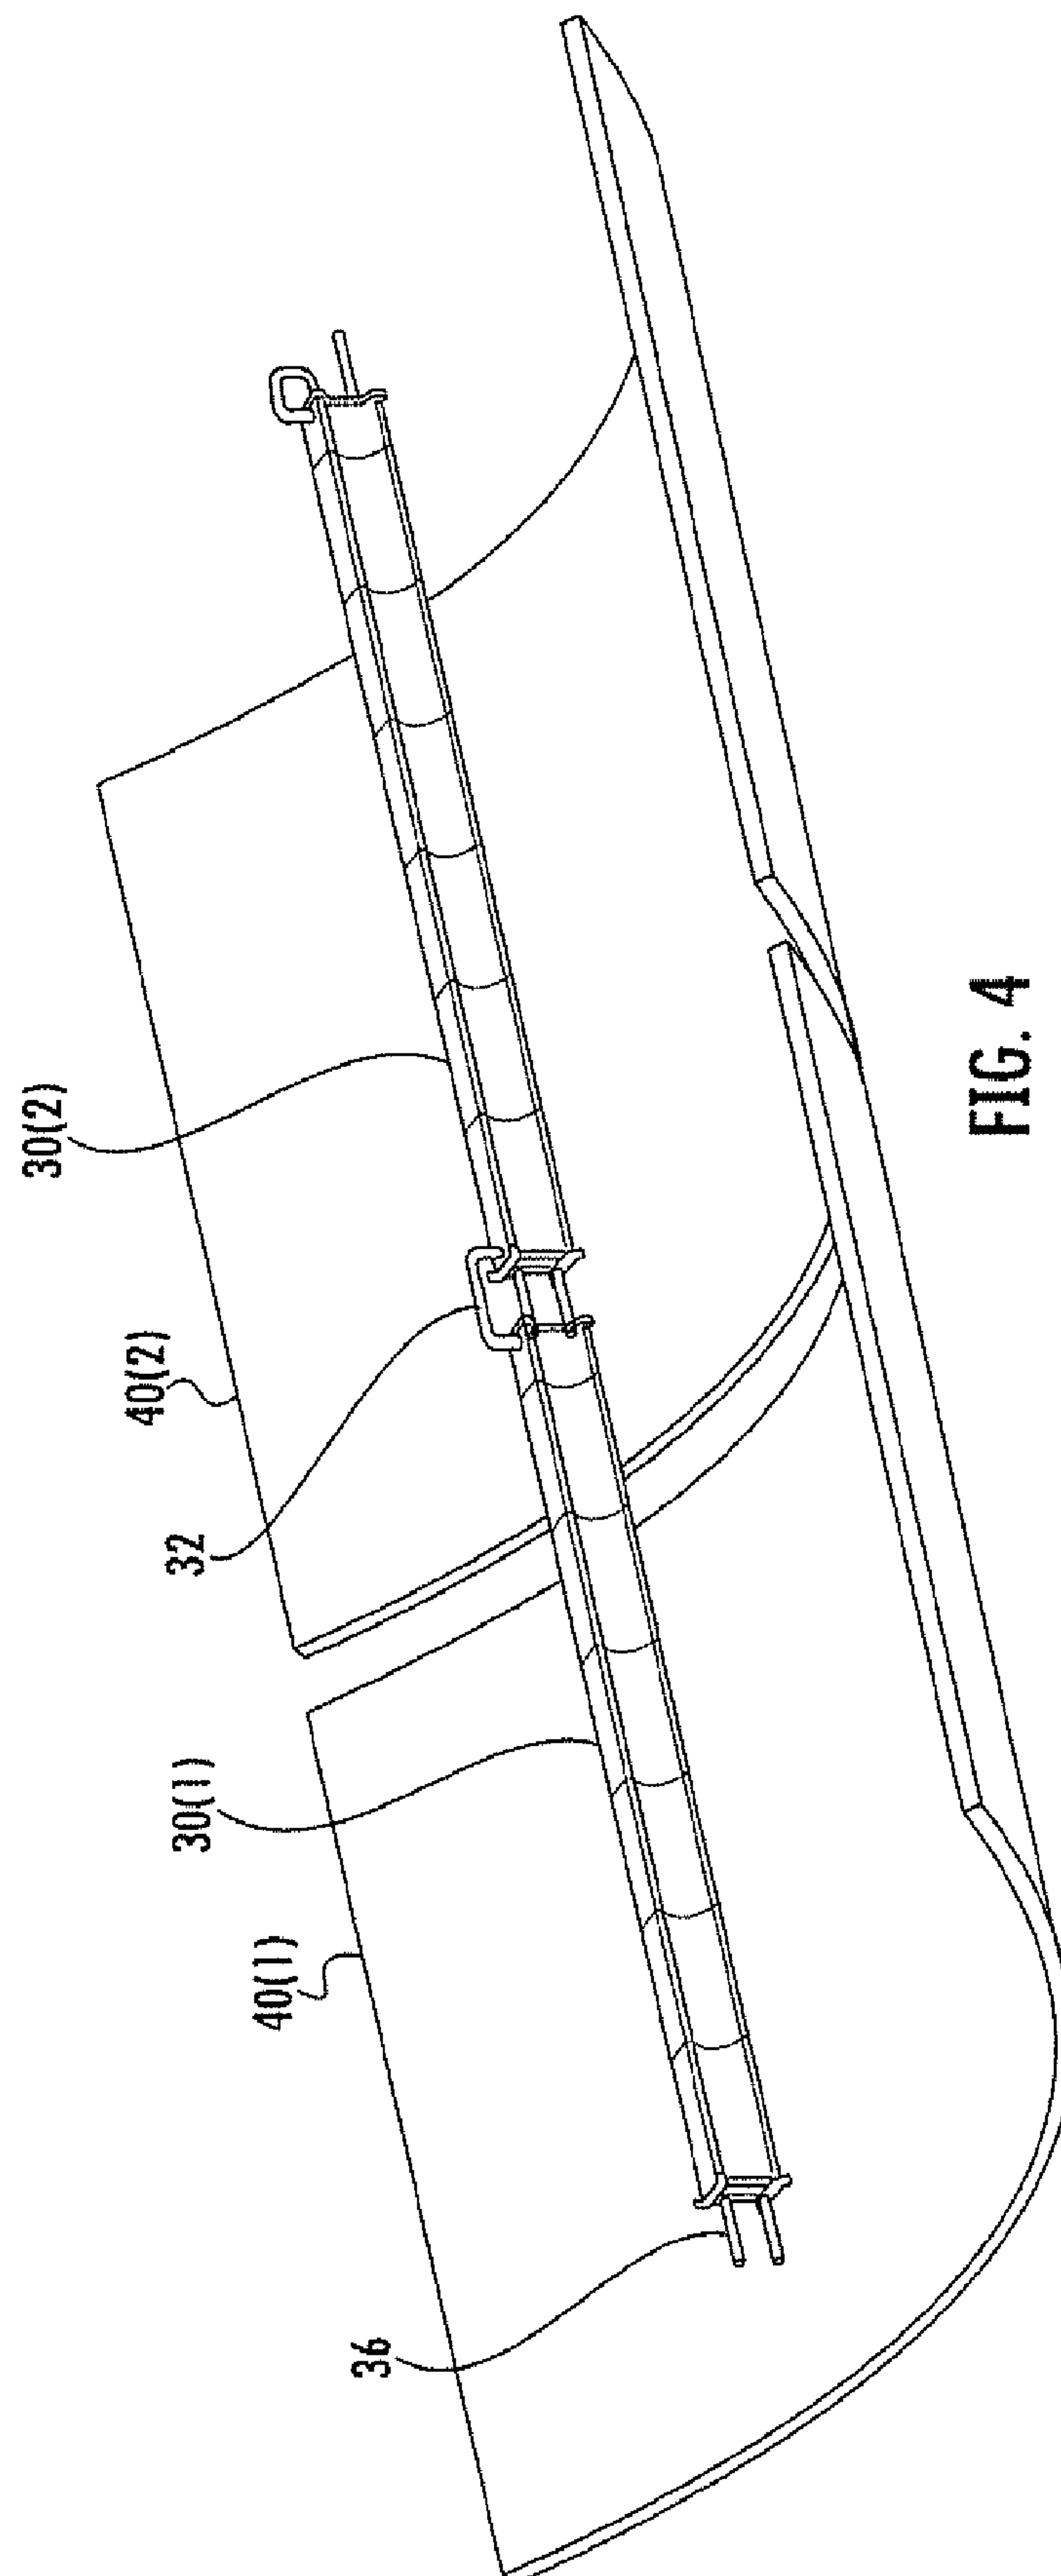


FIG. 4

5/9

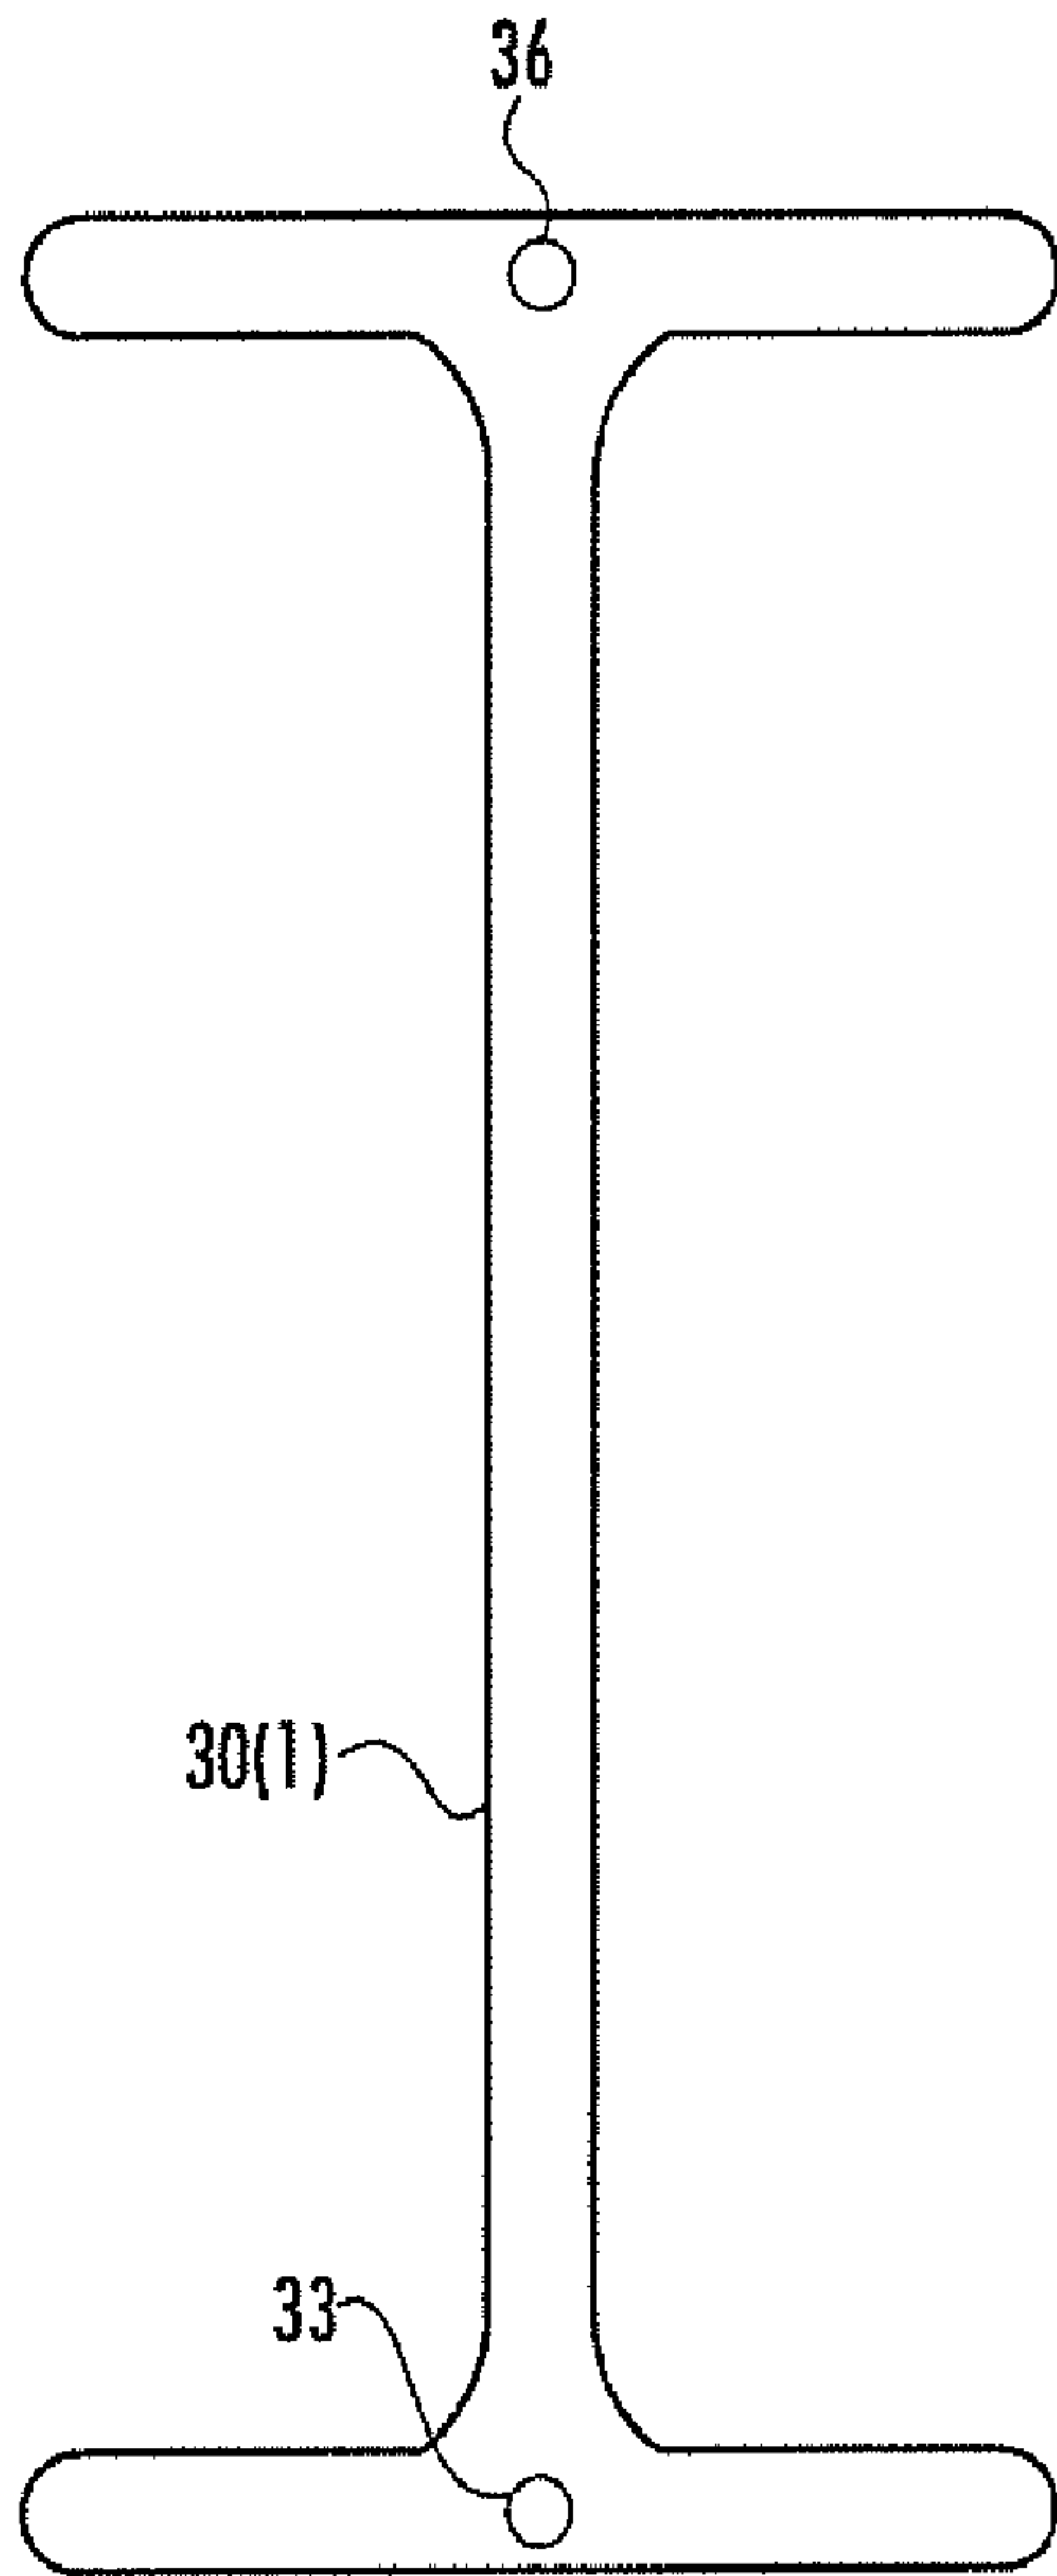


FIG. 5

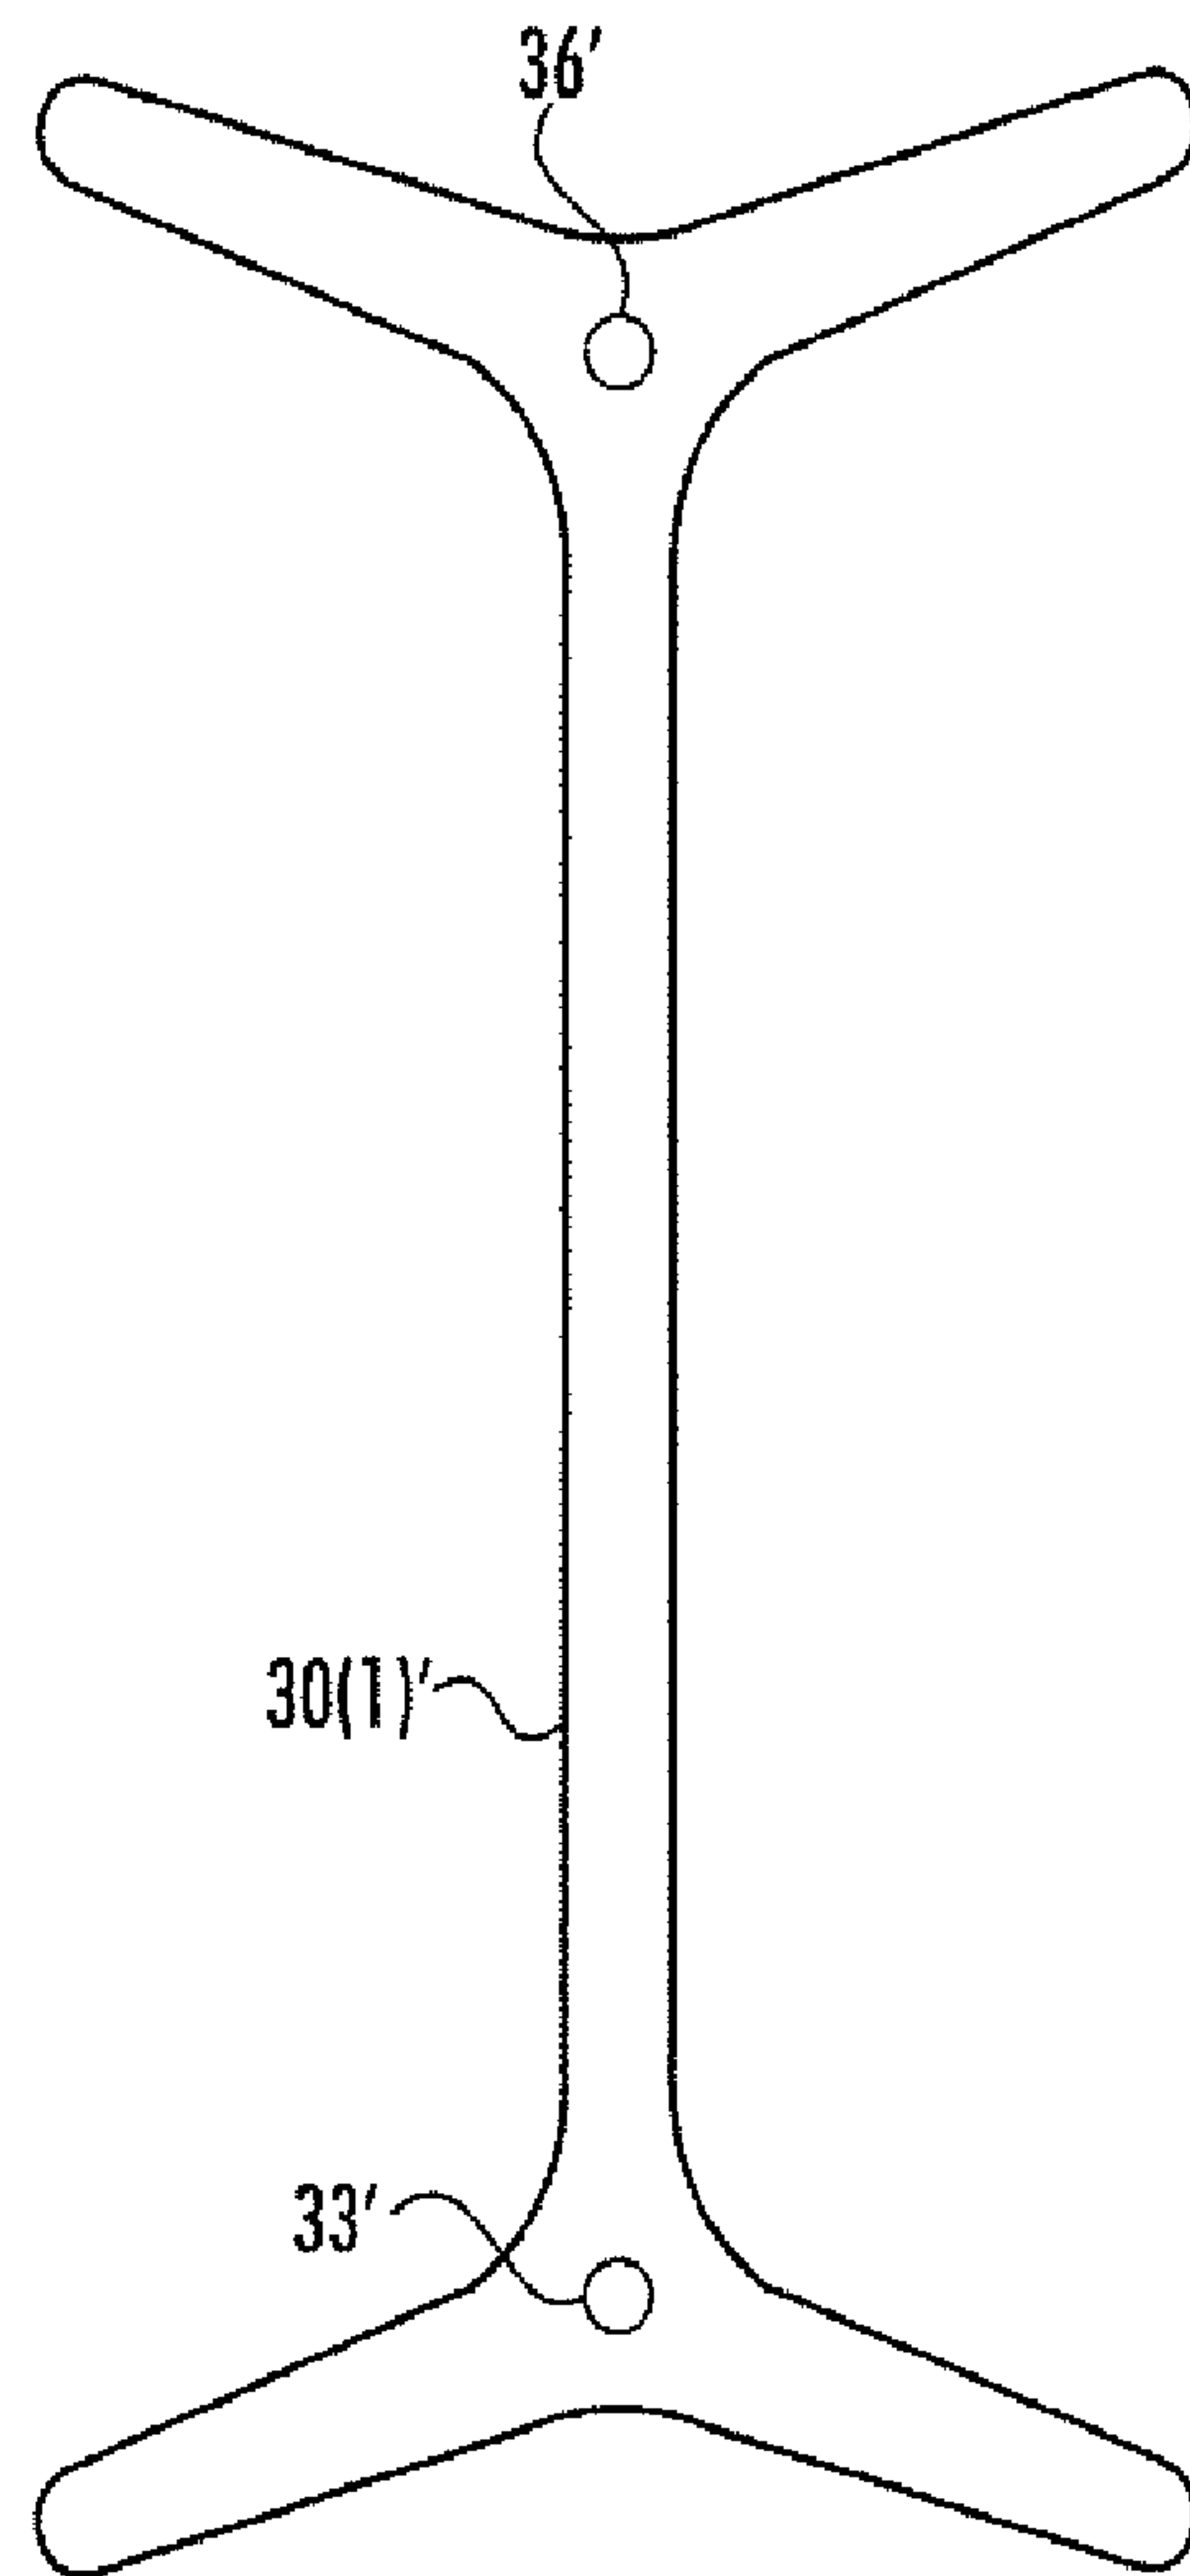


FIG. 6

6/9

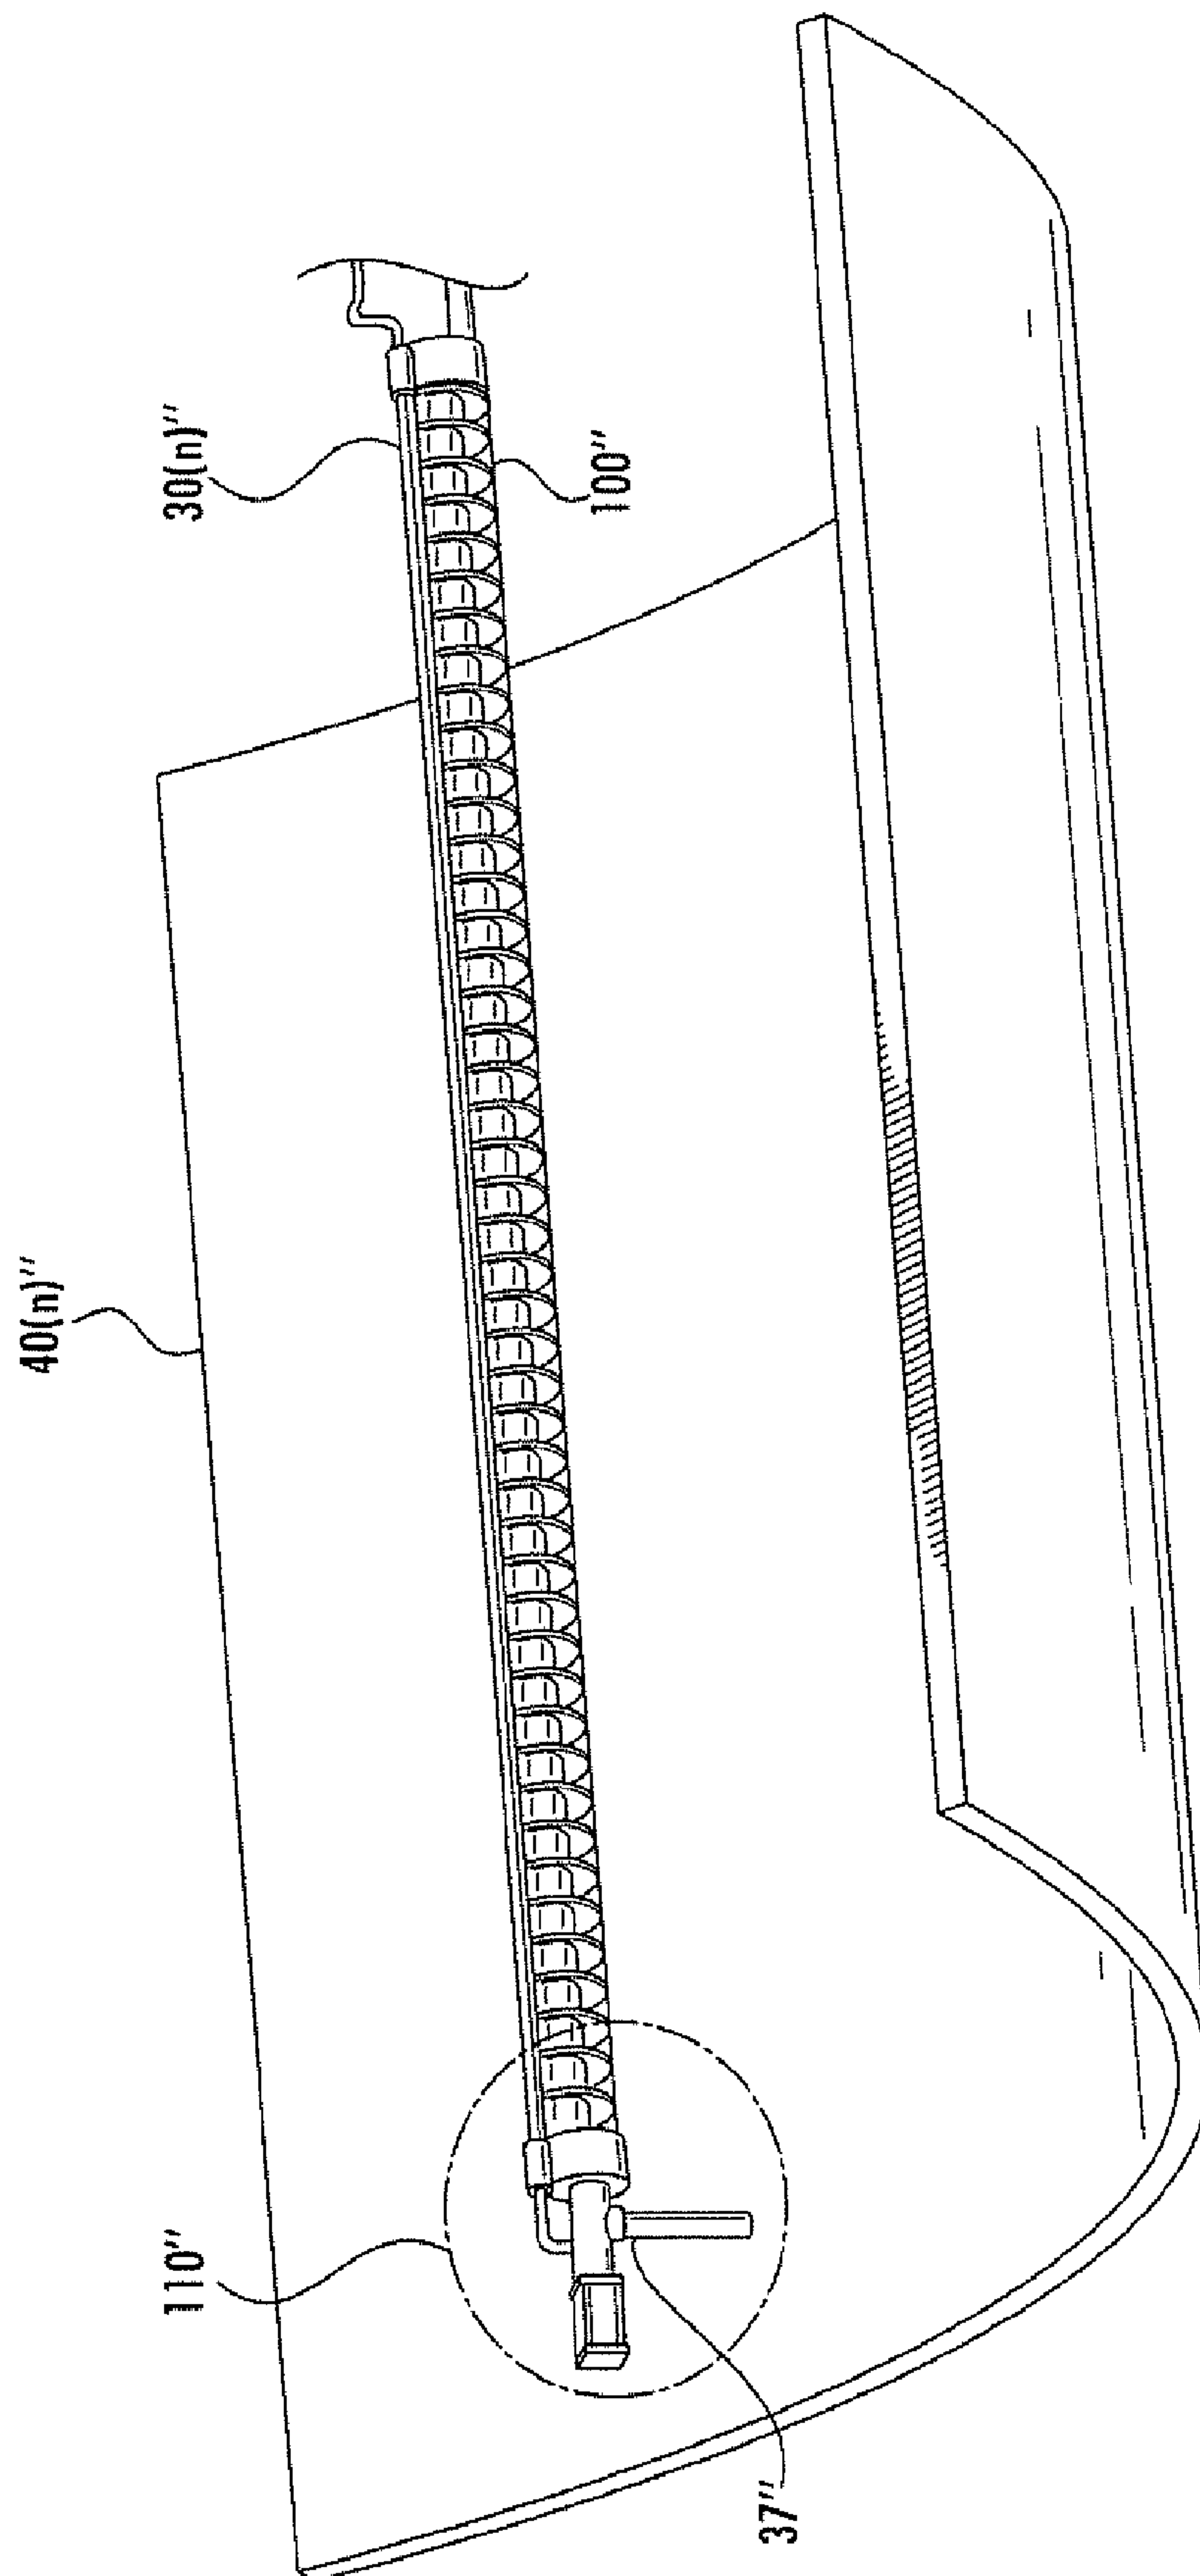


FIG. 7

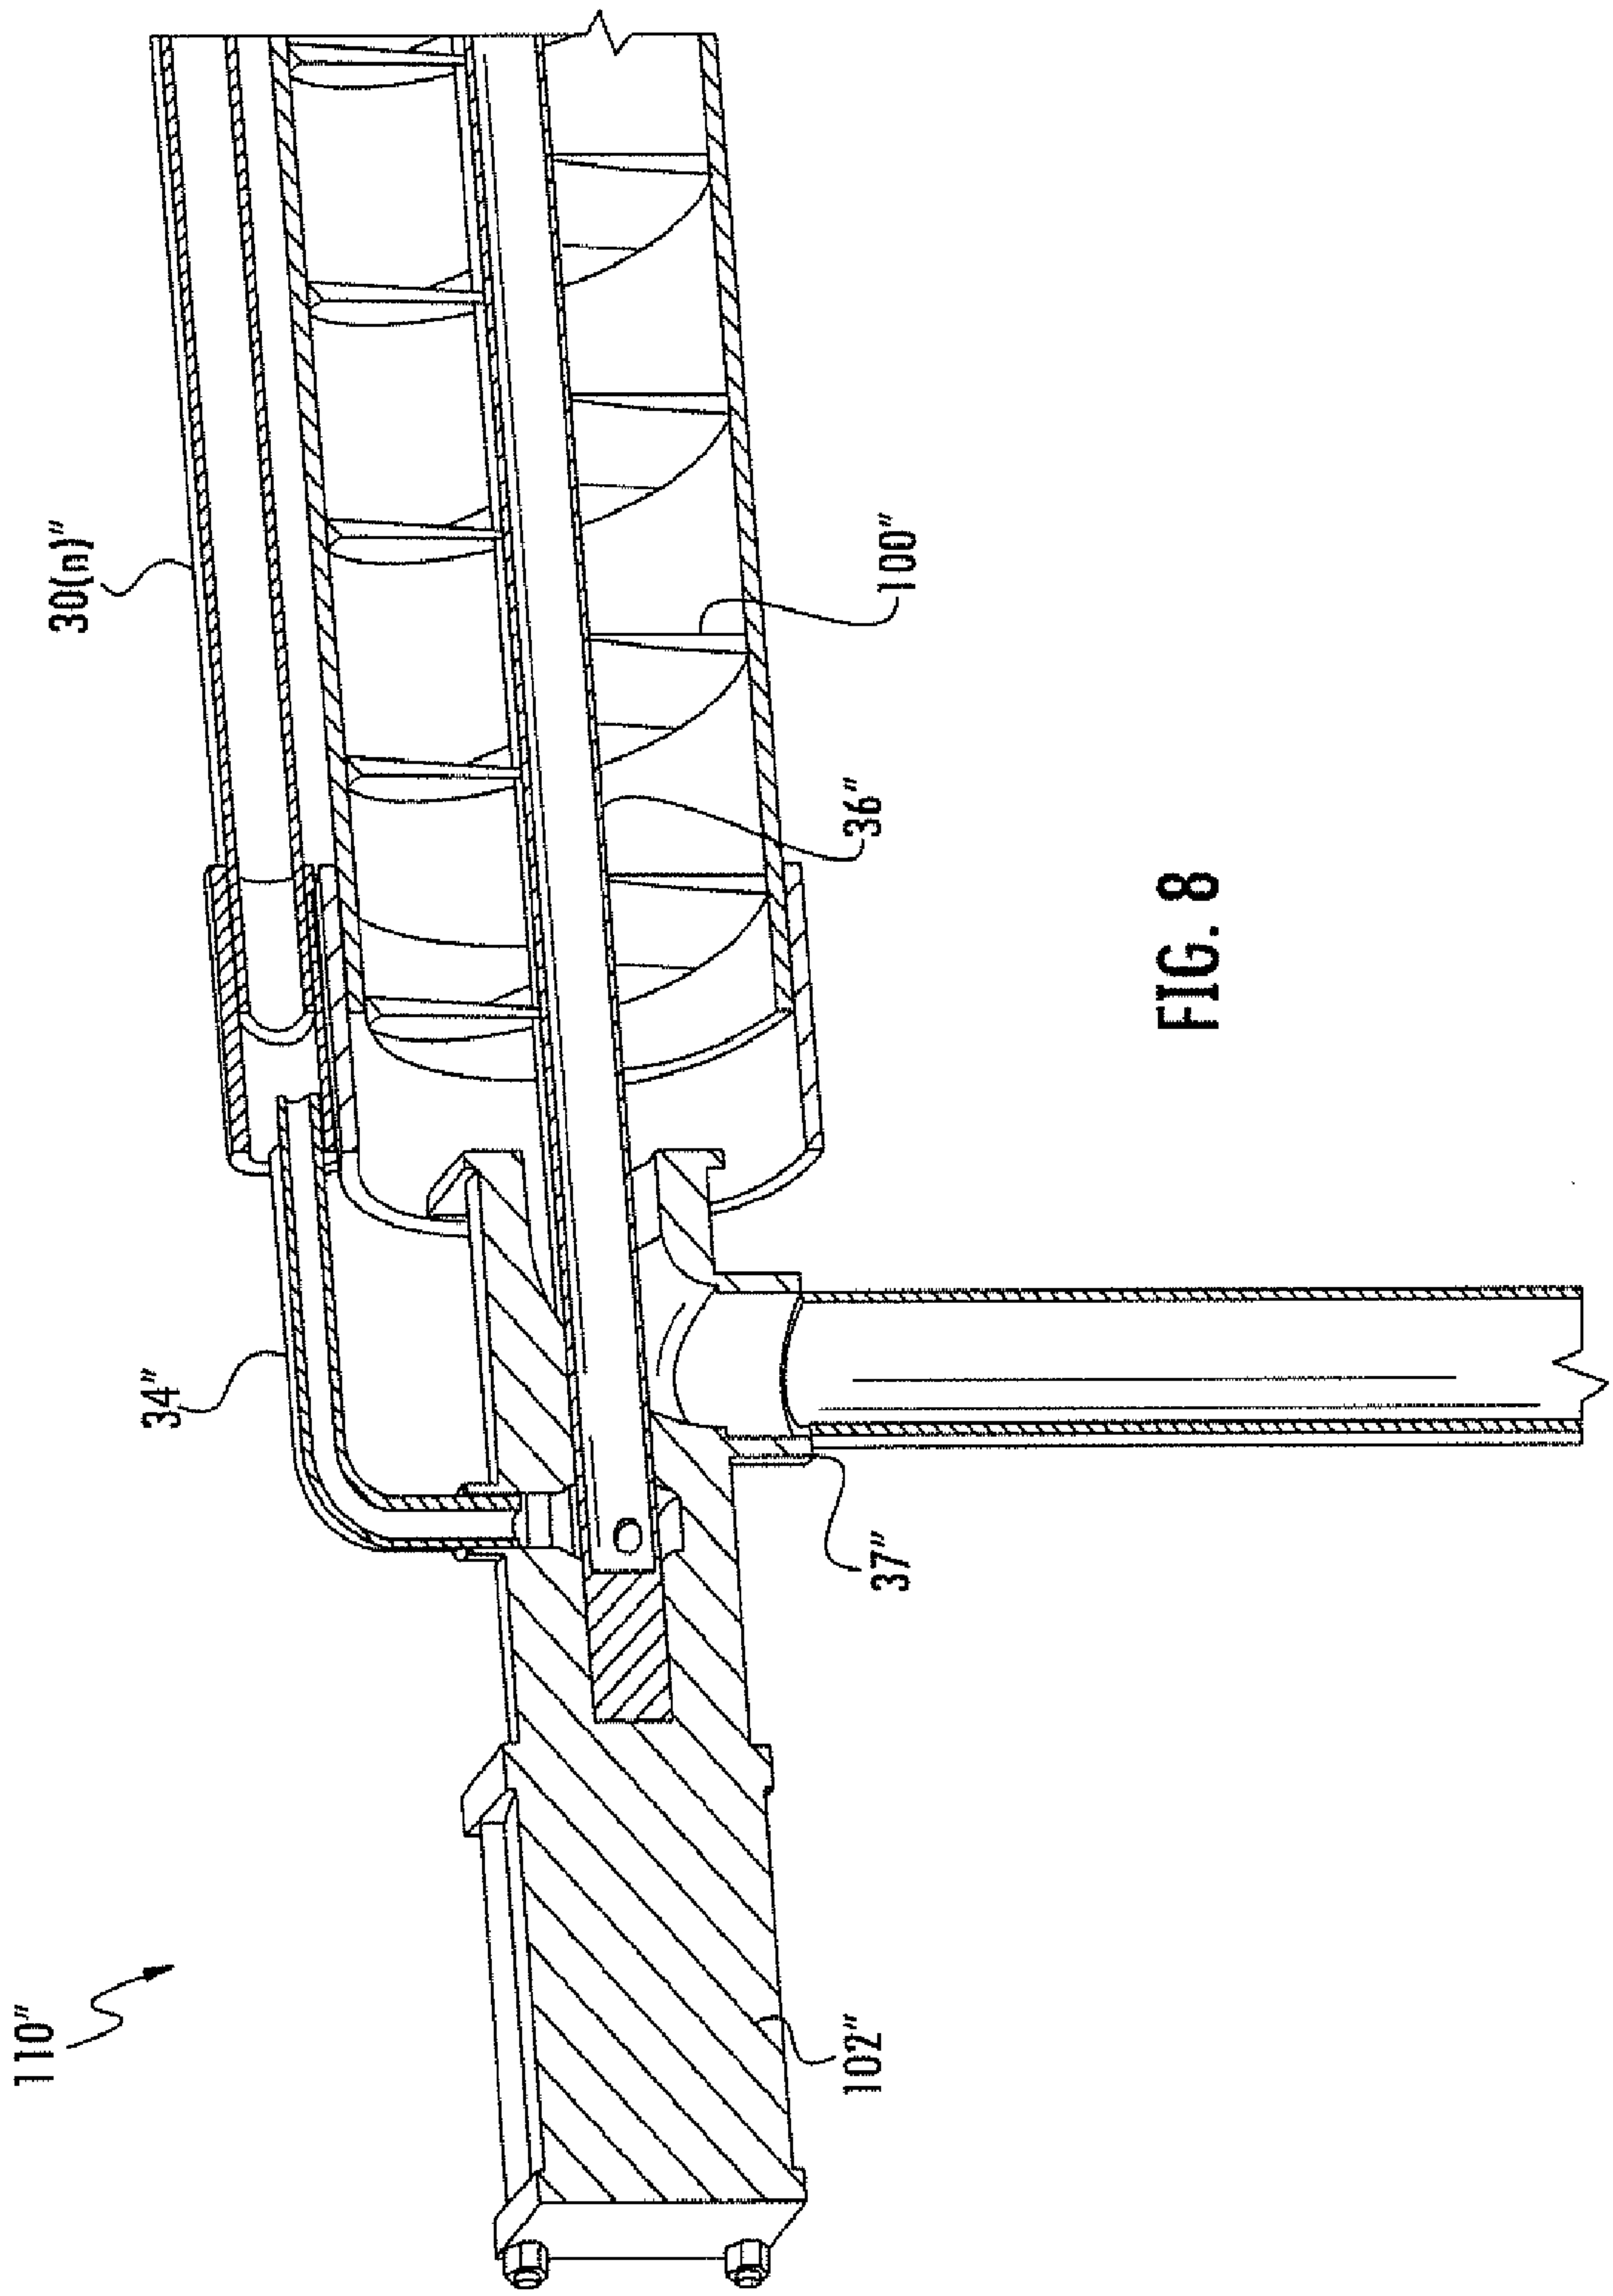


FIG. 8

8/9

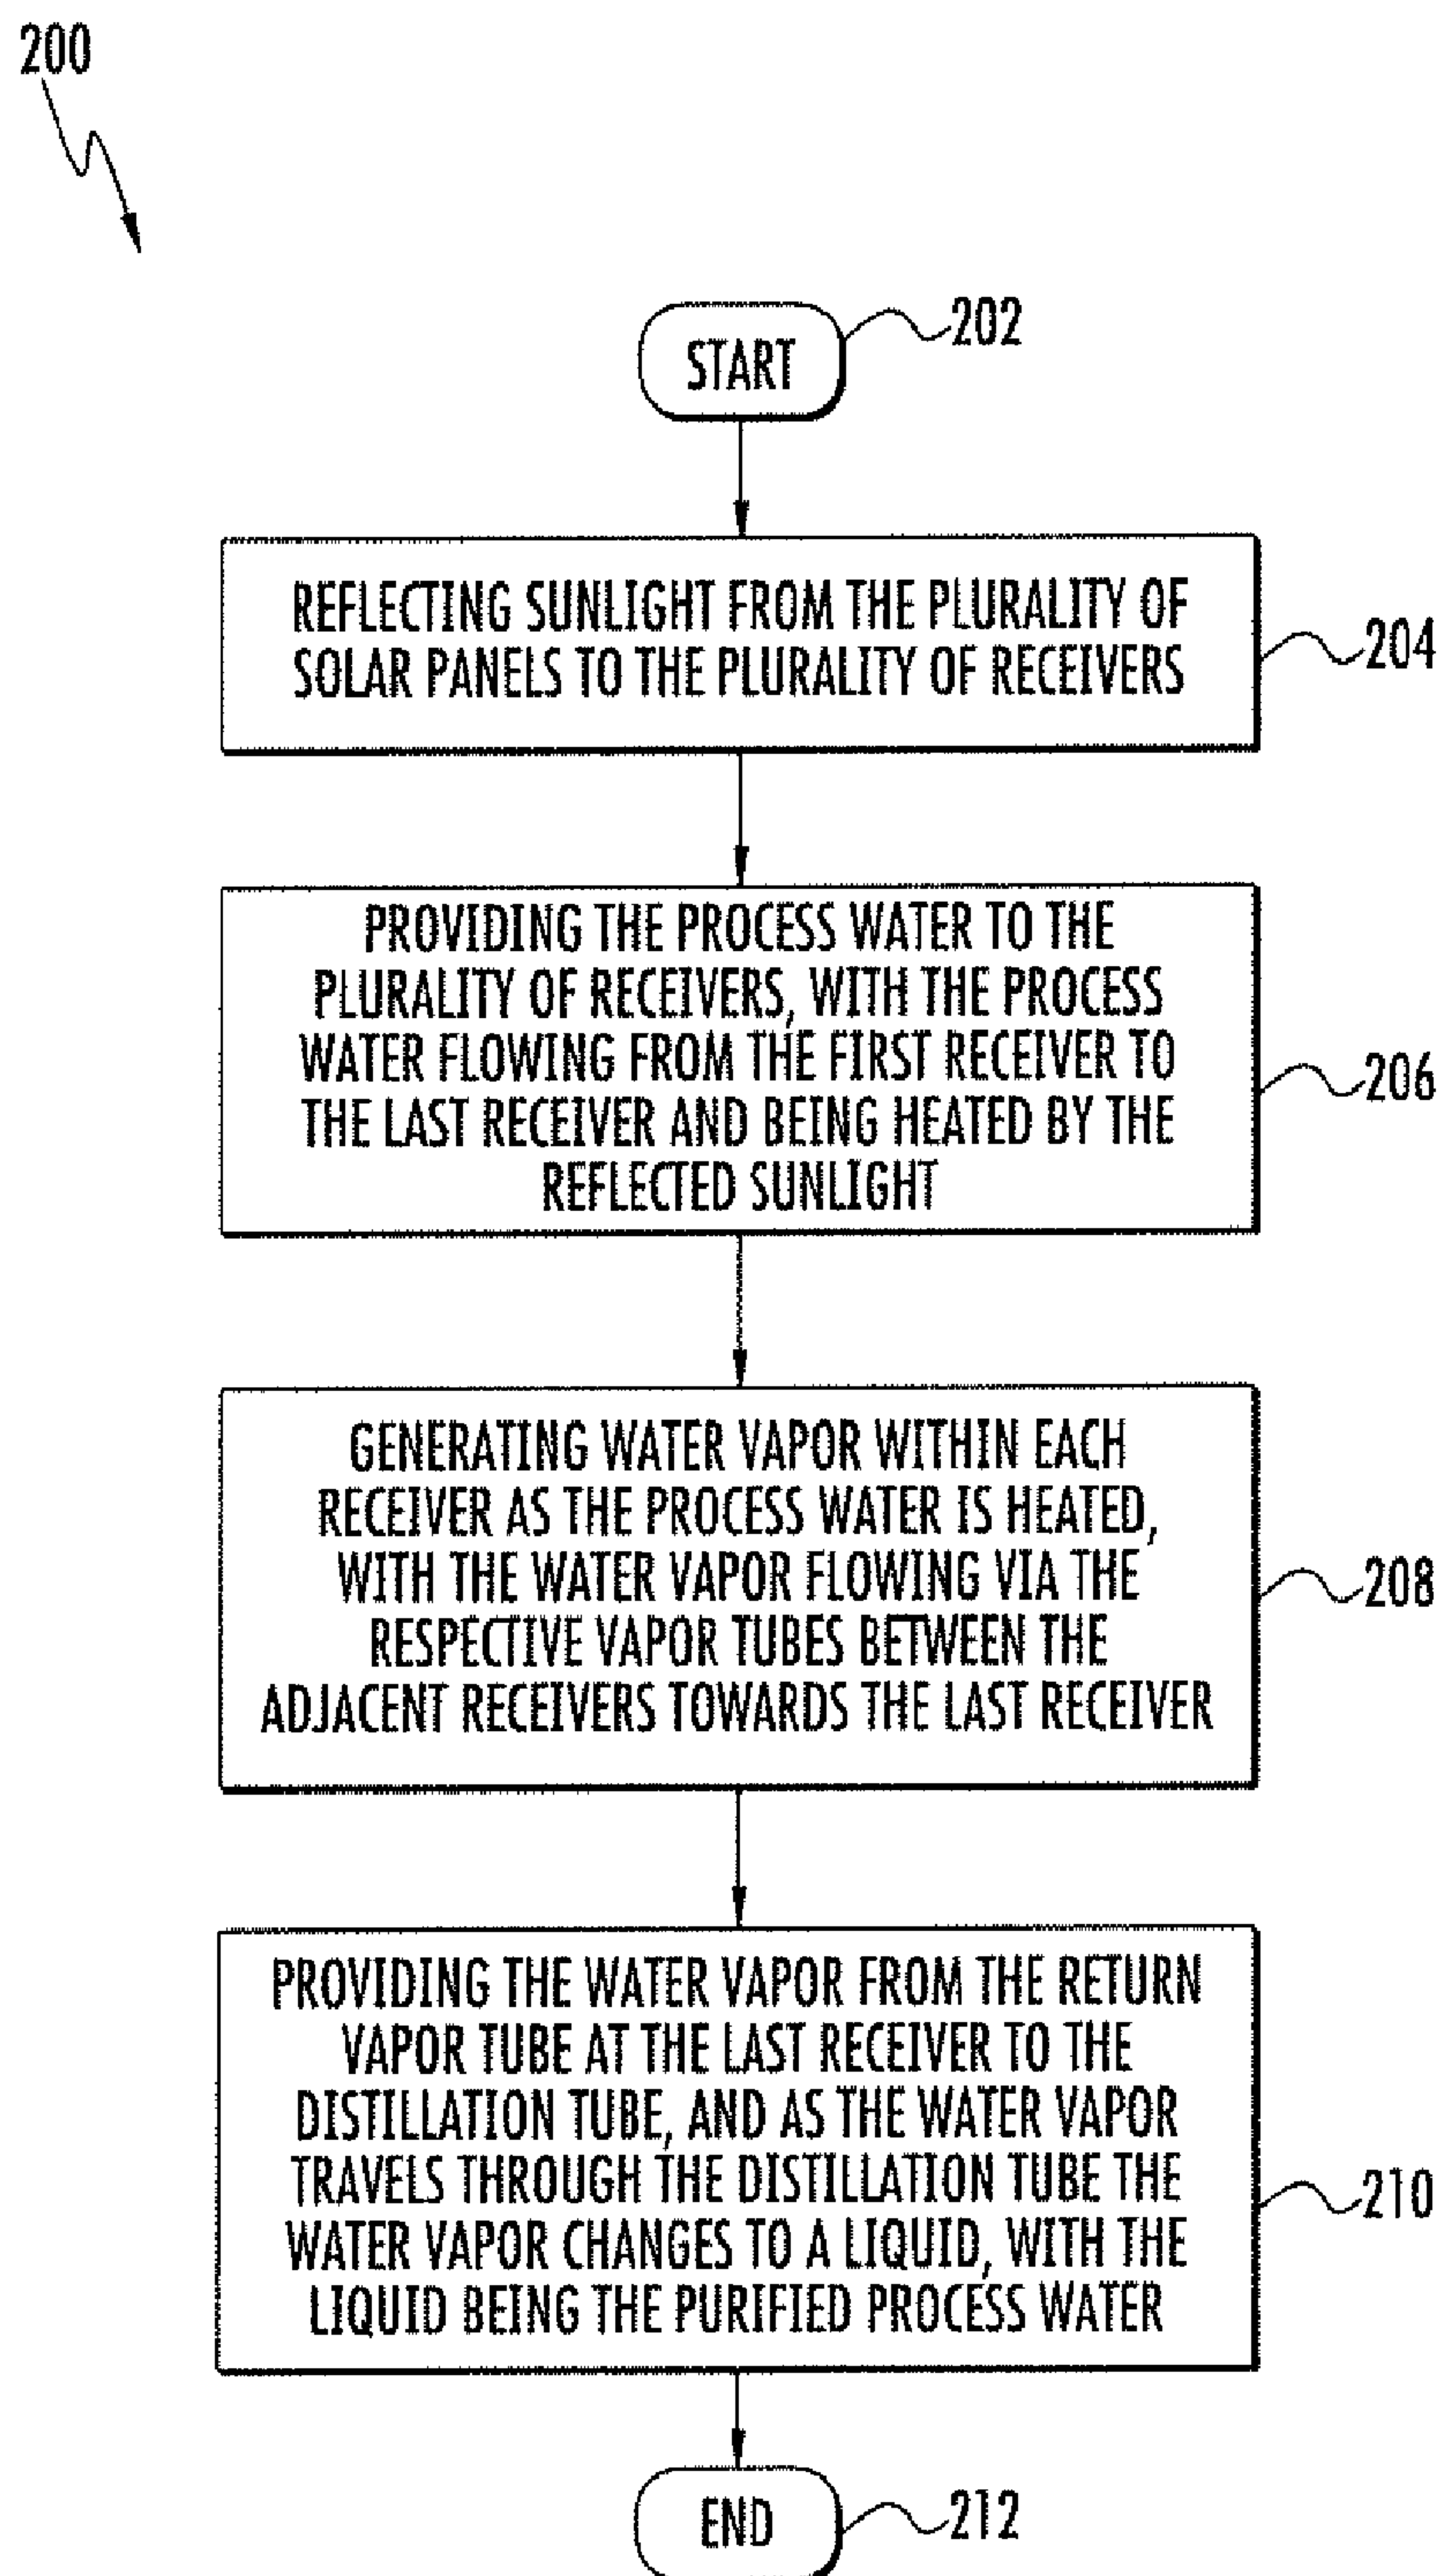
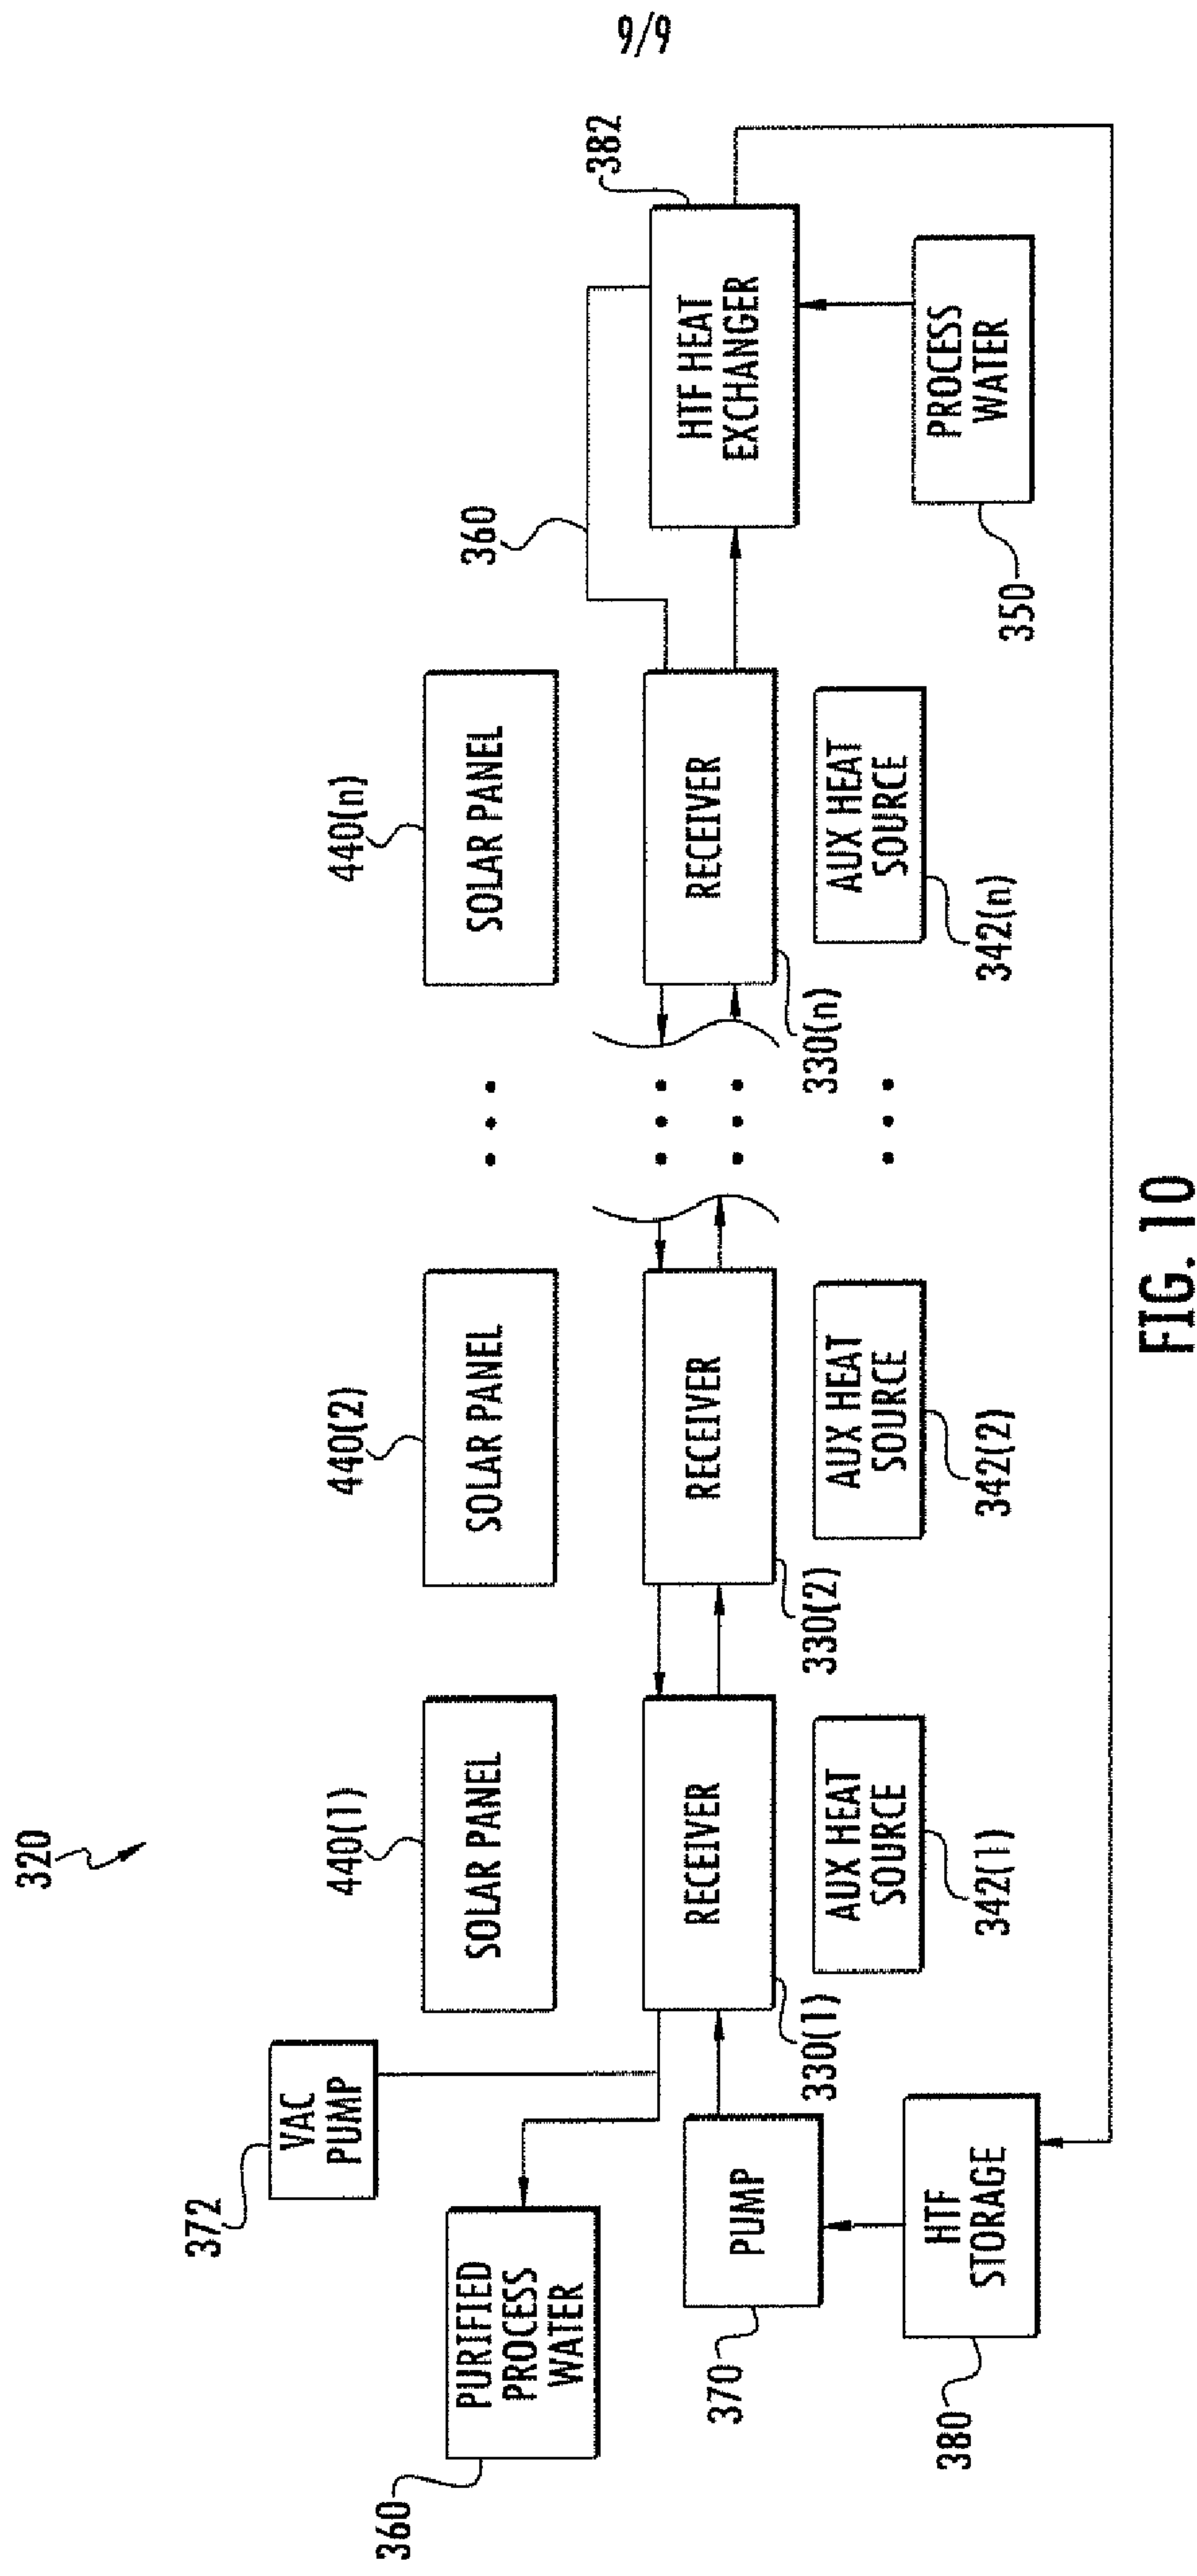


FIG. 9



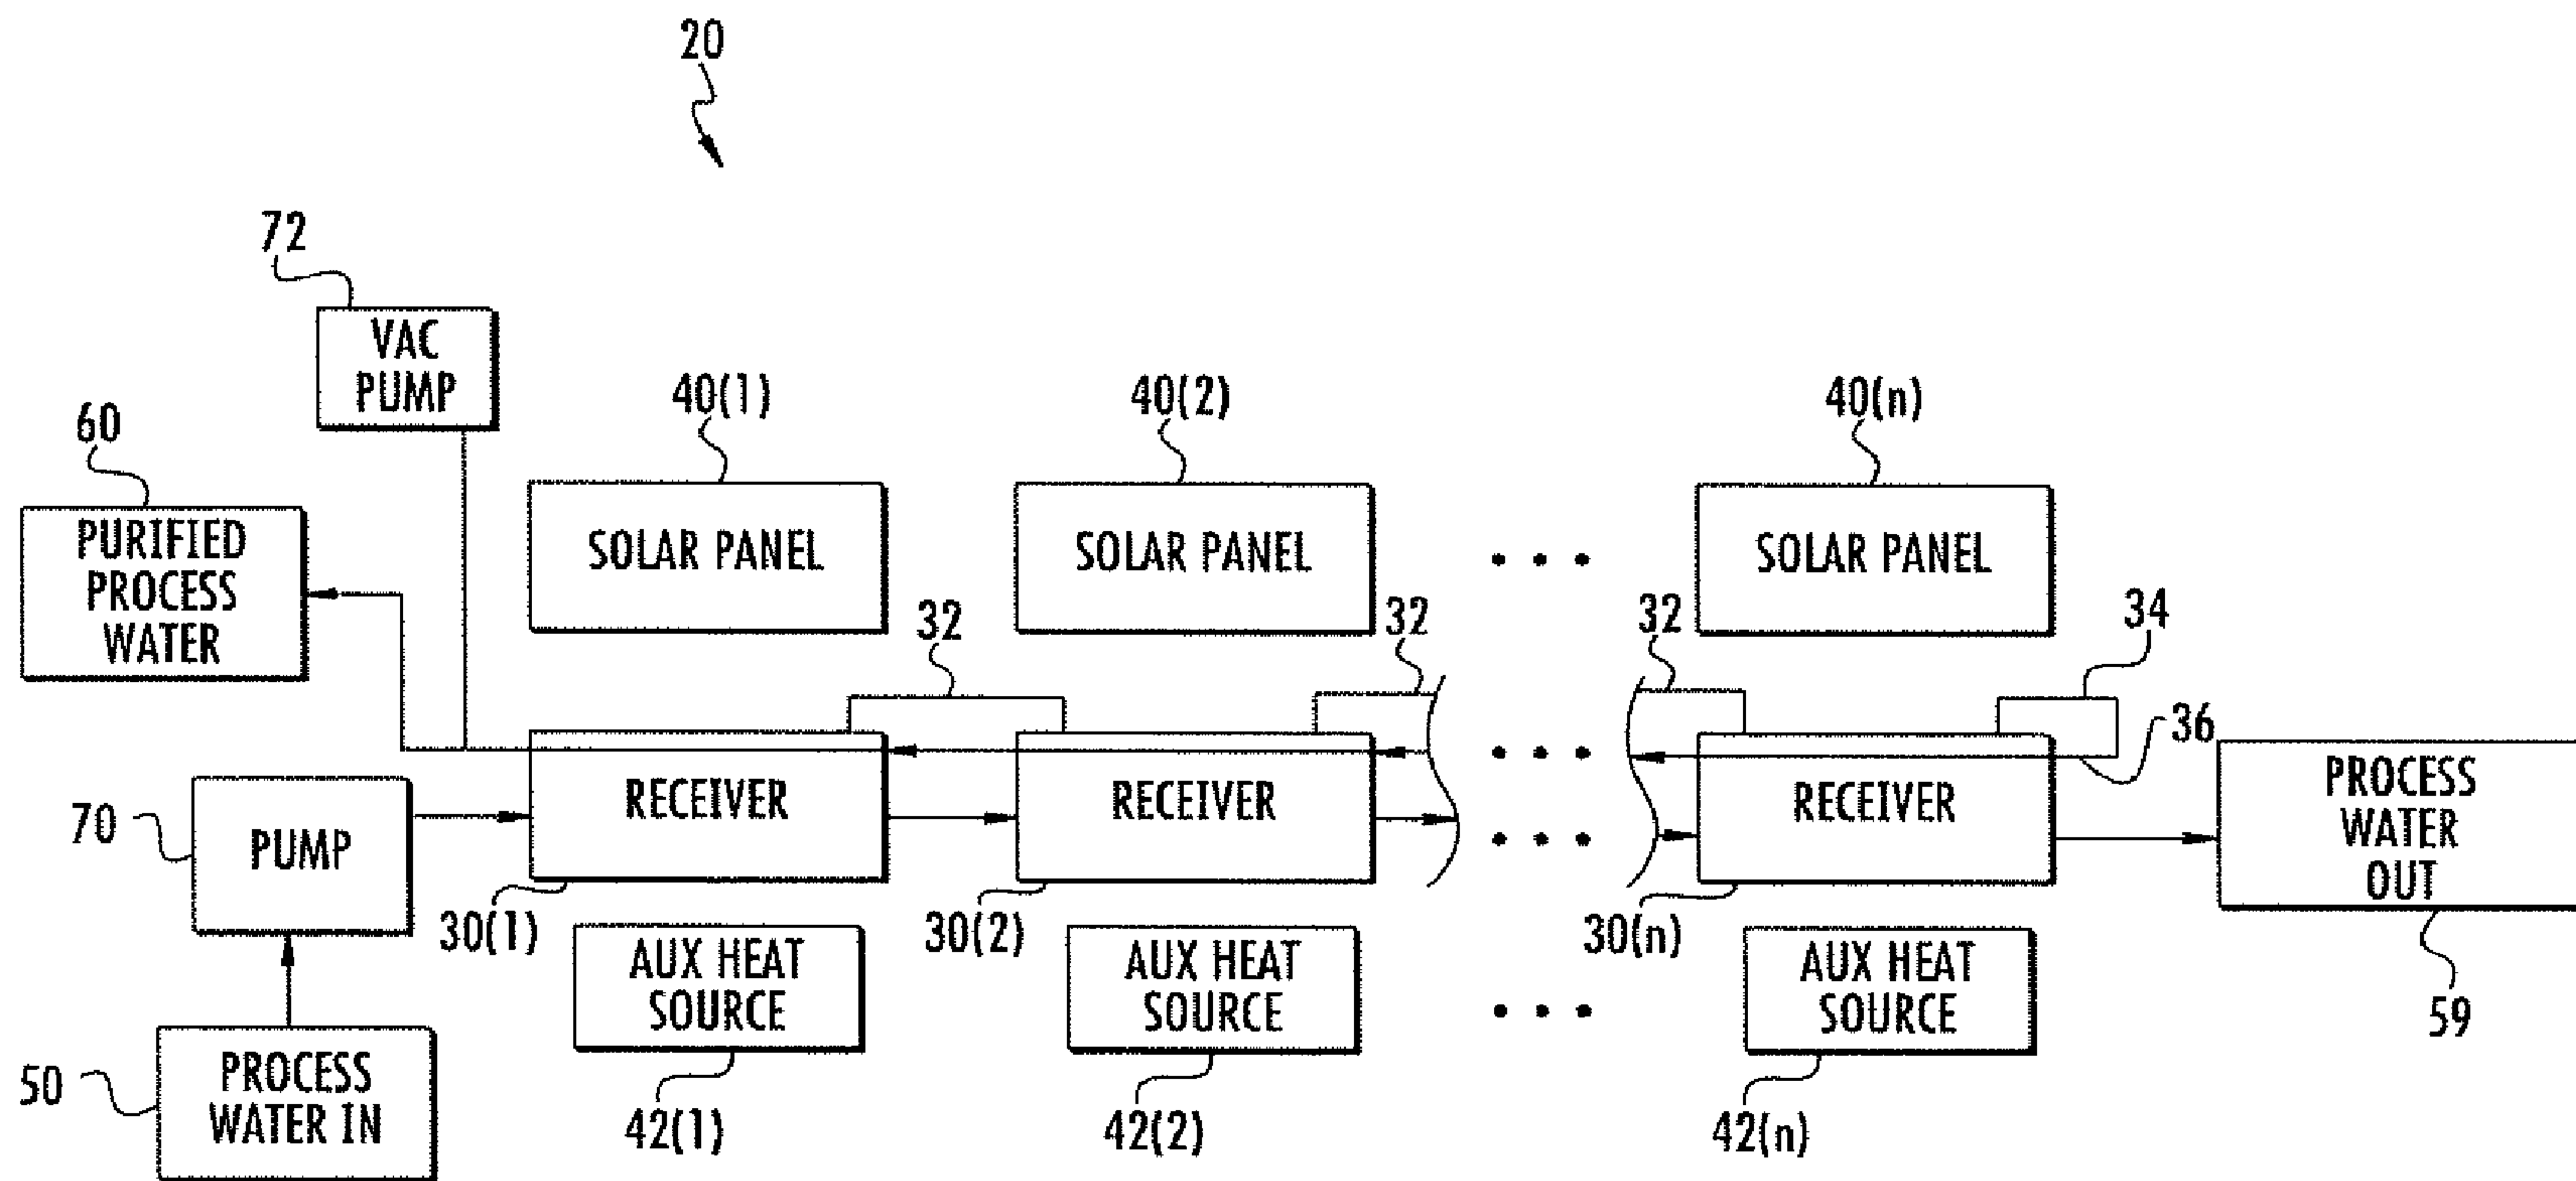


FIG. 1