

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 May 2006 (26.05.2006)

PCT

(10) International Publication Number
WO 2006/055461 A1

(51) International Patent Classification:
H01R 12/18 (2006.01)

(21) International Application Number:

PCT/US2005/041088

(22) International Filing Date:

14 November 2005 (14.11.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10/989,133 15 November 2004 (15.11.2004) US

(71) Applicant (for all designated States except US): **TYCO ELECTRONICS CORPORATION** [US/US]; 2901 Fulling Mill Road, Middletown, PA 17057 (US).

(72) Inventors: **SPITLER, Alexandra Lynne Matthews**; 4 Chelsea Court, Palmyra, PA 17078 (US). **LAUB, Michael, Frederick**; 1191 Knacklyn Farms Court, Harrisburg, PA 17111 (US). **COPPER, Charles, Dudley**; 630 Cardinal Drive, Harrisburg, PA 17111 (US). **MALSTROM, Charles, Randall**; 1006 Kiner Avenue, Lebanon, PA 17042 (US).

(74) Agents: **VACCARELLI, Lisa, Burgin et al.**; Tyco Technology Resources, 4550 New Linden Hill Road, Suite 140, Wilmington, DE 19808 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: ELECTRICAL CONNECTOR AND SYSTEM HAVING CONTACT ARRAY INTERFACE FOR ENGAGING CONTACTS AT VARYING CENTERLINE SPACING

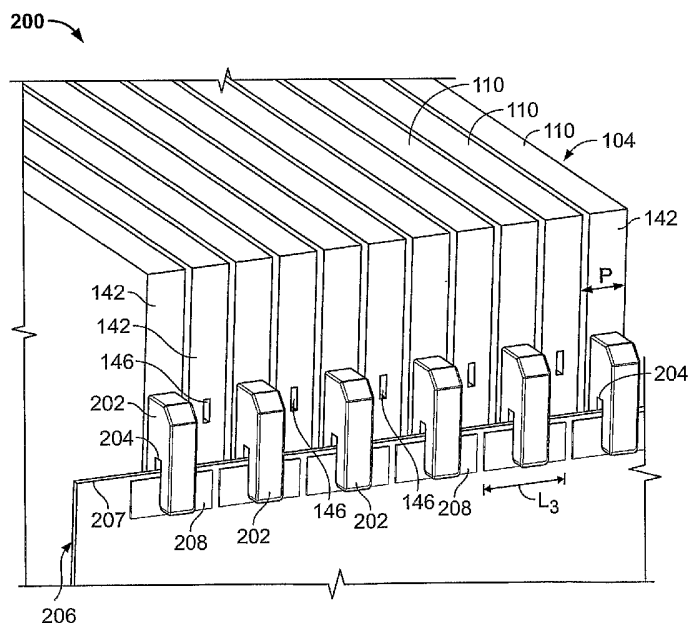

(57) Abstract: An electrical connector for mating with a plurality of contacts (140, 220, 320) separated from one another by a nominal pitch value (P) includes an array of contact surfaces (164, 208, 308) having a first dimension (L_1 , L_3 , L_4) measured in a direction perpendicular to a mating direction between the plurality of contacts and the array of contact surfaces. The first dimension (L_1 , L_3 , L_4) is greater than the nominal pitch value (P), thereby assuring electrical contact between the contacts and the contact surfaces despite an actual deviation from the nominal pitch.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

ELECTRICAL CONNECTOR AND SYSTEM
HAVING CONTACT ARRAY INTERFACE FOR
ENGAGING CONTACTS AT VARYING
CENTERLINE SPACING

[0001] This invention relates generally to electrical connectors, and more specifically, to electrical connectors which mate with contacts having varying centerline spacing due to design variations.

[0002] Certain electrical systems, such as, for example, cable to memory board interconnection systems, board to board interconnections, and back-plane connection systems include a large number of interface contacts arranged in line with one another. The interface contacts are designed to be positioned relative to one another with a predetermined centerline spacing between the contacts. The centerline spacing between the interface contacts, however, may vary in actual practice due to manufacturing tolerances in constructing and assembling the system, and over a large number of contacts the accumulation of tolerances is problematic to interfacing the in line contacts with a connector assembly. Specifically, the tolerances may result in misalignment of the in line contacts with corresponding contacts of the connector, which are also aligned with one another on a predetermined centerline spacing. Such misalignment of the interface contacts may result in one or more of the in line contacts touching the same contact in the connector, thereby shorting the interface contacts to one another. Misalignment of the interface contacts may also result in some of the contacts not making electrical connection with any of the contacts of the connector.

[0003] Such problems may be particularly acute in applications having stacked components and a large number of corresponding contacts to mate with a connector. Such constructions are employed in existing and emerging technologies, and are introducing new demands on electrical connectors. For example, fuel cell technology utilizes a large number of conductive plates arranged in a stack, and it is desirable to monitor a voltage on the plates during operation. Thus, an electrical contact is provided for each plate, and the contacts are interfaced with a circuit board which processes the voltage on the plates in the stack for monitoring

purposes. The contacts are fixed to each plate along an end edge thereof, but the width of the plates in the stack is subject to manufacturing tolerances which may accumulate over a large number of the plates in the stack. Due to the accumulation of tolerances, the actual centerline spacing of some of the contacts in the plates of the fuel cell stack may vary by up to 100% or more of the nominal centerline spacing of the plates in the stack. Such variance of the centerline spacing of the contacts in the stack frustrates the use of conventional connectors to connect the contacts of the plates to the circuit board. The varying contact centerlines will either prohibit mating of the connector to the plate contacts entirely, or cause shorting of the contacts and/or open circuits between the connector and the contacts of the stack.

[0004] The solution is provided by an electrical connector for mating with a plurality of contacts separated from one another by a nominal pitch value wherein the connector comprises an array of contact surfaces having a first dimension measured in a direction perpendicular to a mating direction between the plurality of contacts and the array of contact surfaces. The first dimension is greater than the nominal pitch value, thereby assuring electrical contact between the contacts and the contact surfaces despite an actual deviation from the nominal pitch.

[0005] The invention will now be described by way of example with reference to the accompanying drawings in which:

[0006] Figure 1 is a partial perspective view of an exemplary electrical system including a connector formed in accordance with an exemplary embodiment of the present invention.

[0007] Figure 2 is another partial perspective view of the system shown in Figure 1.

[0008] Figure 3 is a partial perspective assembly view of a portion of the system shown in Figures 1 and 2.

[0009] Figure 4 is a top plan view of the circuit board shown in Figures 1-3.

[0010] Figure 5 illustrates an alternative embodiment of an electrical system having a connector assembly formed in accordance with an exemplary embodiment of the present invention.

[0011] Figure 6 is a perspective view of a contact assembly for the system shown in Figure 5.

[0012] Figure 7 is a partial perspective view of another exemplary embodiment of an electrical system having a connector assembly formed in accordance with the present invention.

[0013] Figure 8 is a partial perspective view of the system shown in Figure 8 with the connector removed.

[0014] Figure 9 is a view similar to Figure 8 but with parts removed.

[0015] Figure 10 is a front perspective view of the connector shown in Figure 7.

[0016] Figure 11 is a first assembly view of the system shown in Figure 7.

[0017] Figure 12 is a second assembly view of the system shown in Figure 7.

[0018] Figures 1 and 2 are partial perspective views of an exemplary electrical system 100 including an exemplary connector assembly 102 which is adapted for engaging contacts on varying centerlines as explained below.

[0019] In an exemplary embodiment, the connector assembly 102 interfaces a fuel cell stack 104 with a monitoring device (not shown) via interface links 106 such as wiring harnesses. The interface links 106 are connected, in turn, to a monitoring module 108 which processes signals transmitted from the fuel cell 104 through the connector assembly 102 and the interface links 106. Thus, the monitoring module 108 may be used to monitor the operation of the fuel cell stack 104 for testing and/or diagnostic purposes. While the connector assembly 102 is illustrated in the

context of interfacing a fuel cell 104 with a monitoring module 108, it is contemplated that the benefits of the invention accrue to other applications of the assembly 102, and the fuel cell 104 is but one exemplary apparatus which presents issues with respect to contact centerline spacing which the connector assembly 102 overcomes. Consequently, the description set forth herein is for illustrative purposes only and is not intended to limit the invention to any particular end use or application.

[0020] The fuel cell stack 104 is a known unit which reacts a gaseous fuel, such as reformed natural gas, with air to produce electrical power in a known manner. The fuel cell stack 104 includes a number of conductive plates 110 which are arranged in a stack. As explained below, plate contacts (not shown in Figure 1) are selectively attached to some or all of the plates 110, and the plate contacts permit the monitoring module 108, via the connector assembly 102, to monitor a voltage on corresponding plates 110 of the fuel cell 104 during operation. Each plate 110 in the fuel cell has a predetermined nominal thickness, and the plates 110 are arranged in the stack with a predetermined nominal spacing value between the plates 110, the sum of which is sometimes referred to as a nominal pitch value P for the plates 110. That is, the stack of plates 10 is designed to have a reoccurring dimension P measured in a direction perpendicular to the plane of the plates 110 from an edge of one plate across the thickness of the plate to the edge of an adjacent plate. In theory, according to design parameters, the plates 110 are repeated at a uniform distance P in the fuel cell stack.

[0021] In reality, each of the plate thicknesses and the spacing of the plates is subject to manufacturing tolerances, and an actual dimension P may deviate somewhat from the nominal value of the plate thickness and the nominal spacing value for any two adjacent plates in the fuel cell 104. Over a large number of plates 110 in the fuel cell stack, the variance of dimension P across the plates may accumulate and produce a significant variance between the theoretical position of a given plate 110 in the stack and its actual position in the stack. In a stack having a large number of plates 110 (e.g., 50 plates), the variance may be up to 100% or more of the nominal value P . As an example, considering a number of plates n numbered 1 through n , the n th plate in the stack would theoretically be positioned at a distance

$n \cdot P$ from the first plate in the stack, but in actual practice, and because of accumulation of manufacturing tolerances, the n th plate may be found at a distance in the range of $(n \cdot P + P)$ to $(n \cdot P - P)$ from the first plate in the stack. Such variability in the position of the plates 110 in the stack produces variability in the contacts connected to the plates 110. Unlike known connectors, however, the connector assembly 102 is fully capable of accommodating such variance in position of the contacts, as explained in detail below.

[0022] In an exemplary embodiment, the connector assembly 102 includes an insulative (i.e., nonconductive) housing 112 covering the plate contacts. The housing 112 includes an upper portion 114 and a lower portion 116 each defining a slot 118 and 120, respectively. The slots 118 and 120 receive a forward edge 121, 123 of respective circuit boards 122 and 124, sometimes referred to as pitch spreading boards. Connectors 126 are mounted to the boards 122 and 124 and interface the boards 122 and 124 with the interface links 106.

[0023] Figure 2 illustrates the system 100 with the interface links 106 and the lower board 124 removed. The housing 112 of the connector assembly 102 includes a number of individual housings 130 collectively forming the slots 118 and 120 which extend between opposite sides 132, 134 of the fuel cell stack. The housings 130 are separately attached to each of the plates 110 in the stack, and thus the position of the housings 130 in the stack may vary from the nominal spacing value or pitch P as described above. Each housing 130 includes an upper portion 114 and a lower portion 116, and one of the upper and lower portions 114 and 116 includes a contact extending from a plate 110. The boards 122 and 124 (Figure 1) are insertable into and removable from the slots 118 and 120 to establish a card edge connection with the plate contacts in the housings 130, and ultimately to electrically connect the monitoring module 108 to the stack of plates 110. Quick connection and disconnection of the plate contacts is therefore provided, and the connector assembly 102 accommodates variances in positioning of the contacts due to the accumulation of manufacturing tolerances in fabricating and spacing the plates 110.

[0024] Figure 3 illustrates the plates 110 of the fuel cell 114 with the housing 112 (Figure 1) removed and the plate contacts 140 extending from end edges 142 of the plates 110. In an exemplary embodiment the plates 110 are fabricated in a known molding process to include cavities 144 and 146 in the end edges 142 wherein the cavities 144 and 146 are substantially centered in the thickness of the plates 110, although it is recognized that in alternative embodiments the cavities 144, 146 may otherwise be formed and located in a non-centered position in the plates 110. The cavities 146 are substantially aligned in a row at a first distance from a top edge 148 of the plates 110, and the cavities 144 are substantially aligned in a row at a second distance from the top edge 148. Thus, the cavities 144 and 146 extend in first and second rows on the end edges 142 of the plates 110 and define a two dimensional array of cavities 144, 146. Each plate 110 includes a cavity 144 and a cavity 146, and the cavities 144 and 146 are similarly shaped and dimensioned so as to receive a plate contact 140. The plate contacts 140 are therefore positionable in two locations on each end edge 142, namely in the first cavity 144 or the second cavity 146. While two rows of cavities 144, 146 are illustrated, it is understood that more rows of cavities may be provided in an alternative embodiment.

[0025] As illustrated in Figure 3, the plate contacts 140 are selectively populated in the two dimensional array of cavities 144 and 146. That is, not all of the cavities 144, 146 includes a plate contact 140. In one embodiment, and as shown in Figure 3, the plate contacts 140 are located in one or the other of the cavities 144 and 146 in each plate, but not both. Further, the plate contacts 140 are located in the cavities 144 in every other plate 110 in the stack, with plate contacts 140 located in the cavities 146 of the plates therebetween. That is, the plates 110 of the stack include an alternative sequence of plates 110 with plate contacts 140 in the cavities 144 and plates 110 with plate contacts 140 in the cavities 146. By way of example, considering an n number of plates numbered 1 through n in the stack, the even numbered plates would include plate contacts 140 in the cavities 144, and the odd numbered plates would include plate contacts 140 in the cavities 146, or vice versa. Resultantly, the plate contacts 140 are located diagonally from one another on adjacent plates 110 in the two dimensional array and the plate contacts 140 are

staggered from one another in a zigzag pattern across the end edges 142 of the plates 110. The alternating sequence of plate contacts 140 at different elevations in a two dimensional array facilitates accommodation of accumulated tolerances in a position of the plate contacts 140.

[0026] While in the illustrated embodiment a plate contact 140 is provided on every plate 110 in the fuel cell stack, and hence every plate 110 may be monitored with the monitoring module (Figure 1), it is understood that fewer plate contacts 140 may be provided in an alternative embodiment wherein less than all of the plates 110 are to be monitored by the monitoring module 108. Likewise, in such an embodiment having fewer plate contacts 140, the number of housings 130 (Figure 2) which protect the contacts may be accordingly reduced.

[0027] In an exemplary embodiment the plate contacts 140 each include a base (not shown in Figure 3) which is insertable into the cavities 144, 146, and first and second arms 150 and 152 extending from the end edge 142 of the plates 110. The arms 150 and 152 are resiliently deflectable when the card edges 121, 123 (Figure 1) of the boards 122 and 124 are inserted therebetween. Because the cavities 144 and 146 are each in the same location in the dimension of the plate thickness (e.g., centered in the plate thickness in an exemplary embodiment), the centerline spacing of the plate contacts 140 is subject to the variance in the pitch P between adjacent plates 100.

[0028] Figure 4 is a top plan view of an exemplary board 122 including a contact engagement surface 160 and a module engagement surface 162. The contact engagement surface 160 includes a plurality of contact pads 164 aligned along a card edge 163 which is adapted for insertion between the contact arms 150 and 152 (Figure 3) of the plate contacts 140. The card edge 163 extends for a sufficient length to span a row of plate contacts 140 in the two dimensional array of plate contacts 140 in the stack of plates 110, and each of the contact pads 164 extends for a dimension L_1 (measured in a direction perpendicular to a mating direction between the plate contacts 140 and the contact pads 164) along the edge 163 which is greater than the nominal pitch value P (Figures 1 and 2) of the stack of plates 110. In

an exemplary embodiment, L_1 is approximately twice the value of P , and therefore when the forward edge 121 (Figure 2) is received in the slot 118 of the housings 130 (Figure 2) a selected one of the plate contacts 140 (Figure 3) may vary from its theoretical position based upon the nominal value of P by up to 100% and still electrically couple the plate contact with the respective contact pad 164 on the contact engagement surface 160. It is understood that greater or lesser ratios of L_1 and P may be employed in other embodiments as desired or as needed to ensure engagement of plate contacts 140 to the contact engagement surface 160.

[0029] Additionally, because the plate contacts 140 are staggered diagonally from one another on alternating plates 110, plate contacts 140 in adjacent plates 110 in the stack may not engage the same contact pad 164 on the contact engagement surface 160 of the board 122. Rather, because of the staggered contact in the two dimensional array of plate contacts 140, adjacent plate contacts 140 in the stack engage different circuit boards 122, 124, respectively, and shorting of the plate contacts 140 on the contact engagement surfaces 160 of the boards is avoided even when the plate contacts 140 are much closer to one another in the stack than the theoretical pitch value P .

[0030] The module engagement surface 162 includes a number of contact pads 166 which are smaller than the contact pads 164 of the contact engagement surface 160, and the contact pads 166 have a dimension L_2 (measured in a direction perpendicular to a mating direction between the plate contacts 140 and the contact pads 164) which is less than L_1 . Thus, while L_1 is greater than the value of P , L_2 is less than the value of P . Accordingly, the module engagement surface 162 is more compact than the contact engagement surface 160 and extends for a lesser axial length of the board 122 than the contact engagement surface 160. Conductive traces 168 interconnect each respective contact pad 164 on the contact engagement surface 160 to a contact pad 166 on the module engagement surface 162. The smaller module engagement surface 162 is configured for connection to a wiring harness or standard connector to link the board 122 to the monitoring module 108 (Figure 1). The board 122 may be fabricated from known circuit board materials, and the contact pads 164,

168 and the conductive traces 168 may be formed according to known methods and techniques.

[0031] A connector 126 (Figure 1) may be provided and mounted on the contact pads 166, and the connector may include a receptacle for receiving an interface link 106 such as a wire harness. Alternatively, a card edge connector could be employed on the module engagement surface to couple the board 122 to an interface link 106.

[0032] The board 124 (Figure 1) is constructed similarly to the board 122, and the contact pads of the board 124 are positioned to engage the plate contacts 140 in the slot 120 (Figures 1 and 2) of the housings 130. Each of the boards 122 and 124 includes contact engagement surfaces having contact pads numbering one half of the number of plates 110 in the fuel cell stack, and the respective boards 122, 124 engage the respective rows of the staggered plate contacts 140 via the card edge slots 118 and 120. The board 122 engages the plate contacts 140 in the upper cavities 146 of the plates 110, and the board 124 engages the plate contacts 140 in the lower cavities 144 of the plates 110. The boards 122 and 124 may be used separately or in combination to monitor some or all of the plates 110 with the monitoring module 108. It is understood that additional boards could be employed with more rows of cavities so that each board monitors one third, one fourth, etc. of the plates 110 in the stack. By monitoring a predetermined fraction of the plates 110, the performance of the fuel cell stack may be monitored to varying degrees.

[0033] A connector assembly 102 is therefore provided which capably accommodates varying centerline spacing of plate contacts 140 while assuring that all contacts are engaged without shorting any of the plate contacts 140. Additionally, the connector assembly 102 is flexible for use with different types of components. For example, different boards 122 and 124 may be provided having appropriately arranged contact engagement surfaces for devices (e.g., fuel cells) having different nominal pitch values P for the plates 110. The module engagement surface of the boards 122 and 124 may be standardized for universal use among different types of devices.

[0034] Figure 5 illustrates an alternative embodiment of an electrical system 200 including, for example, a fuel cell 104 which is subject to a varying centerline pitch P between the plates 110. End edges 142 of the plates 110 include cavities 146, and right angle contacts (not shown in Figure 5) that are selectively mounted within and extend from the cavities 146 to selectively populate the cavities. The plate contacts are situated within housings 202 defining a slot 204 therein, and a circuit board 206 is received within the slots 204.

[0035] The board 206 includes contact pads 208 aligned along a card edge 207 and having a dimension L_3 (measured in a direction perpendicular to a mating direction between the plate contacts and the contact pads 208) which is greater than P . The relative dimension of the contact pads 208 and the nominal pitch value assures that each of the contact pads 208 is engaged to one of the plate contacts, despite accumulation of tolerance in fabricating and spacing the plates 110. The board 206 may be fabricated from known circuit board materials with the contact pads 208 formed thereon according to known methods and techniques.

[0036] To avoid shorting of the contacts, and as illustrated in Figure 5, only every other plate 110 (e.g., the odd numbered plates) in the fuel cell stack is provided with a contact. Thus, the board 206 is suited for engaging contacts in some, but not all of the plates 110. Contacts (not shown in Figure 5) may be provided on the even numbered plates in a different location from the odd numbered plates to monitor the even numbered plates. That is, the plates 110 may include additional cavities wherein the contacts may be mounted in more than one position on the plates 110.

[0037] Figure 6 is a perspective view of a contact assembly 220 for the system 200 shown in Figure 5. The assembly 220 includes a conductive contact 222 having a base 224 insertable into a cavity 146 (Figure 5) of a plate 110, and a first contact arm 226 and a second contact arm 228 extending from the base 224. The arms 226 and 228 are resiliently deflectable when the card edge 207 (Figure 5) of the board 206 is inserted therebetween. The arms 226 and 228 extend at a right angle from the base 224, and an insulative housing 202 surrounds the contact arms 226 and 228 while defining a slot 204 which receives the board 206. The right angle contacts 222 receive

the board 206 in a direction parallel to the end edges 142 of the plates 110, and therefore the system 200 occupies less room than the system 100. Additionally, hold-down hardware (not shown) may be required to securely mount the board 206 to the right angle contacts 222 for monitoring purposes.

[0038] The board 206 may include a module engagement surface (not shown) for interfacing with a monitoring module 108 (Figure 1). Additionally, circuitry for plate testing and/or monitoring could be directly incorporated into the board 206.

[0039] A connector assembly is therefore provided which capably accommodates varying centerline spacing of contacts 222 while assuring that all contacts are engaged without shorting any of the contacts 222.

[0040] Figure 7 illustrates another embodiment of an electrical system 300 including, for example, a fuel cell 104 which is subject to a varying centerline pitch P between the plates 110. End edges 142 of the plates 110 include cavities (not shown in Figure 7), and contacts (not shown in Figure 7) mounted within and extending from the cavities. A connector 302 includes an insulative housing 304 having contacts (not shown in Figure 7) mounted thereto which engage the contacts extending from the plates 110. A monitoring module 305 is coupled to the connector for monitoring the plates 110 in the fuel cell stack.

[0041] Figures 8 and 9 illustrate multiple contact cavities 310, 312, 314 and 316 formed in each end edge 142 of the plates 110. The cavities 310-316 are arranged in four rows, respectively, and each row of cavities 310, 312, 314 and 316 is located a different distance from the top edge 148 of the plates 110.

[0042] Contacts 320 (Figure 9) are selectively populated in the two dimensional array of cavities 310, 312, 314 and 316. That is, not all of the cavities 310, 312, 314 and 316 includes a contact 320. In one embodiment, and as shown in Figures 8 and 9, the contacts 320 are located in only one of the cavities 310, 312, 314 and 316 in each plate. Further, the contacts 320 are located in the respective cavities 310, 312, 314 and 316 in every fourth plate 110 in the stack. That is, the plates 110 of

the stack include an alternative sequence of four plates 110 with contacts 320 in the cavity 316 in the first plate, a contact 320 in the cavity 314 in the second plate, a contact 320 in the cavity 312 in the third plate, and a contact 320 in the cavity 310 in the fourth plate. Resultantly, the contacts 320 are located in diagonal lines in each sequence of four plates 110, and the contacts 320 are staggered from one another in adjacent plates 110. The alternating sequence of contacts 320 at different positions or elevations in a two dimensional array facilitates accommodation of accumulated tolerances in a position of the contacts 320. Like the foregoing contacts, the contacts 320 include a base (not shown) insertable into the cavities 310-316 of the plates 110, and a first contact arm and a second contact arm extending from the base. The contact arms are deflectable when a mating contact is inserted therebetween.

[0043] Insulative housings 322 (Figure 8) are fitted over each of the contacts 320 (Figure 9) on the plates 110, and the housings 322 define an engagement slot 324. The slots 324 of the housings 322 assist in aligning the connector 302 (Figure 7) as it is mated with the contacts 320 extending from the plates 110.

[0044] Figure 10 illustrates the connector 302 including the housing 304 defining a plurality of contact apertures 306 and a plurality of blade contacts 308 extending through the contact apertures 306 with some of the blade contacts 308 removed for clarity.

[0045] The contact apertures 306 and blade contacts 308 are arranged in diagonal lines of a two dimensional array which align with the diagonal lines of contacts 320 (Figure 9). Each blade contact 308 aligns with the engagement slot 324 (Figure 9) of a housing 322, and also aligns with the contact 320 within the housing 322 when the connector 302 is installed. In an exemplary embodiment, the housing 304 is molded from a known insulative material, such as plastic, and includes a primary alignment surface 330 and a secondary alignment surface 332 which is recessed relative to the primary alignment surface 330. A third surface 334 is provided which is recessed relative to the second alignment surface 332. The third surface 334 defines a receptacle surrounding many of the blade contacts 308.

[0046] The primary alignment surface 330 includes a first alignment receptacle 340 having horizontal and vertical alignment grooves 342 and 344 formed in the outer contours thereof. The vertical grooves 344 provide for initial alignment with one of the housings 322 of the contacts 320 in a vertical direction (i.e., in a direction parallel to arrow A), and the horizontal grooves 342 provide for initial alignment in a horizontal direction (i.e., in a direction parallel to arrow B). Thus, the grooves 342 and 344 assist in orienting the connector 302 with respect to the fuel cell stack, as illustrated in Figure 11.

[0047] Additionally, the secondary alignment surface 332 includes a secondary alignment receptacle 346 which provides for secondary alignment with another of the housings 322 and contact 320 of the fuel cell stack. The receptacle 346 may be fitted over another housing 320 to provide further positioning along the vertical axis (i.e., in a direction parallel to arrow A) as illustrated in Figure 11. Once the alignment receptacles 340 and 346 are aligned with respect to the fuel cell 104, the remaining blade contacts 308, housings 322 and contacts 320 are in alignment as shown in Figures 11 and 12, and the connector 302 may be fully mated to the fuel cell 104 by moving the connector in the direction of arrow C. Guidance is therefore provided along two mutually perpendicular axes (i.e., the axes indicated by arrows A and B) to assist in lining up the connector 302 for mating engagement in the direction of Arrow C.

[0048] Each contact blade has a dimension L_4 (Figure 10, measured in a direction perpendicular to mating direction between the blades 308 and plate contacts 320) which is greater than the nominal pitch value P (Figure 7) of the plates 110 in the fuel cell stack. The relative dimensions of the blade contacts 308 and the nominal pitch value assures that an outer surface of each of the blade contacts 308 is engaged to one of the plate contacts 320, despite accumulation of tolerance in fabricating and spacing the plates 110. Additionally, staggering the plate contacts 320 prevents more than one blade contact 308 from engaging the same plate contact 320 and avoids shorting of adjacent contacts.

[0049] A connector assembly 300 is therefore provided which capably accommodates varying centerline spacing of contacts 320 while assuring that all contacts are engaged without shorting any of the contacts 320

WHAT IS CLAIMED IS:

1. An electrical connector for mating with a plurality of contacts separated from one another by a nominal pitch value (P), being characterized in that said connector comprises an array of contact surfaces (164, 208, 308) having a first dimension (L_1 , L_3 , L_4) measured in a direction perpendicular to a mating direction between the plurality of contacts (140, 220, 320) and the array of contact surfaces (164, 208, 308), said first dimension (L_1 , L_3 , L_4) greater than said nominal pitch value (P), thereby assuring electrical contact between the contacts (140, 220, 320) and said contact surfaces (164, 208) despite an actual deviation from the nominal pitch.
2. An electrical connector in accordance with claim 1 wherein each of said contact surfaces (164, 208) are arranged upon a circuit board card edge (121, 123, 207).
3. An electrical connector in accordance with claim 1 wherein said contact surfaces (164, 208) are arranged in a two dimensional array.
4. An electrical connector in accordance with claim 1 wherein said first dimension (L_1) is approximately twice the nominal pitch value (P).
5. An electrical connector in accordance with claim 1 wherein said connector comprises a circuit board (122, 124, 206), said board comprising a contact engagement surface (160, 207) and a module engage surface (162), each of said contact engagement surface and said module engagement surface a dimension measured in a direction perpendicular to a mating direction between the plurality of contacts and the array of contact surfaces, said dimensions of said contact engagement surface and said module engagement surface being unequal.
6. An electrical connector in accordance with claim 1 wherein said connector comprises a circuit board (122, 124,), said board further comprising opposite first and second engagement surfaces (160, 162), each of said first and second engagement surfaces comprising a plurality of contact pads, said contact pads (164) of said first engagement surface spaced from one another by a distance greater

than said pitch value, said contact pads (166) of said second engagement surface spaced from one another by a distance less than said pitch value.

7. An electrical connector in accordance with claim 1 wherein said connector (302) comprises a housing (304) and blade contacts (308) extending from said housing.

8. An electrical system characterized by:

a plurality of electrical components (110) arranged in line with one another and spaced from one another by a nominal pitch value (P), said components having an edge (142) configured to receive an electrical contact in more than one position on each said component;

a plurality of contacts (140, 220, 320) selectively engaged to said components; and

a connector comprising a plurality of contact surfaces (164, 208, 308), each of said contact surfaces configured to establish an electrical connection with one of said contacts without shorting said contacts due to manufacturing tolerances or design variations of the components whereby an actual spacing of said components deviates from said nominal pitch value.

9. An electrical system in accordance with claim 8 wherein said components comprise conductive plates of a fuel cell stack (104).

10. An electrical system in accordance with claim 8 wherein each said conductive plates (110) comprises a plurality of cavities (144, 146, 310, 312, 314, 316) on an edge thereof (142), said cavities arranged in a two dimensional array.

11. An electrical system in accordance with claim 8 wherein said contacts are arranged on a fractional number of said components (110).

1/9

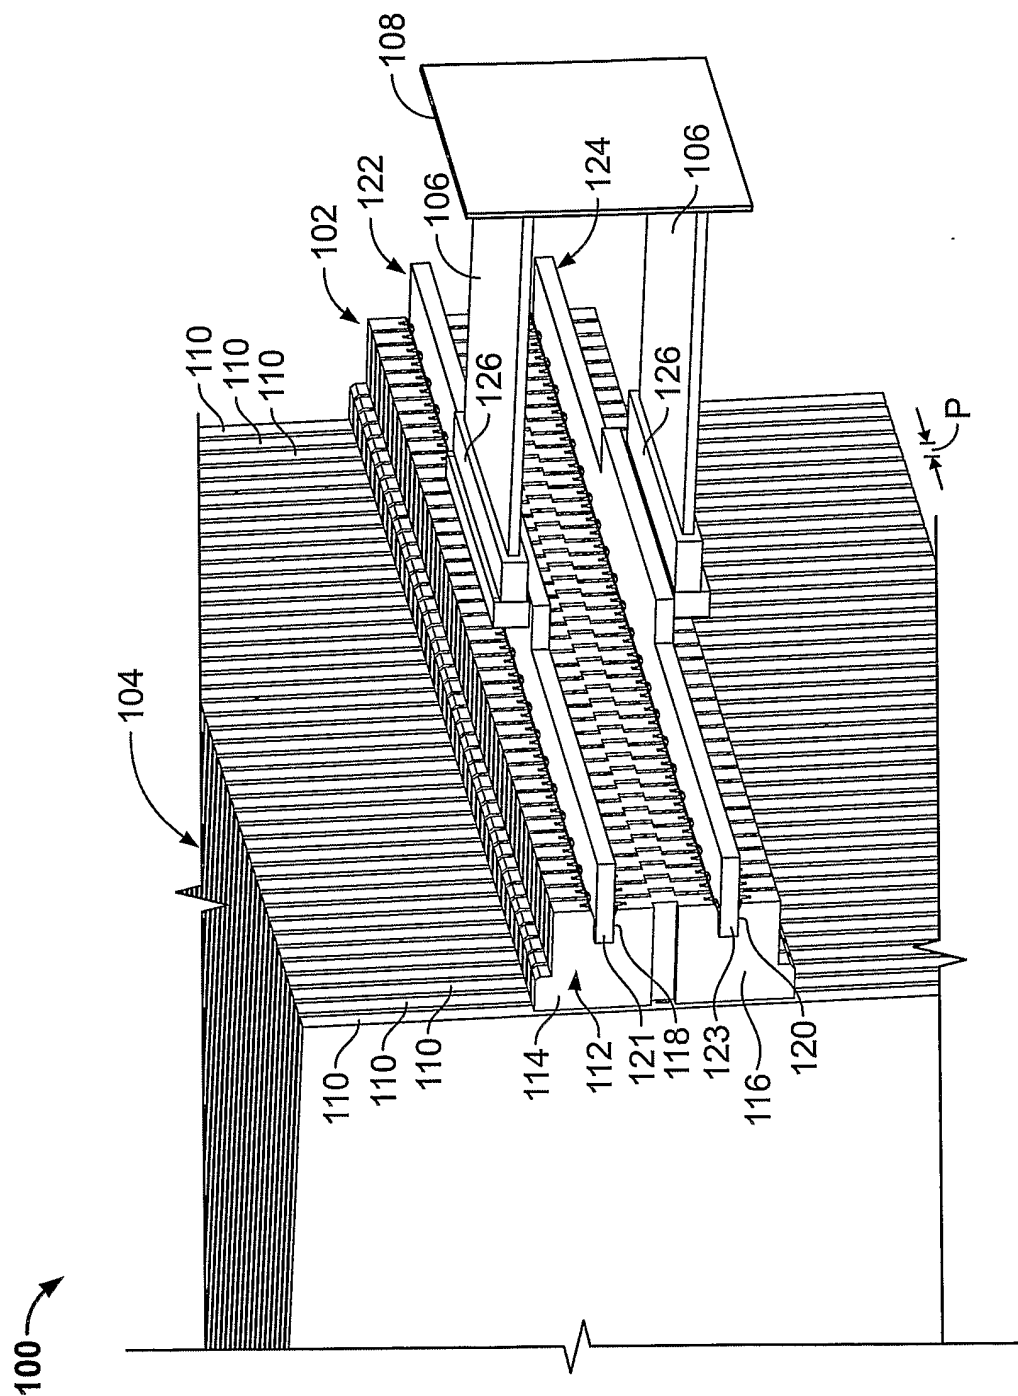


FIG. 1

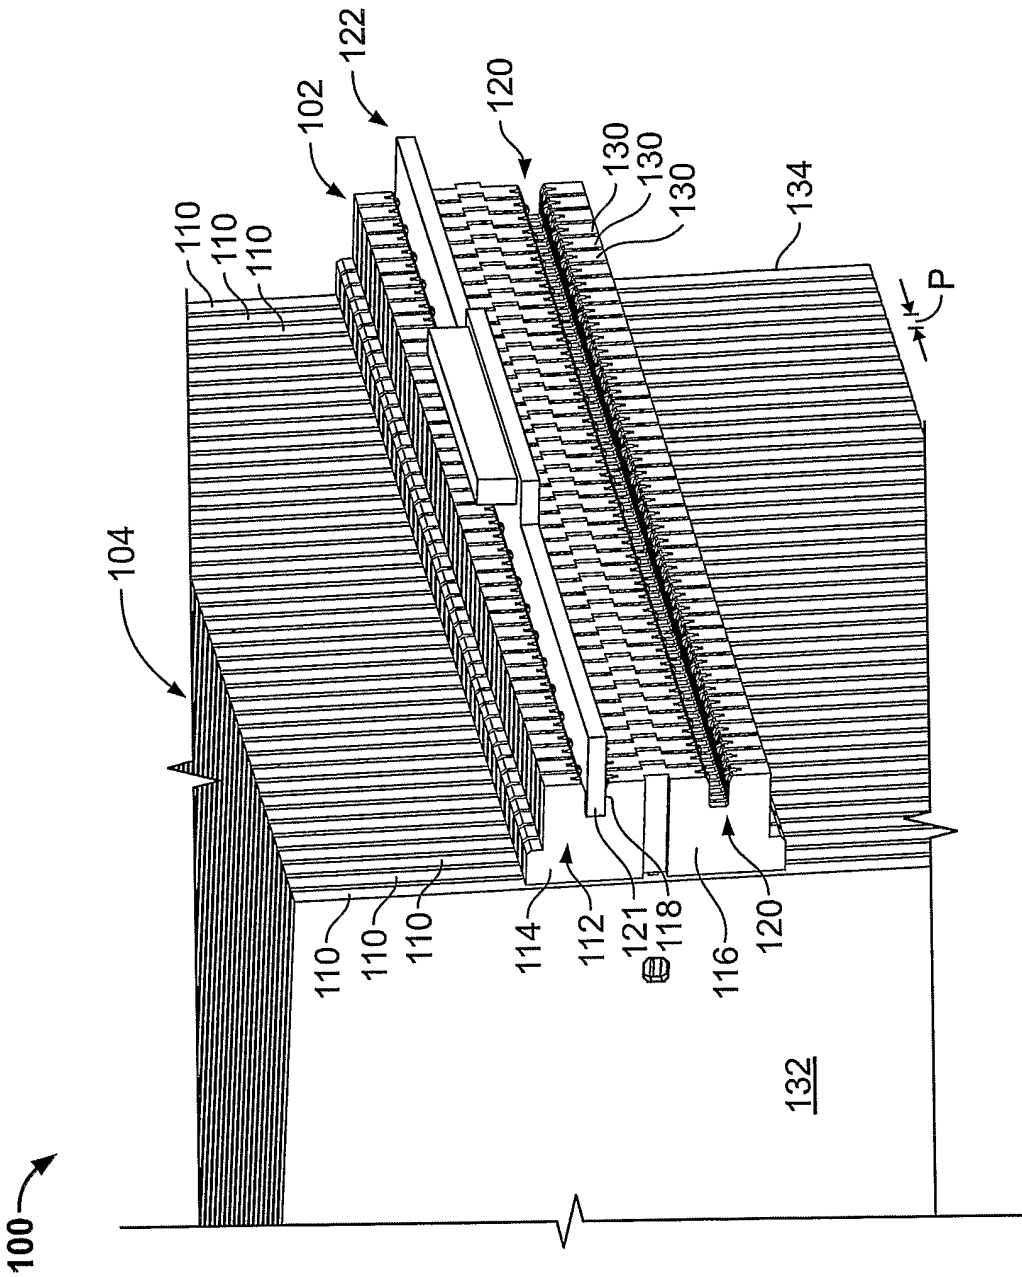


FIG. 2

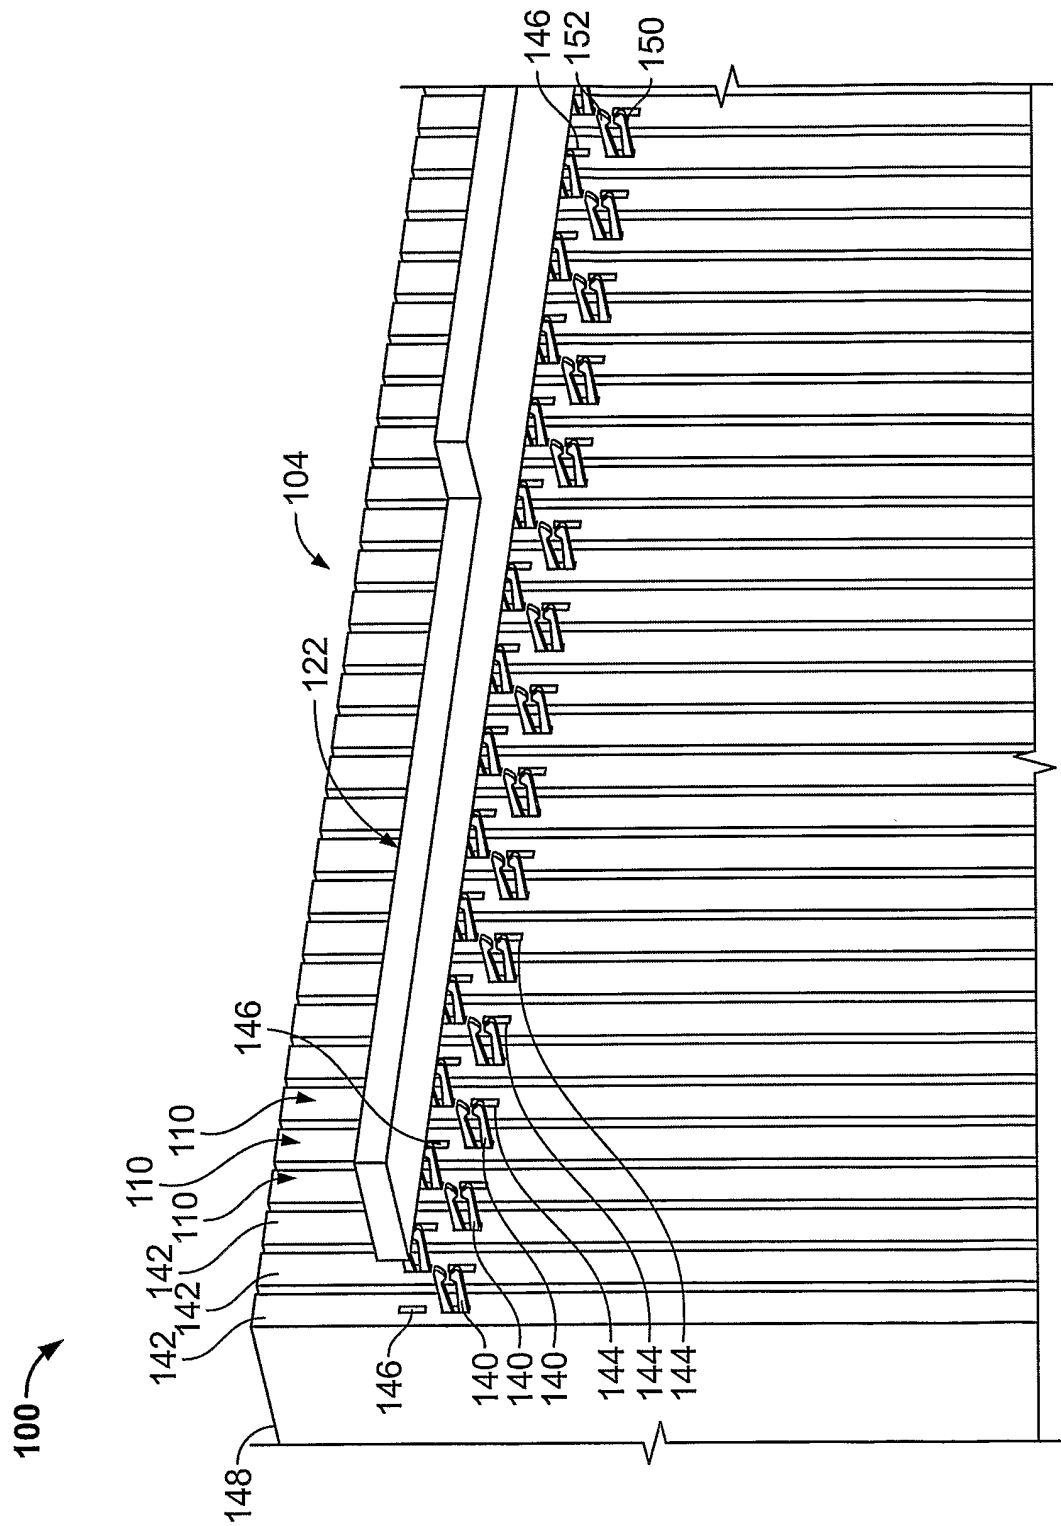


FIG. 3

4/9

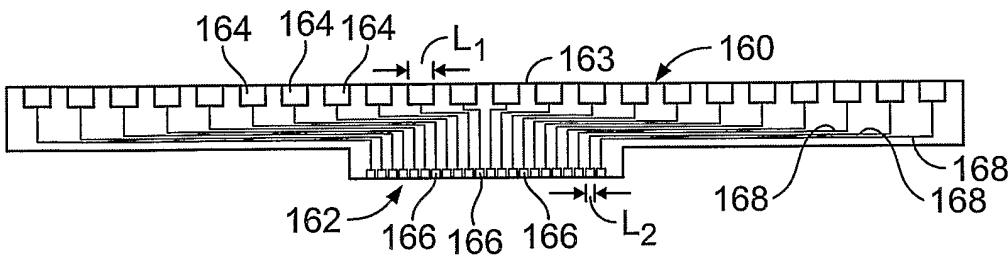


FIG. 4

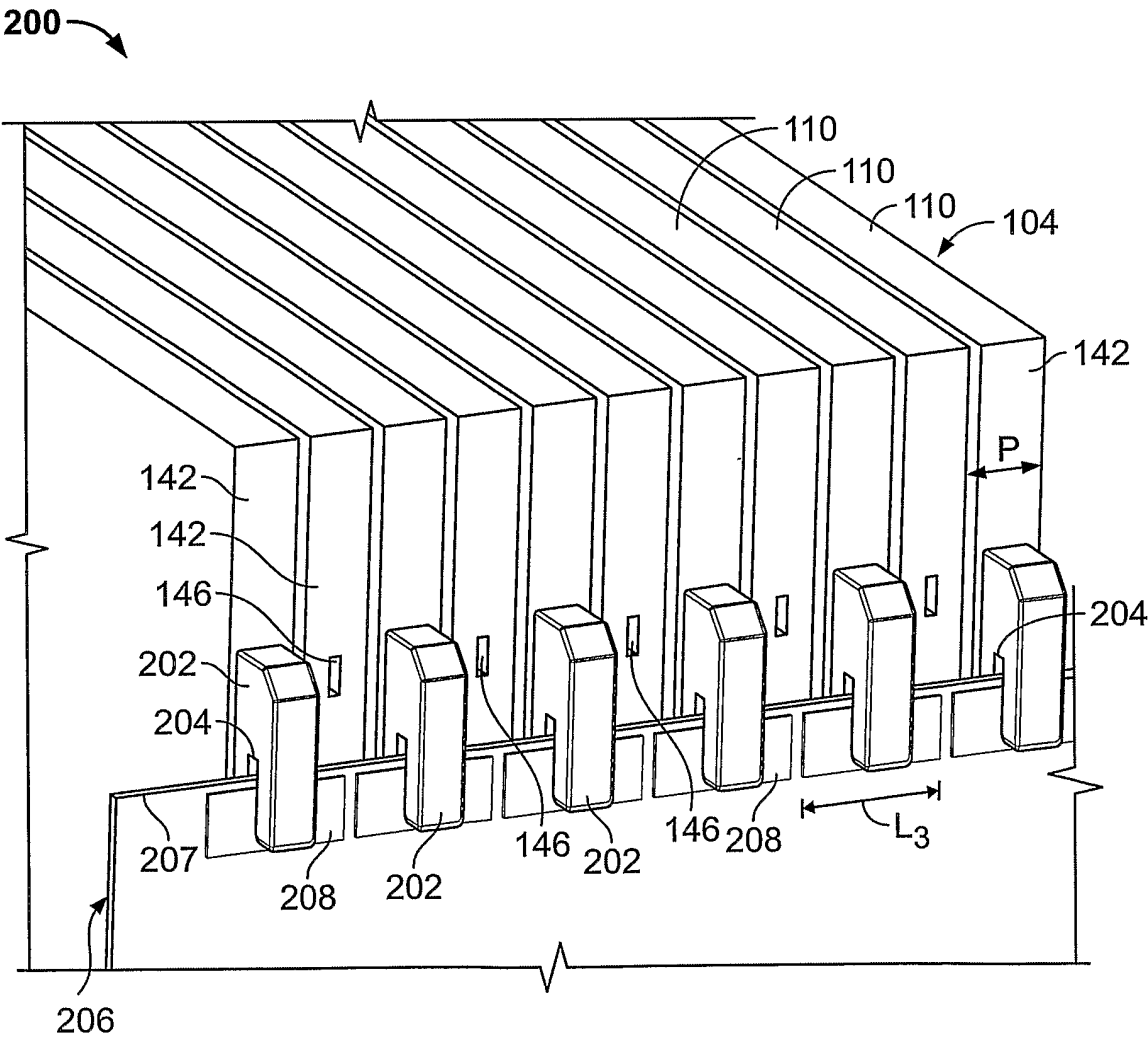
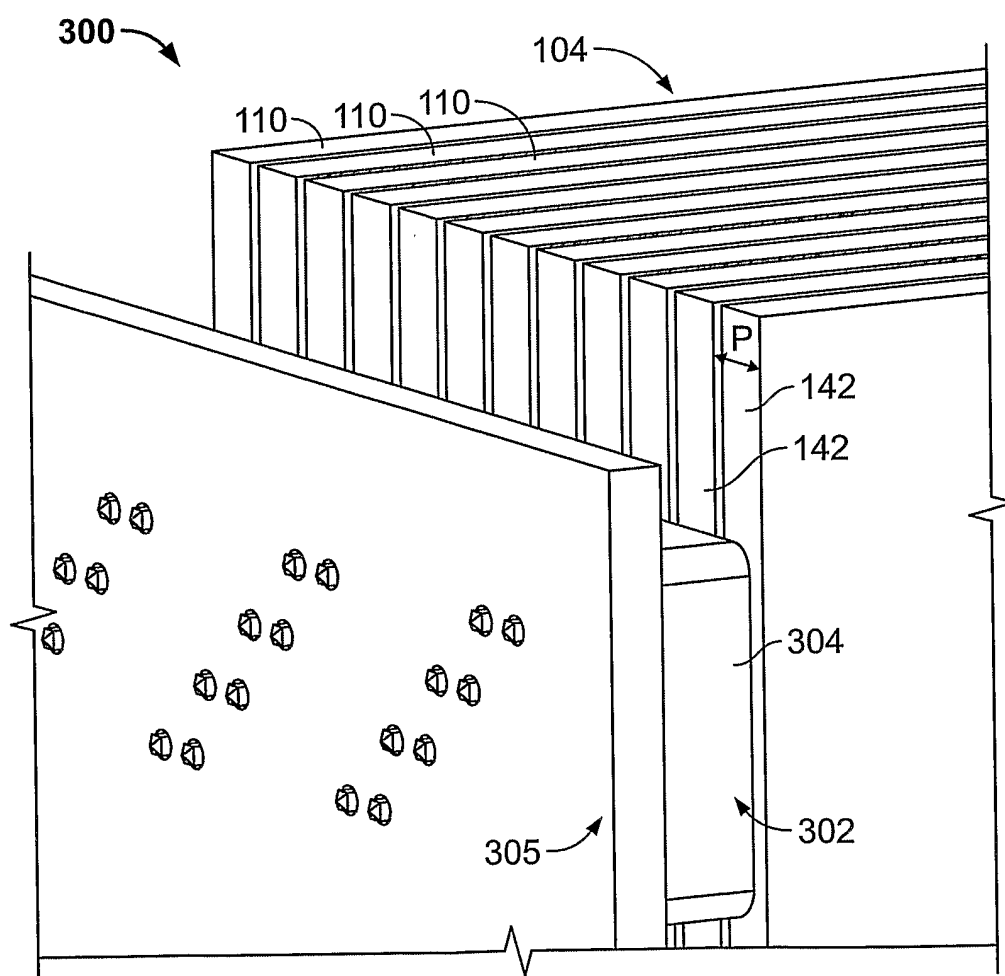
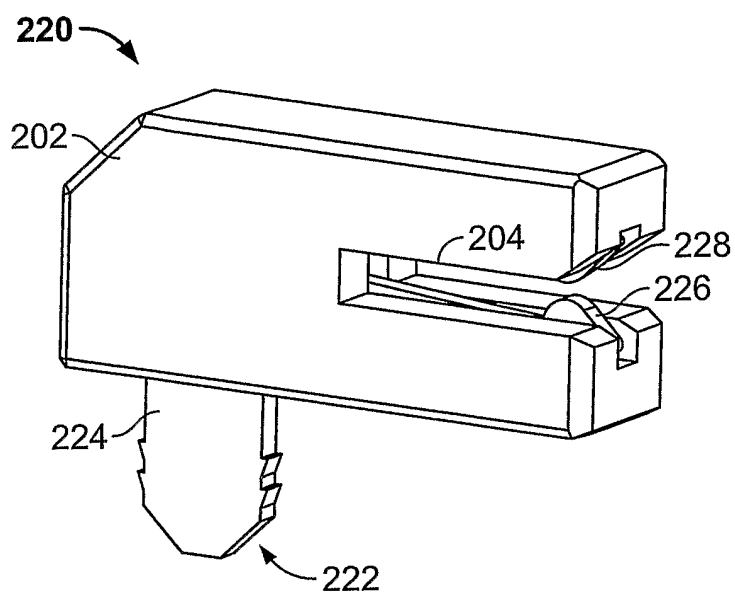


FIG. 5

5/9



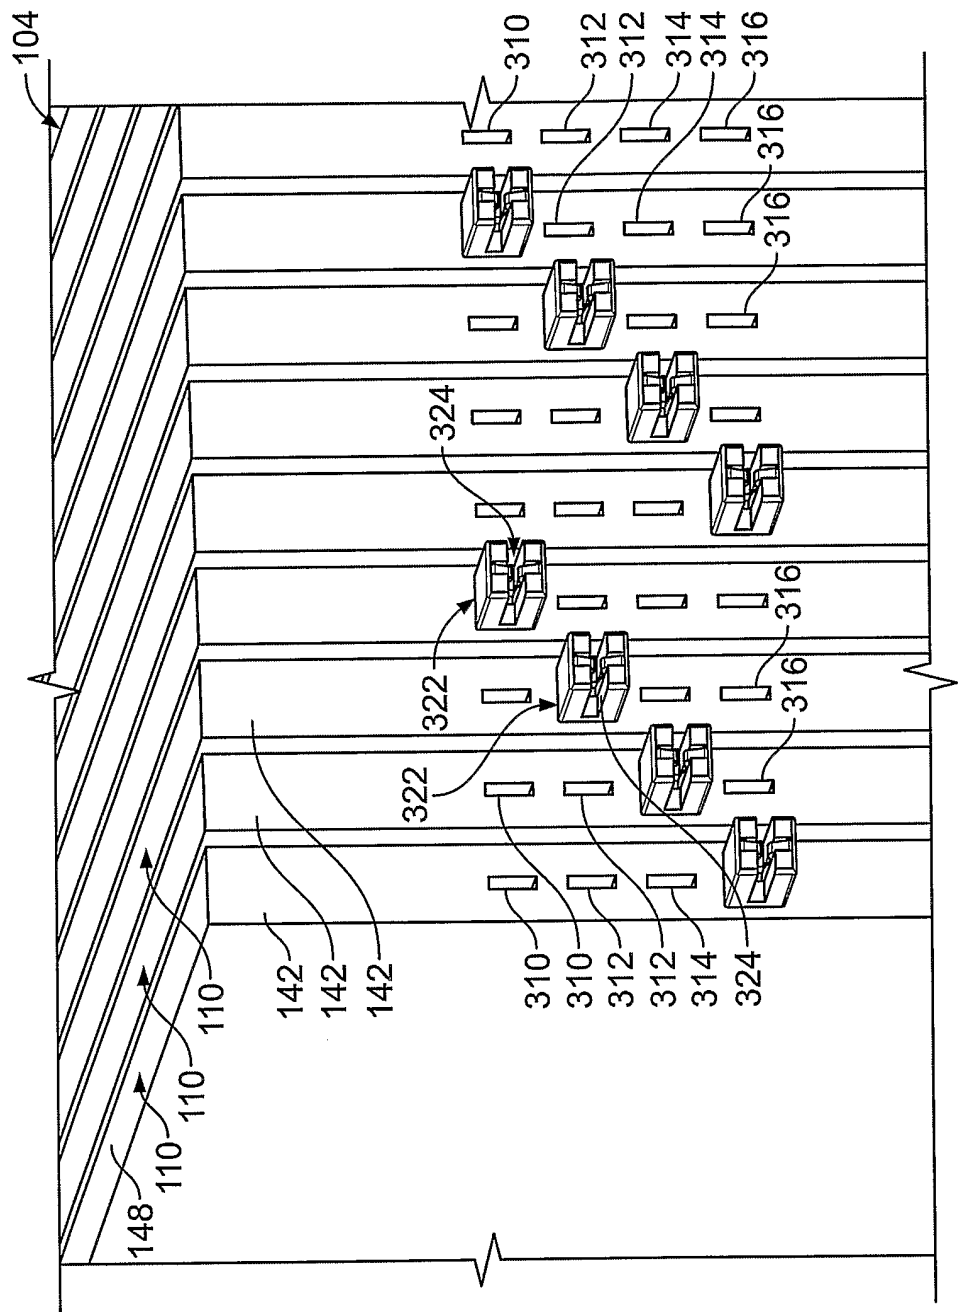


FIG. 8

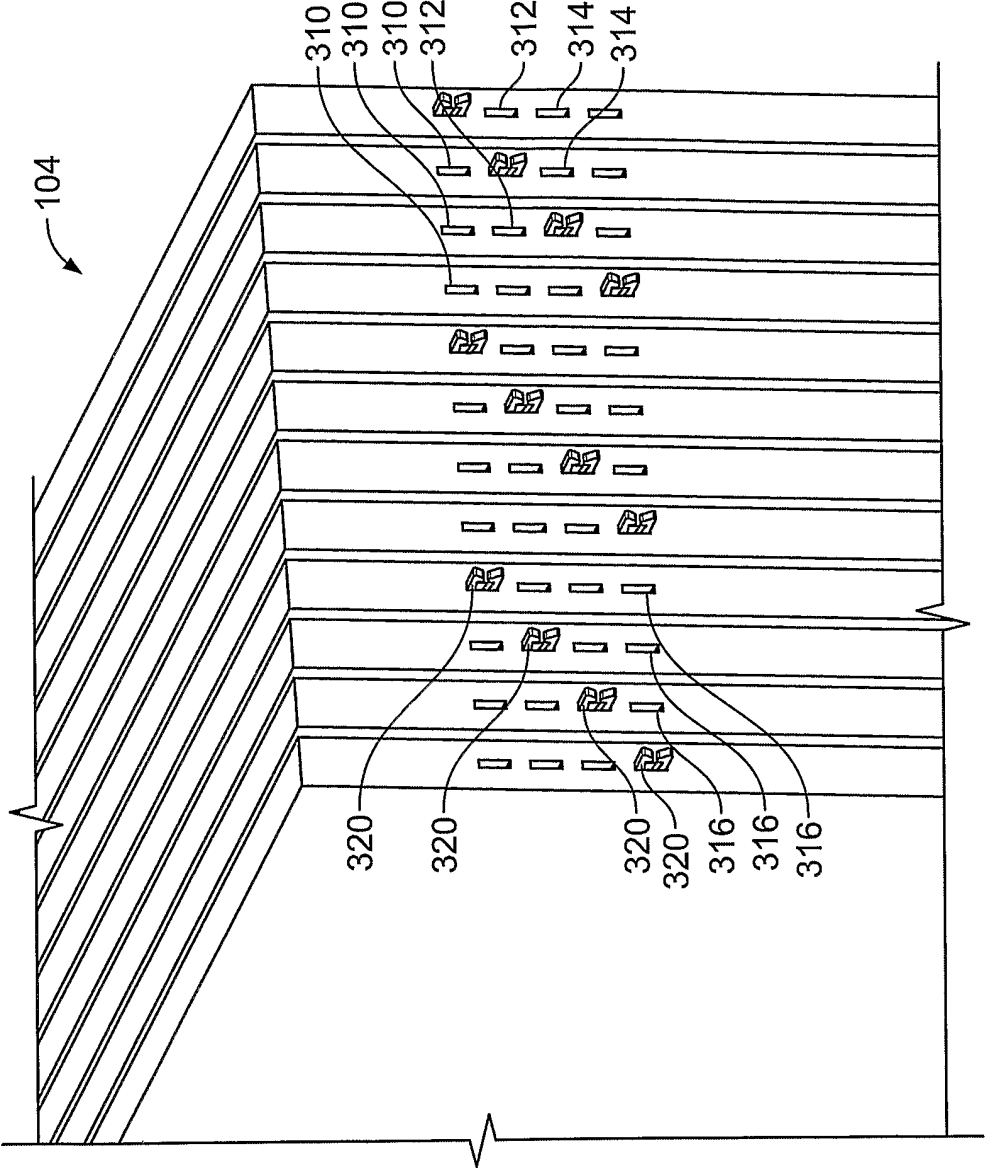


FIG. 9

8/9

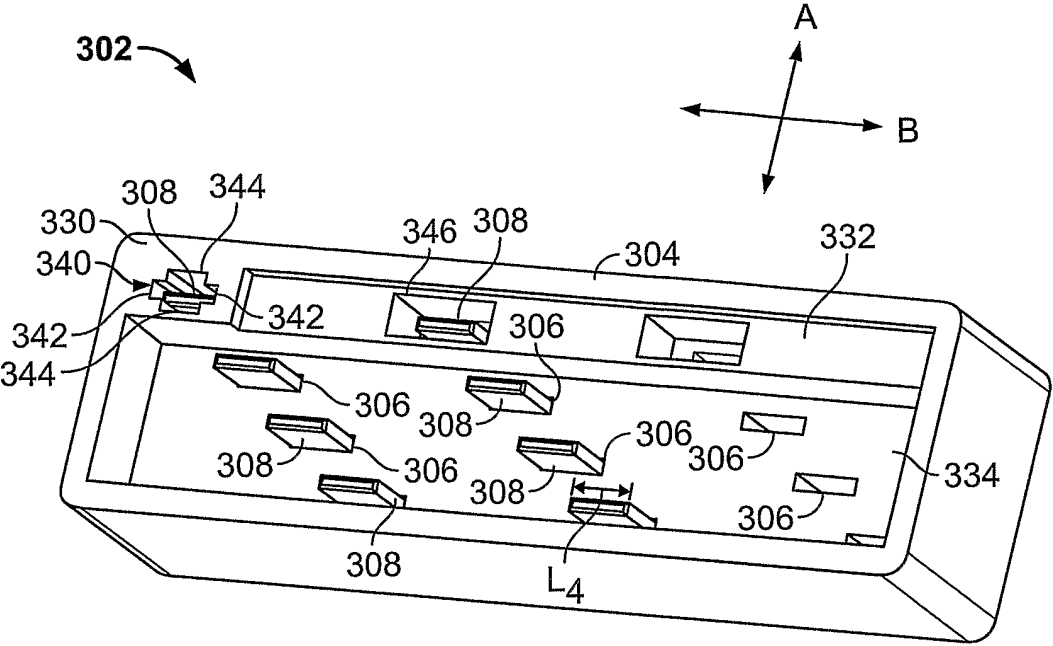


FIG. 10

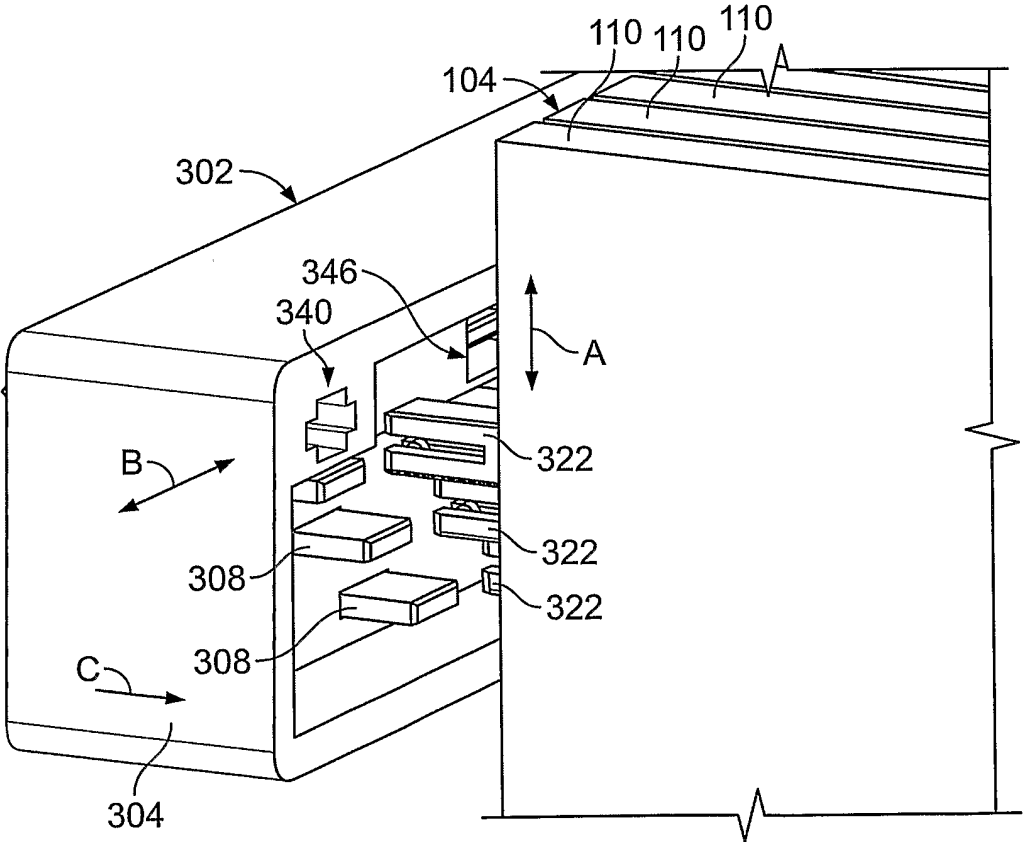


FIG. 11

9/9

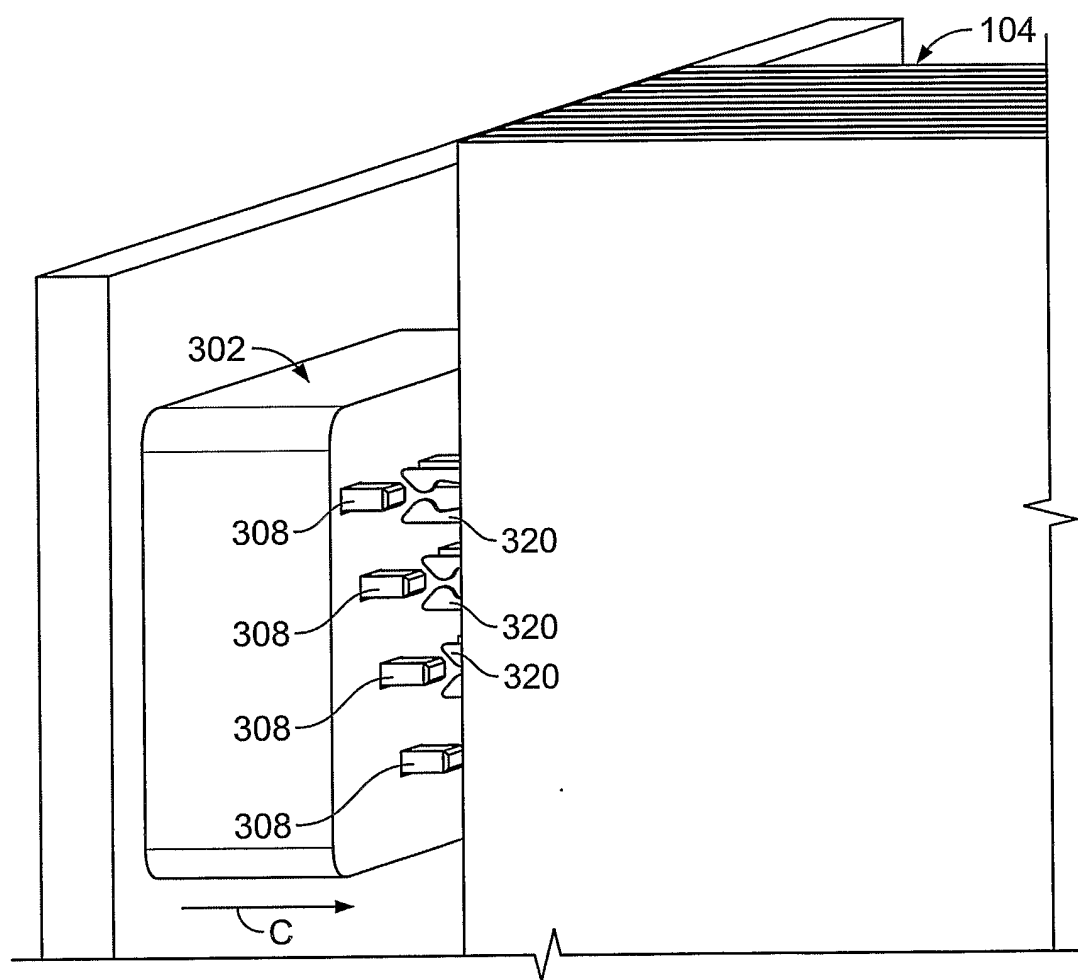


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2005/041088

A. CLASSIFICATION OF SUBJECT MATTER
H01R12/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 109 258 A (SMK CORPORATION) 20 June 2001 (2001-06-20)	1-4
Y		5,6
A	figures 11,12	7
Y	EP 1 001 666 A (BALLARD POWER SYSTEMS INC) 17 May 2000 (2000-05-17) figure 4	5,6
X	US 2003/215678 A1 (BARTON RUSSELL HOWARD ET AL) 20 November 2003 (2003-11-20) paragraph [0009]; figure 3	8,9
A	US 6 464 521 B1 (KUROTORI FUMIO ET AL) 15 October 2002 (2002-10-15) paragraph [0037]; figure 5	1,2



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

27 March 2006

Date of mailing of the international search report

04/04/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Corrales, D

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2005/041088

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1109258	A	20-06-2001	JP 2001177206 A	29-06-2001
EP 1001666	A	17-05-2000	NONE	
US 2003215678	A1	20-11-2003	WO 03026072 A2	27-03-2003
			CA 2460490 A1	27-03-2003
			EP 1428296 A2	16-06-2004
			JP 2005502996 T	27-01-2005
			US 2003054220 A1	20-03-2003
US 6464521	B1	15-10-2002	JP 2001210406 A	03-08-2001