

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 272 807 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **21.07.93** (51) Int. Cl.⁵: **G03B 21/132**

(21) Application number: **87310370.9**

(22) Date of filing: **25.11.87**

(84) **Reduced height transmissive overhead projector.**

(30) Priority: **19.12.86 US 944425**

(43) Date of publication of application:
29.06.88 Bulletin 88/26

(45) Publication of the grant of the patent:
21.07.93 Bulletin 93/29

(84) Designated Contracting States:
CH DE FR GB IT LI NL SE

(59) References cited:
US-A- 3 702 395
US-A- 4 080 052
US-A- 4 118 114
US-A- 4 436 392
US-A- 4 561 740

(73) Proprietor: **MINNESOTA MINING AND MANUFACTURING COMPANY**
3M Center, P.O. Box 33427
St. Paul, Minnesota 55133-3427(US)

(72) Inventor: **Vanderwerf, Dennis F. c/o Minnesota Mining and Manufacturing Company 2501 Hudson Road**
St. Paul Minnesota 55144-1000(US)

(74) Representative: **Baillie, Iain Cameron et al**
c/o Ladas & Parry, Althelmer Eck 2
W-8000 München 2 (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description**Technical Field**

5 The present invention relates to transmissive overhead projectors.

Background Art

10 Transmissive overhead projectors consist of a light source which directs light to, and distributes light over, a Fresnel lens assembly located just beneath a projection stage. The Fresnel lens system directs the light through a transparency located on the projection stage to a projection lens disposed above the projection stage. Light exiting the lens is then reflected by means of a mirror to a vertical screen or wall upon which a magnified image of the transparency may be viewed. It has long been a goal of overhead projector manufacturers to reduce the size of the projector, and particularly the height of the base, to
 15 increase portability.

Conventional overhead projectors which have a direct optical path, that is, an optical path not folded by mirrors, from the light source to the Fresnel lens system must have the light source positioned a significant distance from the Fresnel lens system because of the inability of the Fresnel lens system to transmit or efficiently focus light emitted from the light source at wide radiation angles. Thus the base height of such
 20 projectors must be relatively large.

Folded transmissive overhead projector systems attempt to reduce the base height of the projector as compared to direct optical path projectors by folding the light path by means of a mirror located within the projector base between the light source and the Fresnel lens system. Such projectors achieve a reduction in base height, but at a cost of an increase in the length of the base of the projector.

25 Several attempts have been made in the past to reduce the base height of transmissive overhead projectors for portability. In U.S. Patent No. 3,653,754, the projection head and supporting post collapse and fold within the base for reduced height during transportation, but there is no significant reduction in the base height of the projector when in use. U.S. Patent No. 3,770,344 described an overhead projector which utilizes multiple coplanar Fresnel lenses and multiple light sources or multiple mirrors. U.S. Patent No. 30 3,915,568 describes an overhead projector with the light source positioned closer to the projection stage by the use of a truncated conical reflector and circular-cylindric condensing lenses. U.S. Patent No. 4,080,052 attempts to decrease the base height of an overhead projector by using a planar or curved reflector which focuses light on a bifocal Fresnel condensing lens. The above-described overhead projectors achieve some decrease in the overall base height of the overhead projector but greatly increase the complexity of the machines and the illumination systems contained therein.
 35

Another prior art document US-A-4,436,392, discloses an overhead projector using a two-element Fresnel lens, where a third element in the form of a prismatic sheet is used as part of a distortion correcting arrangement.

40 Disclosure of Invention

According to the present invention there is provided an overhead projector comprising:

a light source arranged for emitting light in a cone;

a projection lens; and

45 a Fresnel lens assembly of three coaxial annular elements centered over said light source and capable of focusing light emitted from said light source to a focus at said projection lens characterised in that:

said Fresnel lens assembly has an f-number of less than 0.50 wherein f-number is defined as the reciprocal of the maximum diameter of said Fresnel lens assembly gathering light emitted by said light source divided by the sum of the reciprocal of the distance from the midpoint of said Fresnel lens assembly to said light source and the reciprocal of the distance from said midpoint of said Fresnel lens assembly to
 50 said focus at said projection lens;

said Fresnel lens elements are disposed such that the grooved surface of the Fresnel lens element nearest the light source faces away from said light source, the grooved surface of said Fresnel lens element nearest the projection lens faces away from said projection lens, and wherein the grooved surface of the intermediate Fresnel lens element faces away from said light source, wherein the angles of said grooved
 55 surfaces are described by the equation:

$$\text{Tangent } (\alpha) = \frac{2YC}{1 + \sqrt{1 - (K+1)C^2 Y^2}} +$$

$$\frac{(K+1)C^3 Y^3}{\sqrt{1 - (K+1)C^2 Y^2} (1 + \sqrt{1 - (K+1)C^2 Y^2})^2} + \quad (1)$$

$$4dY^3 + 6eY^5 + 8fY^7 + 10gY^9$$

15 where:

Y = distance of groove center to lens center

C = vertex curvature

K = conic constant

d, e, f, g = aspheric deformation coefficients

20 and wherein the grooved surface of the Fresnel lens element (36) nearest the light source (22) has the following parameters:

C = 0.014402 mm⁻¹

K = -1.09315

d = -2.8876x10⁻⁸

25 e = -8.8564x10⁻¹³

f = 1.7153x10⁻¹⁷

g = 1.934x10⁻²³

wherein the grooved surface of the Fresnel lens element (40) nearest the projection lens (16) has the following parameters:

30 C = 0.005353 mm⁻¹

K = -1.05619

d = 1.4593x10⁻⁹

e = 9.1537x10⁻¹⁶

f = -1.9632x10⁻²⁰

35 g = 9.3543x10⁻²⁶

and wherein said grooved surface of said intermediate Fresnel lens (38) has the following parameters:

C = 0.005869 mm⁻¹

K = -0.96968

d = 2.4298 x 10⁻⁹

40 e = -1.1048 x 10⁻¹⁴

f = 3.2017 x 10⁻²⁰

g = -9.1357 x 10⁻²⁶

The present invention provides a transmissive overhead projector which has a significantly reduced base height as compared to prior projectors without greatly increasing the complexity of the projector. The reduced base height is achieved by providing a completely dioptric Fresnel lens system which is specifically designed to have an f-number of about 0.25 for efficient refraction of marginal light rays which enter the Fresnel lens system at angles of incidence up to at least 60°. This novel Fresnel lens system allows the light source to be placed relative to the Fresnel lens system at about one-half the distance obtainable in prior art projectors.

50 The light source preferably includes a truncated spherical reflector which increases light intensity at oblique radiation angles to improve illumination uniformity over the Fresnel lens system.

Brief Description of the Drawings

55 The present invention will be more thoroughly described with reference to the accompanying drawings, wherein like numbers refer to like parts in the several views, and wherein:

FIGURE 1 is a perspective view of a transmissive overhead projector including the novel Fresnel lens system of the present invention;

FIGURE 2 is a schematic, cross-sectional view of the overhead projector of FIGURE 1;
 FIGURE 3 is a cross-sectional view of a portion of the Fresnel lens system of the present invention;
 FIGURE 4 is a perspective view of an annular reflector utilized in conjunction with a light source forming a portion of the present invention; and
 5 FIGURE 5 is a perspective view of an alternate annular reflector used in conjunction with the light source forming a portion of the present invention.

Detailed Description

10 FIGURE 1 illustrates an overhead projector according to the present invention, generally indicated as 10, which includes a base 12, a support arm 14, a projection lens 16 and a planar mirror 18. The base 12 includes a clear glass stage 20 upon which may be positioned a transparency (not shown) of which a magnified image is to be projected. Light is directed from within the base 12, through the stage 20, focused at the projection lens 16 and reflected by the mirror 18 to a vertical projection screen or wall (not shown)
 15 upon which a magnified image of the transparency upon the stage 20 may be viewed.

FIGURE 2 is a schematic representation of the overhead projector 10 and illustrates an incandescent filament 22, preferably a tungsten filament of the commonly known "coiled-coil" type which radiates light over a wide distribution angle. Light emitted by the light source 22 is further controlled to cover the area of the stage 20 by a condensing lens 24 disposed between the filament 22 and the stage 20. The condensing
 20 lens 24 is preferably glass to resist heat generated by the filament 22. Between the glass stage 20 and the condensing lens 24 is a three-element annular Fresnel lens assembly 26 which refractively focuses light emitted from the filament 22 to the projection lens 16.

To achieve a reduced height of the base 12 over prior projectors, the light source 22 is located much closer to the Fresnel lens assembly 26 than was previously thought possible. This results in increased
 25 illumination at the center of the Fresnel lens assembly 26, compared to the outer margins of the Fresnel lens assembly 26, due to the well-known "Cosine-fourth law". One method of increasing the light intensity at the margins of the Fresnel lens assembly 26 is by the use of an annular reflector 28, which may be a truncated sphere 30 as illustrated in FIGURE 4 or an annular Fresnel reflector 32 as illustrated in FIGURE 5. The center area of the annular reflector 28 is eliminated to prevent a contribution of reflected light to the
 30 central region of the Fresnel lens assembly 26.

The filament 22, the center of the annular reflector 28, the center of the condensing lens 24, the center of the Fresnel lens assembly 26, the center of the glass stage 20 and the center of the projection lens 16 all are located along a common optical axis 34. It is with respect to this optical axis 34 that the radiation angle of light emitted by the light source 22 is measured, and it will be noted from FIGURE 2 that this radiation
 35 angle of light incident on the Fresnel lens assembly 26 varies from approximately 0° (along the optical axis 34) to in excess of 60°.

The key component of the overhead projector 10 which permits the use of large radiation angles, and thus permits the filament 22 to be located very close to the stage 20 with a resulting drastic reduction in the height of the base 12, is the Fresnel lens assembly 26.

40 Conventional transmissive two-element Fresnel lens assemblies for overhead projectors will not efficiently transmit light through the outer lens region for the reduced light source distance of the present invention. The speed of conventional two-lens assemblies cannot be made fast enough to efficiently transmit the large radiation angles of the outer, or marginal, rays. The outer portions of the projected image, therefore, appear too dark for comfortable viewing of the projected image. However, by designing a three-
 45 element Fresnel lens assembly, the speed can be considerably increased by controlling both the main refracting facets of all three Fresnel elements and also the riser step angles of the element closest to the filament 22. In this way, marginal rays can be efficiently transmitted and the screen will be fully illuminated.

The "speed" of a lens system is related to its f-number in that a lens system of a lesser f-number is considered to have a greater speed, i.e. be a "faster" lens system. The f-number of a lens system may be
 50 defined by the equation:

$$f\text{-number} = \frac{1}{A} \left(\frac{1}{D_1} + \frac{1}{D_2} \right)^{-1}$$

where:

A = lens system aperture

D₁ = distance from the light source to midpoint of the lens system

D₂ = distance from midpoint of the lens system to the focal point of the lens system.

5 In the present invention the aperture "A" is the maximum diameter of Fresnel lens assembly 26 gathering light from the filament 22, "D₁" is the distance from the filament 22 to the Fresnel lens assembly 26 and "D₂" is the distance from the Fresnel lens assembly 26 to its focal point at the projection lens 16.

10 Since the object of the present invention is to reduce the D₁ dimension and, therefore, the base height of the projector, the f-number must be reduced. The Fresnel lens assembly 26 has been designed to have an f-number of preferably about 0.25, compared to an f-number of approximately 0.50 for conventional two Fresnel lens overhead projectors. Thus the distance from the filament 22 to the Fresnel lens assembly will be one-half that of conventional projectors, with a corresponding reduction in projector base height. The Fresnel lens assembly 26 of the present invention remains fully refractive (dioptric) in its focusing properties, and does not suffer from the sharp boundary change in transmission of a catadioptric Fresnel element. The described refractive capability could be achieved by a Fresnel lens assembly 26 having more than the preferred three elements. However, each additional lens element decreases the amount of light transmitted through the lens assembly 26. It is, therefore, desirable to use the least number of lens elements which will produce the required refraction characteristics. This number has been found to be three.

20 FIGURE 3 illustrates in detail a portion of the Fresnel lens assembly 26 which includes a lower annular Fresnel lens 36, an intermediate annular Fresnel lens 38 and an upper annular Fresnel lens 40. "Upper" and "lower" refers to proximity of the Fresnel lens to the projection lens 16 and the filament 22, respectively. FIGURE 3 also illustrates a marginal light ray 42 from the filament 22 which impinges upon the lower Fresnel lens 36 at an angle of incidence of θ , which angle θ is equal to the radiation angle of the light ray 42 from the optical axis 34. As stated above, the angle of light rays 42 at the margins of the Fresnel lens assembly 26 is preferably approximately 60°, although this angle may be larger if a further reduction in base height is desired. FIGURE 3 further illustrates an angle θ' which is the angle of refraction on the lower Fresnel element 36, an angle α which is the groove angle of each Fresnel element 36, 38 and 40, and an angle β which is the riser step angle of the Fresnel elements 36, 38 and 40.

30 The groove angles α of each Fresnel element 36, 38 and 40 are described by the following equation, derived from the sag equation of a general aspheric surface:

$$\begin{aligned}
 \text{Tangent } (\alpha) = & \frac{2YC}{1 + \sqrt{1 - (K+1)C^2 Y^2}} + \\
 & \frac{(K+1)C^3 Y^3}{\sqrt{1 - (K+1)C^2 Y^2} [1 + \sqrt{1 - (K+1)C^2 Y^2}]^2} + \quad (1) \\
 & 4dY^3 + 6eY^5 + 8fY^7 + 10gY^9
 \end{aligned}$$

where:

Y = distance of groove center to lens center

50 C = vertex curvature

K = conic constant

d, e, f, g = aspheric deformation coefficients

The groove frequency of the three Fresnel elements 36, 38 and 40 have a value of about two to eight grooves per millimeter and are preferably manufactured of acrylic optical plastic.

55 In addition to controlling the groove angles α , the riser steps angles, β , of the lower Fresnel element 36 are controlled such that the risers remain parallel to the internally refracted ray 42, to minimize riser step blockage. These riser angles β are defined by the following series of equations:

$$\theta = \text{ARCTANGENT } (Y/D) \quad (2)$$

$$\theta' = \text{ARCSINE} (\text{SINE}(\theta)/R) \quad (3)$$

$$\beta = \pi/2 - \theta' \quad (4)$$

where:

θ = angle from vertical of incidence on lower Fresnel element

5 θ' = angle from vertical of refraction on lower Fresnel element

β = riser step angle

Y = distance of groove from lens center

D = distance of light source to lower Fresnel element

R = refractive index of Fresnel lens material.

10 The projection lens 16 is preferably of the variable focus type, in which image magnification changes are achieved by changing the focal length of the lens. The advantage to using this type of projection lens is that there is negligible movement of the projection lens over the focus range. Thus, the usual requirement of filament 22 movement to compensate for the movement of a fixed focus projection lens over its magnification range is eliminated. The light source then can remain fixed in its closest position to the
15 Fresnel lens assembly 26, keeping the height of the base 12 to a minimum.

EXAMPLE

In a specific example of an overhead projector 10 utilizing the principles of the present invention, the
20 distance of the filament 22 from the three-element Fresnel lens assembly 26 is 97 mm. The glass condenser lens 24 has a focal length of 275 mm. The reflector 28 is spherical with a radius of curvature of 23.9 mm and has an upper diameter of 44 mm and a lower diameter of 32 mm. The center of the spherical reflector 28 is located 23.9 mm below the filament 22. The Fresnel lens assembly 26 has a combined focal length of 79.82 mm and operates at an f-number of f/0.23. The lower Fresnel element 36 has the following
25 design parameters describing the main refracting facets:

$$C = 0.014402 \text{ mm}^{-1}$$

$$K = -1.09315$$

$$d = -2.8876 \times 10^{-8}$$

$$e = -8.8564 \times 10^{-13}$$

$$30 \quad f = 1.7153 \times 10^{-17}$$

$$g = -1.934 \times 10^{-23}$$

The riser step angles β for the lower Fresnel element 36 are controlled to vary from 89.9° near the center of the element 36 to 53.9° near the lens corner.

Element 38 has the following design parameters describing the main refracting facets:

$$35 \quad C = 0.005869 \text{ mm}^{-1}$$

$$K = -0.96968$$

$$d = 2.4298 \times 10^{-9}$$

$$e = -1.1048 \times 10^{-14}$$

$$f = 3.2017 \times 10^{-20}$$

$$40 \quad g = -9.1357 \times 10^{-26}$$

Element 40 has the following design parameters describing the main refracting facets:

$$C = 0.005353 \text{ mm}^{-1}$$

$$K = -1.05619$$

$$d = 1.4593 \times 10^{-9}$$

$$45 \quad e = 9.1537 \times 10^{-16}$$

$$f = -1.9632 \times 10^{-20}$$

$$g = 9.3543 \times 10^{-26}$$

The grooved surfaces of the lower Fresnel element 36 and the intermediate Fresnel element 38 both face upwardly, i.e. toward the projection lens 16 and away from the filament 22, while the upper Fresnel
50 lens element 40 has a grooved surface which faces downwardly, i.e. toward the filament 22 and away from the projection lens 16. The entire Fresnel lens assembly 26 is preferably sealed at its edges to protect the grooved surfaces. All Fresnel elements 36, 38 and 40 are manufactured in two millimeter thick optical acrylic plastic, having a refractive index of 1.491 for yellow light.

The variable focal length projection lens has a focal length range of 280 mm to 315 mm and an f-
55 number of f/6.5. The projection lens 16 can project images over the magnification range of 3.1x to 9.8x at a nominal height above the stage 20 of 378 mm.

Claims

1. An overhead projector (10) comprising:

a light source (22) arranged for emitting light in a cone;

a projection lens (16); and

a Fresnel lens assembly (26) of three coaxial annular elements (36, 38, 40) centered over said light source (22) and capable of focusing light emitted from said light source (22) to a focus at said projection lens (16) characterised in that:

said Fresnel lens assembly has an f-number of less than 0.50 wherein f-number is defined as the reciprocal of the maximum diameter of said Fresnel lens assembly (26) gathering light emitted by said light source (22) divided by the sum of the reciprocal of the distance from the midpoint of said Fresnel lens assembly (26) to said light source (22) and the reciprocal of the distance from said midpoint of said Fresnel lens assembly (26) to said focus at said projection lens (16);

said Fresnel lens elements (36, 38, 40) are disposed such that the grooved surface of the Fresnel lens element (36) nearest the light source (22) faces away from said light source (22), the grooved surface of said Fresnel lens element (40) nearest the projection lens (16) faces away from said projection lens (16), and wherein the grooved surface of the intermediate Fresnel lens element (38) faces away from said light source (22), wherein the angles of said grooved surfaces are described by the equation:

$$\begin{aligned} \text{Tangent } (\alpha) = & \frac{2YC}{1 + \sqrt{1 - (K+1)C^2 Y^2}} + \\ & \frac{(K+1)C^3 Y^3}{\sqrt{1 - (K+1)C^2 Y^2} [1 + \sqrt{1 - (K+1)C^2 Y^2}]^2} + \quad (1) \\ & 4dY^3 + 6eY^5 + 8fY^7 + 10gY^9 \end{aligned}$$

where:

Y = distance of groove center to lens center

C = vertex curvature

K = conic constant

d, e, f, g = aspheric deformation coefficients

and wherein the grooved surface of the Fresnel lens element (36) nearest the light source (22) has the following parameters:

C = 0.014402 mm⁻¹

K = -1.09315

d = -2.8876x10⁻⁸

e = -8.8564x10⁻¹³

f = 1.7153x10⁻¹⁷

g = 1.934x10⁻²³

wherein the grooved surface of the Fresnel lens element (40) nearest the projection lens (16) has the following parameters:

C = 0.005353 mm⁻¹

K = -1.05619

d = 1.4593x10⁻⁹

e = 9.1537x10⁻¹⁶

f = -1.9632x10⁻²⁰

g = 9.3543x10⁻²⁶

and wherein said grooved surface of said intermediate Fresnel lens (38) has the following parameters:

C = 0.005869 mm⁻¹

$$\begin{aligned}
 K &= -0.96968 \\
 d &= 2.4298 \times 10^{-9} \\
 e &= -1.1048 \times 10^{-14} \\
 f &= 3.2017 \times 10^{-20} \\
 g &= -9.1357 \times 10^{-26}
 \end{aligned}$$

2. An overhead projector (10) according to claim 1 wherein said light source (22) includes an incandescent filament and an annular reflector (28) disposed opposite said Fresnel lens assembly (26) with respect to said filament for selectively reflecting light emitted by said filament to said margins of said Fresnel lens element nearest said light source (22).
3. An overhead projector (10) according to claim 2 wherein said annular reflector (28) is a truncated spherical reflector (30).
4. An overhead projector (10) according to any preceding claim wherein the riser step angles of said grooved surface of said Fresnel lens element (36) nearest said light source (22) varies from about 89.9° near the center of said Fresnel lens element (36) nearest said light source (22) to about 53.9° at the margin of said Fresnel lens element (36) nearest said light source (22).

Patentansprüche

1. Ein Overheadprojektor (10), der folgendes umfaßt:
 eine Lichtquelle (22), die so eingerichtet ist, daß sie kegelförmig Licht emittiert;
 ein Projektiv (16); und
 eine Fresnel-Linseneinrichtung (26) mit drei coaxialen, ringförmigen Elementen (36, 38, 40), die zentrisch über der genannten Lichtquelle (22) angeordnet sind und die fähig ist, von der genannten Lichtquelle (22) emittiertes Licht zu einem Fokus an dem genannten Projektiv (16) zu fokussieren, dadurch gekennzeichnet, daß:
 die genannte Fresnel-Linseneinrichtung eine Lichtstärke von weniger als 0,5 aufweist, wobei die Lichtstärke als der Kehrwert des maximalen Durchmessers der genannten Fresnel-Linseneinrichtung (26), die von der genannten Lichtquelle (22) emittiertes Licht sammelt, definiert ist, geteilt durch die Summe des Kehrwerts der Strecke von dem Mittelpunkt der genannten Fresnel-Linseneinrichtung (26) zu der genannten Lichtquelle (22) und dem Kehrwert der Strecke von dem genannten Mittelpunkt der genannten Fresnel-Linseneinrichtung (26) zu dem genannten Fokus an dem genannten Projektiv (16);
 die genannten Fresnel-Linsenelemente (36, 38, 40) so angeordnet sind, daß die gerillte Oberfläche des der Lichtquelle (22) am nächsten liegenden Fresnel-Linsenelements (36) von der genannten Lichtquelle (22) weg zeigt, so daß die gerillte Oberfläche des dem Projektiv (16) am nächsten liegenden Fresnel-Linsenelements (40) von dem genannten Projektiv (16) weg zeigt und so daß die gerillte Oberfläche des zwischenliegenden Fresnel-Linsenelements (38) von der genannten Lichtquelle (22) weg zeigt, wobei die Winkel der genannten gerillten Oberflächen durch folgende Gleichung beschrieben werden:

$$\begin{aligned}
 \text{Tangens}(\alpha) = & \frac{2YC}{1 + \sqrt{1 - (K+1)C^2Y^2}} + \\
 & \frac{(K+1)C^3Y^3}{\sqrt{1 - (K+1)C^2Y^2} \left[1 + \sqrt{1 - (K+1)C^2Y^2} \right]^2} + \quad (1)
 \end{aligned}$$

$$4dy^3 + 6ey^5 + 8fy^7 + 10gy^9$$

wobei folgendes gilt:

Y = die Strecke von der Rillenmitte zur Linsenmitte

C = Scheitelkrümmung
 K = Kegelschnittkonstante
 d, e, f, g = torische Verformungskoeffizienten

und wobei die gerillte Oberfläche des Fresnel-Linsenelements (36), das der Lichtquelle (22) am nächsten liegt, die folgenden Parameter aufweist:

C = 0,014402 mm⁻¹
 K = -1,09315
 d = -2,8876 x 10⁻⁸
 e = -8,8564 x 10⁻¹³
 f = 1,7153 x 10⁻¹⁷
 g = 1,934 x 10⁻²³

wobei die gerillte Oberfläche des Fresnel-Linsenelements (40), das dem Projektiv (16) am nächsten liegt, die folgenden Parameter aufweist:

C = 0,005353 mm⁻¹
 K = -1,05619
 d = 1,4593 x 10⁻⁹
 e = 9,1537 x 10⁻¹⁶
 f = -1,9632 x 10⁻²⁰
 g = 9,3543 x 10⁻²⁶

und wobei die gerillte Oberfläche der genannten zwischenliegenden Fresnellinse (38) die folgenden Parameter aufweist:

C = 0,005869 mm⁻¹
 K = -0,96968
 d = 2,4298 x 10⁻⁹
 e = -1,1048 x 10⁻¹⁴
 f = 3,2017 x 10⁻²⁰
 g = -9,1357 x 10⁻²⁶

2. Overheadprojektor (10) nach Anspruch 1, dadurch gekennzeichnet, daß die genannte Lichtquelle (22) einen Glühfaden aufweist und einen ringförmigen Reflektor (28), der sich entgegengesetzt der Fresnel-Linseneinrichtung (26) befindet in bezug auf den genannten Faden, um so selektiv von dem Faden emittiertes Licht zu den genannten Rändern des der genannten Lichtquelle (22) am nächsten liegenden Fresnel-Linsenelements zu reflektieren.

3. Overheadprojektor (10) nach Anspruch 2, dadurch gekennzeichnet, daß es sich bei dem genannten ringförmigen Reflektor (28) um einen kegeltumpffartigen sphärischen Reflektor (30) handelt.

4. Overheadprojektor (10) gemäß den vorstehenden Ansprüchen, dadurch gekennzeichnet, daß die ansteigenden Stufenwinkel der genannten gerillten Oberfläche des genannten Fresnel-Linsenelements (36), das der Lichtquelle (22) am nächsten liegt, zwischen 89,9° nahe der Mitte des genannten, der genannten Lichtquelle (22) am nächsten liegenden Fresnel-Linsenelements (36) und etwa 53,9° an dem Rand des genannten Fresnel-Linsenelements (36), das der genannten Lichtquelle (22) am nächsten liegt, variieren.

Revendications

1. Rétroprojecteur (10) comprenant :

une source de lumière (22) agencée de manière à émettre une lumière suivant un cône ;

une lentille de projection (16) ; et

un système de lentilles de Fresnel (26) constitué de trois éléments annulaires coaxiaux (36,38,40), centré au-dessus de ladite source de lumière (22) et capable de focaliser la lumière émise par ladite source de lumière (22) à un foyer situé à l'endroit de ladite lentille de projection (16) ;

caractérisé en ce que :

ledit système de lentilles de Fresnel a un nombre f inférieur à 0,50, le nombre f étant défini comme l'inverse du diamètre maximal dudit système de lentilles de Fresnel (26) collectant la lumière émise par ladite source de lumière (22) divisé par la somme de l'inverse de la distance entre le point central du système de lentilles de Fresnel (26) et ladite source de lumière (22) et de l'inverse de la distance entre ledit point central du dit système de lentilles de Fresnel (26) et ledit foyer situé à ladite lentille de

projection (16) ;

lesdits éléments de lentille de Fresnel (36,38,40) sont disposés de sorte que la surface à sillons de l'élément de lentille de Fresnel (36) le plus proche de la source de lumière (22) est tournée à l'opposé de ladite source de lumière (22), la surface à sillons du dit élément de lentille de Fresnel (40) le plus proche de la lentille de projection (16) est tournée à l'opposé de ladite lentille de projection (16), et la surface à sillons de l'élément de lentille de Fresnel intermédiaire (38) est tournée à l'opposé de ladite source de lumière (22) ;

les angles desdites surfaces à sillons sont décrits par l'équation :

$$\text{Tangente}(\alpha) = \frac{2YC}{1 + \sqrt{1 - (K+1)C^2 Y^2}} + \frac{(K+1)C^3 Y^3}{\sqrt{1 - (K+1)C^2 Y^2} [1 + \sqrt{1 - (K+1)C^2 Y^2}]^2} + \dots \quad (1)$$

$$4dY^3 + 6eY^5 + 8fY^7 + 10gY^9$$

dans laquelle :

Y = distance du centre du sillon au centre de la lentille

C = courbure du sommet

K = constante conique

d, e, f, g = coefficients de déformation asphérique

la surface à sillons de l'élément de lentille de Fresnel (36) le plus proche de la source de lumière (22) a les paramètres suivants :

C = 0,014402 mm⁻¹

K = -1,09315

d = -2,8876 x 10⁻⁸

e = -8,8564 x 10⁻¹³

f = 1,7153 x 10⁻¹⁷

g = 1,934 x 10⁻²³

la surface à sillons de l'élément de lentille de Fresnel (40) le plus proche de la lentille de projection (16) a les paramètres suivants :

C = 0,005353 mm⁻¹

K = -1,05619

d = 1,4593 x 10⁻⁹

e = 9,1537 x 10⁻¹⁶

f = -1,9632 x 10⁻²⁰

g = 9,3543 x 10⁻²⁶

et ladite surface à sillons de ladite lentille de Fresnel intermédiaire (38) a les paramètres suivants :

C = 0,005869 mm⁻¹

K = -0,96968

d = 2,4298 x 10⁻⁹

e = -1,1048 x 10⁻¹⁴

f = 3,2017 x 10⁻²⁰

g = -9,1357 x 10⁻²⁶

2. Rétroprojecteur (10) suivant la revendication 1, dans lequel ladite source de lumière (22) comprend un filament incandescent et un réflecteur annulaire (28) disposé à l'opposé dudit système de lentilles de Fresnel (26) par rapport audit filament, pour réfléchir sélectivement la lumière émise par ledit filament vers lesdits bords de l'élément de lentille de Fresnel le plus proche de ladite source de lumière (22).

3. Rétroprojecteur (10) suivant la revendication 2, dans lequel ledit réflecteur annulaire (28) est un réflecteur sphérique tronqué (30).

5 4. Rétroprojecteur (10) suivant l'une quelconque des revendications précédentes, dans lequel ledit angle de front montant de ladite surface à sillons dudit élément de lentille de Fresnel (36) le plus proche de ladite source de lumière (22) varie de 89,9° environ près du centre dudit élément de lentille de Fresnel (36) le plus proche de ladite source de lumière (22) à 53,9° environ au bord dudit élément de lentille de Fresnel (36) le plus proche de ladite source de lumière (22).

10

15

20

25

30

35

40

45

50

55

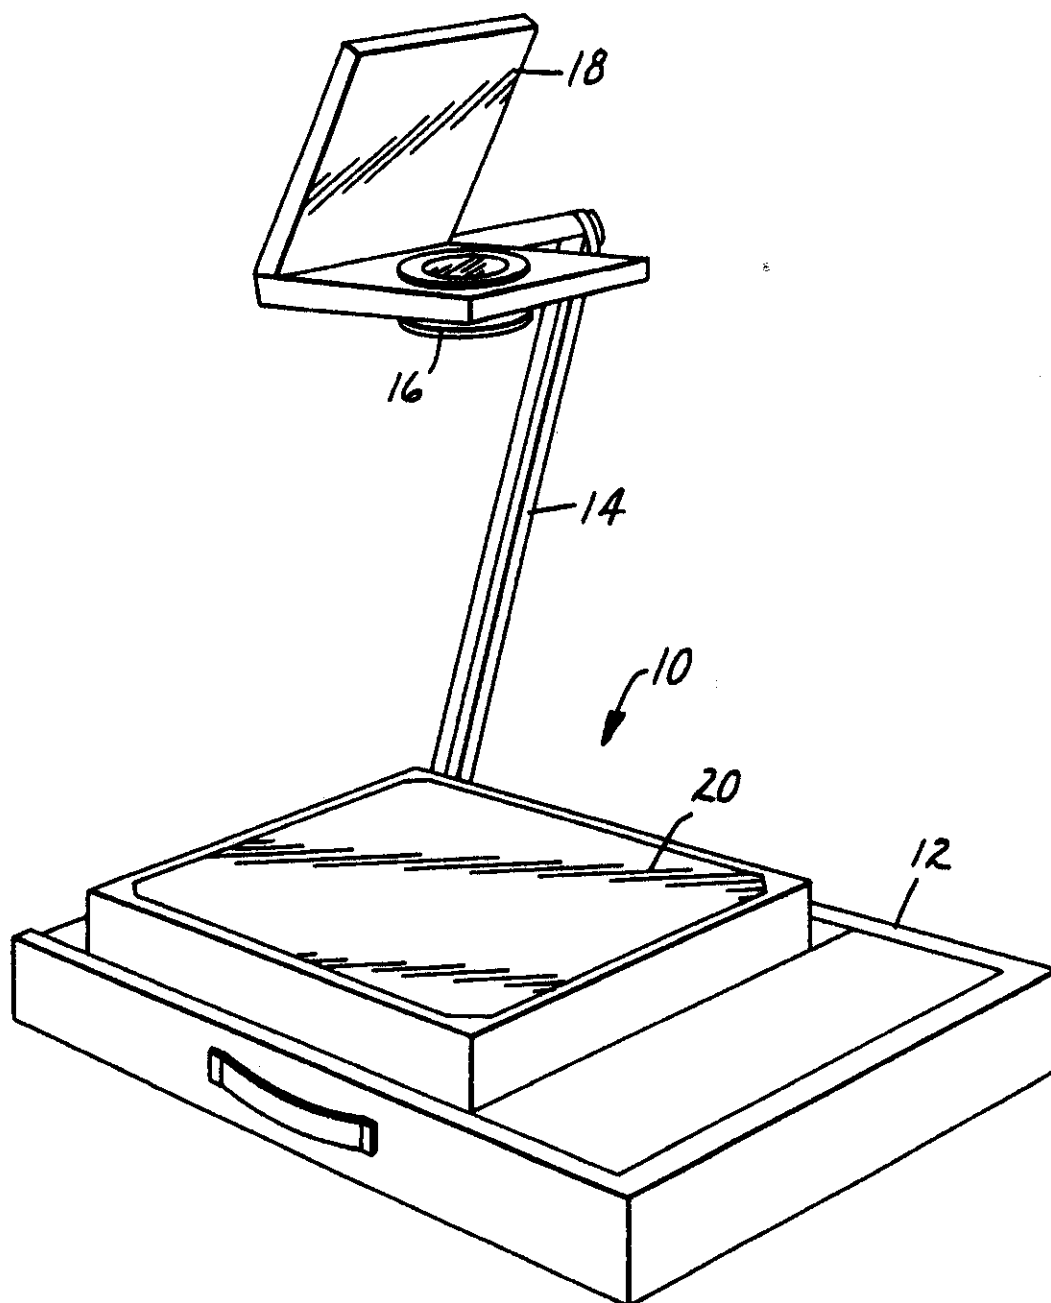


FIG. 1

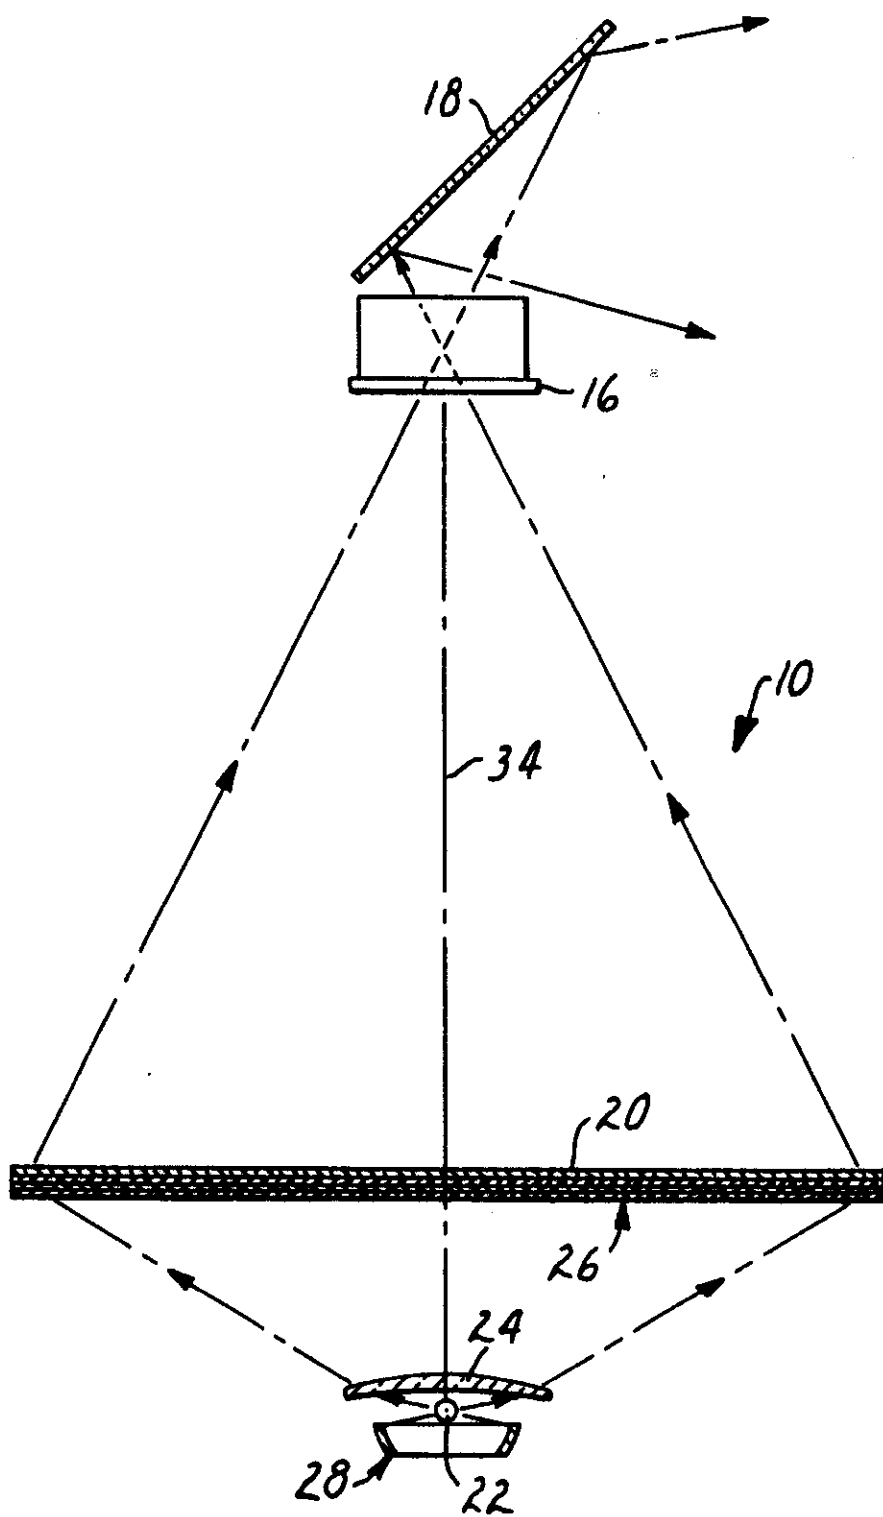


FIG. 2

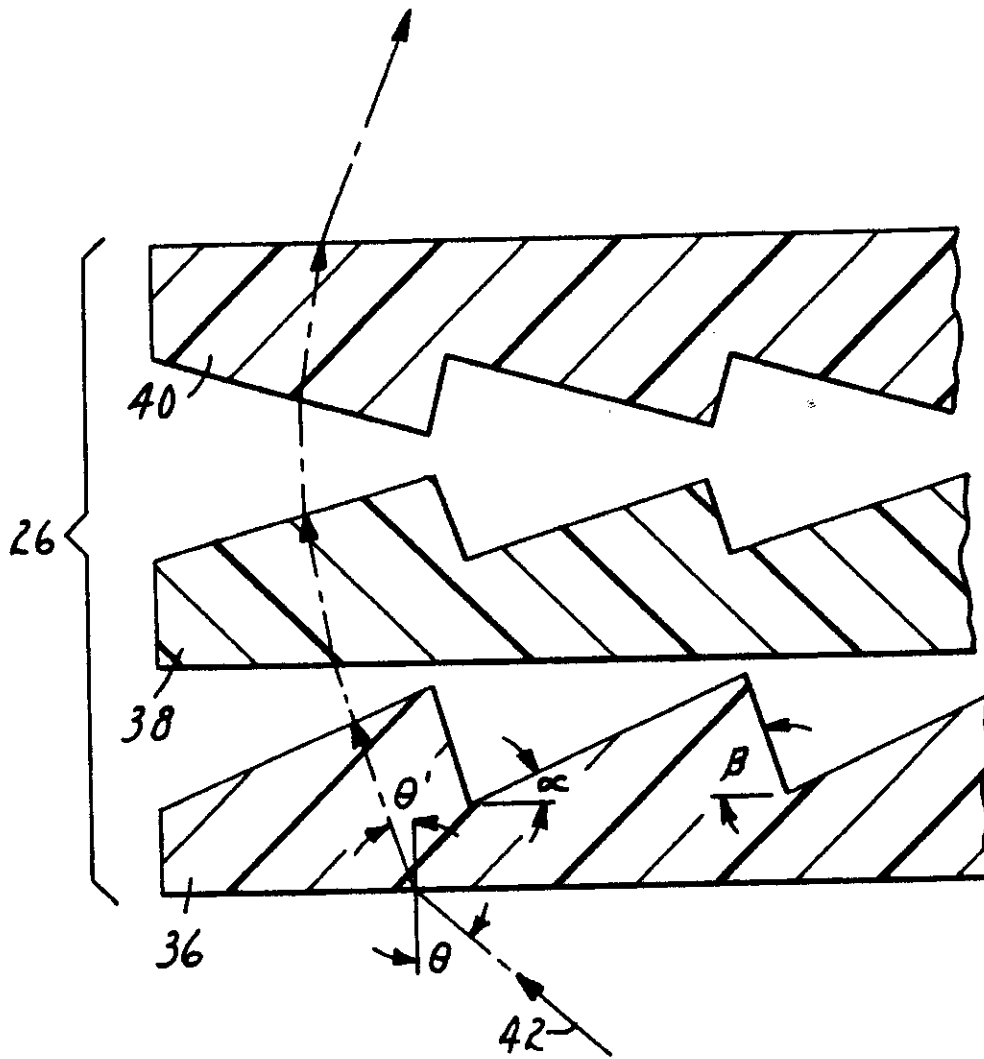


FIG. 3

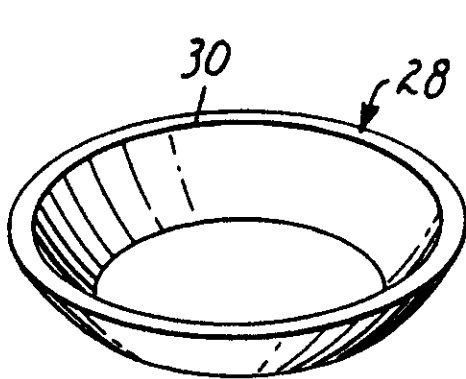


FIG. 4

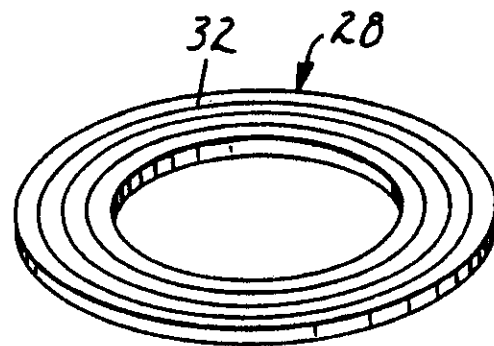


FIG. 5

REGISTER ENTRY FOR EP0272807

European Application No EP87310370.9 filing date 25.11.1987

Priority claimed:

19.12.1986 in United States of America - doc: 944425

Designated States CH DE FR GB IT LI NL SE

Title REDUCED HEIGHT TRANSMISSIVE OVERHEAD PROJECTOR

Applicant/Proprietor

MINNESOTA MINING AND MANUFACTURING COMPANY, 3M Center, P.O. Box 33427, St. Paul, Minnesota 55133-3427, United States of America [ADP No. 50012772006]

Inventor

DENNIS F. VANDERWERF, c/o Minnesota Mining and Manufacturing Company 2501 Hudson Road, St. Paul Minnesota 55144-1000, United States of America

[ADP No. 55775860001]

Classified to

G2J

G03B

Address for Service

LANGNER PARRY, High Holborn House, 52-54 High Holborn, LONDON, WC1V 6RR, United Kingdom

[ADP No. 00001032001]

EPO Representative

IAIN CAMERON BAILLIE, c/o Ladas & Parry Isartorplatz 5, D-8000 München 2, Federal Republic of Germany

[ADP No. 50848357001]

Publication No EP0272807 dated 29.06.1988

Publication in English

Examination requested 25.11.1987

Patent Granted with effect from 21.07.1993 (Section 25(1)) with title REDUCED HEIGHT TRANSMISSIVE OVERHEAD PROJECTOR.

26.06.1989 EPO: Search report published on 19.07.1989

Entry Type 25.11 Staff ID.

Auth ID. EPT

21.06.1993 Notification from EPO of change of Applicant/Proprietor details from

MINNESOTA MINING AND MANUFACTURING COMPANY, 3M Center, P.O. Box 33427, St. Paul, Minnesota 55133-3427, United States of America

[ADP No. 50012772006]

to

MINNESOTA MINING AND MANUFACTURING COMPANY, 3M Center, P.O. Box 33427, St. Paul, Minnesota 55133-3427, United States of America

[ADP No. 50012772006]

Entry Type 25.14 Staff ID. RD06 Auth ID. EPT

TIMED: 18/05/94 15:59:57

REGISTER ENTRY FOR EP0272807 (Cont.)

PAGE: 2

21.06.1993 Notification from EPO of change of EPO Representative details from
IAIN CAMERON BAILLIE, c/o Ladas & Parry Isartorplatz 5, D-8000
München 2, Federal Republic of Germany [ADP No. 50848357001]
to

IAIN CAMERON BAILLIE, c/o Ladas & Parry, Altheimer Eck 2, W-8000
München 2, Federal Republic of Germany [ADP No. 50848357001]
Entry Type 25.14 Staff ID. RD06 Auth ID. EPT

24.06.1993 LANGNER PARRY, High Holborn House, 52-54 High Holborn, LONDON, WC1V
6RR, United Kingdom [ADP No. 00001032001]
registered as address for service

Entry Type 8.11 Staff ID. SS1 Auth ID. AA

**** END OF REGISTER ENTRY ****

OA80-01
EP

OPTICS - PATENTS

18/05/94 15:59:52
PAGE: 1

RENEWAL DETAILS

PUBLICATION NUMBER

EP0272807

PROPRIETOR(S)

MINNESOTA MINING AND MANUFACTURING COMPANY, 3M Center, P.O. Box
33427, St. Paul, Minnesota 55133-3427, United States of America

DATE FILED

25.11.1987

DATE GRANTED

21.07.1993

DATE NEXT RENEWAL DUE

25.11.1994

DATE NOT IN FORCE

DATE OF LAST RENEWAL

28.10.1993

YEAR OF LAST RENEWAL

07

STATUS

PATENT IN FORCE