



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 721 687 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
15.11.2006 Bulletin 2006/46

(51) Int Cl.:
B22C 7/02 (2006.01) B22C 9/04 (2006.01)
B22D 27/04 (2006.01)

(21) Application number: **05425322.4**

(22) Date of filing: **13.05.2005**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR LV MK YU

(71) Applicant: **C.R.F. Società Consortile per Azioni**
10043 Orbassano (Torino) (IT)


(72) Inventors:
• **Plano, S.**
C.R.F. Società Consortile per Azioni
10043 Orbassano (Torino) (IT)

• **Merlo, E.**
C.R.F. Società Consortile per Azioni
10043 Orbassano (Torino) (IT)
• **Antonioni, S.**
C.R.F. Società Consortile per Azioni
10043 Orbassano (Torino) (IT)

(74) Representative: **Notaro, Giancarlo**
Buzzi, Notaro & Antonielli d'Oulx S.r.l.
Via Maria Vittoria 18
10123 Torino (IT)

(54) **Method for casting a metal piece with the lost foam technique**

(57) A method for casting of a metal piece, particularly a piece of steel, using the lost-foam technique envisages the provision of a pattern made of foamed-plastic material, the body of which includes auxiliary portions (6) that are to define, at the moment of casting, metal portions irradiating heat, which slow down cooling and consequent solidification in one or more in-gates (5), through which the molten metal fills the main body of the pattern, so as to prevent said in-gates from solidifying before cooling of the portions of greater thickness of the body of the casting has occurred.

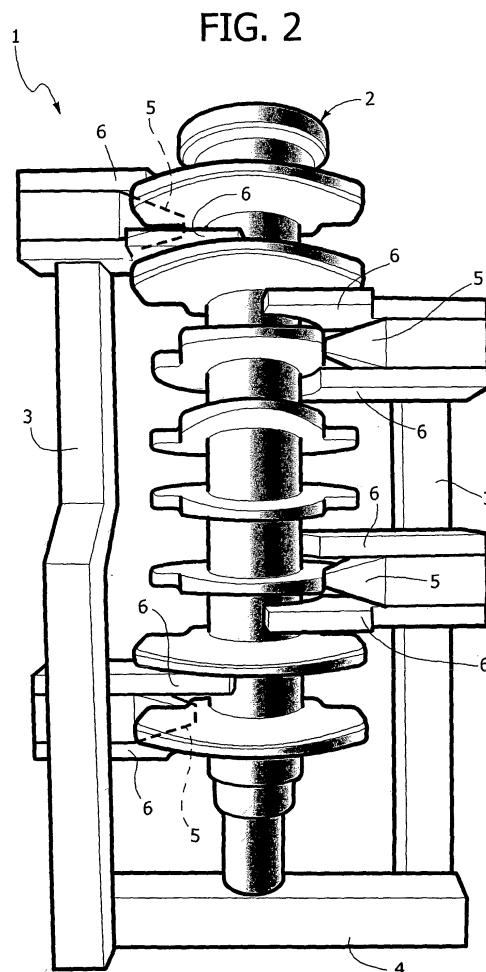

EP 1 721 687 A1

Description

[0001] The present invention relates to methods for obtaining metal castings, particularly steel castings, through the use of expendable patterns of foamed-plastic material, using the so-called "lost-foam" technique or "expendable-pattern casting" (EPC) technique.

[0002] The use of disposable patterns of foamed material for obtaining metal castings was developed and patented by H.F. Shroyer in 1958 (US Patent N° 2,830,343). The idea of using non-bound sand was patented later by Smith, in 1964 (US Patent N° 3,157,924).

[0003] The patterns are coated with one or more layers of refractory paint and placed in a container, which is subsequently filled with sand. The liquid metal is poured into the mould and takes the place of the foamed pattern. Using the usual technique, in this type of casting process, the body of the pattern also incorporates one or more feed channels, which at the moment of casting define the feed channels or sprues of the molten metal. Said feed portions are connected to the main body of the pattern by means of one or more in-gates, which are to define, at the moment of casting, inlets for the molten metal within the main body.

[0004] The lost-foam casting technique has rapidly developed in recent years on account of a series of advantages that it offers. With said technique, during the process of casting, the pattern made of foamed-plastic material undergoes thermal degradation (melting, depolymerization, pyrolysis and evolution of liquid and gas fractions) and is progressively replaced by the molten metal.

[0005] The aforesaid technique is above all used for making castings of aluminium alloy or light alloy, whilst it finds some difficulty of application to the production of castings made of cast iron or steel. Particularly in the case of steel, given the marked shrinkage of the material during the step of cooling and solidification, there readily occur, in areas corresponding to the larger sections of the casting, porosities due to shrinkage, owing to the fact that the parts of greater thickness are still partially or totally in the molten state when the inlet portions are already solidified. This prevents new molten metal from supplying the cavities that are created following upon shrinkage of the parts of greater thickness when also these solidify.

[0006] The purpose of the present invention is to overcome said drawback.

[0007] In order to achieve said purpose, the subject of the present invention is a method of the type referred to above, characterized in that there is provided a pattern, the body of which also incorporates auxiliary portions that extend from one or more of the aforesaid feed portions for defining, at the moment of casting, metal portions irradiating heat, which slow down cooling of the portions of the body adjacent thereto.

[0008] Preferably, according to the invention, prearranged in the pattern are one or more heating portions immediately adjacent to the aforesaid inlet portions.

[0009] Once again preferably, the aforesaid heating

portions are in the form of plane fins projecting in cantilever fashion from one or more feed portions of the body of the pattern and having free ends situated immediately adjacent to, but set at a distance from, the main body of the pattern.

[0010] Thanks to the aforesaid characteristics, during casting, the aforesaid fins forming part of the body of the pattern are replaced by molten metal, thus giving rise to metal fins that irradiate heat in an area immediately adjacent to the inlet portions of the pattern. As a result of the presence of the radiant fins, the molten metal in the area corresponding to the inlet portions tends to cool and solidify last with respect to all the innermost portions, which are also of greater thickness, of the body of the pattern. In this way, the inlet portions are always able to supply new molten metal, which fills, during the process of casting, the cavities that are formed within the body of the casting as a result of the shrinkage of the metal as it solidifies.

[0011] Further characteristics and advantages of the invention will emerge from the ensuing description with reference to the annexed plate of drawings, which are provided purely by way of non-limiting example and in which:

- Figure 1 is an elevation of the pattern made of foamed-plastic material used in the method according to the invention in order to obtain a steel engine crankshaft;
- Figure 2 is a perspective view of the pattern illustrated in Figure 1, taken from the opposite side with respect to that of Figure 1; and
- Figure 3 is a perspective view at an enlarged scale of a detail of the pattern illustrated in Figures 1 and 2.

[0012] In order to obtain an engine crankshaft using the method of the invention, a pattern made of foamed-plastic material is provided, designated as a whole by 1 in the drawings. The pattern 1 comprises a main body 2, the configuration of which corresponds to that of the finished piece to be obtained. The body 1 of foamed-plastic material likewise incorporates a pair of elongated and parallel portions 3 arranged at the two sides of the main body 2 and parallel thereto, which are to define, at the moment of casting, feed portions of the molten metal. The feed portions 3 are connected to one another at one end by means of the connection portion 4 and are moreover connected to the main body 2 by means of inlet portions 5 (in-gates). In the example illustrated, two in-gates are provided, set at a distance from one another, for each feed portion 3.

[0013] According to the main characteristic of the invention, the body of the pattern 1 likewise incorporates heating portions 6, which are to define, at the moment of casting, metal portions for irradiation of heat.

[0014] In the preferred embodiment illustrated herein, the heating portions 6 are in the form of a pair of plane and parallel fins projecting in cantilever fashion from each

feed portion 3, at the two sides of each in-gate 5. Each fin 6 has a free end with an edge set at a distance from, but adjacent to, a corresponding surface of the main body 2 of the pattern.

[0015] The pattern 1 illustrated in the drawings is designed to be used in a lost-foam process in a way in itself known. The pattern is obtained using any technique for moulding plastic material in a mould provided for said purpose. After obtaining the pattern, the latter is coated with a layer of paint and then sandblasted. At this point the molten metal is cast directly within channels that communicate with the feed portions of the pattern. Said portions degrade thermally and are replaced progressively by the molten metal. The molten metal thus progressively reaches the in-gates and thence replaces the entire pattern made of foamed-plastic material. During the process of cooling and solidification, the in-gates 5 are kept hot as a result of the heat irradiated by the fins 6, which in the meantime have been transformed into metal fins. In this way, the innermost parts of greater thickness of the main body of the casting cool and solidify subsequent to cooling and solidification of the in-gates 5. In said way, the cavities that tend to be formed within the main body as a result of shrinkage of the metal during solidification are duly filled by further molten metal fed in through the in-gates until a casting of excellent quality is obtained at the moment in which also the in-gates, together with the fins 6, cool and solidify.

[0016] At the end of the step of cooling and solidification, the piece is subjected to the usual operations envisaged in a process of lost-foam casting. The main body of the object is separated from the accessory portions defined by the feed portions 3, by the in-gates 5 and by the heating fins 6. For this purpose, said accessory parts are separated with an operation of cutting in an area corresponding to the sections of connection to the in-gates 5. The piece then undergoes the usual machining operations.

[0017] Of course, it is possible to envisage "clusters" of patterns of the type illustrated in the annexed drawings, for casting a number of pieces simultaneously. The shape and arrangement of the heating portions 6 are of course chosen according to the characteristics of the piece to be obtained.

[0018] Of course, without prejudice the principle of the invention, the details of construction and the embodiments may vary widely with respect to what is described and illustrated herein by way of example, without thereby departing from the scope of the present invention.

the moment of casting define feed channels or sprues for supply of the molten metal, said feed portions (3) being connected to the main body (2) of the pattern via one or more in-gates (5), which are to define at the moment of casting the inlets for the molten metal within the main body, said method being **characterized in that** the body (1) of the pattern also incorporates auxiliary portions (6) that extend from one or more feed portions (3) for defining, at the moment of casting, metal portions irradiating heat, which slow down cooling of the portions of the body of the pattern adjacent thereto.

2. The method according to Claim 1, **characterized in that** one or more of said auxiliary portions (6) are arranged adjacent to one or more of the aforesaid in-gates (5).
3. The method according to Claim 2, **characterized in that** the aforesaid auxiliary portions (6) are in the form of plane fins projecting in cantilever fashion from one or more feed portions (3) of the body of the pattern.
4. The method according to Claim 3, **characterized in that** one or more fins (6) are provided at the two sides of each in-gate (5).
5. The method according to Claim 3, **characterized in that** each fin (6) has a free end with an edge set at a distance from, but adjacent to, a portion of the surface of the main body of the pattern.

Claims

1. A method for obtaining a casting of metal, particularly of steel, using the lost-foam technique, in which the molten metal is cast on a pattern made of foamed-plastic material, in which the body of the pattern also incorporates one or more feed portions (3, which at

FIG. 1

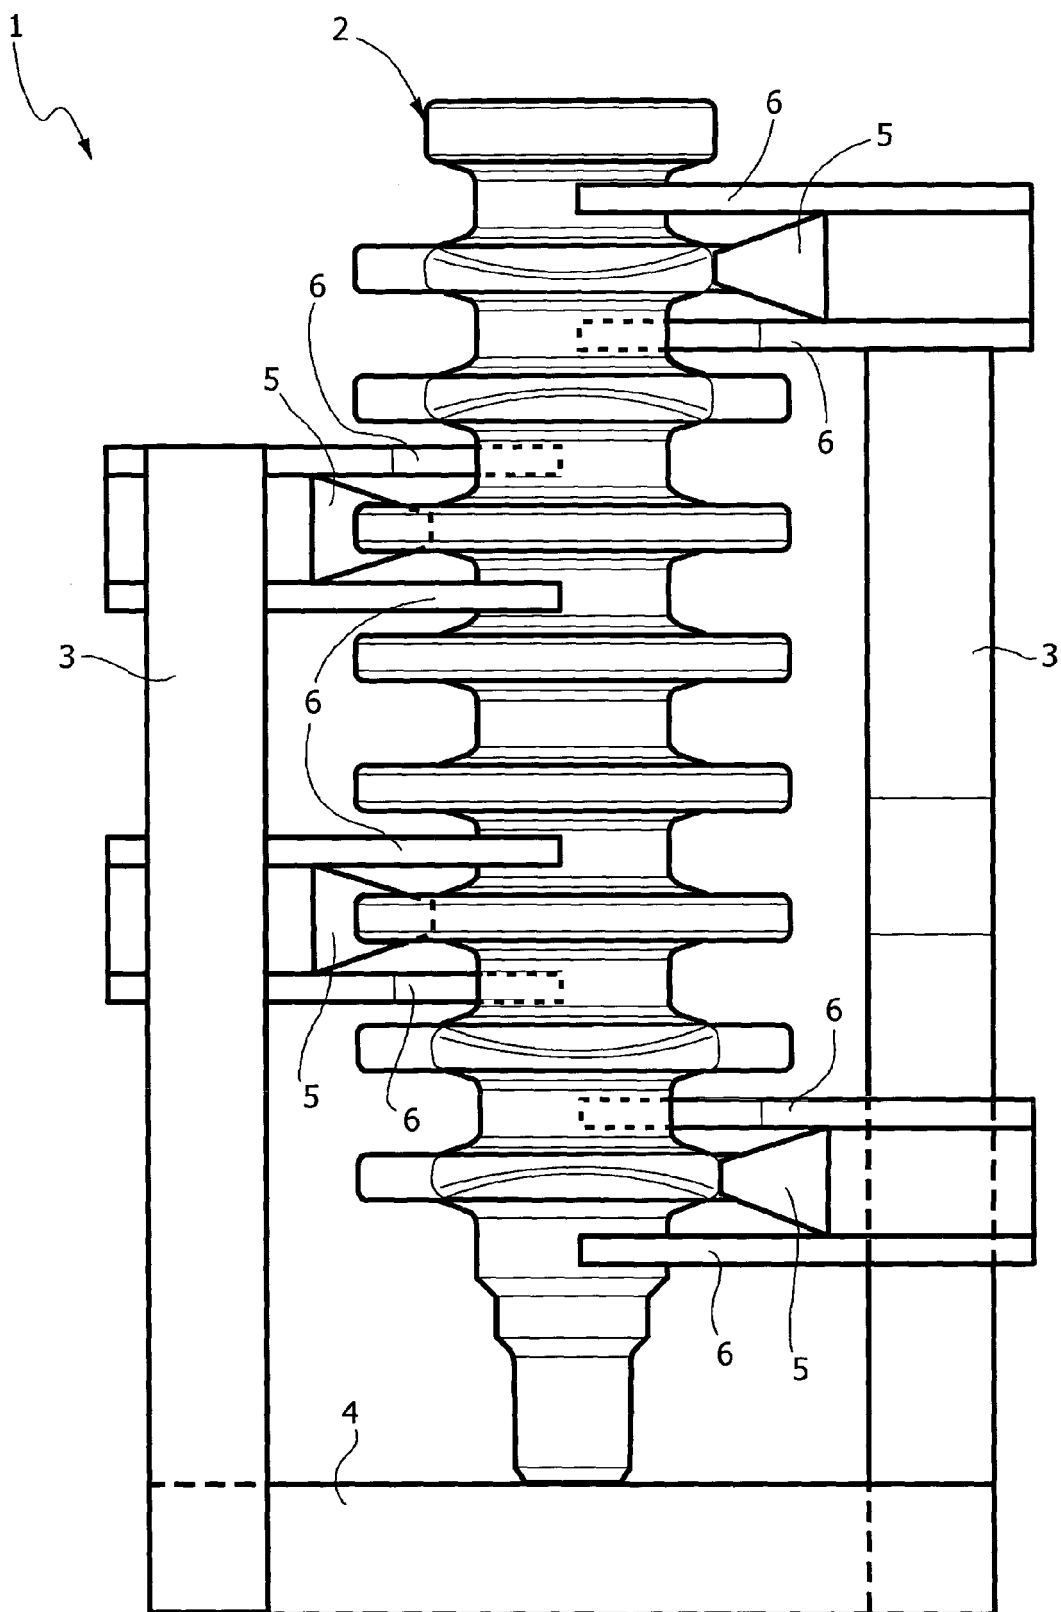


FIG. 2


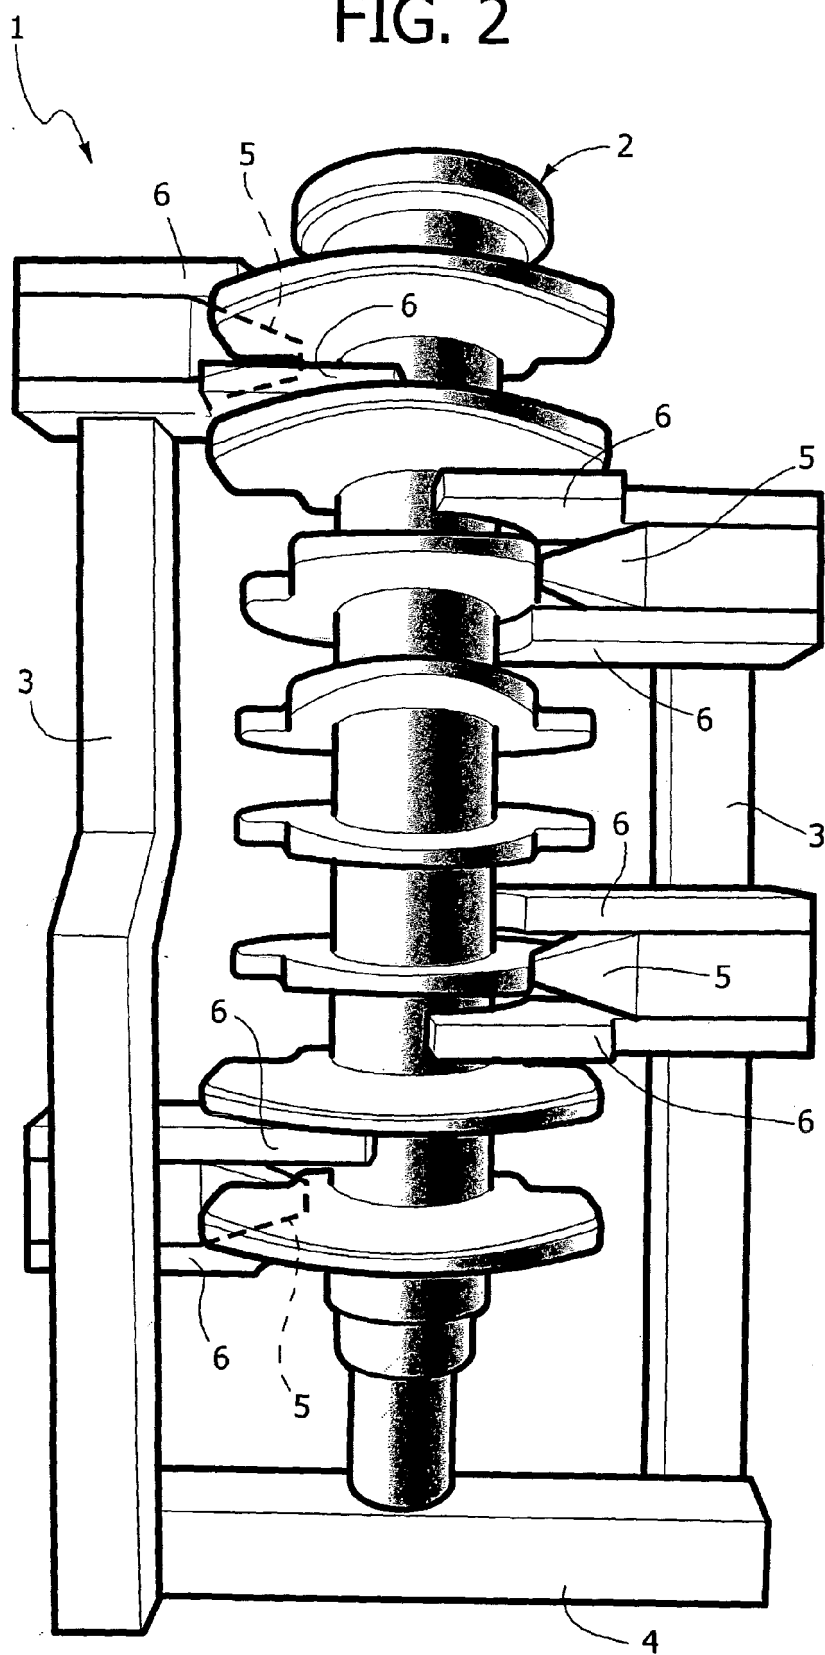


FIG. 3



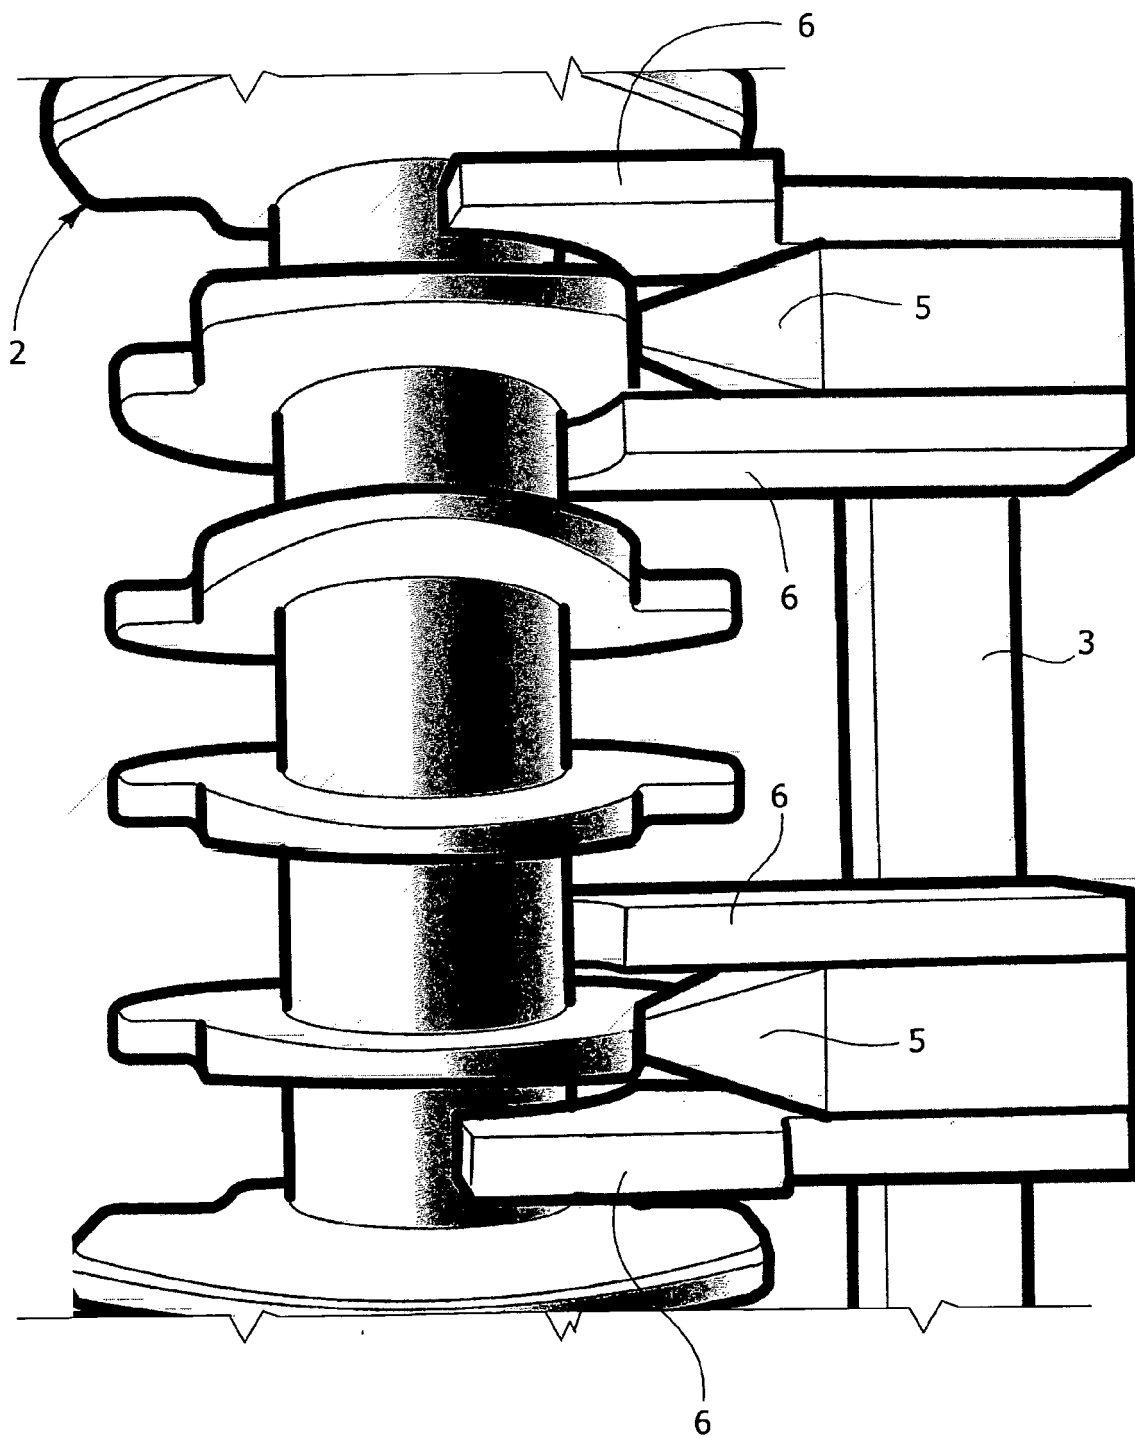

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 05 42 5322

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 6 886 621 B1 (HESTERBERG WILLIAM G ET AL) 3 May 2005 (2005-05-03) * columns 7-9 * * figures 1-5 *	1-3	B22C7/02 B22C9/04 B22D27/04
X	EP 0 431 770 A (GENERAL MOTORS CORPORATION) 12 June 1991 (1991-06-12) * abstract * * figures 1,2,4 * * column 6 *	1,2	
X	US 4 766 942 A (WESSMAN ET AL) 30 August 1988 (1988-08-30) * abstract * * figures 1-3 *	1,2	
A	US 4 736 786 A (TRUMBAUER ET AL) 12 April 1988 (1988-04-12) * abstract * * figures 1-3 *	1-5	
A	US 5 038 847 A (DONAHUE ET AL) 13 August 1991 (1991-08-13) * abstract * * figures 1,2 *	1-5	TECHNICAL FIELDS SEARCHED (Int.Cl.7) B22C B22D
A	PATENT ABSTRACTS OF JAPAN vol. 011, no. 290 (C-447), 18 September 1987 (1987-09-18) & JP 62 083414 A (HONDA MOTOR CO LTD), 16 April 1987 (1987-04-16) * abstract *	1-5	
A	FR 2 685 229 A (PEUGEOT AUTOMOBILES; CITROEN; PEUGEOT; CITROEN SA) 25 June 1993 (1993-06-25) * abstract * * figure 1 *	1-5	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 24 August 2005	Examiner Baumgartner, R
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 42 5322

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-08-2005

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6886621	B1	03-05-2005	NONE
EP 0431770	A	12-06-1991	US 5000244 A 19-03-1991
		AU 610786 B1	23-05-1991
		DE 69025288 D1	21-03-1996
		DE 69025288 T2	27-06-1996
		EP 0431770 A2	12-06-1991
		JP 1998413 C	08-12-1995
		JP 5069082 A	23-03-1993
		JP 7032948 B	12-04-1995
US 4766942	A	30-08-1988	CA 1321294 C 17-08-1993
US 4736786	A	12-04-1988	CA 1263515 A1 05-12-1989
US 5038847	A	13-08-1991	NONE
JP 62083414	A	16-04-1987	JP 1003594 B 23-01-1989
		JP 1520013 C	29-09-1989
FR 2685229	A	25-06-1993	FR 2685229 A1 25-06-1993

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2830343 A, H.F. Shroyer [0002]
- US 3157924 A, Smith [0002]