




(86) Date de dépôt PCT/PCT Filing Date: 2005/07/26
(87) Date publication PCT/PCT Publication Date: 2006/08/10
(45) Date de délivrance/Issue Date: 2015/04/28
(85) Entrée phase nationale/National Entry: 2007/08/07
(86) N° demande PCT/PCT Application No.: IT 2005/000443
(87) N° publication PCT/PCT Publication No.: 2006/082603
(30) Priorités/Priorities: 2005/02/07 (ITMI2005A00169);
2005/07/08 (ITMI2005A001302)

(51) Cl.Int./Int.Cl. *C09B 67/08* (2006.01),
C09C 1/56 (2006.01), *C09C 3/10* (2006.01)
(72) Inventeurs/Inventors:
BARDELLI, ACHILLE ANGELO, IT;
RIBALDONE, GIORGIO, IT
(73) Propriétaire/Owner:
INXEL TRADEMARK & PATENTS SAGL, CH
(74) Agent: MARKS & CLERK

(54) Titre : ENROBAGE DE PIGMENTS ORGANIQUES ET INORGANIQUES AVEC UN ALDEHYDE OU DES RESINES
CETONIQUES
(54) Title: COATING OF ORGANIC AND INORGANIC PIGMENTS WITH ALDEHYDE OR KETONE RESINS

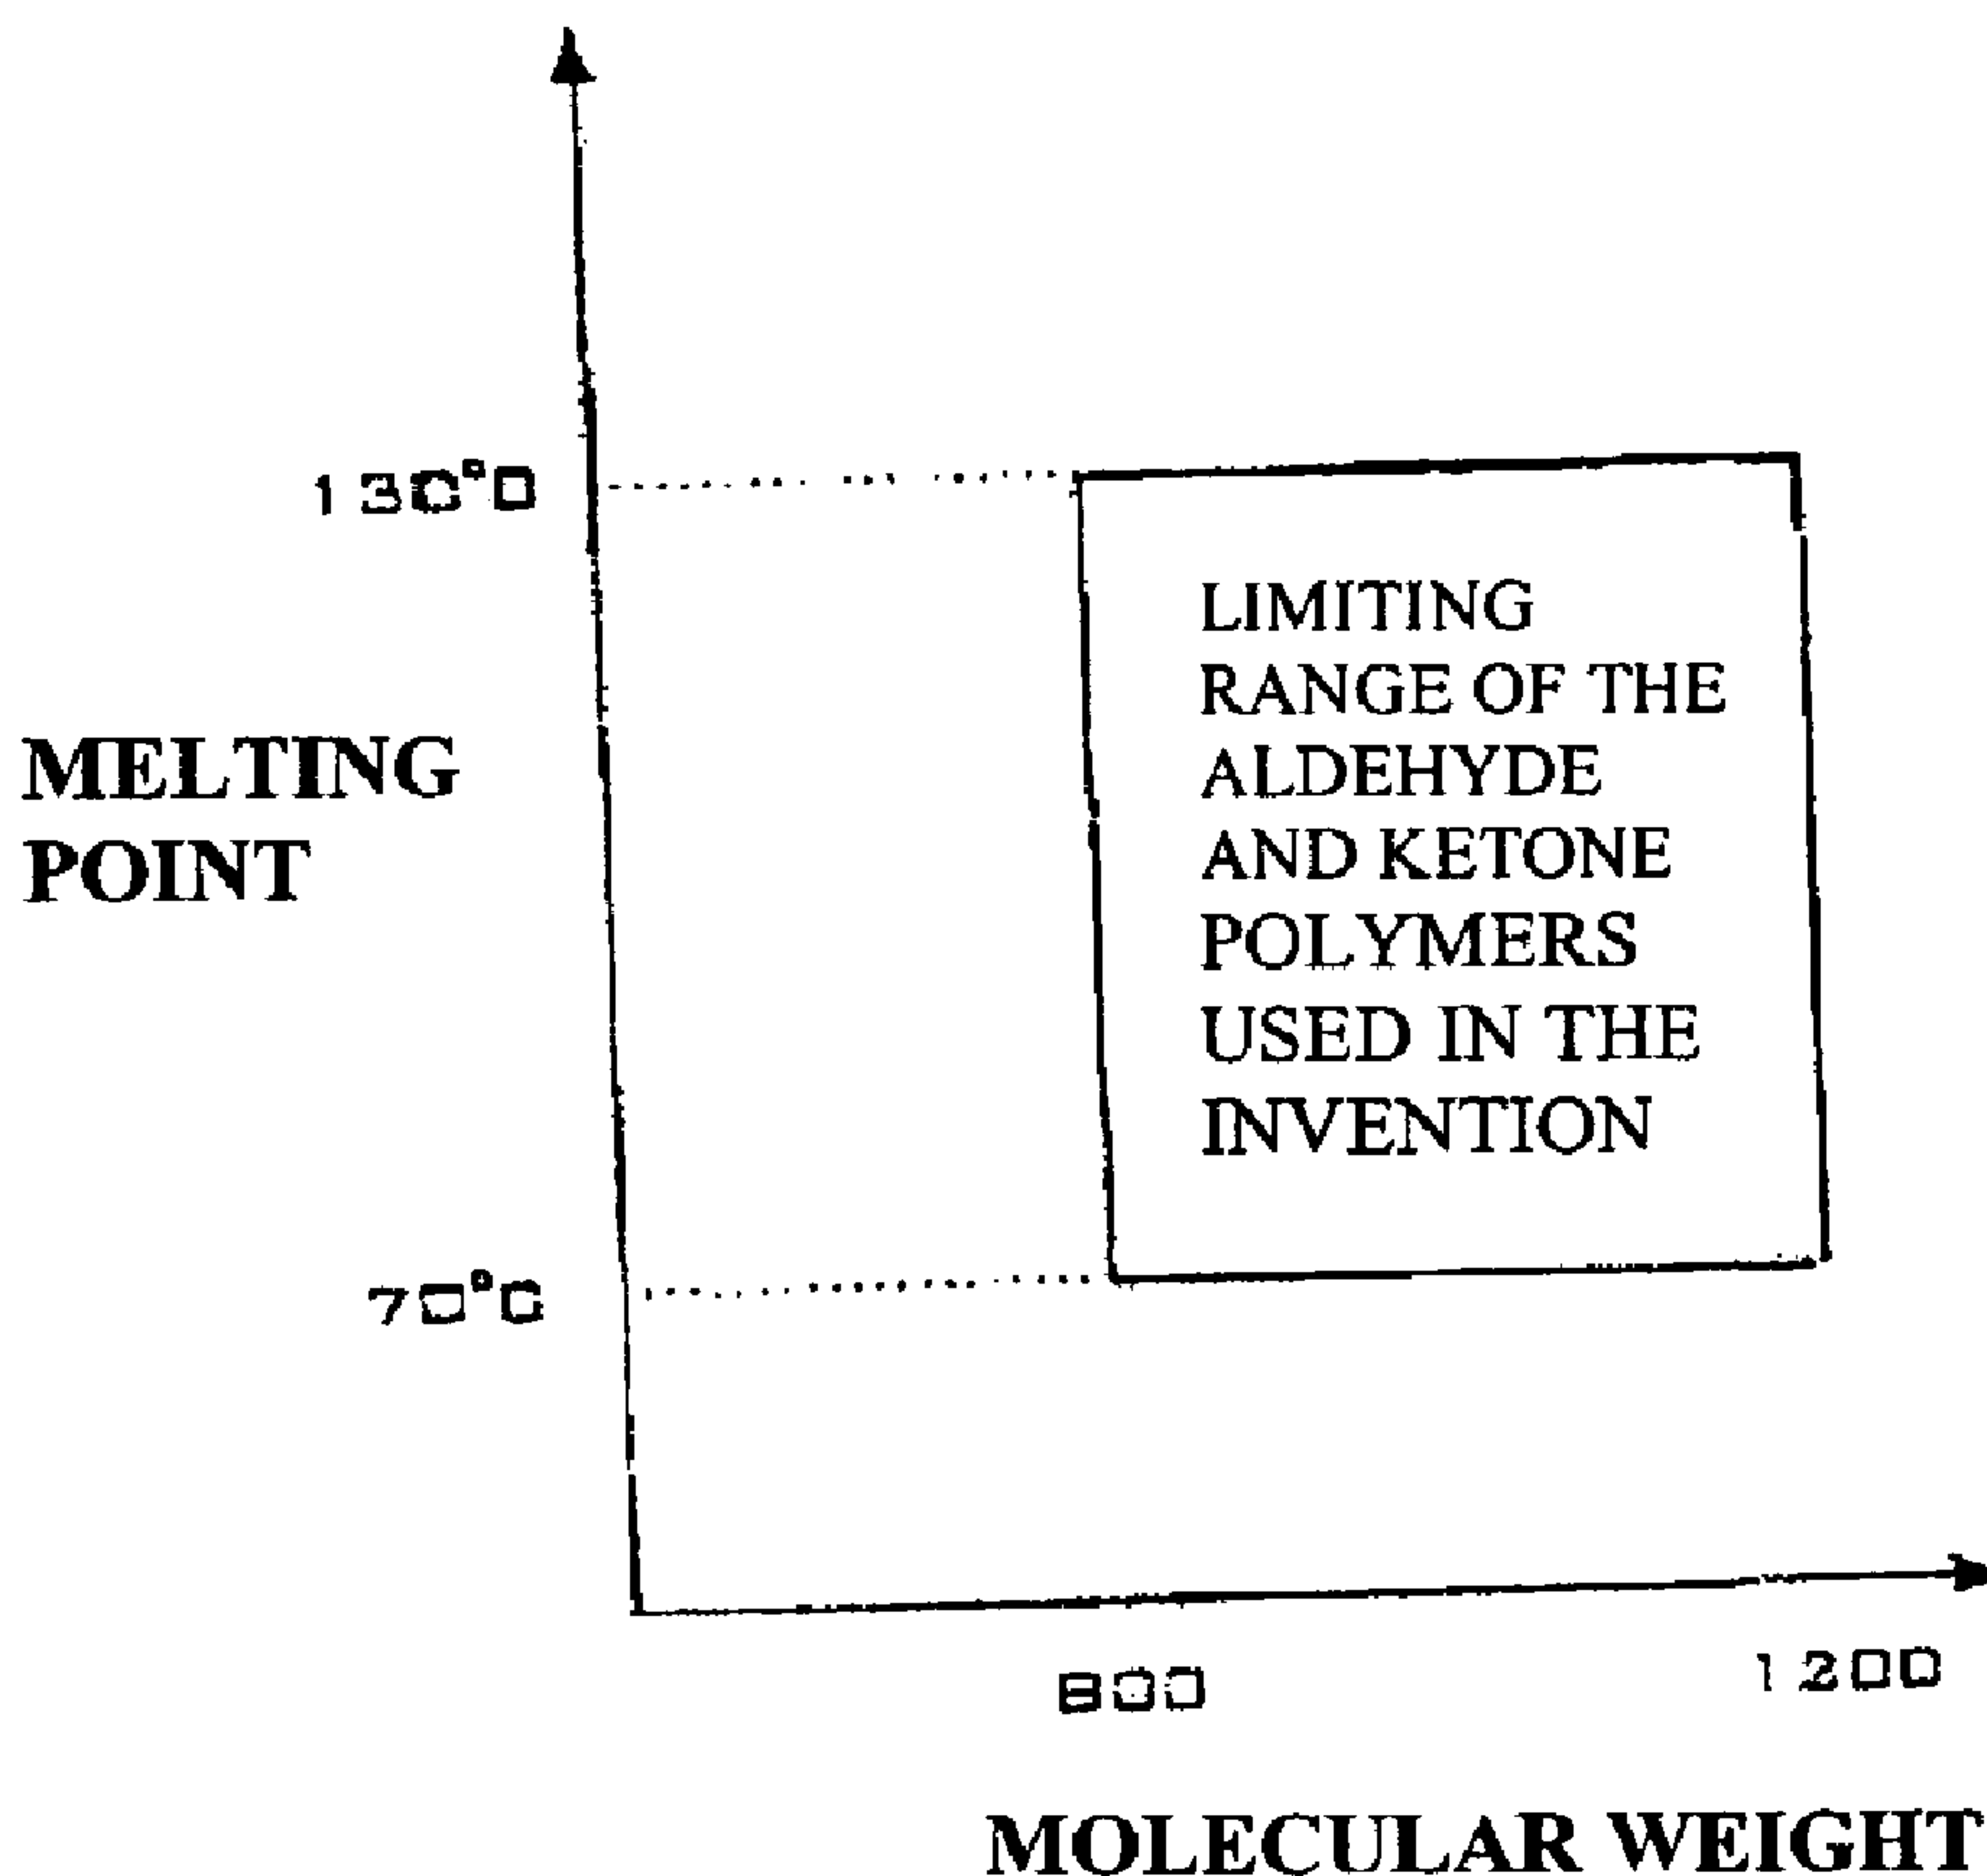

(57) Abrégé/Abstract:

Coating of organic and inorganic pigments with aldehyde or ketone resins, comprising a chemical compound consisting of particles of solid organic and inorganic substances, both defined as pigments, in that they are substances which absorb a fraction

(57) Abrégé(suite)/Abstract(continued):

of the light and reflect the complementary part thereof, coated with aldehyde or ketone resins. The latter are deposited on the surface of the pigment by means of a process which envisages melting of the resin, consequent wetting and coating of the entire surface of the pigment with the resin in the melted state, the consequent cooling and subsequent step of atomization by means of mechanical systems operating in temperature conditions lower than 10°C, by means of cryogenic processes. The product resulting from this invention will be used as a semifinished product for the colouring and pigmentation of powder paints and plastics as a monochromatic colouring material and or will also be used, after dissolving in a solvent, as a pigmented paste in the liquid paints industry.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 August 2006 (10.08.2006)

PCT

(10) International Publication Number
WO 2006/082603 A1

(51) International Patent Classification:

C09B 67/08 (2006.01) C09C 3/10 (2006.01)
C09C 1/56 (2006.01)

(21) International Application Number:

PCT/IT2005/000443

(22) International Filing Date: 26 July 2005 (26.07.2005)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:

MI2005A00169 7 February 2005 (07.02.2005) IT
MI2005A001302 8 July 2005 (08.07.2005) IT

(71) Applicant (for all designated States except US): INXEL S.r.l. [IT/IT]; Corso Italia, 8, I-20122 Milano (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BARDELLI, Achille, Angelo [IT/IT]; Via XXV Aprile 105, I-21020 Buguggiate (VA) (IT). RIBALDONE, Giorgio [IT/IT]; Via Arnaldo da Brescia, 4, I-21013 Gallarate (VA) (IT).

(74) Agents: PISTOLESI, Roberto et al.; Dragotti & Associati Srl, Via Turati, 32, I-20121 Milano (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COATING OF ORGANIC AND INORGANIC PIGMENTS WITH ALDEHYDE OR KETONE RESINS

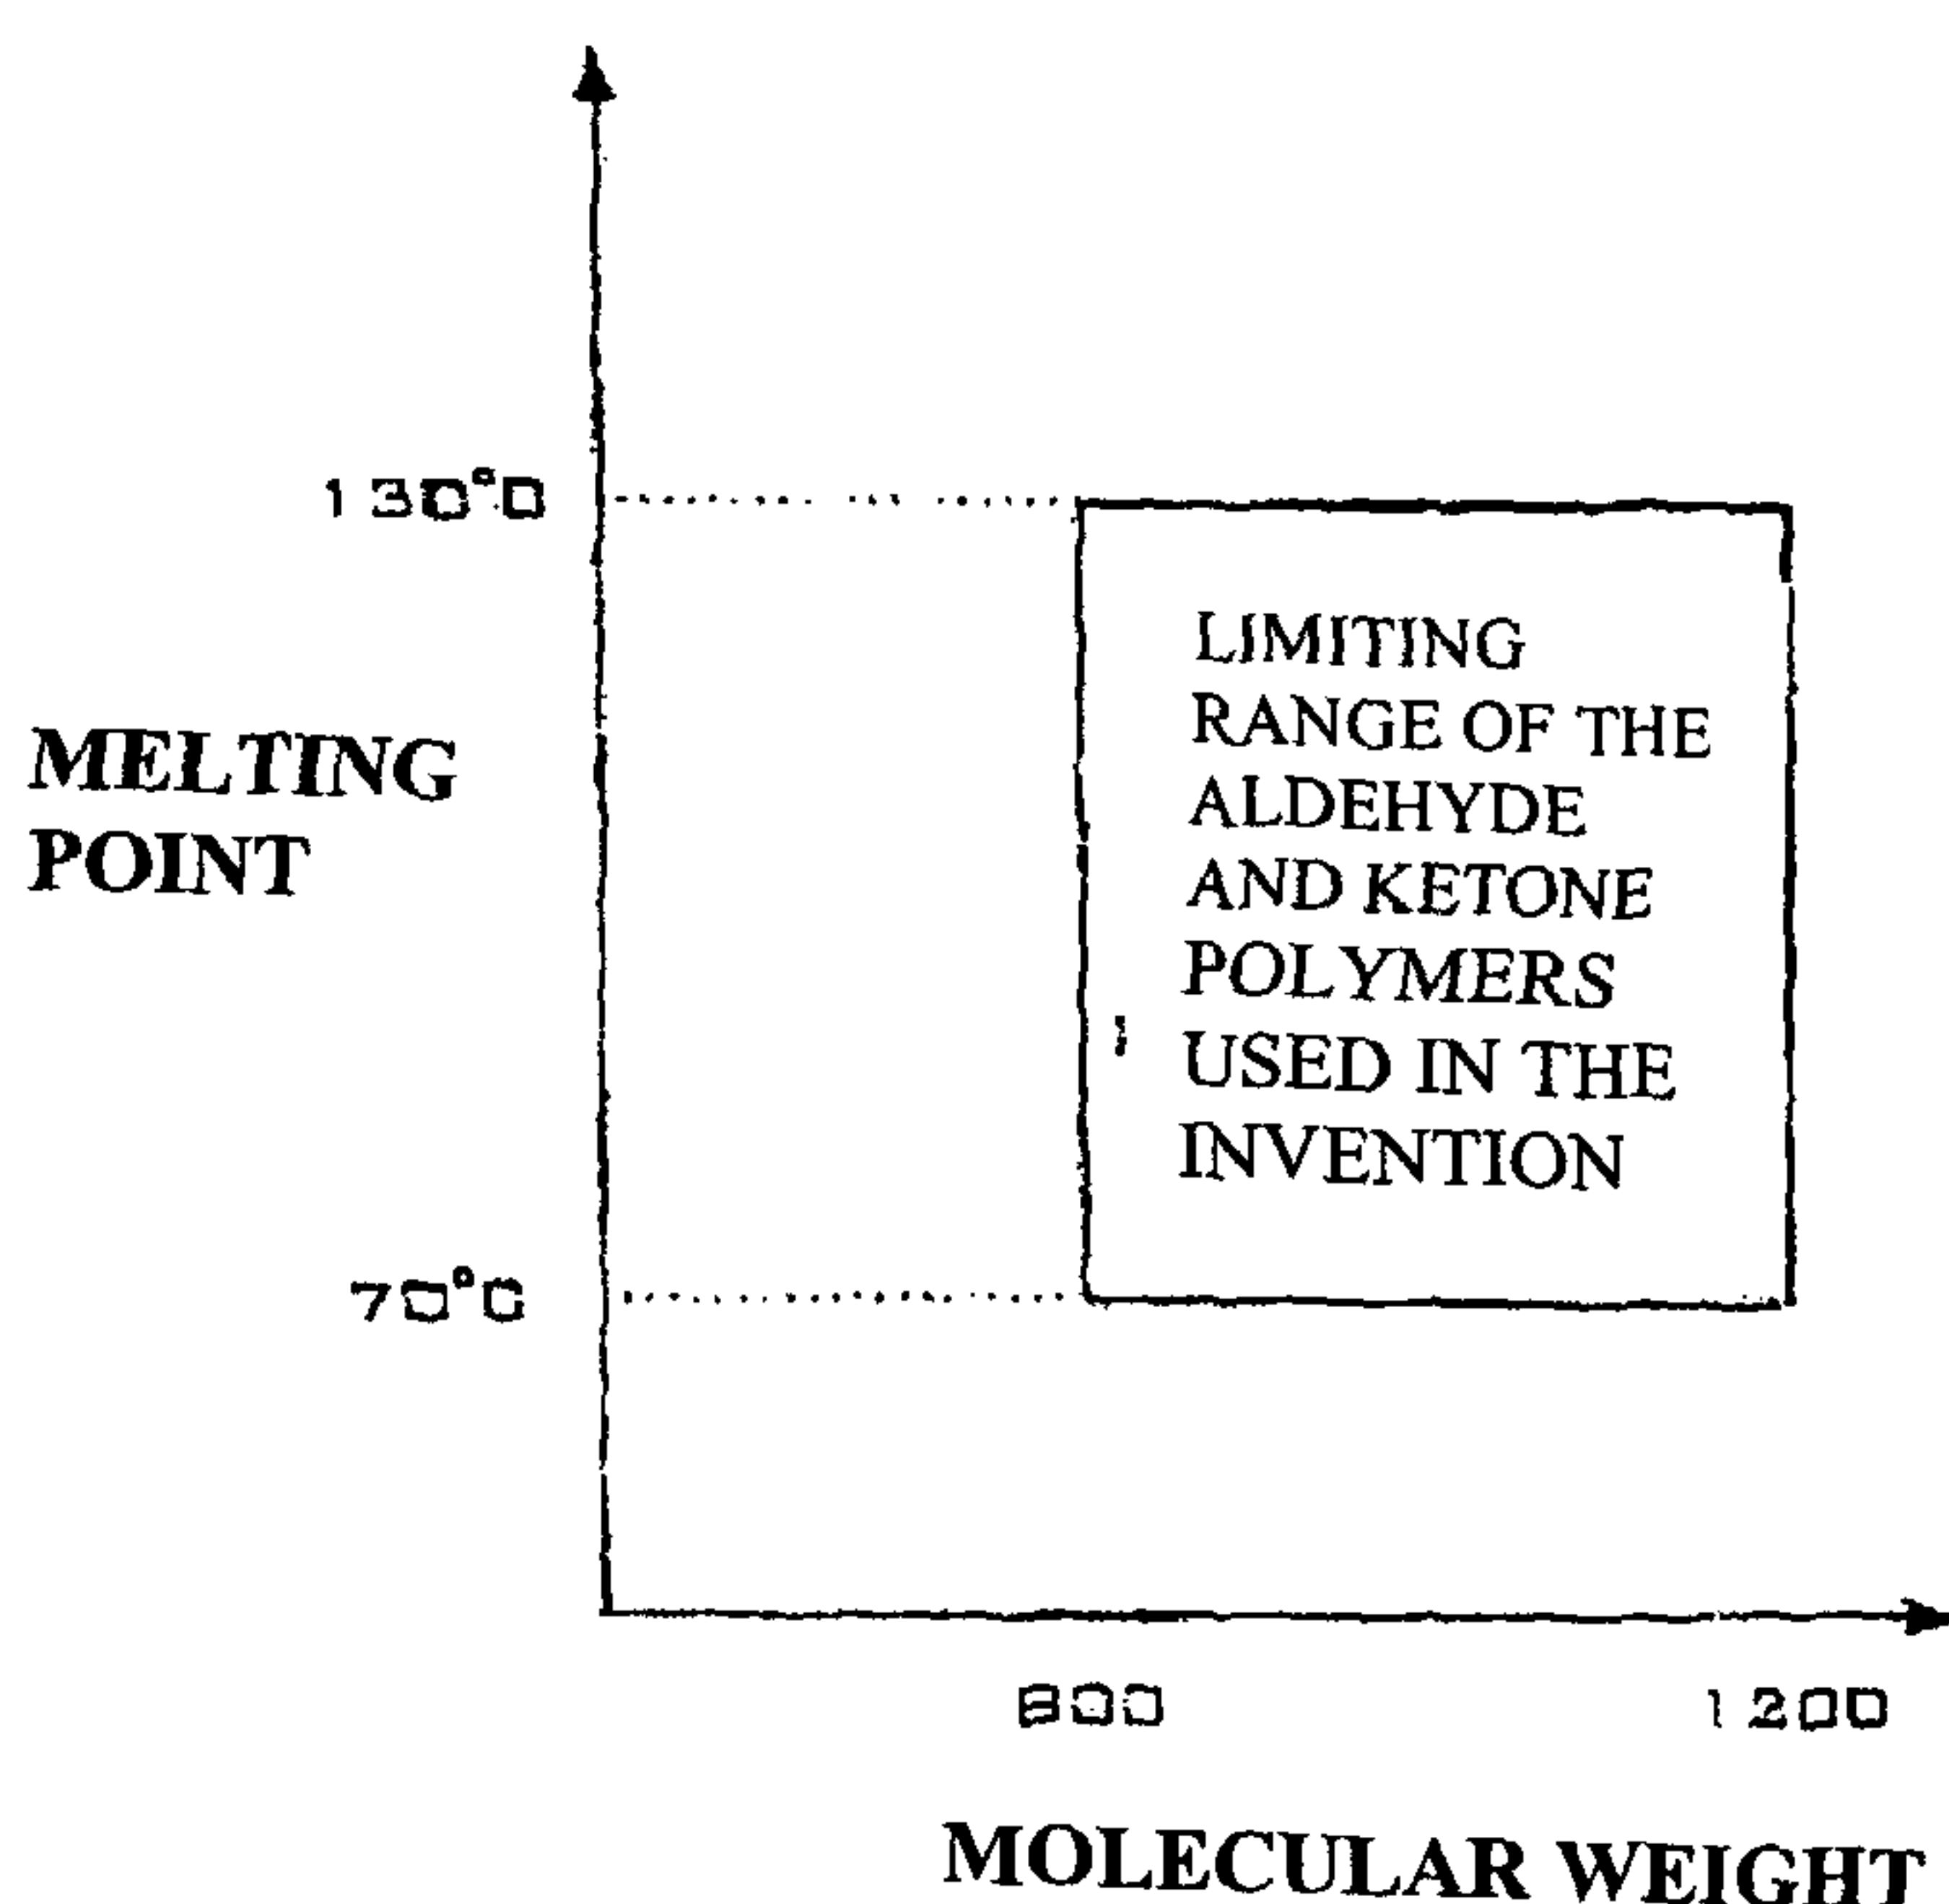

(57) Abstract: Coating of organic and inorganic pigments with aldehyde or ketone resins, comprising a chemical compound consisting of particles of solid organic and inorganic substances, both defined as pigments, in that they are substances which absorb a fraction of the light and reflect the complementary part thereof, coated with aldehyde or ketone resins. The latter are deposited on the surface of the pigment by means of a process which envisages melting of the resin, consequent wetting and coating of the entire surface of the pigment with the resin in the melted state, the consequent cooling and subsequent step of atomization by means of mechanical systems operating in temperature conditions lower than 10°C, by means of cryogenic processes. The product resulting from this invention will be used as a semifinished product for the colouring and pigmentation of powder paints and plastics as a monochromatic colouring material and or will also be used, after dissolving in a solvent, as a pigmented paste in the liquid paints industry.

- 1 -

COATING OF ORGANIC AND INORGANIC PIGMENTS WITH ALDEHYDE OR KETONE RESINS

The present invention relates to a coating of organic and inorganic pigments with aldehyde or ketone resins, preferably in the form of granules, and also relates to the associated production process.

As is known, pigments are solids of both an organic and inorganic nature, which are defined as such when they are used within a fixing system such as resins and absorb part of the light and reflect the complementary part thereof which forms the colour of the surface coated with this system.

As such, they are solids with a very irregular surface, which differs from compound to compound, and with properties for interfacing with other substances which are completely different from each other and are greatly influenced by the physical and chemical conditions of the contact elements.

The difficulties of incorporating pigments in vehicle systems based on a wide range of resins are well known.

This is true both in the case of powder systems, where contact of the pigment occurs with a polymer resin in the melted state inside an extruder, and in the case of liquid systems where interfacing occurs with resins diluted with solvents which have a flocculating effect on the system.

At present in powder paint formulations the introduction of the pigments is performed by means of simple physical mixing of the pigments with differently shaped granules of the resins which form the vehicle, with the addition of chemical compounds able to improve

- 2 -

the contact between pigment and resin and able to incorporate the pigment into the resin during the extrusion stage.

5 In order to facilitate metering of the colouring pigment, in many cases the latter is mixed with inert pigments in order to dilute the concentration and reduce the risk of metering difficulties in the case of small quantities.

10 The chemical compounds, described above, have the function of modifying the surface tension of the resins in the melted state or modifying wetting of the surface of the pigments.

15 The simultaneous presence of different pigments results in the need to use, in many cases, different types of chemical compounds, often having properties which conflict with and neutralize each other.

20 If follows that the development of the colour mixture, resulting from mixing of the pigments, is subject to inconsistency from one preparation to the next due not only to the change in environmental conditions, which differ in each case, but also to the varying properties of the pigment surfaces which vary from batch to batch and the surface tension properties of the polymers in the melted state which, even though
25 not differing from batch to batch, may be very different as a result of changes in the environmental conditions.

30 In the case of liquid paint formulations in solvent phase, introduction of the pigments is conventionally performed by mixing the pigments with resins dissolved in solvent.

The presence of solvent is extremely negative

- 3 -

owing to its flocculating properties which tend to make the contact between resin and pigment unstable.

In order to reduce this effect, anti-flocculating chemical compounds are normally added to these mixtures of pigments and resins dissolved in a solvent, these
5. having the property of modifying and adjusting the electrostatic properties of the surfaces of the pigments and modifying the surface tension of the resin/solvent solution.

10 Owing to these negative effects typical of the pigment/resin/solvent system, the colour mixtures may be defined as unstable systems where the chromatic effect of the finished paint changes over time.

Improvements to this system have been made by means of pre-dispersion techniques and corresponding
15 pulverization of monopigment pastes, where the pigment is incorporated in particular resins, also of an aldehyde and ketone nature, but dissolved in solvent and using formulations of chemical compounds, in order
20 to interface the surface of the specific pigment with the selected dissolved resin.

The aim of the present invention is to provide a coating which allows the drawbacks of the prior art to be overcome.

25 In connection with this aim, one object of the invention is to provide a coating in the form of a particle composition which may be used as a semifinished product for the colouring and pigmentation of powder paints or also used, after dissolving, in a
30 solvent as a pigmented paste in the liquid paints industry.

Another object is that of providing a coating in

- 4 -

granule or powder form which can be used to obtain mixtures of organic and inorganic dyes for pigmenting powder and liquid paints, overcoming the difficulties which are typically encountered in the use of pigments according to the prior art.

In particular, the granular composition of the present invention may be used as a semifinished product in powder paint formulations, as an alternative to the pure pigments which are not pre-coated. With their use it is possible to achieve a greater uniformity in the quality of the colouring system and a reduction in the quantity of pigment originally used to promote the colouring potential which the pre-coated material possesses. The granular form, moreover, facilitates automated transportation of the material and reduces dust pollution.

The product resulting from this invention will be used as a semifinished product for the colouring and pigmentation of powder paints or also used, after dissolving in a solvent, as a pigmented paste in the liquid paints industry or as a component for tinting finished paints or also for pigmenting and therefore colouring both thermoplastic and thermosetting plastics (e.g. polyethylene, polypropylene, polyethylene terephthalate PET, acrylonitrile-butadiene-styrene ABS, as well as polyurethanes of varying composition, and reinforced and unreinforced polyamides of varying composition).

In particular, compared to the coatings known in the art, the granular composition of the present invention is completely dust-free, has a high pigmentation effect (with a consequent reduction in the

- 5 -

cost of colouring), has optimum dispersion (i.e. no flocculation) and easy dissolution properties and is characterized by a high compatibility (i.e. may be used in different systems, such as for example in powder
5 paints instead of in plastics).

These and other objects, which will appear more clearly below, are achieved by a coating of organic or inorganic pigments with aldehyde or ketone resins, characterized in that it comprises a chemical compound
10 consisting of particles of solid organic and inorganic substances, both defined pigments, and aldehyde or ketone resins deposited on its surface.

The subject of the present invention therefore consists of a particle composition consisting of organic or inorganic pigments coated with at least one
15 aldehyde and/or ketone resin, said resin having an average molecular weight of between 800 and 2000 Da and melting point of between 70° and 130°C.

Thus in one aspect, the present invention provides a particle composition comprising a
20 pigment coated with an aldehyde resin or a ketone resin or both, wherein said resin has an average molecular weight of between 800 and 2000 Da and a melting point of between 70°C and 130°C, and wherein said composition contains from 80 to 20% by
25 weight of said pigment and from 80 to 20% by weight of said resin, and said composition is in the form of granules having a length of between 0.2 and 8.8 mm and a diameter of between 0.4 and 2.2 mm.

In another aspect, the present invention
30 provides a process for the preparation of a granular composition as described herein, the process comprising melting of the resin, wetting of the entire surface of the pigment with the melted

- 5a -

resin, extrusion of the mixture thus obtained, cooling thereof and subsequent granulation in the wet state and drying.

5 The term "aldehyde and/or ketone resin" is understood as meaning a condensation product of an aldehyde (preferably aliphatic aldehyde) or a ketone (preferably cyclohexanone or methylcyclohexanone), optionally with condensation products such as urea or
10 formaldehyde.

 These resins are well-known in the sector of colouring agents and are normally used in powder paint formulations, by simple physical mixing of the resin granules with the pigments, or in liquid paint formulations in solvent phase, by mixing the pigments
15 with resins dissolved in a solvent. Examples of aldehyde or ketone resins are, for example, the products distributed by BAF, such as Laropal®.

- 6 -

In particular, Laropal® A 101 and A 81 are condensation products of urea and aliphatic aldehydes while Laropal® K 80 is the condensation product of cyclohexanone.

5 According to a preferential aspect of the invention, the aldehyde and/or ketone have an average molecular weight of between 900 and 1400 Da and melting point of between 90° and 110°C.

10 The composition of the present invention normally comprises from 80% to 20% by weight of pigment and from 80 to 20% by weight of resin and may contain excipients and/or adjuvants such as mineral reinforcing fillers and/or dispersants. In the case of inorganic pigments, the composition preferably consists of 50 to 70% by
15 weight of pigment and 35% to 45% by weight of resin, even more preferably 55 to 65% by weight of pigment and 35 to 45% by weight of resin; in the case of organic pigments, it preferably consists of 15 to 40% by weight of pigment, 45 to 75% by weight of resin, 1 to 20% by
20 weight of mineral reinforcing fillers and 0.1 to 10% by weight of dispersants, even more preferably 20 to 35% by weight of pigment, 50 to 70% by weight of resin, 5 to 15% by weight of inert fillers and 1 to 7% by weight of dispersants. From among the mineral reinforcing
25 fillers, barium sulphate is preferably used; the dispersants may be selected from among epoxidized soybean oils and sorbitan esters; preferably ethoxylated sorbitan ester, marketed by Uniqema as Atmer 116™, is used.

30 The composition in question may be in the form of powder or granules. In the first case, the particles of powder may have dimensions of between 10 and 100μ;

- 7 -

in the second case, the granules may have a length of between 0.2 and 8.8 mm and diameter of between 0.4 and 2.2 mm, preferably a length of between 1.8 and 2.2 mm and diameter of between 1.0 and 1.8 mm; according to
5 one of the possible embodiments of the invention, the composition contains 80 to 1000 granules per gramme thereof.

The particle formulation according to the present invention may be produced by means of a method, the
10 first two steps of which are unvaried, irrespective as to whether the formulation is the form of granules rather than powder.

The pigment is mixed with the resin inside a container suitable for mixing powders and granulates.

15 The present invention includes all those organic and inorganic powders which may be defined as colouring pigments or substances which absorb part or all of the light spectrum and reflect the complementary part thereof, forming the visible colour.

20 The pigments tested, according to the invention, are listed below.

Iron oxide pigments, in all their shades of yellow, brown, red and black; in all their physical forms and grain categories.

25 Titanium oxide pigments in all the different inorganic surface treatments.

Chromium oxide pigments also co-precipitated with nickel and nickel titanates.

Black pigments from organic combustion.

30 Blue and green pigments derived from copper phthalocyanine, also chlorinated and brominated, in the various alpha, beta and epsilon crystalline forms.

- 8 -

Yellow pigments derived from lead sulphochromate.

Yellow pigments derived from lead bismuth vandate.

Orange pigments derived from lead sulphochromate molybdate.

5 Yellow pigments of an organic nature based on arylamides.

Orange pigments of an organic nature based on naphthol.

10 Orange pigments of an organic nature based on diketo-pyrrolo-pyrrole.

Red pigments based on manganese salts of azo dyes.

Red pigments based on manganese salts of beta-oxynaphthoic acid.

Red organic quinacridone pigments.

15 Red organic anthraquinone pigments.

The research work, which was intended to identify from among the various polymers which may be used those suitable for obtaining this pigment coating, resulted in the families of aldehyde and ketone resins with a molecular weight of between 800 and 2000 and with a melting point of between 70° and 130°C.

The present invention relates preferably to the 100% use of polymers which, at the temperature of 20°C, are in the solid state.

25 The present invention covers all those mixtures of those pigments with these resins where the relative ratio of pigment and resin is between 80 and 20% and vice versa.

30 The prepared mixture is introduced into a heated-chamber extruder.

The present invention also relates to the use of single-screw and twin-screw extruders.

- 9 -

The extrusion is preferably performed at an internal temperature of the extruder 5-20°C higher than the melting temperature of the aldehyde or ketone polymer used.

5 The melted material leaving the extruder is preferably cooled on a cooling belt and spread using cooled steel cylinders.

10 In the case of the powder formulation, the material is cooled to below 25°C and then flaked by means of an ordinary pin-type flaking machine.

 Then the material, in the form of flakes, is atomized using different mechanical systems including pin crushers.

15 An essential condition which characterizes and distinguishes the semifinished product is that the atomization operation is performed using cryogenic systems suitable for operation at operating temperatures of less than 10°C.

20 The transformation into atomized particles must take place at a temperature of below 20°C so that fracturing of the structure of the melted and resolidified resin is performed, but leaving both the organic and the inorganic pigment completely coated.

25 The atomization operation envisages the introduction of anti-caking agents and flow agents, such as silicon oxide and aluminium oxide powders, in an amount equal to less than 0.2%.

30 The material leaving the atomization system will undergo grading so as to produce a standardized granulometric distribution curve which is not in any case exceptional, for the purposes of the present invention.

- 10 -

The graded material is then boxed for final use, thereby forming the object of the present invention.

In the case of a granular formulation, on the other hand, the melted material leaving the extruder is conveyed into a die from where it is drawn with a constant cross-section and is cooled and granulated by means of a wet method using a water jet cutting action. Preferably the granules are produced by means of a water jet cutting granulator of the type produced by Gala Industries Inc. and described in International Patent Application WO 01/21371.

Drying of the granules may be performed by means of simple ventilation and also may be speeded up using centrifuges and filtration; in the preferred embodiment of the invention, in the case where the granulation step is performed by means of the abovementioned water jet cutting granulator, the granules are separated by the water on a vibrating screen and then dried on a spiral elevator.

According to a further aspect of the invention, the granule formulation thus obtained may be transferred to the atomization stage in order to produce a powder formulation.

In particular, in the case of formulations based on organic pigments, an aqueous solution of the dispersant is prepared (the water is preferably used in a quantity of between 10 and 20% relative to the total weight of the formulation); the resin is introduced into the mixer and is wetted with a quantity of about 50% of said solution; the pigment is introduced during mixing and the remaining amount of aqueous solution is

- 11 -

added; the inert filler is added and, after mixing, the product is discharged and then transferred to the extruder.

Mixing, both in the case of organic pigments and in the case of inorganic pigments, is normally performed at a speed of between 800 and 2200 rpm.

Use of the invention in powder paints

The coating according to the present invention may be advantageously used in powder paint formulations, as an alternative to pure pigments which are not pre-coated.

Their use ensures a more uniform quality of the colouring system and a reduction in the quantity of pigment originally used to promote the colouring potential which the pre-coated material possesses.

It is left to the technical expertise of the person using it to determine the exact amounts and the correct use of the specific pre-coated pigment for the end use for which the painting product is intended.

Use of the invention in liquid paints

The coating according to the present invention may be advantageously used in formulations of liquid solvent paints, after dilution in solvent or dilution in resins pre-diluted in a solvent.

The pre-dilution methods may be direct, such as mixing with helical vanes as well as energy transfer by means of an increase in the specific surface area and using balls of a varying nature and size.

The pastes thus obtained may form semifinished products suitable for the production of liquid solvent paints.

The coating, according to the present invention,

- 12 -

may be used without pre-dilution either in a solvent or in a resin dissolved in solvent for colouring or tinting (modifying colours) by means of simple addition to paints and corresponding dissolving both using
5 direct means, such as helical vanes, and by means of energy transfer via an increase in surface area and using balls of varying nature and size.

The coating according to the present invention is preferably used in formulations containing a
10 monopigment and may be lined with aldehyde and ketone resins in the weight ratios shown in Figure 2, the molecular weight of which ranges between 800 and 2000 with the melting point between 70° and 130°C, as can be seen from Figure 3.

15 The preparation process is such that this coating is obtained by means of extrusion of the resinous part onto the pigment using a hot process, at a temperature 5-20°C higher than the polymer melting temperature and with cooling in a thin layer using a belt and cooling
20 cylinder.

The process envisages atomization by means of cryogenic processes such that the transformation occurs below 20°C, with the result that atomization takes place by means of fracture of the structure of the
25 melted and resolidified resin, leaving however the pigment, be it organic or inorganic, completely coated.

It has been found in practice that the invention fulfils the task and achieves the predefined objects.

It has in fact been possible to provide a coating
30 which is able to make up for the lack of standardization of the elements which are added when melting the polymer of the powder paints, during

- 13 -

extrusion in order to incorporate the solid pigments.

The coating according to the present invention allows the production of coloured powder paints, with a degree of uniform quality, which is no longer dependent upon the environmental conditions in which the process of incorporating the pigment in the resin is performed, but is only the result of parameters which can be managed by the actual extrusion process.

This means that the pre-coated pigment no longer has an influence with the wettability properties of its surface and that the surface tension of the resin is uninfluent for the purposes of the uniformity and chromatic formation of the pigment mixture.

With the coating according to the present invention it is possible to overcome all the difficulties described above since the pre-coated pigment has eliminated all the effects associated with its pigment surface and is practically ready to be used also by means of simple dispersion in a solvent or even better in a solution of resins dissolved in solvent.

Obviously, the materials used, as well as the dimensions, may be any depending on the requirements and the state of the art.

Use of the invention in plastics

The monochromatic granulate of pre-coated pigment may be used to colour the plastics, polyethylene, polypropylene, PET, ABS and polystyrene as well as polyurethane elastomers of various formulations. It may be used individually and mixed together in order to produce a given colour.

The metered mixture of various monochromatic granules allows composition of the final colour

- 14 -

directly before the feeding step which converts the granules of plastic into the melted state for colouring and/or production of the final object.

5 In other words, the mixture of granules of different monochromatic colour allows the composition of a polychromatic colour by means of simple mixing. Hence it allows the composition of a colouring system based on monochromatic granules so as to obtain colours composed of various monochromatic pigments.

10 In the plastics sector, which this invention also embraces, hitherto master batches have been used for pigmentation and associated colouring.

15 These are mixtures of chromatic pigments with resin (similar to the resin used at the end), extruded and granulated.

These master batches, which are added in a small amount to the plastics before extrusion, pigment the mass of the plastic.

20 In some specific case of continuous and constant extrusions, always using the same material and same colour, it is possible to pigment the plastic by means of a liquid master batch where the pigment is pulverized in a liquid vehicle, such as plasticizers (polyacid esters).

25 The latter is fed onto the head of an extruder, before pigmentation by means of extrusion.

30 Never before has use been made of monopigment granules of pigments pre-coated with aldehyde or ketone resins, to be metered before the colouring extrusion of the plastic.

These granules may impart the final colour to the mass, without having to go through the complex

- 15 -

preparation procedure involving finished-colour master batches.

5 The object of the present invention is that of allowing metering of the quantity of pigment already pre-pulverized and rendering less harmful handling of the original pigments.

10 Moreover, owing to the great molecular mobility of the aldehyde or ketone resin based coating, it is possible to achieve the uniform colouring, with monochromatic semifinished products and with the granulates according to the present invention, of plastics, of powder paints and liquid paints.

15 Further characteristic features and advantages of the subject of the present invention will emerge more clearly from an examination of the description of a preferred, but not exclusive embodiment of the invention, illustrated by way of a non-limiting example in the accompanying drawings in which:

20 - Figure 1a shows a diagram of a possible plant for the production of the powder coating according to the present invention;

- Figure 1b shows a diagram of a possible plant for the production of the granule coating according to the present invention;

25 - Figure 2 is a diagram illustrating the range of use of the coating according to the invention;

- Figure 3 is a diagram illustrating the relative ratio of pigment and resin in the mixtures of the coating according to the present invention.

30 The examples which follow have a purely illustrative and non-limiting function and identify some of the possible mixtures of compounds to be

- 16 -

conveyed to the extruder in order to produce subsequently the particle compositions of the invention in both granule and powder form; water must obviously not be regarded as a component of the final formulation since it has been eliminated during drying, and the parts are to be regarded as by weight.

Example 1

- green pigment (based on copper phthalocyanine)
30
- 10 • barium sulphate
10
- atmer 116
5
- laropal A 81
15 55
- water
12

Example 2

- black pigment (carbon black)
20 25
- barium sulphate
10
- atmer 116
2
- 25 • laropal A 81
63
- water
14

Example 3

- 30 • yellow pigment (based on copper phthalocyanine)

- 17 -

60

- laropal A 81

40

Example 4

- 5 • blue pigment (based on iron phthalocyanine)

30

- laropal A 81

70

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A particle composition comprising a pigment coated with an aldehyde resin or a ketone resin or both, wherein said resin has an average molecular weight of between 800 and 2000 Da and a melting point of between 70°C and 130°C, and wherein said composition contains from 80 to 20% by weight of said pigment and from 80 to 20% by weight of said resin, and said composition is in the form of granules having a length of between 0.2 and 8.8 mm and a diameter of between 0.4 and 2.2 mm.
2. A particle composition according to claim 1, wherein said resin has an average molecular weight of between 900 and 1400 Da.
3. A particle composition according to claim 1 or 2, wherein said resin has a melting point of between 90°C and 110°C.
4. A particle composition according to any one of claims 1 to 3, wherein said aldehyde resin is the condensation product of an aliphatic aldehyde and urea.
5. A particle composition according to any one of claims 1 to 3, wherein said ketone resin is the condensation product of cyclohexanone or methylcyclohexanone.
6. A particle composition according to any one of claims 1 to 3, wherein said ketone resin is the condensation product of cyclohexanone or methylcyclohexanone with urea or formaldehyde.

7. A particle composition according to any one of claims 1 to 6, wherein said pigment is an organic pigment or an inorganic pigment.

8. A particle composition according to claim 7, wherein said pigment comprises an iron oxide pigment, a titanium oxide pigment, a chromium oxide pigment co-precipitated with nickel or nickel titanate, a black pigment from organic combustion, a blue or green pigment from copper phthalocyanine, a yellow pigment from lead sulphochromate or lead bismuth vanadate, an orange pigment from lead sulphochromate molybdate, a yellow pigment based on arylamide, an orange pigment based on naphthol, an orange pigment based on diketo-pyrrolo-pyrrole, a red pigment based on a manganese salt of an azo dye, a red pigment based on a manganese salt of a beta-oxynaphthoic acid, a red pigment based on quinacridone, or a red pigment based on anthraquinone, or any combination thereof.

9. A particle composition according to any one of claims 1 to 8, comprising 80 to 20% by weight of inorganic pigment and 80 to 20% by weight of resin.

10. A particle composition according to claim 9, comprising 50 to 70% by weight of inorganic pigment and 30 to 50% resin.

11. A particle composition according to claim 9, comprising 55 to 65% by weight of inorganic pigment and 35 to 45% by weight of said resin.

12. A particle composition according to any one of claims 1 to 8, comprising 15 to 40% by weight of organic pigment, 45 to 75% by weight of resin, 1 to 20% by weight of a mineral reinforcing filler and 0.1 to 10% by weight of a dispersant.
13. A particle composition according to claim 12, comprising 20 to 35% by weight of organic pigment, 50 to 70% by weight of resin, 5 to 15% by weight of a mineral reinforcing filler and 1 to 7% by weight of a dispersant.
14. A particle composition according to claim 12 or 13, wherein said mineral reinforcing filler is barium sulphate.
15. A particle composition according to any one of claims 12 to 14, wherein said dispersant comprises an epoxidized soybean oil or a sorbitan ester.
16. A particle composition according to claim 15, wherein said sorbitan ester is an epoxylated sorbitan ester.
17. A particle composition according to any one of claims 1 to 16, wherein said granules have a length of between 1.8 and 2.2 mm and diameter of between 1.0 and 1.8 mm.
18. A particle composition according to any one of claims 1 to 17, which contains from 80 to 1000 granules per gramme of composition.
19. Use of the composition defined in any one of claims 1 to 18 for the preparation of a powder paint, a liquid paint or a plastic.

20. A process for the preparation of a granular composition as defined in any one of claims 1 to 18, the process comprising melting of the resin, wetting of the entire surface of the pigment with the melted resin, extrusion of the mixture thus obtained, cooling thereof and subsequent granulation in the wet state and drying.
21. A process according to claim 20, wherein the extrusion is performed without an extruder having an internal temperature of 5°C to 20°C higher than the melting temperature of the resin.
22. A process according to claim 21, wherein the extruder is a single-screw or a twin-screw extruder.
23. A process according to claim 22, wherein the extruder is of the heated chamber type.
24. A process for the preparation of a granular composition according to any one of claims 20 to 23, wherein the melted material leaving the extruder is cooled and granulated using a wet method with a water jet cutting action.
25. A process for the preparation of a granular composition according to claim 24, wherein the granules are separated by water on a vibrating screen and then dried on a spiral elevator.
26. A process according to any one of claims 20 to 25, further comprising a granule atomization step.

1/3

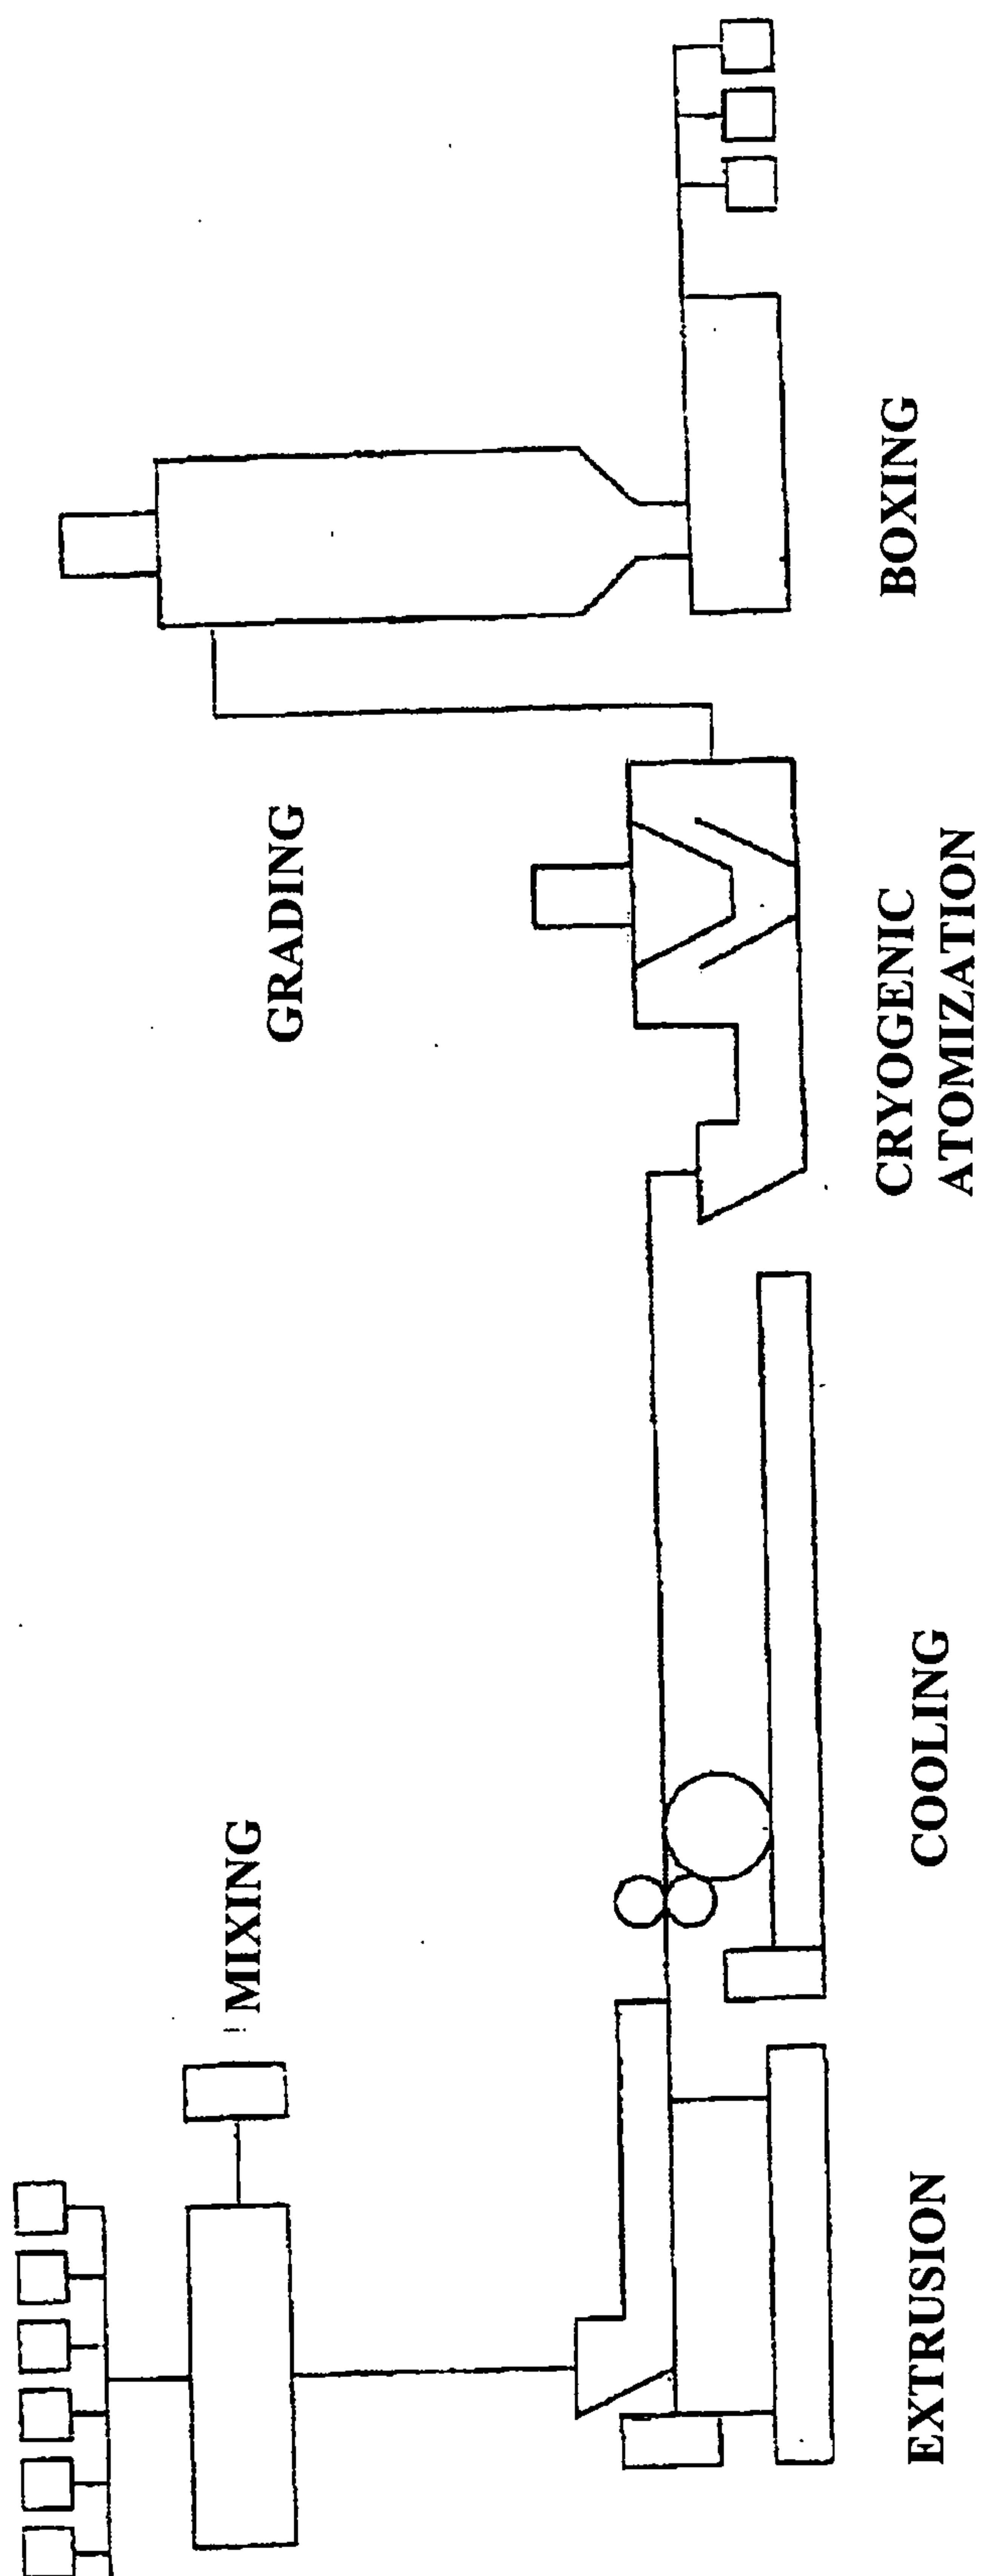


Fig. 1a

2/3

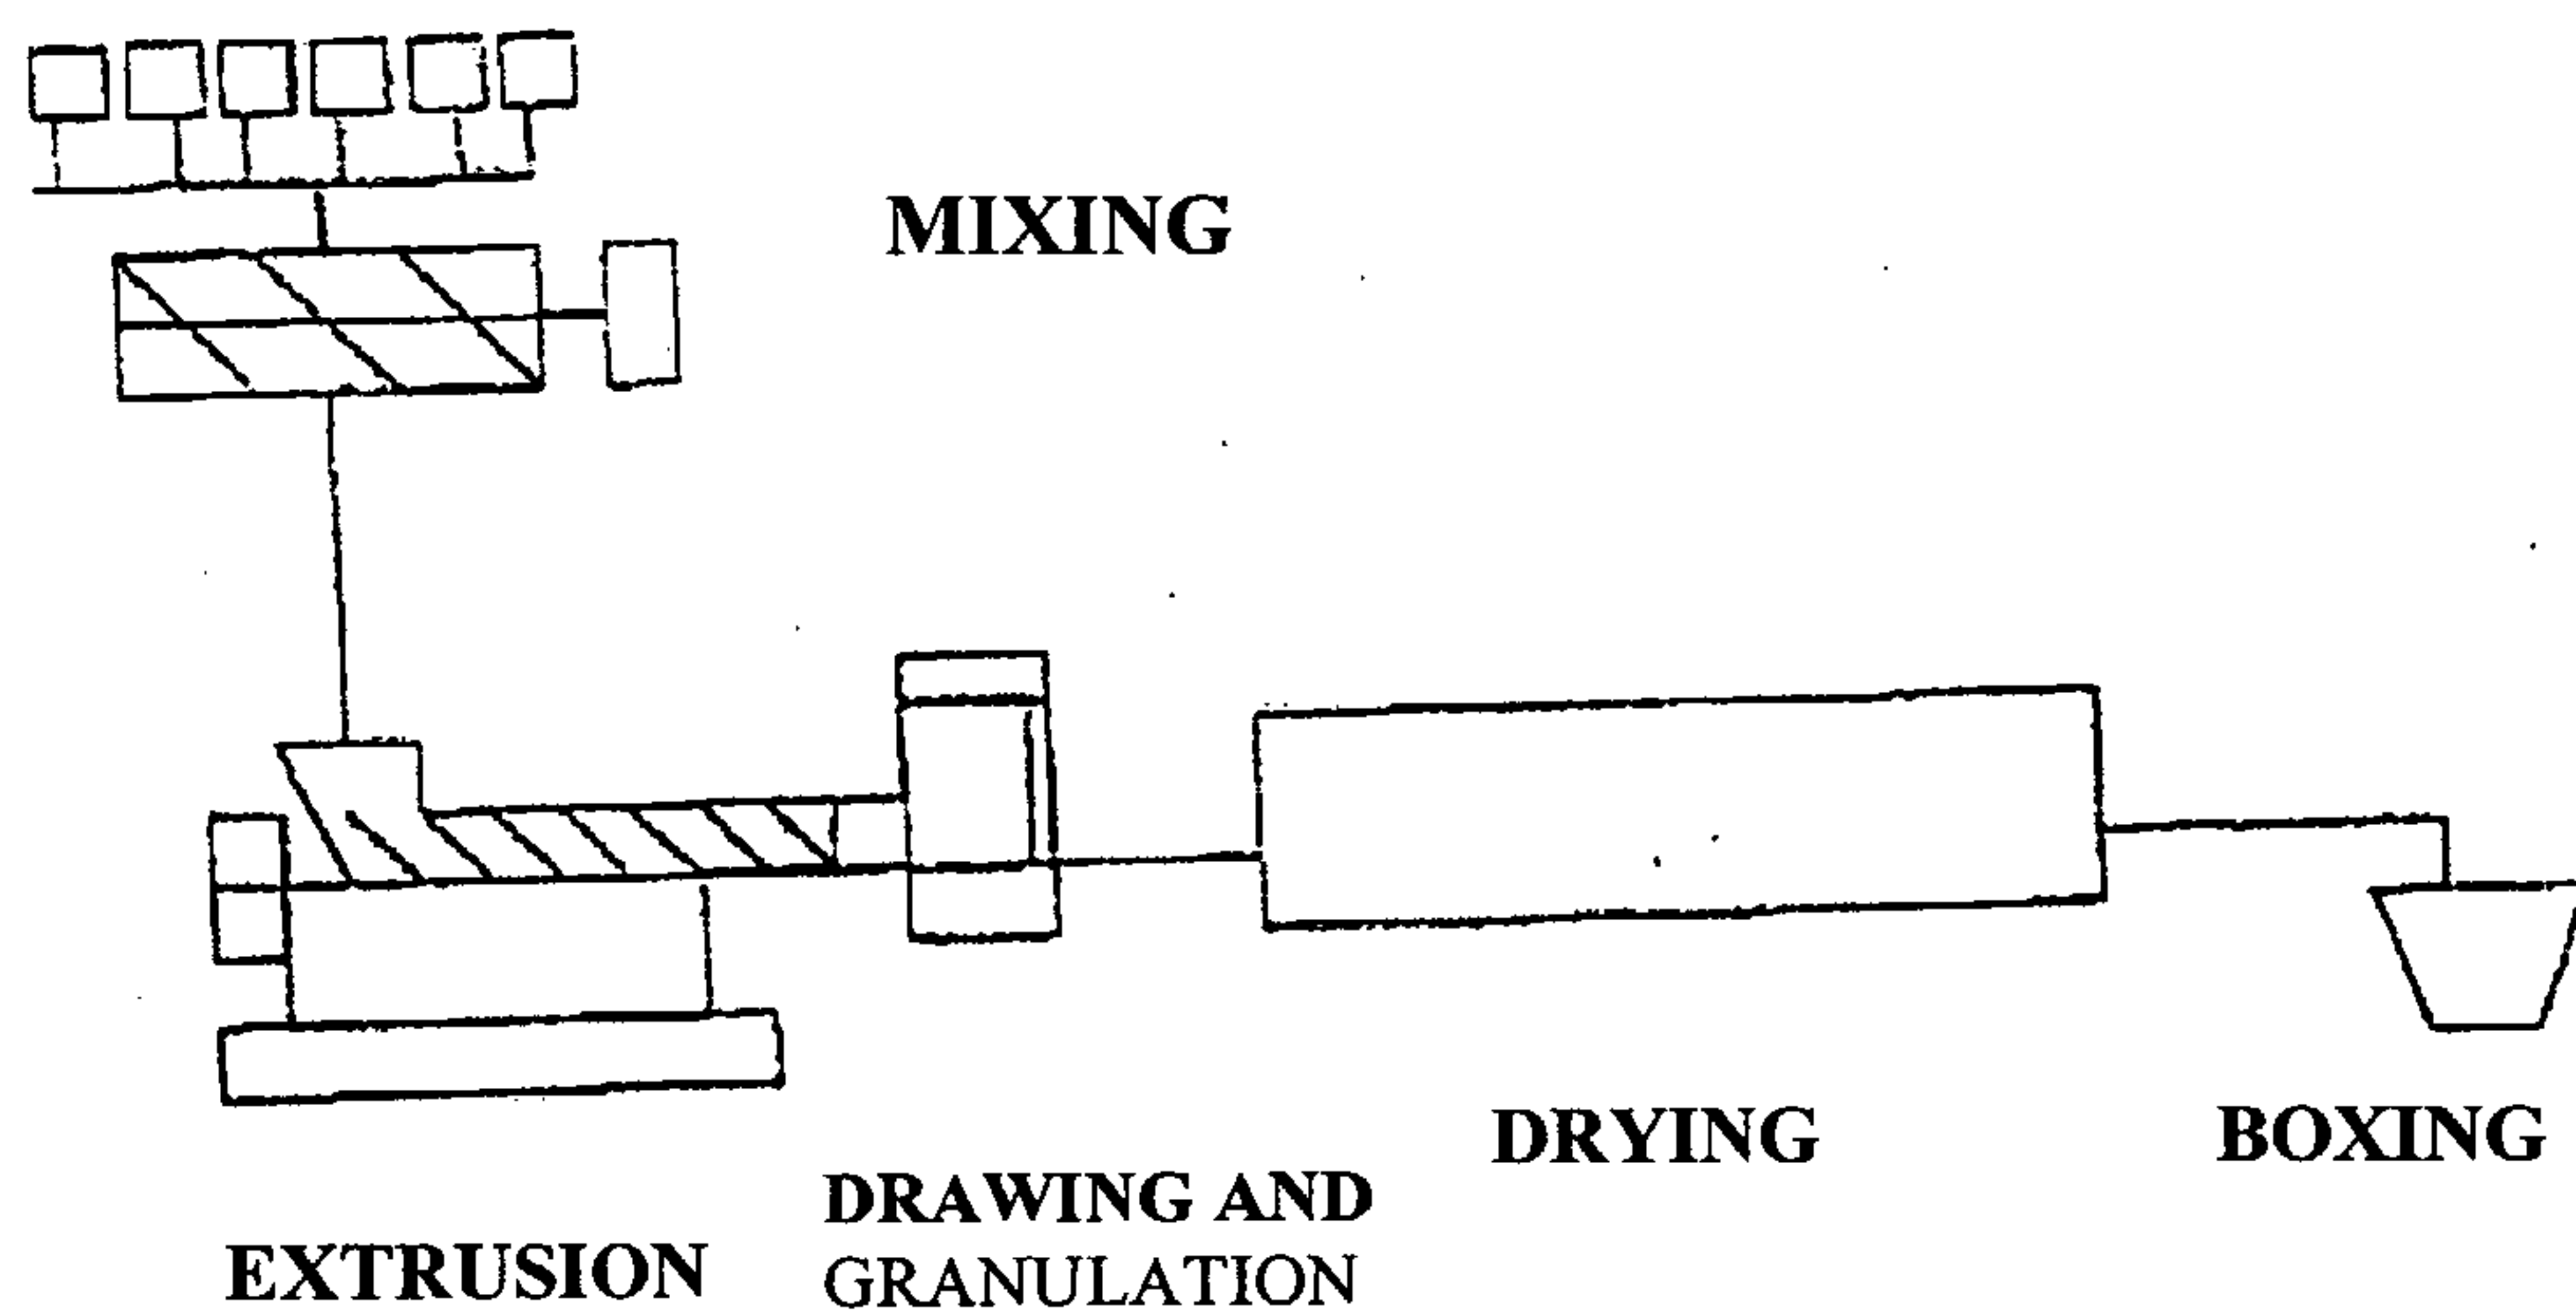


Fig. 1b

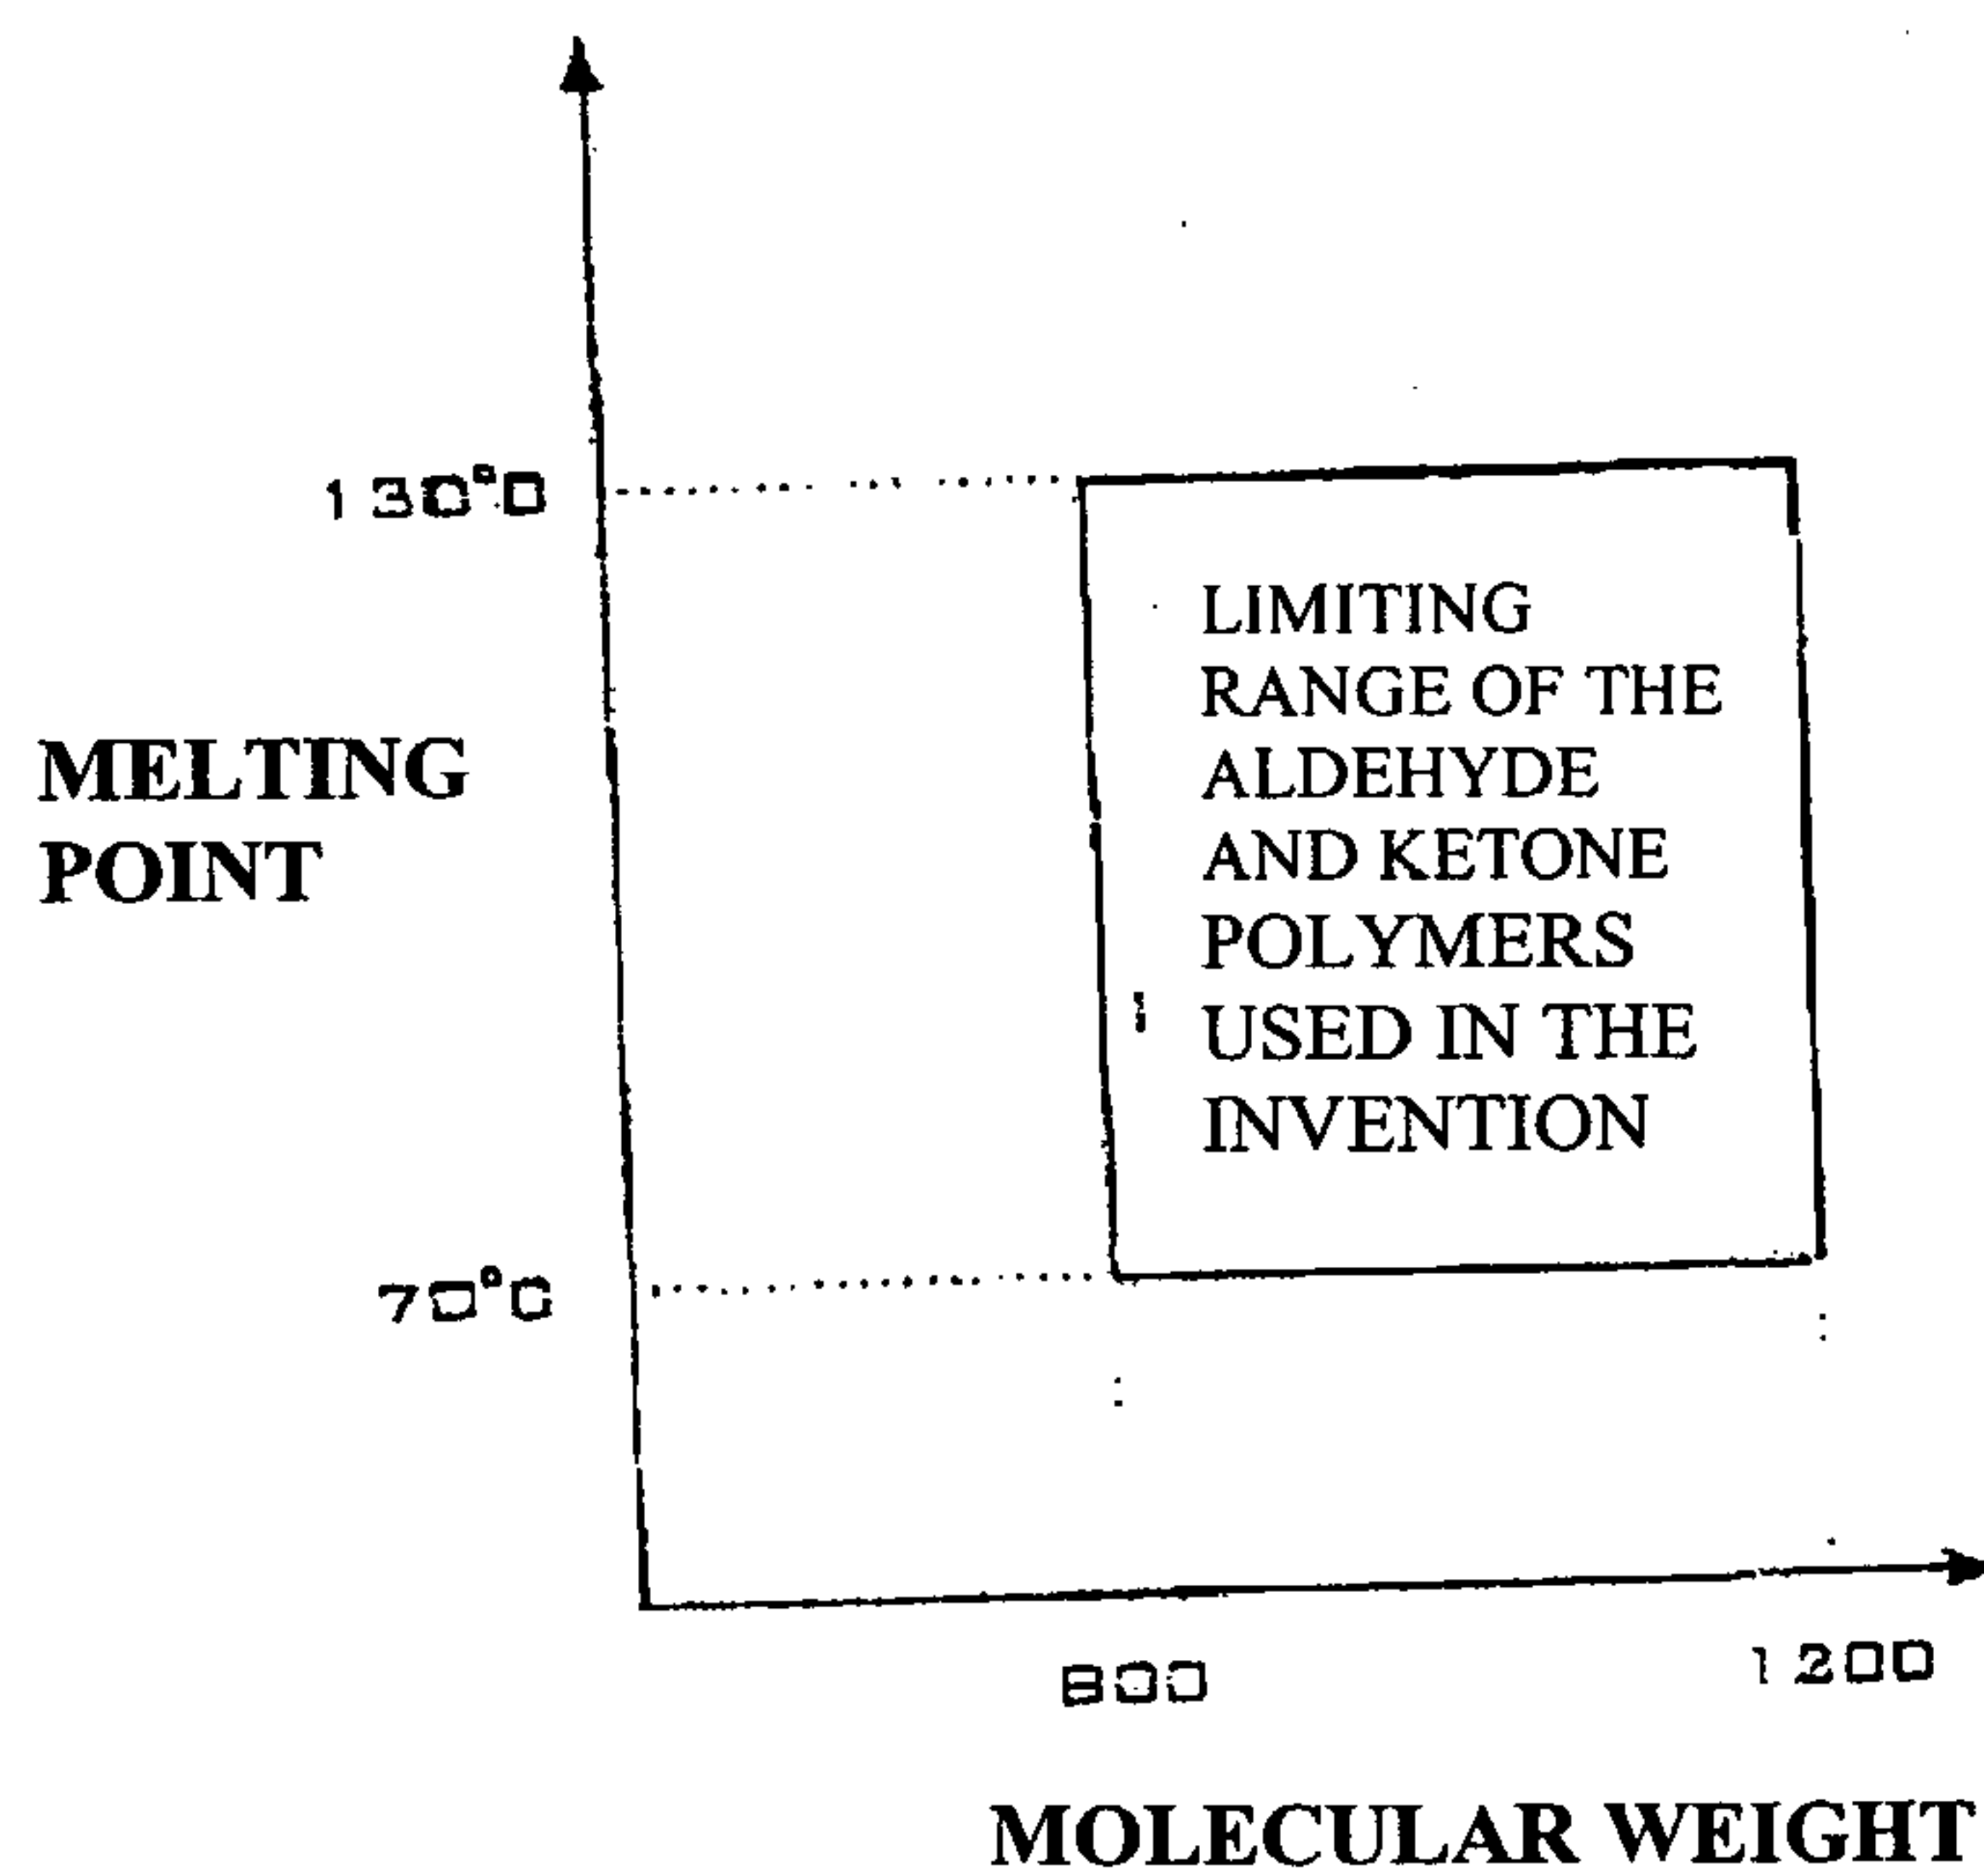


Fig. 2

3/3

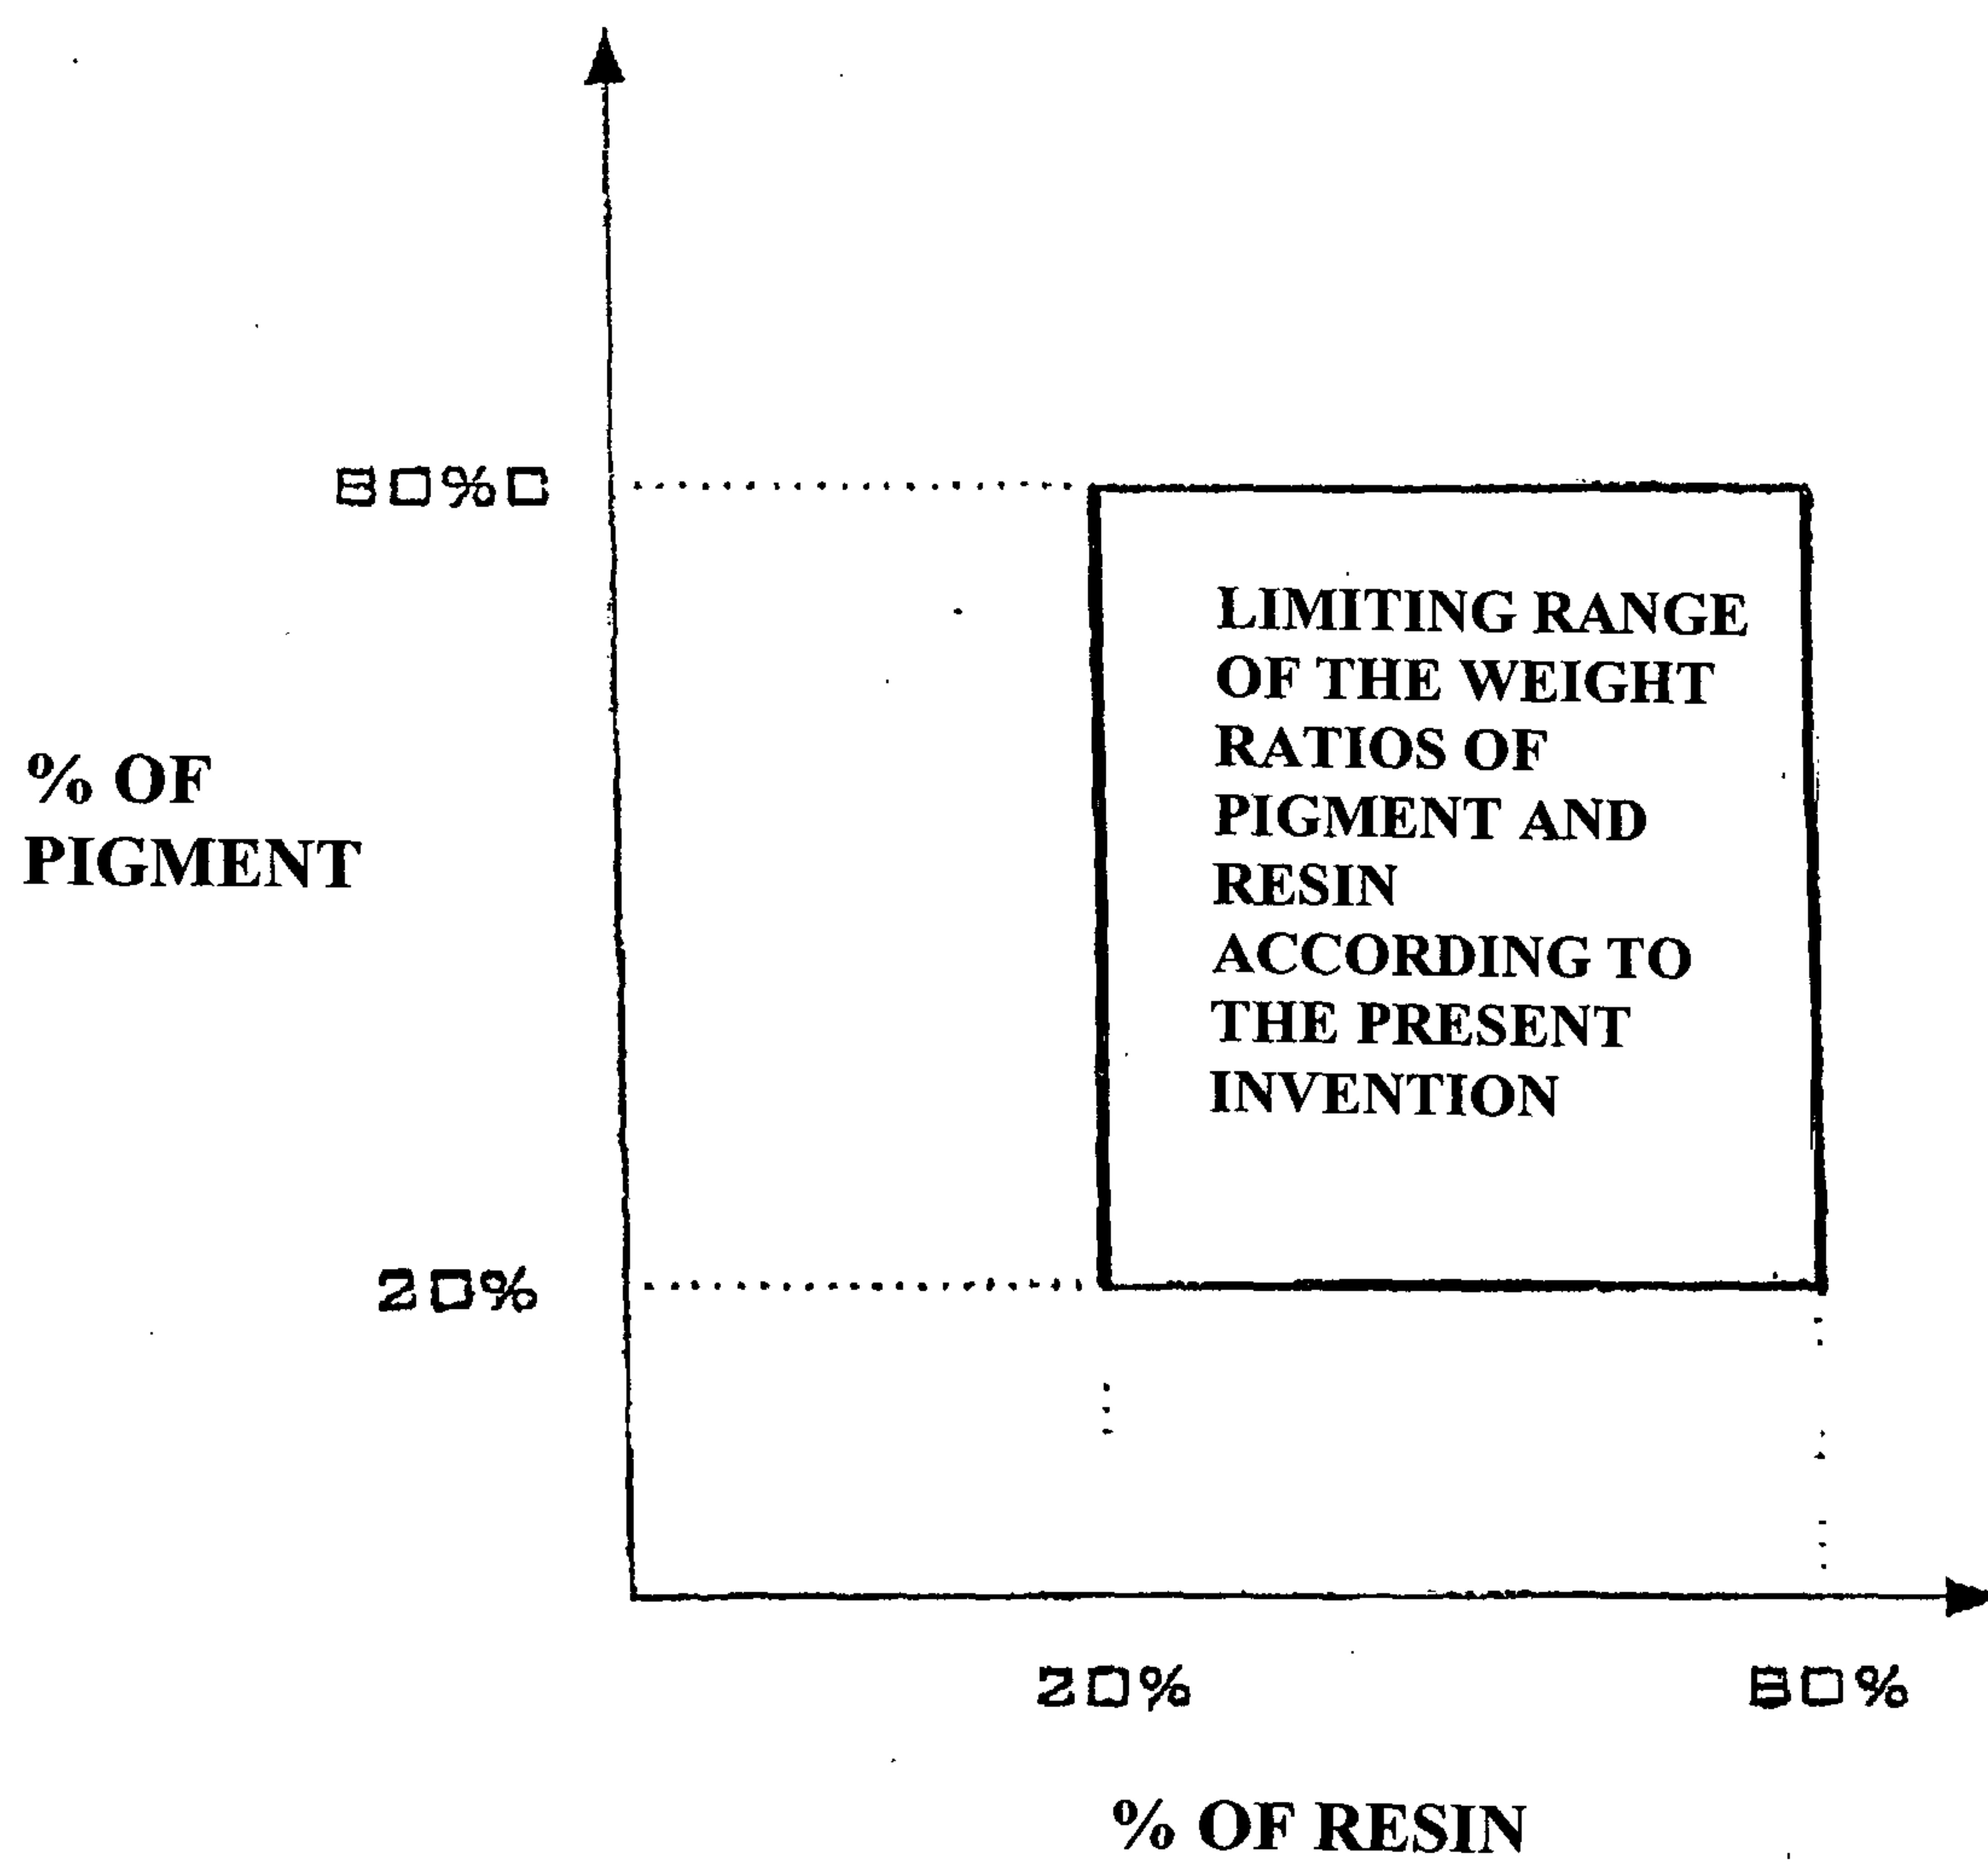


Fig. 3

