



HU000027441T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 027 441**(13) **T2****EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA(21) Magyar ügyszám: **E 05 816635**(22) A bejelentés napja: **2005. 12. 16.**

(96) Az európai bejelentés bejelentési száma:

EP 20050816635

(97) Az európai bejelentés közzétételi adatai:

EP 1840906 A1 **2006. 06. 22.**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 1840906 B1 **2015. 06. 03.**(51) Int. Cl.: **H01F 1/14**

(2006.01)

C22C 38/00

(2006.01)

H01F 11/53

(2006.01)

H01F 38/28

(2006.01)

H01F 41/02

(2006.01)

(86) A nemzetközi (PCT) bejelentési szám:

PCT/JP 05/023181

(87) A nemzetközi közzétételi szám:

WO 06064920

(30) Elsőbbségi adatok:

2004365957**2004. 12. 17.****JP**

(72) Feltaláló(k):

YOSHIZAWA, Yoshihito, Saitama 3660033 (JP)**NAOE, Masamu, Saitama 3600856 (JP)**

(73) Jogosult(ak):

HITACHI METALS, LTD., Minato-ku, Tokyo**105-8614 (JP)**

(74) Képviselő:

Szabó Zsolt, DANUBIA Szabadalmi és Jogi**Iroda Kft., Budapest**

(54)

Mágneses mag áramtranszformátorhoz, áramtranszformátor és wattóramérő

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 1 840 906 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
03.06.2015 Bulletin 2015/23

(51) Int Cl.:
H01F 1/14 ^(2006.01) **C22C 38/00** ^(2006.01)
H01F 38/28 ^(2006.01) **H01F 1/153** ^(2006.01)
H01F 41/02 ^(2006.01)

(21) Application number: **05816635.6**

(86) International application number:
PCT/JP2005/023181

(22) Date of filing: **16.12.2005**

(87) International publication number:
WO 2006/064920 (22.06.2006 Gazette 2006/25)

(54) **MAGNETIC CORE FOR CURRENT TRANSFORMER, CURRENT TRANSFORMER AND
WATTHOUR METER**

MAGNETKERN FÜR EINEN STROMTRANSFORMATOR, STROMTRANSFORMATOR UND
WATTSTUNDENZÄHLER

NOYAU MAGNETIQUE POUR TRANSFORMATEUR DE COURANT, TRANSFORMATEUR DE
COURANT ET WATTHEUREMETRE

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

• **NAOE, Masamu**
Saitama 3600856 (JP)

(30) Priority: **17.12.2004 JP 2004365957**

(74) Representative: **Strehl Schübel-Hopf & Partner**
Maximilianstrasse 54
80538 München (DE)

(43) Date of publication of application:
03.10.2007 Bulletin 2007/40

(56) References cited:
EP-A2- 0 635 853 EP-A2- 1 045 402
JP-A- 1 247 557 JP-A- 3 271 346
JP-A- 9 050 907 JP-A- 2000 119 821
JP-A- 2000 252 111 JP-A- 2001 052 933
JP-A- 2001 155 946 JP-A- 2004 218 037
JP-A- 2004 353 090 US-A1- 2001 032 685

(73) Proprietor: **HITACHI METALS, LTD.**
Minato-ku,
Tokyo 105-8614 (JP)

(72) Inventors:
• **YOSHIZAWA, Yoshihito**
Saitama 3660033 (JP)

EP 1 840 906 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

5 [0001] The present invention relates to a current transformer core suitable for detecting unsymmetrical-waveform alternating current such as half-wave, sinusoidal, alternating current, etc. and direct-current-superimposed alternating current, and a current transformer and a power meter using such core.

BACKGROUND OF THE INVENTION

10 [0002] Power meters used to detect the power consumption of electric appliances and facilities at homes and in industry are categorized into induction-type power meters and electronic power meters. Although induction-type power meters comprising rotating disks were conventionally predominant, the electronic power meters are recently finding wider use due to the development of electronics. Power meters adapted to conventional standards such as IEC62053-22, etc.
 15 cannot conduct the accurate detection of distorted-waveform current such as half-wave, sinusoidal, alternating current, etc., failing to measure power accurately. Accordingly, IEC62053-21, a power meter standard adapted to distorted waveforms (half-wave rectified waveforms), was enacted in Europe. In other countries than those in Europe, too, power meters such as present rotating-disk meters, etc. failing to accurately measure the power of distorted waveforms were discarded, and power meters adapted to IEC62053-21, which use current transformers (CTs) or Hall elements for current
 20 detection, have been being put to actual use. In the industrial fields such as inverters, etc., too, the current transformers have important role in the detection of distorted-waveform alternating current and direct-current-superimposed alternating current.

25 [0003] A current sensor using a Hall element comprises a Hall element disposed in a gap of a magnetic core, and a conductive wire for flowing current to be measured, which penetrates through a closed magnetic circuit of the magnetic core, to detect a magnetic field generated in the gap, which is substantially proportional to the current, by the Hall element, thereby detecting the current.

[0004] The current transformer (CT) usually comprises a magnetic core having a closed magnetic circuit, a primary winding for flowing current to be measured, which penetrates through the closed magnetic circuit, and a secondary winding in a relatively large number of turns. Fig. 8 shows the structure of a current transformer (CT)-type current sensor.
 30 The magnetic core is in a ring-type or assembled core-type shape, and a ring-type, toroidal core with windings can be made smaller with a reduced magnetic flux leakage, thereby enabling performance near a theoretical operation.

[0005] Ideal output current i obtained from alternating through-current I_0 under the condition of $R_L \ll 2\pi f \cdot L_2$ is I_0/N , wherein N is the number of a secondary winding, and output voltage E_0 is $I_0 \cdot R_L/N$, wherein R_L is load resistance. The output voltage E_0 is actually smaller than the ideal value due to a core loss, a leaked magnetic flux, etc. The sensitivity
 35 of the current transformer corresponds to E_0/I_0 , but this value is actually determined by a coupling coefficient of primary and secondary windings. $E_0 = I_0 \cdot R_L \cdot K/N$ is satisfied, wherein K is a coupling coefficient.

[0006] Although the coupling coefficient K is 1 in an ideal current transformer, K is about 0.95-0.99 in actual current transformers at R_L of 100Ω or less, under the influence of the internal resistance of windings, load resistance, a leaked magnetic flux, the non-linearity of a permeability, etc. Because the K value is low if there is a gap in a magnetic circuit,
 40 a toroidal core with no gap can provide an ideal current transformer having the largest degree of coupling. The larger cross section area S , the larger number N of a secondary winding, and the smaller load resistance R_L provide the K value closer to 1. This K value also varies depending on the through-current I_0 . In the case of micro-current I_0 of 100 mA or less, the K value tends to be low. Particularly when a low-permeability material is used for the magnetic core, this tendency is large. Accordingly, when the micro-current should be measured at high accuracy, a high-permeability material
 45 is used for the magnetic core.

[0007] A ratio error is a relative error of the measured value to the ideal value at each measurement point, indicating how the measured current is accurate. The coupling coefficient is correlated with the ratio error. A phase difference represents the accuracy of a waveform, indicating the phase deviation of the output waveform from the original waveform. The current transformer output usually has a leading phase. These two characteristics are particularly important to the
 50 current transformers used for integrating power meters, etc.

[0008] In the current transformer that should measure micro-current, materials having high initial permeability such as Parmalloy, etc. are generally used to have a high coupling coefficient K , and small ratio error and phase difference. The maximum through-current I_{0max} of the current transformer is defined as the maximum current with secured linearity, which is affected by load resistance, internal resistance, and the magnetic properties of core materials used. To enable
 55 the measurement of large current, the core materials preferably have as high saturation magnetic flux density as possible.

[0009] Known materials used for the current transformer cores include silicon steel, Parmalloy, amorphous alloys, Fe-based, nano-crystalline alloys, etc. Because inexpensive, high-magnetic-flux-density silicon steel sheets have low permeability, large hysteresis, and poor magnetization loop linearity, they suffer largely varying ratio error and phase dif-

ference, resulting in difficulty in providing high-accuracy current transformers. Further, having a large residual magnetic flux density, they cannot easily conduct the accurate measurement of unsymmetrical current such as half-wave, sinusoidal, current, etc.

[0010] The Fe-based amorphous alloys suffer large variations of a ratio error and a phase difference when used for the current transformer. JP 2002-525863 A discloses that because a Co-based, amorphous alloy heat-treated in a magnetic field has good magnetization curve linearity and small hysteresis, it exhibits excellent characteristics when used for a current transformer (CT) for detecting unsymmetrical-waveform current. Co-based, amorphous alloys having as low permeability as about 1500 and good magnetization curve linearity are used for current transformers (CTs) for current detection, which are adapted to the above IEC62053-21, a standard of power meters. However, the saturation magnetic flux densities of the Co-based, amorphous alloys are insufficiently as low as 1.2 T or less, and they are thermally unstable. Thus, there are problems as follows: the measurement is limited when biased with large current; they are not necessarily sufficient in size reduction and stability; and because their permeability cannot be increased so high from the aspect of magnetic saturation in view of direct current superposition, they have large ratio error and phase difference, important characteristics for current transformers. In addition, the Co-based, amorphous alloys are disadvantageous in cost because they contain a large amount of expensive Co.

[0011] Materials having relatively high permeability such as Parmalloy, etc. are used for current transformer cores in integrating power meters adapted to the conventional standards of IEC62053-22, etc. Such high-permeability materials can measure the power of positive-negative-symmetrical current and voltage waveform, but cannot measure the power of unsymmetrical-waveform current and distorted-waveform current accurately.

[0012] The Fe-based, nano-crystalline alloys having high permeability and excellent soft magnetic properties are used for magnetic cores of common-mode choke coils, high-frequency transformers, pulse transformers, etc. The typical compositions of the Fe-based, nano-crystalline alloys are Fe-Cu-(Nb, Ti, Zr, Hf, Mo, W, Ta)-Si-B, Fe-Cu-(Nb, Ti, Zr, Hf, Mo, W, Ta)-B, etc. described in JP 4-4393 B and JP 1-242755 A. These Fe-based, nano-crystalline alloys are usually produced by forming amorphous alloys from a liquid or gas phase by rapid quenching, and heat-treating them for micro-crystallization. It is known that the Fe-based, nano-crystalline alloys have as high saturation magnetic flux density and as low magnetostriction as those of the Fe-based amorphous alloys, meaning excellent soft magnetic properties. JP 1-235213 A, JP 5-203679 A and JP 2002-530854 A describe that the Fe-based, nano-crystalline materials are suitable for current sensors (current transformers) used in leakage circuit breakers, integrating power meters, etc.

[0013] However, current transformer cores made of high-permeability materials such as conventional Parmalloy and Fe-based, nano-crystalline, soft-magnetic alloys fail to detect current sufficiently because of magnetic saturation, particularly in the case of direct current bias. The cores of the Fe-based, nano-crystalline, soft-magnetic alloys having high saturation magnetic flux density and permeability are suitable for current transformers such as leakage circuit breakers, etc., but they have so small H_K that they cannot easily measure current in the case of direct current bias because of their magnetic saturation. In the case of a current transformer used for half-wave, sinusoidal, current, direct current of $I_{\max}/2\pi$ is superimposed, where $I_{\max}$ is a peak value of the half-wave, sinusoidal, current. Accordingly, the current transformer cores made of the conventional Fe-based, nano-crystalline, soft-magnetic alloys described in JP2002-530854 A, etc., which have as high permeability as 12000 or more, are magnetically saturated because of direct-current magnetic field bias. Thus, they are not suitable for the measurement of such unsymmetrical-waveform current.

[0014] Demand has thus become mounting for a magnetic material making it possible to measure the power of unsymmetrical-waveform current accurately. Even when unsymmetrical-waveform current such as half-wave, sinusoidal, current and direct current are superimposed, the accurate measurement of alternating current is demanded. Necessary to meet such demand is a current transformer core made of a magnetic material having a low residual magnetic flux density, small hysteresis, and good magnetization curve linearity, which is not easily saturable and generates a relatively large anisotropic magnetic field H_K .

[0015] EP 1 045 402 A2 discloses an Example for an alloy having a composition in line with the preamble of present claim 1.

OBJECTS OF THE INVENTION

[0016] Accordingly, an object of the present invention is to provide a current transformer core capable of accurately measuring the power of unsymmetrical-waveform current and distorted waveform current.

[0017] Another object of the present invention is to provide a small, inexpensive, thermally stable current transformer core with a wide current-measuring range.

[0018] A further object of the present invention is to provide a current transformer and a power meter using such magnetic core.

DISCLOSURE OF THE INVENTION

[0019] As a result of intense research in view of the above objects, the inventors have found that (a) an Fe-based, nano-crystalline alloy containing increased amounts of Co and/or Ni, at least part or all of its structure being composed of crystal grains having an average particle size of 50 nm or less, has a magnetic flux density B_{8000} of 1.2 T or more at 8000 Am⁻¹, an anisotropic magnetic field H_K of 150-1500 Am⁻¹, a squareness ratio B_r/B_{8000} of 5% or less, and an alternating-current specific initial permeability μ_r of 800-7000 at 50 Hz and 0.05 Am⁻¹, and that (b) a core made of this alloy exhibits excellent characteristics when used for a current transformer for detecting unsymmetrical-waveform current and direct-current-biased current. The present invention has been completed based on such findings.

[0020] The current transformer core of the present invention is defined in claim 1. The subclaims relate to preferred embodiments.

[0021] The power meter of the present invention multiplies the current value obtained by the above current transformer and voltage at that time to calculate power used.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022]

Fig. 1 is a graph showing the magnetic flux density B_{8000} of an alloy of $Fe_{83-x}Co_xCu_1Nb_7Si_1B_8$ (by atomic %) at 8000 Am⁻¹, which is used for the magnetic core of the present invention for a current transformer.

Fig. 2 is a graph showing the squareness ratio B_r/B_{8000} of an alloy of $Fe_{83-x}Co_xCu_1Nb_7Si_1B_8$ (by atomic %), which is used for the magnetic core of the present invention for a current transformer.

Fig. 3 is a graph showing the coercivity H_c of an alloy of $Fe_{83-x}Co_xCu_1Nb_7Si_1B_8$ (by atomic %), which is used for the magnetic core of the present invention for a current transformer.

Fig. 4 is a graph showing the alternating-current specific initial permeability μ_r of an alloy of $Fe_{83-x}Co_xCu_1Nb_7Si_1B_8$ (by atomic %) at 50 Hz and 0.05 Am⁻¹, which is used for the magnetic core of the present invention for a current transformer.

Fig. 5 is a graph showing the anisotropic magnetic field H_K of an alloy of $Fe_{83-x}Co_xCu_1Nb_7Si_1B_8$ (by atomic %), which is used for the magnetic core of the present invention for a current transformer.

Fig. 6 is a graph showing the direct-current B-H loops of a magnetic core of an $Fe_{53.8}Co_{25}Cu_{0.7}Nb_{2.6}Si_9B_9$ alloy (by atomic %) used in the current transformer of the present invention and a magnetic core of a conventional Co-based, amorphous alloy.

Fig. 7 is a graph showing the dependency of the alternating-current specific initial permeability μ_r at 50 Hz of a magnetic core of an $Fe_{53.8}Co_{25}Cu_{0.7}Nb_{2.6}Si_9B_9$ alloy (by atomic %) used in the current transformer of the present invention on a magnetic field.

Fig. 8 is a perspective view showing one example of the current transformer (CT)-type current sensor of the present invention.

Fig. 9 is a graph showing an anisotropic magnetic field H_K in a B-H loop in the difficult magnetization axis of the current transformer core.

DESCRIPTION OF THE BEST MODE OF THE INVENTION

[1] Fe-based, nano-crystalline alloy**(1) Composition**

[0023] The Fe-based, nano-crystalline alloy for the current transformer core of the present invention has a composition represented by the general formula: $Fe_{100-x-a-y-c}M_xCu_aM'_yX'_c$ (by atomic %), wherein M is Co and/or Ni, M' is at least one element selected from the group consisting of V, Ti, Zr, Nb, Mo, Hf, Ta and W, X' is Si and/or B, and x, a, y and c are numbers satisfying $15 \leq x \leq 40$, $0.1 \leq a \leq 3$, $1 \leq y \leq 10$, $2 \leq c \leq 30$, and $7 \leq y + c \leq 31$, respectively.

[0024] M is Co and/or Ni, having functions of increasing induced magnetic anisotropy, improving the linearity of a B-H loop, adjusting an anisotropic magnetic field H_K , and enabling operation as a current transformer even with biased direct current in cases where half-wave, sinusoidal, alternating current, etc. are measured, etc. The M content x should generally meet $10 \leq x \leq 50$. When x is less than 10 atomic %, H_K is so small that the magnetic core is saturated when direct current is superimposed, resulting in difficulty in current measurement. When x exceeds 50 atomic %, H_K becomes too large, resulting in too much increase in the absolute values of a phase difference and a ratio error. The M content x of the present invention meets $15 \leq x \leq 40$, preferably $18 \leq x \leq 37$, most preferably $22 \leq x \leq 35$. The x in a range of 10-50 provides a high-accuracy, well-balanced current transformer, because accurate current measurement can be conducted

even when direct current is superimposed.

[0025] The Cu content a meets $0.1 \leq a \leq 3$. When a is less than 0.1 atomic %, there is a large phase difference. When a exceeds 3 atomic %, the core material becomes brittle, resulting in difficulty in forming the magnetic core. The Cu content a preferably meets $0.3 \leq a \leq 2$.

[0026] M' is an element for accelerating the formation of an amorphous phase. M' is at least one element selected from the group consisting of V, Ti, Zr, Nb, Mo, Hf, Ta and W, and its amount y is in a range of $1 \leq y \leq 10$. When y is less than 1 atomic %, a fine crystal grain structure cannot be obtained after heat treatment, resulting in increase in the absolute values of a phase difference and a ratio error. When y exceeds 10 atomic %, H_K decreases because of drastic decrease in a saturation magnetic flux density, resulting in difficulty in current measurement by magnetic saturation in the case of direct current bias. The preferred M' content y meets $1.5 \leq y \leq 9$.

[0027] X' is also an element for accelerating the formation of an amorphous phase. X' is Si and/or B, and its amount c is in a range of $2 \leq c \leq 30$. When the X' content c is less than 2 atomic %, the absolute values of a phase difference and a ratio error increase. When it exceeds 30 atomic %, H_K decreases because of drastic decrease in a saturation magnetic flux density, resulting in difficulty in current measurement by magnetic saturation in the case of direct current bias. The X' content c meets preferably $5 \leq c \leq 25$, more preferably $7 \leq c \leq 24$.

[0028] The sum of the M' content y and the X' content c meets the condition of $7 \leq y + c \leq 31$. When $y + c$ is less than 7 atomic %, the phase difference is extremely large. When it exceeds 31 atomic %, the saturation magnetic flux density decreases. $y + c$ meets preferably $10 \leq y + c \leq 28$, more preferably $13 \leq y + c \leq 27$.

[0029] Particularly when the B content is 4-12 atomic %, a current transformer core with a small phase difference is preferably obtained. The B content is particularly 7-10 atomic %. When the Si content is 0.5-17 atomic %, the absolute values of a phase difference and a ratio error are so small that high-accuracy current measurement can be conducted even when biased with half-wave sinusoidal or direct current during measuring alternating current. The Si content is particularly 0.7-5 atomic %.

[0030] To adjust the corrosion resistance, the phase difference and the ratio error of the alloy, part of M' may be substituted by at least one element selected from the group consisting of Cr, Mn, Sn, Zn, In, Ag, Au, Sc, platinum-group elements, Mg, Ca, Sr, Ba, Y, rare earth elements, N, O and S, and to adjust the phase difference and the ratio error, part of X' may be substituted by at least one element selected from the group consisting of C, Ge, Ga, Al, Be and P.

(2) Production method

[0031] The current transformer core of the present invention is produced by rapidly quenching an alloy melt having said composition by a rapid quenching method such as a single roll method, etc. to form a thin amorphous alloy ribbon, slitting the ribbon if necessary, winding it to a toroidal core, heat-treating the toroidal core at a crystallization temperature or higher to form fine crystals having an average particle size of 50 nm or less. Although the thin amorphous alloy ribbon before heat treatment preferably does not contain a crystal phase, it may partially contain a crystal phase. Although the rapid quenching method such as a single roll method, etc. may be conducted in the atmosphere when no active metals are contained, it is conducted in an inert gas such as Ar, He, etc. or in vacuum when active metals are contained. It may also be produced in an atmosphere containing a nitrogen gas, a carbon monoxide gas or a carbon dioxide gas. The surface roughness R_a of the thin alloy ribbon is preferably as small as possible. Specifically, it is preferably 5 μm or less, more preferably 2 μm or less.

[0032] When an insulating layer is formed on at least one surface of the thin alloy ribbon by coating of SiO_2 , MgO , Al_2O_3 , etc., a chemical conversion treatment, an anode oxidation treatment, etc., if necessary, high accuracy is achieved in the measurement of current containing high-frequency components. The thickness of the insulating layer is preferably 0.5 μm or less, to avoid decrease in core space factor.

[0033] After the thin amorphous alloy ribbon is wound to form a toroidal core, heat treatment is conducted in an inert gas such as an argon gas, a helium gas, a nitrogen gas, etc. or in vacuum to obtain a magnetic core with little performance variation. A magnetic field having enough intensity to saturate the alloy (for instance, 40 kA m^{-1} or more) is applied during at least part of the heat treatment, to provide the core with magnetic anisotropy. The direction of a magnetic field applied is aligned with the height of a toroidal core. The magnetic field applied may be a direct-current magnetic field, an alternating-current magnetic field, or a pulse magnetic field. The magnetic field is usually applied at a temperature of 200°C or higher for 20 minutes or more. Also, the magnetic field is applied during temperature elevation, keeping at a constant temperature and cooling, to provide a current transformer with a small squareness ratio, improved linearity of the B-H loop, and small absolute values of a phase difference and a ratio error. On the contrary, when no magnetic field is applied during the heat treatment, the resultant current transformer has extremely poor performance.

[0034] The highest temperature during the heat treatment is a crystallization temperature or higher, specifically 450-700°C. In the case of a heat treatment pattern comprising a constant-temperature period, the constant-temperature period is usually 24 hours or less, preferably 4 hours or less from the aspect of mass production. An average temperature-elevating speed is preferably 0.1-100°C/minute, more preferably 0.1-50°C/minute, during the heat treatment. An average

cooling speed is preferably 0.1-50°C/minute, more preferably 0.1-10°C/minute. The cooling is conducted to room temperature. This heat treatment provides the current transformer with particularly improved B-H loop linearity, small phase difference, and small absolute value variation of a ratio error.

[0035] The heat treatment may be conducted by one step or many steps. When a large magnetic core is heat-treated, or when many magnetic cores are heat-treated, it is preferable to proceed crystallization slowly by elevating the temperature at a low speed near the crystallization temperature, or keeping the temperature near the crystallization temperature. This is to avoid that the temperature of the magnetic core is elevated too much by heat generation during the crystallization, leading to the deterioration of characteristics. The heat treatment is preferably conducted in an electric furnace, but the alloy may be heated by flowing direct current, alternating current or pulse current through the alloy.

[0036] The resultant magnetic core is preferably contained in a stress-free insulating case of phenol resins, etc. to avoid the deterioration of performance, but it may be impregnated or coated with a resin, if necessary. A detection wire is wound around the case containing the magnetic core to provide a current transformer. The current transformer core of the present invention exhibits the maximum performance for direct-current-superimposed current, particularly suitable for a current transformer for an integrating power meter adapted to IEC62053-21, a standard usable for distorted waveform.

(3) Crystal structure

[0037] The Fe-based, nano-crystalline alloy for the current transformer core of the present invention has crystal grains having an average particle size of 50 nm or less at least partially or entirely. The percentage of the crystal grains is 30% or more, preferably 50% or more, particularly 60% or more, of the alloy structure. An average crystal grain size desirable for providing the current transformer core with small absolute values of a phase difference and a ratio error is 2-30 nm.

[0038] The crystal grains in the Fe-based, nano-crystalline alloy have a body-cubic crystal (bcc) structure mainly based on FeCo or FeNi, in which Si, B, Al, Ge, Zr, etc. may be dissolved, and which may have a regular lattice. Also, the alloy may partially have a face-center cubic (fcc) phase containing Cu. The alloy is preferably free from a compound phase, but it may contain the compound phase if it is in a small amount.

[0039] When the alloy has a phase other than the crystal grains, that phase is mainly an amorphous phase. The existence of the amorphous phase around crystal grains suppresses the crystal grains from growing, thereby making them finer, and providing the alloy with higher resistivity and smaller magnetization hysteresis. Thus, the current transformer is provided with improved phase difference.

(4) Properties

(a) Magnetic flux density

[0040] The Fe-based, nano-crystalline alloy should have a magnetic flux density B_{8000} at 8000 Am⁻¹ of 1.2 T or more. When B_{8000} is less than 1.2 T, an anisotropic magnetic field H_K cannot be increased, so that the current transformer fails to exhibit sufficient characteristics in applications in which large direct-current bias is used, or in applications in which large current is measured. By adjusting the alloy composition, B_{8000} can be 1.6 T or more, further 1.65 T or more.

(b) Anisotropic magnetic field

[0041] The anisotropic magnetic field H_K is a physical parameter indicating the saturated magnetic field of a magnetic core, which corresponds to a flexion of the B-H loop, as shown in Fig. 9. The current transformer core of the present invention has an anisotropic magnetic field H_K of 150-1500 Am⁻¹. With an anisotropic magnetic field H_K in this range in addition to a high saturation magnetic flux density, the current transformer core has a B-H loop with small hysteresis and excellent linearity.

(c) Squareness ratio

[0042] The Fe-based, nano-crystalline alloy should have a squareness ratio B_r/B_{8000} of 5% or less. When B_r/B_{8000} exceeds 5%, the current transformer has large absolute values of a phase difference and a ratio error, resulting in deteriorated characteristics, and more variations of current detection characteristics after the measurement of large current. By adjusting the alloy composition, B_r/B_{8000} can be 3% or less, further 2.5% or less. B_r represents a residual magnetic flux density, and B_{8000} represents a magnetic flux density when a magnetic field of 8000 Am⁻¹ is applied.

(d) Alternating-current specific initial permeability

[0043] The Fe-based, nano-crystalline alloy has an alternating-current specific initial permeability μ_r of 800-7000 at 50 Hz and 0.05 Am^{-1} . The current transformer core made of the Fe-based, nano-crystalline alloy having such alternating-current specific initial permeability μ_r can perform current transformation with small phase difference and small variation of the absolute value of a ratio error, in current measurement biased with half-wave sinusoidal current or direct current. By adjusting the alloy composition, the alternating-current specific initial permeability μ_r can be 5000 or less, further 4000 or less.

[2] Current transformer and power meter

[0044] The current transformer of the present invention comprises the above magnetic core, a primary winding, at least one secondary detection winding, and a load resistor parallel-connected to the secondary detection winding. The primary winding is usually one turn penetrating the core. The current transformer of the present invention can measure half-wave, sinusoidal current, direct-current-biased current, etc. with small absolute values of a phase difference and a ratio error, easy correction and high accuracy. Connected to the detection winding of the current transformer of the present invention is a resistor variable depending on current specification. Particularly, the current transformer of the present invention can perform high-accuracy measurement of half-wave, sinusoidal, alternating current with a phase difference of 5° or less in a rated current range and the absolute value of a ratio error within 3%. Further, the current transformer of the present invention is better in temperature characteristics than conventional ones using Permally or Co-based, amorphous alloys.

[0045] The power meter comprising the current transformer of the present invention is adapted to IEC62053-21, a standard usable for distorted waveforms (half-wave rectified waveforms), so that it can perform power measurement of distorted-waveform currents.

[0046] The present invention will be explained in more detail referring to Examples below without intension of restricting the present invention thereto.

Example 1

[0047] An alloy melt of $\text{Fe}_{83-x}\text{Co}_x\text{Cu}_1\text{Nb}_7\text{Si}_1\text{B}_8$ (by atomic %) was rapidly quenched by a single roll method, to obtain a thin amorphous alloy ribbon of 5 mm in width and $21 \mu\text{m}$ in thickness. This thin amorphous alloy ribbon was wound to a toroidal core having an outer diameter of 30 mm and an inner diameter of 21 mm. The magnetic core was placed in a heat treatment furnace filled with a nitrogen gas, to carry out a heat treatment while applying a magnetic field of 280 kAm^{-1} in a direction perpendicular to the magnetic circuit of the magnetic core (in the width direction of the thin alloy ribbon, or in the height direction of the magnetic core). A heat treatment pattern used comprised temperature elevation at $10^\circ\text{C}/\text{minute}$, keeping at 550°C for 1 hour, and cooling at $2^\circ\text{C}/\text{minute}$. Observation by an electron microscope revealed that the heat-treated alloy had a structure, about 70% of which was occupied by crystal grains having a particle size of about 10 nm and a body-cubic crystal structure, part of the crystal phase having a regular lattice. The remainder of the structure was mainly an amorphous phase. An X-ray diffraction pattern indicated peaks corresponding to a body-cubic crystal phase.

[0048] This $\text{Fe}_{83-x}\text{Co}_x\text{Cu}_1\text{Nb}_7\text{Si}_1\text{B}_8$ (by atomic %) alloy was measured with respect to a magnetic flux density B_{8000} at 8000 Am^{-1} , a squareness ratio B_r/B_{8000} , coercivity H_c , an alternating-current specific initial permeability μ_r at 50 Hz and 0.05 Am^{-1} , and an anisotropic magnetic field H_K . The results are shown in Figs. 1-5. This alloy exhibited a relatively high magnetic flux density B_{8000} when Co was in a range of 3-50 atomic %. The squareness ratio B_r/B_{8000} was as low as 5% or less when Co was in a range of 3-50 atomic %. The coercivity H_c was relatively low when Co was in a range of 3-50 atomic %, but drastically increased when Co exceeded 50 atomic %. The alternating-current specific initial permeability μ_r decreased as the amount of Co increased, reaching 7000 or less when Co was 3 atomic % or more, and less than 800 when Co exceeded 50 atomic %. The anisotropic magnetic field H_K increased as the amount of Co increased, reaching 150 Am^{-1} or more when Co was 3 atomic % or more, and 1500 Am^{-1} when Co was 50 atomic %.

[0049] The magnetic core (x = 25 atomic %) was provided with a one-turn primary winding, a 2500-turn secondary detection winding, and a load resistor of 100Ω parallel-connected to the secondary detection winding, to produce a current transformer. Sinusoidal alternating current of 50 Hz and 30A was supplied to the primary winding to measure a phase difference and a ratio error (expressed by absolute value) at 23°C . As a result, the phase difference θ was 0.5° , and the ratio error RE was 0.1 %, at the Co content x of 0 atomic %. Also, the phase difference θ was 1.3° , and the ratio error RE was 0.2%, at the Co content x of 16 atomic %. The phase difference θ was 2.5° , and the ratio error RE was 1.7%, at the Co content x of 25 atomic %. The phase difference θ was 2.6° , and the ratio error RE was 1.1 %, at the Co content x of 30 atomic %. Further, how well half-wave, sinusoidal, alternating current having a wave height of 30A could be measured was evaluated by the following standards. The results are shown in Table 1.

Good: Measured accurately.
 Fair: Measured without accuracy.
 Poor: Could not be measured.

Table 1

Co Content x (by atomic %)	0	1	3	16	25	30	40	50	70	80
Measurement	Poor	Poor	Fair	Good	Good	Good	Good	Good	Poor	Poor

[0050] The current transformer core of the present invention made of the Fe-based, nano-crystalline alloy having a Co content x of 10-50 was able to measure half-wave, sinusoidal, alternating current and direct-current-superimposed current. It also had as small a phase difference as 3° or less, and as small a ratio error as 2% or less as an absolute value.

Example 2

[0051] Alloy melts having the compositions shown in Table 2 were rapidly quenched by a single roll method in an Ar atmosphere, to obtain thin amorphous alloy ribbons of 5 mm in width and 21 μm in thickness. Each thin amorphous alloy ribbon was wound to a current transformer core having an outer diameter of 30 mm and an inner diameter of 21 mm. Each magnetic core was heat-treated in the same manner as in Example 1, and then subjected to magnetic measurement. In the heat-treated alloy structure, ultrafine crystal grains having a particle size of 50 nm or less were generated. No.33 represents a magnetic core made of an Fe-based, nano-crystalline alloy (Comparative Example), No.34 represents a magnetic core made of a Co-based, amorphous alloy (Comparative Example), and No.35 represents a magnetic core made of Parmalloy (Comparative Example).

[0052] With respect to a current transformer produced by using each magnetic core, phase difference and ratio error of rated current (expressed by absolute value), a magnetic flux density B_{8000} , a squareness ratio B_r/B_{8000} , an alternating-current specific initial permeability μ_r , and an anisotropic-magnetic field H_K were measured at 23°C in the same manner as in Example 1. Further, how well half-wave, sinusoidal, alternating current having a wave height of 30A could be measured was evaluated by the following standards. The results are shown in Table 2.

Good: Measured accurately.
 Poor: Could not be measured accurately.

Table 2

No.	Composition (by atomic %)	B ₈₀₀₀ (T)	B _r /B ₈₀₀₀ (%)	μ _r
1	Fe _{bal} Co ₃₀ Cu ₁ Nb ₃ Si ₉ B ₉	1.51	1	2200
2	Fe _{bal} Co _{15.3} Cu ₁ Nb ₃ Si ₁₀ B ₉	1.47	1	3400
3	Fe _{bal} Ni _{15.3} Cu ₁ Nb _{2.5} Si ₉ B ₉	1.28	1	1700
4	Fe _{bal} Co ₁₀ Ni ₁₀ Cu _{0.8} Nb _{2.5} Si ₉ B ₉	1.38	2	1900
5	Fe _{bal} Co ₂₀ Cu ₁ Nb ₃ Si ₁₃ B ₉ Mn _{0.5}	1.26	1	2700
6	Fe _{bal} Co ₂₅ Cu _{0.9} Nb _{2.5} Si _{15.5} B ₇ Cr _{0.5}	1.23	1	2400
7	Fe _{bal} Co ₂₅ Cu ₁ Nb _{2.8} Si _{16.5} B ₇ Sn _{0.1}	1.24	1	2300
8	Fe _{bal} Co ₂₅ Cu ₁ Nb ₃ Si ₁₅ B _{6.5} Zn _{0.1}	1.27	1	2300
9	Fe _{bal} Co ₂₅ Cu _{0.6} Nb _{2.6} Si ₈ B ₁₀ In _{0.1}	1.59	1	2400
10	Fe _{bal} Co ₃₅ Cu ₁ Nb ₃ Si ₉ B ₉ Ag _{0.1}	1.52	1	1800
11	Fe _{bal} Co ₂₅ Cu _{0.5} Nb ₃ Si ₁₀ B ₉ Au _{0.5}	1.50	1	2200
12	Fe _{bal} Co ₂₅ Cu ₁ Nb ₃ Si ₉ B ₉ Sc _{0.1}	1.51	1	2400
13	Fe _{bal} Co ₂₅ Cu ₁ Nb ₃ Si ₉ B ₉ Pt _{0.1}	1.52	1	2300
14	Fe _{bal} Co ₃₀ Cu ₁ Nb ₃ Si ₉ B ₉ Pd _{0.1}	1.52	1	2200
15	Fe _{bal} Co ₃₀ Cu ₁ Nb ₂ Si ₇ B ₁₂ Ru _{0.1}	1.54	1	2100
16	Fe _{bal} Co ₃₀ Cu ₁ Nb ₃ Si ₉ B ₉ Mg _{0.01}	1.53	1	2200
17	Fe _{bal} Co ₃₀ Cu ₁ Nb _{2.6} Si ₉ B ₉ Ca _{0.01}	1.53	1	2100
18	Fe _{bal} Co ₃₀ Cu ₁ Nb _{2.7} Si ₉ B ₉ Sr _{0.01}	1.52	1	2100
19	Fe _{bal} Co ₃₀ Cu ₁ Nb ₃ Si ₉ B ₉ C _{0.01}	1.51	2	2100
20	Fe _{bal} Co ₃₀ Cu ₁ Nb ₃ Si ₉ B ₉ Ge _{0.5}	1.50	1	2100
21	Fe _{bal} Co ₃₀ Cu ₁ Nb ₃ Si ₁₀ B ₉ Ga _{0.5}	1.52	1	2200
22	Fe _{bal} Co ₃₀ Cu ₁ Nb ₃ Si ₁₀ B ₉ Al ₂	1.49	2	1800
23	Fe _{bal} Co ₃₀ Cu ₁ Nb ₇ Si ₂ B ₉ P ₁	1.71	1	1100
24	Fe _{bal} Co ₃₀ Cu ₁ Nb ₇ Si ₁ B ₉ Ba _{0.5}	1.72	1	1200
25	Fe _{bal} Co ₃₀ Cu ₁ Zr ₇ Si ₁ B ₉ Sm _{0.01}	1.70	2	1100
26	Fe _{bal} Co ₃₀ Cu _{0.5} Hf ₇ Si ₉ B ₉ Nd _{0.01}	1.71	2	1100
27	Fe _{bal} Co ₃₀ Cu _{1.5} Ta ₃ Si ₉ B ₉ Be _{0.1}	1.50	1	2200
28	Fe _{bal} Co ₃₀ Cu ₁ Mo ₃ Si ₁₀ B ₉	1.48	3	2100
29	Fe _{bal} Co ₃₀ Cu ₁ Nb ₃ V ₁ Si ₉ B ₉	1.47	2	2000
30	Fe _{bal} Co ₃₀ Cu ₁ W ₃ Si ₁₀ B ₉	1.46	3	1900
31	Fe _{bal} Co ₃₀ Cu ₁ Zr ₇ B ₈	1.76	2	1000
32	Fe _{bal} Co ₃₀ Cu ₁ Zr ₇ Si ₃ B ₄	1.75	3	1100
33*	Fe _{bal} Cu ₁ Nb ₃ Si _{15.7} B ₇	1.2	2.6	82000
34*	Amorphous Co _{bal} Fe _{1.5} Mn ₄ Si ₅ B ₁₇	1.0	1	1500
35*	Permalloy	0.75	12	36000

Note: * Comparative Example.

Table 2 (Continued)

No.	H_K (Åm^{-1})	Ratio Error RE (%)	Phase Difference θ (°)	Measurement
1	590	2.1	2.5	Good
2	326	0.1	1.2	Good
3	445	1.8	3.2	Good
4	628	0.9	1.4	Good
5	429	0.8	1.3	Good
6	400	1.8	1.7	Good
7	410	1.8	2.4	Good
8	420	1.7	2.5	Good
9	517	0.8	2.3	Good
10	612	1.8	3.0	Good
11	500	0.9	2.4	Good
12	505	0.8	2.2	Good
13	505	0.9	2.4	Good
14	495	0.9	2.4	Good
15	500	1.0	2.5	Good
16	500	0.9	2.4	Good
17	510	1.0	2.5	Good
18	500	1.1	2.5	Good
19	498	1.0	2.5	Good
20	494	1.0	2.5	Good
21	506	0.9	2.3	Good
22	486	1.3	2.7	Good
23	1150	3.0	3.6	Good
24	1100	2.9	3.4	Good
25	1160	3.0	3.6	Good
26	1180	2.9	3.4	Good
27	610	0.9	2.4	Good
28	520	1.0	2.4	Good
29	550	1.2	2.8	Good
30	500	1.2	2.6	Good
31	1200	3.0	3.7	Good
32	1130	2.9	3.5	Good
33*	12.8	0.08	0.4	Poor
34*	490	3.5	4.5	Good
35*	17.8	0.20	0.21	Poor

Note: * Comparative Example.

[0053] The data in Table 2 indicate that the current transformer core of the present invention has small absolute values of a phase difference and a ratio error, and can be used particularly for an unsymmetrical-waveform current such as half-wave, sinusoidal, alternating current. On the other hand, the magnetic cores made of a conventional Fe-based, nano-crystalline alloy (No.33) and Parmalloy (No.35) were difficult to conduct the accurate measurement of half-wave, sinusoidal, alternating current. Also, the magnetic core made of the conventional Co-based, amorphous alloy (No.34) had larger absolute values of a phase difference and a ratio error than those of the current transformer core of the present invention. It was confirmed that the core of the present invention was able to be used for current transformers in wide ranges of applications such as integrating power meters, industrial equipments, etc.

Example 3

[0054] An alloy melt of $\text{Fe}_{53.8}\text{Co}_{25}\text{Cu}_{0.7}\text{Nb}_{2.6}\text{Si}_9\text{B}_9$ (by atomic %) was rapidly quenched by a single roll method to obtain a thin amorphous alloy ribbon of 5 mm in width and 21 μm in thickness. This thin amorphous alloy ribbon was wound to a toroidal core having an outer diameter of 30 mm and an inner diameter of 21 mm. The magnetic core was placed in a heat treatment furnace having a nitrogen gas atmosphere, and heat-treated in the same manner as in Example 1, except that the heat treatment pattern comprised temperature elevation at 5°C/minute, keeping at 530°C for 2 hours, and cooling at 1°C/minute. Observation by an electron microscope revealed that the heat-treated alloy had a structure, about 72% of which was occupied by crystal grains having a particle size of about 10 nm and a body-cubic crystal structure, the balance being mainly an amorphous phase. An X-ray diffraction pattern indicated crystal peaks corresponding to the body-cubic crystal phase.

[0055] Measurement revealed that this $\text{Fe}_{53.8}\text{Co}_{25}\text{Cu}_{0.7}\text{Nb}_{2.6}\text{Si}_9\text{B}_9$ (by atomic %) alloy had a magnetic flux density B_{8000} at 8000 Am^{-1} of 1.50 T, a squareness ratio B/B_{8000} of 1%, coercivity H_c of 2.1 Am^{-1} , an alternating-current specific initial permeability μ_r of 2200 at 50 Hz and 0.05 Am^{-1} , and an anisotropic magnetic field H_K of 406 Am^{-1} .

[0056] Fig. 6 shows the direct-current B-H loops of the current transformer core of the present invention and the conventional Co-based amorphous core [No.34 (Comparative Example) produced in Example 2], and Fig. 7 shows the magnetic field dependency of the alternating-current specific initial permeability μ_r at 50 Hz of the current transformer core of the present invention. The current transformer core of the present invention exhibited higher alternating-current specific initial permeability μ_r than that of the Co-based, amorphous alloy core having the same level of H_K , and a substantially constant alternating-current specific initial permeability μ_r in a magnetic field range equal to or less than H_K . The current transformer of the present invention using this magnetic core can be used with excellent characteristics even in direct current superposition like half-wave, sinusoidal, alternating current.

[0057] Each magnetic core was provided with a one-turn primary winding, a 2500-turn secondary detection winding, and a load resistor of 100 Ω parallel-connected to the secondary detection winding, to produce a current transformer. When sinusoidal alternating current of 50 Hz and 30A was supplied to the primary winding, the absolute values of a phase difference and a ratio error at 23 °C were 2.0% and 2.4° in the current transformer of the present invention, and 3.6% and 4.6° in the current transformer of the Co-based, amorphous alloy.

[0058] The power meter produced by using the current transformer of the present invention was able to conduct power measurement not only to positive-negative-symmetrical, sinusoidal, alternating current, but also to half-wave, sinusoidal, alternating current.

EFFECT OF THE INVENTION

[0059] The current transformer core of the present invention having a low residual magnetic flux density, small hysteresis, and good magnetization curve linearity, which is not easily saturable and generates a relatively large anisotropic magnetic field H_K , provides small, inexpensive, thermally stable current transformers and power meters with wide current measurement ranges. Particularly, it can accurately measure even unsymmetrical-waveform current such as half-wave, sinusoidal, alternating current, and direct-current-superimposed alternating current.

Claims

1. A current transformer core made of an alloy having a composition represented by the general formula $\text{Fe}_{100-x-a-y-c}\text{M}_x\text{-Cu}_a\text{M}'_y\text{X}'_c$ (by atomic %), wherein
M is Co and/or Ni,
M' is at least one element selected from the group consisting of V, Zr, Nb, Mo, Hf, Ta and W,
X' is Si and/or B,
x, a, y and c are numbers satisfying $15 \leq x \leq 40$, $0.1 \leq a \leq 3$, $1 \leq y \leq 10$, $2 \leq c \leq 30$, and $7 \leq y + c \leq 31$, respectively,
30% or more of the alloy structure is composed of crystal grains having an average particle size of 50 nm or less,

characterised in that

said alloy has a magnetic flux density B_{8000} of 1.2 T or more at 8000 Am^{-1} , an anisotropic magnetic field H_K of $150\text{-}1500 \text{ Am}^{-1}$, a squareness ratio B_r/B_{8000} of 5% or less, and an alternating-current specific initial permeability μ_r of $800\text{-}7000$ at 50 Hz and 0.05 Am^{-1} , and

the current transformer core is adapted to detect half-wave, sinusoidal, alternating current.

2. The current transformer core according to claim 1, wherein the M content x meets $22 \leq x \leq 35$.
3. The current transformer core according to claim 1 or 2, wherein the B content is 4-12 atomic %.
4. The current transformer core according to any one of claims 1-3, wherein the Si content is 0.5-17 atomic %.
5. The current transformer core according to any one of claims 1-4, wherein part of said M' is substituted by at least one element selected from the group consisting of Cr, Mn, Sn, Zn, In, Ag, Au, Sc, platinum-group elements, Mg, Ca, Sr, Ba, Y, rare earth elements, N, O and S.
6. The current transformer core according to any one of claims 1-5, wherein part of said X' is substituted by at least one element selected from the group consisting of C, Ge, Ga, Al, Be and P.
7. The current transformer core according to any one of claims 1-6, wherein it is subjected to a heat treatment in a magnetic field, which comprises keeping it at a temperature of $450\text{-}700^\circ\text{C}$ for 24 hours or less while applying a magnetic field of 40 kAm^{-1} or more in the core height direction, and then cooling it to room temperature.
8. A current transformer comprising
the core recited in any one of claims 1-7,
a primary winding,
at least one secondary detection winding, and
a load resistor parallel-connected to said secondary detection winding.
9. The current transformer according to claim 8, wherein said primary winding has 1 turn.
10. The current transformer according to claim 8 or 9, having a phase difference within 5° in a rated current range, and a ratio error within 3% (absolute value) at 23°C .
11. A power meter comprising the current transformer recited in any one of claims 8-10 and being adapted for multiplying the current value obtained by the current transformer and voltage at that time to calculate power used.

Patentansprüche

1. Stromtransformatorkern, der aus einer Legierung hergestellt ist, die eine durch die allgemeine Formel $\text{Fe}_{100-x-a-y-c}\text{M}_x\text{Cu}_a\text{M}'_y\text{X}'_c$ (mit Atom-%) dargestellte Zusammensetzung hat, wobei
M Co und/oder Ni ist,
M' wenigstens ein Element ausgewählt aus der Gruppe bestehend aus V, Zr, Nb, Mo, Hf, Ta und W ist,
X' Si und/oder B ist,
x, a, y und c Zahlen sind, die $15 \leq x \leq 40$, $0,1 \leq a \leq 3$, $1 \leq y \leq 10$, $2 \leq c \leq 30$, bzw. $7 \leq y + c \leq 31$ erfüllen,
mindestens 30% der Legierungsstruktur zusammengesetzt ist aus Kristallkörnern mit einer durchschnittlichen Teilchengröße von höchstens 50 nm,
dadurch gekennzeichnet, dass
die Legierung eine magnetische Flussdichte B_{8000} von mindestens 1,2 T bei 8000 Am^{-1} , ein anisotropes Magnetfeld H_K von $150\text{-}1500 \text{ Am}^{-1}$, ein Rechteckigkeitsverhältnis B_r/B_{8000} von höchstens 5% und eine wechselstromspezifische Anfangspermeabilität μ_r von $800\text{-}7000$ bei 50 Hz und $0,05 \text{ Am}^{-1}$ aufweist, und
der Stromtransformatorkern dazu ausgelegt ist, einen halbwelligen, sinusförmigen Wechselstrom zu erfassen.
2. Stromtransformatorkern nach Anspruch 1, wobei der M-Anteil x $22 \leq x \leq 35$ erfüllt.
3. Stromtransformatorkern nach Anspruch 1 oder 2, wobei der B-Anteil 4-12 Atom-% beträgt.

4. Stromtransformatorkern nach einem der Ansprüche 1-3, wobei der Si-Anteil 0,5-17 Atom-% beträgt.
5. Stromtransformatorkern nach einem der Ansprüche 1-4, wobei ein Teil des M' ersetzt ist durch wenigstens ein Element ausgewählt aus der Gruppe bestehend aus Cr, Mn, Sn, Zn, In, Ag, Au, Sc, Platingruppenelementen, Mg, Ca, Sr, Ba, Y, Seltenerdelementen, N, O und S.
6. Stromtransformatorkern nach einem der Ansprüche 1-5, wobei ein Teil des X' ersetzt ist durch wenigstens ein Element ausgewählt aus der Gruppe bestehend aus C, Ge, Ga, Al, Be und P.
7. Stromtransformatorkern nach einem der Ansprüche 1-6, wobei dieser einer Wärmebehandlung in einem Magnetfeld unterzogen wird, bei der er für höchstens 24 Stunden auf einer Temperatur von 450-700°C gehalten wird, während ein Magnetfeld von mindestens 40 kAm⁻¹ in der Kernhöhenrichtung angelegt wird, und dieser dann auf Raumtemperatur gekühlt wird.
8. Stromtransformator mit dem Kern gemäß einem der Ansprüche 1-7, einer Primärwicklung, wenigstens einer Sekundär-Erfassungswicklung, und einem parallel zu der Sekundär-Erfassungswicklung angeschlossenen Lastwiderstand.
9. Stromtransformator nach Anspruch 8, wobei die Primärwicklung eine Windung aufweist.
10. Stromtransformator nach Anspruch 8 oder 9 mit einer Phasendifferenz innerhalb 5° in einem Nennstrombereich und einem Fehlerverhältnis innerhalb 3% (Absolutwert) bei 23°C.
11. Leistungsmessgerät mit dem Stromtransformator gemäß einem der Ansprüche 8-10, das dazu ausgelegt ist, den durch den Stromtransformator erhaltenen Stromwert mit der gegenwärtigen Spannung zu multiplizieren, um die verbrauchte Leistung zu berechnen.

Revendications

1. Noyau de transformateur de courant en un alliage ayant une composition représentée par la formule générale $Fe_{100-x-a-y-c}M_xCu_aM'_yX'_c$ (en % atomique), dans lequel
M est Co et/ou Ni,
M' est au moins un élément choisi dans le groupe consistant en V, Zr, Nb, Mo, Hf, Ta et W,
X' est Si et/ou B,
x, a, y et c sont des nombres satisfaisant $15 \leq x \leq 40$, $0,1 \leq a \leq 3$, $1 \leq y \leq 10$, $2 \leq c \leq 30$ et $7 \leq y + c \leq 31$, respectivement, 30 % ou plus de la structure d'alliage sont composés de grains de cristal ayant une taille moyenne de particule de 50 nm ou moins,
caractérisé en ce que
ledit alliage a une densité de flux magnétique B_{8000} de 1,2 T ou plus à 8 000 Am⁻¹, un champ magnétique anisotrope H_K de 150 à 1 500 Am⁻¹, un taux de rectangularité B_r/B_{8000} de 5 % ou moins, et une perméabilité initiale spécifique en courant alternatif μ_r de 800 à 7 000 à 50 Hz et 0,05 Am⁻¹, et
le noyau de transformateur de courant est adapté pour détecter du courant demi-onde, sinusoïdal ou alternatif.
2. Noyau de transformateur de courant selon la revendication 1, dans lequel la teneur x en M atteint $22 \leq x \leq 35$.
3. Noyau de transformateur de courant selon la revendication 1 ou 2, dans lequel la teneur en B est de 4 à 12 % atomique.
4. Noyau de transformateur de courant selon l'une quelconque des revendications 1 à 3, dans lequel la teneur en Si est de 0,5 à 17 % atomique.
5. Noyau de transformateur de courant selon l'une quelconque des revendications 1 à 4, dans lequel une partie dudit M' est substituée par au moins un élément choisi dans le groupe consistant en Cr, Mn, Sn, Zn, In, Ag, Au, Sc, les éléments du groupe platine, Mg, Ca, Sr, Ba, Y, des éléments de terres rares, N, O et S.
6. Noyau de transformateur de courant selon l'une quelconque des revendications 1 à 5, dans lequel une partie dudit

EP 1 840 906 B1

X' est substituée par au moins un élément choisi dans le groupe consistant en C, Ge, Ga, Al, Be et P.

7. Noyau de transformateur de courant selon l'une quelconque des revendications 1 à 6, dans lequel il est soumis à un traitement thermique dans un champ magnétique, qui comprend son maintien à une température de 450 à 700 °C pendant 24 heures ou moins tout en appliquant un champ magnétique de 40 kAm⁻¹ ou plus dans la direction de la hauteur du noyau, puis son refroidissement à température ambiante.
8. Transformateur de courant comprenant le noyau mentionné dans l'une quelconque des revendications 1 à 7, un enroulement primaire, au moins un enroulement de détection secondaire, et une résistance de charge connectée en parallèle audit enroulement de détection secondaire.
9. Transformateur de courant selon la revendication 8, dans lequel ledit enroulement primaire a 1 tour.
10. Transformateur de courant selon la revendication 8 ou 9, ayant une différence de phase d'au plus 5° dans une plage de courant nominal, et une erreur de rapport d'au plus 3 % (valeur absolue) à 23 °C.
11. Wattmètre comprenant le transformateur de courant mentionné dans l'une quelconque des revendications 8 à 10 et étant adapté pour multiplier la valeur de courant obtenue par le transformateur de courant et une tension à ce moment afin de calculer la puissance utilisée.

Fig. 1

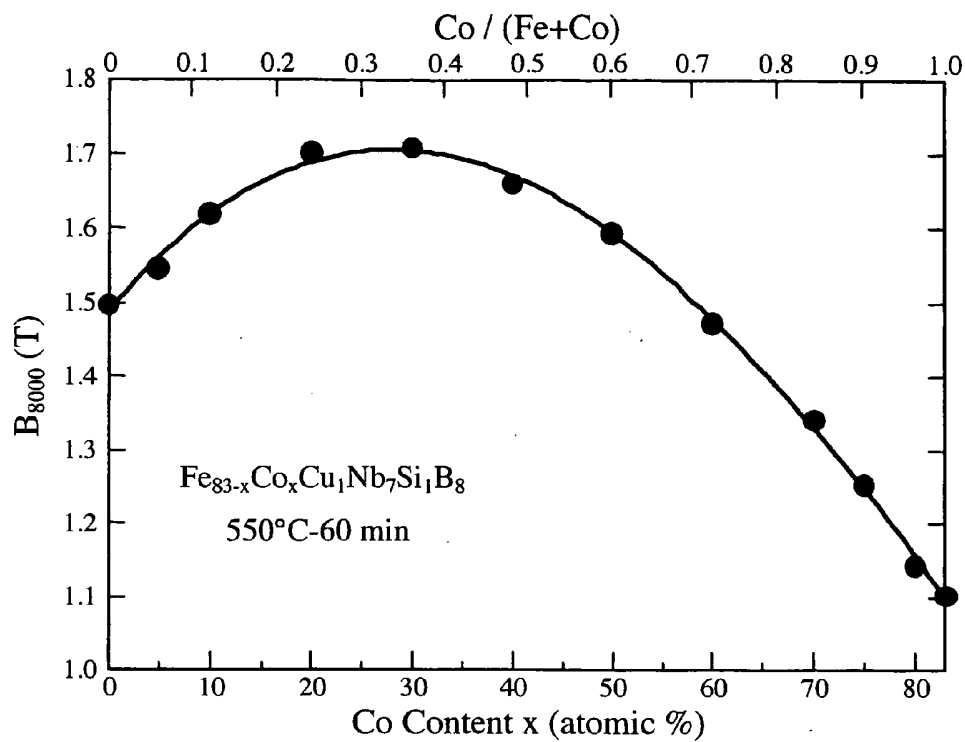


Fig. 2

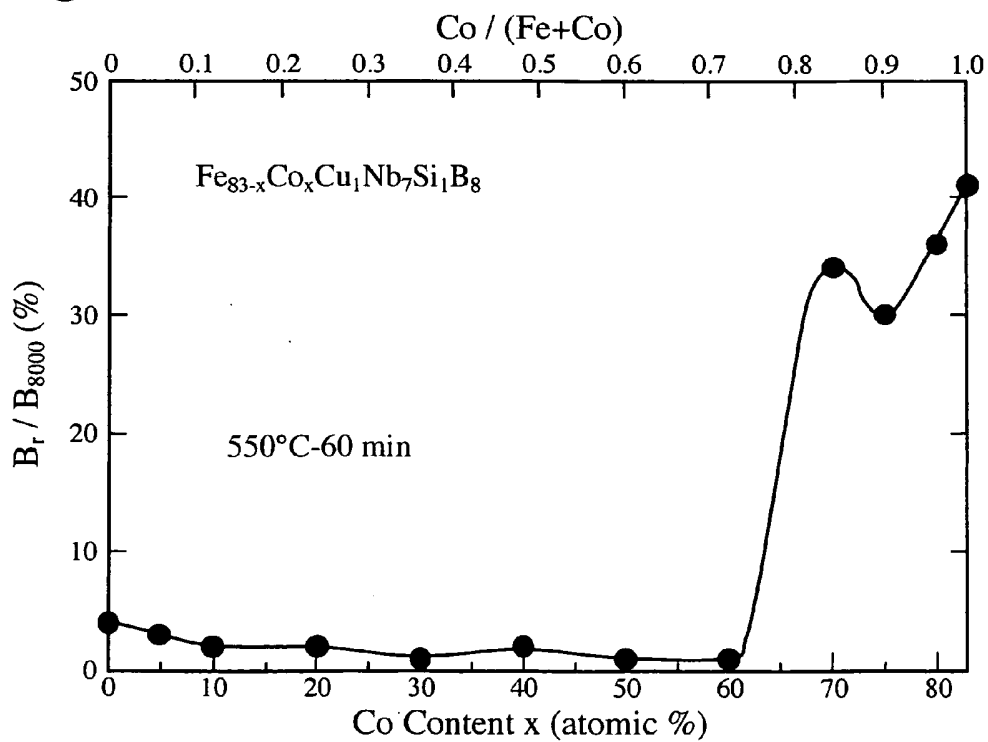


Fig. 3

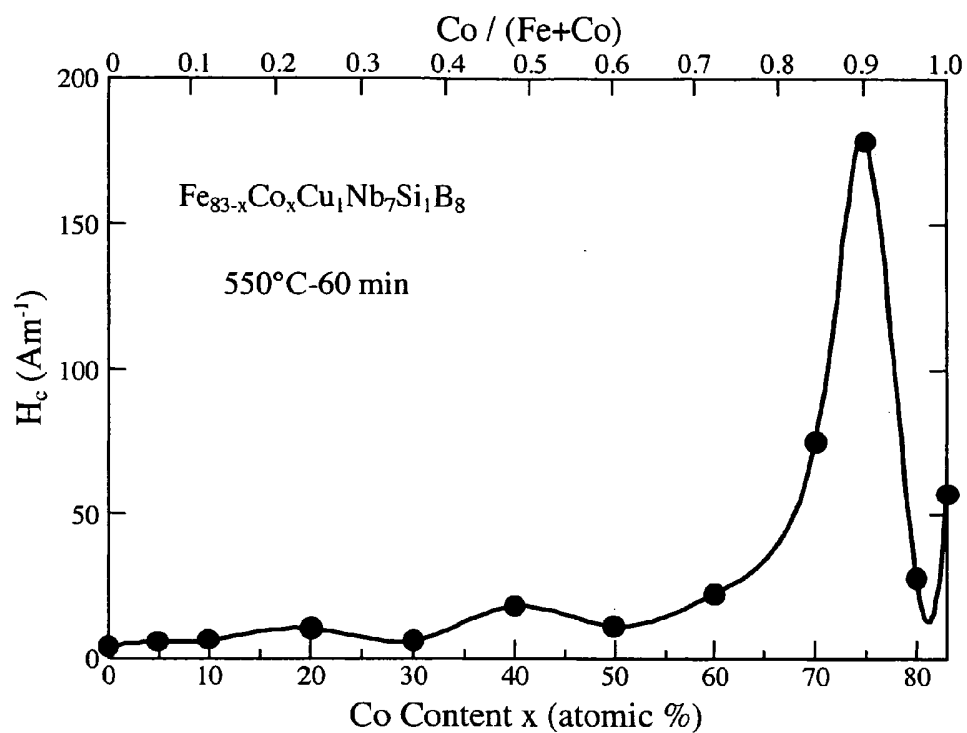


Fig. 4

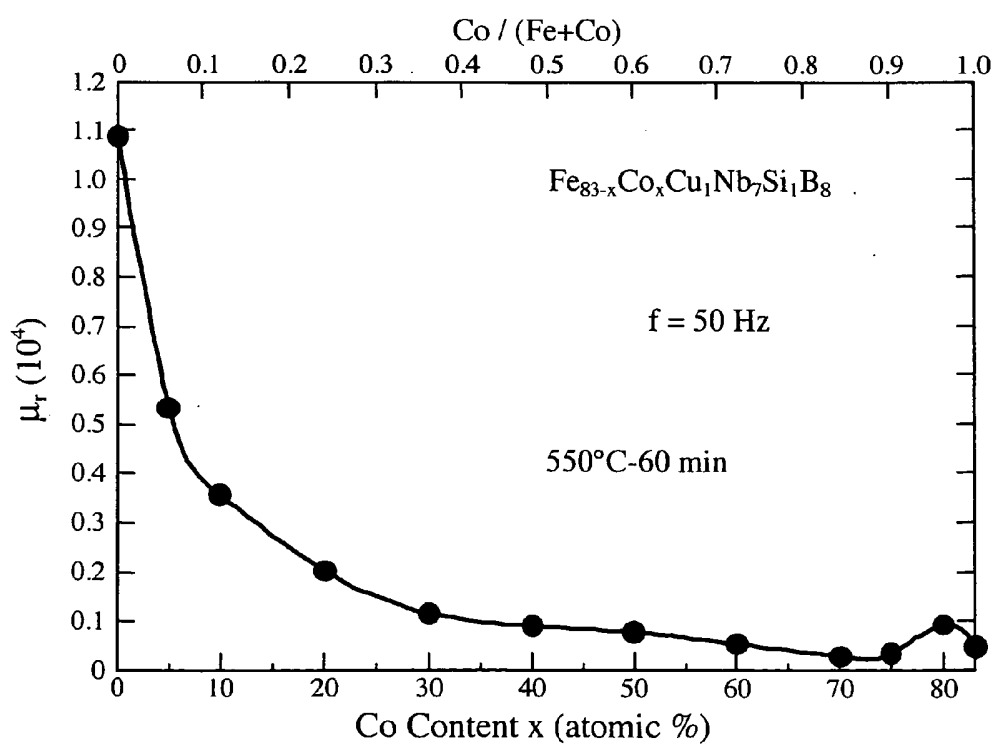


Fig. 5

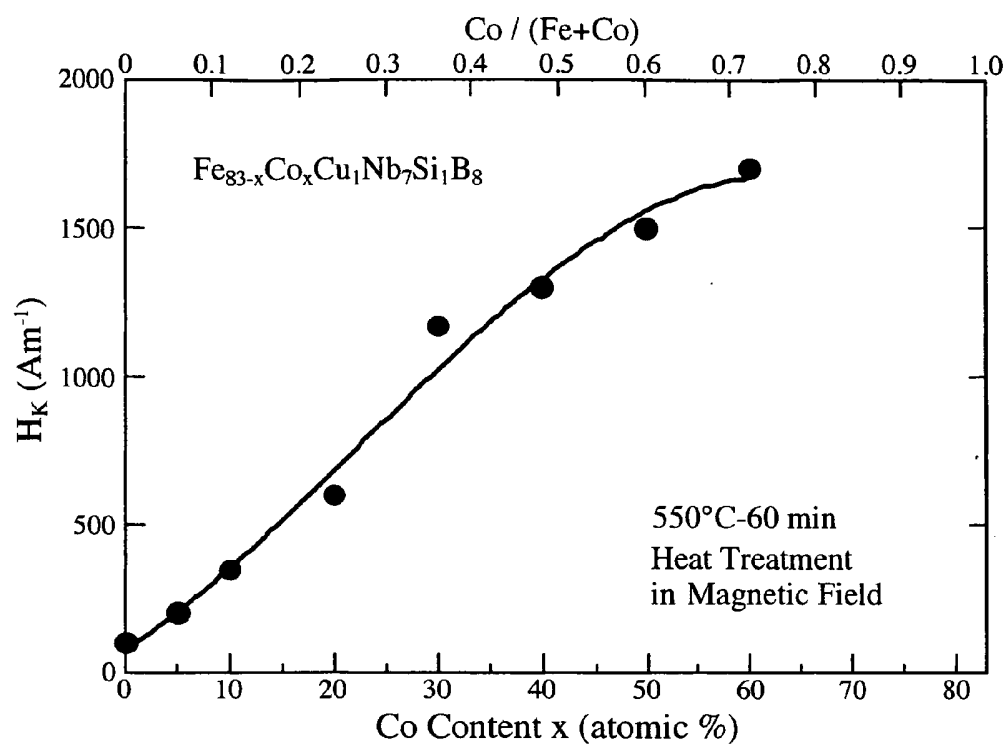


Fig. 6

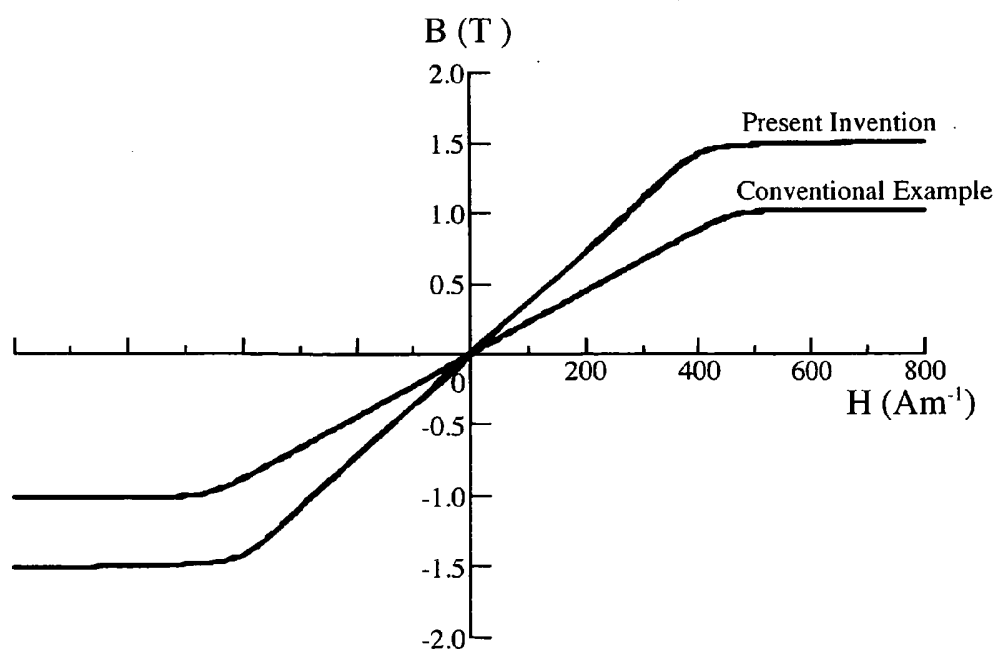


Fig. 7

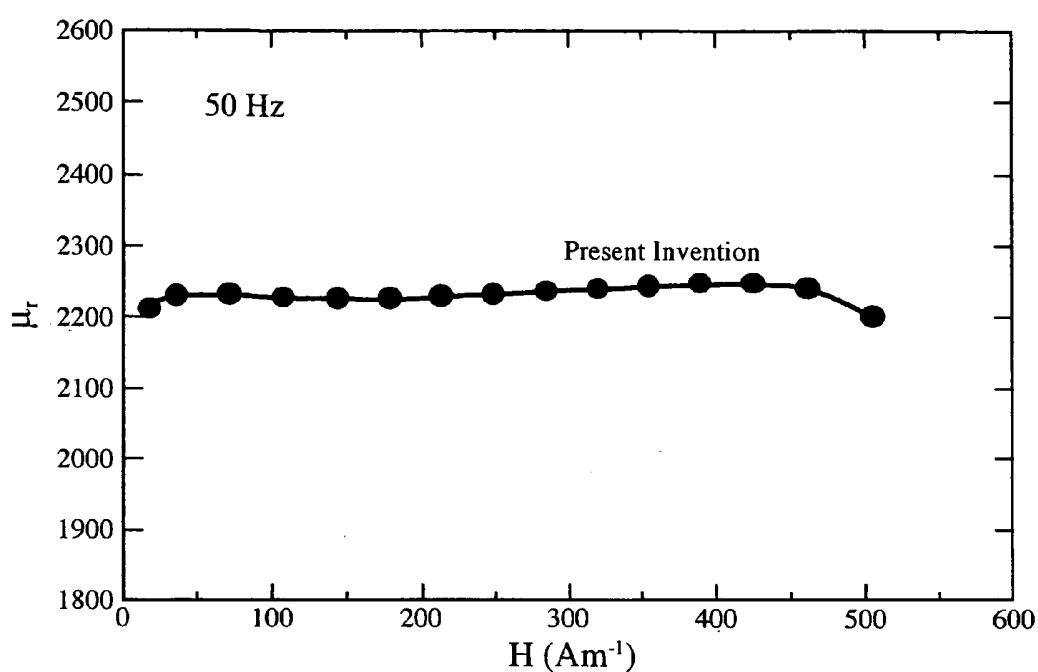


Fig. 8


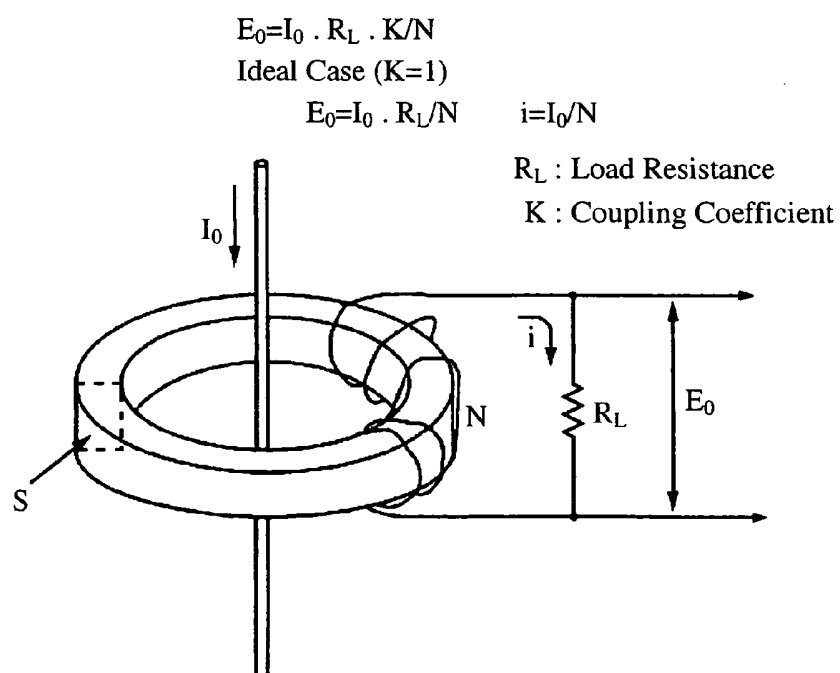


Fig. 9

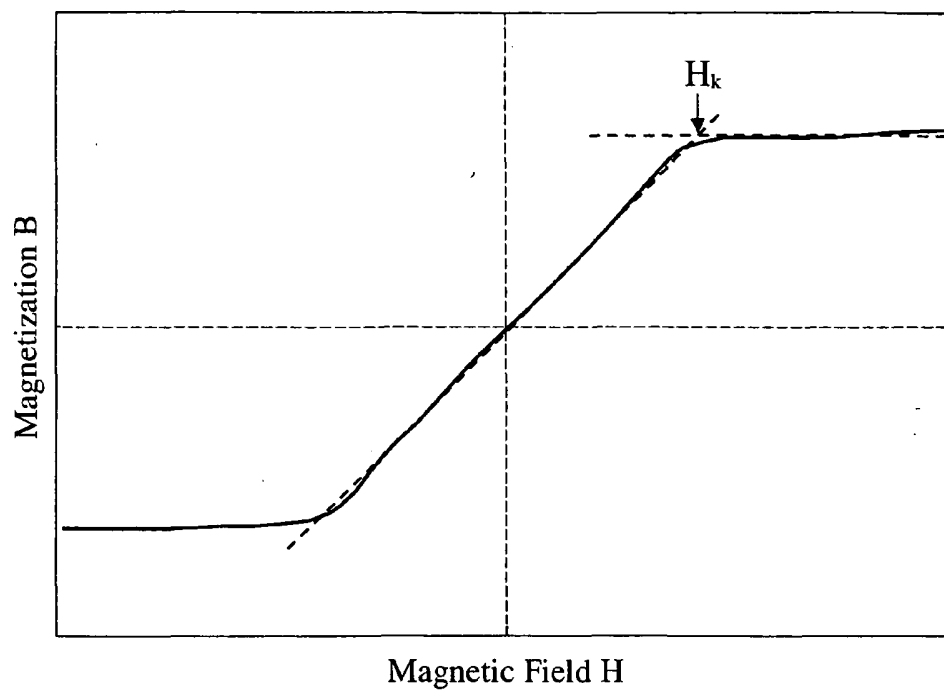

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2002525863 A [0010]
- JP 4004393 B [0012]
- JP 1242755 A [0012]
- JP 1235213 A [0012]
- JP 5203679 A [0012]
- JP 2002530854 A [0012] [0013]
- EP 1045402 A2 [0015]

MÁGNESES MAG ÁRAMTRANSZFORMÁTORHOZ, ÁRAMTRANSZFORMÁTOR ÉS WATTÓRAMÉRÓ

Szabadalmi igénypontok

1. Áramtranszformátor-mag, amely az $\text{Fe}_{100-x-y-c}\text{M}_x\text{Cu}_y\text{M}'_y\text{X}'_c$ általános képlettel jellemzett (atom%-ban megadott összetételű) ötvözetből van, ahol

M jelentése Co és/vagy Ni,

M' a V, Zr, Nb, Mo, Hf, Ta és W alkotta csoportból választott legalább egy elemet jelöl,

X' jelentése Si és/vagy B, továbbá

ahol x, a, y és c rendre a $15 \leq x \leq 40$, $0,1 \leq a \leq 3$, $1 \leq y \leq 10$, $2 \leq c \leq 30$ és $7 \leq y + c \leq 31$, összefüggéseket kielégítő számok, továbbá

az ötvözet szerkezetének legalább 30%-át legfeljebb 50 nm átlagos szemcseméretű kristályszemcsék képezik,

azzal jellemezve, hogy

az ötvözet 8000 Am^{-1} -nél tekintett B_{8000} mágneses fluxussűrűsége legalább 1,2 T, H_K anizotrop mágneses térerőssége $150\text{-}1500 \text{ Am}^{-1}$, B_r/B_{8000} négyzetességi hányadosa („squareness ratio”) legfeljebb 5%, továbbá 50 Hz-nél és $0,05 \text{ Am}^{-1}$ -nél tekintett, váltakozó áramra vonatkozó kiindulási μ_r relatív permeabilitása 800-7000, valamint

az áramtranszformátor-mag félhullámú szinuszos váltakozó áram érzékelésére alkalmasan van kiképezve.

2. Az 1. igénypont szerinti áramtranszformátor-mag, ahol az x jelölte M-tartalom kielégíti a $22 \leq x \leq 35$ összefüggést.

3. Az 1. vagy a 2. igénypont szerinti áramtranszformátor-mag, ahol a B-tartalom 4-12 atom%.

4. Az 1-3. igénypontok bármelyike szerinti áramtranszformátor-mag, ahol a Si-tartalom 0,5-17 atom%.

5. Az 1-4. igénypontok bármelyike szerinti áramtranszformátor-mag, ahol M' egy része a Cr, Mn, Sn, Zn, In, Ag, Au, Sc, platinacsoport elemei, Mg, Ca, Sr, Ba, Y, ritkaföldfémek, N, O és S alkotta csoportból választott legalább egy elemmel van helyettesítve.

6. Az 1-5. igénypontok bármelyike szerinti áramtranszformátor-mag, ahol X' egy része a C, Ge, Ga, Al, Be és P alkotta csoportból választott legalább egy elemmel van helyettesítve.

7. Az 1-6. igénypontok bármelyike szerinti áramtranszformátor-mag, amely mágneses térben végzett hőkezelésen esik át, melynek keretében legfeljebb 24 órán át legalább 40 kAm^{-1} térerősségű és a mag magasságának irányával megegyező irányú mágneses tér alkalmazása mellett $450\text{-}700^\circ\text{C}$ hőmérsékleten tartják, majd szobahőmérsékletre hűtik.

8. Áramtranszformátor, amely tartalmazza

az 1-7. igénypontok bármelyike szerinti magot, továbbá tartalmaz

primer tekercselést,

legalább egy szekunder mérőtekercselést, és

terhelő ellenállást a szekunder mérőtekercseléssel párhuzamosan kapcsolva.

9. A 8. igénypont szerinti áramtranszformátor, ahol a primer tekercselésnek 1 menete van.
10. A 8. vagy a 9. igénypont szerinti áramtranszformátor, amelynek névleges áramtartományban tekintett fázistolása legfeljebb 5° , továbbá 23°C -on tekintett áttételi hibája (abszolút értékben) legfeljebb 3%.
11. Teljesítménymérő, amely a 8-10. igénypontok bármelyike szerinti áramtranszformátort tartalmazza, továbbá a felvett teljesítmény kiszámításához az áramtranszformátorral kapott áramérték és az azzal együtt fennálló feszültség összeszorzására alkalmasan van kiképezve.