

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 July 2006 (27.07.2006)

PCT

(10) International Publication Number  
**WO 2006/079113 A1**

(51) International Patent Classification:  
**H04B 7/005** (2006.01)

(21) International Application Number:  
PCT/US2006/002653

(22) International Filing Date: 24 January 2006 (24.01.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/042,703 24 January 2005 (24.01.2005) US

(71) Applicant (for all designated States except US): **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WALTHO, Alan** [CA/US]; 6292 Blauer Lane, San Jose, CA 95101 (US).  
**SCHIFFER, Jeffrey** [US/US]; 3355 Cork Oak Way, Palo Alto, CA 94303 (US).

(74) Agents: **VINCENT, Lester, J.** et al.; Blakely Sokoloff Taylor & Zafman, 12400 Wilshire Boulevard, 7th Floor, Los Angeles, CA 90025 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MITIGATING INTERFERENCE TO NEARBY RADIO SYSTEMS BASED ON CHARACTERIZATION OF ADJACENT CHANNELS

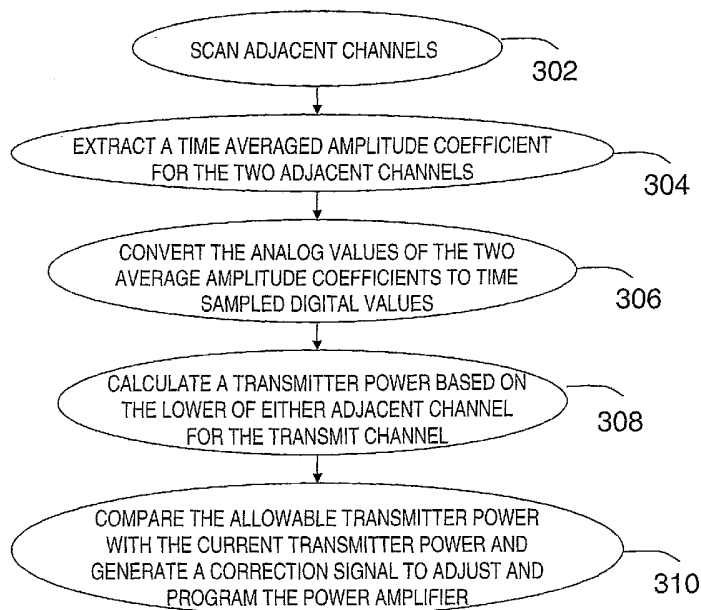

300

(57) Abstract: A wireless device dynamically controls a power level for each channel in a transmission spectrum. The power level is adjusted based on characteristics of signals received in the adjacent channels which results in the wireless device working at maximum ranges consistent with not causing interference to other users of the spectrum.

## MITIGATING INTERFERENCE TO NEARBY RADIO SYSTEMS BASED ON CHARACTERIZATION OF ADJACENT CHANNELS

5        Devices that communicate using Radio Frequency (RF) signals emit RF  
signal energy that may interfere and affect the quality of service of nearby  
receivers operating on adjacent channels.

### BRIEF DESCRIPTION OF THE DRAWINGS

10        The subject matter regarded as the invention is particularly pointed out  
and distinctly claimed in the concluding portion of the specification. The  
invention, however, both as to organization and method of operation,  
together with objects, features, and advantages thereof, may best be  
understood by reference to the following detailed description when read with  
15        the accompanying drawings in which:

FIG. 1 is a diagram that illustrates a wireless device that incorporates  
circuitry and algorithms to monitor and analyze adjacent radio channels in  
accordance with the present invention;

20        FIG. 2 is a block diagram that illustrates the monitoring of the adjacent  
radio channel and the selection of a transmit power used by the wireless  
device of FIG. 1; and

FIG. 3 is a diagram that illustrates a method of characterizing the  
adjacent radio channels by a wireless device in accordance with the present  
25        invention.

It will be appreciated that for simplicity and clarity of illustration,  
elements illustrated in the figures have not necessarily been drawn to scale.  
For example, the dimensions of some of the elements may be exaggerated  
30        relative to other elements for clarity. Further, where considered appropriate,  
reference numerals have been repeated among the figures to indicate

corresponding or analogous elements.

#### DETAILED DESCRIPTION

In the following detailed description, numerous specific details are set forth in order to provide a thorough understanding of the invention. However, it will be understood by those skilled in the art that the present invention may be practiced without these specific details. In other instances, well-known methods, procedures, components and circuits have not been described in detail so as not to obscure the present invention.

In the following description and claims, the terms "coupled" and "connected," along with their derivatives, may be used. It should be understood that these terms are not intended as synonyms for each other. Rather, in particular embodiments, "connected" may be used to indicate that two or more elements are in direct physical or electrical contact with each other while "coupled" may further mean that two or more elements are not in direct contact with each other, but yet still co-operate or interact with each other.

FIG. 1 illustrates features of the present invention that may be incorporated, for example, into a wireless communications device 10. In the wireless communications embodiment, a transceiver 12 both receives and transmits a modulated signal from one or more antennas. The analog front end transceiver may be a stand-alone Radio Frequency (RF) integrated analog circuit, or alternatively, be embedded with a processor 16 as a mixed-mode integrated circuit. The received modulated signal may be frequency down-converted, filtered, then converted to a baseband, digital signal. An adjacent channel characterization block 14 determines and stores channel parameters and will be described below.

Processor 16 may include baseband and applications processing functions and utilize one or more processor cores and/or firmware and hardware in an Application Specific Integrated Circuit (ASIC) device. Blocks 18 and 20, in general, process functions that fetch instructions, generate

decodes, find operands, and perform appropriate actions, then store results.

The use of multiple cores may allow one core to be dedicated to handle application specific functions such as, for example, graphics, modem functions, etc. Alternatively, the multiple cores may allow processing

workloads to be shared across the cores. A host controller 22 includes a hardware/software interface between a host controller software driver and the host controller hardware that exchanges data across memory interface 24 with a system memory 26. System memory 26 may include a combination of memories such as a Random Access Memory (RAM), a Read Only Memory (ROM) and a nonvolatile memory, although the type or variety of memories included in system memory 26 is not a limitation of the present invention. .

Wireless communications device 10 may have applications in laptops, mobile phones, MP3 players, headsets, cameras, communicators and Personal Digital Assistants (PDAs), medical or biotech equipment, automotive safety and protective equipment, and automotive infotainment products. However, it should be understood that the scope of the present invention is not limited to these examples.

As shown, communications device 10 includes a radio, allowing communication in an RF/location space with other devices and may include network connections to send and receive files or other information such as voice or video. Accordingly, communications device 10 may operate in a wireless network such as, for example, a cellular network, a Personal Area Network (PAN), a Wireless Personal Area Network (WPAN), an Ultra-Wideband (UWB) network, a Piconet or a combination thereof. Note that the type of network is not intended to limit the claimed invention. It should further be noted that communications device 10 may function and communicate apart from any network. Therefore, in general, communications device 10 is any type of wireless device capable of communicating in an RF/location space with another device where interference may affect the quality of service of nearby receivers operating on adjacent channels.

Prior art radio systems adaptively set their transmit power to achieve a

maximum link throughput on an error free basis. Transmission at full power by these prior art radio systems may result in interference to these receivers by breakthrough on the adjacent channels. In contrast and in accordance with the present invention, a given channel selected for communication has a transmit power adaptively controlled to reduce interference on adjacent channels. Accordingly, a characterization block 14 cognitively monitors the signal power in the adjacent channels in order to set the transmit power for that given channel. The election of the transmit power for any channel is based on the monitored power in the two adjacent channels. In the event that one of the adjacent channels is determined to be vacant, then only the signal power in the occupied adjacent channel is considered. In the event that both adjacent channels are determined to be vacant, then full power may be transmitted for that transmit channel.

Thus, communications device 10 improves service quality on the adjacent channels by characterizing the adjacent channels to identify the adjacent channel having the lower power. Again, that identified lower power is used to set a transmit power for the transmit channel that protects the adjacent channels. This results in communications device 10 providing the desired transmission qualities without affecting the quality of service on the adjacent channels.

Note that an unlicensed device may also cause adjacent channel interference when it's out of band spurious emissions are not adequately suppressed. Since adjacent channel characterization block 14 in transceiver 12 monitors the signal power in both adjacent channels and selects the lower power in the two adjacent channels, the interference from the unlicensed device is mitigated. Again, transceiver 12 transmits with a transmitter power controlled relative to the desired signals of the adjacent channel receivers, so out of band emissions may be reduced in the same proportion as the wanted emissions. By reducing the out of band emissions in the adjacent channel the interference to a receiver operating on the adjacent channel is reduced. Characterization block 14 allows licensed and unlicensed users to share

spectrum without generating unwanted interference. Characterization block 14 may also be used to protect a higher priority user.

FIG. 2 is a block diagram for adjacent channel characterization block 14 showing three channels or scanned adjacent channel receiver 202; a level detector 204; an A-D converter 206; a level control algorithm 208; a driver amplifier 210; a programmable power adjustor 212; and a power amplifier 214. In accordance with the present invention, adjacent channel characterization block 14 performs the task of monitoring the adjacent radio channels, identifying the channel having the lower power, and selecting a transmit power for the transmit channel.

Adjacent channel receiver 202 is a radio receiver. In one embodiment, adjacent channel receiver 202 may be implemented to monitor three channels in which are received simultaneously. In another embodiment, adjacent channel receiver 202 may be implemented as a scanning receiver where the two adjacent channels are received sequentially. For either embodiment, adjacent channel receiver 202 is tunable to the two channels adjacent to the channel on which it is intended to transmit.

Level detector 204 is a circuit block that extracts the average amplitude coefficient of a sinusoidal signal. Level detector 204 is coupled to adjacent channel receiver 202 and receives the signal power in the two channels adjacent to the channel on which it is intended to transmit.

A-D converter 206 converts a time varying analog signal to its equivalent digitally sampled representation. Level detector 204 supplies two analog signals, i.e., the two average amplitude coefficients for the two adjacent channels determined by level detector 204. A-D converter 206 converts the two average amplitude coefficients to digital output signals. It is not intended that the choice of analog storage or the type of A-D converter 206 limit the present invention. In other words, the embodiment of the present invention is not limited by the specific method of conversion employed, the resolution of the A-D converter as related to the number of bits or the voltage range or linearity of the A-D converter.

Level control algorithm 208 is connected to A-D converter 206 to receive the two digital signals. Level control algorithm 208 calculates a transmitter power for the transmit channel based on the two signal levels and the signal types detected in the two adjacent channels. The characterization of the adjacent channels may include a type of modulation for the three major television standards, i.e., National Television System Committee (NTSC), Phase Alternating Line (PAL) or Sequential Couleur Avec Memoire (SECAM), as well as digital television (DTV), etc. The allowable transmitter power is compared with the transmitter power currently set in power amplifier 214, and a correction signal is developed to feed to programmable power adjustor 212. The correction signal is based on a difference value between the calculated transmitter power and the transmitter power currently set in power amplifier 214.

Driver amplifier 210 is an intermediate level linear power amplifier used to isolate the frequency up-converter from any mismatches caused by filters (not shown) or by power amplifier 214. Programmable power adjustor 212 may be a switched resistive network that is programmed to adjust the signal received from driver amplifier 210 by any one of a number of preset values. Power amplifier 214 receives the signal from programmable power adjustor 212 and provides the signal that is transmitted from the antenna.

FIG. 3 shows a flowchart in accordance with various embodiments of the present invention. In some embodiments, method 300, or portions thereof, is performed in normal operation by the RF transceiver. Note that method 300 is not limited by the particular type of apparatus, software element, or system performing the method. Method 300 is shown beginning at block 302 in which RF transceiver 12 scans the channels adjacent to the transmit channel. In block 304 the time averaged amplitude coefficients for the two adjacent channels are extracted. In block 306 the analog values for the time averaged amplitude coefficients for the two adjacent channels are converted to sampled digital values. A lower value of the two converted values is selected and a transmit power for the transmit channel is calculated

in block 308. In block 310 the allowable transmitter power is compared with the current transmitter power, and a correction signal is generated to adjust and program the power amplifier. Note that the various actions in method 300 may be performed in the order presented, or may be performed in a different order. Further, in some embodiments, additional actions may be included in method 300.

By now it should be apparent that the present invention enhances transmission quality and provides protection to adjacent channel receivers. The adaptive power control selected for each channel is based on monitoring the characteristics of the adjacent channels. By setting the proper transmission power for each transmit channel, the present invention allows wireless devices to work at the maximum range consistent with limiting interference to other users of the spectrum.

While certain features of the invention have been illustrated and described herein, many modifications, substitutions, changes, and equivalents will now occur to those skilled in the art. It is, therefore, to be understood that the appended claims are intended to cover all such modifications and changes as fall within the true spirit of the invention.

## Claims:

1. A wireless device, comprising:

a transceiver coupled to an antenna; and

5 a power amplifier to provide a signal to transmit at the antenna, the power amplifier having an adaptive power control set in response to a characterization of adjacent channels.

2. The wireless device of claim 1 wherein the characterization includes  
10 determining a type of modulation used by signals in the adjacent channels.

3. The wireless device of claim 1 wherein characteristics of the adjacent channels include a power measurement to determine a lower power in one of the adjacent channels.

15 4. The wireless device of claim 3 wherein the adaptive power control is set based on the type of modulation and the lower power of received power levels of the adjacent channels.

20 5. The wireless device of claim 1 wherein the adaptive power control is set based on a characteristic of an occupied adjacent channel in the event that one adjacent channel is vacant.

25 6. The wireless device of claim 1 wherein the adaptive power control is set to allow the power amplifier to transmit at full power in the event that both adjacent channels are vacant.

7. A wireless device, comprising:

an antenna to transmit a signal on a first channel;

30 a channel receiver to provide characteristics of channels adjacent to the first channel; and

a power amplifier to provide a signal to transmit on the first channel and having an adaptive power control set in response to the characteristics of the channels adjacent to the first channel.

5           8. The wireless device of claim 7 further including a level detector coupled to the channel receiver.

9. The wireless device of claim 8 further including an analog-to-digital converter coupled to the level detector.

10

10. The wireless device of claim 9 further including a programmable power adjustor coupled to the analog-to-digital converter to provide the adaptive power control to the power amplifier.

15           11. The wireless device of claim 7 wherein the programmable power adjustor provides preset values to adjust the signal on the first channel.

12. A method of transmitting a signal on a first channel by a wireless device, comprising:

20

investigating, in the wireless device, received signals to determine characteristics of channels adjacent to the first channel; and

adjusting a power amplifier to provide a signal to transmit on the first channel set in response to the characteristics of the channels adjacent to the first channel.

25

13. The method of claim 12 further comprising:  
extracting time averaged amplitude coefficients for the channels adjacent to the first channel.

30

14. The method of claim 13 further comprising:  
converting analog values of the time averaged amplitude coefficients to

time sampled digital values.

15. The method of claim 14 further comprising:

5 determining a lower power in one of the channels adjacent to the first channel to provide a transmitter power for the first channel.

16. The method of claim 15 further including:

10 comparing an allowable transmitter power with a current transmitter power.

17. The method of claim 16 further including:

generating a correction signal to adjust the signal supplied to the power amplifier.

15 18. The method of claim 12 further including:

dynamically adjusting the adaptive power control for the first channel based on a modulation type and a power of the channels adjacent to the first channel.

20 19. The method of claim 12 setting the adaptive power control based on an occupied adjacent channel in the event that one adjacent channel is vacant.

25 20. The method of claim 12 setting the adaptive power control at full power in the event that both adjacent channels are vacant.

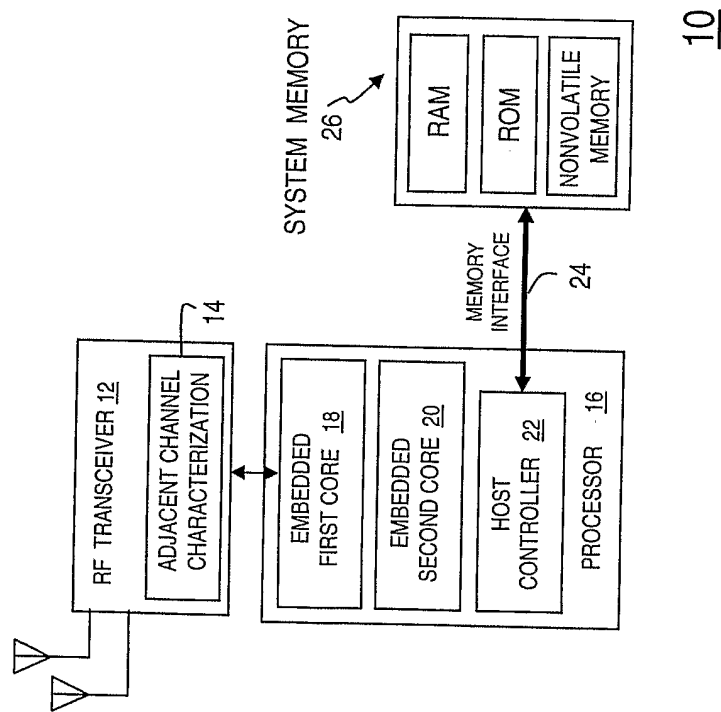


FIG. 1

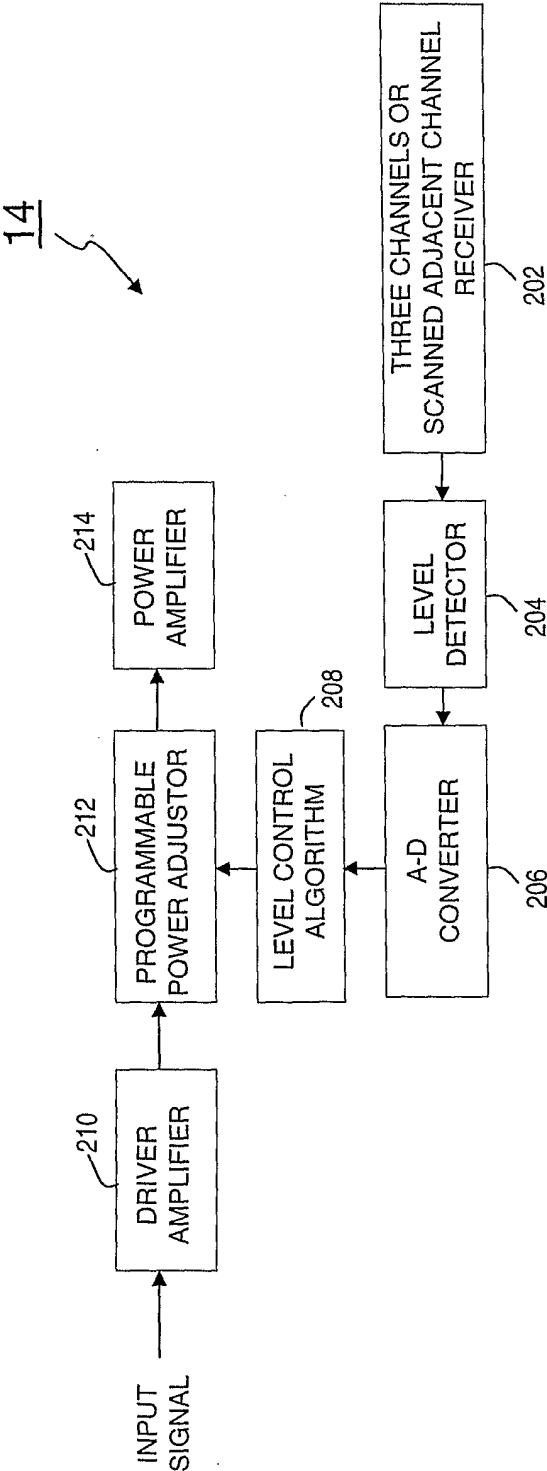


FIG. 2

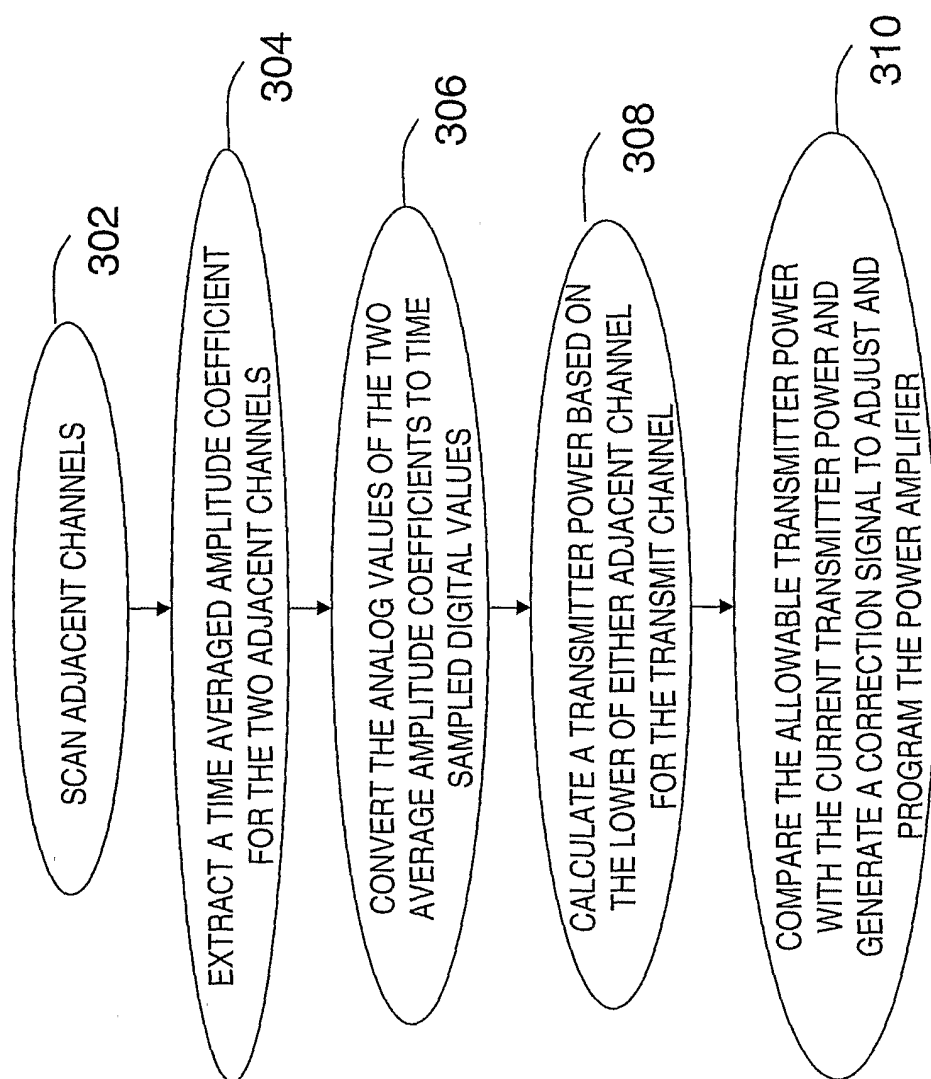


FIG. 3

300

# INTERNATIONAL SEARCH REPORT

International application No

PCT/US2006/002653

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. H04B7/005

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                                                                                                               | Relevant to claim No. |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| X         | US 6 230 022 B1 (SAKODA KAZUYUKI ET AL)<br>8 May 2001 (2001-05-08)<br>abstract<br>column 2, line 18 - line 52<br>column 5, line 63 - column 6, line 16<br>column 9, line 25 - line 30<br>column 10, line 61 - column 11, line 10 | 1-20                  |
| E         | US 2006/067354 A1 (WALTHO ALAN E ET AL)<br>30 March 2006 (2006-03-30)<br>abstract<br>paragraphs [0018], [0031] - [0044]                                                                                                          | 1-20                  |
| A         | US 2002/021687 A1 (TOKI KAZUYA ET AL)<br>21 February 2002 (2002-02-21)<br>abstract<br>paragraphs [0034], [0035], [0054] - [0057], [0061], [0064]                                                                                 | 1,7,12                |



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

31 May 2006

Date of mailing of the international search report

07/06/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Lustrini, D

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2006/002653

| Patent document<br>cited in search report |    | Publication<br>date |      | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|----|---------------------|------|----------------------------|---------------------|
| US 6230022                                | B1 | 08-05-2001          | DE   | 19860022 A1                | 16-09-1999          |
|                                           |    |                     | JP   | 11196043 A                 | 21-07-1999          |
| <hr/>                                     |    |                     |      |                            |                     |
| US 2006067354                             | A1 | 30-03-2006          | NONE |                            |                     |
| <hr/>                                     |    |                     |      |                            |                     |
| US 2002021687                             | A1 | 21-02-2002          | JP   | 2001358606 A               | 26-12-2001          |
| <hr/>                                     |    |                     |      |                            |                     |