




(86) Date de dépôt PCT/PCT Filing Date: 2005/04/14
(87) Date publication PCT/PCT Publication Date: 2005/10/27
(85) Entrée phase nationale/National Entry: 2006/10/12
(86) N° demande PCT/PCT Application No.: GB 2005/001438
(87) N° publication PCT/PCT Publication No.: 2005/100624
(30) Priorité/Priority: 2004/04/15 (GB0408393.7)

(71) Demandeur/Applicant:
JOHNSON MATTHEY PUBLIC LIMITED COMPANY, GB
(72) Inventeurs/Inventors:
BOYD, DAVID ALAN, GB;
GUTFLEISCH, OLIVER, DE;
PRATT, ALLIN SIDNEY, GB
(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : COMPOSITION DE STOCKAGE D'HYDROGENE
(54) Title: HYDROGEN STORAGE COMPOSITION

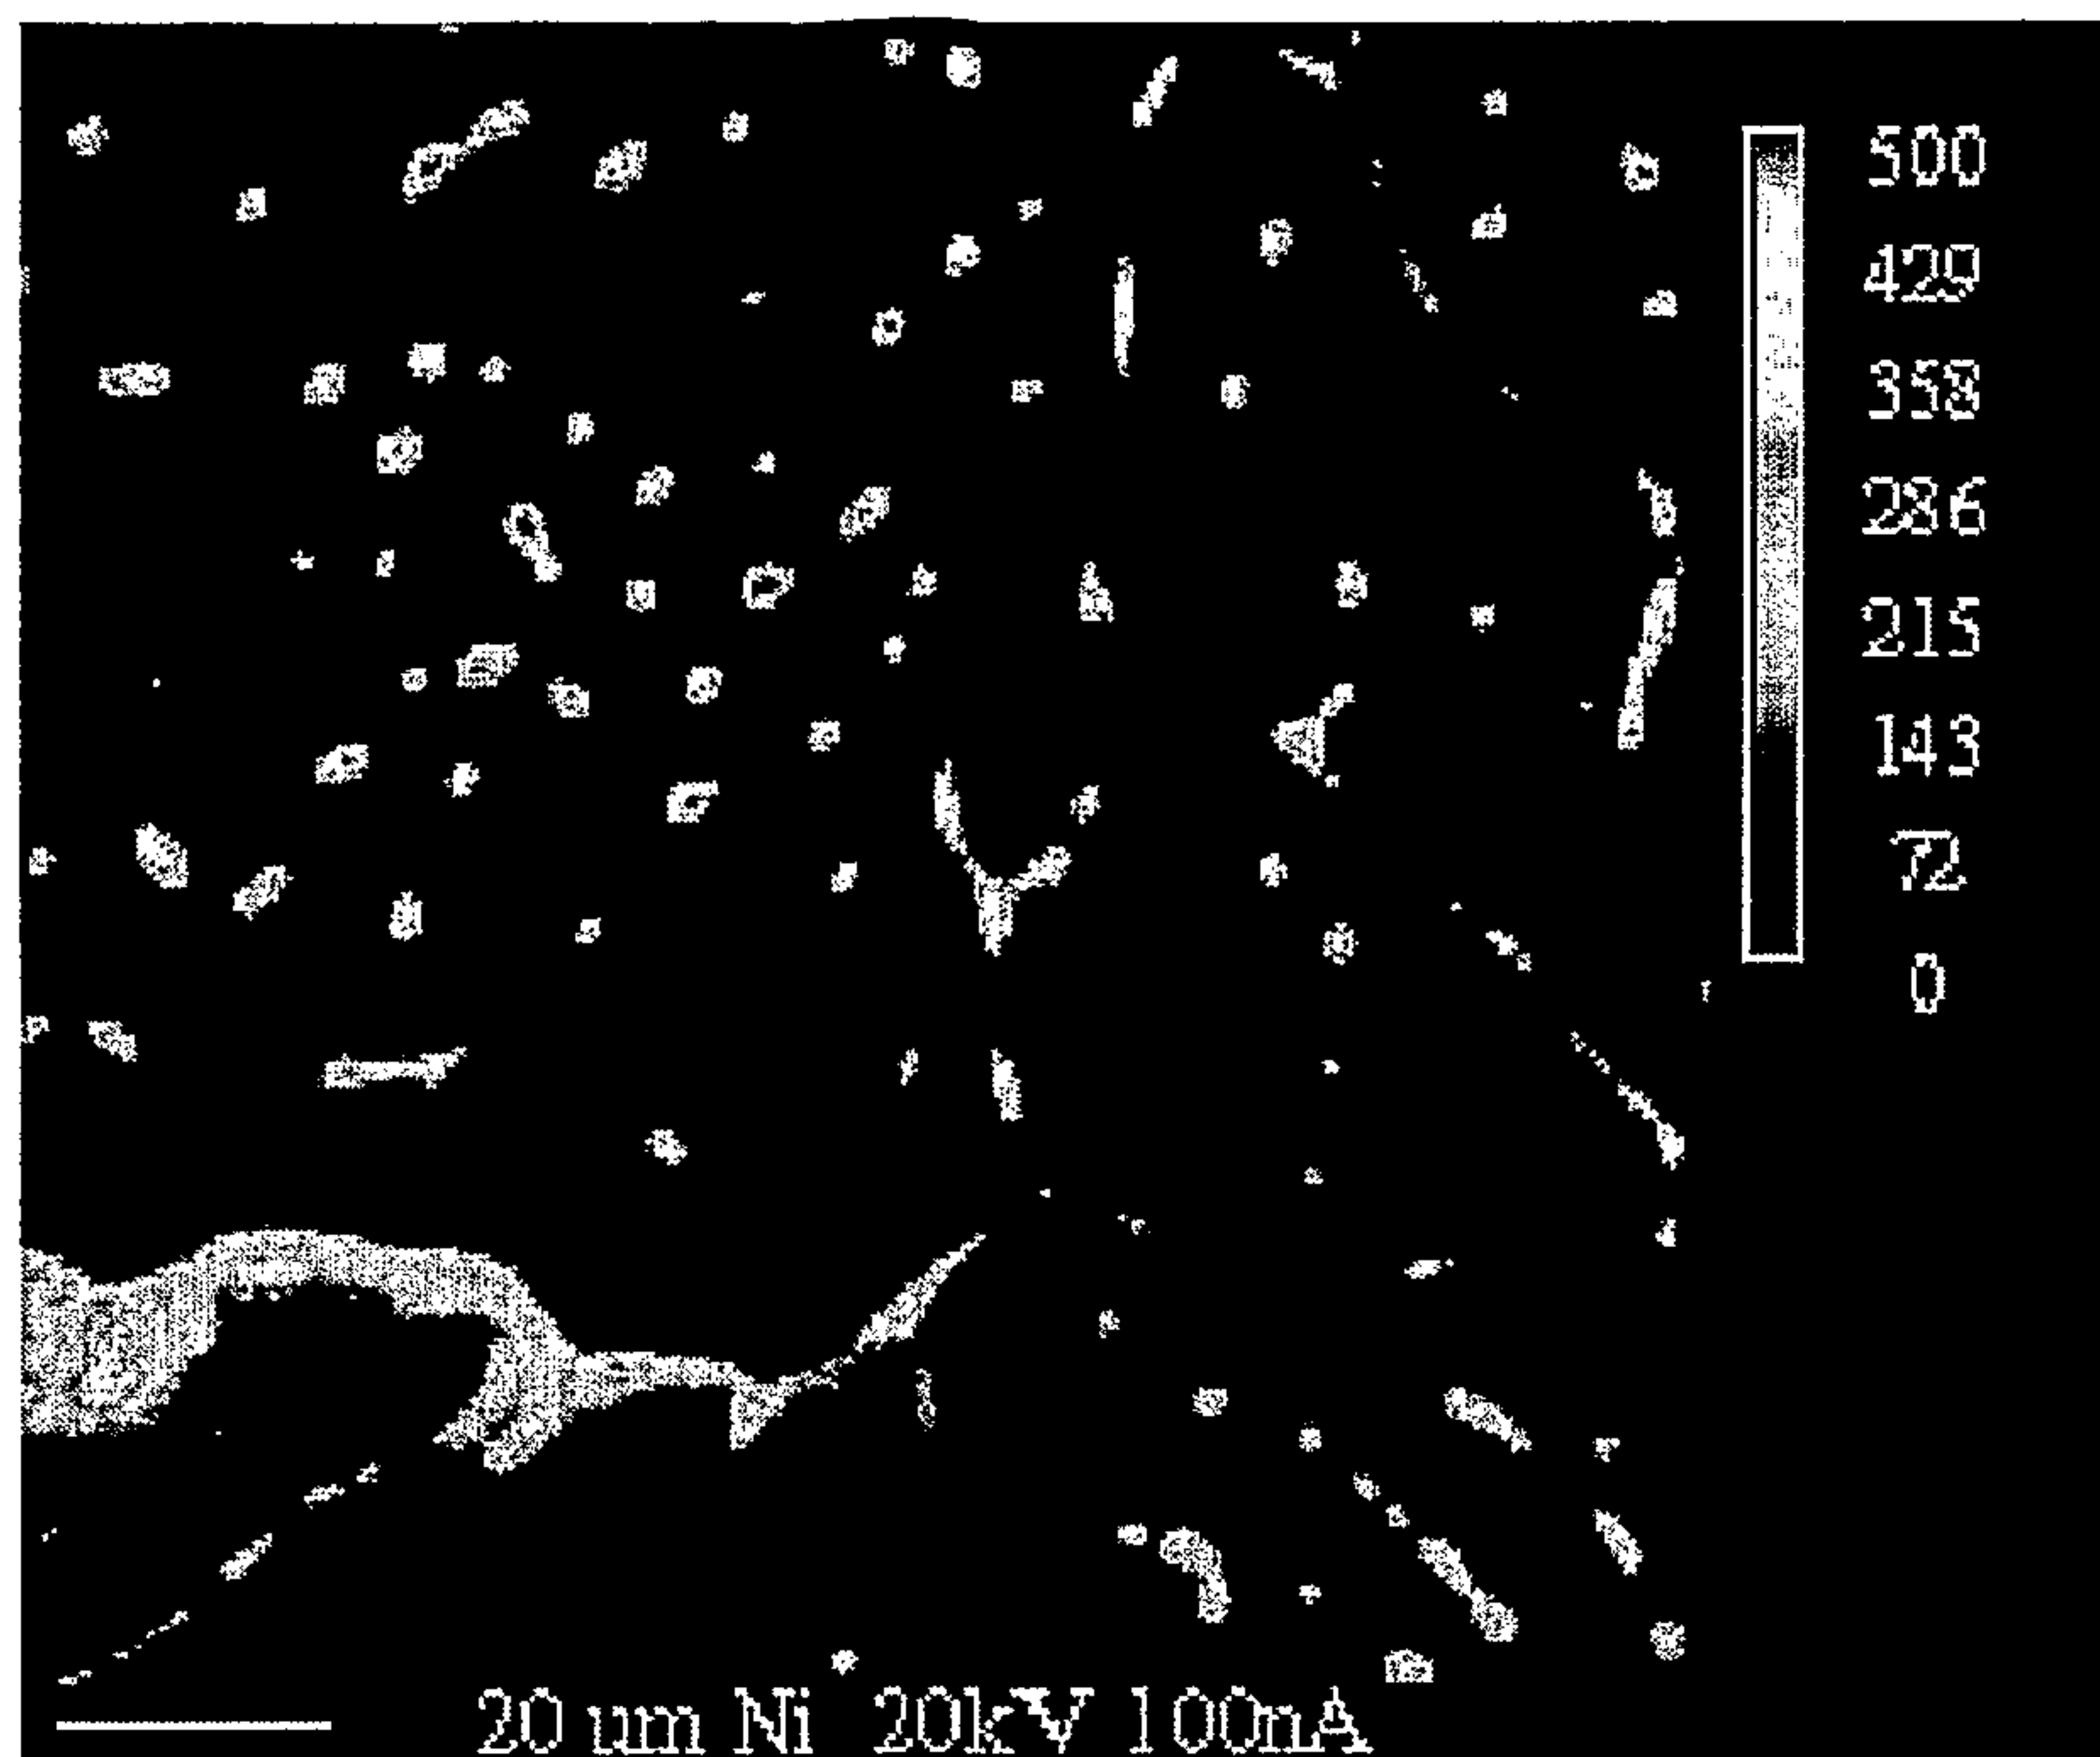

(57) Abrégé/Abstract:

A hydrogen storage composition comprises a particulate alloy comprising grains of magnesium, wherein the grain boundaries contain phases comprising nickel and at least one non-nickel transition metal, wherein the nickel is present at levels of ≤ 5 wt% based on the composition as a whole, and wherein the at least one non-nickel transition metal is present at levels of ≤ 0.5 wt% based on the composition as a whole.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 October 2005 (27.10.2005)

PCT

(10) International Publication Number
WO 2005/100624 A1

(51) International Patent Classification⁷: **C22C 23/00**,
C01B 3/00

(74) Agent: NUNN, Andrew, Dominic; Johnson Matthey
Technology Centre, Blounts Court, Sonning Common,
Reading RG4 9NH (GB).

(21) International Application Number:
PCT/GB2005/001438

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM,
PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU,
ZA, ZM, ZW.

(22) International Filing Date: 14 April 2005 (14.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0408393.7 15 April 2004 (15.04.2004) GB

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): JOHN-
SON MATTHEY PUBLIC LIMITED COMPANY
[GB/GB]; 2-4 Cockspur Street, Trafalgar Square, London
SW1Y 5BQ (GB).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): BOYD, David,
Alan [GB/GB]; Woodside, 1 Wood Lane, Sonning Com-
mon, Reading RG4 9SJ (GB). GUTFLEISCH, Oliver
[DE/DE]; Eisenacherstr 19, 01309 Dresden (DE). PRATT,
Allin, Sidney [GB/GB]; 6 The Limes, Crowmarsh Gifford,
Wallingford OX10 8HF (GB).

Published:

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: HYDROGEN STORAGE COMPOSITION

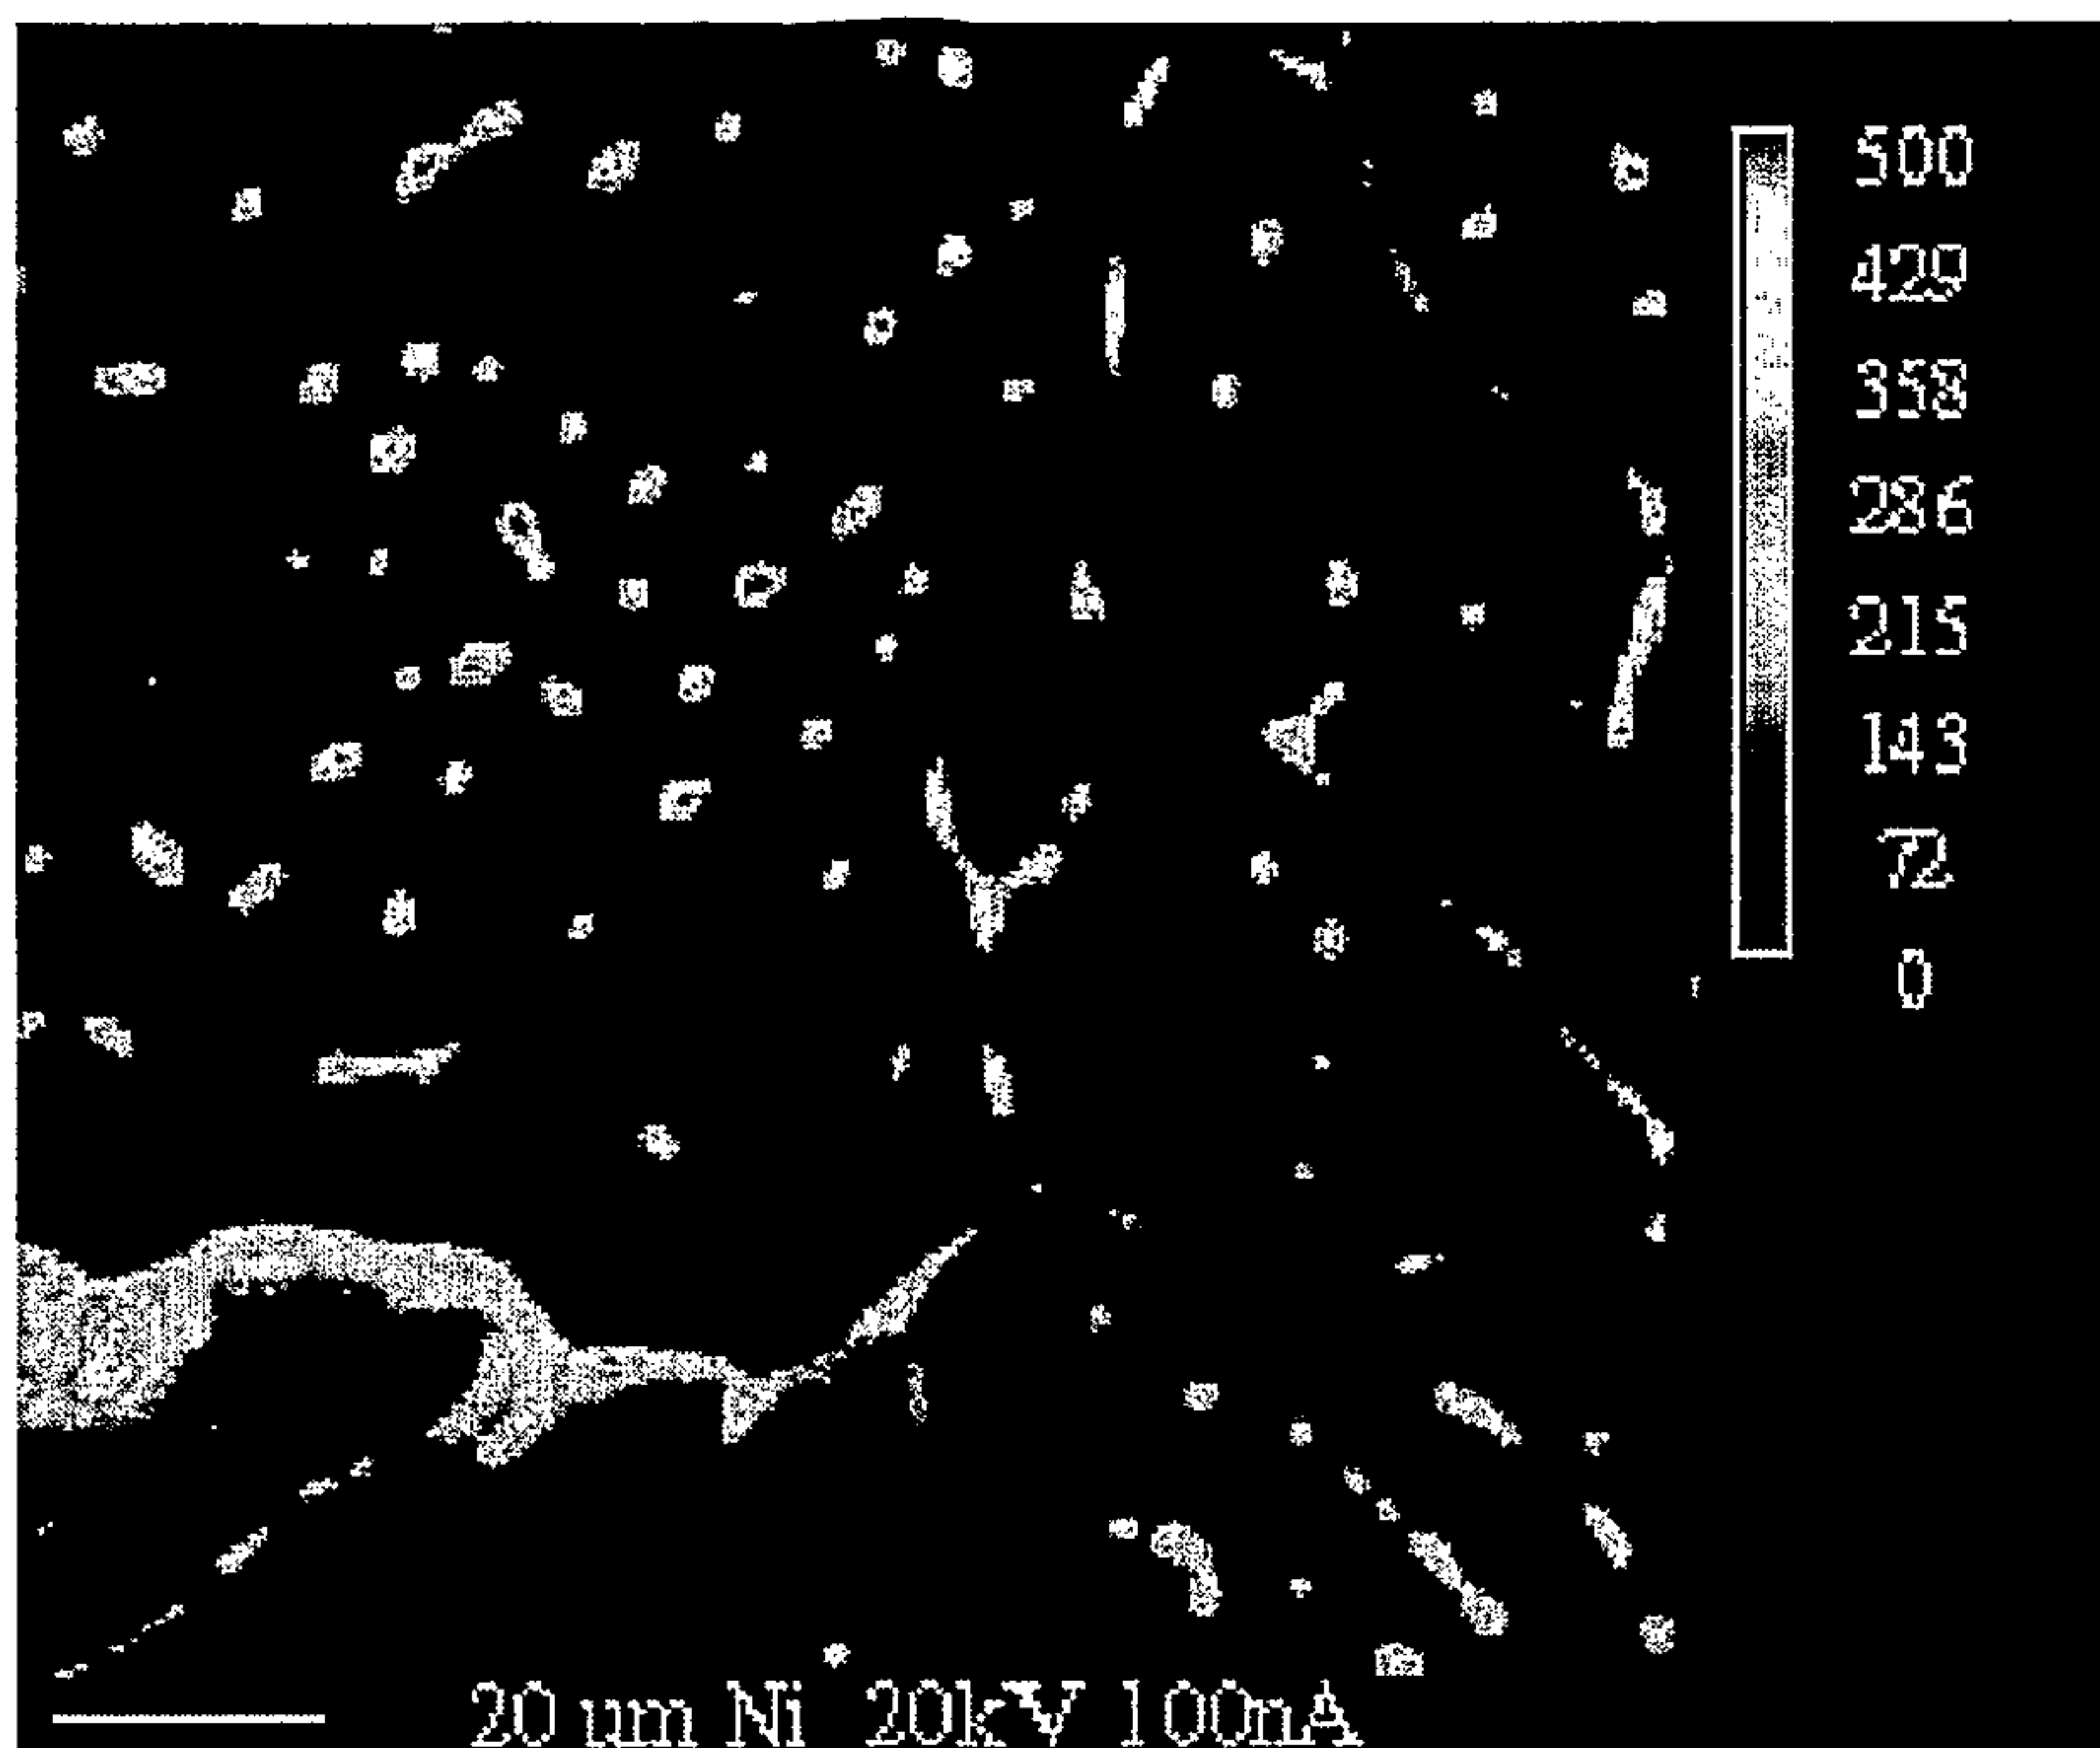

(57) Abstract: A hydrogen storage composition comprises a particulate alloy comprising grains of magnesium, wherein the grain boundaries contain phases comprising nickel and at least one non-nickel transition metal, wherein the nickel is present at levels of ≤ 5 wt% based on the composition as a whole, and wherein the at least one non-nickel transition metal is present at levels of ≤ 0.5 wt% based on the composition as a whole.

WO 2005/100624 A1

HYDROGEN STORAGE COMPOSITION

This invention relates to a hydrogen storage composition and in particular to a
5 hydrogen storage composition comprising a particulate alloy comprising magnesium and
nickel.

Hydrogen has great potential as an energy source because it can be easily
generated from renewable sources and its use creates neither air pollution nor greenhouse
10 gas emissions. The principal problem with the use of hydrogen is that as a gas it is
difficult to store, it may be stored in vessels as a cryogenic liquid or as a compressed gas
but such storage vessels are not well suited to everyday use.

An alternative means of releasably storing hydrogen over a plurality of cycles is
15 to use a metal or an alloy, where the metal or alloy absorbs and stores relatively large
amounts of hydrogen by bonding with the hydrogen to form a hydride. These materials
have the ability to absorb and release hydrogen without deteriorating. The rate of
absorption and desorption can be controlled by temperature and pressure. The United
States Department of Energy (DoE) have set a target (to be achieved by 2010), by which
20 hydrogen storage materials may be judged for their potential practicable value. This
target includes a storage capacity of 6 wt% (see Hydrogen Storage: The Key Challenge
Facing a Hydrogen Economy by Motyka et al., published in March 2004, available from
the US Office of Scientific and Technical Information).

25 Magnesium itself has a relatively high capacity for hydrogen storage, in the form
of magnesium hydride, but unfortunately the reaction kinetics for the absorption and
desorption of hydrogen are too slow. An additional problem is that hydride formation at
the surface of the magnesium particles can block further diffusion of hydrogen into the
bulk of the material.

30

In prior proposals, it was realised that increasing the surface area of the
magnesium particles could improve the hydrogen absorption and desorption
characteristics and thus different techniques were tried in an effort to achieve this.

High energy ball milling has been used to create mechanical alloys of magnesium of significantly smaller particle size. This technique introduces large numbers of dislocations within the metal crystals with large areas of grain (or crystallite) boundaries and high levels of internal defects. These grain boundaries act as paths for the fast
5 diffusion of hydrogen and reduce the volume of material that is accessed by one path, such that hydrogen absorption and desorption times are substantially reduced.

The ball milling technique is a popular approach to improving the hydrogen storage characteristics of magnesium, and many publications study this process and how
10 varying the conditions of the process may influence the final material (e.g. Huot et al., *J. Alloy. Compd.*, 1995, 231, 1-2, p. 815-819; Schulz et al., *Mat. Sci. Eng. A-Struct.*, 1999, A267, 2, p. 240-245; Bobet et al., *Mater. Manuf. Process*, 2002, 17, 3, p. 351-361). Another focus of hydrogen storage research has been to determine how additives may influence the properties of magnesium hydrides, possibly by catalysing the dissociation
15 of H₂ molecules at the absorbing surface. This work has tended to concentrate on cobalt, iron and nickel, which are mechanically alloyed with the magnesium during the ball milling stage (Bobet et al., *Int. J. Hydrogen Energy*, 2000, 25, 10, p. 987-996). Recently we have shown that ball milling of at least one reducible platinum group metal (PGM) compound with magnesium, for a fraction of the overall milling time, results in
20 nanoparticles of PGMs being located predominantly at the surface of the milled particles (WO 2004/016817). The addition of nanoparticles of PGMs was shown to improve the hydrogen absorption / desorption characteristics of the milled material.

Another approach to improve hydrogen storage capacity and
25 absorption/desorption kinetics was proposed by Friedlmeier et al., who prepared a magnesium nickel alloy by melting the two metals together, then grinding the alloy to produce small particles (*Int. J. Hydrogen Energy*, 1988, 13, 8, p. 467-474).

GB 524,113 and GB 596,102 describe magnesium alloys that may contain nickel
30 and other transition metals. The alloys are intended for structural purposes and may be cast, forged, extruded or pressed to form articles such as engine parts.

However, although extensive studies on metal substitution and milling techniques have been carried out on alloys suitable for hydrogen storage to date, nothing has yet been developed to reliably meet all the requirements set down by the DoE.

5 We have now found, very surprisingly, that a magnesium-containing alloy, comprising ≤ 5 wt% nickel and ≤ 0.5 wt% of at least one non-nickel transition metal, prepared by melting the magnesium, nickel and the at least one non-nickel transition metal is a more active hydrogen storage material than prior art alloys containing significantly more nickel. We believe that this is due to the unusual structure of the alloy
10 produced when the alloy is cooled from the melt, wherein the internal structure of the solid comprises grains (or crystallites) of magnesium surrounded by grain boundaries of a different chemical composition (i.e. made up of a different phase). The chemical composition of the grain boundaries is rich in the nickel and the at least one non-nickel transition metal in comparison with the chemical composition of the grains themselves.

15

According to one aspect, the invention provides a hydrogen storage composition comprising a particulate alloy comprising grains of magnesium, wherein the grain boundaries contain phases comprising of nickel and at least one non-nickel transition metal, and wherein the nickel is present at levels of ≤ 5 wt% based on the composition as
20 a whole, and wherein the at least one non-nickel transition metal is present at levels of $\leq 0.5\%$ based on the composition as a whole. The grain boundaries are present within the internal structure of the particles, as well as forming the surface of the solid particle, and therefore are not located solely at the surface of the solid.

25

Usefully, we have found that the proportion of nickel present can be less than 2 wt%, or even as low as from 0.01 wt% to 1.00 wt%, without significantly impacting upon hydrogen uptake and storage characteristics. Additionally, we have found that the proportion of the at least one non-nickel transition metal present may be at levels as low as from 0.01 wt% to 0.50 wt%, commonly between 0.01 wt% and 0.20 wt%, without
30 significantly impacting upon hydrogen uptake and storage characteristics.

In one embodiment, the composition comprises particles of the alloy of an average size of less than 500 μm , commonly less than 50 μm or even as small as 500 nm.

Whereas the composition, as described, includes grains of magnesium metal, it will be appreciated that, in use, this metal will be in the form of a magnesium compound, particularly magnesium hydride. Therefore, in one embodiment, the composition comprises the magnesium in the form of a hydride.

5

The at least one non-nickel transition metal can be selected from the group consisting of Pt, Pd, Ru, Ir, Ag, Au, Cu, Co, W and mixtures of any two or more thereof. In one embodiment, the non-nickel transition metal is at least one of Pt, Pd, Ru, Ir, Ag or a mixture of any two or more thereof. The presence of the at least one non-nickel transition metal aids hydrogen absorption, but it need not add significantly to the expense of the composition as relatively small levels of the metals are needed to achieve an advantageous improvement in activity.

According to a further aspect, the invention provides a method of making a composition, according to the invention, wherein the magnesium, nickel and the at least one non-nickel transition metal are melted to form an alloy. This alloy will then be cooled, preferably at a high cooling rate (for example ≥ 50 °C/s for at least the first two seconds), to produce solid alloy, and then processed to produce particles of the desired size.

20

This processing step commonly involves casting of the molten alloy, although the molten alloy may be cooled and processed simultaneously by powder spray atomisation to form a solid alloy of reduced particle size (in comparison to that formed by casting alone). If additional processing is necessary to reduce the particle size of the solid alloy to less than 500 μm , then this may be carried out by grinding the solid alloy to produce coarse particles. Additionally the alloy particles may be milled to produce particles of an even smaller crystallite size with high surface area, as desired, preferably under hydrogen to produce the hydride phase suited for use as a storage material.

According to another aspect, the invention provides an apparatus for providing, on demand, a replenishable supply of hydrogen, which apparatus comprising:

- (i) a container comprising a hydrogen storage composition according to the invention;

30

- (ii) means for adjusting the pressure within the container;
- (iii) means for adjusting the temperature of the contents of the container; and
- (iv) means, in use, for controlling the pressure adjusting means and/or the temperature adjusting means.

5

Such an apparatus may have hydrogen storage capacities in excess of 6 wt% and 60 Kg/m³ based on a powder packing density of 1 g/cm³. One advantage of this apparatus is that the control means controls the temperature adjusting means to heat the hydrogen storage composition to temperatures of from 100 to 350°C, thereby to absorb or desorb hydrogen in the hydrogen storage composition. Additionally, the control means controls the pressure adjusting means to adjust the pressure in the container to pressures of from 1 to 10 bar (10⁻² to 10⁻¹ kPa), thereby to absorb or desorb hydrogen therein. Generally, hydrogen absorption occurs at a lower temperature and higher pressure than hydrogen desorption.

15

The pressure adjusting means may comprise a valve and/or a pump to enable hydrogen to be released from the container and supplied to a relevant application, e.g. a fuel cell, at an appropriate pressure; and for the container and, hence, the composition to be replenished with hydrogen from a suitable source.

20

In one embodiment, the invention provides a mobile power source comprising an apparatus as described above, whereas in another embodiment the invention provides a stationary power source comprising an apparatus as described above.

25

According to one aspect, the invention provides a method of providing, on demand, a replenishable supply of hydrogen, which method comprising providing a composition according to the invention, comprising a magnesium hydride, in a temperature range of from 100 to 350 °C and a pressure range of from 1 to 10 bar (10⁻² to 10⁻¹ kPa), thereby to desorb hydrogen absorbed therein.

30

In order that the invention may be more fully understood an apparatus embodiment and the following Examples are provided by way of illustration only and with reference to the accompanying drawings, in which:

Figure 1 is a graph of hydrogen absorption from a particulate Mg/1 wt% Ni/0.2 wt% Pd composition, prepared according to the method described in Example 1, at temperatures ranging from 100 °C to 300 °C;

5 Figure 2 is a graph of hydrogen desorption from a particulate Mg/1 wt% Ni/0.2 wt% Pd composition, prepared according to the method described in Example 1, at temperatures ranging from 250 °C to 350 °C;

Figure 3 is a graph of hydrogen absorption from a particulate Mg/1 wt% Ni/0.2 wt% Pd composition, prepared according to the method described in Example 1, at temperatures ranging from 250 °C to 300 °C, after from 1 to 11 absorption / desorption cycles;

10 Figure 4 is a graph of hydrogen desorption from a particulate Mg/1 wt% Ni/0.2 wt% Pd composition, prepared according to the method described in Example 1, at 300 °C, after from 1 to 9 absorption / desorption cycles;

Figure 5 is an electron microscopy image showing a particulate magnesium alloy, prepared according to the method described in Example 1, with nickel and palladium-
15 rich grain boundaries;

Figure 6 is an electron probe microanalysis image, collected using X-ray fluorescence to highlight the presence of magnesium, of a composition prepared according to the method described in Example 1;

Figure 7 is an electron probe microanalysis image, collected (on the same area of the
20 same sample as Figure 6) using X-ray fluorescence to highlight the presence of nickel;

Figure 8 is an electron microscopy image, collected (on the same area of the same sample as Figure 6) using X-ray fluorescence to highlight the presence of palladium;

Figure 9 is a comparative graph of hydrogen absorption from a milled Mg /1 wt% Ni/ 0.5 wt% Pd composition, prepared according to the method described in Example 2, at
25 300 °C after from 1 to 4 absorption / desorption cycles; and

Figure 10 is a schematic diagram of an apparatus embodiment according to the invention.

Referring to Figure 10, apparatus 10 comprises a container 12 containing a
30 hydrogen storage composition 14, valve means 16 for adjusting the pressure within the container, heating means 18, comprising a heating element, for adjusting the temperature of the contents of the container, a power supply 19 for the temperature adjusting means

and means 20, in use, for controlling the pressure adjusting means and/or the temperature adjusting means.

In use, a hydrogen demand input is made to control means 20 for a supply of
5 hydrogen. Control means 20 directs valve means 16 to open to enable hydrogen supply (thereby releasing pressure in the container thereby promoting hydrogen release from composition 14) and to activate heating means to increase the temperature of hydrogen storage composition 14, e.g. towards 300 °C, thereby to promote release of hydrogen. The hydrogen demand input can be controlled by suitable open-loop feedback means
10 (not shown) in order to control the rate of hydrogen supply required or to stop hydrogen supply completely as required.

In order to replenish a depleted amount of stored hydrogen in composition 14, valve 16 is controlled to open to enable a high pressure supply of hydrogen to be
15 admitted to container and heating means 18 is deactivated. In order to promote more rapid absorption of the hydrogen in composition 14, it may be desirable to provide refrigeration means (not shown) in order to more rapidly cool the composition, e.g. towards 200 °C, to promote absorption of hydrogen. However, such refrigeration means is unnecessary if the hydrogen supply is at low temperature.

20

EXAMPLE 1

Preparation of Mg/1 wt% Ni/0.2 wt% Pd by melting and milling

99.9g magnesium and 1g nickel together with 0.2 g palladium were weighed out,
25 (the excess of magnesium is present to compensate for the approximate 1% vapour loss experienced during melting) and melted in a pre-dried, heated Alumina crucible under 250-300 mbar (2.5×10^{-3} to 3.0×10^{-3} kPa) Ar in a Balzers VSG002 vacuum melting furnace after initial evacuation at 10⁻⁵ torr. Melting time was approximately 10 minutes, and the melt was kept in the molten state for the shortest time that allowed complete
30 dissolution and mixing, about 2 minutes. The molten charge was then cast into a copper chill mould from approximately 100 °C above the melting point.

The recovered ingot was cleaned, and reduced to a crude powder under Ar by mechanical means before being transferred to an IFW Dresden for milling under hydrogen for >100 hours.

5 Electron microscope images for the composition are shown in Figures 5 to 8. In particular, it can be seen in Figure 6 that the magnesium is uniformly spread throughout the grains of the particulate magnesium alloy because the grey shade indicates a high proportion of magnesium whilst the lighter shade represents the lesser amount of magnesium found in the grain boundaries. Figures 7 and 8 demonstrate the presence of
10 nickel and palladium at the grain boundaries of the particulate magnesium alloy as the dark areas indicate that very little nickel and palladium is present within the grains whilst the grey areas show that a greater amount of these metals is present in the grain boundaries.

15

EXAMPLE 2

Preparation of Mg/1 wt% Ni 0.5% PGM by milling only

24.75g magnesium hydride and 0.25g nickel were weighed out and milled under
20 3 bar (3×10^{-2} kPa) hydrogen for 30 hours at 350 rpm, according to a 15 mins on / 10 mins off cycle. The ball charge was 15 x 20mm balls in a 250 ml pot. 0.125 g of palladium nanoparticles were added for the last hour of milling.

EXAMPLE 3

Hydrogen Absorption and Desorption Measurements

25 Hydrogen absorption and desorption measurements were carried on the composition of Example 1 using a Hiden Analytical IGA (Intelligent Gravimetric Analyser) at varied temperatures. Hydrogen absorption was carried out using H₂ gas at a
30 pressure of 10 bar (10^{-1} kPa). Hydrogen desorption was carried out using H₂ gas at a pressure of either 1 bar or 50 mbar (1×10^{-2} to 5×10^{-3} kPa).

The results of the IGA hydrogen adsorption and desorption measurements are set out in Figures 1 and 2, which show that the composition of Example 1 absorbs hydrogen to levels in excess of 6 wt% in less than 60 mins at temperatures as low as 250 °C and desorbs hydrogen fully within 30 mins at temperatures as low as 275 °C. Additionally, 5 Figures 3 and 4 demonstrate that this composition continues to exhibit the favourable characteristics of readily absorbing and desorbing approx. 6 wt% of hydrogen at temperatures ≤ 300 °C after multiple absorption / desorption cycles, in contrast to the milled only composition shown in Figure 9.

CLAIMS:

10

1. A hydrogen storage composition comprising a particulate alloy comprising grains of magnesium, wherein the grain boundaries contain phases comprising nickel and at least one non-nickel transition metal, wherein the nickel is present at levels of ≤ 5 wt% based on the composition as a whole, and wherein the at least one non-nickel transition metal is present at levels of ≤ 0.5 wt% based on the composition as a whole.
5
2. A composition according to claim 1, wherein the particles of the alloy have an average size of less than 500 μm .
10
3. A composition according to claim 1 or 2, comprising nickel at ≤ 2 wt% based on the composition as a whole.
- 15 4. A composition according to claim 3, comprising nickel at from 0.01 wt% to 1.00 wt% based on the composition as a whole.
5. A composition according to any preceding claim, wherein the at least one non-nickel transition metal is selected from the group consisting of Pt, Pd, Ru, Ir, Ag, Au, Cu, Co, W and mixtures of any two or more thereof.
20
6. A composition according to claim 5, wherein the at least one non-nickel transition metal is selected from the group consisting of Pt, Pd, Ru, Ir, Ag and mixtures of any two or more thereof.
25
7. A composition according to claim 5 or 6, wherein the at least one non-nickel transition metal is present at levels of from 0.01 wt% to 0.50 wt%, preferably 0.01 wt% to 0.20 wt% based on the composition as a whole.
- 30 8. A composition according to any preceding claim, wherein the magnesium is in the form of a hydride.
9. A method of making a composition according to any preceding claim, comprising melting the magnesium, nickel and the at least one non-nickel transition metal to form an

alloy, cooling the molten alloy to produce a solid alloy and processing the solid alloy to produce particles of the desired size.

10. A method according to claim 9, wherein the melted alloy is cooled by casting.

11. A method according to claim 9, wherein the melted alloy is cooled and processed by powder spray atomisation.

12. A method according to claim 9, 10 or 11, wherein the solid alloy is processed by grinding.

13. A method according to claim 12, wherein the solid alloy is processed by milling.

14. A method according to claim 13, wherein the milling is carried out under an atmosphere comprising hydrogen to produce magnesium hydride.

15. An apparatus (10) for providing, on demand, a replenishable supply of hydrogen, which apparatus comprising:

(i) a container (12) comprising a hydrogen storage composition (14) according to any of claims 1 to 8;

(ii) means for adjusting the pressure within the container (16);

(iii) means for adjusting the temperature of the contents of the container (18); and

(iv) means, in use, for controlling the pressure adjusting means and/or the temperature adjusting means (20).

16. An apparatus according to claim 15, wherein the control means controls the temperature adjusting means to heat the hydrogen storage composition to temperatures of from 100 to 350 °C, thereby to absorb or desorb hydrogen in the hydrogen storage composition.

17. An apparatus according to claim 15 or 16, wherein the control means controls the pressure adjusting means to adjust the pressure in the container to pressures of from 1 to 10 bar (10^{-2} to 10^{-1} kPa), thereby to absorb or desorb hydrogen therein.

18. A mobile power source comprising an apparatus according to any of claims 15 to 17.
19. A stationary power source comprising an apparatus according to any of claims 15 to 17.
20. A method of providing, on demand, a replenishable supply of hydrogen, which method comprising providing a composition according to claim 8 at a temperature of from 100 to 350 °C and a pressure of from 1 to 10 bar (10^{-2} to 10^{-1} kPa), thereby to desorb hydrogen absorbed therein.

Hydrogen absorption of Mg + 1% Ni + 0.2% Pd at different Temperatures

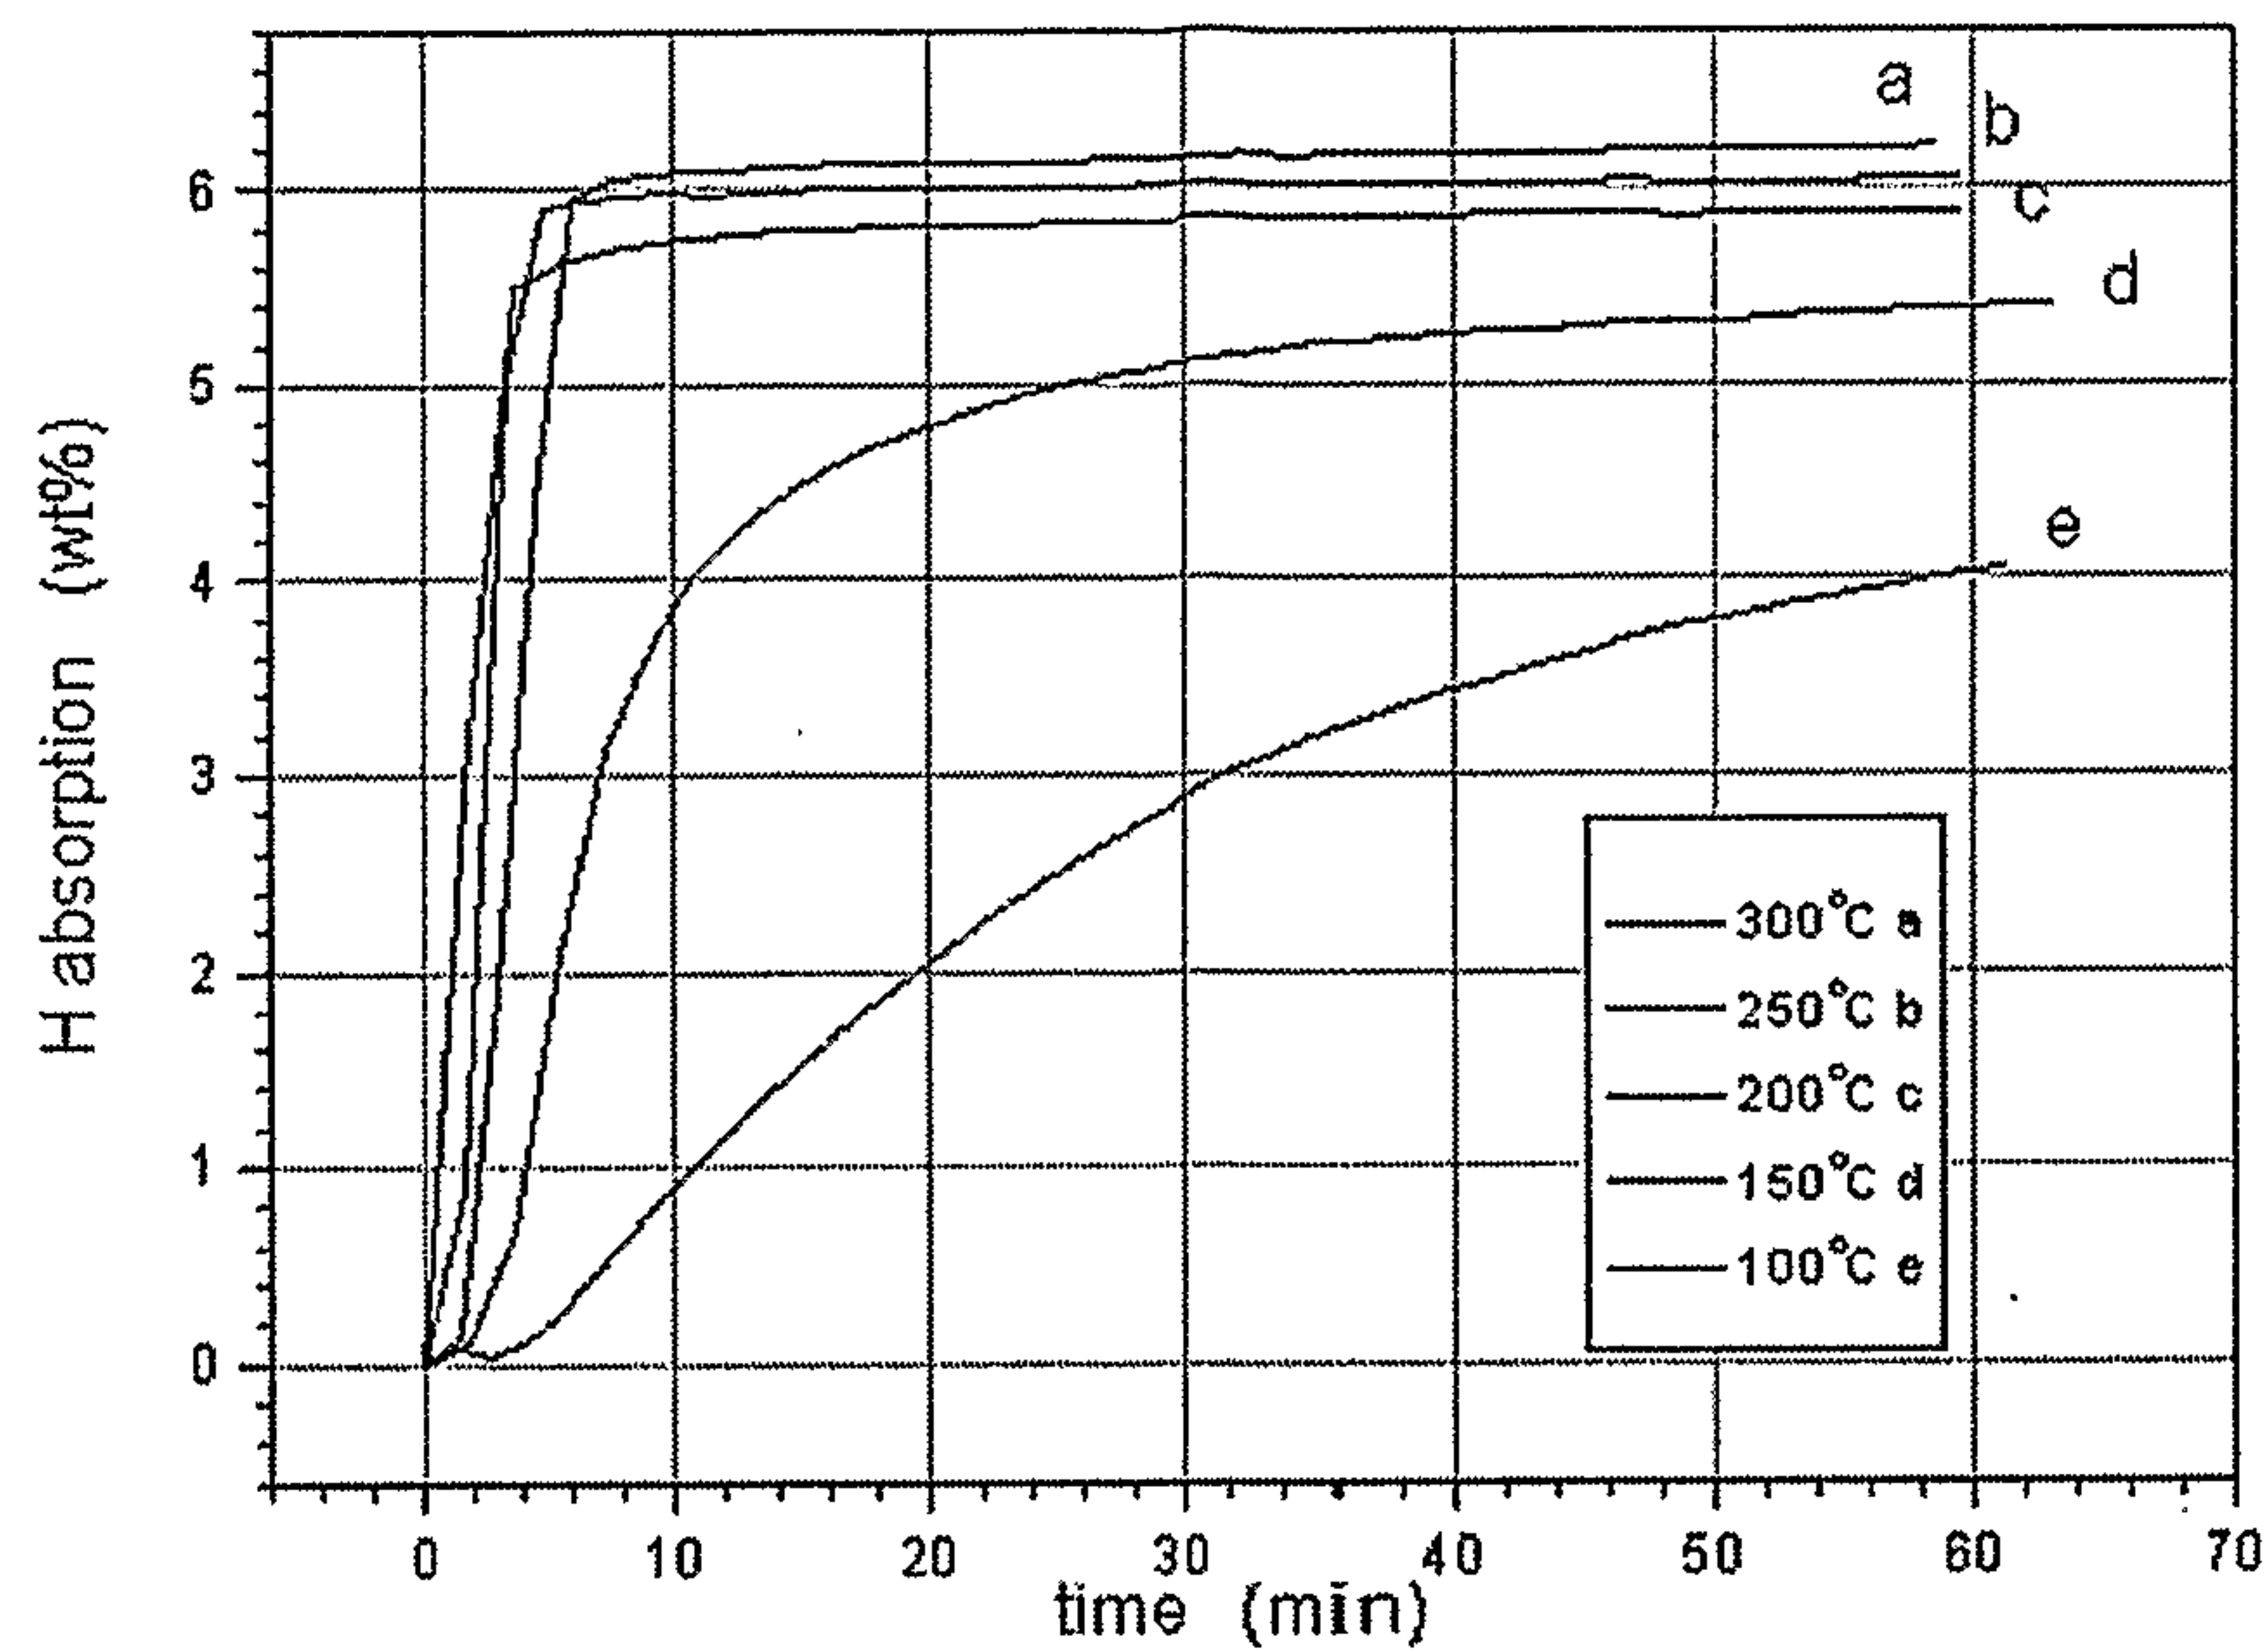


Figure 1

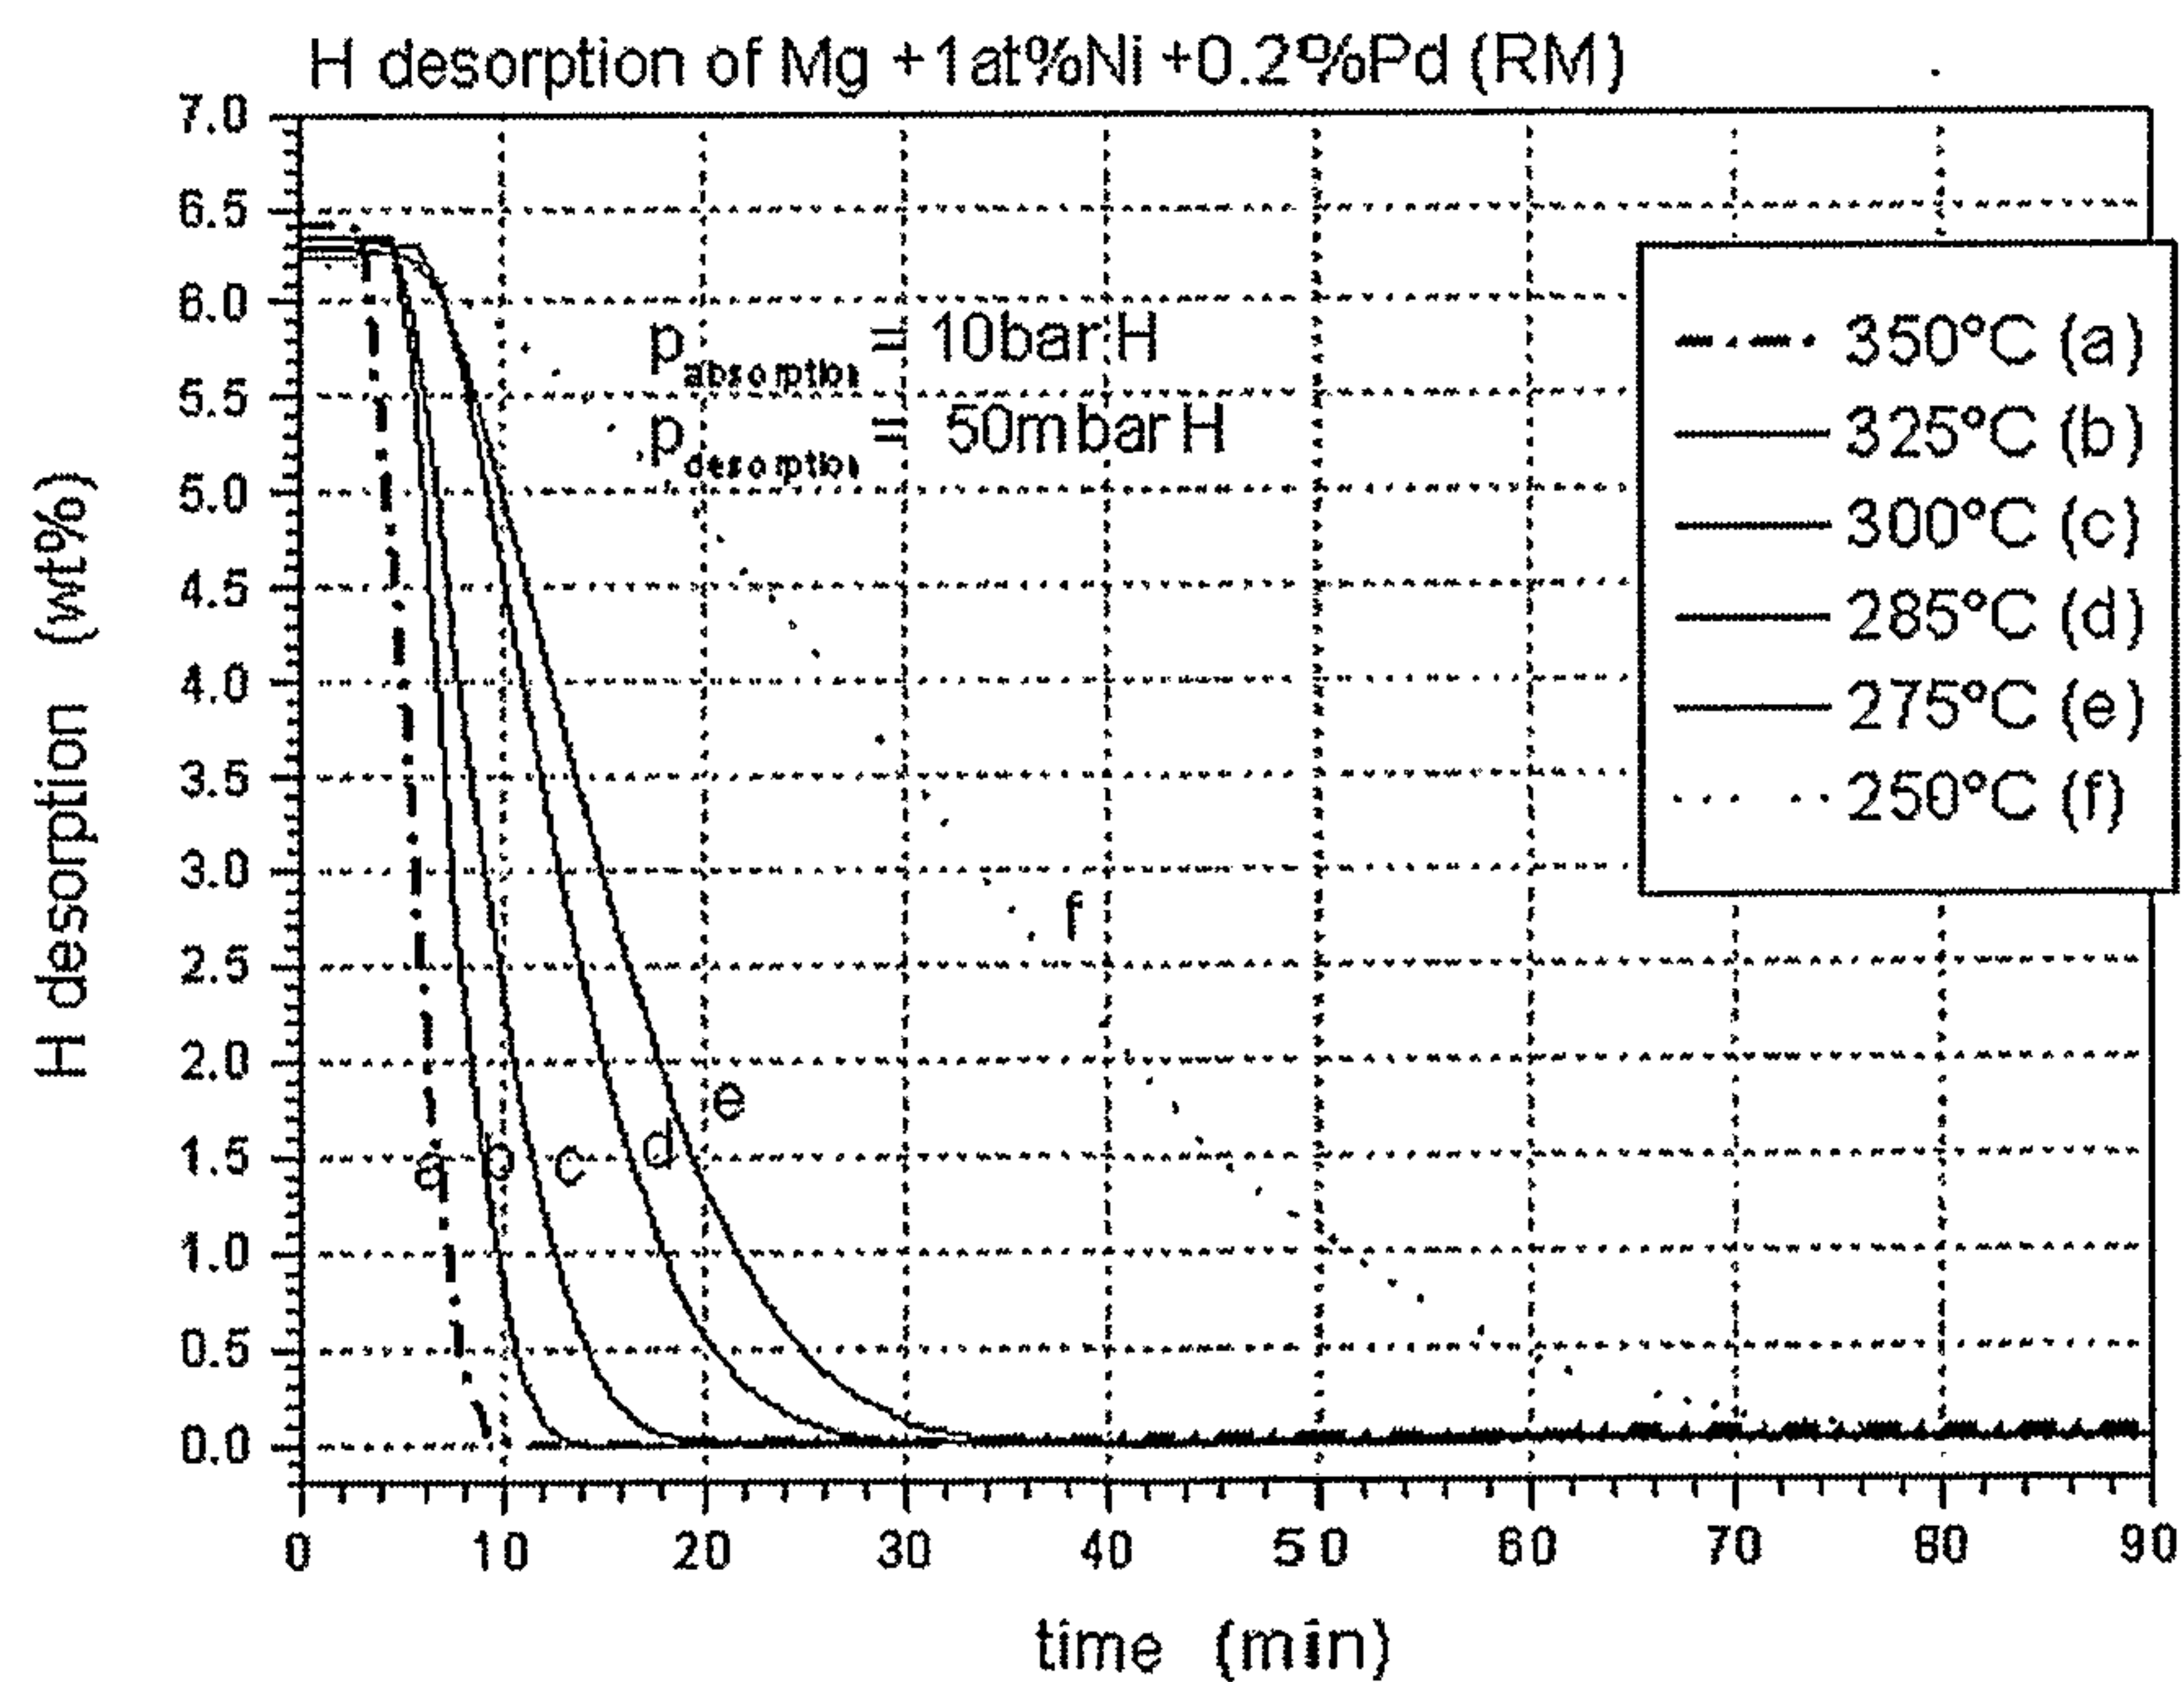


Figure 2

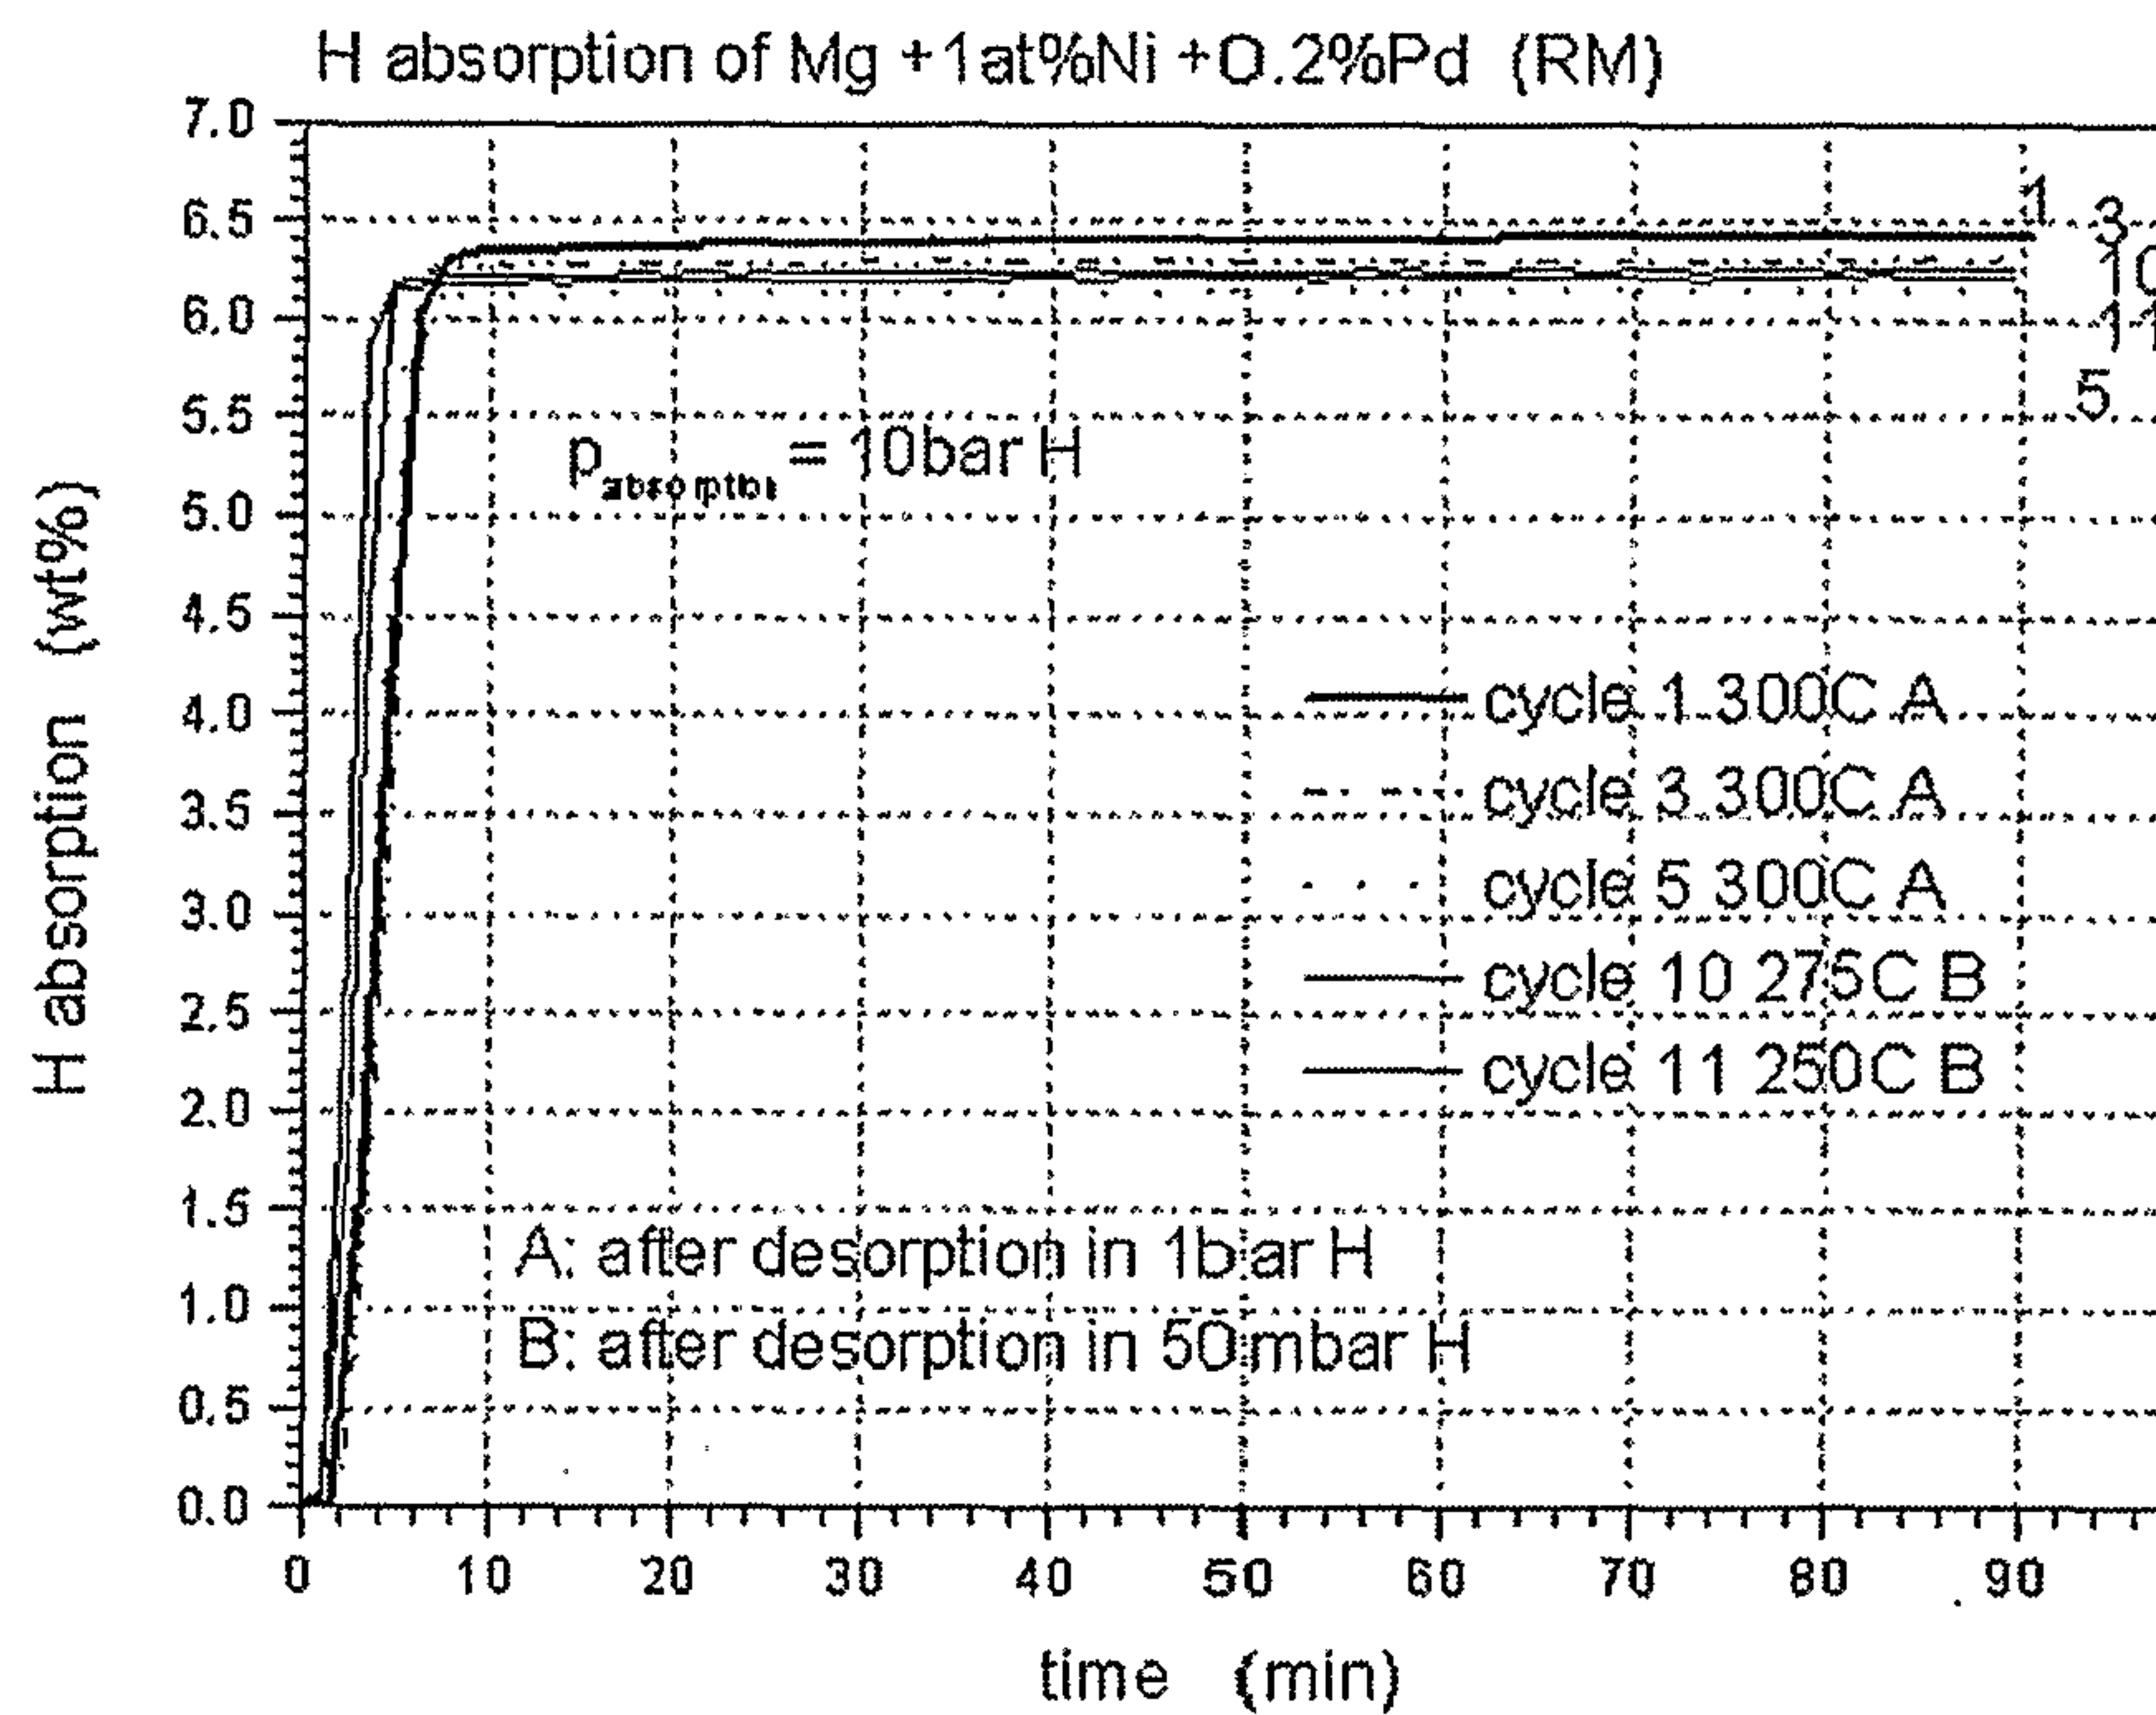


Figure 3

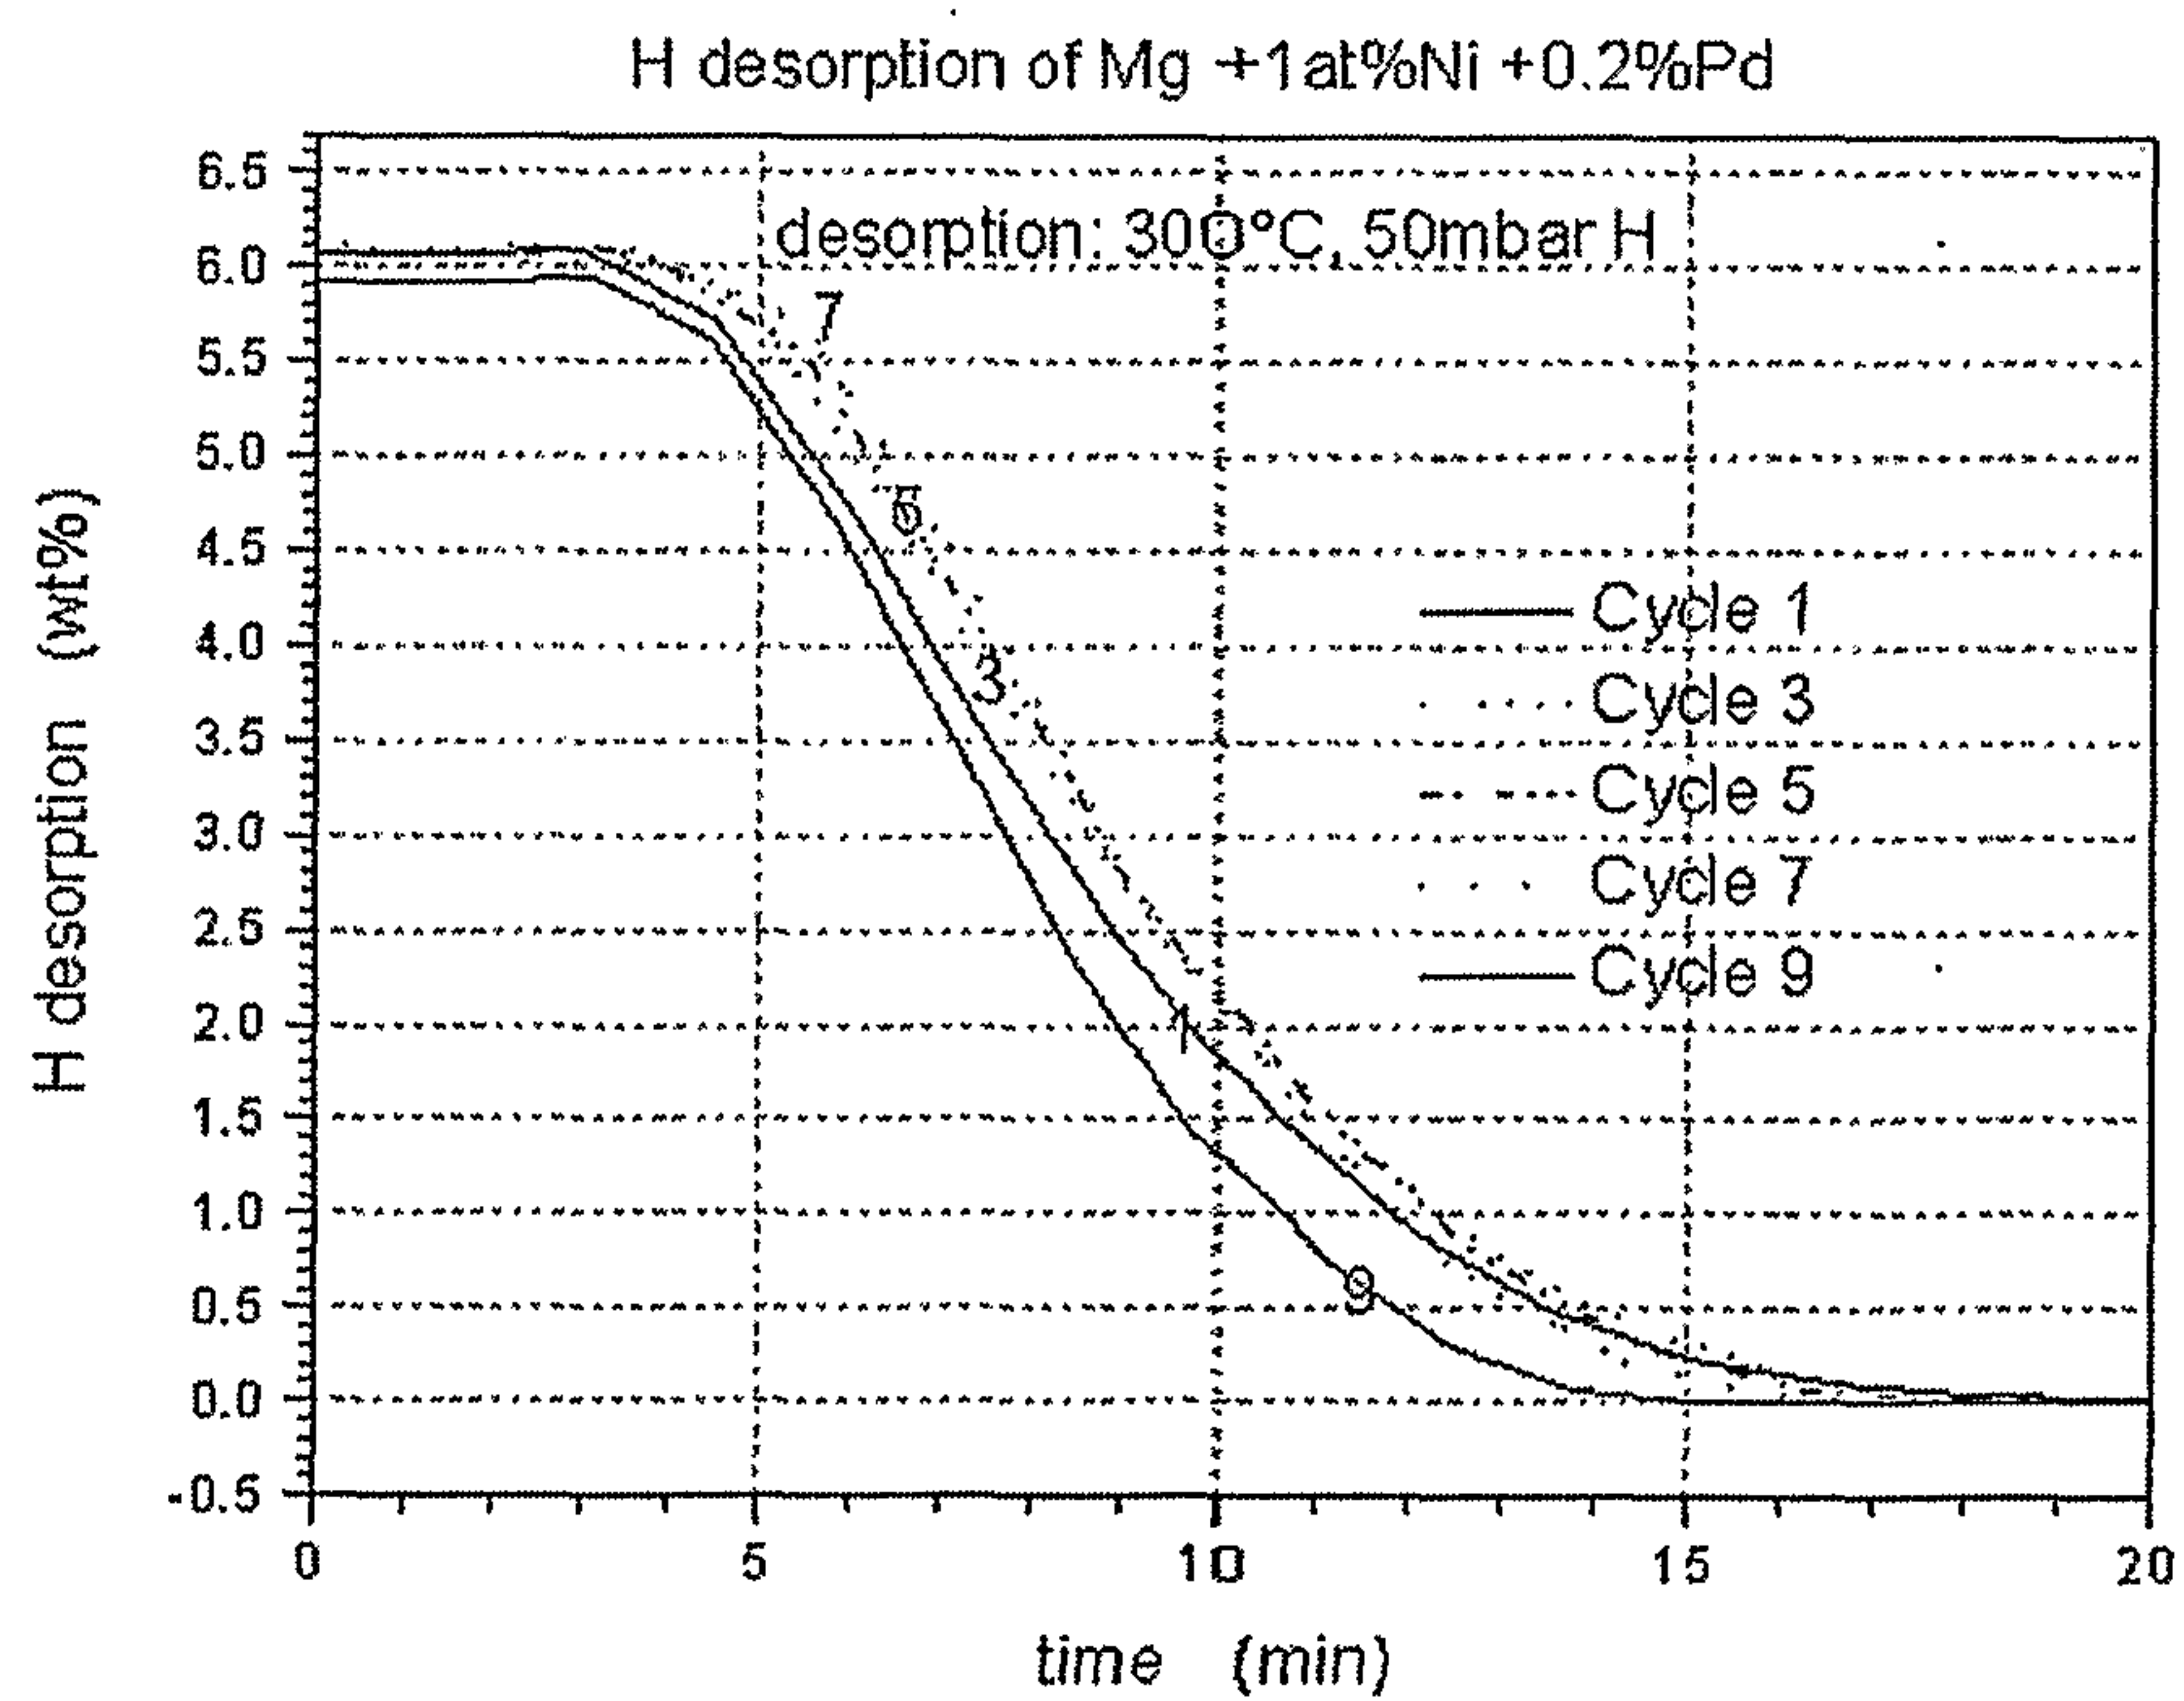
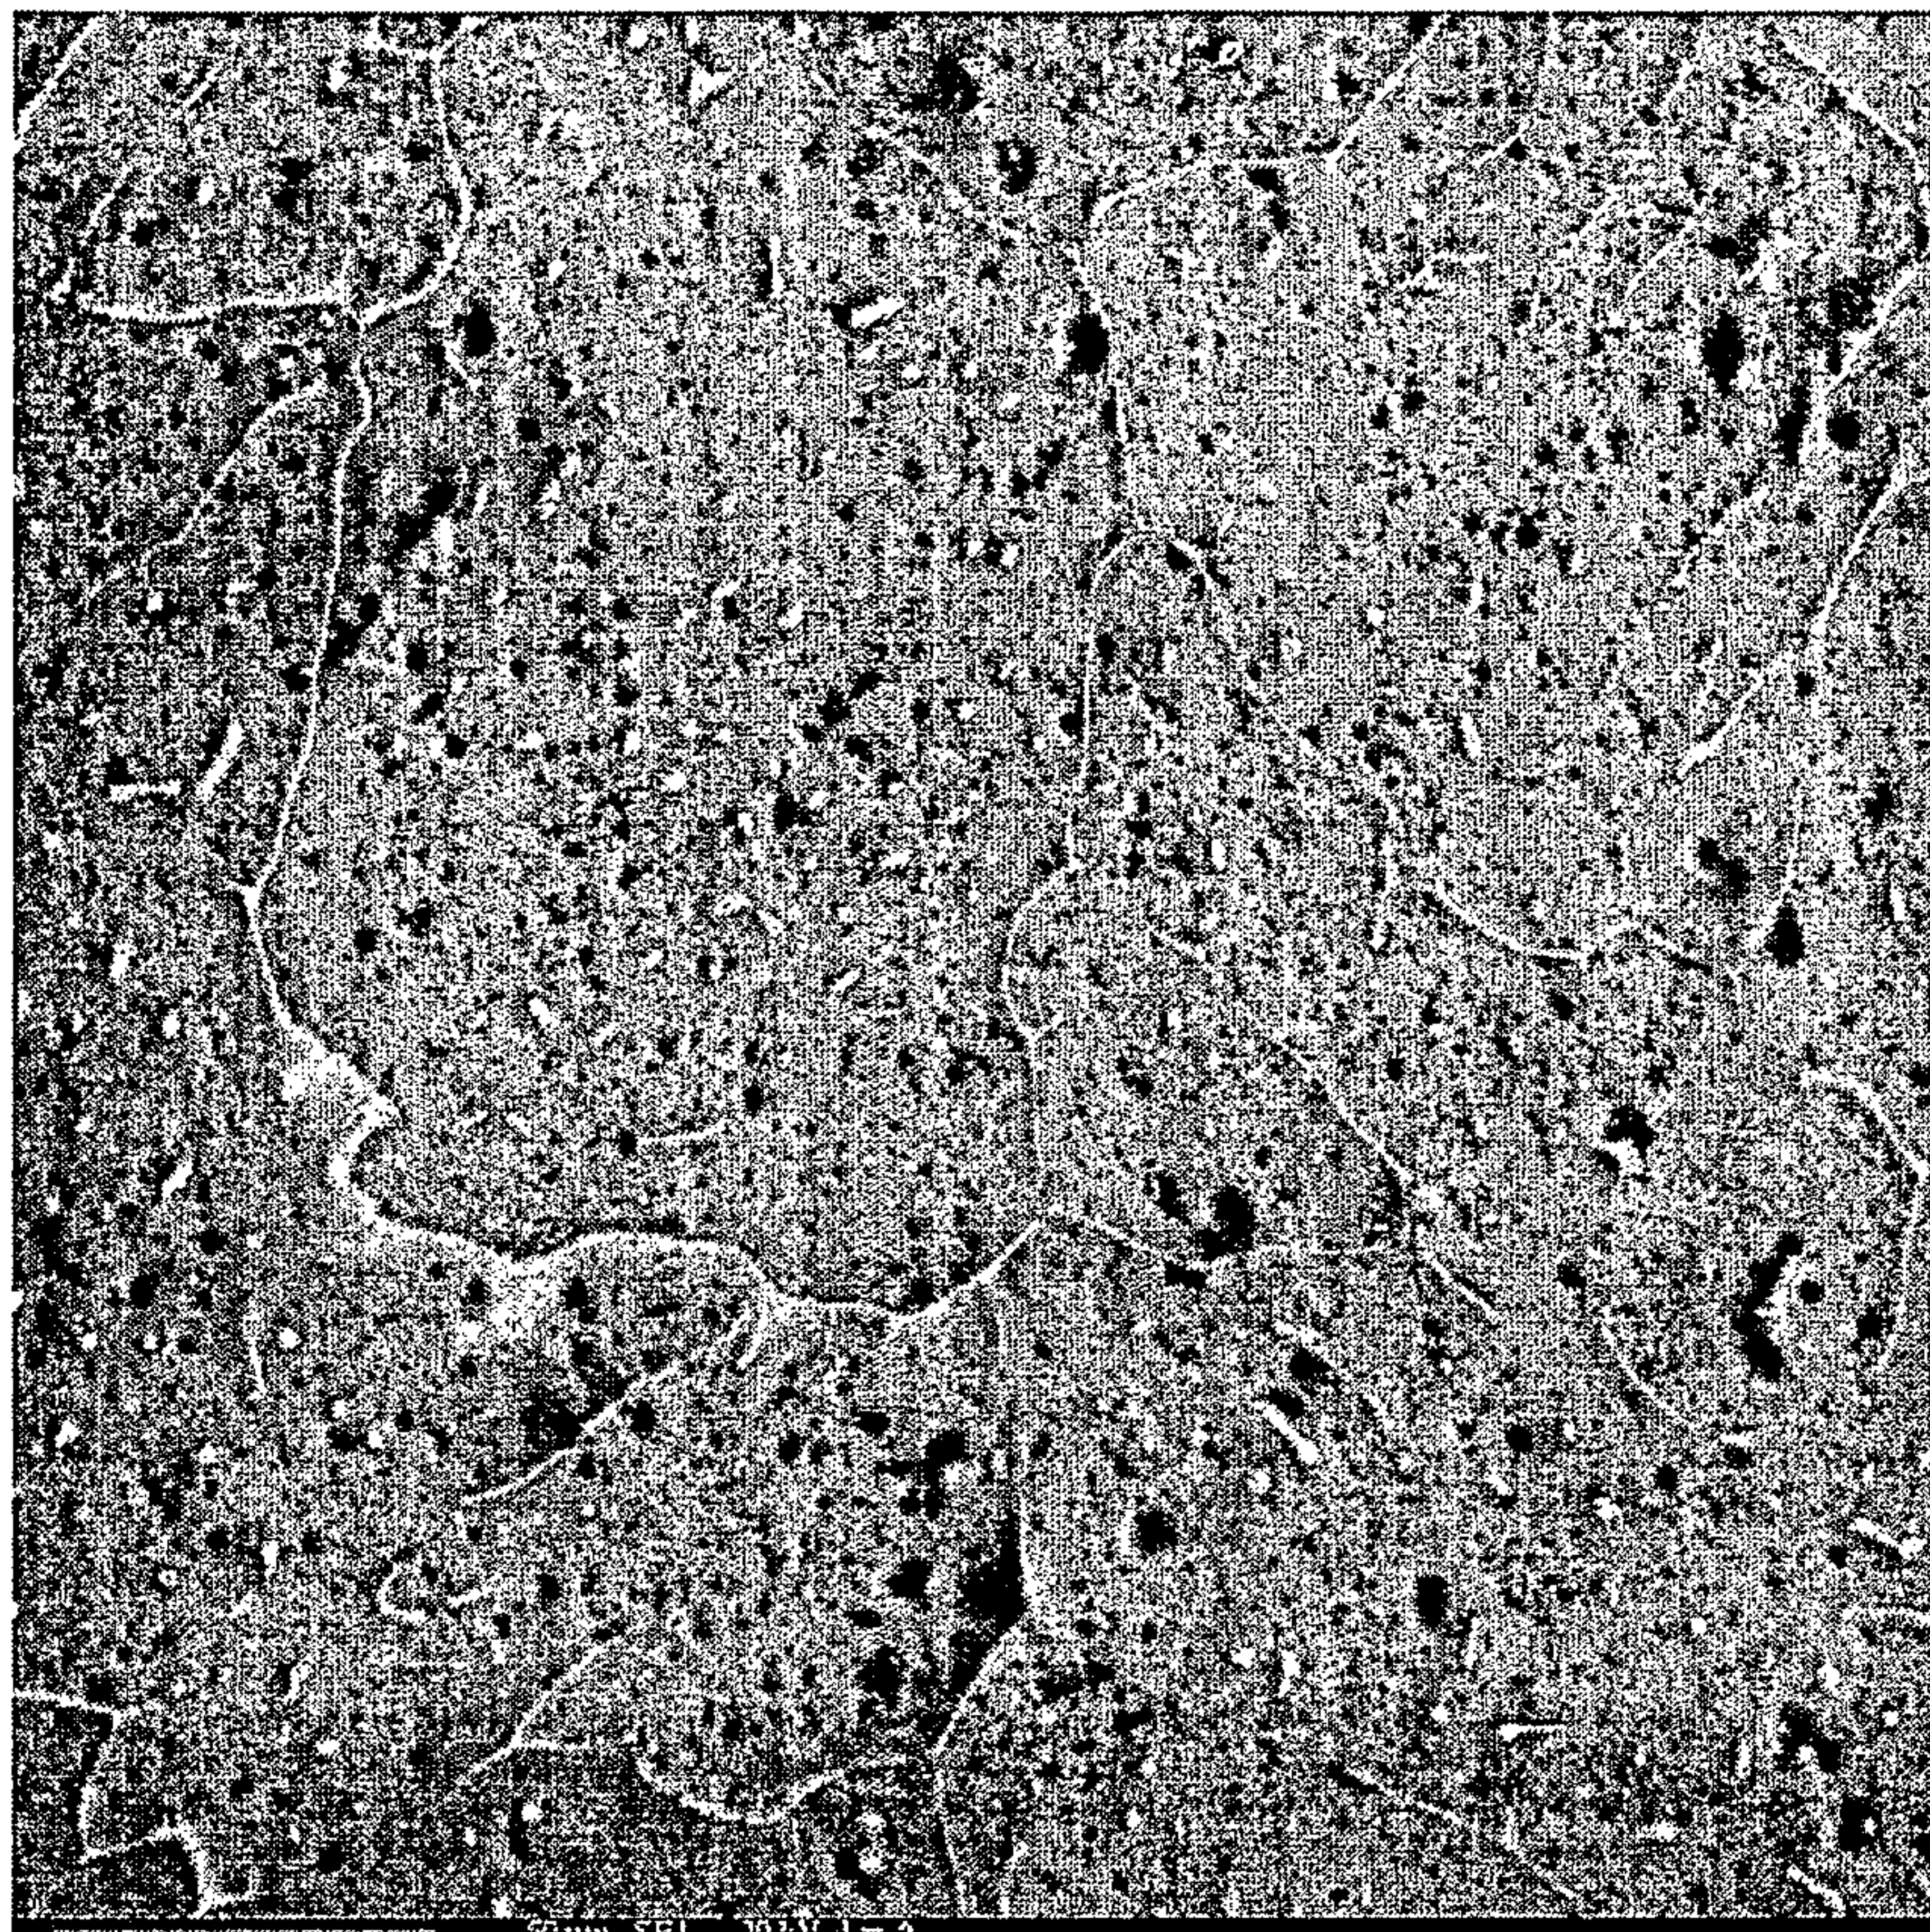
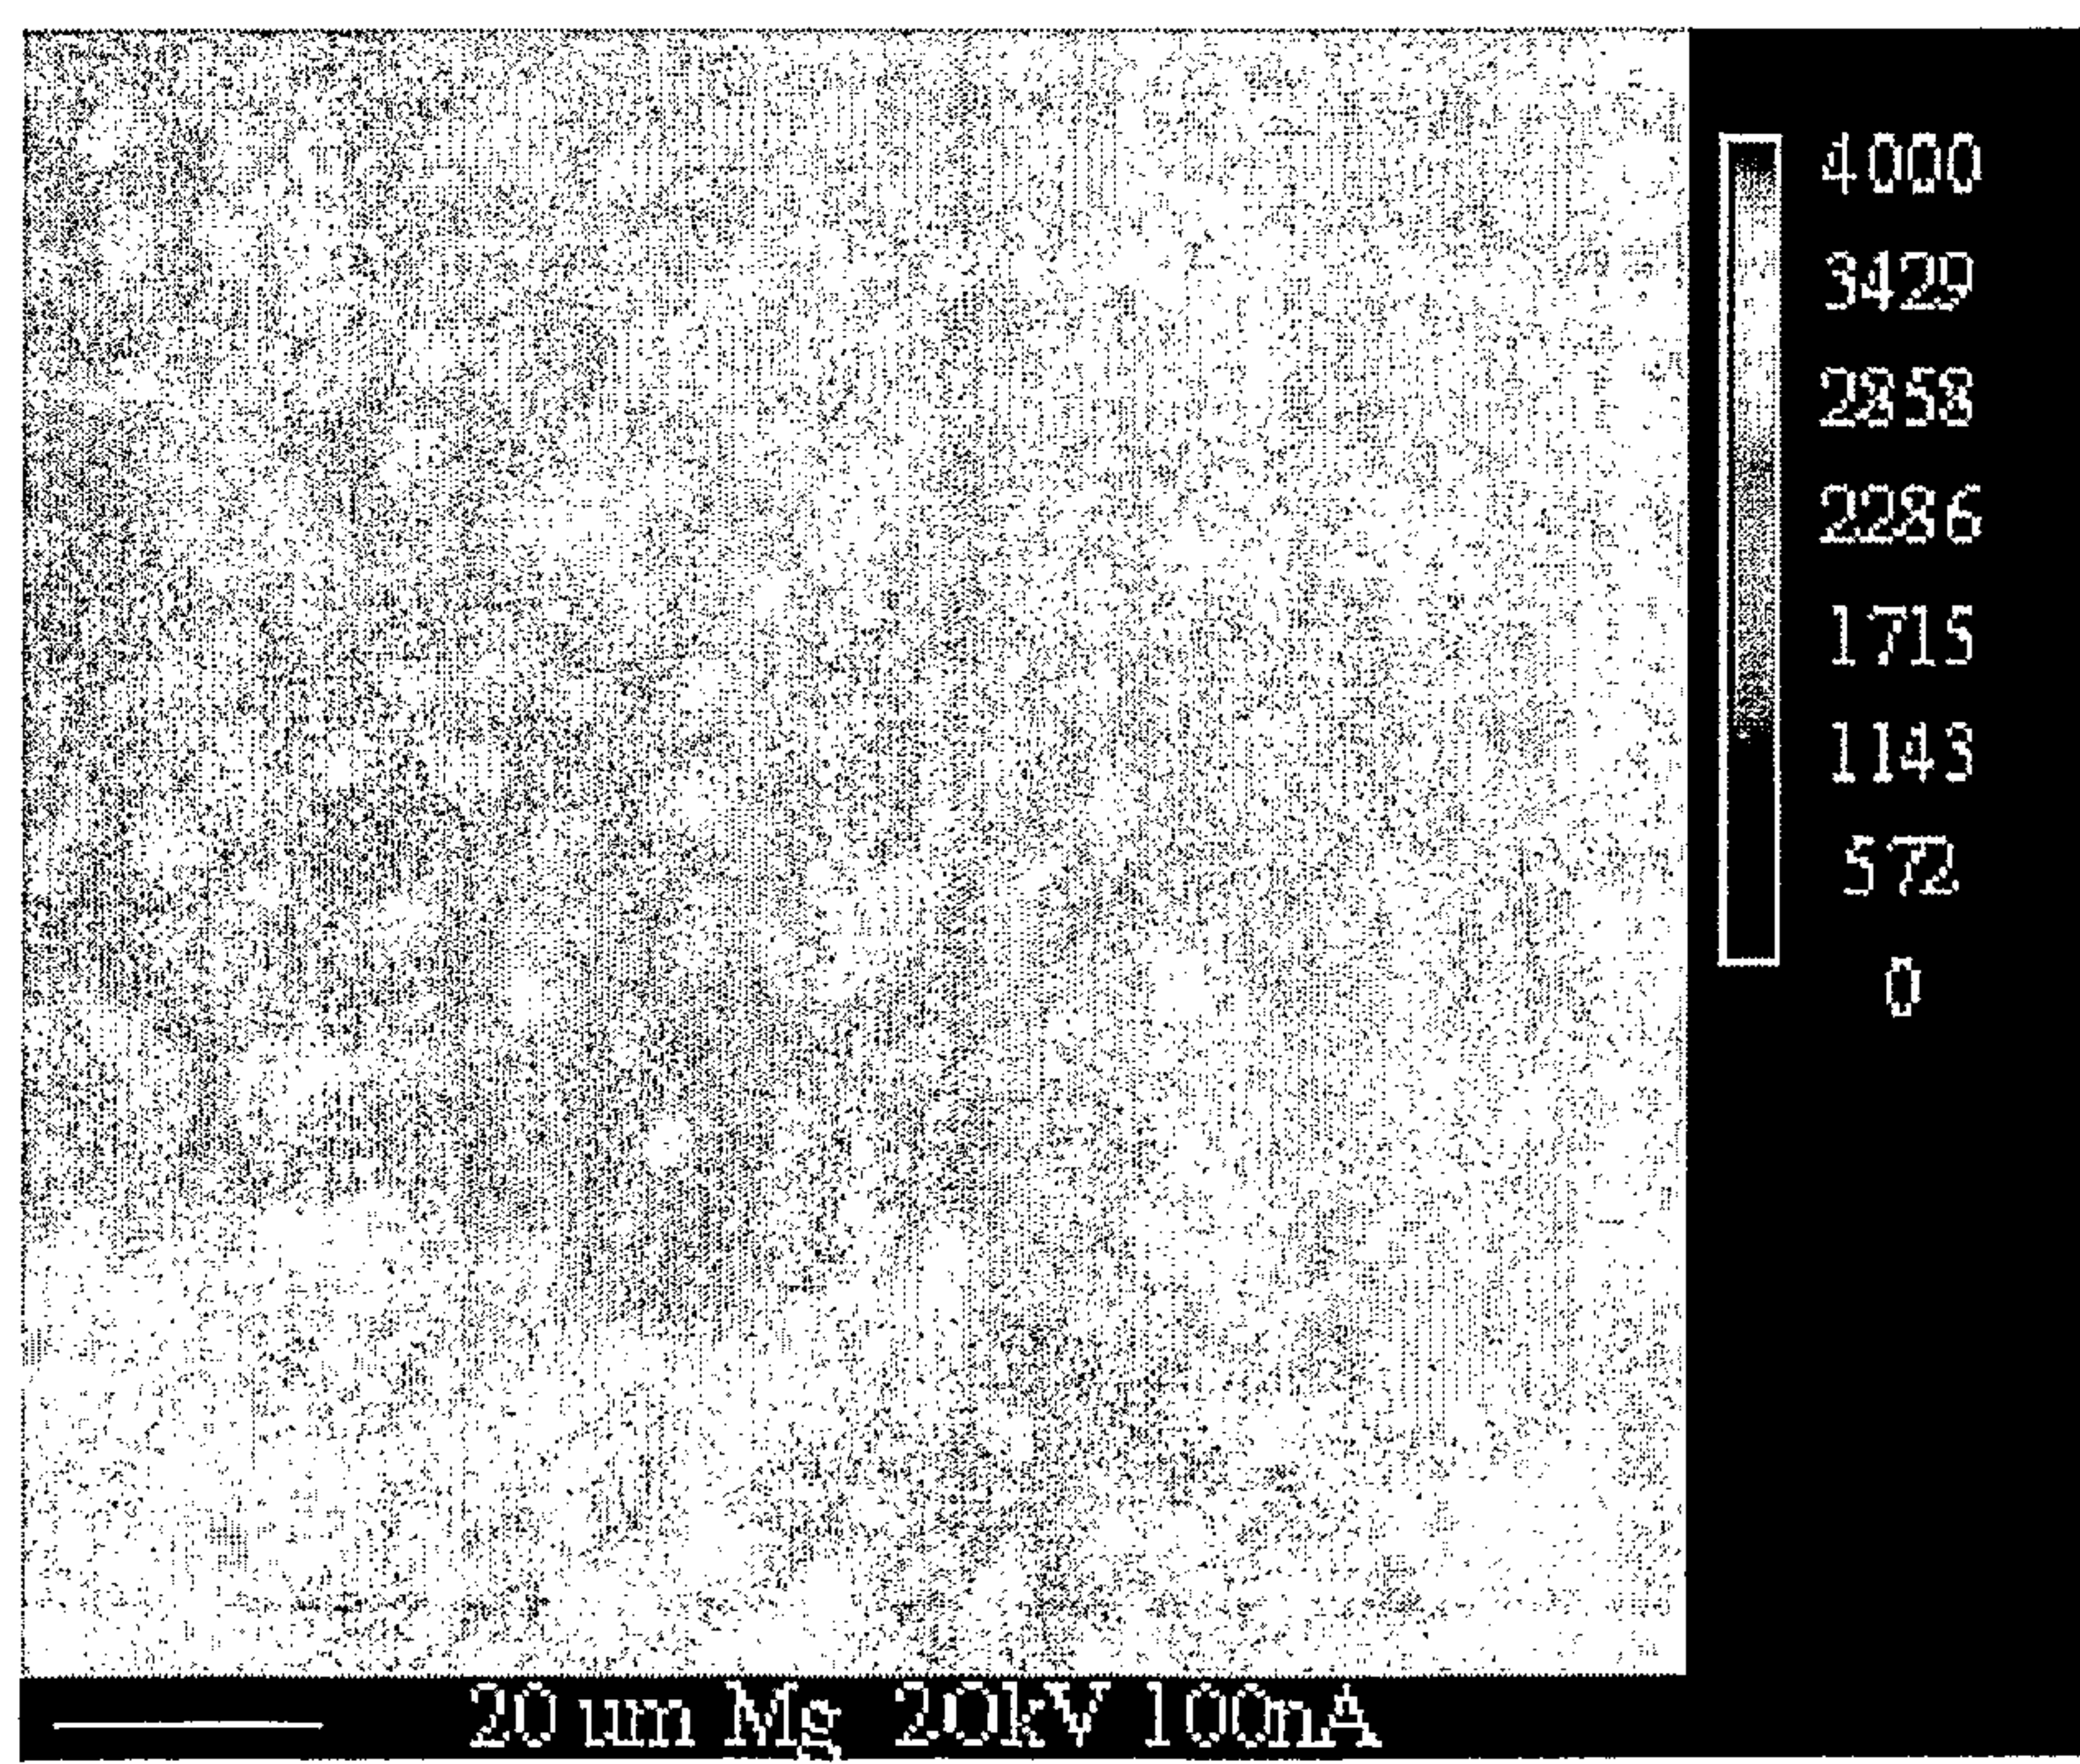


Figure 4

**Figure 5****Figure 6**

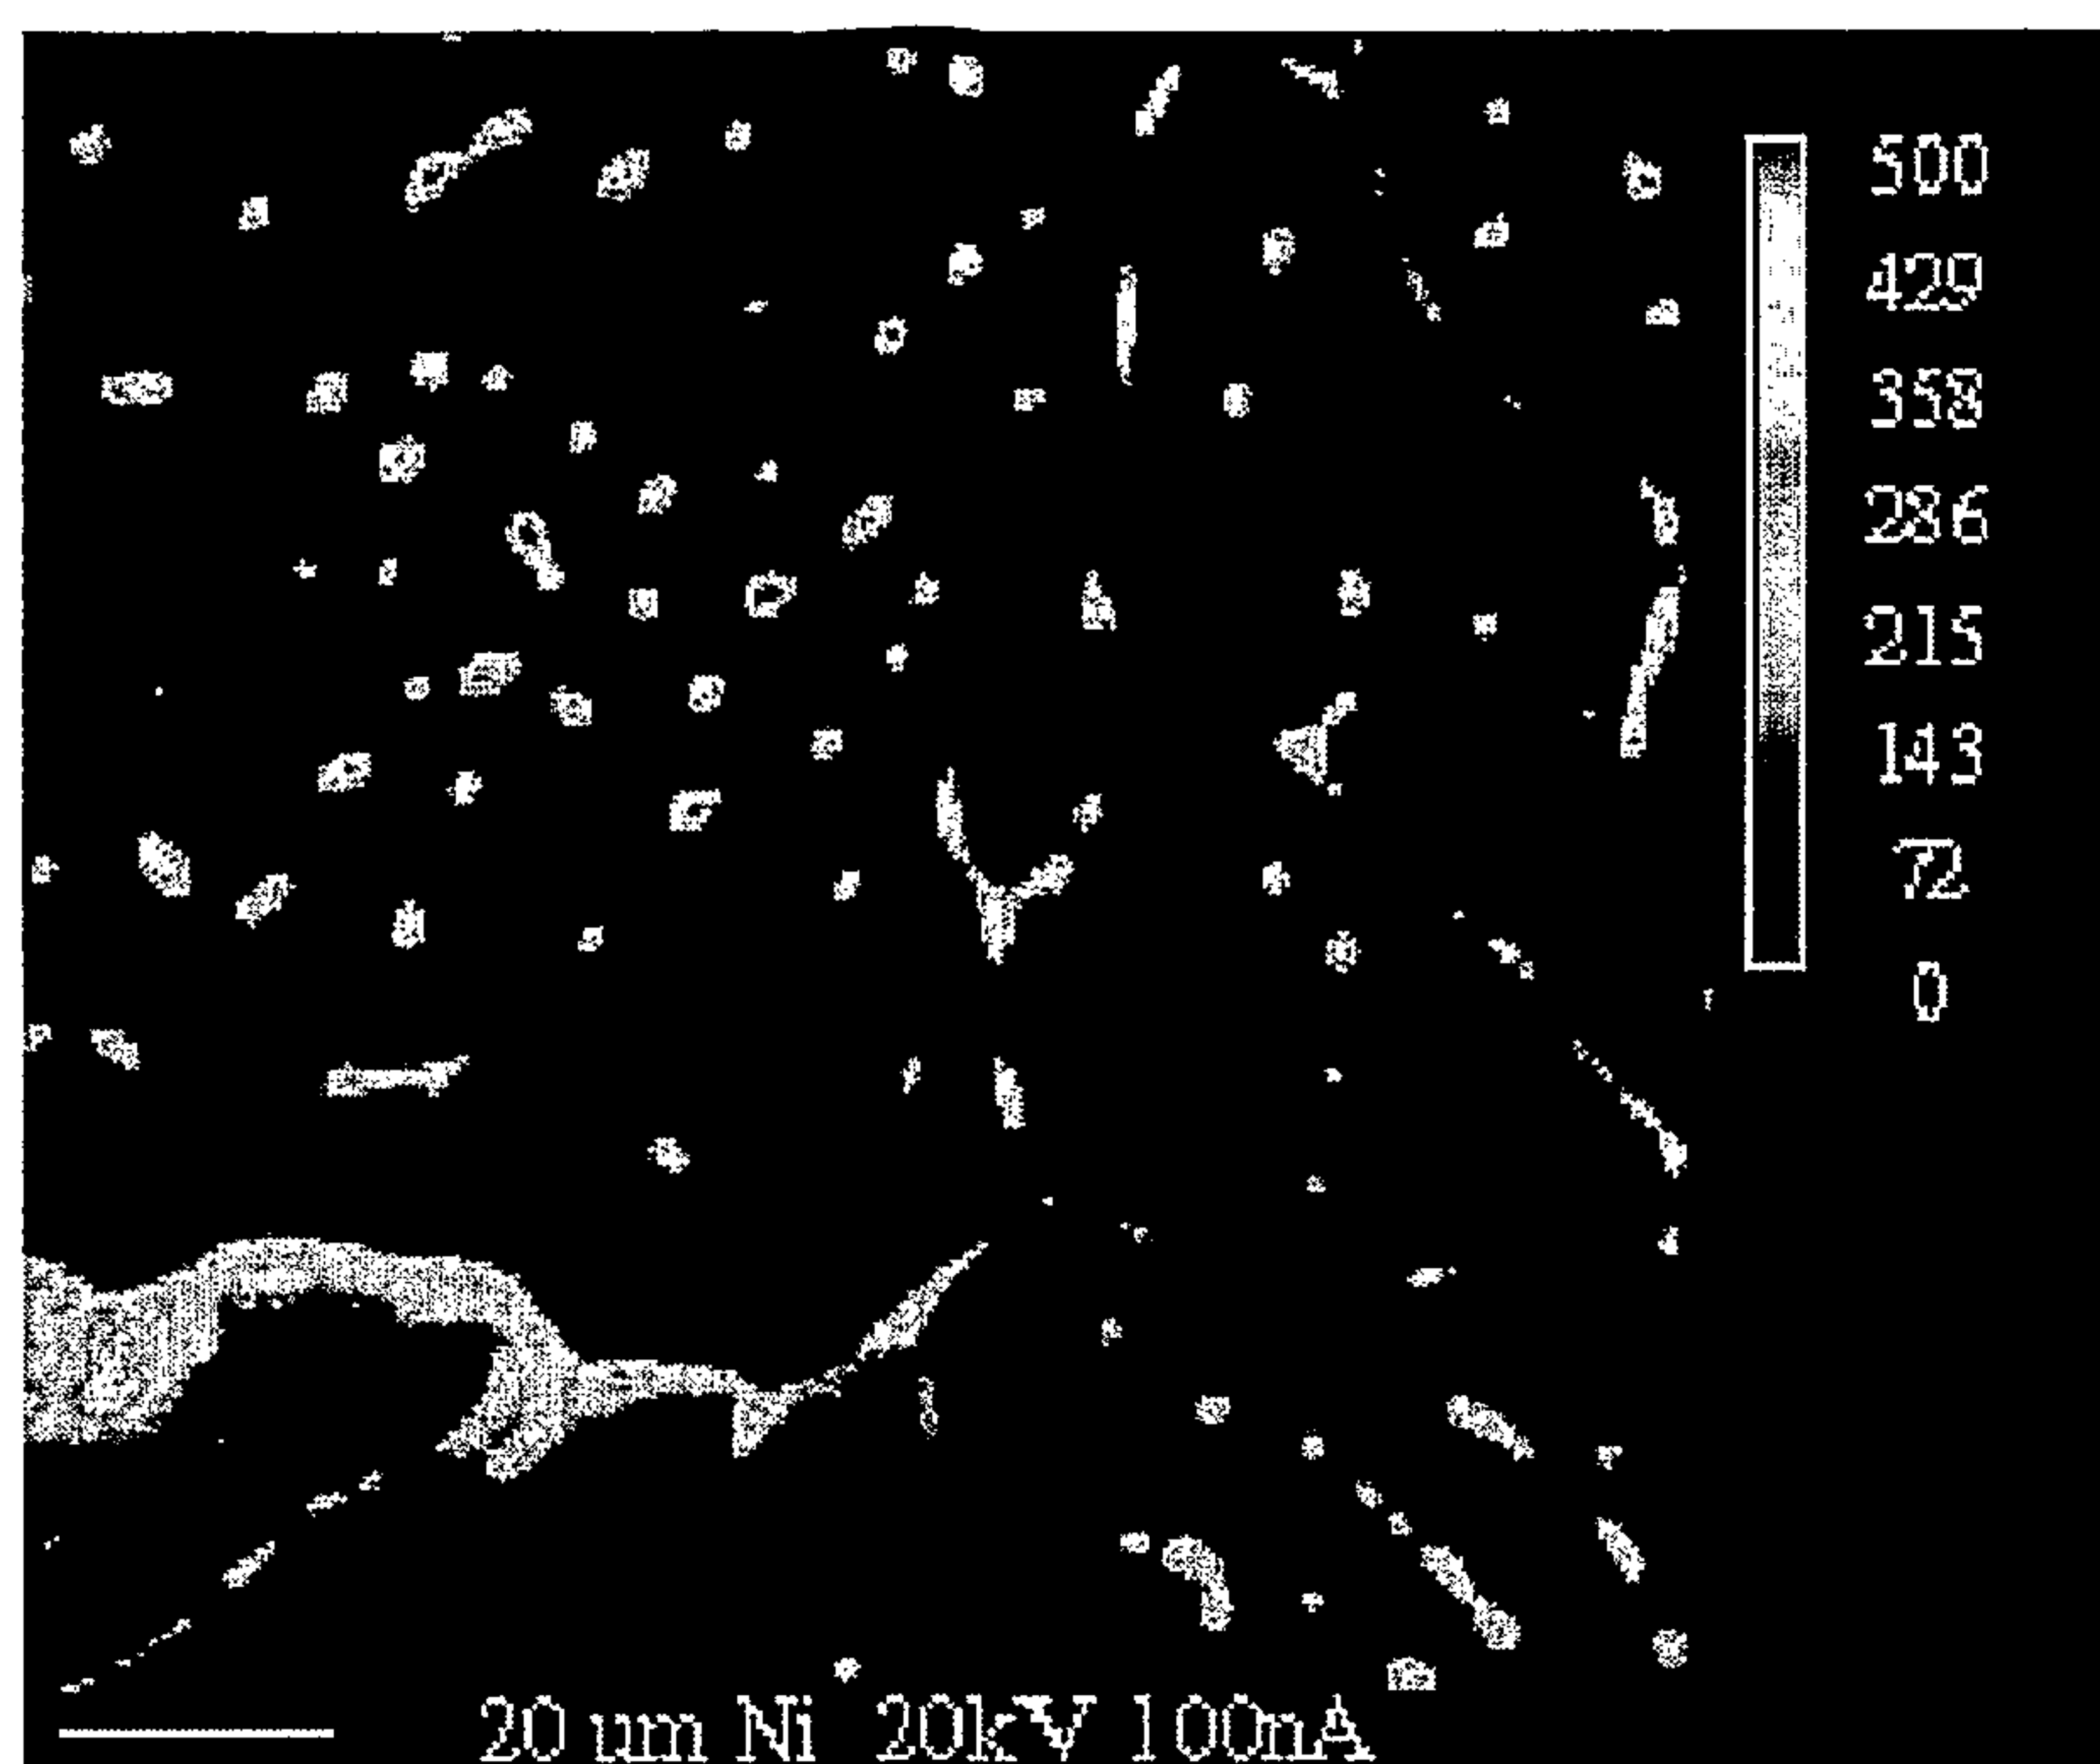


Figure 7

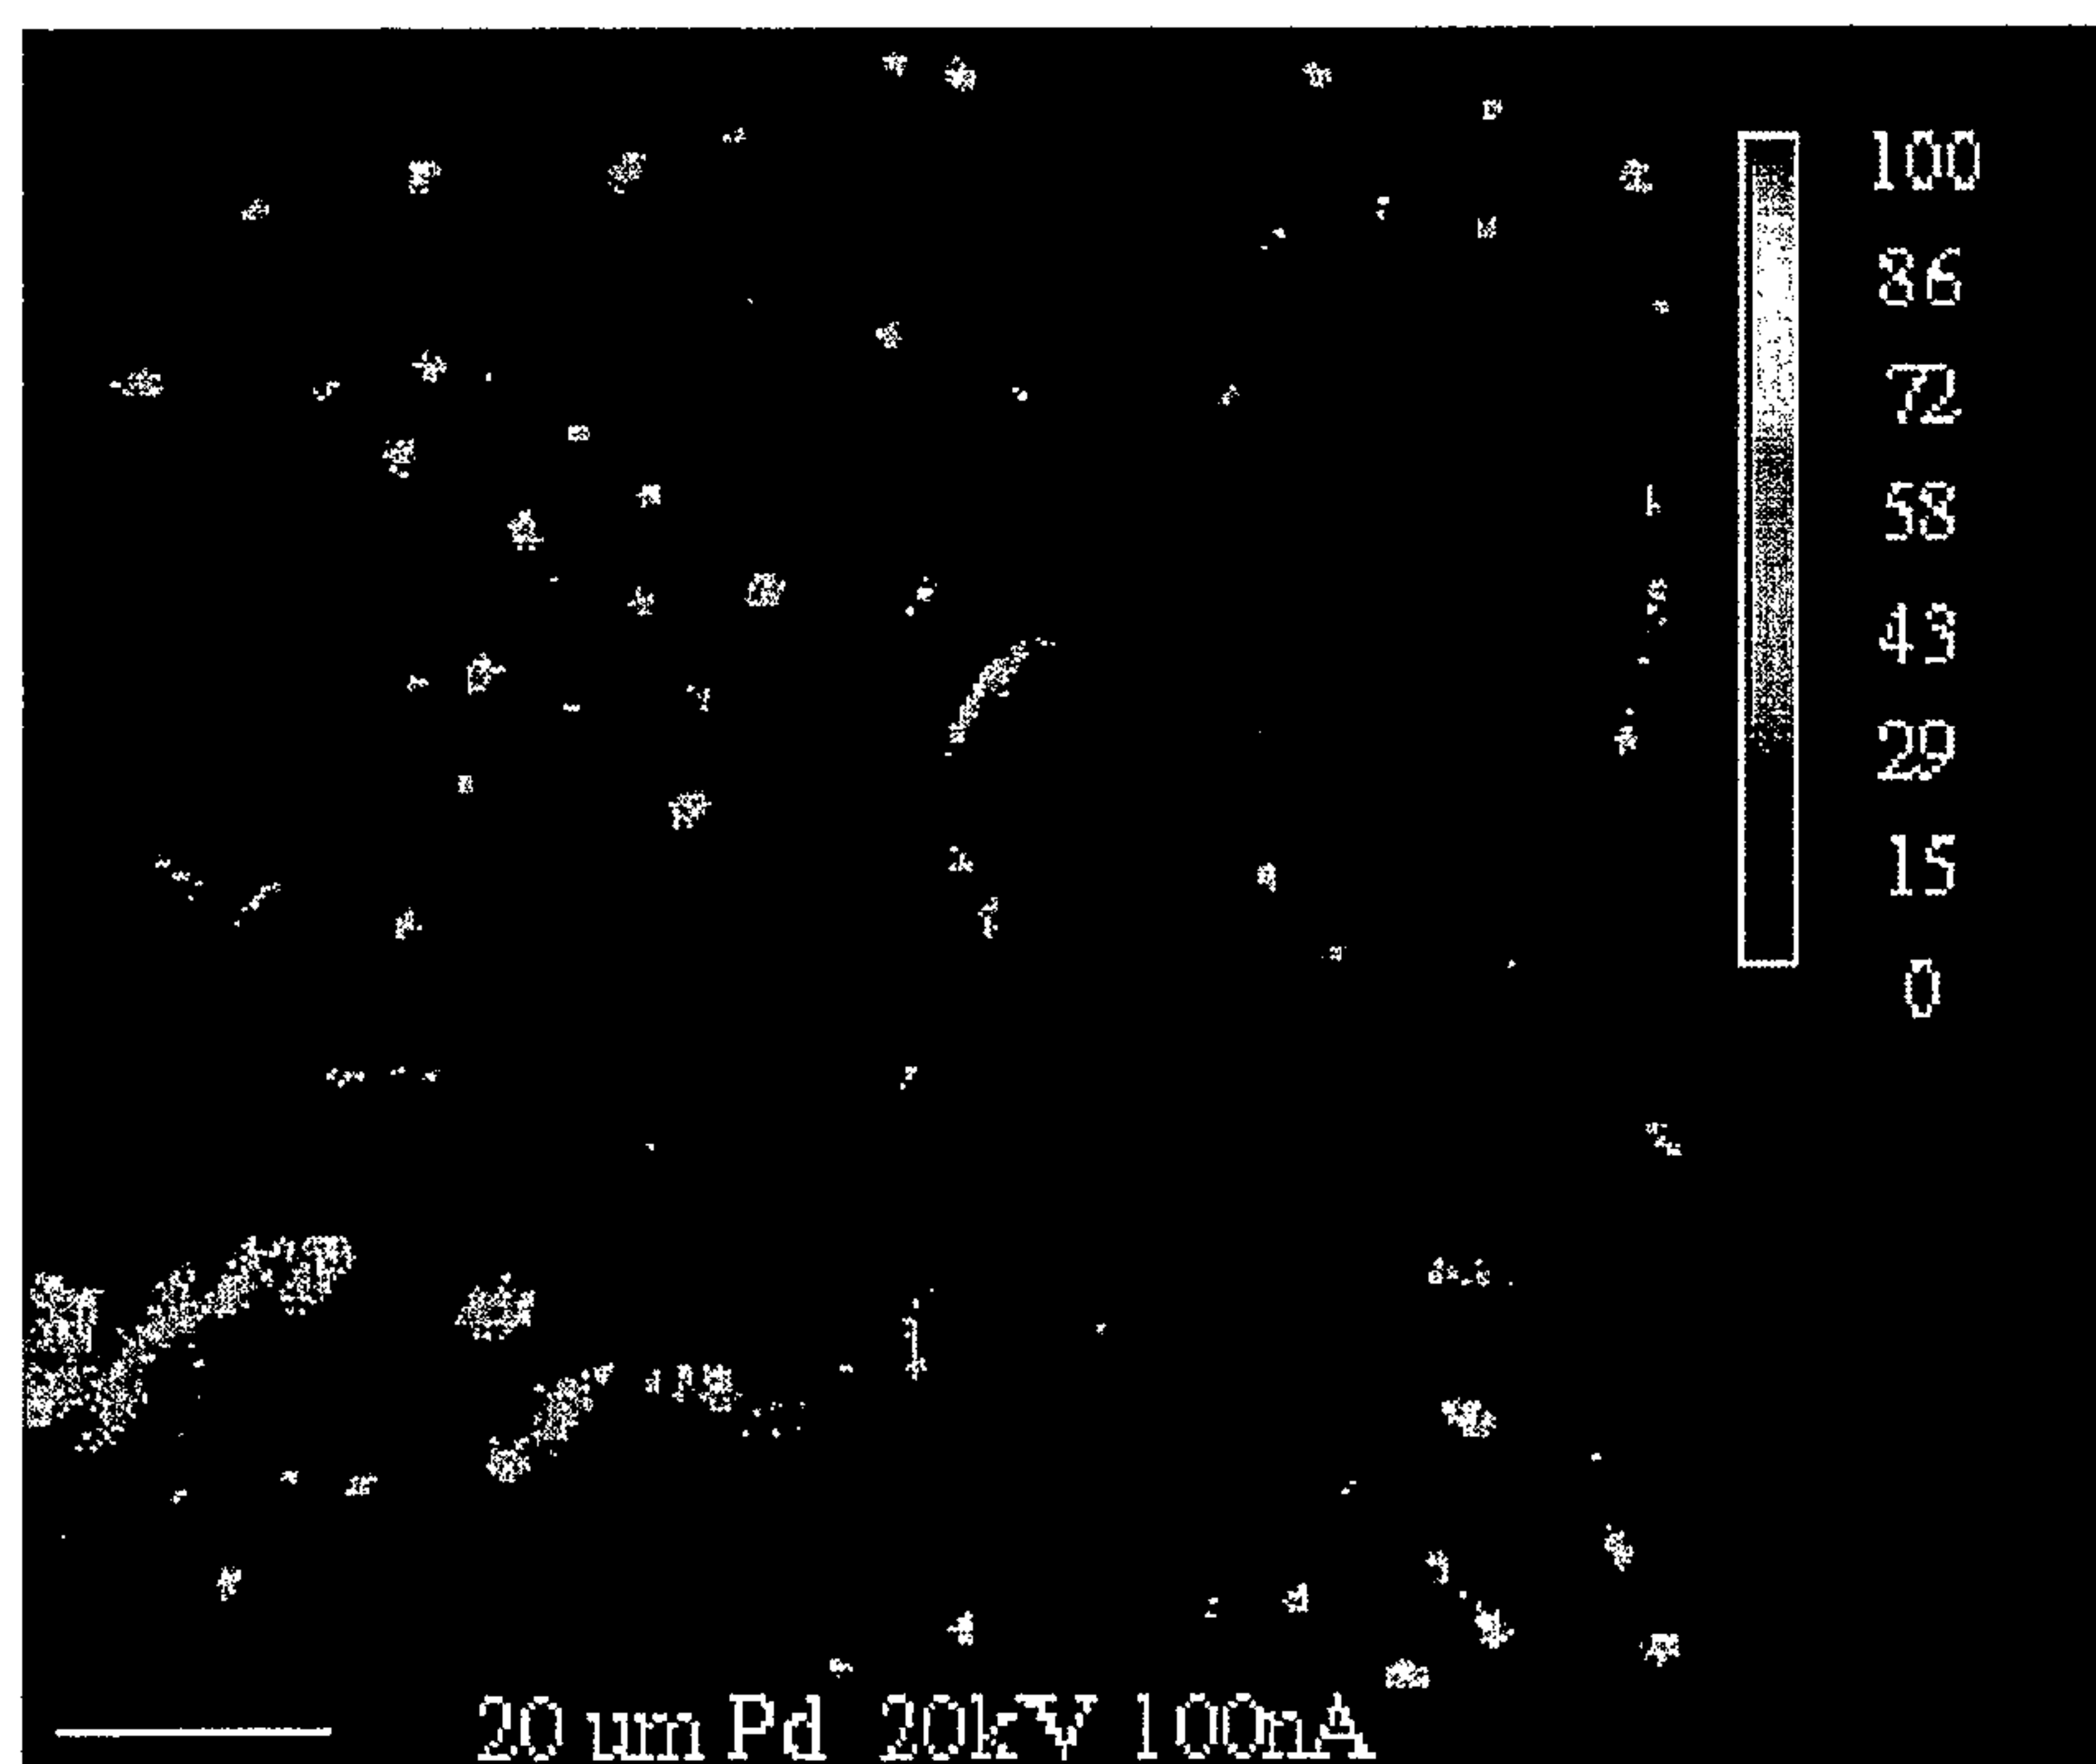


Figure 8

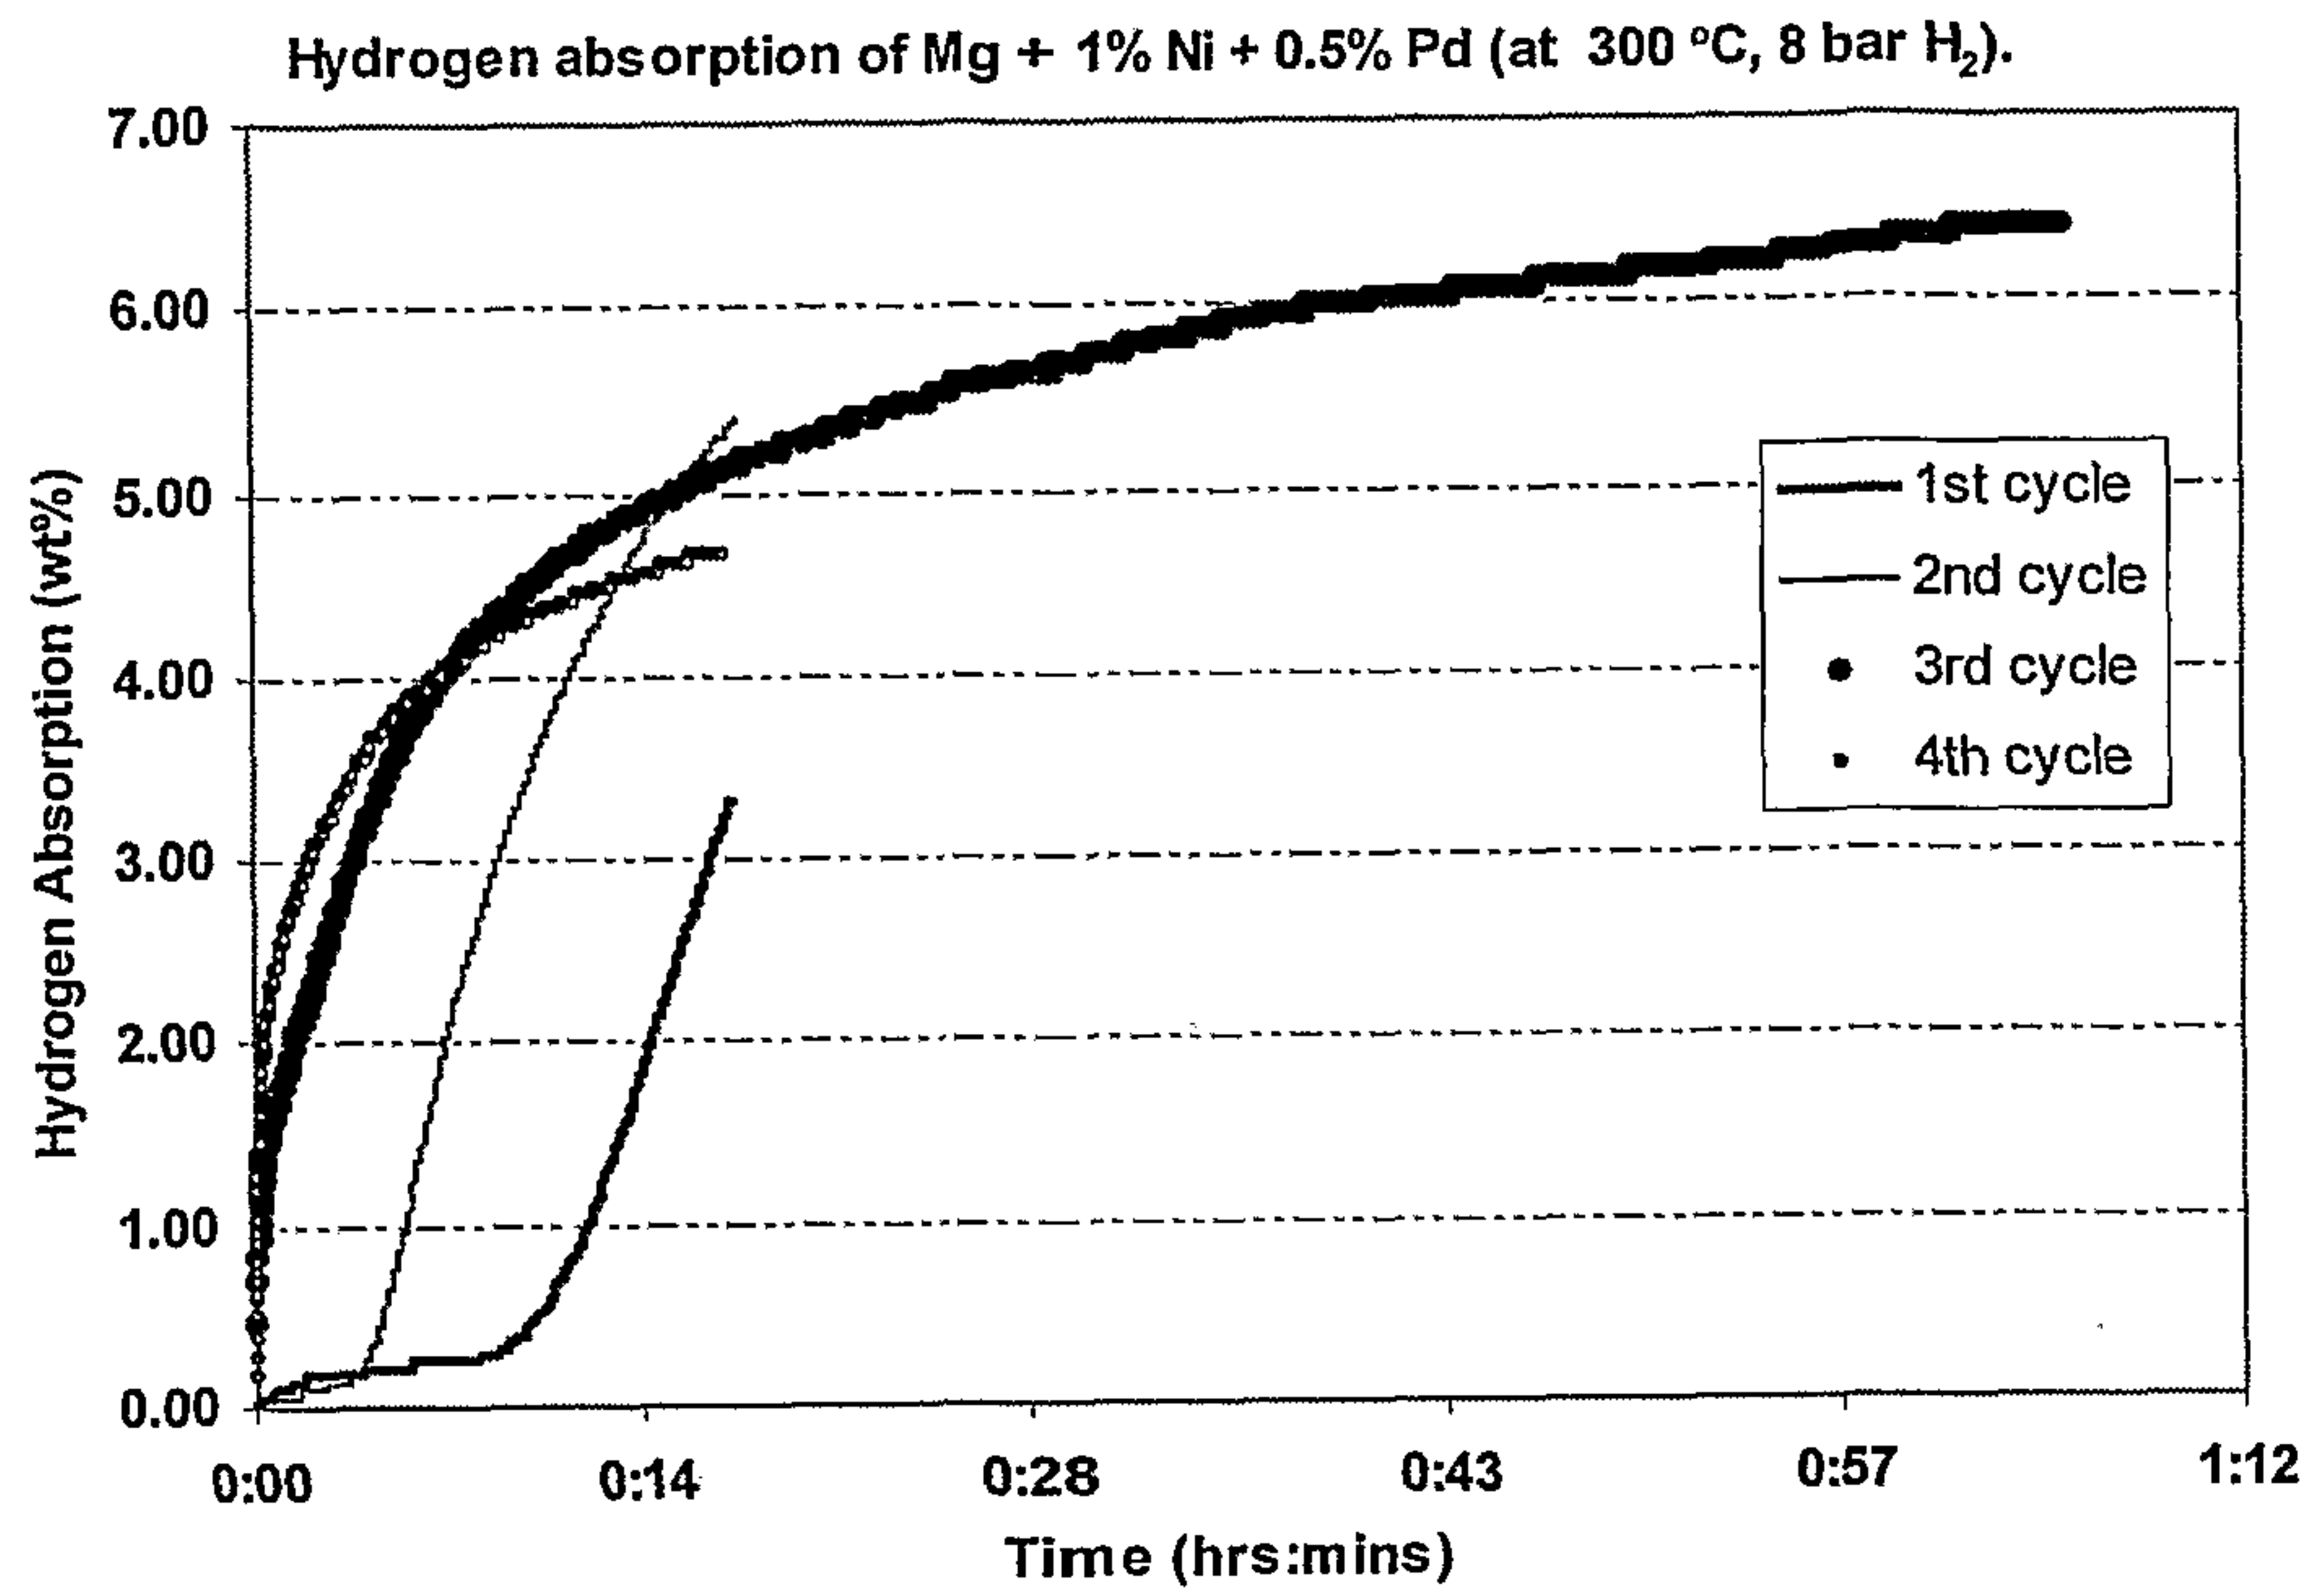


Figure 9

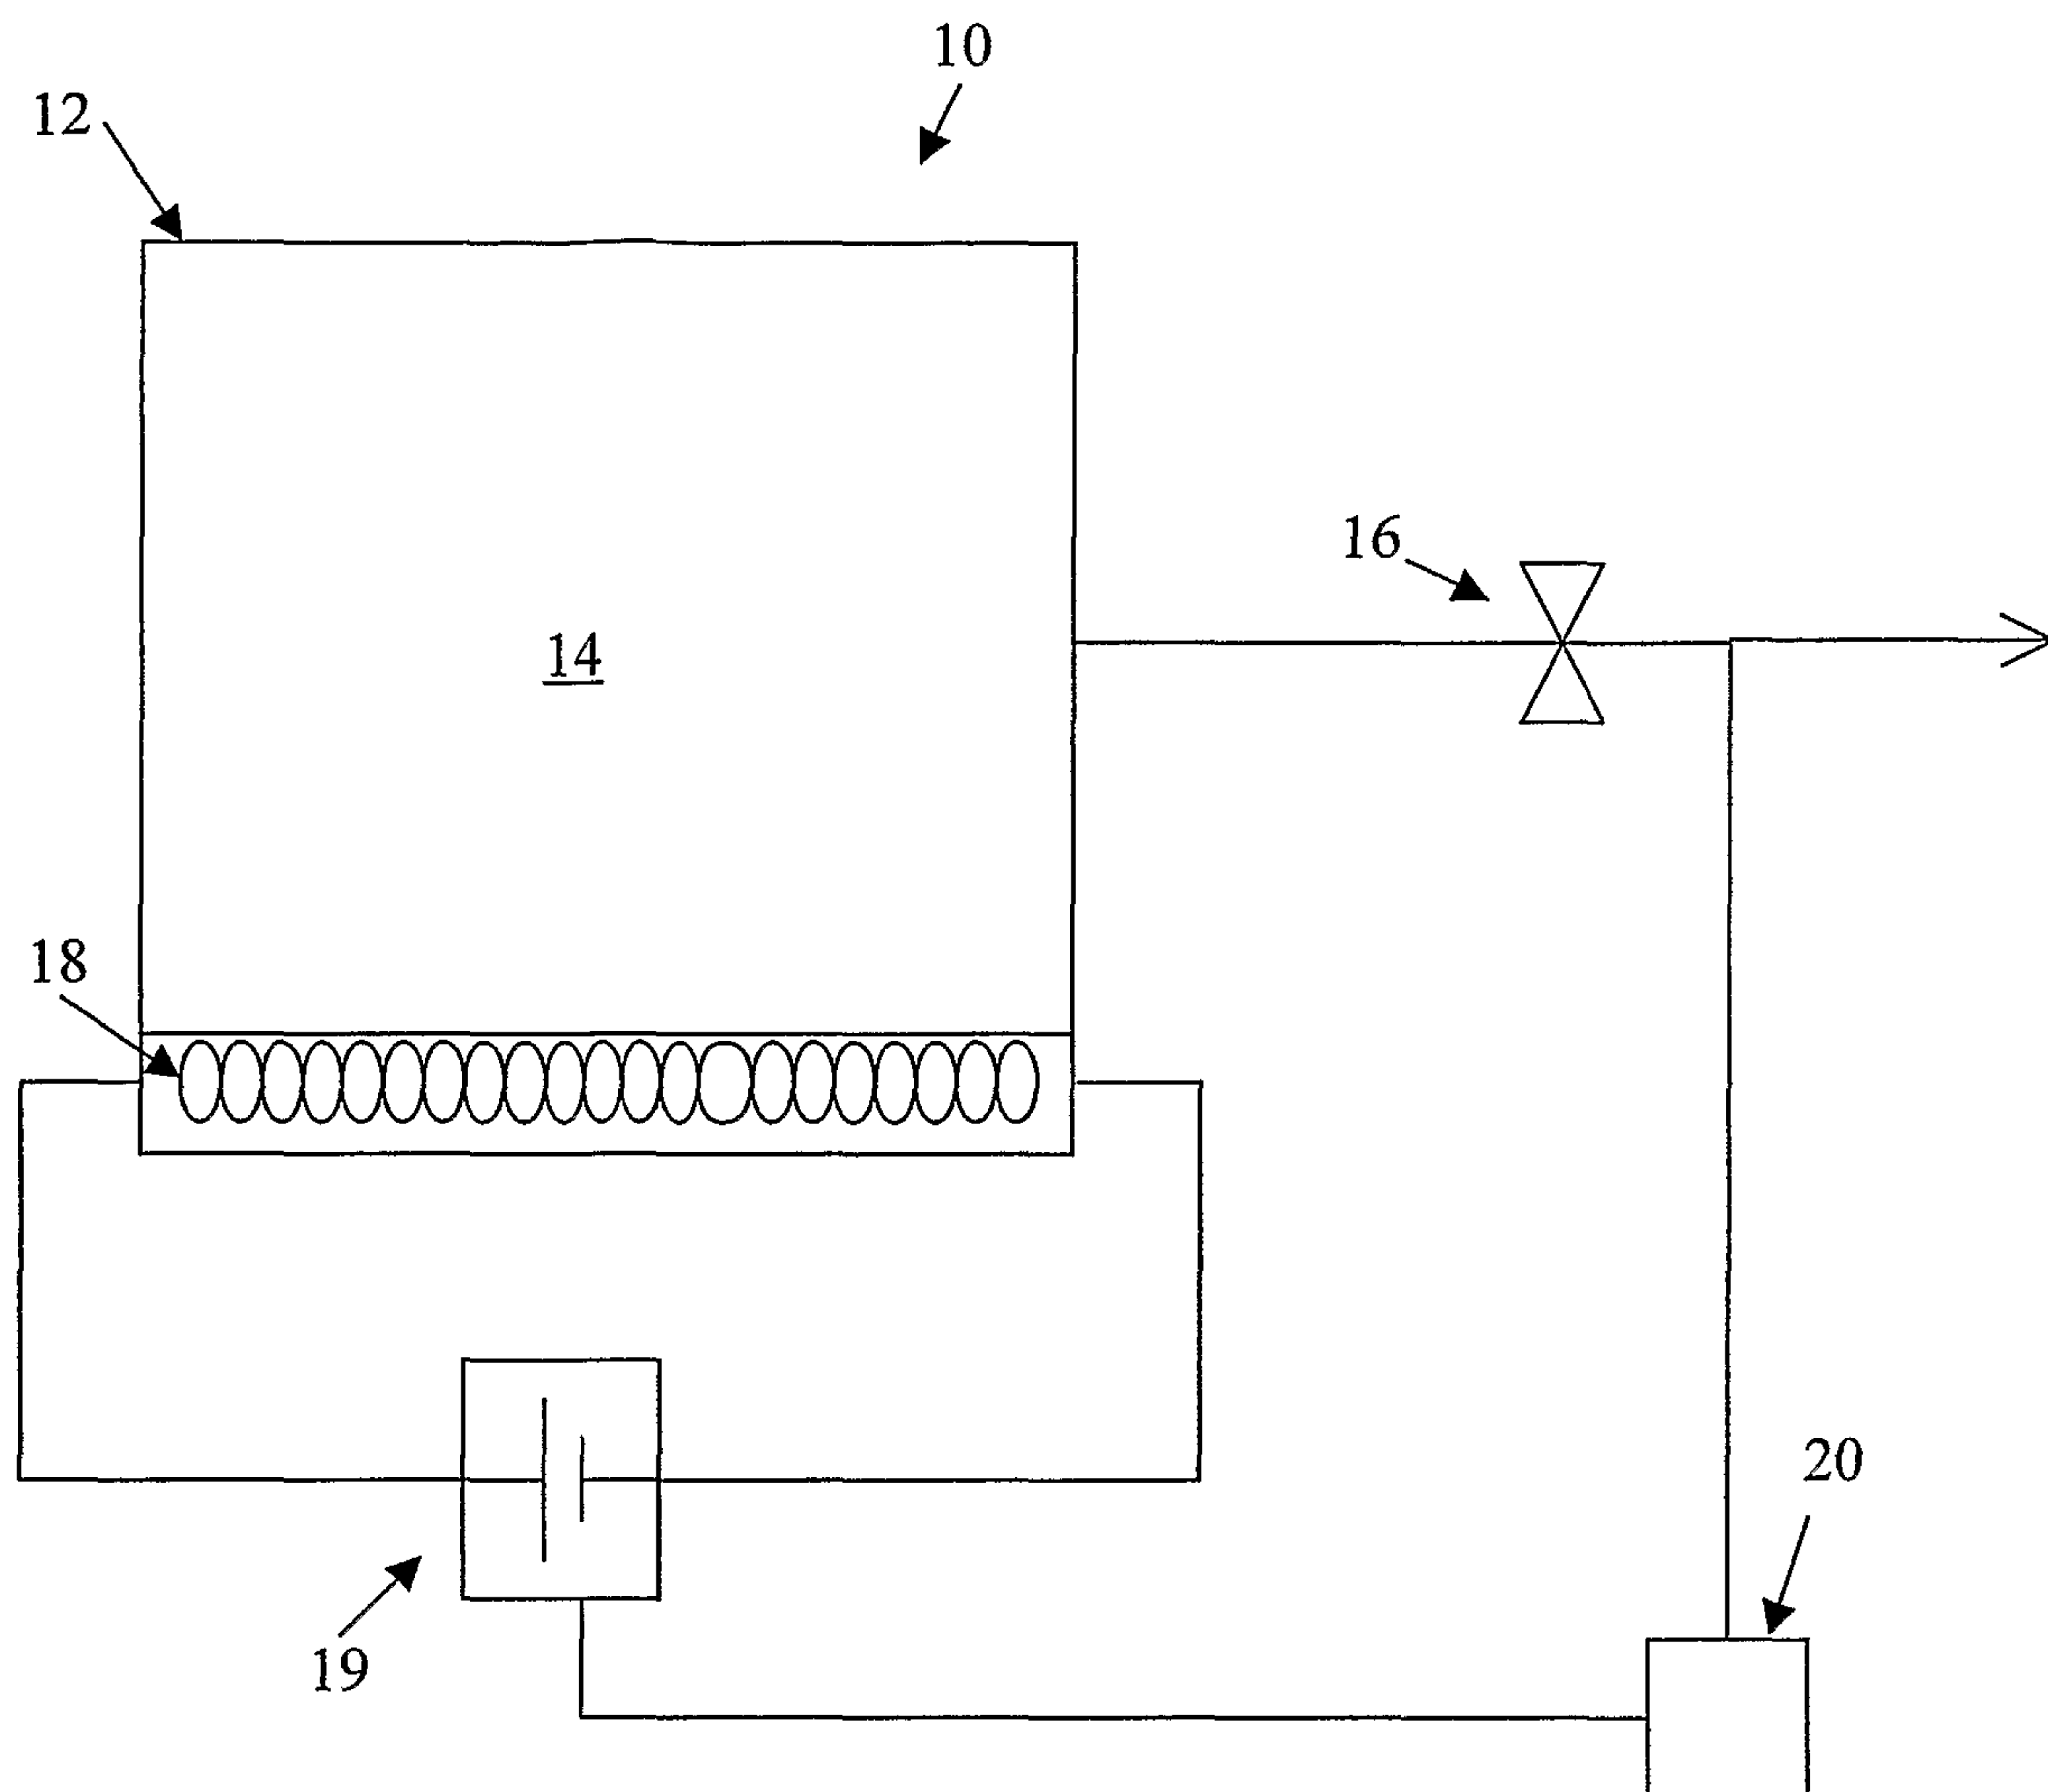


Figure 10

