



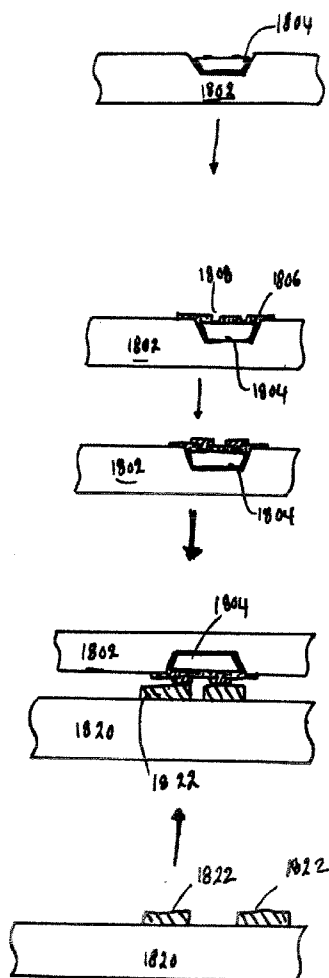
US 20090056113A1

(19) **United States**(12) **Patent Application Publication**
Craig et al.(10) **Pub. No.: US 2009/0056113 A1**(43) **Pub. Date: Mar. 5, 2009**(54) **STRAP ASSEMBLY COMPRISING
FUNCTIONAL BLOCK DEPOSITED
THEREIN AND METHOD OF MAKING SAME**(60) Provisional application No. 60/626,241, filed on Nov.
8, 2004.(76) Inventors: **Gordon S.W. Craig**, Palo Alto, CA
(US); **Ali A. Tootoonchi**, San Jose,
CA (US); **Scott Herrmann**,
Hollister, CA (US); **Glenn Gengel**,
Hollister, CA (US); **Randy**
Eisenhardt, Fargo, ND (US)**Publication Classification**(51) **Int. Cl.**
B23P 19/00 (2006.01)
H01L 21/00 (2006.01)
(52) **U.S. Cl.** **29/740; 438/108; 257/E21.511**

Correspondence Address:

**BLAKELY SOKOLOFF TAYLOR & ZAFMAN
LLP**
1279 OAKMEAD PARKWAY
SUNNYVALE, CA 94085-4040 (US)(21) Appl. No.: **12/268,413**(22) Filed: **Nov. 10, 2008****Related U.S. Application Data**(62) Division of application No. 11/159,550, filed on Jun.
22, 2005, now Pat. No. 7,452,748.(57) **ABSTRACT**

Methods and apparatuses for an electronic assembly. The method comprises depositing a functional block into a recessed region, forming dielectric layer selectively over at least one of a selected portion of the functional block and a selected portion of the first substrate; and forming one or more electrical interconnections to the functional block. The recessed region is formed on a first substrate. The depositing of the functional block occurs on a continuous web line and using a Fluidic Self Assembly process. The functional block has a width-depth aspect ratio that substantially matches a width-depth aspect ratio of said recessed region which is one of equal to or less than 10.5:1, and equal to or less than 7.5:1.



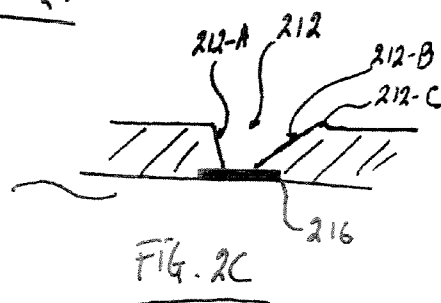
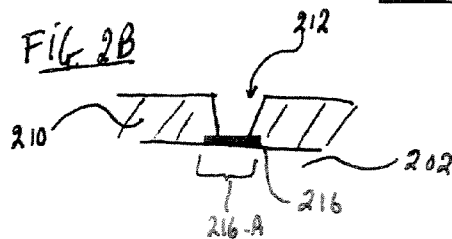
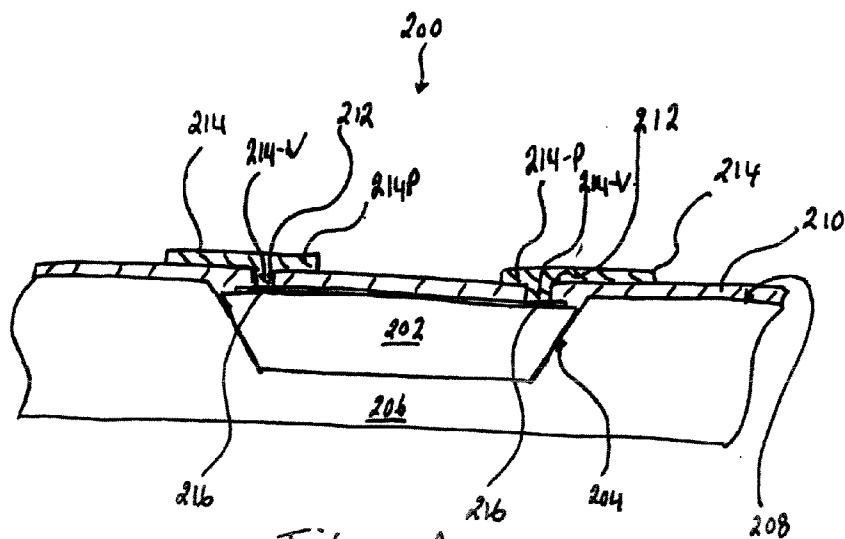
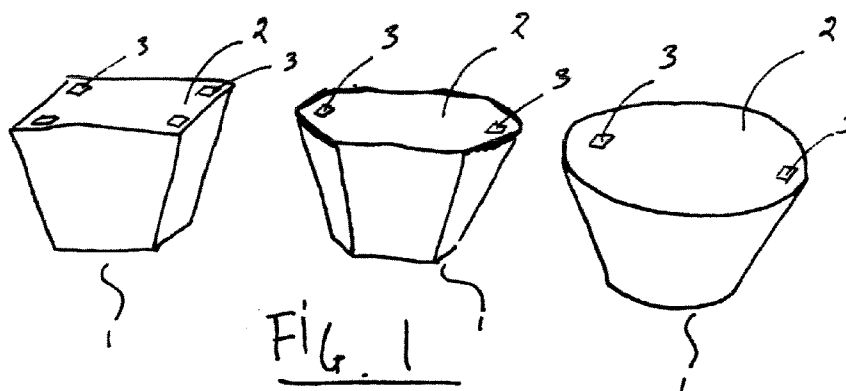


FIG. 2D

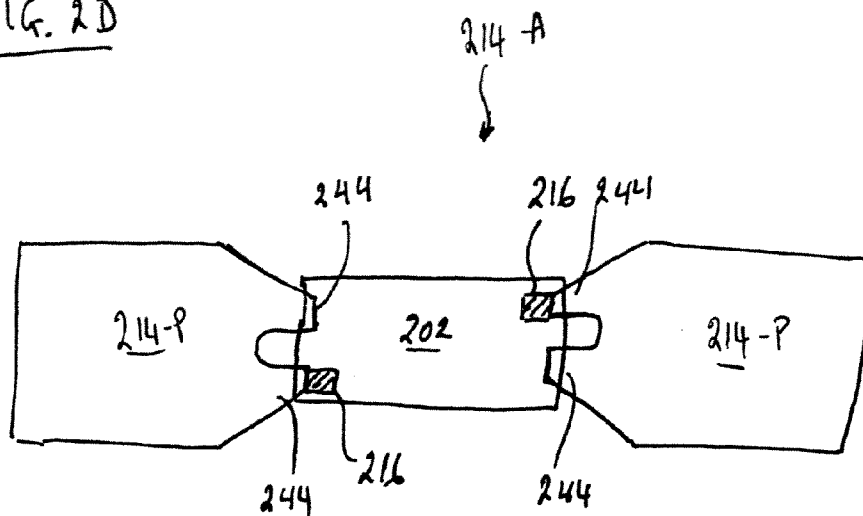


FIG. 2E(a)

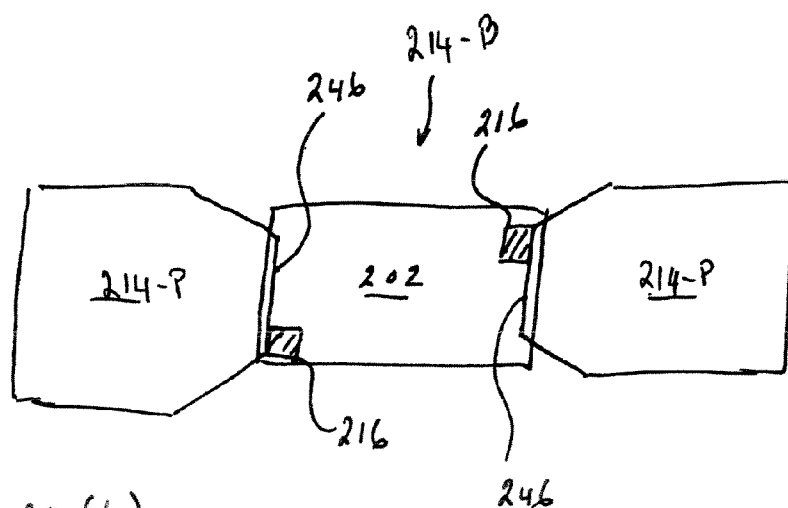


FIG. 2E(b)

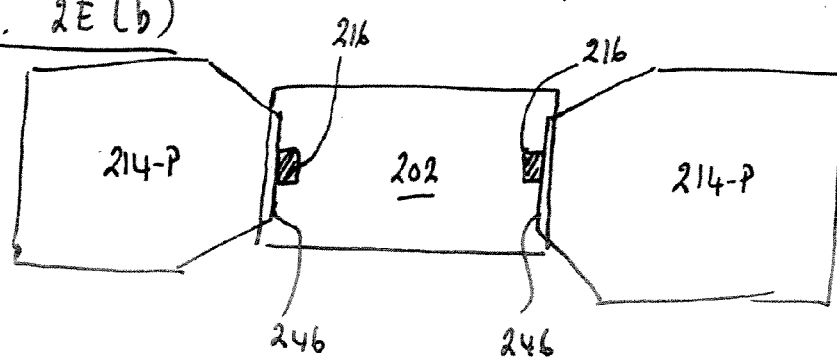


FIG. 2F

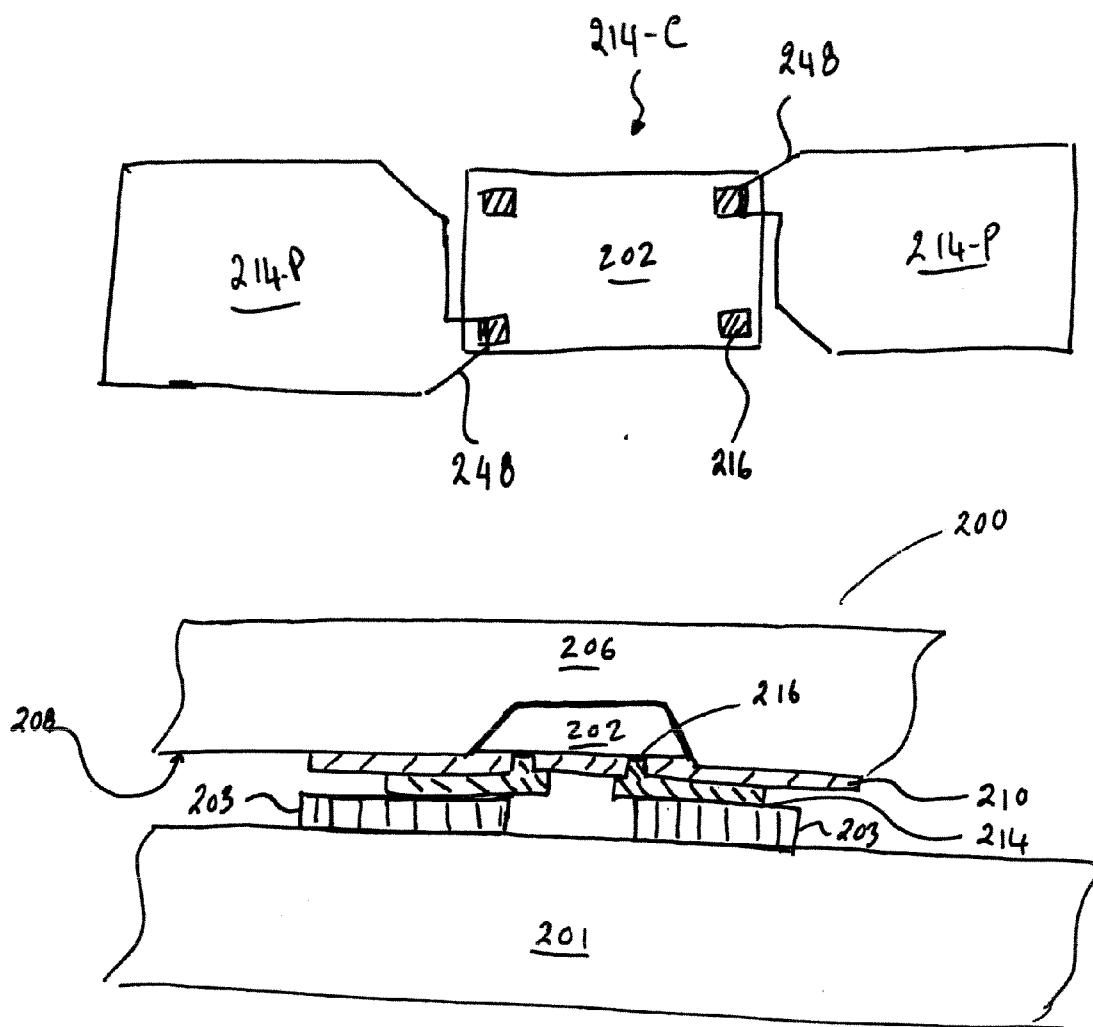
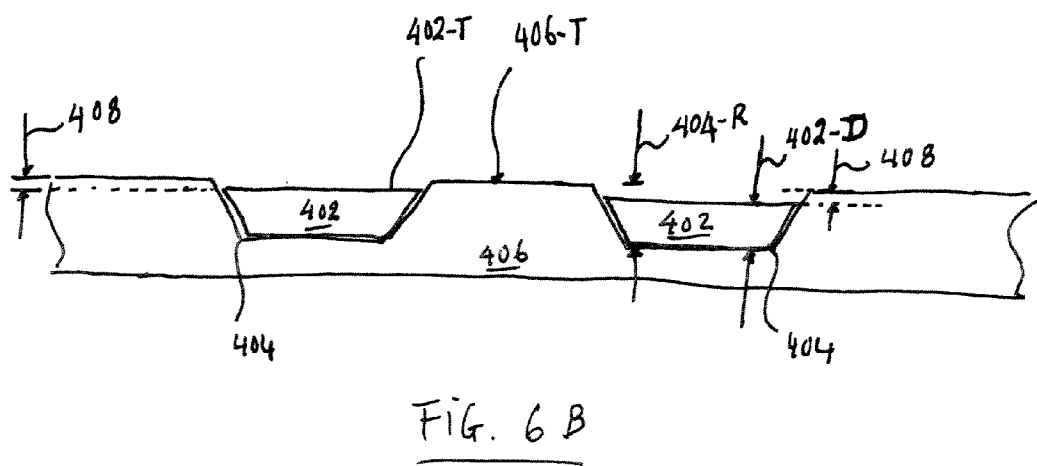
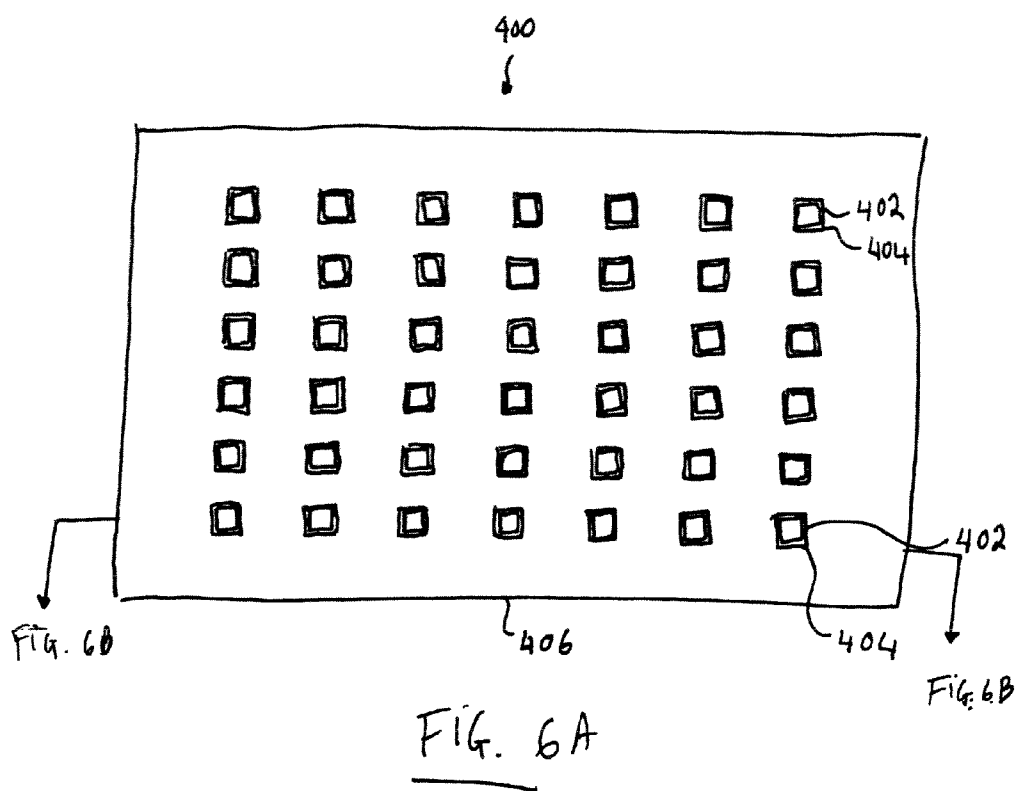


FIG. 2G

Fig. 5



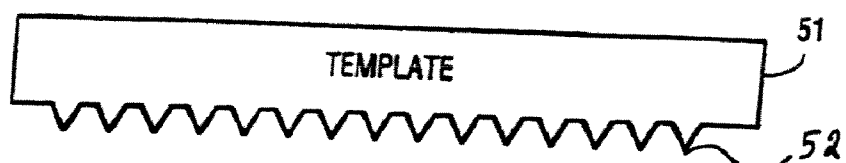


Fig. 7A

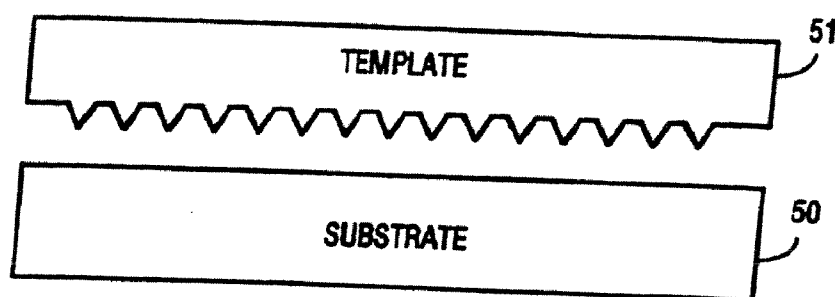


Fig. 7B

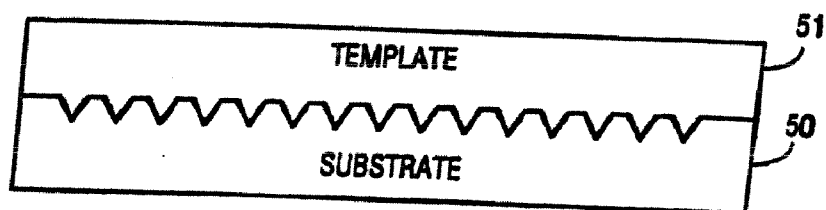


Fig. 7C

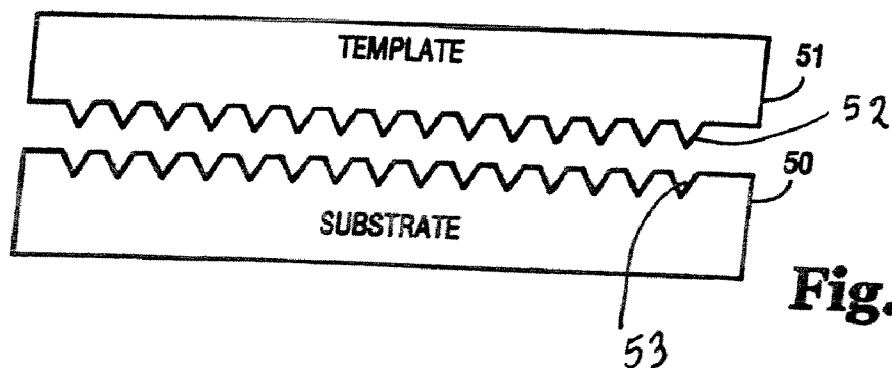


Fig. 7D

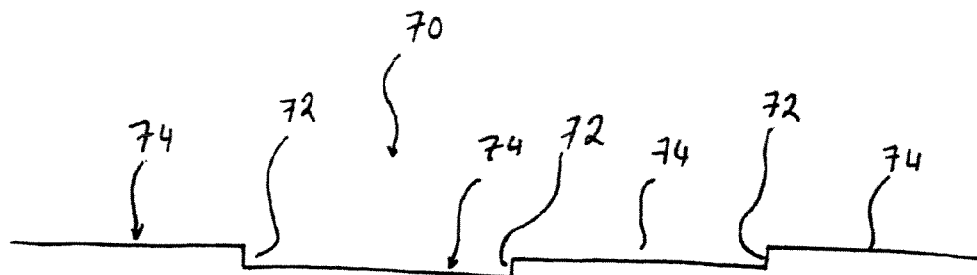


FIG. 7 E

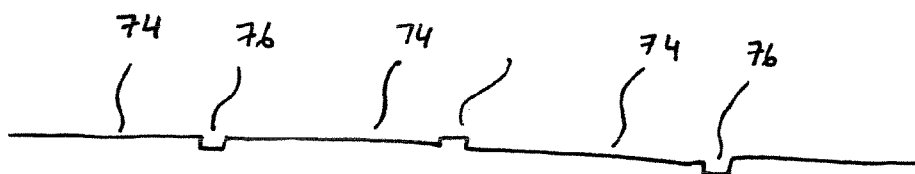


FIG. 7 F

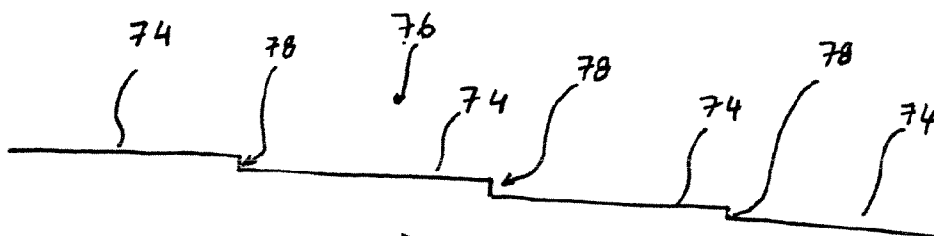


FIG. 7 G

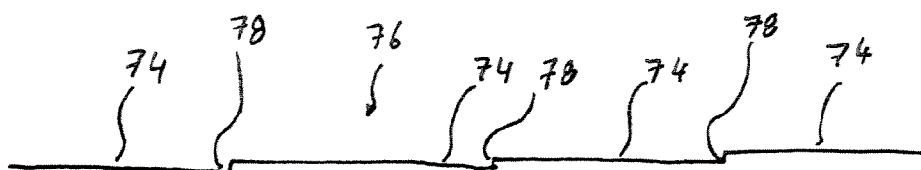


FIG. 7 H

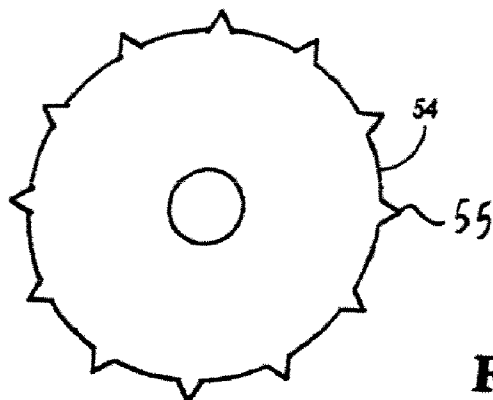


Fig. 7I




Fig. 7J

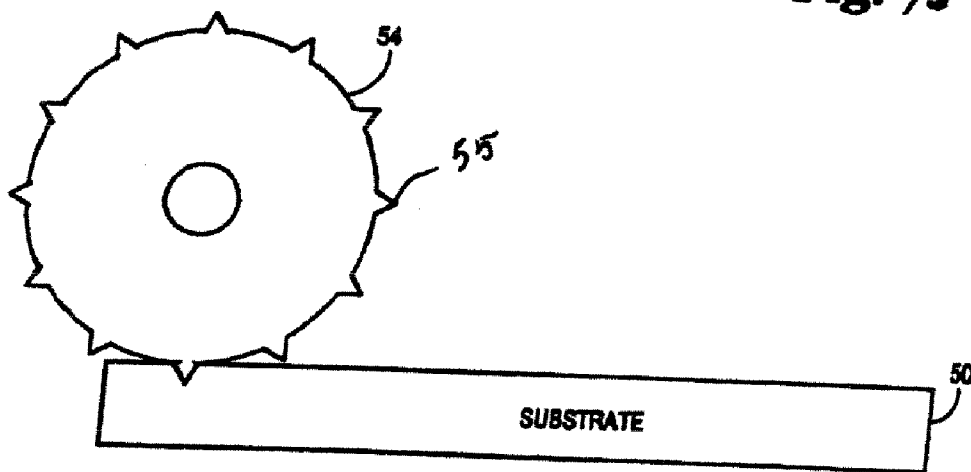


Fig. 7K

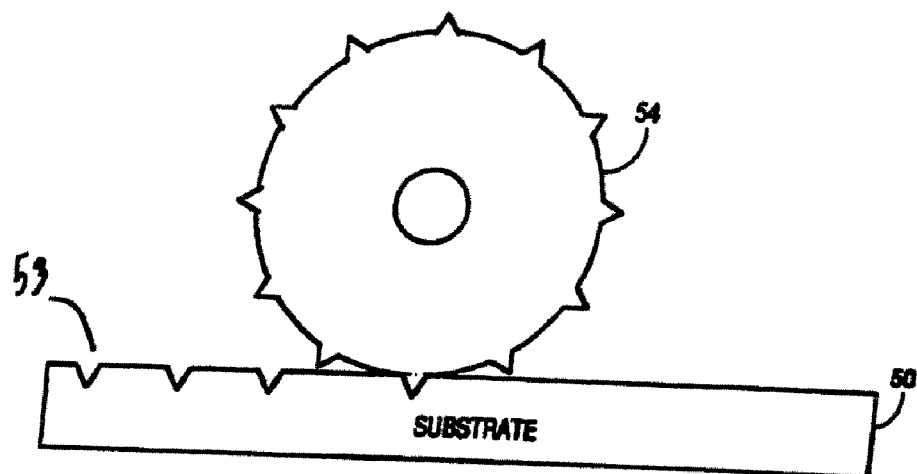


Fig. 7L

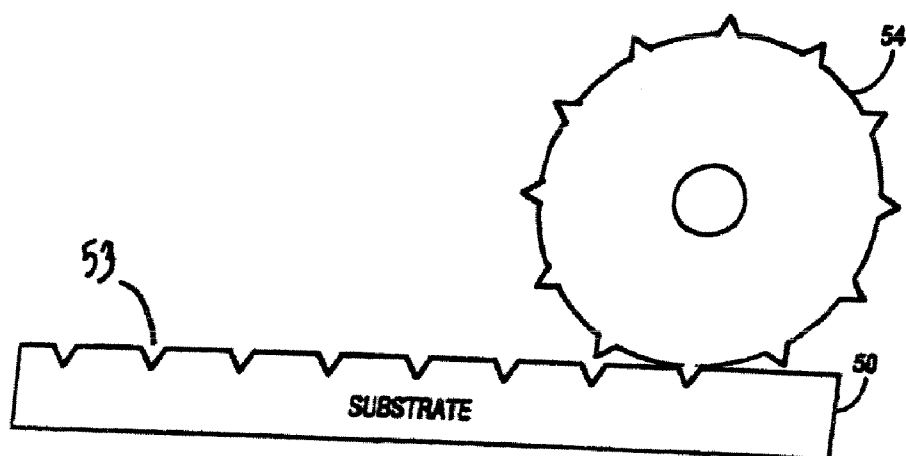


Fig. 7M

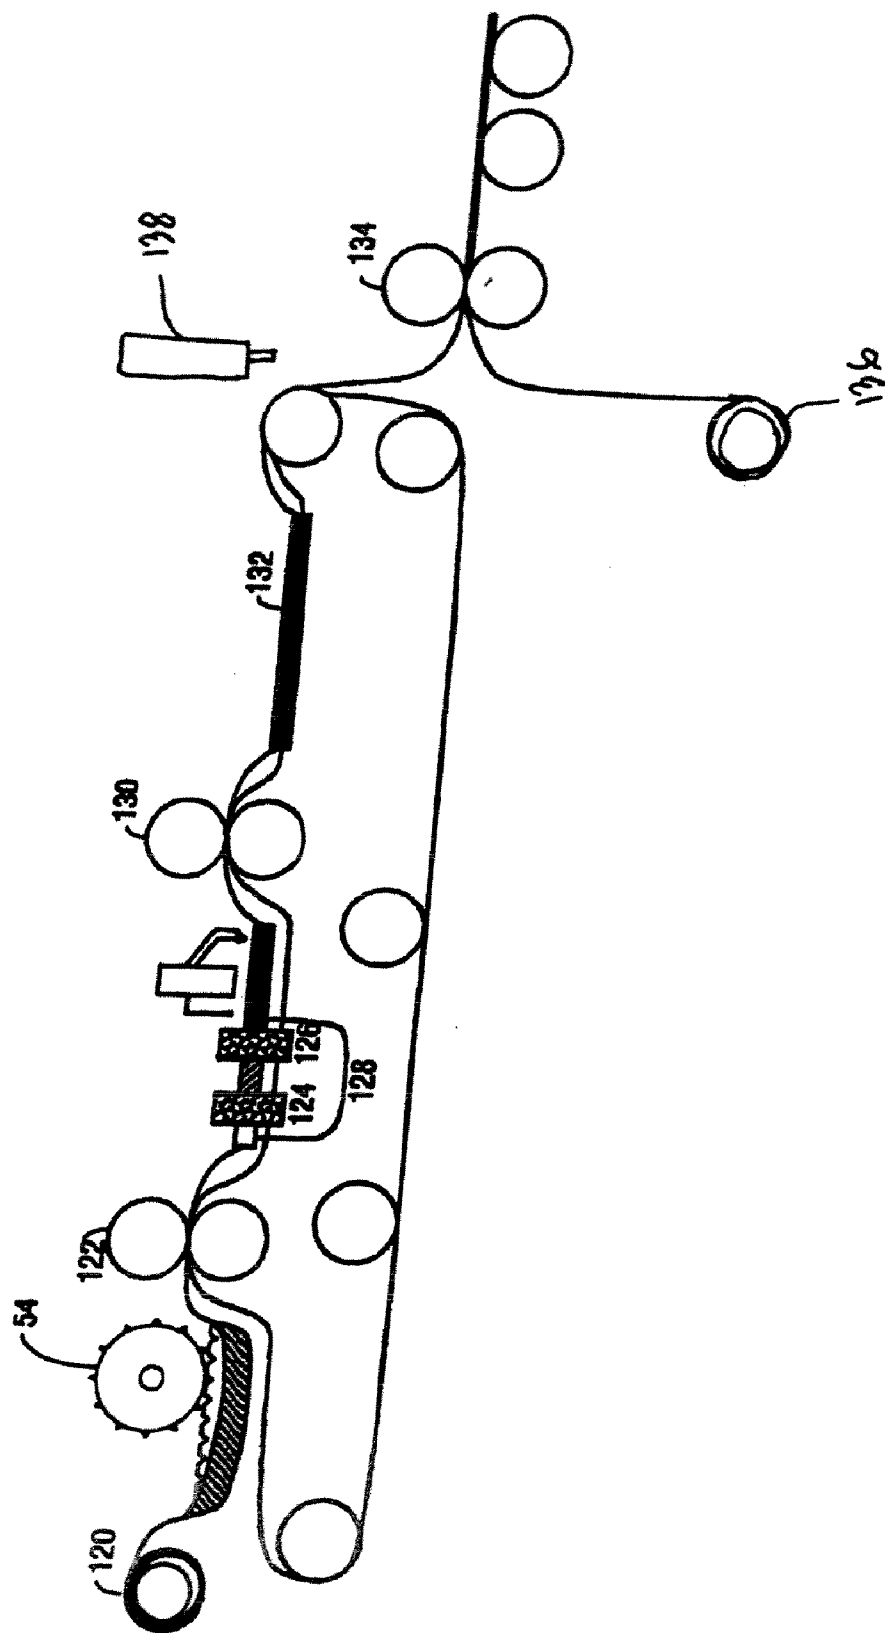


Fig. 8

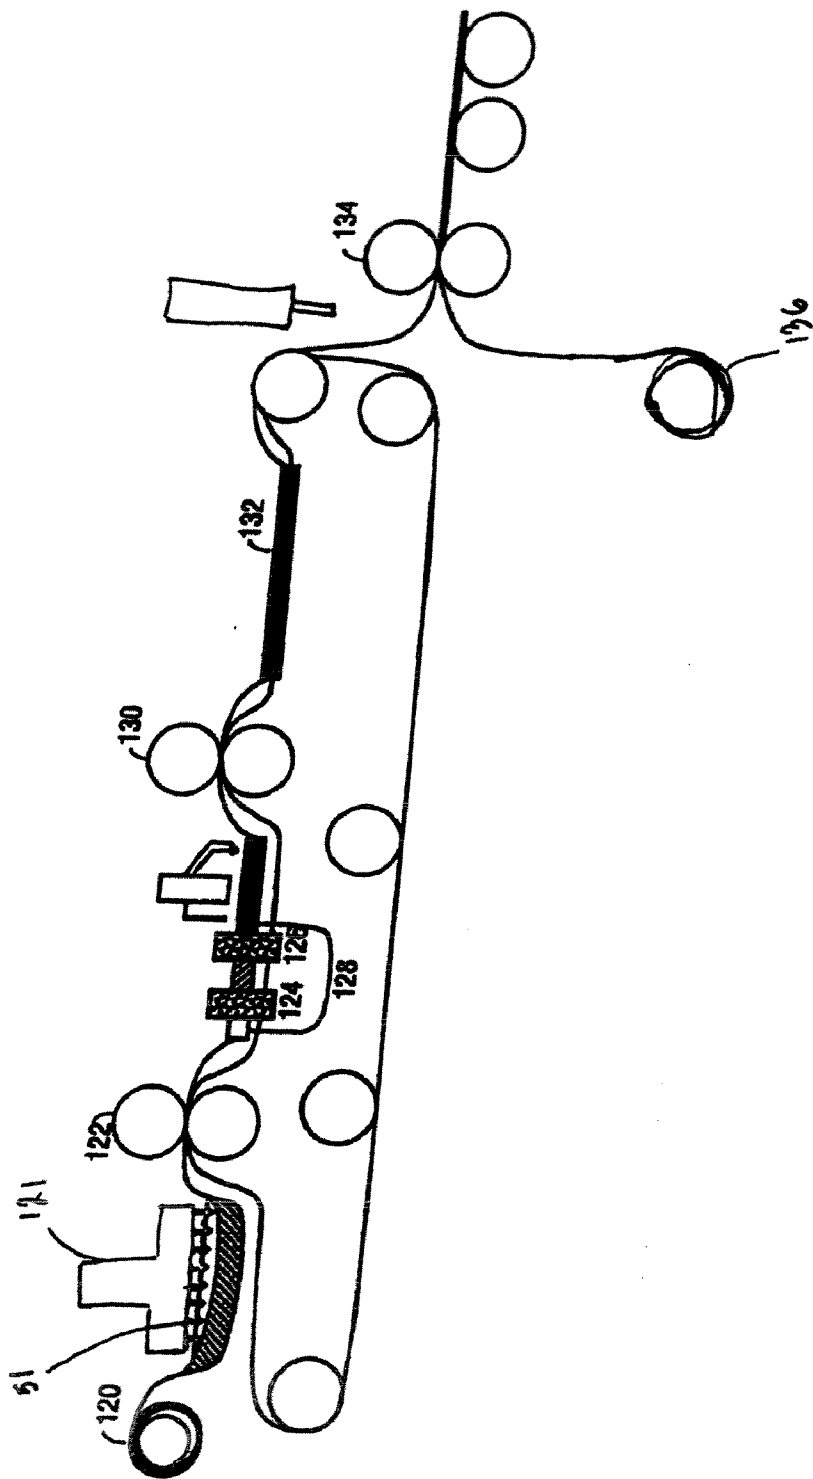


Fig. 9

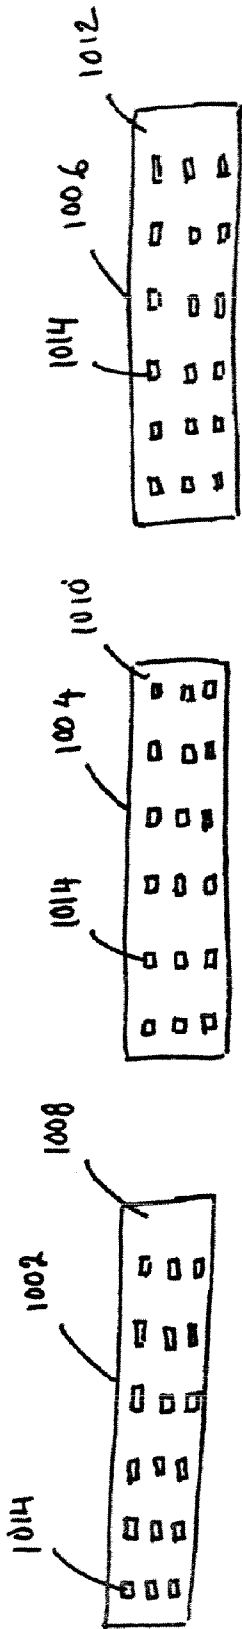


Fig. 10

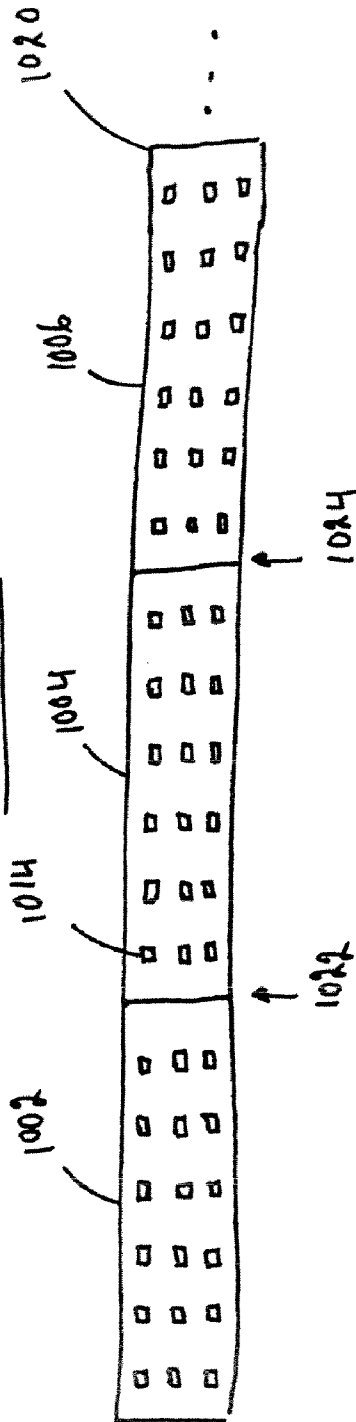


Fig. 11

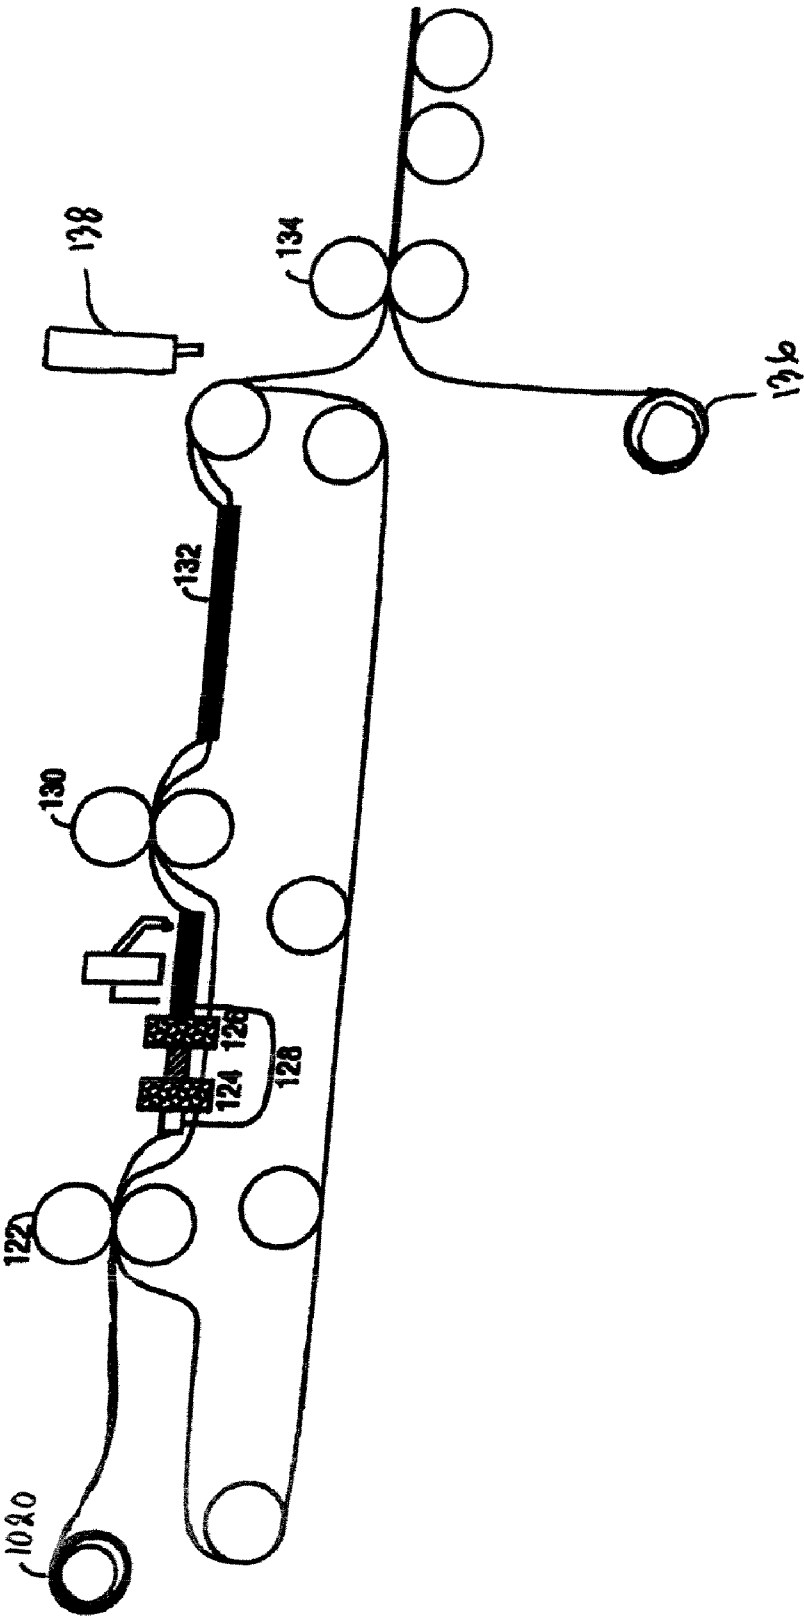


Fig. 12

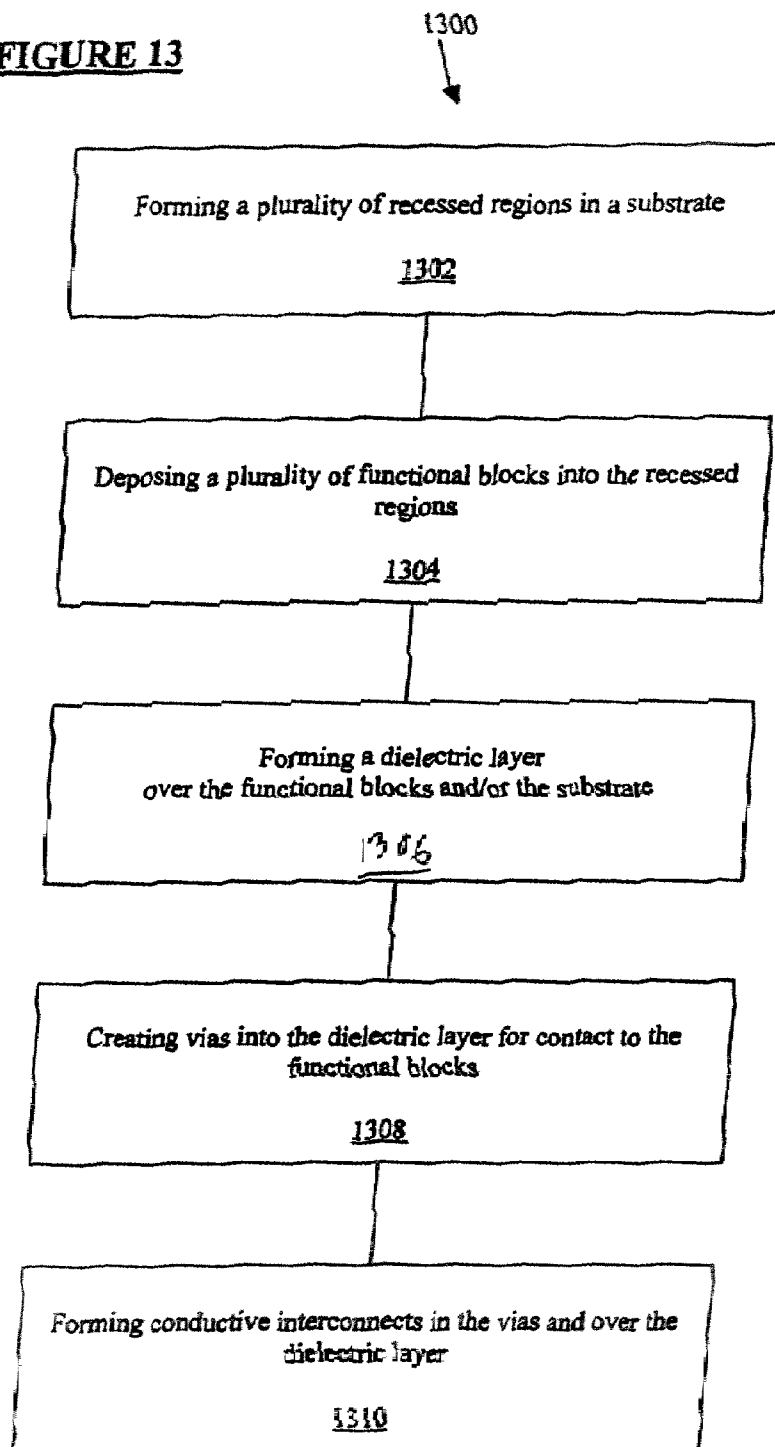
FIGURE 13

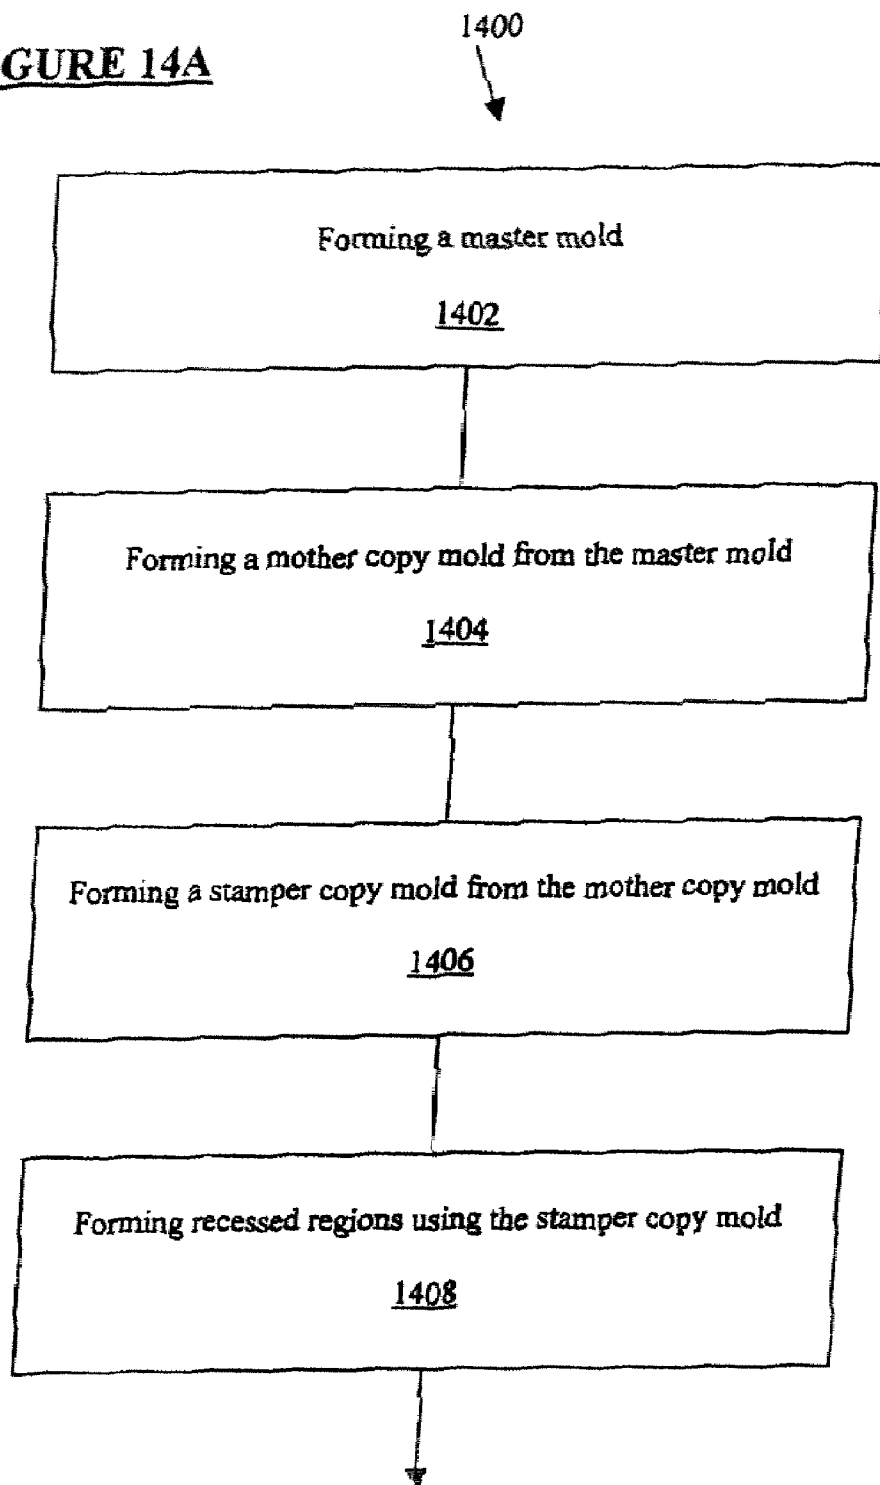
FIGURE 14A

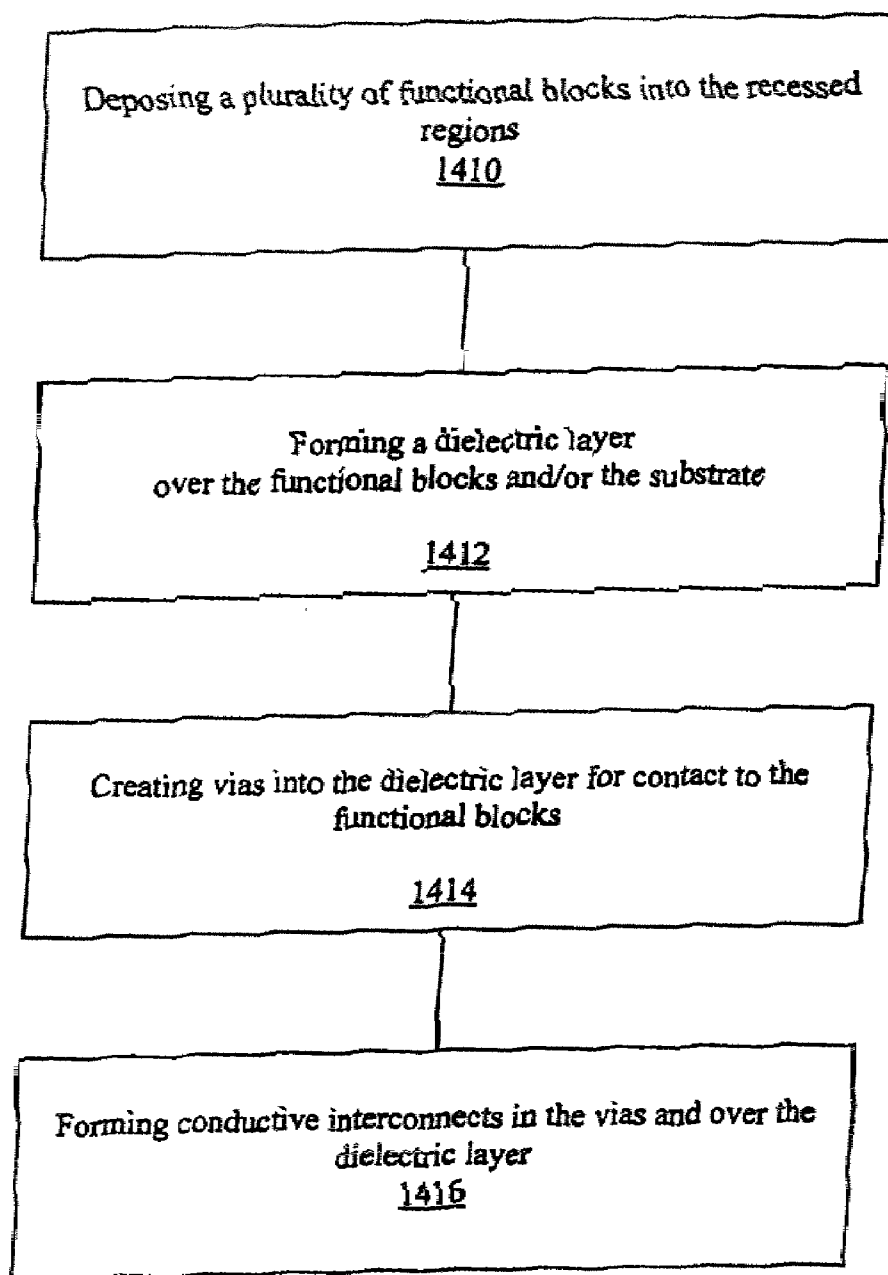
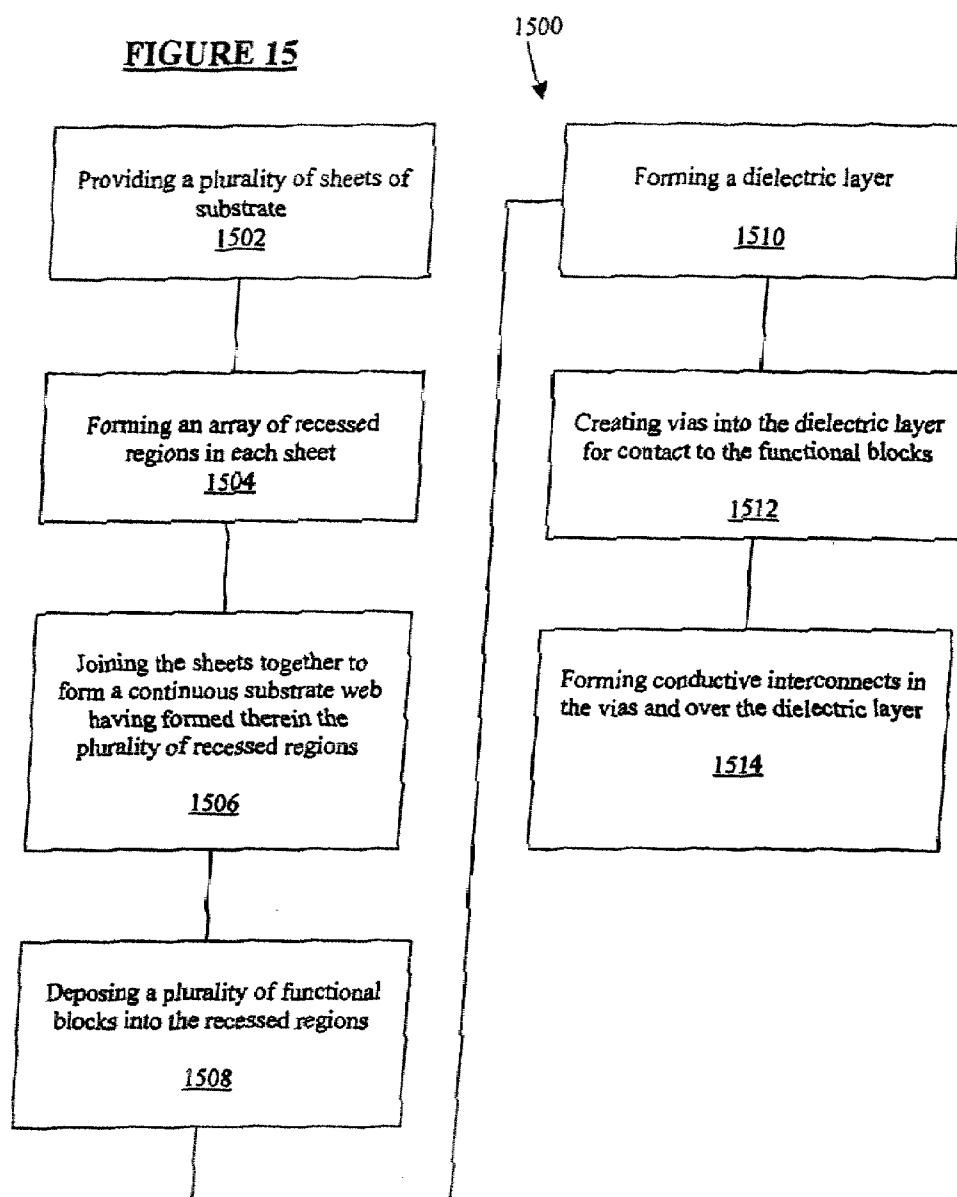
FIGURE 14B

FIGURE 15

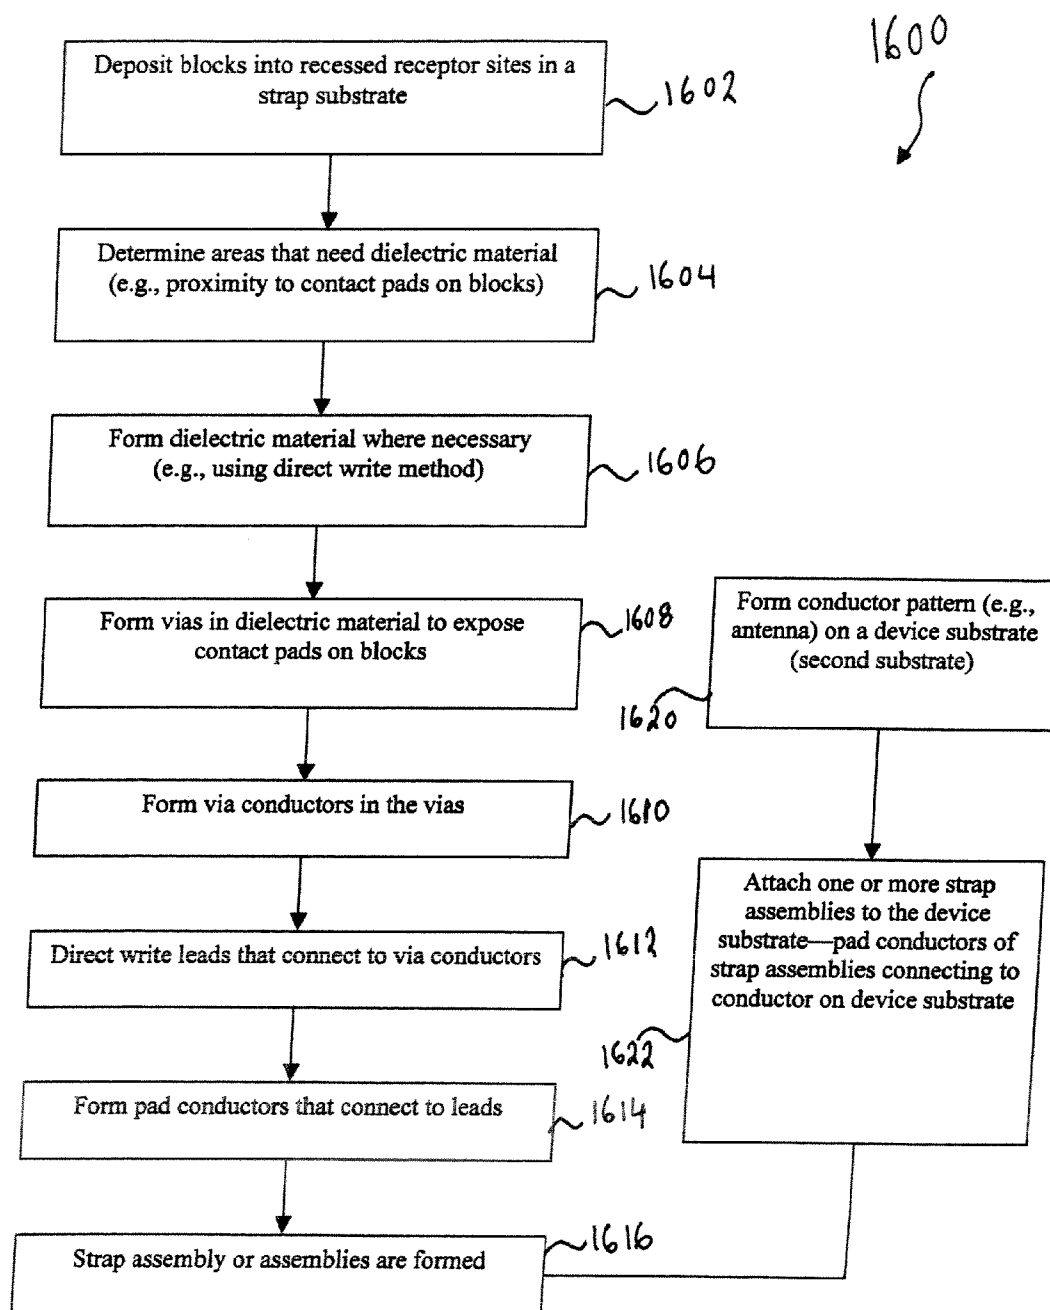


FIGURE 16

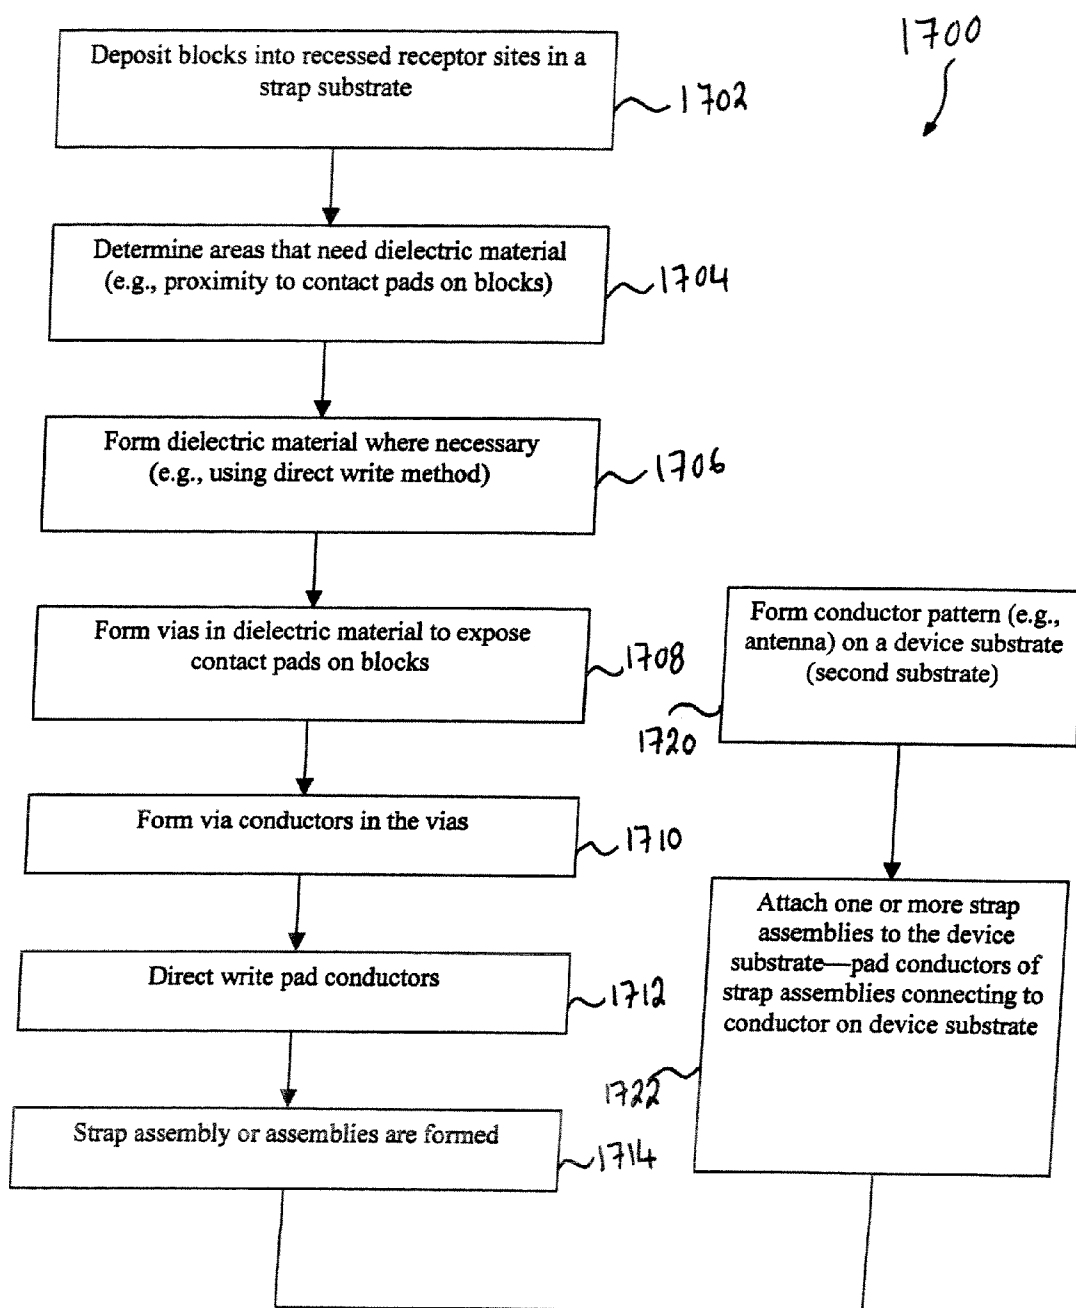


FIGURE 17

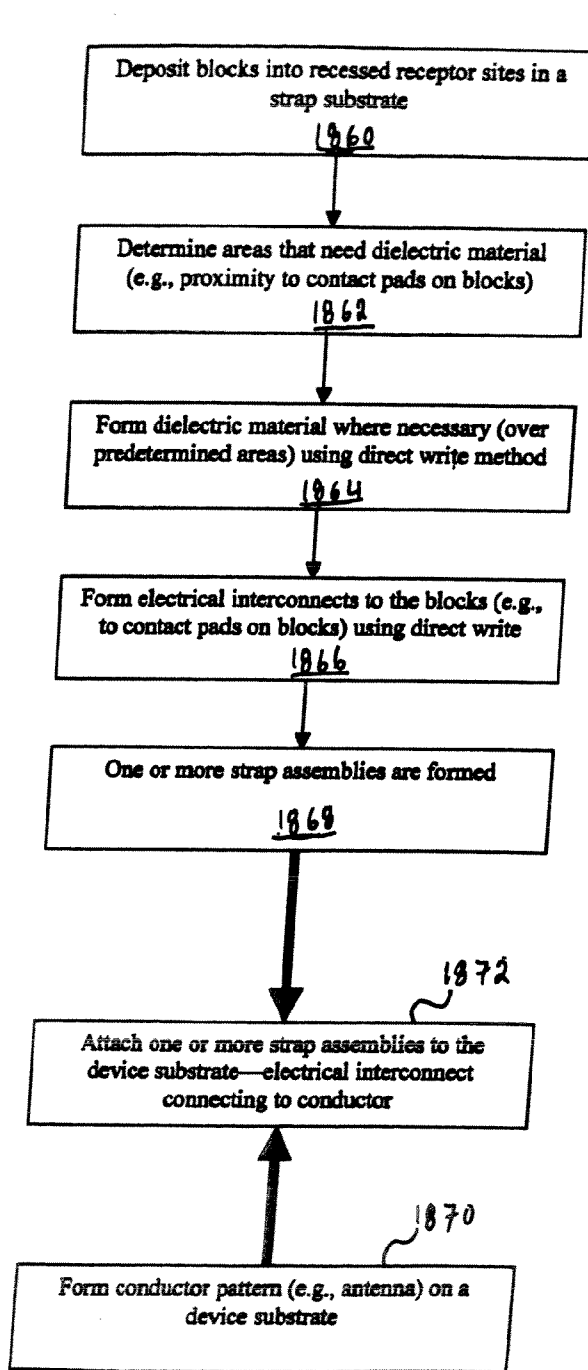


FIGURE 18A

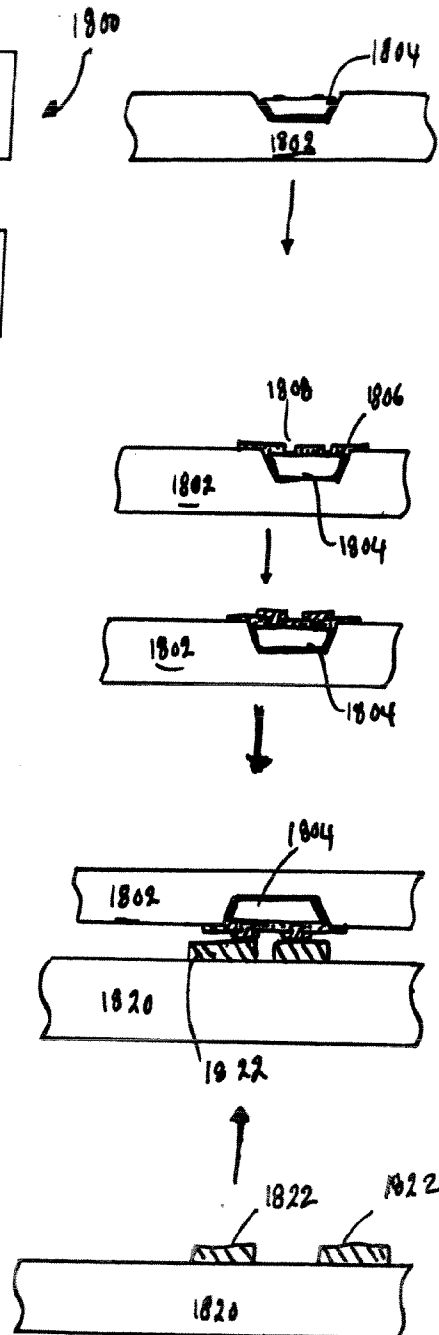
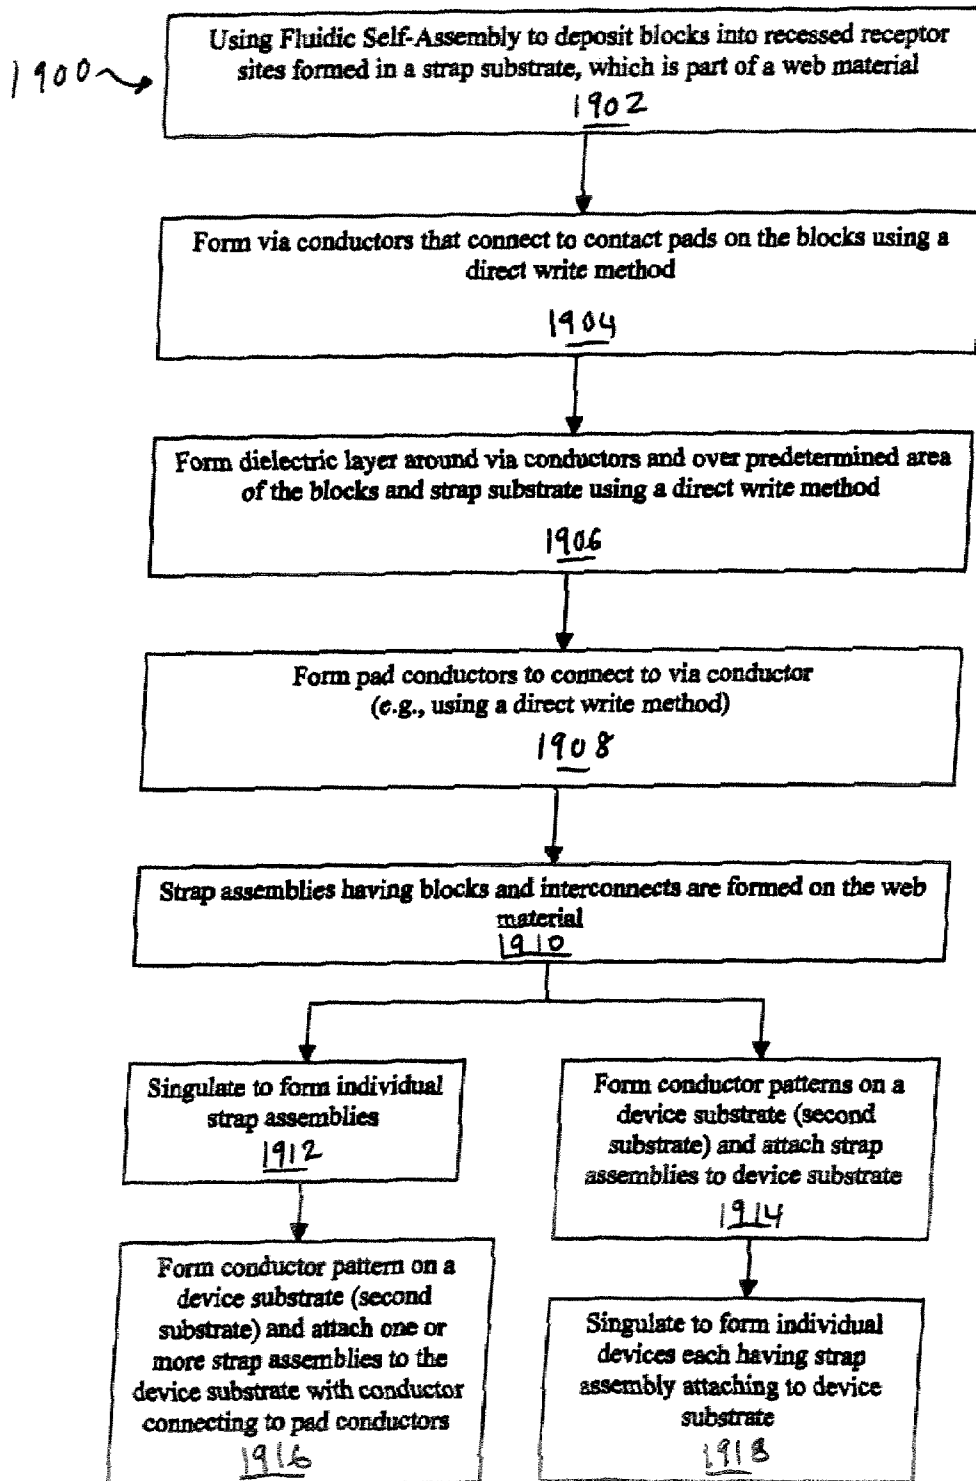


FIGURE 18B

FIGURE 19A

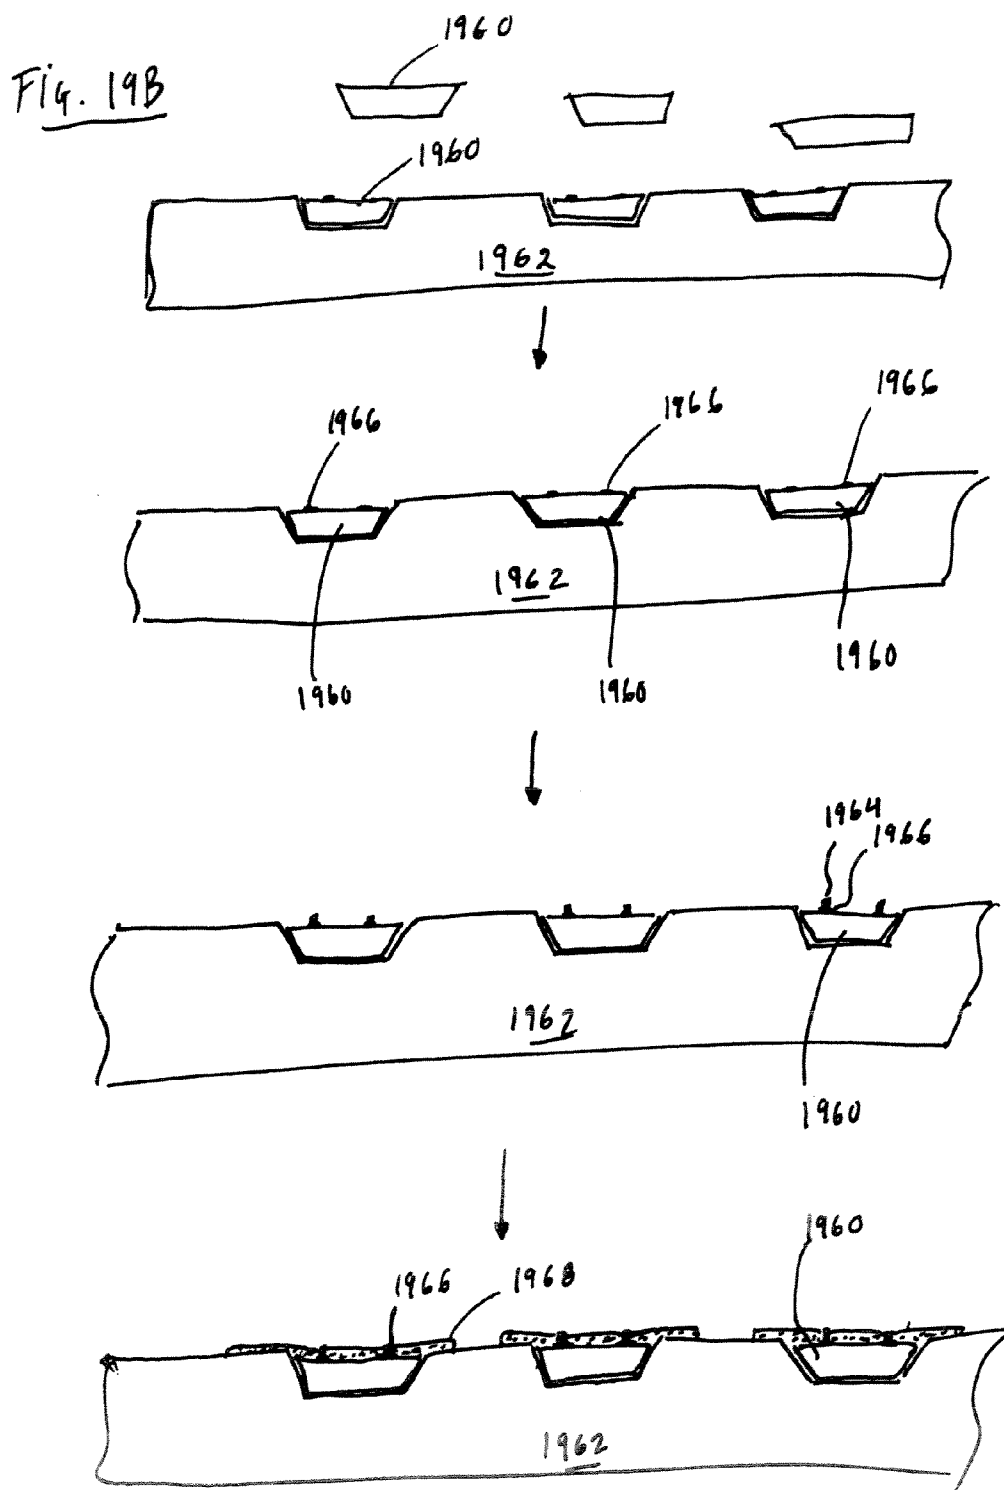
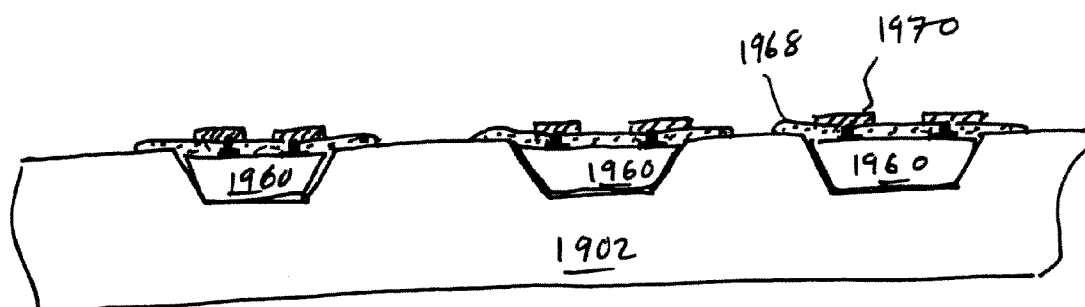


Fig. 19C



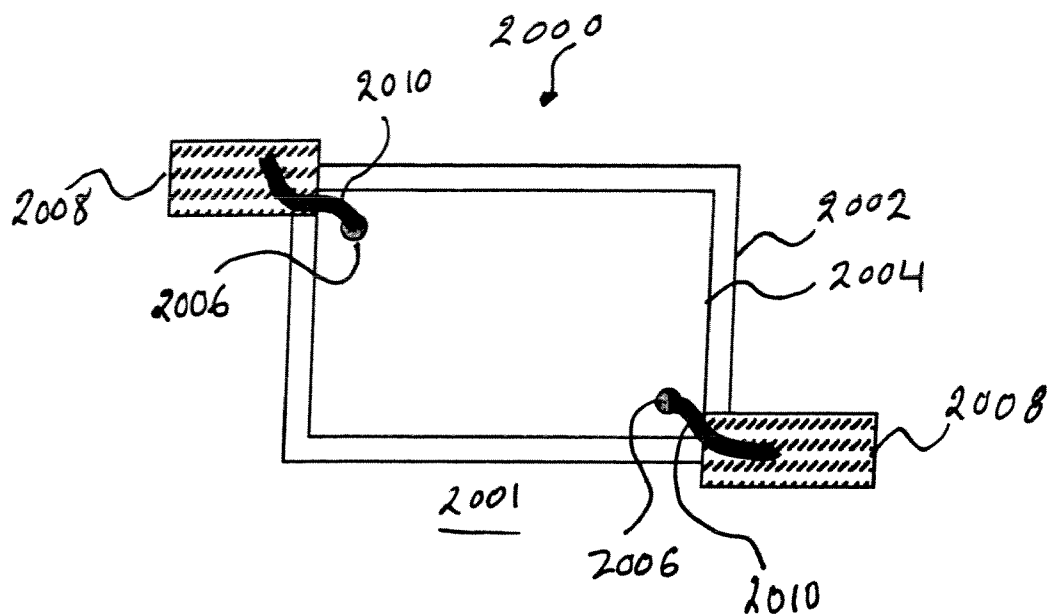


Figure 20

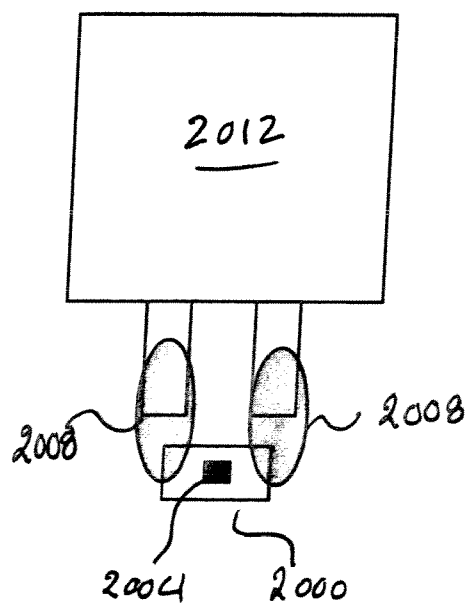


Figure 21

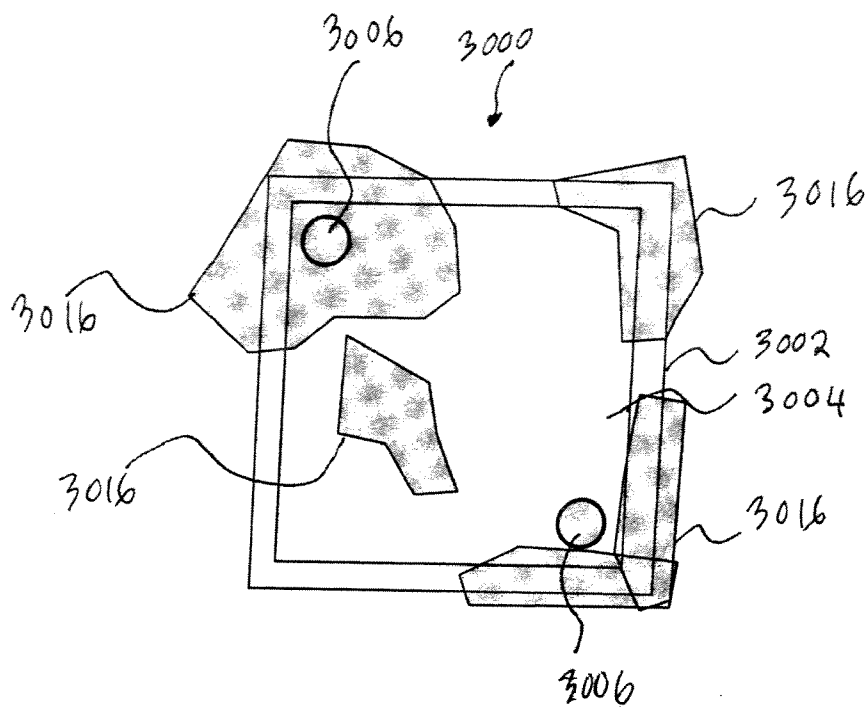


Figure 22

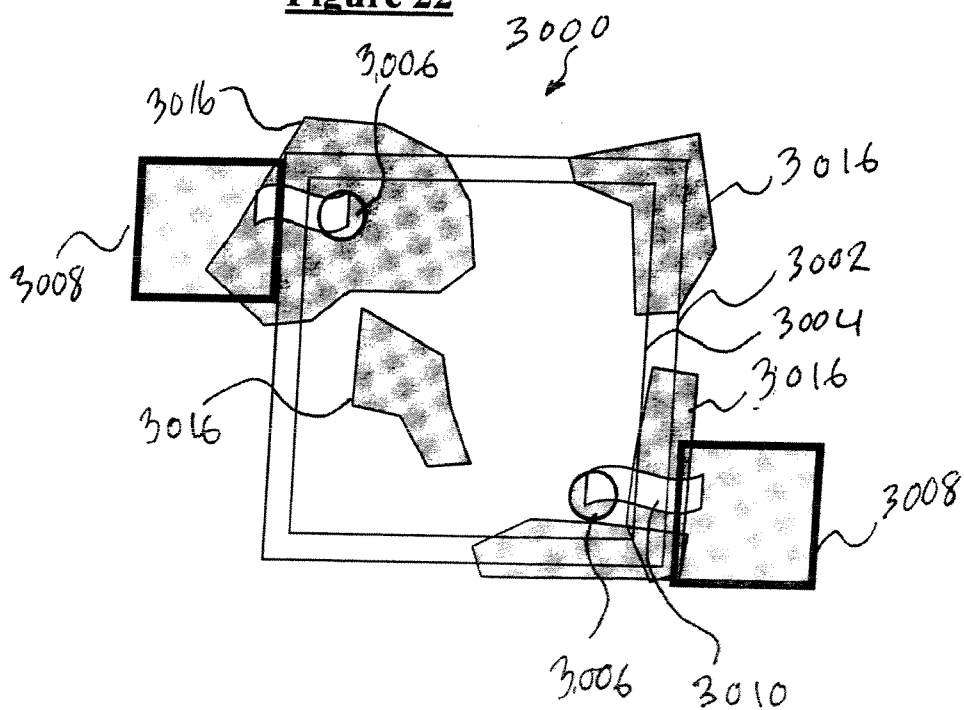


Figure 23

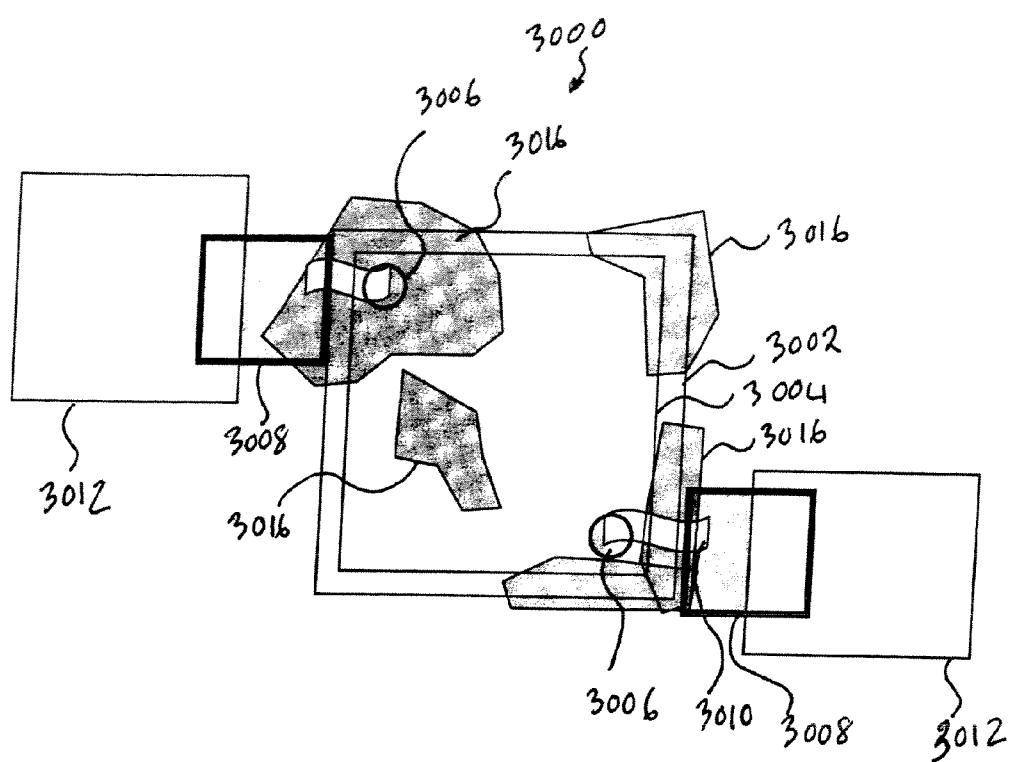


Figure 24

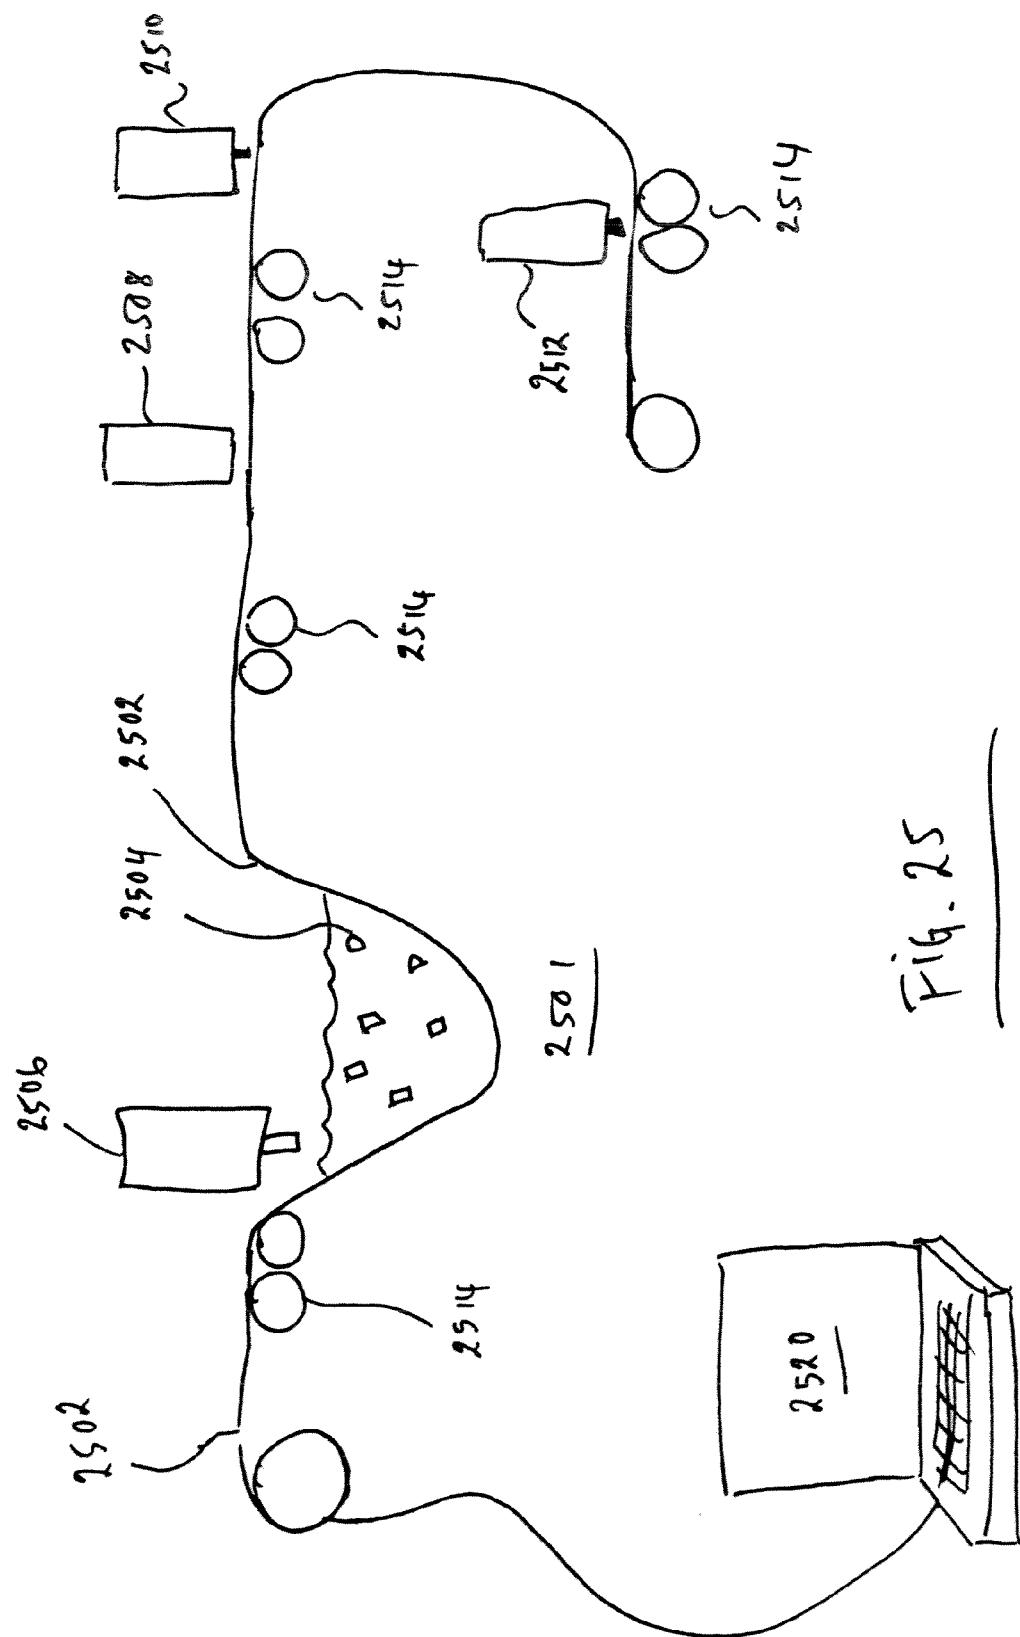


Fig. 25

**STRAP ASSEMBLY COMPRISING
FUNCTIONAL BLOCK DEPOSITED
THEREIN AND METHOD OF MAKING SAME**

RELATED APPLICATIONS

[0001] This application is a divisional of co-pending U.S. patent application Ser. No. 11/159,550, filed on Jun. 22, 2005, which is also related to and claims the benefit of U.S. Provisional Patent Application No. 60/626,241 filed Nov. 8, 2004, which is hereby incorporated by reference in its entirety. This application is also related to co-pending U.S. patent application Ser. Nos. 11/159,526 and 11/159,574 filed on the same day with this application, Jun. 22, 2005, which have attorney docket numbers 03424.P075 and 03424.P076 and which are hereby incorporated by reference in their entireties.

FIELD

[0002] The present invention relates generally to the field of fabricating electronic devices with small functional elements deposited in a substrate.

BACKGROUND

[0003] There are many examples of functional blocks or components that can provide, produce, or detect electromagnetic or electronic signals or other characteristics. The functional blocks are typically objects, microstructures, or microelements with integrated circuits built therein or thereon. These functional blocks have many applications and uses. The functional components can be used as an array of display drivers in a display where many pixels or sub-pixels are formed with an array of electronic elements. For example, an active matrix liquid crystal display includes an array of many pixels or sub-pixels which are fabricated using amorphous silicon or polysilicon circuit elements. Additionally, a billboard display or a signage display such as store displays and airport signs are also among the many electronic devices employing these functional components.

[0004] Functional components have also been used to make other electronic devices. One example of such use is that of a radio frequency (RF) identification tag (RFID tag) which contains a functional block or several blocks each having a necessary circuit element. Information is recorded into these blocks, which is then transferred to a base station. Typically, this is accomplished as the RFID tag, in response to a coded RF signal received from the base station, functions to cause the RFID tag to reflect the incident RF carrier back to the base station thereby transferring the information. Such RFID tags are being incorporated into many commercial items for uses such as tracking and authenticating the items.

[0005] The functional components may also be incorporated into substrates to make displays such as flat panel displays, liquid crystal displays (LCDs), active matrix LCDs, and passive matrix LCDs. Making LCDs has become increasingly difficult because it is challenging to produce LCDs with high yields. Furthermore, the packaging of driver circuits has become increasingly difficult as the resolution of the LCD increases. The packaged driver elements are also relatively large and occupy valuable space in a product, which results in larger and heavier products.

[0006] Demand for functional components has expanded dramatically. Clearly, the functional components have been applied to make many electronic devices, for instance, the making of microprocessors, memories, power transistors,

super capacitors, displays, x-ray detector panels, solar cell arrays, memory arrays, long wavelength detector arrays, phased array antennas, RFID tags, chemical sensors, electromagnetic radiation sensors, thermal sensors, pressure sensors, or the like. The growth for the use of functional components, however, has been inhibited by the high cost of assembling the functional components into substrates and fabricating final devices or end products that incorporate the functional components.

[0007] Often the assembling of these components requires complex and multiple processes thereby causing the price of the end product to be expensive. Furthermore, the manufacturing of these components is costly under the current method because of inefficient and wasteful uses of the technologies and the materials used to make these products.

[0008] Many aspects such as substrates' materials, characteristics, dimensions, and/or functional blocks' dimensions and characteristics, and the like, impact the efficiency and cost of assembling the functional components into substrates. Accurate dimension and parameter control of these aspects are crucial for efficiency while reducing cost for assembling electronic devices containing functional blocks deposited therein.

SUMMARY

[0009] Embodiments of the present invention provide methods that can lead to efficient fabrications of an electronic assembly that incorporates a functional component or block.

[0010] In one aspect of the invention, a strap assembly is fabricated. One or more recessed receptor sites (regions) are formed into a strap substrate. One or more functional or integrated circuit blocks are deposited into the recessed receptor sites, for example, using a Fluidic Self-Assembly (FSA) process. Electrical interconnections are created to enable connection to the functional blocks. After the functional blocks are deposited into the respective receptor sites in the strap substrate and the necessary interconnections formed, the strap assembly is then attached to another substrate, which may comprise a set of patterned or printed conductor (e.g., elements or parts of an antenna for an RFID device).

[0011] To form the electrical interconnections, in one embodiment, a local printing method coupled with a guidance system is used to increase the resolution of the interconnections. A print head is used for the local printing method. One or more electrical contacts to the functional blocks can be made using this local printing method. The guidance system can be an optical system that recognizes features on the strap substrate to provide alignment of a print head. An electrical, magnetic, or mechanical mechanism can also be used to provide improved alignment as well. The local printing method includes thermal jet printing, piezoelectric jet printing, acoustic jet printing, extrusion of a material (stencil printing), or other printing methods. It should be recognized that it is possible to group multiple local printing methods with multiple print heads, with each print head depositing a printed material, so that more than one region of a substrate can be printed on at the same time.

[0012] In another aspect of the invention, the guidance system is used to improve the registration of the printing of the interconnections of the strap substrate. In another aspect of the invention, a combination of local printing, laser cutting, and a guidance system are used to repair bad circuit elements in the strap substrate.

[0013] In another aspect, a testing method, which could comprise an optical, electrical, or mechanical means, is used to determine areas of the strap substrate in which a portion of the functional blocks are known to be, or suspected to be, faulty. A laser can be used to cut, deplete, or otherwise render the damaged area ready for a subsequent printing or deposition step, including the deposition of another integrated circuit element.

[0014] In another aspect of the invention, a printing method with a guidance system is used to deposit a dielectric (non-conductive) material over selected areas of the functional block and/or the strap substrate. The dielectric material functions as an insulation as well as used to tack down, trap, or adhere the functional block that is within a recessed receptor region and/or the integrated circuit on the block. Further processing of the strap substrate and final device can then be performed with minimal risk of the integrated circuit or functional block becoming detached from the substrate.

[0015] One aspect of the invention pertains to a method that comprises depositing a functional block into a recessed region; forming a dielectric layer selectively over a selected portion or selected portions of the functional block and the first substrate; and forming one or more electrical interconnections to the functional block. The recessed region is formed on a first substrate. Depositing the blocks occurs on a continuous web line and using a Fluidic Self Assembly process. The functional block has a width-depth aspect ratio that substantially matches a width-depth aspect ratio of the recessed region, which is equal to or less than 10.5:1. Alternatively, the width-depth aspect ratio of the recessed region is equal to or less than 7.5:1.

[0016] One aspect of the invention pertains to a method that comprises depositing a functional block onto a web substrate using a Fluidic Self Assembly process; using a direct writing process to form a dielectric layer over the functional block and the web substrate at selected areas; and forming one or more interconnects to the functional block. The web substrate has a recessed region configured to receive the functional block. In one embodiment, depositing the functional block, forming the dielectric layer, and forming the interconnects all occur on a same machine.

[0017] One aspect of the invention pertains to a processing system used for assemble functional blocks into a strap substrate. The processing system comprises a web-processing line configured to move a roll of substrate material across one or more processing stations; a Fluidic Self-Assembly device configured to deposit a functional into a recessed region formed in the substrate material; a first direct write device configured to formed interconnection features to and from the functional block; and a second direct write device configured to selectively form a dielectric layer over the functional block and the substrate material. The system may further comprise a vibration device positioned to exert a vibrational force on one or both of the substrate material and a slurry that is dispensed via the FSA device to dispense the functional block onto the substrate material. The vibration device facilitates deposition of functional block. The system may further comprise an embossing device configured to create the recessed region into the substrate material. Additionally, a computer system may be included and which is set up to control the web-processing line, the FSA device, the first direct writing

device, and/or the second direct writing device, and other devices associated with the processing system.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The invention will be understood more fully from the detailed description given below and from the accompanying drawings of various embodiments of the invention, which, however, should not be taken to limit the invention to the specific embodiments, but are for explanation and understanding only. In the drawings:

[0019] FIG. 1 illustrates an example of a functional component block;

[0020] FIG. 2A illustrates an exemplary embodiment of an electronic assembly with a functional block deposited in a substrate;

[0021] FIGS. 2B-2C illustrate exemplary embodiments of a via formed in a dielectric layer that is formed over a functional block;

[0022] FIGS. 2D, 2E(a)-2E(b) and 2F illustrate exemplary embodiments of a conductive interconnect coupling to a functional block;

[0023] FIG. 2G illustrates an exemplary embodiment of incorporating the assembly formed in FIG. 2A to a second substrate (a device substrate);

[0024] FIG. 3 illustrates an exemplary embodiment of an electronic assembly with a functional block deposited in a substrate that is a multi-layered substrate;

[0025] FIGS. 4-5 illustrate aspects of a recessed region formed in a substrate

[0026] FIG. 6A illustrates an exemplary embodiment of an electronic assembly with multiple functional blocks deposited in a substrate with a plurality of recessed regions;

[0027] FIG. 6B illustrates an exemplary embodiment of an electronic assembly with multiple functional blocks deposited in a substrate with the functional blocks being recessed below a surface of the substrate;

[0028] FIGS. 7A-7D illustrate an exemplary embodiment that uses a template to create recessed regions in a substrate;

[0029] FIGS. 7E-7F illustrate non-uniform or inconsistent step-changes between frames of substrate;

[0030] FIGS. 7G-7H illustrate an exemplary embodiment of the present invention with consistent step-changes between frames of substrate;

[0031] FIGS. 7I-7M illustrate an exemplary embodiment that uses a roller with features to create recessed regions in a substrate;

[0032] FIG. 8 illustrates an exemplary embodiment of an overall process of making an electronic assembly with functional block in accordance to embodiments of the present invention;

[0033] FIG. 9 illustrates another exemplary embodiment of an overall process of making an electronic assembly with functional block in accordance to embodiments of the present invention;

[0034] FIGS. 10-11 illustrate a plurality of sheets being joined together to form a long sheet of substrate with recessed regions in accordance with embodiments of the present invention;

[0035] FIG. 12 illustrates an exemplary embodiment of an overall process of making an electronic assembly with functional block in accordance to embodiments of the present invention;

[0036] FIGS. 13, 14A-14B, and 15 illustrate exemplary methods of making an electronic assembly with functional block in accordance to embodiments of the present invention;

[0037] FIGS. 16-17, 18A-18B, and 19A-19C illustrate exemplary methods of making an electronic assembly with functional block incorporating direct writing technique in accordance to embodiments of the present invention;

[0038] FIGS. 20-24 illustrate exemplary electronic assemblies formed in accordance to methods of the present invention; and

[0039] FIG. 25 illustrates an exemplary processing system that can be used with some embodiments of the present invention.

DETAILED DESCRIPTION

[0040] In the following description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the invention. It will be apparent to one skilled in the art, however, that the invention can be practiced without these specific details. In other instances, structures and devices are shown in block diagram form to avoid obscuring the invention.

[0041] Embodiments of the present invention relate to methods for forming holes, openings, or recessed regions in a substrate or web substrate and depositing functional blocks into the recessed regions, forming layers, and/or electrical interconnections to the blocks to form electronic assemblies. On many occasions, the disclosure refers to the substrate with one or more functional blocks deposited therein as a "strap assembly." Electronic devices that can be formed using embodiments include a display, a smart card, a sensor, an electronic tag, an RFID tag, etc. Some embodiments of the present invention also relate to characteristics and features of the substrates or the substrate materials that the functional blocks are deposited therein. Some embodiments of the present invention also relate to feature dimensions and specifics of the functional blocks with respect to the substrate and the recessed regions.

[0042] Embodiments of the invention apply to both flexible and rigid substrates, and to both monolayer and multilayer substrates. By creating recessed regions in a substrate, the substrate is able to receive a functional block or functional blocks that may have a circuit element thereon. In some embodiments, the substrate includes one functional block. In many embodiments, the substrate includes a plurality of such recessed regions for a plurality of such functional blocks. Typically the blocks are contained in a slurry, which is deposited onto the flexible substrate as is typically done in a Fluidic Self-Assembly (FSA) process. Although the blocks may be comprised of single crystal silicon or other like material, which makes the block rigid, the substrate may still be flexible because the size of these blocks (e.g., 650×500 μm or 850×850 μm) is small, or significantly small, in comparison to the flexible substrate (e.g., 3×6 mm or larger). In some embodiments, the flexible substrate forms part of an RFID tag, a merchandise label, a packaging, a pharmaceutical label/seal, a currency (money), or a display backplane, to name a few example applications.

[0043] Many devices are made from a combination of a strap substrate and another substrate (or a receiving substrate or a device substrate). Such devices may include an RFID tags, a display, a smart card, a sensor, an electronic tag, or a sensor device. A device with a strap substrate combined to another substrate are described in U.S. Pat. No. 6,606,247,

which is hereby incorporated herein by reference. In one example of this combination, the strap substrate is fabricated with one or more recessed receptor sites, and one or more functional or integrated circuit blocks are deposited into the recessed receptor sites, for example, using a Fluidic Self-Assembly (FSA) process. The functional blocks may be deposited by one or more FSA operations, by robotic pick-and-place operations, or by other methods. After a functional block is deposited into the corresponding strap substrate, the strap substrate is then attached to another substrate, which may comprise a set of patterned or printed conductor. The conductor can be an electrical element of a device; for instance, the conductor can be elements or parts of an antenna for an RFID device. More than one functional block may be deposited into a strap substrate depending on application.

[0044] A strap assembly is formed when one or more functional blocks are deposited in the strap substrate and other elements (e.g., dielectric layer and electrical interconnection) formed thereon. The overall manufacturing process of a strap assembly impacts the cost of the final device that incorporates the strap assembly. For example, when a strap assembly is formed using a web process, efficiencies of the block deposition, dielectric film formation, material usage, or electrical interconnection fabrication play important roles in the final device cost and performance.

[0045] FIG. 1 illustrates exemplary embodiments of an object that is functional component block 1. The functional block 1 can have various shapes and sizes. Each functional block 1 has a top surface 2 upon which a circuit element is situated (not shown). The circuit element on the top surface 2 may be an ordinary integrated circuit (IC) for any particular function. For example, the IC may be designed to drive a pixel of a display. The IC may also be designed to receive power from another circuit, such as an antenna, and perform a particular function or functions for the operation of a passive RFID tag. Alternatively, the IC may be designed to receive power from an energy source (e.g. battery) for the operation of an active RFID tag. The functional block 1 also includes a contact pad 3 (one or more contact pads 3) to allow electrical interconnection to the circuit element on the block 1. The functional block 1 can have a trapezoidal, rectangular, square, cylinder, asymmetrical, or asymmetrical shape. The top of the block 1 is often (but need not be) wider than the bottom of the block 1. Each functional block 1 may be created from a host substrate and separated from the host substrate. Methods of making a functional block 1 are known in the art and for instance, can be found U.S. Pat. Nos. 5,783,856; 5,824,186; 5,904,545; 5,545,291; and 6,291,896, which are hereby incorporated by reference in their entireties.

[0046] FIG. 2A illustrates a cross-sectional view of an exemplary embodiment of an electronic assembly (or a strap assembly) 200. The assembly 200 can be part of or made to incorporate into a display device, a RFID tag, a merchandise label (a CD label), a pharmaceutical label or bottle, etc. The assembly 200 can be attached to another substrate (e.g., a device substrate) that may have patterned, printed, or formed thereon a conductor or conductors. A functional block 202 is deposited in recessed region 204 of a substrate 206 to form the assembly 200. The functional block 202 can be the functional block 1 previously discussed. Methods of making a functional block are known in the art. In one embodiment, the functional block 202 is a NanoBlock™ made by Alien Technology. Once deposited, the functional block 202 is recessed below a surface 208 of the substrate 206. In one embodiment,

the functional block **202** is recessed sufficiently below the surface **208** to provide sufficient space for electrical connection to the functional block **202**. In one embodiment, the functional block **202** is deposited into the recessed region **204** using a Fluidic Self-Assembly (FSA) process. The surface **208** of the substrate **206** is the native surface of the substrate **206** before any deposition of any other materials on top of the surface **208**. The substrate **206** may be a flexible substrate made out of plastic, fabric, metal, or some other suitable materials. In one embodiment, the substrate **206** is flexible. In one embodiment, the assembly **200** is flexible.

[0047] Also shown in FIG. 2A, a dielectric layer **210** is formed over the surface **208** and over the functional block **202**. The dielectric layer **210** in many instances, also functions as a planarization layer as well as a layer that traps or keeps the functional block **202** in the recessed region **204**. Vias **212** are also formed into the dielectric layer **210** to expose portions of the functional block **202**. Typically, each of the exposed portions of the functional block **202** comprises a contact pad **216** that enables electrical interconnection to the functional block **202**. In one embodiment, the functional block **202** includes two contact pads **216** placed on opposite sides and/or diagonal to each other. In such embodiments, the dielectric layer **210** has two vias **212**, one for each contact pad **216**. Each via **212** exposes some or all of the top area **216-A** of the corresponding contact pad **216** (FIGS. 2B-2C). In one embodiment, as shown in FIG. 2B each via **212** has a diameter that is smaller than the top area **216-A** of the corresponding contact pad **216**. In some embodiment, the via **212** has a cone-like shape where the via **212** has a top diameter and a bottom diameter. The bottom diameter is smaller than the top diameter. In one embodiment, the bottom diameter is at least 20% smaller than the contact pad **216**. Optimally, the diameter of the via **212** at the bottom should be no more than 80% of the width of the contact pad **216**, which may be defined by the area **216A**. Most optimally, it should be no more than 60% of the width of the contact pad **216**, which may be defined by the area **216A**. In one embodiment, the via **212** has a non-symmetrical cone-like shape in which one side of the via **212** has a flatter or gentler slope than the other side (FIG. 2C). As shown in FIG. 2C, the via **212** has two sides, **212-A** and **212-B**, in which the side **212-B** has a more "gentle" or flatter slope than the side **212-A**. In one embodiment, a small protrusion **212-C** is formed on the side **212-B** of the via **212**. The configuration of the via **212** in accordance to the present embodiment helps the conductive material to more easily fill the via **212**.

[0048] In one embodiment, the dielectric film **210** is deposited using a roll-to-roll process over the substrate **206** that has the functional block **202** deposited therein. The dielectric film **210** may be deposited using methods such as lamination of a polymer film or coating of a liquid layer over the substrate **206** and subsequent curing to form the dielectric film **210**. In one embodiment, the dielectric film **210** is deposited by a wet coating process, such as comma coating, or by a direct writing process, and subsequently dried or cured. The dielectric film **210** may be necessary in embodiments where the assembly **200** is used for devices such as RFID tag since the dielectric film **210** provides good RF performance for the RFID tag. The dielectric film **210** contains at least one opening formed through the dielectric film for the via **212**. Each via **212** enables the conductive interconnect **214** formed on the top of and into the dielectric film **210** to make electrical connection with a contact pad **216** on the functional block **202**.

Each conductive interconnect **214** can be one conductor or two conductors joined together. The conductive interconnect **214** can be formed in a one-step process or a two-step process. When the conductive interconnect **21** is made of two (2) conductors, one conductor is referred to as a "via conductor" (**214-V**) since it fills the via **212**. The other conductor is referred to a "pad conductor" (**214-P**) which sits on a portion of the dielectric layer **210** and connects or joins the via conductor **214-V**.

[0049] Each via **212** in the dielectric film **210** is positioned over a contact pad **216**, such that the via **212** enables interconnection from the contact pad **216** on the functional block **202** to the interconnect **214**. In one embodiment, each via **212** is formed such that no dielectric material is present in the via **212**.

[0050] In many embodiments, there are two (2) (or more) vias **212** created over each functional block **202**. The number of vias **212** can be increased or decreased depending on the product. The number of vias **212** also depends on how many contact pads **216** are present in the functional block **202** or depending on how many electrical connections are needed. For example, many more dielectric vias may be needed for embodiments where the assembly **200** is incorporated into display driver or sensor applications. In one embodiment, there are two contact pads **216** on the functional block **202** and the contact pads are situated diagonally to each other. In such embodiment, the dielectric film **210** has two vias **212** which are also situated diagonally to each other over the corresponding contact pads **216**.

[0051] In one embodiment, the dielectric film **210** has a thickness ranging from about 5 μm to about 60 μm . In another embodiment, the thickness of the dielectric film **210** is approximately 38 μm . The dielectric can be formed either as a wet film that is dried or cured, or as a dry film that is laminated onto the substrate **206**.

[0052] In one embodiment, the dielectric film **210** has an adhesive functionality to the side that is applied to the substrate **206**. The adhesive functionality could be an inherent property of the dielectric material or its application process, or it could be due to an adhesive film that is applied to the side of the dielectric film **210** that comes in contact with the substrate **206**. In embodiments where an adhesive film is used to provide the adhesive to the dielectric film **210**, the adhesive film is non-conductive and can be processed to achieve the desired structure for the via **212**. For example, the adhesive film may be photo imageable or laser drillable to allow the via **212** to be formed. A laser drillable adhesive film could be fabricated by using an adhesive that inherently absorbs UV light, or else by using an adhesive formulation that consists of a UV-absorbing species. A photo-imageable or laser-drillable adhesive might also enable direct electrical contact to the contact pad without an intermediate cleaning or de-scum process. If an adhesive film is used on the dielectric film **210**, all of the dimensions listed for the dielectric film **210**, including film thickness and via diameter, applies to the dielectric and adhesive film combined together.

[0053] In one embodiment, the dielectric film **210** has a coefficient of thermal expansion (CTE) that is closely matched to that of the substrate **206**. Preferably, the CTE is within ± 20 ppm/ $^{\circ}\text{C}$. of the CTE of the base material of the substrate **206**, which is typically 50-70 ppm/C, but can vary depending on the substrate. The proximity of the dielectric film CTE to the substrate film CTE is more important than the absolute value of the substrate film CTE. Suitable dielectric

materials include, but are not limited to, polyimide, polyetherimide, liquid crystal polymer, and polyethylenephthalate.

[0054] In one embodiment, the vias **212** in the dielectric film **210** are formed over corner areas of the functional block **202**. In one embodiment, the vias **212** are only formed over the corners of the functional blocks with the contact pads **216**. Additionally, the dielectric film **210** may also be formed only in discrete or selected positions on or around the functional block **202** and around the area of the substrate **206** that has the functional block **202** deposited therein. When the dielectric film **210** is discretely or selectively formed, the vias **212** may not be necessary since the dielectric material may be selected to not form over the contact pads **216** to leave the contact pads **216** exposed. A method that can be used for selectively or discretely forming the dielectric film **210** includes direct write, such as inkjet, and laser assisted deposition, etc. Such method enables the deposition of the dielectric film **210** anywhere the material is needed. Additionally, such selective deposition of the dielectric film **210** enables customizing deposition of the dielectric film for uses such as bridging or covering the gap from the functional block **202** to the substrate surface **208**, and/or to protect sensitive areas on the functional block **202**. Such selective deposition of the dielectric film **210** minimizes the use of the dielectric material where it is not needed. Other methods that can be used for selectively or discretely form the dielectric film **210** include patterning, etching, and photolithography.

[0055] One advantage of a structure that incorporates a via or vias and a dielectric layer is that the dielectric layer is necessarily disposed between the functional block, which can be an integrated circuit (IC) for a device, and the conductive interconnect or conductive traces, which could be used to connect the functional block to an external electronic element such as an antenna. The via through the dielectric material provides a direct electrical connection to the IC, but there is still a capacitive coupling between other parts of the functional blocks and the external electronic element. It is disadvantageous to have such capacitive coupling between the IC and the conductive traces, and this capacitive coupling is increased due to proximity of the conductive traces to the IC. Placing the dielectric layer between the functional block and the external electronic element provides some vertical distance between them. Minimizing the size of the interconnection pad, and increasing the vertical distance between the traces and IC, minimizes this capacitive coupling. Additionally, the use of low dielectric constant materials as the dielectric layer will also minimize this capacitive coupling. Examples of low-dielectric constant materials include porous materials, fluorinated materials, and silicon-rich materials.

[0056] In one embodiment, each conductive interconnect **214** formed on top of and into (in a via created in the dielectric layer **208**) the dielectric layer **208** fills a particular vias **212** so as to establish electrical interconnection to the functional block **202**. In the present embodiment, each conductive interconnect **214** constitutes both a via conductor **214-V** as well as a pad conductor **214-P**. When each of the conductive interconnects **214** fills via **212**, the conductive material covers all of the exposed area of the contact pad **216** that is exposed by the via **212**. In one embodiment, the conductive interconnect **214** constitutes a conductive trace of an antenna element or acts as an interconnect for an antenna element. The conductive interconnect **214** can also interconnect the functional block **202** to an external electrical element or elements (e.g.,

antennas or electrodes). The conductive interconnect **214** can also be an electrical or conductive lead from the external electrical element.

[0057] In one embodiment, the conductive interconnect **214** is formed using a roll-to-roll process. For example, materials used to form the interconnect **214** is deposited onto and into the dielectric layer **208** as the substrate **208** is processed on a web line. Material used to make the conductive interconnect **214** may be selected such that it can be cured, for example, by heat or by electromagnetic or ultraviolet radiation, and can be used in the roll-to-roll process. For example, the interconnect **214** material is cured as the substrate **206** is processed on a web line. In one embodiment the conductive interconnect **214** is made of a conductive composite of conductive particles in a non-conductive matrix, such as silver ink. In another embodiment, the conductive interconnect **214** is made of metal or metals that are evaporated onto the substrate **206** or onto the dielectric layer **210**, over the corresponding via **212**, and subsequently patterned. The conductive interconnect **214** can also be comprised of an organic conductor, or composites of carbon nanotubes or inorganic nanowires dispersed in a binder. In one embodiment the conductive interconnect **214** is made of a conductive composite, such as silver ink or silver-filled epoxy that completely filled by the corresponding vias **212**. In one embodiment, the conductive interconnect **214** is made of one or more of the following: conductive particles dispersed in a nonconductive or an organometallic matrix (e.g., silver ink), sputtered or evaporated metal, conductive carbon composite, carbon nanotubes, inorganic nanowires dispersed in a nonconductive matrix, and any of these materials combined with metallic nanoparticles. In one embodiment, the conductive interconnect **214** comprises a nonconductive matrix that consists of a thermoplastic polymer, a thermoset polymer, or a B-staged thermoset polymer. In one embodiment, the elastic modulus of a conductive composite that is used to form the conductive interconnect **214** is between 120,000 psi and 60,000 psi. The resistivity of the conductive interconnect **214** is less than 76 m Ω /square/mil, more optimally, less than 60 m Ω /square/mil, even more optimally less than 42 m Ω /square/mil, and most optimally less than 25 m Ω /square/mil. Additionally, the conductive interconnect **214** is made of a material that is able to maintain good electrical contact to the top-most conductive feature or features (e.g., the contact pad **216**) on the functional block **202**, such that the combination of the substrate **206**, the functional block **202**, the dielectric layer **210**, the contact pad **216**, and the conductive interconnect **214** is able to maintain sufficient electrical contact throughout, with less than a 10% variation in total resistance. In one embodiment, the combination of the substrate **206**, the functional block **202**, the dielectric layer **210**, the contact pad **216**, and the conductive interconnect **214** is able to maintain sufficient electrical contact throughout, with less than a 10% variation in total resistance, when the assembly **200** is subjected to thermal cycles for 100 times from -40° C. to 85° C., and bent over a 1-inch-diameter mandrel for 80-100 times. Each conductive interconnect **214** can partially or completely cover the corresponding via **212** for the conductive material in the via **212** to make electrical contact to the functional block **202** or the corresponding contact pad **216** on the functional block **202**. Additionally, the conductive interconnects **214** also have a good adhesion to the dielectric film **210**, such that the interconnects can survive flexing over a 1-inch mandrel as previously mentioned.

[0058] In one embodiment, the conductive interconnect **214** is coupled to another conductive trace (not shown) that may be formed on the substrate **206**. Such conductive trace can be an antenna trace, for example, when the assembly **200** is to be incorporated into an RFID tag. Alternatively, the conductive interconnect **214** also forms the conductive trace for the final device itself. For example, the conductive interconnect **214** can also be part of an antenna element for an RFID tag. The conductive interconnect **214** and the conductive trace could be combined as one material applied in one process, or as two materials applied in two sequential steps.

[0059] In one embodiment, the interconnect **214** constitutes a via conductor **214-V** and a pad conductor **214-P** connecting to a particular contact pad **216**. The via conductor **214-V** contacts the conductive pad **216** on the functional block **202** at the bottom of the via **212**. It is preferable that the via conductor **214-V** covers all of the contact pad **216** that is exposed by the via **212**.

[0060] In one embodiment, the top diameter or the top area of the via conductor **214-V** is larger than the top diameter of the corresponding via **212**. In one embodiment, the top diameter or the top area of the via conductor **214-V** is about 1-3 times larger than the top diameter of the via **212**. In another embodiment, top diameter or the top area of the via conductor **214-V** is 1-2 times larger than the top diameter of the via **212**.

[0061] The pad conductor **214-P**, in one embodiment, provides a large or larger conductive area for fast electrical attachment of the assembly **200** to a conductor on another electrical functional element, such as a RFID antenna, a display driver strip, or a sensor assembly. In one embodiment, the pad conductor **214-P** is at least (1 mm)×(1 mm) large. Since this interconnection area is larger than the connection or contact pad **216** on the functional block **202**, lower-cost, lower-precision equipment can be used to produce electrical contact between the assembly **200** and other functional elements such as antennas. The pad conductor **214-P** may be made of the same material or different material as the via conductor **214-V**.

[0062] The pad conductor **214-P** must make electrical contact with any necessary conductive material in the via **212** (e.g., the via conductor **214-V**) as well as the corresponding contact pad **216** that may be provided on the functional block **202**. The conductive interconnect **214** may have several layouts. Exemplary layouts are shown in FIGS. 2D-2F, below. The layouts in FIGS. 2D-2F illustrate exemplary configurations for the pad conductor **214-P** of the conductive interconnects **214**. It is to be noted that other configurations are also feasible.

[0063] Typically, the assembly **200** includes more than one interconnections **214** and more than one pad conductor **214-P**. For instance, the functional block **202** has two contact pads **216** so that multiple connections are needed. In FIG. 2D, a “bow-tie” configuration **214-A** is provided. In this configuration, two pad conductors **214-P** form a bow tie-like configuration. The configuration **214-A** includes two pad conductors **214-P**, each of which having two fingers **244** coming out of each pad conductor. The fingers **244** are able to make contact with each of the contact pad **216** at any of the 4 corners of the functional block **202**. Each finger **244** would make contact to a contact pad **216** that is closest to the corresponding finger **244**. It is preferred to have a limited amount of conductive interconnect **214** over the functional block **202** such that the amount of stray capacitance is limited. Thus, only a small section of each finger **244** overlaps the functional

block **202** or a contact pad **216** provided on the block **202**. In one embodiment, the finger **244** is less than or equal to the top diameter of the corresponding contact pad **216** that the finger **244** connects to. In one embodiment, the finger **244** covers a portion of the via conductor that connects to the contact pad **216**. In one embodiment, the finger **244** covers all of the via conductor that connects to the contact pad **216**. The bow-tie configuration **214-A** enables the conductive interconnect **214** to make contact to the functional block **202** where the contact pads **216** is placed on any of the four corners of the functional block **202**. It may be that the functional block **202** has one contact pad **216**. Thus, not all of the fingers **244** would contact a contact pad **216**. The functional block **202** thus can also be deposited into a receptor **204** in a manner where the contact pads **216** can be oriented at any corner and still able to allow contact from the fingers **244** to the contacts pads **216**.

[0064] In FIG. 2E (a)-FIG. 2E (b), another “bow-tie” configuration **214-B**, which does not have the fingers **244** shown in the bow-tie configuration **214-A** is provided. Instead, in the bow-tie configuration **214-B**, sides **246** are provided on the pad conductors **214-P** where each of the sides **246** runs across almost the length of each side of the functional block **202**. In this configuration, two pad conductors **214-P** also form a bow tie-like configuration over parts of the functional block **202**. In the present embodiment, each of the sides **246** is placed in contact with a contact pad **216** on the functional block **202**. The contact pad **216** can be a corner location as shown in FIG. 2E(a) or at a center location as shown in FIG. 2E(b).

[0065] FIG. 2F illustrates an exemplary embodiment of a configuration of the conductive interconnect **214** or the pad conductor **214-P** with a non-bow-tie configuration **214-C**. In the present embodiment, the functional block **202** may have contact pads **216** placed diagonally to each other. The configuration **214-C** is similar to the configurations **214-A** and **214-B** above except that only one arm is necessary on each pad. The configuration **214-C** is configured with two pad conductors **214-P** each having an arm or extension **248** to make connection to one of the contact pads **216**. The arm **238** allows the conductive interconnect **214** to contact the functional block **202** with minimal conductive material over the functional block **202**. Other configurations or shape for the extension **248** are possible. The configuration **214-C** is especially useful when the functional block does not have rotational symmetry that is greater than 2-fold.

[0066] In FIGS. 2D-2F, the contact pads **216** are shown to contact the fingers **244** or the sides **246** of the pad conductor. As previously mentioned, the dielectric layer **210** may be formed over the block **202** and the vias **212** are created in the dielectric layer **210** so that the contact pads **216** are exposed. The vias are filled with conductive interconnects **214** or via conductors **214-V** as previously mentioned. As previously mentioned, the vias could also be filled by the same material and at the same time as the sides **246** are formed. The fingers or sides from the pad conductors **214-P** cover at least a portion of the corresponding via conductors **214-V** to establish interconnection to the contact pads **216**. For the sake of illustrating the pad conductor layouts, the vias **212** and the via conductors **214-V** are not shown in FIGS. 2D-2F.

[0067] In one embodiment, each pad conductor **214-P** has a resistivity that is less than 25 mΩ/square/mil, optimally less than 18 mΩ/square/mil, and most optimally less than 12 mΩ/square/mil.

[0068] In one embodiment, each part of the pad conductor part **214-P** that is over the via conductor should be no wider

than 2 times the smallest diameter of the corresponding via conductor **214-V**, optimally no wider than 1.5 times the diameter of the via conductor **214-V**, and more optimally, the same width as the widest diameter of the via conductor **214-V**. The assembly **200** shown in FIG. 2A can be referred to as a strap assembly.

[0069] In one embodiment, the strap assembly **200** is further coupled or attached to another device for form a final device (for example, to form an RFID tag). FIG. 2G illustrates a cross-sectional view of the strap assembly **200** being attached to a second substrate or a device substrate **201**. The substrate **201** may include other active elements and/or electrical components and in one embodiment, includes a conductor pattern **203** formed thereon. In one embodiment, the conductor pattern **203** is part of an antenna element that can be used for an RFID device. In one embodiment, the substrate **206** is “flipped” over such that the surface **208** is facing the second substrate **201** and the conductor pattern **203**. The substrate **206** is attached to the second substrate **201** in a way that the conductor pattern **203** is coupled to the interconnects **214**. Conductive adhesives may be used to facilitate the attachment of the strap assembly **200** to the substrate **206**. Other sealing materials can also be added.

[0070] In one embodiment, the substrate **206** is a monolayer plastic film such as the substrate **206** shown in FIG. 2A. A plastic monolayer base film can be a thermoset or an amorphous or semicrystalline thermoplastic plastic film. In one embodiment, the substrate **206** is a thermoplastic base film and has a glass transition temperature (T_g) of at least about 100°C ., more optimally at least about 125°C ., and even more optimally at least about 145°C .- 150°C . The thermoset plastic film can be selected from UV-curable, moisture-curable, and heat-curable thermoset plastic films. Example of suitable materials that can be used for the substrate **206** include, but are not limited to, polyethylene, polystyrene, polypropylene, polynorbornene, polycarbonate, liquid crystal polymer, polysulfone, polyetherimide, polyamide, polyethylene terephthalate, and polyethylene naphthalate, and derivatives thereof.

[0071] In alternative embodiments, the substrate **206** comprises multiple layers for example, layers **206A-206D**, with the recessed regions **204** formed in one of the layers, e.g., the top layer **206A** and with the additional layers used to provide one or more of dimensional stability, mechanical strength, dielectric properties, desired thickness, functionalities, etc (FIG. 3).

[0072] The substrate **206** is made of a material that minimizes positional distortion of the recessed region **204** after the substrate **206** is subjected to a first thermal excursion for about 30 minutes at about 125°C . Prior to assembling the functional block **202** into the recessed region **204**, the substrate **206** is subjected to at least one thermal excursion cycle for about 30 minutes at about 125°C . During this thermal excursion cycle, the recessed region **204** that is formed into the substrate **206** may be distorted positionally. The position of the recessed region **204** on the substrate **206** may move or be distorted slightly due to the heat or change of material characterization due to heat. In one embodiment, the substrate **206** must be made of a material that will cause only about $30\text{-}500\text{ }\mu\text{m}$, more optimally, $30\text{-}300\text{ }\mu\text{m}$, positional distortion to the location of the recessed region **204** that is formed on the substrate **206**. Positional distortion refers to the location of the recessed region **204** being moved positionally from the originally created position on the substrate **206**. In

one embodiment, the substrate has a length of about 200 mm , along which the distortion is measured. Thus, the substrate **206** is made of a material that when subjected to a first thermal excursion causes the recessed region to be move by only about $30\text{-}500\text{ }\mu\text{m}$, or $30\text{-}300\text{ }\mu\text{m}$. In another embodiment, the substrate could have a length that is 300 mm or 500 mm long, and the allowable distortion along such a length would scale linearly with the distortion allowed along a shorter length.

[0073] In one embodiment, when the substrate **206** is subjected to a process that forms the recessed region **204**, areas around the area where the recessed region **204** is to be formed is maintained at a temperature between about 50°C . and the glass transition temperature of the substrate material. Such temperature control minimizes distortion to the substrate **206** as the recessed region **204** is being formed.

[0074] The recessed region **204** is at least as large as the functional block **202** that fills the recessed region **204**. More optimally, the recessed region **204** is slightly larger (e.g., $0\text{-}10\text{ }\mu\text{m}$ or $1\text{-}10\text{ }\mu\text{m}$) than the functional block **202** in width, depth, and length, and has a sloping sidewall similar to that of the shaped functional block **202**. In general, the recessed region matches the shape of the functional block; if the functional block **202** is square, the recessed region **204** is also square, and if the functional block **202** is rectangular, the recessed region **204** is also rectangular.

[0075] In one embodiment, the substrate **206** is substantially flat, especially in or near the recessed region **204**. Substantially flat is characterized by surfaces of the substrate having no protrusion or no protrusion greater than $5\text{ }\mu\text{m}$. In other words, if there are any protrusions at all, the protrusion is not greater than $5\text{ }\mu\text{m}$, thus giving the substrate **206** a substantially flat characteristic. FIG. 4 illustrates an exemplary embodiment of the substrate **206** with a top surface **208** that is substantially flat. The substrate **206** only needs to have its top surface **208** (or alternatively, the top surface of the top layer of the substrate **206** when the substrate includes multiple layers) being substantially flat. As shown in FIG. 4, the sides of the recessed region **204** are substantially flat, as well. Thus, top sides **204-T**, bottom side **204-B**, and sidewalls **204-W** of the recessed region **204** are substantially flat with no protrusion. FIG. 5 illustrates an exemplary embodiment of the substrate **206** with some minor protrusions **220** along a surface of the substrate **206**. Nevertheless, the protrusions **220** are so minor that the substrate **206** still has the substantially flat characteristic and that the recessed region **204** has sides that are substantially flat.

[0076] The recessed region **204** has a width-depth aspect ratio that is configured to substantially match a width-depth aspect ratio of the functional block **202**. In one embodiment, the recessed region **204** has a width-depth aspect ratio that is less than $14:1$, optimally, less than $10.5:1$, and even more optimally, less than $7.5:1$. The functional block **202** thus has a similar width-depth aspect ratio.

[0077] The substrate **206** is also selected so that the substrate has a good thermal stability to withstand standard processing. The material of the substrate **206** is such that the substrate **206** allows the recessed region **204** to maintain the same positional accuracy requirements previously mentioned. The substrate **206** is made of a material that is able to allow the recessed region **204** to maintain its positional accuracy after going through a 125°C .- 150°C . thermal excursion.

[0078] In many embodiments, the assembly **200** is cut, sliced, separated, or singulated from a plurality of web-assembled assemblies as will be described below. Thus, a plu-

rality of assemblies **200** can be formed in one short time frame. A roll-to-roll process can be used. A web substrate is provided. The web substrate may be a continuous sheet of web material which when coiled, is a roll form. A plurality of recessed regions **204** is formed into the web material to form the web substrate. A plurality of functional blocks **202** are deposited into the recessed regions **204** on the web substrate (e.g., using an FSA process) to form a plurality of the assemblies **200** shown in FIG. 2A. Areas or strips of the web substrate can later be sliced, singulated, cut, or otherwise separated to produce individual assemblies **200**. In one embodiment, a web sheet having a plurality of assemblies **200** is attached to another web substrate similarly to previously described in FIG. 2G. Individual devices can then be formed by slicing or singulating after the substrates are adhered to one another as illustrated in FIG. 2G.

[0079] FIGS. 6A-6B illustrate an assembly **400** that includes several assemblies formed similarly to the assembly **200**. The assembly **400** is similar to the assembly **200** above except when multiple assemblies are formed on one piece of substrate material. In FIGS. 6A-6B, a substrate **406** includes a plurality or a population of recessed regions **404** formed therein. Each recessed region **404** includes a functional block **402** deposited therein. The assembly **400** is also similar to the assembly **200** shown above except that there are more of the functional blocks deposited in the substrate. Singulating areas of the substrate **406** after the functional blocks **402** have been deposited and other elements formed thereon can produce a plurality of assemblies **200** shown above. The substrate **406** can be a web substrate, a frame of a web substrate, a section of a web substrate, or a sheet substrate. In some embodiments, all of the available recessed regions **404** in the substrate **406** are filled with functional blocks **402**. In some embodiments, 90-100% of the available recessed regions **404** in the substrate **406** are filled with functional blocks **402**. In yet other embodiments, 50-100% of the available recessed regions **404** are filled.

[0080] The recessed region **404** has a width-depth aspect ratio that is configured to substantially match a width-depth aspect ratio of the functional block **402**. In one embodiment, the population of the recessed regions **404** has an average width-depth aspect ratio that substantially matches the average width-depth aspect ratio of the functional blocks **402** or in some case, the width-depth aspect ratio of each of the functional blocks **402**. The average width-depth aspect ratio of the population of the recessed region is less than 14:1, optimally, less than 10.5:1, and even more optimally, less than 7.5:1. The functional blocks **402** thus have a similar width-depth aspect ratio to the recessed regions' width-depth aspect ratio.

[0081] In terms of recessed regions' depth, it is important to take into account the entire population of the depths **404-R** of the recessed regions **404** and the thicknesses **402-D** of the functional blocks **402**. The thickness **402-D** of each of the functional blocks **402** should account for any contact pads on top of the functional block **402**. In one embodiment, after all the functional blocks **402** are deposited into their corresponding recessed regions **402**, a substantial amount of the plurality of functional blocks **402** are recessed below a top surface **406-T** of the substrate **406**. In one embodiment, there is a gap **408** between the top surface **402-T** of the functional block **402** and the top surface **406-T** of the substrate **406**. In one embodiment, the gap **408** is between about 0-10 μm . In one embodiment, the substantial amount of the functional blocks **402** being recessed below the surface of the substrate **406** is

defined by (1) less than 10% of the population of the functional blocks protrude above the top surface **406-T** of the substrate **406**; (2) less than 1% of the population of the functional blocks **402** protrude above the top surface **406-T** of the substrate **406**; (3) more than 90% of the functional blocks **402** are recessed below the top surface **406-T** of the substrate **406**; or (4) more than 99% of the population of the functional blocks **402** are recessed below the top surface **406-T** of the substrate **406**.

[0082] The populations of the depths **404-R** of the recessed regions **404** and the thicknesses **402-D** of the functional block thickness can be represented by distribution with an average depth or thickness (μ_r or μ_N , respectively) and a standard deviation (σ_r or σ_N , respectively). The probability that a functional block **402** protrudes up from a recessed region **404** can be determined by comparing the difference (Δ) in averages to the combined standard deviation, σ_c , where

$$\Delta = \mu_r - \mu_N$$

and

$$\sigma_c = \sqrt{\sigma_r^2 + \sigma_N^2}$$

[0083] It is desirable to have $\sigma_c < \Delta$. More preferably, using the equations above and applying Normal statistics, it is preferable to have σ_c and Δ such that less than 10%, or more preferably less than 1%, of the population of the functional blocks **402** protrude above the top surface **406-T** of the recessed regions **404**.

[0084] In one embodiment, the assembly **400** is characterized in that the locations of the recessed regions **405** on the substrate **406** have a good positional accuracy. In one embodiment, across a 158 mm-wide area of the substrate **406**, the positional accuracy of each recessed region **404** is within 100 μm at 3σ , in another embodiment, within 50 μm at 3σ , and in another embodiment, within 30 μm at 3σ . These positional accuracy numbers also scale linearly with the width of the substrate **406**. For example, when the substrate **406** has a width of about 316 mm the positional accuracy of the recessed regions **404** is within 200 μm at 3σ . Similar to the assembly **200**, the assembly **400** includes a dielectric film formed over the functional blocks **402**, vias formed in the dielectric film to expose contact pads on the functional blocks **402**, and conductive interconnections to establish electrical connections to the functional blocks **402**.

[0085] The substrate **206** or **406** with recessed regions previously described can be processed using various exemplary methods and apparatuses of the present invention to form the recessed regions.

[0086] One embodiment in accordance with the invention includes a substrate in which a roller having protruding features is moved across the substrate and/or pressed down on the substrate. The roller creates holes or recessed regions in the substrate. Another embodiment includes or a substrate that passes under a roller having protruding features and the substrate contacts the protruding structures from the roller. In one embodiment, a template in which structures protrude from the template is used to create recessed regions in a substrate. The template is pressed against the substrate to create recessed regions or holes in the substrate. Another embodiment of the invention relates to creating recessed regions or holes in a web material using either a roller or a template. Another embodiment of the invention relates to creating recessed regions or holes in a web material using either a roller or a template in which heat is also applied to the

polymer film to enable the recessed region formation process. In one embodiment, a device with features such as embossing features configured to create recessed regions is used. FIG. 7A shows a template **51** with protruding structures **52**. The protruding structures **52** may vary in shapes and sizes depending upon the object that is to be placed into a substrate or web material that is used to create the substrate **406** or **206** previously described. The length of the protruding structure **52** may range from 500 angstroms to 85 microns or larger in some cases. Similarly, the diameter or other dimension (e.g., width) of a protruding structures **52** may range from 100 angstroms to 70 microns to 900 microns or larger in some cases.

[0087] In the embodiment where the template **51** is an embossing mold, the protruding structures **52** have feature dimensions and/or pitch that are 0.5-1% larger than the desired dimensions of the corresponding recessed regions to be formed on the substrate. In the present embodiment, the substrate will have the recessed regions formed with a pitch that has substantially similar pitch to the pitch of the recessed regions. The precise dimensions of the final product can thus be controlled. This is necessary so that sufficient alignment occurs through the assembling or fabrication process of the particular apparatus.

[0088] In one embodiment, the protruding structure **52** has a width-depth aspect ratio that is less than 10.5:1 or more optimally, less than 7.5:1. Additionally, the protruding structures **52** also have the shape that is the shape of the corresponding functional blocks to be deposited in the recessed regions.

[0089] The template **51** is comprised of sturdy materials (e.g., steel, polymers, etc.). In one embodiment, the template is an electroform stamper copy made from an electroform mother copy, which is made from a master mold that is made by either etching a silicon wafer or diamond turning machining a metal plate or roller. In another embodiment, the template is an electroform stamper copy made from a master mold negative that is made by etching a silicon wafer. In another embodiment, the template is an electroform stamper copy made by coupling (e.g., welding or attaching) together smaller electroform stamper copies to make a linear array (for example, x by 1) of stampers, where $x > 1$. In another embodiment, the template is an electroform stamper copy made by welding together smaller electroform stamper copies to make an array (for example, x by y) of stampers, where both x and y are greater than 1.

[0090] FIG. 7B shows the template **51** with the protruding structures **52** facing one side of a substrate **50**. The substrate **50** can be the substrate **406** or **206** previously mentioned. FIG. 7C shows the template **51** contacting the substrate **50** and the protruding structures **52** from the template **51** pierce or press into the substrate **50**. These protruding structures **52** may be a variety of shapes depending on the shapes of objects to be deposited onto the substrate **50**. Heat, electromagnetic radiation, or UV light may be applied at any point in this process to assist in the pattern transfer. FIG. 7D shows that when the template **51** is separated from the substrate **50**, recessed regions or holes **53** are created in the substrate **50**. The recessed regions **53** can be the recessed regions **404** or **204** previously mentioned.

[0091] The template **51** can be coupled to a vertical hot press and used to create the recessed regions on the substrate **50**. The vertical hot press can be configured to move up or down to cause the template **51** to contact the substrate **50** in

the manner described above so that the protruding structures **52** can create the recessed regions **53** into the substrate **50**. The template **51** can also be configured to be used in a step-and-repeat process to make the substrate **50**.

[0092] In one embodiment, the substrate **50** is a web substrate that once coiled, has a roll form. When formed from a step-and-repeat process, one area of the substrate **50** is formed at a time by the template **51**. Each individual area of the substrate is referred to as a frame. For optimal process conditions, it is important that the web substrate not have unpredictable or uncontrolled ridges, channels, indentations, or step-changes between individual frames of the web substrate. The ridges, channels, indentations, or step-changes between individual frames of the web substrate may cause interruption, disruption, or unpredictable changes in the movement in the flow of the slurry that carries the functional blocks to be deposited into the recessed regions **53** as is used in an FSA process. In one embodiment, a "frame" is approximately 6-inches-long in the material direction of the web substrate, and in other embodiments, a frame can be of any length, ranging from as small as one inch to arbitrarily long, such as 4-feet-long or 8-feet-long or longer.

[0093] Various embossing techniques use a repeating process in which an embossing tool provided with a template such as the template **51** is pressed against the web substrate at elevated temperature to emboss the recessed regions into the web substrate. Next, the embossing tool is separated from the web substrate and the web substrate is indexed forward one frame-length for the next frame/area. This entire process is repeated for as many frames as necessary to complete the web substrate of a particular length. Such process, and other embossing processes, can leave an uncontrolled step-change between the frames of the web substrate. This step-change can typically be about 10-50 μm tall or taller, 0.5-2 mm wide, and may not be continuous in the cross-direction of the web. FIG. 7E illustrates a cross-sectional view of an example of step-changes created between frames of a web substrate **70**. In this figure, the web substrate **70** is processed using a step-and-repeat process in which step-changes **72** are formed between each two frames **74**. In many instances, the step-changes **72** are not uniform or continuous in the same direction from frame to frame as shown in FIG. 7E. Similarly, as shown in FIG. 7F, step-changes can include channels or indentations **76** that are formed between frames **74**. These types of step-changes should be avoided in the web substrate. These step-changes **72** or **76** unpredictably or uncontrollably interrupt the flow of the functional blocks during the FSA process, and therefore are detrimental to the process.

[0094] Many techniques used to form the recessed region in the web substrate can cause similar step-changes. Thus, the types of step-changes mentioned above can be formed in substrates that are processed otherwise and not necessarily results of step-and-repeat processes. For instance, the step-changes may be caused by a continuous belt that may be present in some processing. A roller used to form the recessed regions in the web substrate could have features that may cause similar step-changes in the web substrate. Uncontrolled step-changes are thus not desired for a web substrate whether the substrate is processed by a step-and-repeat process or by a continuous process.

[0095] A step-change between frames, however, may be acceptable in the web substrate if the step change is always in the same direction or in a controlled direction. That way, the FSA process can be controlled or monitored accordingly to a

predictable presence of a step-change that is always in the same direction. In one embodiment, a step-change is created into the web substrate such that when examining the space between two frames on the web substrate, there is a step going from one frame to the next, and that the step is always higher on the left side, or is always higher on the right side, or always in the same direction. For instance, as illustrated in FIG. 7G, a web substrate 76 is formed such that there are a plurality of frames 74. Each frame 74 is separated from another frame by a step-change 78. The step-change 78 is consistently in the same direction from one frame 74 to the next frame 74. As can be seen, the step-change 78 is always higher on the left side than the right side of the step-change 78. FIG. 7H illustrates another example of a consistent or uniform step-change between two frames of the web substrate 76. One advantage of the consistent step-change is that the flow of FSA slurry is not disrupted by the step-changes 78 unexpectedly and thus, the FSA process can be more controlled. A template used to create the recessed regions may incorporate a feature that can create such a step-change in the substrate.

[0096] In some embodiments, instead of using a template and a step-and-repeat process to create recessed regions or holes, a roller or a drum 54 with protruding structures 55 is used on a substrate 50 (FIGS. 7I-7M). The substrate 50 can be processed to form recessed regions thereon in a continuous process in which a roller passes across the substrate to form the recessed regions. A similar template to the template 51 can be created and coupled to a roller that can be used to form the recessed regions. A roller 54 may be comprised of sturdy materials (e.g., steel, polymers, aluminum, electroformed nickel, machined copper, rubber, etc.). FIG. 7I shows a roller 54 with the protruding structures 55. FIG. 7J shows a substrate 50 without recessed regions or holes. FIG. 7K shows the roller 54 contacting the substrate 50 in a manner that the protruding structures 55 pressing into the substrate 50. FIGS. 7L-7M show the roller 54 moving across the substrate 50. Recessed regions or holes 53 are created in the substrate 50 after the protruding structures 55 on the roller 54 pierce the substrate 50 and then are removed from the substrate 50 as the roller 54 moves across the substrate 50. It should be noted that a roller includes a web wheel, a drum, or a supported belt.

[0097] The substrate 50 can be a sheet substrate or a web substrate as previously mentioned. The roller 54 may be placed so that the roller 54 rolls or moves across and on top of the substrate 50. Alternatively, the roller 54 may be placed so that the roller 54 rolls or moves across and on the bottom of the substrate 50. The substrate 50 may be comprised of polyether sulfone (PES), polysulfone, polyether imide, polyethylene terephthalate, polycarbonate, polybutylene terephthalate, polyphenylene sulfide (PPS), polypropylene, polyester, aramid, polyamide-imide (PAI), polyimide, nylon material (e.g. polyamide), aromatic polyimides, polyetherimide, polyvinyl chloride, acrylonitrile butadiene styrene (ABS), or metallic materials. Additionally, the substrate 50 when in a web process can be a flexible sheet with very high aspect ratios such as 25:1 or more (length:width). As is known, a web material involves a roll process. For example, a roll of paper towels when unrolled is said to be in web form and it is fabricated in a process referred to as a web process. When a web is coiled, it is in roll form.

[0098] FIG. 8 shows an overall process of fabricating an electronic assembly in according to embodiments of the present invention. Although the discussion below illustrates processes that may be continuous, other separate or sub-

processes can also be used. For instance, a process that is continuous as shown in FIG. 8 can be separated into separate or sub-processes. The process in FIG. 8 can take place on one machine or on several machines.

[0099] FIG. 8 illustrates a web process where a web substrate is used for forming a plurality of electronic assemblies such as the assembly 200 or 400 previously described. A roll of substrate 120 is provided. The substrate 120 is flexible. The substrate 120 may be sprocket-hole-punched to assist in web handling. The substrate 120 is advanced from a station 117 or a roller 117 to a station 119 that forms a plurality of recessed regions as previously described. The recessed regions can be formed by machining, etching, casting, embossing, extruding, stamping, or molding. In one embodiment, a roller such as the roller 54 as previously described with protruding structures is provided for the formation of the recessed regions. The substrate 120 is advanced through a set of support members 122 as the recessed regions are created into the substrate 120. A fluid self-assembly process can be used to deposit a plurality of functional blocks into the recessed regions formed in the substrate. In one embodiment, a first slurry 124 containing a plurality of functional blocks is dispensed onto the substrate 120. A second slurry 126 containing a plurality of functional blocks may also be used to dispense onto the substrate 120. Excess slurry is collected in container 128 and is recycled. The functional blocks fall into the recessed regions in the substrate. The substrate 120 is then advanced to another set of support members 130. An inspection station (not shown) may be provided to check for empty recessed regions or for improperly filled recessed regions. There may also be a clearing device (not shown) to remove excess functional blocks or blocks not completely seated or deposited into the recessed regions of the substrate 120. A vibration device (not shown) may be coupled to the substrate 120 and/or to the slurry dispensing device to facilitate the distribution and/or of the functional blocks. An example of a dispensing device that can work with vibrational assistance to dispense the functional blocks is described in U.S. patent application Ser. No. 10/086,491, entitled "Method and Apparatus For Moving Blocks" filed on Feb. 28, 2002, which is hereby incorporated by reference in its entirety. In one embodiment, the functional blocks are deposited onto the substrate material using methods described in U.S. patent application Ser. No. 10/086,491. In one embodiment, the functional blocks are deposited onto the substrate using fluidic self-assembly process on a continuously moving web (the substrate 120).

[0100] The functional blocks can have shapes such as square, rectangular, trapezoid, cylinder, asymmetric block, asymmetric rectangular, and asymmetric trapezoid. The recessed regions have similar shapes as the functional blocks.

[0101] Continuing with FIG. 8, and generally shown at 132, a planarization (or dielectric) layer is then deposited or laminated or otherwise formed onto the substrate material. Vias are formed in the dielectric film. The dielectric layer can be applied using a variety of methods. Most commonly, a solid dielectric film is used, which can be applied with a hot roll laminator. Alternatively, a liquid dielectric could be applied by spin coating in sheet form using any variety of a printing methods, such as direct writing, laser-assisted deposition, screen printing, or wet coating (e.g., by comma coating or other types of roll-to-roll liquid coaters). A liquid dielectric could either be dried or cured to form a solid dielectric layer. Curing could be thermally-activated, moisture-activated,

microwave-activated, or UV light-activated. The dielectric layer can be cured or dried in-line as the layer is being formed. In one embodiment, the dielectric film is formed by direct write techniques (e.g., inkjet printing, digital printing, pen/stylus based deposition, optical or laser assisted deposition, syringe dispense, Xerographic printing, and the like). A direct write device (e.g., an ink-jetting machine) may be provided and controlled by a computer program or machine that can control the selective deposition of the dielectric material. In one embodiment, the deposition of the functional blocks by FSA and the formation of the dielectric film are done on the same machine. In one embodiment, the dielectric film is formed over the functional blocks using the continuously moving web (the substrate **120**). In one embodiment, the dielectric layer is selectively applied in only specific locations, e.g., on the substrate areas with the functional blocks and/or over certain area of the functional blocks. In the embodiment where the dielectric layer is selectively deposited, it may assist in adhering the functional blocks in the recesses, and it may not be necessary to form vias.

[0102] In one embodiment, to form the vias that can expose the contact pads on the functional blocks, the substrate with the functional blocks deposited therein is inspected by an optical scanner (not shown) prior to via formation to determine the location of the contact pads on the functional blocks that need vias over them. Preferably, this inspection is done in-line with the via formation process, and the image analysis is done automatically by a computerized vision system (not shown), and the results are sent directly to the via formation apparatus to select which vias to form. As a result, vias are only formed in the dielectric above the contact pads of the functional blocks.

[0103] The via opening(s) in the dielectric layer can be opened either before or after the dielectric film is placed on the functional blocks-filled substrate. The openings could be punched prior to dielectric layer application to the filled substrate web, or could be created by etching, photolithography, or by laser via drilling after the dielectric film is deposited over the substrate. Laser drilling can be used to form the vias, which could be accomplished with either a UV, visible, or IR laser. In one embodiment, a UV-laser is used to form the via openings in the dielectric layer. Laser via drilling can be accomplished with either a long pulse of energy, or a series of short pulses. In the case of a series of short pulses, the position of the laser can be adjusted so that one or more pulses occur in different positions within each via. A via with a wider, non-circular opening can be created by laser drilling partially through the dielectric film. The vias could also be self-forming in liquid systems that, after application to the functional block-filled substrate web, selectively de-wet off of the contact pads on the functional blocks.

[0104] In one embodiment, the substrate **120** is held flat on a chuck, scanned, and then drilled to form a group of vias prior to indexing forward so that another section of the substrate **120** can be treated. The scanning (e.g., optical scanning) and the via drilling may also occur on a moving web when the substrate **120** is moving or moving continuously.

[0105] Conductive interconnects are then formed into and on the dielectric film. In one embodiment, the conductive interconnects are formed in a continuously moving web. The conductive interconnects also fill the vias to allow electrical interconnection to the functional blocks. In one embodiment, the vias are filled with a conductive material to form via conductors. A pad conductor is then formed on the dielectric

film to interconnect to each via conductor. Each pad conductor and via conductor can form a conductive interconnect and/or be made of the same materials and in one process in many embodiments. The via conductors and the pad conductors can be formed on a continuously moving web of the substrate roll **120**. The planarization and the conductive interconnect formation are generally shown at **132** in FIG. 8.

[0106] In one embodiment, residues in the vias are removed prior to filling the vias. The cleaning step can be accomplished by treatment with a detergent cleaning system, a water rinse system, an oxygen plasma system, a vacuum plasma system, an atmospheric plasma system, a brush scrubbing system, or a sand or solid carbon dioxide blasting system. The via can be filled with the conductive material using sputtering or evaporation across the entire substrate, followed by lithographic patterning of a mask and subsequent etching, to leave metal only around and in the via. The conductive material in the vias can be formed by any of a variety of conductive composite printing methods, including screen printing or gravure printing. In some embodiments, the conductive material in the vias is formed by a local printing method such as direct write deposition. The conductive material is typically thermally-cured or UV-cured, or cured by air-drying. In other embodiments, the conductive materials in the vias are formed by a direct-write or an adaptive-wiring process (e.g. ink-jet printing, digital printing, pen/stylus based deposition, optical or laser assisted deposition, syringe dispense, Xerographic printing, and the like). In the case of direct-write or adaptive wiring, the positioning of each individual conductive material in each via can be controlled by a machine vision system analogous to the system that is used to locate the position on the dielectric layer to form the vias openings.

[0107] Similar methods for forming the conductive material in the vias can be used to form the conductive interconnects on the dielectric film (also referred to as pad conductors) that couple to the via conductors. In some embodiments, the same conductive material is used to fill the via as well as forming the interconnects on the dielectric layer as previously described. In one embodiment, the interconnects are formed by metal sputtering or evaporation across the entire substrate **120**, followed by lithographic patterning of a mask and subsequent etching, to leave metal only in the preferred pad conductor shape and in contact with the conductor in the vias. The via conductors and the pad conductors can be formed in one step as forming one continuous conductor.

[0108] The via conductors and the pad conductors can be made of one or more of the following: conductive particles dispersed in a nonconductive matrix (e.g., silver ink, sputtered/evaporated metal, conductive carbon composites, carbon nanotubes) or inorganic nanowires dispersed in a nonconductive matrix (e.g., a thermoplastic polymer, a thermoset polymer, or a B-staged thermoset polymer), or any of these materials combined with metallic nanoparticles. The via conductors and the pad conductors' materials are prepared so that they can be deposited on a continuously moving web.

[0109] A station **138** may be provided to inspect and/or test the functionality of the assemblies. The assemblies are tested for functionality such that known-bad assemblies can be marked, so that they can be actively avoided in future process steps. Known-good assemblies can be marked, so that they can be actively selected in future process steps. The mark can be an ink mark, ink jet marking, stamping, or a laser burn mark, or any other mark that is detectable by either a human

eye, a sensor, or both. In one embodiment, the marking is a laser marking and is applied to the particular pad conductors so as to leave a black mark on the pad conductors. In one embodiment, the tests are done by coupling the electromagnetic energy from the tester to the assemblies. The coupling can be resistive, inductive, or capacitive, or a combination thereof, using contact methods (e.g., direct electrical contact), non-contact methods, or a combination thereof. Even in a densely-packed set of straps, individual assemblies can be tested without undue interference from neighboring devices. In one embodiment, individual assemblies are tested based on a predefined set of criteria or parameters, for instance, one assembly out of every 10 assemblies formed on a web is tested. Other criteria or parameters are of course possible. After the testing, the substrate **120** is further advanced to another set of support members **134** for subsequent processing or lamination processes. In one embodiment, an additional conductive trace is formed on the substrate **120** to interconnect to the conductive interconnect. The conductive trace may be an antenna trace or other conductive element for an external electrical element. The conductive trace may be formed by a convenient method such as printing, laminating, deposition, etc. A roll of material **136** is shown to laminate to the substrate **120**. The material from the roll **136** can be a cover a jacket or other suitable material for subsequent processing or for completing the assemblies. In one embodiment, the roll **136** is a device substrate having formed thereon a conductor pattern. The substrate **120** having the functional blocks deposited therein and other elements formed therein/thereon is attached to the substrate from the roll **136** such that the conductive interconnects are coupled to the conductor pattern. In one embodiment, the substrate assemblies after processed as shown in FIG. **8** are singulated or cut to form individual assemblies such as assemblies **200** or **400**.

[0110] FIG. **9** illustrates another overall process of fabricating an electronic assembly in according to embodiments of the present invention. This process is similar to the one described in FIG. **8** except that the recessed regions on the substrate **120** are formed using a step-and-repeat process. The process in FIG. **9** can be a continuous process as illustrated or can be separated into one or more separate or sub-processes. The process in FIG. **9** can take place on one machine or on several machines.

[0111] Similar to FIG. **8**, in FIG. **9**, a roll of substrate **120** is provided. The substrate **120** material is flexible. The substrate **120** may be sprocket-hole-punched to assist in web handling. The substrate **120** is advanced from the roll **117** to a station **119** that forms a plurality of recessed regions as previously described. In one embodiment, a vertical hot press **121** is provided with a template such as the template **51** previously described for the formation of the recessed regions. The substrate **120** is advanced through a set of support members **122** as the recessed regions are created into the substrate **120**. A first slurry **124** containing a plurality of functional blocks is dispensed onto the substrate **120**. A second slurry **126** containing a plurality of functional blocks may also be used to dispense onto the substrate **120**. Excess slurry is collected in a container **128** and is recycled. The functional blocks fall into the recessed regions in the substrate **120**. The substrate **120** is advanced to another set of support members **130**. An inspection station (not shown) may be provided to check for empty recessed regions or for improperly filled recessed regions. There may also be clearing device (not shown) to remove excess functional blocks or blocks not completely seated or

deposited into the recessed regions off the substrate **120**. A vibration device (not shown) may be coupled to the substrate **120** and/or to the slurry dispensing device to facilitate the distribution and/or deposition of the functional blocks. An example of a dispensing device that can work with vibrational assistance to dispense the functional blocks is described in U.S. patent application Ser. No. 10/086,491, entitled "Method and Apparatus For Moving Blocks" filed on Feb. 28, 2002, which is hereby incorporated by reference in its entirety. In one embodiment, the functional blocks are deposited onto the substrate using methods described in U.S. patent application Ser. No. 10/086,491.

[0112] Continuing with FIG. **9**, and generally shown at **132** a planarization (or dielectric) layer is then deposited or laminated onto the substrate **120** similar to previously discussed. Vias are formed in the dielectric film. Conductive interconnects are then formed on the dielectric film. The conductive interconnects also fill the vias to allow electrical interconnection to the functional blocks. In one embodiment, the vias are filled with a conductive material referred to as a via conductor. A pad conductor is then formed on the dielectric film to interconnect to the via conductor. The pad conductor and the via conductor can form the conductive interconnects in many embodiments. The planarization and the conductive interconnect formation is generally shown at **132** in FIG. **9**. A station **138** may be provided to inspect and/or test the functionality of the assemblies as previously described. After the testing, the substrate **120** is further advanced to another set of support members **134** for subsequent processing or lamination processed. In one embodiment, a conductive trace is formed on the substrate **120** to interconnect to the conductive interconnect. The conductive trace may be an antenna trace or other conductive element. The conductive trace may be formed by a convenient method such as printing, laminating, deposition, etc. A roll of material **136** is shown to laminate to the substrate **120**. The material can be a cover a jacket or other suitable material to complete the assemblies. In one embodiment, the roll **136** is a device substrate having formed thereon a conductor pattern. The substrate **120** with the functional blocks deposited therein and other elements formed therein/thereon is attached to the substrate roll **136** such that the conductive interconnects are coupled to the conductor pattern. In one embodiment, the substrate assemblies after processed as shown in FIG. **9** are singulated or cut to form individual assemblies such as assemblies **200** or **400**.

[0113] In one embodiment, a roll of substrate with recessed regions formed therein is formed by joining several sheets of materials together as illustrated in FIGS. **10-11**. In many instances, a number of certain predefined sections of the substrate are formed, for example, using a template such as the template **51** previously described. These sections of substrate with the recessed regions formed therein are then spliced, welded, or otherwise attached to one another to form a long section or a roll of substrate. As shown in FIG. **10**, frame **1002**, **1004**, and **1006** are formed. The frame **1002** is formed with a piece of substrate **1008** with a predetermined dimension. Likewise, the frame **1004** and **1006** are also formed with a piece of substrate **1010** and **1012**, respectively. Recessed regions **1014** are created into each of the substrates **1008**, **1010**, and **1012**. Then, as shown in FIG. **11**, the frames **1002**, **1004**, and **1006** are welded together to form a long piece of substrate **1020** or a roll of substrate **1020**. Between each two frames, a step-change is formed. For example, between the frame **1002** and **1004** is a step-change **1022** and

between the frame **1004** and **1006** is a step-change **1024**. In the present embodiment, the frames can be attached together such that the step-changes are uniform and consistent from one frame to the next. The present embodiment allows one to control the direction of the step-changes for the benefits previously discussed.

[0114] After the substrate **1020** is formed, the substrate **1020** may be rolled up into a roll form and placed on a web line processing similar to those processes described in FIGS. **8-9** to deposit the functional blocks and form other elements on the substrate. As can be seen in FIG. **12**, the substrate **1020** is advanced from a roller **117** through a set of support members **122**. A first slurry **124** containing a plurality of functional blocks is dispensed onto the substrate **1020**. A second slurry **126** containing a plurality of functional blocks may also be used to dispense onto the substrate **1020**. Excess slurry is collected in a container **128** and is recycled. The functional blocks fall into the recessed regions in the substrate **1020**. The substrate **1020** is advanced to another set of support members **130**. An inspection station (not shown) may be provided to check for empty recessed regions or for improperly filled recessed regions. There may also be a clearing device (not shown) to remove excess functional blocks or blocks not completely seated or deposited into the recessed regions off the substrate **1020**. A vibration device (not shown) may be coupled to the substrate **1020** and/or to the slurry dispensing device to facilitate the distribution and/or deposition of the functional blocks. An example of a dispensing device that can work with vibrational assistance to dispense the functional blocks is described in U.S. patent application Ser. No. 10/086,491, entitled "Method and Apparatus For Moving Blocks" filed on Feb. 28, 2002, which is hereby incorporated in its entirety. In one embodiment, the functional blocks are deposited onto the substrate using methods described in U.S. patent application Ser. No. 10/086,491.

[0115] A planarization (or dielectric) layer is then deposited or laminated onto the substrate **1020**. Vias are formed in the dielectric film. Conductive interconnects are then formed on the dielectric film. The conductive interconnects also fill the vias to allow electrical interconnection to the functional blocks. In one embodiment, the vias are filled with a conductive material referred to as a via conductor. A pad conductor is then formed on the dielectric film to interconnect to the via conductor. The pad conductor and the via conductor can form the conductive interconnects in many embodiments. The planarization and the conductive interconnect formation is generally shown at **132** in FIG. **12**. A station **138** may be provided to inspect and/or test the functionality of the assemblies as previously described. The substrate **1020** is further advanced to another set of support members **134** for subsequent processing or lamination processed. In one embodiment, a conductive trace is formed on the substrate **1020** to interconnect to the conductive interconnect. The conductive trace may be an antenna trace or other conductive element. The conductive trace may be formed by a convenient method such as printing, laminating, deposition, methods of direct writing, etc. A roll of material **136** is shown to laminate to the substrate **1020**. The material can be a cover, a jacket, or other suitable material to complete the assemblies. In one embodiment, the roll **136** is a device substrate having formed thereon a conductor pattern. The substrate **1020** having the functional blocks deposited therein and other elements formed therein/thereon is attached to the roll **136** such that the conductive interconnects are coupled to the conductor pattern. In one embodiment, the

substrate assemblies after processed as shown in FIG. **12** are singulated or cut to form individual assemblies such as assemblies **200** or **400**. Similar to previously discussed, the process illustrated in FIG. **12** can occur on one machine or on several machines. Additionally, the process illustrated in FIG. **12** can also be separated into one or more sub-processes as opposed to be continuous as shown in this figure.

[0116] FIG. **13** illustrates an exemplary method **1300** of forming an electronic assembly in accordance to embodiments of the present invention. At box **1302**, a plurality of recessed regions is formed on a substrate. At box **1304**, a plurality of functional blocks is deposited into the recessed regions. Each of the functional blocks is deposited in one of the recessed regions. A substantial amount of the plurality of functional blocks is recessed below a top surface of said substrate. Substantial amount is defined by (1) less than 10% of the plurality of the functional blocks protrudes above the top surface of the substrate, (2) less than 1% of the plurality of the functional blocks protrudes above the top surface of the substrate, (3) more than 90% of the plurality of the functional blocks are recessed below the top surface of the substrate, or (4) more than 99% of the plurality of the functional blocks are recessed below the top surface of the substrate.

[0117] In one embodiment, each of the recessed regions has a first width-depth aspect ratio and each of the functional blocks has a second width-depth aspect ratio. The first width-depth aspect ratio substantially matches the second width-depth aspect ratio. The first width-depth aspect ratio is one of equal to or less than 10.5:1, or preferably equal to or less than 7.5:1.

[0118] A step-and-repeat process can be used to form the recessed regions as previously described. In such process, one area of the substrate is formed with the plurality of recessed regions at a time. In one embodiment, the material web that is used for the substrate is passed under a vertical hot press wherein a mold is attached thereto to form the plurality of recessed regions. At least one area of the substrate is formed with the plurality of recessed regions each time the substrate passes the vertical hot press.

[0119] In another embodiment, a continuous process is used to form the recessed regions as previously described. In one embodiment, a material that is used to form the substrate is extruded to form the substrate and while extruding, the plurality of recessed regions is formed into the substrate. In the present embodiment, materials used to form or extrude the substrate such as polymer pellets are heated and extruded to form a melted film. A roller or a template with features provided to form the recessed regions is brought into contact with the melted film. The recessed regions are thus formed into the substrate while it is being extruded.

[0120] At box **1306**, a dielectric layer is formed over the functional blocks and/or the substrate. At box **1308**, vias are created into the dielectric layer to allow contact to the functional blocks or the contact pads on the functional blocks as previously described. At box **1310**, conductive interconnects are formed in the vias and over the dielectric layer as previously described to form via conductors and pad conductors.

[0121] FIGS. **14A-14B** illustrate an exemplary method **1400** of forming an electronic assembly in accordance to embodiments of the present invention. The method **1400** is similar to the method **1300** described above with the addition of using copies of an embossing mold to form the recessed regions. At box **1402**, a master mold is formed. The master mold comprises an etched silicon wafer and/or a diamond

turning machined metal plate. At box **1404**, a mother copy mold from the master mold is formed. In the case of a female silicon wafer master, which has receptors rather than embossing features, a father copy mold is made first, and the mother copy mold is made from the father copy mold. At box **1406**, a stamper copy mold from the mother copy mold is formed. At box **1408**, the stamper copy mold is used to form each of the plurality of recessed regions on a substrate. Each of said master mold, the mother copy mold, the father copy mold and the stamper copy mold comprises feature dimensions provided for each of the plurality of recessed regions. The feature dimensions for each of the plurality of recessed regions are about 0.5-1.0% larger than a desired corresponding feature of each of the plurality of recessed regions. Typically each of the forming steps involves electroforming a nickel plate or shim, but other forming methods, such as molding or casting of metal or polymer are also possible.

[0122] In another embodiment, a master mold negative is formed from the master mold. A stamper copy mold or generated is then formed from the master mold negative. At box **1408**, the stamper copy mold formed from the master mold negative is used to form each of the plurality of recessed regions.

[0123] In another embodiment, one or more stamper copy molds are formed. Each of the stamper copy mold comprises at least one feature for forming one of the plurality of recessed regions. The stamper copy molds are then welded together to form a mold having an array of the features for forming an array of the recessed regions. The features are then used to form an array of the plurality of recessed regions on the substrate.

[0124] At box **1410**, a plurality of functional blocks is deposited into the recessed regions. Each of the functional blocks is deposited in one of the recessed regions. A substantial amount of the plurality of functional blocks is recessed below a top surface of said substrate. Substantial amount is defined by (1) less than 10% of the plurality of the functional blocks protrudes above the top surface of the substrate, (2) less than 1% of the plurality of the functional blocks protrudes above the top surface of the substrate, (3) more than 90% of the plurality of the functional blocks are recessed below the top surface of the substrate, or (4) more than 99% of the plurality of the functional blocks are recessed below the top surface of the substrate.

[0125] At box **1412**, a dielectric layer is formed over the functional blocks and/or the substrate. At box **1414**, vias are created into the dielectric layer to allow contact to the functional blocks or the contact pads on the functional blocks as previously described. At box **1416**, conductive interconnects are formed in the vias and over the dielectric layer as previously described.

[0126] FIG. **15** illustrates another exemplary method **1500** of forming an electronic assembly in accordance to embodiments of the present invention. At box **1502**, a plurality of sheets of substrates is provided. The sheets comprise of materials that are used for the substrates of a plurality of electronic assemblies. The sheets can be comprised of different, same, or similar materials from one another. The sheets can be differently treated or similarly treated from one another and/or intended for same of different devices. At box **1504**, an array of the recessed regions is formed on each sheet. The sheets may all have same types of recessed regions or different types of recessed regions formed therein. At box **1506**, the

sheets are joined or welded together to form a continuous web of the substrate having formed therein the plurality of recessed regions.

[0127] In one embodiment, each of the recessed regions has a first width-depth aspect ratio and each of the functional blocks has a second width-depth aspect ratio. The first width-depth aspect ratio substantially matches the second width-depth aspect ratio. The first width-depth aspect ratio is one of equal to or less than 10.5:1, and optimally equal to or less than 7.5:1.

[0128] In one embodiment, a step-and-repeat process using an embossing mold is used to form the recessed regions as previously described. In the present embodiment, each sheet is formed with the plurality of recessed regions at a time. After the recessed regions are formed, the sheets are joined together.

[0129] In an alternative embodiment, the sheets are joined together prior to the formation of the recessed regions. Previous methods discussed can be used to form the recessed regions in the joined sheets.

[0130] As previously mentioned, when the sheets are joined together, each sheet may be referred to as a frame. Between two frames, there may be a step-change and that one step-change is consistent in direction of change with another step-change from one frame to the next frame (e.g., FIGS. 7G-7H).

[0131] At box **1508**, a plurality of functional blocks is deposited into the recessed regions. Each of the functional blocks is deposited in one of the recessed regions. A substantial amount of the plurality of functional blocks is recessed below a top surface of said substrate. Substantial amount is defined by any (1) less than 10% of the plurality of the functional blocks protrudes above the top surface of the substrate, (2) less than 1% of the plurality of the functional blocks protrudes above the top surface of the substrate, (3) more than 90% of the plurality of the functional blocks are recessed below the top surface of the substrate, or (4) more than 99% of the plurality of the functional blocks are recessed below the top surface of the substrate.

[0132] At box **1510**, a dielectric layer is formed over the functional blocks and/or the substrate. At box **1512**, vias are created into the dielectric layer to allow contact to the functional blocks or the contact pads on the functional blocks as previously described. At box **1514**, conductive interconnects are formed in the vias and over the dielectric layer as previously described.

[0133] Many embodiments of the present invention utilize selective deposition of a dielectric layer, a conductive interconnect, or other layer to form a strap assembly. Local printing techniques can be used in various embodiments to effectuate such selective deposition. An example of a local printing technique is direct write, which includes ink-jet printing, piezoelectric jet printing, acoustic jet printing, stencil printing, digital printing, pen/stylus based deposition, optical or laser assisted deposition, syringe dispense, Xerographic printing, and the like. A direct write technique is a deposition technique that enables simultaneous deposition and patterning of a material onto a substrate. In one embodiment, ink-jet printing is used with a piezoelectric print head. A direct write system typically employs a guiding system that allows for precise control of where a particular material is to be printed.

[0134] Using direct write method to form one or more part of the various layers or components of a strap assembly leads to high throughput since direct write uses only a small amount

of material (e.g., conductive ink or dielectric material) to form the layers or components. Another factor influencing the overall cost of a strap is the cost of substrate onto which strap is made. Lower cost material may have high distortion. Screen-printing process with a fixed scale for the screen may not be able to accommodate this difference in scaling. An ink jet system can dynamically correct for this scaling difference. Additionally, even if the deposition process and material can be designed for the particular screen printing machine, it will have low throughput as the system must align itself and printing speed must be lowered to meet the high accuracy requirements. Also, high-resolution screen and material needed to meet high accuracy requirements for a screen-printing process are significantly more expensive than otherwise.

[0135] In one embodiment, a direct write technique is used to deposit a dielectric material where it is needed on a functional block that is embedded in a substrate. The same direct write technique can be used to deposit the dielectric material where it is needed on the substrate. In one embodiment, the direct write technique is used to deposit the dielectric material over selected areas of the functional block and the substrate which could be used to bridge or cover a gap from the functional block to the substrate or to protect sensitive area on the functional block. Using the direct write technique to form the dielectric layer where needed reduces fabrication cost and material cost. A guiding system accompanies the direct write process to control where to form the dielectric material.

[0136] In one embodiment, a direct write technique is used to form a conductive interconnect to and from the functional block. One advantage of using a direct write technique to form the conductive interconnect is that direct write technique can employ an accurate registration and resolution control system and such registration and resolution control system can look at the substrate and dynamically correct for any scaling error and print a conductive trace away from any contact pads of the functional block. Screen-printing or other printing methods can also be used to form some parts of the conductive interconnect. For instance, the direct write technique can be used to print a via conductor connecting to a contact pad on the functional block and a conductor lead that connects from the via conductor and away from the contact pad; then, a screen-printing process can be used to print a pad conductor that connect to the lead conductor. External interconnections can be connected to this pad conductor as previously discussed.

[0137] FIG. 16 illustrates an exemplary method 1600 of forming a device in accordance to embodiments of the present invention. Method 1600 incorporates a direct write technique into forming a strap assembly. At box 1602, functional blocks are deposited into recessed receptor sites provided on a strap (first) substrate. (See, for example, FIG. 18B for blocks 1804 being deposited in a strap substrate 1802). At box 1604, areas that need dielectric material to be formed thereon are determined. For example, areas proximate contact pads on the functional blocks or areas that need sealing or bridging from the functional blocks to the substrate surface. At box 1606, the dielectric material is deposited where necessary. (See, for example, FIG. 18B for dielectric material 1806 being selectively deposited where necessary). In one embodiment, a direct write process (e.g., ink-jetting) is used to deposit the dielectric material. At box 1608, vias are formed into the dielectric material where necessary to expose contact pads on the functional blocks. (See, for example, FIG. 18B for vias 1808 being formed into the dielectric material 1806). At box

1610, via conductors are formed in the vias to establish connection to the contact pads. At box 1612, conductor leads are formed using a direct write method. The conductor leads are extensions from the via conductors. At box 1614, pad conductors are formed using any suitable method such as screen-printing or direct write. The pad conductors may have any of the configurations previously discussed (e.g., bow-tie like). The pad conductors allows for easy and convenient electrical interconnection to the conductor leads, to the via conductors, and to the contact pads. At box 1616, strap assemblies are formed. Other processes not listed herein may be necessary to complete the formation of the strap assemblies. Components and layers of the strap assemblies (e.g., blocks, dielectric layers, and interconnections) can be formed while the strap substrate is on a continuous web or a continuously moving web, similar to previously discussed.

[0138] Parallel to the strap assemblies' forming process, a device substrate is provided. The device substrate can also be a continuous web as previously mentioned. At box 1620, a conductor pattern (e.g., an antenna or elements of an antenna) is formed on a device (second) substrate. Any suitable method can be used to form the conductor pattern. The device substrate may also be provided with the conductor pattern already formed therein (e.g., by a supplier). (See, for example, FIG. 18B for a device substrate 1820 with a conductor pattern 1822). The device substrate may be supplied or provided in a roll format. At box 1622, one or more strap assemblies are attached to the device substrate in a way that the pad conductors are contacting the conductor pattern or part of the conductor pattern (see, for example, FIG. 18B). A conductive adhesive or connector may be used to interconnect the pad conductors to the conductor pattern on the device substrate. An example of a device that can be formed using the method 1600 is an RFID tag.

[0139] FIG. 17 illustrates an exemplary method 1700 of forming a device in accordance to embodiments of the present invention. Method 1700 is similar to method 1600 except that there a lead conductor is not formed between the via conductor and the pad conductor. At box 1702, functional blocks are deposited into recessed receptor sites provided on a strap (first) substrate. (See, for example, FIG. 18B for blocks 1804 being deposited in a strap substrate 1802). At box 1704, areas that need dielectric material to be formed thereon are determined. At box 1706, a dielectric material is deposited where necessary. (See, for example, FIG. 18B for dielectric material 1806 being selectively deposited where necessary). In one embodiment, a direct write process (e.g., ink-jetting) is used to deposit the dielectric material. At box 1708, vias are formed into the dielectric material where necessary to expose contact pads on the functional blocks. (See, for example, FIG. 18B for vias 1808 being formed into the dielectric material 1806). At box 1710, via conductors are formed in the vias to establish connection to the contact pads. At box 1712, pad conductors are formed using a direct write deposition. The pad conductors may have any of the configurations previously discussed (e.g., bow-tie like). The pad conductors allows for easy and convenient electrical interconnection to the via conductors and to the contact pads. At box 1714, strap assemblies are formed. Other processes not listed herein may be necessary to complete the formation of the strap assemblies. Components and layers of the strap assemblies (e.g., blocks, dielectric layers, and interconnections) can be formed while the strap substrate is on a continuous web or on a continuously moving we, similar to previously discussed.

[0140] Parallel to the strap assemblies' forming process, a device substrate is provided. The device substrate can also be a continuously web as previously mentioned. At box 1720, a conductor pattern (e.g., an antenna or elements of an antenna) is formed on a device (second) substrate. Any suitable method can be used to form the conductor pattern. The device substrate may also be provided with the conductor pattern already formed therein (e.g., by a supplier). (See, for example, FIG. 18B for a device substrate 1820 with a conductor pattern 1822). The device substrate may be supplied or provided in a roll format. At box 1722, one or more strap assemblies are attached to the device substrate in a way that the pad conductors are contacting the conductor pattern or part of the conductor pattern (see, for example, FIG. 18B). A conductive adhesive or connector may be used to interconnect the pad conductors to the conductor pattern on the device substrate. An example of a device that can be formed using the method 1700 is an RFID tag.

[0141] FIG. 18A illustrates an exemplary method 1800 of forming a device in accordance to embodiments of the present invention. Method 1800 is similar to methods 1600 and 1700 except that there a lead conductor is not formed and that an interconnect is formed that acts as both a via conductor and a pad conductor. At box 1860, functional blocks are deposited into recessed receptor sites provided on a strap (first) substrate. (See, for example, FIG. 18B for blocks 1804 being deposited in a strap substrate 1802). At box 1862, areas that need dielectric material to be formed thereon are determined. At box 1864, a dielectric material is deposited where necessary. (See, for example, FIG. 18B for dielectric material 1806 being selectively deposited where necessary). In one embodiment, a direct write process (e.g., ink-jetting) is used to deposit the dielectric material. At box 1866, electrical interconnects are formed to the functional blocks using a direct write method. At box 1868, strap assemblies are formed. Other processes not listed herein may be necessary to complete the formation of the strap assemblies. Components and layers of the strap assemblies (e.g., blocks, dielectric layers, and interconnections can be formed while the strap substrate is on a continuous web or on a continuously moving web, similar to previously discussed.

[0142] Parallel to the strap assemblies' forming process, a device substrate is provided. The device substrate can also be a continuously web as previously mentioned. At box 1870, a conductor pattern (e.g., an antenna or elements of an antenna) is formed on a device (second) substrate. Any suitable method can be used to form the conductor pattern. The device substrate may also be provided with the conductor pattern already formed therein (e.g., by a supplier). (See, for example, FIG. 18B for a device substrate 1820 with a conductor pattern 1822). The device substrate may be supplied or provided in a roll format. At box 1872, one or more strap assemblies are attached to the device substrate in a way that the pad conductors are contacting the conductor pattern or part of the conductor pattern (see, for example, FIG. 18B). A conductive adhesive or connector may be used to interconnect the pad conductors to the conductor pattern on the device substrate. An example of a device that can be formed using the method 1800 is an RFID tag.

[0143] FIG. 19A illustrates an exemplary method 1900 of forming a device in accordance to embodiments of the present invention. At box 1902, functional blocks are deposited into recessed receptor sites provided on a strap (first) substrate using a Fluidic Self-Assembly process. The strap substrate is

provided on a web substrate or is part of a web substrate. (See, for example, FIG. 19B for blocks 1960 being deposited in a strap substrate 1962). At box 1904, vias conductors are formed to connect directly to contact pads on the functional blocks using a direct write method (e.g., ink-jetting). (See, for example, FIG. 19B for blocks via conductors 1964 being direct written on contact pads 1966 of the functional blocks 1960). At box 1906, a dielectric layer is formed around each via conductor and optionally, over each predetermined area of each functional block as well as the strap substrate using similar direct write method. (See, for example, FIG. 19B for dielectric layer 1968 being formed around the via conductor 1966). As before, the dielectric material is deposited where necessary. At box 1908, pad conductors are formed to connect to the via conductors. A direct write method (or other suitable method) can be used to form the pad conductors. (See, for example, FIG. 19C for pad conductors 1970 being formed and connected to the via conductor 1966). The pad conductors may have any of the configurations previously discussed (e.g., bow-tie like). At box 1910, strap assemblies are formed. Other processes not listed herein may be necessary to complete the formation of the strap assemblies. The process of method 1900 can all occur while the web substrate is continuously moving from one station to another station where each station performs a particular process, e.g., FSA, direct write conductive material, or direct write dielectric material.

[0144] In one embodiment, at box 1912, the web material with the strap assemblies formed thereon is singulated to form individual strap assemblies. In other words, individual assemblies are singulated, sliced, cut, or otherwise separated from one another or from the web substrate. Parallel to the strap assemblies' forming process, a substrate device is provided. At box 1916, a conductor pattern (e.g., an antenna or elements of an antenna) is formed on a device (second) substrate. Any suitable method can be used to form the conductor pattern. The device substrate may also be provided with the conductor pattern already formed therein (e.g., by a supplier) as previously described. The device substrate may also be supplied in the form of a web roll. Also at box 1916, the strap assemblies are attached to the device substrate in a way that the pad conductors are contacting the conductor pattern or part of the conductor pattern as previously described. A conductive adhesive or connector may be used to interconnect the pad conductors to the conductor pattern on the device substrate. An example of a device that can be formed using the method 1900 is an RFID tag. A plurality of strap assemblies or just one strap assembly may be attached to one individual device substrate depending on applications. Several strap assemblies may be attached to one individual device substrate and then singulated to form individual final devices each having a strap assembly and a device substrate attached to one another.

[0145] In an alternative embodiment, at box 1914, parallel to the strap assemblies' forming process, a substrate device is provided. At box 1914, a conductor pattern (e.g., an antenna or elements of an antenna) is formed on a device (second) substrate. Any suitable method can be used to form the conductor pattern. The device substrate may also be provided with the conductor pattern already formed therein (e.g., by a supplier) as previously described. The device substrate may be supplied in the form of a web roll. The strap assemblies are attached to the device substrate in a way that the pad conductors are contacting the conductor pattern or part of the conductor pattern as previously described. A conductive adhesive

or connector may be used to interconnect the pad conductors to the conductor pattern on the device substrate. At box 1918, the web material with the strap assemblies attached to the device substrate is singulated to form individual final devices. In other words, individual devices are singulated, sliced, cut, or otherwise separated from one another or from the web substrate. A plurality of strap assemblies or just one strap assembly may be attached to one individual final device depending on applications. An example of a device that can be formed using the method 1900 is an RFID tag.

[0146] FIGS. 20-23 illustrates how layers and components are selectively formed on a functional block and optionally, a substrate that the functional block is deposited therein. FIG. 20 illustrates a functional block 2004 being deposited into a receptor site 2002 formed on a substrate 2001 as previously discussed. The functional block 2004 includes one or more contact pads 2006 to allow for electrical interconnections to the functional block 2004. As previously discussed, in one embodiment, the functional block 2004 is recessed below a surface of the substrate 2000. A lead conductor 2010 is formed that connects to the contact pads and extends away from the contact pads 2006. A direct write technique (e.g., ink jetting) is used to form the lead conductor 2006, in one embodiment. In one embodiment, the lead conductor 2006 connects to a pad conductor 2008 formed on the substrate 2002. Thus, a direct write technique is used to form the lead conductors 2006 that can re-route and expand the contact pads 2006 of the functional blocks 2004. Although not shown in FIG. 20, a dielectric layer may be selectively formed over the functional blocks using a suitable method such as direct write. Then, the pad conductor 2008 is formed on the dielectric layer and connected to the lead conductor 2010. A strap assembly 2000 is formed when all proper interconnections are formed for the functional block 2004.

[0147] In FIG. 21, the strap assembly 2000 is attached or coupled to an electrical or conductor pattern 2012 that may be provided on a second substrate or a device substrate. As shown in this figure, a conductive material 2008 is formed to make the electrical connection between the strap assembly 2000 and the electrical pattern 2012. The conductive material 2008 can be part of the pad conductor 2006 formed in the strap assembly. The electrical pattern 2012 can be parts of an antenna or the antenna itself.

[0148] FIGS. 22-24 illustrate an example of forming a strap assembly that includes using a direct write technique and coupling the strap assembly to an external device. In FIG. 22, a direct write technique, such as ink-jet, laser assisted deposition, etc., is used to deposit a dielectric material 3016 on the functional block 3004 where it is needed. The dielectric material 3016 could be placed anywhere it is needed. For example, the dielectric material 3016 is used to bridge the gap from the functional block 3004 to the substrate film 3002, or to protect sensitive areas on the functional block 3004. The dielectric material 3016 is also placed over areas that includes contact pads 3006 provided on the functional block 3004. Vias (not shown) may be created in the dielectric material 3016 to expose the contact pads 3006 to allow for necessary electrical connections. Conductive material (not shown) is then used to fill the vias (forming via conductor) and contact the contact pads 3006 using a direct write method as previously discussed. Alternatively, the conductive material may be formed over the contact pads 3006 using a direct write method followed by the dielectric material 3016 being formed around the conductive material.

[0149] In FIG. 23, lead conductors 3010 are formed to provide extensions to the contact pads 3006 (either directly, through via conductors, or both) as previously discussed. A direct write method can be used to form the lead conductors 3010. Pad conductors 3008 are then formed on the substrate and optionally on portions of the dielectric material 3016. Each pad conductor 3008 is interconnected to a lead conductor 3010 and in one embodiment, the pad conductor 3008 does not reside over a surface of the respective functional block. A strap assembly 3000 is formed all the necessary interconnections and layers are made and formed to and from the functional block 3004.

[0150] In one embodiment, the strap assembly 3000 is attached to a second substrate or a device substrate that has a conductor pattern 3012 formed thereon (FIG. 24). For instance, the strap assembly 3000 is attached to a substrate that has an RFID antenna formed thereon to form an RFID tag. The strap assembly 3000 is attached to the second substrate such that the conductor pattern 3012 on the second substrate is interconnected to the pad conductors 3008 on the strap assembly 3000. In one embodiment, the strap assembly 3000 is flipped up-side-down (like a "flip-chip format") onto the second substrate so that the pad conductors 3008 are facing the conductor pattern 3012 on the device substrate. The conductor pattern 3012 can be any functional electrical pattern or feature on a device substrate.

[0151] While many processing systems can be used to carry out certain embodiments of the present invention, FIG. 25 illustrates an exemplary processing system 2500 that can be used to assemble functional blocks 2504 into a strap substrate that has receptor regions configured to receive the functional blocks as well as forming layers or components on the substrate or the functional blocks. The system 2500 is similar to those described in FIGS. 8-12 above with the specific incorporation of a direct write device into the system to form a certain layer or component of the strap assembly. The system 2500 comprises a web-processing line 2501 configured to and able to move a roll of substrate material 2502 across one or more processing stations. A set of support rollers 2514 is provided to facilitate the movement of the substrate material from one station to another station. The substrate material 2502 can form or be made to include or supports the strap substrate that the functional blocks are to be deposited therein. The system 2500 includes a Fluidic Self-Assembly (FSA) device 2506 (at one station) configured to deposit the functional blocks 2504 into the recessed regions. In one embodiment, the substrate material 2502 is submerged under the fluid used in the FSA process while the blocks are being deposited. In one embodiment, a portion of the FSA device is also submerged under the fluid. An inspection device or station 2508 may be provided to inspect the substrate material, e.g., for block filling, empty regions, block functionality, etc.

[0152] A first direct write device 2510 is also provided (at one station) with the system 2500. The first direct write device 2510 can be any one of an ink-jetting system, a digital printing system, pen/stylus system, optical or laser assisted deposition system, syringe dispensing system, Xerographic printing system, and the like configured to formed interconnection features (e.g., via conductors, pad conductors, or lead conductors) to and from the functional blocks.

[0153] A second direct write device 2512 is also provided with the system 2500 (at one station). The second direct write device can also be any one of an ink jetting system, a digital printing system, pen/stylus system, optical or laser assisted

deposition system, syringe dispensing system, Xerographic printing system, and the like configured to formed dielectric material over a selected area upon command. More direct write devices or stations may be included for several layers as previously discussed.

[0154] In one embodiment, the system **2500** further includes a vibration device (not shown) positioned to exert a vibrational force on one or both of the substrate material and the slurry or fluid that is used to dispense the functional blocks onto the substrate material. The vibration device can also be positioned to exert such force on the FSA dispensing device. The vibration device facilitates deposition of the functional blocks in the receptor regions. The substrate material could also be tilt in any direction and/or angle that further assists the deposition of the functional blocks. In one embodiment, a vibration device is coupled to the FSA device **2506**. In one embodiment, a vibration device is placed proximate the substrate material **2502** so that the substrate material is vibrated during deposition at the FSA station.

[0155] Other stations (not shown) could be included, for example, additional stations are provided for the deposition of pad conductors, or other necessary layers over the substrate material or the dielectric layer. Although not shown, the system **2500** could be made to include an embossing device configured to create the recessed regions into the substrate material. The embossing device would be placed ahead of the FSA device **2506** so that the embossing may take place prior to the deposition of the functional blocks.

[0156] The processing system **2500** can include or connect to a computer system **2520** that is set up to control for example, the web-processing line, the FSA device, the first direct writing device, the second direct writing device, the embossing device and other devices of the system **2500**. In one embodiment, the computer system **2520** may include a system controller (not shown) that can execute a system control software, which is a computer program stored in a computer-readable medium such as a memory (not shown). Preferably, the memory is a hard disk drive, but the memory may also be other kinds of memory known in the art. The computer program includes sets of instructions that dictate the process of the system **2500**. An input/output device such as a monitor, a keyboard, and/or a mouse is used to interface between a user and the computer system **2520**. For instance, a set of instruction can be executed by the computer system **2520** to move the substrate material across the web processing line for FSA, for interconnections formation, for direct write processing, etc.

[0157] While the invention has been described in terms of several embodiments, those of ordinary skill in the art will recognize that the invention is not limited to the embodiments described. The method and apparatus of the invention, but can be practiced with modification and alteration within the spirit and scope of the appended claims. The description is thus to be regarded as illustrative instead of limiting. Having disclosed exemplary embodiments, modifications and variations may be made to the disclosed embodiments while remaining within the spirit and scope of the invention as defined by the appended claims.

We claim:

1.-35. (canceled)

36. A processing system to assemble functional blocks into a strap substrate comprising:

- a web-processing line configured to move a roll of substrate material across one or more processing stations;
- a Fluidic Self-Assembly (FSA) device configured to deposit a functional into a recessed region formed in said substrate material;
- a first direct write device configured to selectively form a dielectric layer over said functional block and said substrate material; and
- a second direct write device configured to form interconnection features to and from said functional block.

37. The processing system of claim **36** further comprising: a vibration device positioned to exert a vibrational force on one or both of said substrate material and a slurry that is dispensed via said FSA device to dispense said functional block onto said substrate material, said vibration device facilitates deposition of said functional block.

38. The processing system of claim **36** further comprising: a computer system set up to control said web-processing line, said FSA device, said first direct writing device, and said second direct writing device.

39. The processing system of claim **36** further comprising: an embossing device configured to create said recessed region into said substrate material.

40. The processing system of claim **39** further comprising: a computer system set up to control said web-processing line, said FSA device, said first direct writing device, said second direct writing device, and said embossing device.

* * * * *