



(51) International Patent Classification:

D21C 1/02 (2006.01) *D21D 1/34* (2006.01)
D21B 1/22 (2006.01) *D21D 5/00* (2006.01)
D21B 1/34 (2006.01)

(21) International Application Number:

PCT/EP2017/081916

(22) International Filing Date:

07 December 2017 (07.12.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16202908.6 08 December 2016 (08.12.2016) EP

(71) Applicant: VALMET AB [SE/SE]; 851 94 Sundsvall (SE).

(72) Inventor: LAMBERT, Francois; Ljungbacken 8, 85460 Sundsvall (SE).

(74) Agent: ZUMSTEIN, Angela; Maiwald Patentanwalts- und Rechtsanwalts-gesellschaft mbH, Elisenstr. 3 / Elisenhof, 80335 Munich (DE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(54) Title: METHOD FOR TREATING BIOMASS AND DEVICE FOR TREATING BIOMASS

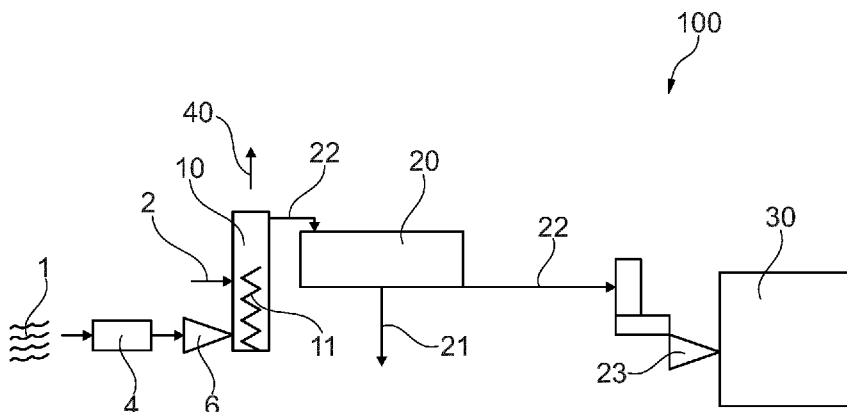


Fig. 1

(57) Abstract: The invention relates to a method for treating biomass (1). In a step (S10) of the method, the biomass (1) and an amount of water (2) is fed into a first reactor unit (10) such that the biomass (1) is impregnated using the amount of water (2) while the biomass (1) is transferred through the first reactor unit (10) by a conveyor means (11). In another step (S20), the impregnated biomass (22) is transferred from the first reactor unit (10) to a separation unit (20) in which at least a part (21) of the amount of water (2) used for impregnation can be separated from the impregnated biomass (22). In another step (S30), the impregnated biomass (22) is transferred from the separation unit (20) into a second reactor unit (30) in which the impregnated biomass (22) is subjected to a predetermined pressure (S30). The invention further relates to the use of the method for treating non-wood material as well as to a device for treating biomass (1).



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

Method for treating biomass and device for treating biomass

Field of the invention

5

The invention generally relates to processes for treating biomass. In particular, the invention relates to a method for treating biomass, a use of the method for treating non-wood material and a device for treating biomass.

10 Background of the invention

Biomass treatment processes are often used to produce sugar, ethanol, chemicals or fuel. In such processes, the biomass may be pre-treated in different ways. For example, the biomass is pre-steamed before a reaction of an impregnation liquid with the biomass takes place. The advantage of steaming the biomass is that the material is more evenly treated and the accessibility of the impregnation liquid to the material is increased. Pre-steaming and steaming of wood material is generally used in the pulp and paper industry. For example, the steaming of the biomass is used to remove air from pores in the material, to increase the temperature of the material and to increase the penetration of chemicals in the material. However, the steaming often requires a certain time span until appropriate characteristics of the material are achieved. In particular, long steaming times may occur, especially when using non-wood material as biomass.

25 Summary of the invention

It is an object of the present invention to provide an improved process for treating biomass.

30 This object is achieved by the subject-matter of the independent claims. Further exemplary embodiments are evident from the dependent claims and the following description.

- 2 -

According to an aspect of the invention, a method for treating biomass is provided. The biomass and an amount of water are fed into a first reactor unit such that the biomass is impregnated using the amount of water while the biomass is transferred through the first reactor unit by a conveyor means, for example by a screw conveyor.

- 5 Afterwards, the impregnated biomass is transferred from the first reactor unit to a separation unit in which at least a part of the amount of water used for impregnation can be separated from the impregnated biomass. Afterwards, the impregnated biomass is transferred from the separation unit into a second reactor unit in which the impregnated biomass is subjected to a predetermined and/or controllable pressure.

10

Such a method is especially advantageous if non-wood material is used in a biomass treatment process. In particular, the amount of water may be introduced as impregnation liquid into the first reactor unit instead of steaming the biomass within the first reactor unit. The compression of the non-wood material, for example wheat

15 straw or grass, may decrease the permeability of the material column in the first reactor unit such that it is difficult to add steam to this kind of material in the first reactor unit. However, using water instead of steam in the first reactor unit may increase the permeability of the material column in the first reactor unit.

- 20 It is possible that only the amount of water as well as the biomass to be treated are fed into the first reactor unit. This means that water is used as impregnation liquid for the impregnation of the biomass fed into the first reactor unit. This may be water available in a mill, for example process water, fresh water or condensate. For example, pure water may also be used as impregnation liquid for the impregnation of
- 25 the biomass fed into the first reactor unit.

The conveyor means which transfers the biomass through the first reactor unit during the impregnation of the biomass may be a screw conveyor which is arranged within the first reactor unit. In this manner, the biomass to be treated may be transferred

- 3 -

through the amount of water fed into the first reactor unit such that the whole biomass is homogeneously impregnated by the amount of water.

- 5 After the biomass has been impregnated in the first reactor unit using the amount of water, the impregnated biomass is transferred from the first reactor unit to the separation unit where at least a part of the amount of water used for impregnation is separated from the impregnated biomass. This separation may be carried out using a screw press which increases the pressure on the material in the separation unit. The separation of the amount of water from the impregnated biomass may also be
10 referred to as dewatering of the biomass. The part of the amount of water which is separated from the impregnated biomass in the separation unit may be reused for the impregnation in the first reactor unit or for washing the raw material, e.g. the biomass, before the biomass is introduced into the first reactor unit.
- 15 After the part of the amount of water has been separated from the impregnated biomass, the impregnated biomass is transferred from the separation unit into the second reactor unit in which the impregnated biomass is subjected to a predetermined pressure, wherein the pressure is controllable. In the second reactor unit, a reaction between the impregnated biomass and the impregnation liquid may
20 take place. In particular, a hydrolysis of the impregnated biomass may take place in the second reactor unit. Therefore, the amount of water which is still present in the impregnated biomass may react with the impregnated biomass in order to obtain end products like sugar, ethanol, chemicals or fuel. It should be understood that the biomass is not only impregnated within the first reactor unit. However, it is also
25 possible that the biomass is impregnated during the transfer of the biomass from the first reactor unit to the separation unit and during the transfer of the biomass to the second reactor unit and also within the second reactor unit.

- 4 -

According to an embodiment of the invention, the impregnation of the biomass in the first reactor unit is carried out exclusively using the amount of water fed into the first reactor unit.

- 5 In particular, water is used for impregnating the biomass in the first reactor unit. This means that no other impregnation liquid is fed into the first reactor unit besides the amount of water. However, it is possible that a further impregnation liquid is fed into the system downstream of the first reactor unit. In particular, it is possible that an acid or a catalyst is fed into the system downstream the first reactor unit. For
10 example, a catalyst may be fed into the system downstream of the separation unit and upstream the second reactor unit. For example, the catalyst is an aqueous solution, EtOH or mixtures thereof.

- However, it is advantageous if only water is fed into the first reactor unit such that
15 the biomass fed into the first reactor unit is impregnated using exclusively the amount of water. Furthermore, it is possible that no steaming of the biomass in the first reactor unit is carried out.

- According to another embodiment of the invention, the amount of water is fed into
20 the first reactor unit up to a predetermined fill level of the first reactor unit.

- In this manner, it is possible that the whole biomass fed into the first reactor unit is homogeneously impregnated by the amount of water in the first reactor unit. In particular, the first reactor unit may be arranged such that the whole biomass is
25 conveyed through the amount of water in the first reactor unit. This may be achieved by filling the amount of water up to the predetermined fill level in the first reactor unit. The first reactor unit may therefore be vertically arranged with respect to an earth's surface as will be described in more detail hereinafter.

- 5 -

According to another embodiment of the invention, the impregnated biomass is transferred from the first reactor unit into a retention vessel before transferring the impregnated biomass to the separation unit. The impregnated biomass is steamed in the retention vessel by controlling a pressure within the retention vessel.

5

The retention vessel may be operated at pressurized or atmospheric conditions. In particular, the pressure in the retention vessel may be controlled. The retention vessel may be arranged between the first reactor unit and the separation unit such that the impregnated biomass coming from the first reactor unit is retained in the retention vessel before it is transferred to the separation unit. Within the retention vessel, the impregnated biomass may allow a further impregnation of the biomass by means of the amount of water. The retention vessel may further enhance a homogeneous impregnation of the biomass by means of the amount of water. Therefore, the retention vessel may also be referred to as buffer bin or homogenization bin as a further homogeneous impregnation of the biomass takes place in the retention vessel.

By controlling the pressure within the retention vessel, the impregnated biomass may further be steamed. In particular, the steaming of the impregnated biomass takes place after impregnating the biomass by means of the amount of water in the first reactor unit. The impregnation of the biomass in the first reactor unit and the steaming of the impregnated biomass in the retention vessel are thus carried out in separate treatment units being arranged one after the other.

According to another embodiment of the invention, the pressure in the retention vessel is equal to a pressure in the first reactor unit.

According to another embodiment of the invention, the predetermined pressure within the second reactor unit is controlled using a plug screw or a rotary valve, wherein the plug screw or the rotary valve is arranged between the separation unit and the second reactor unit.

- 6 -

However, in addition to the plug screw, a force feed screw may be arranged upstream of the second reactor unit in order to compress the impregnated biomass before it is fed into the second reactor unit. In this manner, the pressure within the second reactor unit can be controlled or adjusted. Furthermore, it is possible that a rotary
5 valve is used to control or adjust the predetermined pressure within the second reactor unit. The plug screw or the rotary valve may therefore be adapted to increase the pressure in the second reactor unit compared to the pressure in the separation unit.

10 According to another embodiment of the invention, the biomass is pre-steamed before feeding the biomass into the first reactor unit, wherein a pressure and/or a temperature during the pre-steaming can be controlled.

The pre-steaming may be carried out using a steam mixer screw arranged within a
15 pre-steaming unit, e.g. a pre-steaming reactor. The pre-steaming reactor may be arranged upstream the first reactor unit such that the biomass, i.e. the raw material, is pre-steamed in the pre-steaming reactor before it is introduced into the first reactor unit where the pre-steamed biomass is impregnated using the amount of water.

20 According to another embodiment of the invention, a temperature difference between the temperature during the pre-steaming of the biomass and the temperature during the impregnation of the biomass in the first reactor unit is controlled.

In particular, the temperature difference between the biomass in the pre-steaming
25 reactor and the biomass in the first reactor unit can be controlled. This temperature difference between the pre-steaming stage and the impregnation stage is provided in order to achieve a better penetration of the impregnation liquid, e.g. the amount of water, in the biomass within the first reactor unit.

- 7 -

Furthermore, a plug screw may be arranged upstream the first reactor unit wherein the plug screw creates fractures in the material, e.g. the biomass, such that the penetration of the amount of water in the biomass within the first reactor unit is further increased.

5

According to another embodiment of the invention, the biomass is washed in a washing unit by means of a washing liquid before feeding the washed biomass into the first reactor unit.

- 10 The washing liquid may comprise water which is recirculated back from the separation unit. The washing of the biomass is carried out in order to clean the biomass, i.e. the raw material, before the biomass is impregnated in the first reactor unit. For example, sand, stone and metal is removed from the biomass before it is impregnated in the first reactor unit. Therefore, a washing liquid of a specified
- 15 composition may be used in order to wash the biomass in the washing unit.

According to another embodiment of the invention, the water separated in the separation unit is recirculated back to the washing unit and the recirculated water is used for washing the biomass in the washing unit.

20

- In this manner, it is possible to reduce the water consumption in the whole process since at least a part of the amount of water used for impregnation can also be used for washing the biomass before the washed biomass is introduced into the first reactor unit. Before the recirculated water is used for washing the biomass, it may further be
- 25 mixed with a washing agent such that washing liquid for washing the biomass in the washing unit is obtained.

- According to another embodiment of the invention, the biomass is compressed using a plug screw feeder, e.g. a screw press, before feeding the compressed biomass into
- 30 the first reactor unit for impregnation such that residual washing liquid is separated

- 8 -

from the biomass during compression and the residual washing liquid is recirculated back to the washing unit, wherein the residual washing liquid is reused for washing the biomass in the washing unit.

- 5 The washing liquid may for instance be a washing agent which is suitable for removing sand, stone or metal from the raw material, e.g. the biomass. The washing liquid may be separated or pressed out of the washed biomass during the compression of the biomass. The compression may be carried out in a compression unit arranged upstream the first reactor unit. After the washing liquid or at least a
10 part of the washing liquid has been separated from the washed biomass, the separated washing liquid is recirculated back to the washing unit where it is reused for washing the biomass. In this manner, washing agent used for washing the biomass may be recovered. However, it is possible that the washing liquid separated from the washed biomass is discharged during the compression of the biomass and the separated
15 washing liquid is not reused for washing the biomass in the washing unit.

According to another embodiment of the invention, the water separated in the separation unit is recirculated back to the first reactor unit wherein the recirculated water is reused for impregnating the biomass in the first reactor unit.

- 20 The recirculated water may thus be added to the amount of water fed into the first reactor unit such that water may be saved in the whole process. The recirculated water from the separation unit may also be recirculated back to the washing unit such that the recirculated water from the separation unit is added to the washing liquid in
25 the washing unit and the recirculated water is also used for washing the biomass before the washed biomass is introduced into the first reactor unit. This aspect will however be described in more detail in the description of the figures.

- According to an aspect of the invention, a use of a method as described above for
30 treating non-wood material is provided.

- 9 -

In particular, the inventive method as described above is used for treating non-wood material instead of wood material. This means that only bulky material like straw, grass, etc. is used as biomass to be treated using the inventive method. The inventive method provides a more efficient impregnation of the biomass, e.g. the non-wood material, compared to a method using only a steaming of the biomass.

According to another aspect of the invention, a device for treating biomass is provided. The device comprises a first reactor unit, a separation unit downstream of the first reactor unit and a second reactor unit. The biomass and an amount of water are fed into the first reactor unit such that the biomass is impregnated using the amount of water while the biomass is transferred through the first reactor unit by a conveyor means. The conveyor means may for instance be a screw conveyor. The impregnated biomass is transferred from the first reactor unit to the separation unit in which at least a part of the amount of water used for impregnation can be separated from the impregnated biomass. The impregnated biomass is transferred from the separation unit into the second reactor unit in which the impregnated biomass is subjected to a predetermined and/or controllable pressure.

The first reactor unit may be vertically arranged with respect to the earth's surface such that the biomass to be impregnated within the first reactor unit is transferred or conveyed in an upward direction through the first reactor unit during the impregnation. A screw conveyor may be used to transfer the biomass in the first reactor unit during the impregnation. The separation unit may be equipped with a screw press such that at least a part of the amount of water is separated from the impregnated biomass in the separation unit, e.g. the impregnated biomass is dewatered. The predetermined pressure in the second reactor unit may be achieved, in particular controlled, by compressing the impregnated biomass by means of a force feed screw or a rotary valve arranged between the separation unit and the second reactor unit.

- 10 -

According to an embodiment of the invention, the conveyor means comprises at least one conveyor screw for transferring the biomass through the first reactor unit during impregnation.

5 However, it is possible that the plurality of conveyor screws is arranged within the first reactor unit in order to transfer the biomass through the first reactor unit during impregnation. The at least one conveyor screw may be vertically arranged within the first reactor unit. The first reactor unit may be a longitudinal vessel which is also vertically arranged with respect to the earth's surface. The first reactor unit may
10 further be filled with the amount of water up to a predetermined fill level. In this manner it is possible that the whole biomass to be treated can be homogeneously impregnated by the amount of water when the biomass is transferred through the first reactor unit by means of the conveyor screw.

15 According to another embodiment of the invention, the first reactor unit is a vertically arranged, longitudinal vessel in which the biomass is conveyed in an upward direction when the biomass is impregnated using the amount of water.

The biomass to be impregnated is fed into the first reactor unit at a bottom part of the
20 first reactor unit and, after impregnation, the impregnated biomass is discharged from the first reactor unit at a top part of the first reactor unit. In particular, the biomass is introduced at the bottom part of the first reactor unit, transferred in the upward direction by means of a conveyor screw within the first reactor unit and then discharged at the top part of the first reactor unit. The impregnation, however, takes
25 place during the transfer of the biomass in the upward direction. If the first reactor unit is filled up to a predetermined fill level with impregnation liquid, e.g. the amount of water, the biomass can be homogeneously impregnated by the amount of water as the biomass is conveyed through the amount of water when the biomass is moved in the upward direction.

Brief description of the drawings

Fig. 1 schematically shows a device for treating biomass according to an embodiment of the invention.

5

Fig. 2 schematically shows a device for treating biomass according to another embodiment of the invention.

Fig. 3 schematically shows a device for treating biomass according to another embodiment of the invention.

10

Fig. 4 shows a flow diagram of a method for treating biomass according to an embodiment of the invention.

15 Detailed description of the drawings

Fig. 1 schematically shows a device 100 for treating biomass 1, in particular for treating non-wood material. The biomass 1 is fed into a washing unit 4 in which the material, e.g. the biomass, is washed before it is further treated with impregnation liquid in a first reactor unit 10. Furthermore, a cutting of the biomass 1 may be carried out before the biomass is fed into the first reactor unit 10. The biomass 1 may be fed into the first reactor unit 10 by means of a plug screw feeder 6 which is arranged in a compression unit upstream the first reactor unit 10. The plug screw feeder 6 or simply plug screw 6 may be a screw press 6. The plug screw feeder 6 may be arranged between the washing unit 4 and the first reactor unit 10. After the biomass 1 has been fed into the first reactor unit 10, the biomass is impregnated with an amount of water 2 which is also introduced into the first reactor unit 10, for example up to a predetermined fill level not shown in Fig. 1. The biomass 1 is thus impregnated using the amount of water 2 while the biomass 1 is transferred through the first reactor unit 10 by a conveyor means 11. The conveyor means may for

30

- 12 -

instance be a screw conveyor which is arranged within the first reactor unit 10 in order to convey or transfer the biomass 1 to be impregnated in the first reactor unit 10 in an upward direction 40. The vertical direction 40 may be perpendicular to an earth's surface not shown in Fig. 1. In this manner it is possible that the whole
5 biomass 1 fed into the first reactor unit 10 can be homogeneously impregnated within the first reactor unit 10 using the amount of water 2 also fed into the first reactor unit 10. After the biomass 1 has been impregnated within the first reactor unit 10, the impregnated biomass is discharged at a top part of the first reactor unit 10 and transferred to a separation unit 20 in which at least the part 21 of the amount of water
10 2 is separated from the impregnated biomass 22. The impregnated biomass 22 is then transferred from the separation unit 20 to a second reactor unit 30, wherein the impregnated biomass 22 is subjected to a predetermined pressure within the second reactor unit 30. This pressure may be controllable. The impregnated biomass 22 is fed into the second reactor unit 30 by means of a plug screw feeder, for example a
15 force feed screw. In particular, the predetermined pressure within the second reactor unit 30 may be provided by arranging a plug screw 23 or a rotary valve between the separation unit 20 and the second reactor unit 30. For example, a force feed screw and a plug screw 23 may be used in combination such that both types of screws are subsequently arranged between the separation unit 20 and the second reactor unit 30.
20 In this manner, the compaction of the impregnated biomass 22 can be enhanced.

In particular, the possibilities for arranging these components are the following: In a first example, only a plug screw 23 is arranged between the separation unit 20 and the second reactor unit 30. In a second example, a force feed screw which is followed
25 by a plug screw 23 is arranged between the separation unit 20 and the second reactor unit 30, wherein the plug screw 23 may be fed by the force feed screw. In a third example, only a rotary valve is arranged between the separation unit 20 and the second reactor unit 30. The embodiment shown in Fig. 1 may be the simplest embodiment of the inventive device 100.

Fig. 2 shows another embodiment of the device 100 for treating biomass 1. Therein, the biomass 1 is fed into the washing unit 4 in which the biomass 1 is washed before it is further treated in the first reactor unit 10. Therefore, a washing liquid 3, e.g. a washing agent, is introduced into the washing unit 4 such that a removal of

5 impurities like for example sand, stone, metal, etc. from the biomass 1 can be achieved. Afterwards, or downstream the washing unit 4, a pre-steaming of the washed biomass 1 is carried out in a pre-steaming unit 5. The pre-steaming unit 5 may comprise a pre-steaming mixer. During the pre-steaming, the biomass 1 may be retained within the pre-steaming unit 5 for a short retention time. A preferred

10 retention time for the pre-steaming of the biomass in the pre-steaming unit 5 may be between 1 second and 300 seconds.

In this manner, a better penetration of the impregnation liquid from the first reactor unit 10 in the biomass 1 can be achieved when the biomass 1 is impregnated within

15 the first reactor unit 10. Controlling a temperature difference between the pre-steaming of the biomass 1 and the impregnation of the biomass 1 in the first reactor unit 10 is also possible in order to further improve the penetration of the impregnation liquid in the biomass 1 within the first reactor unit 10. The plug screw 6 which, for example, is arranged in a compression unit, transfers the washed and

20 pre-steamed biomass 1 into the first reactor unit 10 in which the biomass 1 is conveyed in the upward direction described by arrow 40. In particular, the biomass 1 and an amount of water 2 is fed into the first reactor unit 10 such that the biomass 1 gets impregnated by the amount of water 2 when the biomass 1 is transferred through the first reactor unit 10 by a conveyor means 11, e.g. a screw conveyor. For the

25 impregnation, the amount of water 2 is filled into the first reactor unit 10 up to a predetermined fill level 12 which is arranged above the bottom part of the first reactor unit 10 where the biomass 1 is fed into the first reactor unit 10. This means that the biomass 1 is introduced into the first reactor unit 10 at the bottom part of the first reactor unit 10, wherein after the impregnation of the biomass 1 within the first

30 reactor unit 10, the impregnated biomass 22 is discharged at the top part of the first

- 14 -

reactor unit 10. In this manner, it is possible that the whole biomass 1 introduced into the first reactor unit 10 is impregnated by the amount of water 2 present in the first reactor unit 10.

- 5 The discharged impregnated biomass 22 is then introduced into a separation unit 20 in which at least a part 21 of the amount of water 2 used for impregnation is separated from the impregnated biomass 22. A part 21c of the water separated in the separation unit 20 is recirculated back to the washing unit 4 where the part 21c of the water is reused for washing the biomass 1. Another part 21b of the water separated in
10 the separation unit 20 is recirculated back to the first reactor unit 10 where the part 21b of the water is reused as impregnation liquid for impregnating the biomass 1 within the first reactor unit 10. It is possible that another part 21a is discharged from the device 100 without reusing the discharged part 21a of water in the device 100.
- 15 The impregnated biomass 22 is transferred from the separation unit 20 to the second reactor unit 30. A predetermined pressure within the second reactor unit 30 is controlled using a plug screw 23 or a rotary valve arranged between the separation unit 20 and the second reactor unit 30. Therefore, the plug screw 23 or the rotary valve may also be described as a pressure controlling unit. Within the plug screw 23,
20 a further part 24 of impregnation liquid, e.g. water, may be separated from the impregnated biomass 22 before the impregnated biomass 22 is fed into the second reactor unit 30. The second reactor unit 30 may also be referred to as a high pressure reactor since a high pressure can be achieved within the second reactor unit 30. Pressures between 4 bar and 25 bar can be achieved. For example, pressure ranges
25 may be between 10 bar and 14 bar, between 4 bar and 10 bar or between 14 bar and 25 bar.

In the second reactor unit 30, a further reaction of the impregnated biomass 22 may be carried out, wherein a reaction between the biomass and the impregnation liquid,

- 15 -

e.g. the water, or a further catalyst introduced into the system takes place within the second reactor unit 30.

At least a part 7 of washing liquid present in the washed biomass 1 can be separated
5 from the washed biomass 1 in the compression unit, wherein the part 7 of the separated washing liquid is recirculated back to the washing unit 4 such that this part 7 of the washing liquid can be reused in the washing unit 4 for washing the biomass 1.

10 Fig. 3 shows another embodiment of the inventive device 100. The device 100 as shown in Fig. 3 comprises the same components as shown in Fig. 2 and further comprises a retention vessel 15 being arranged between the separation unit 20 and the first reactor unit 10. Within the retention vessel 15, the homogenization of the impregnated biomass 22 coming from the first reactor unit 10 may be provided. Such
15 a retention vessel 15 provides a more homogeneous and therefore a more efficient impregnation of the biomass before at least a part 21 of the impregnation liquid, e.g. the amount of water, is separated within the separation unit 20.

The biomass 1 is introduced into the washing unit 4 before it is transferred to the pre-
20 steaming unit 5. Again, a recirculated part 21c from the separation unit 20 may be used for washing the biomass 1 in the washing unit 4. However, a further amount of washing liquid 3, e.g. washing agent, is introduced into the washing unit 4. After pre-steaming the washed biomass 1 in the pre-steaming unit 5, the pre-steamed and washed biomass is compressed in a compression unit, for example by a plug screw 6,
25 such that the pre-steamed and washed biomass 1 can be efficiently introduced into the first reactor unit 10. At least a part 7 of washing liquid present in the washed biomass 1 can be separated from the washed biomass 1 in the compression unit, wherein the part 7 of the washing liquid is recirculated back to the washing unit 4 such that this part 7 of the washing liquid can be reused in the washing unit 4 for
30 washing the biomass 1.

- 16 -

The pre-steamed and washed biomass 1 is fed into the first reactor unit 10. Furthermore, an amount of water 2 is also fed into the first reactor unit 10 up to a predetermined fill level 12. The biomass 1 to be impregnated is conveyed in an upward direction 40 within the first reactor unit 10, for example by a conveyor means 11. Afterwards, the impregnated biomass 22 is fed into the retention vessel 15 in which a further impregnation of the biomass 1 using the amount of water 2 is carried out. Afterwards, the impregnated biomass 22 is transferred from the retention vessel 15 to the separation unit 20 in which at least a part 21 of the amount of water 2 is separated from the impregnated biomass 22. The part 21c of the water is then recirculated back to the washing unit 4 as described above. Another part 21b is recirculated back to the first reactor unit 10 such that this part 21b of water is reused as impregnation liquid in the first reactor unit 10. Another part 21a may be discharged from the whole system, e.g. the device 100.

15 The impregnated biomass 22 is then discharged from the separation unit 20 into the second reactor unit 30. A predetermined pressure within the second reactor unit 30 may be adjusted by an addition of steam to the impregnated biomass 22 in the second reactor unit 30. Therein, a plug screw 23 or a rotary valve arranged between the separation unit 20 and the second reactor unit 30 may establish a pressure seal
20 between the reactor unit 30 and upstream components. An amount of residual impregnation liquid 24 may be separated in the plug screw 23 arranged between the separation unit 20 and the second reactor unit 30.

It is possible that besides the amount of water 2 fed into the first reactor unit 10, a
25 catalyst, e.g. an acid, may also be introduced into the system, e.g. into the device 100, downstream the first reactor unit 10. However, it is also possible that a catalyst may be additionally introduced into the first reactor unit 10.

Fig. 4 shows a flow diagram of a method for treating biomass 1. In a step S1 of the
30 method, the biomass 1 is washed in a washing unit 4 using a washing liquid 3 before

feeding the biomass 1 into the first reactor unit 10. In another step S2, the biomass 1 is pre-steamed before the biomass 1 is fed into the first reactor unit 10 wherein a pressure and/or a temperature during the pre-steaming can be controlled. This pre-steaming of the biomass 1 may be carried out in a pre-steaming unit 5. In a further step S3, a temperature difference between the pre-steaming of the biomass 1 in the pre-steaming unit 5 and the impregnation of the biomass 1 in the first reactor unit 10 is controlled. In particular, a temperature difference between the temperature in the pre-steaming unit 5 and the temperature in the first reactor unit 10 may be controlled. In an another step S4, the biomass 1 is compressed in a compression unit using a plug screw 6 before feeding the compressed biomass 1 into the first reactor unit 10 for impregnation such that residual washing liquid 7 is separated from the biomass 1 and recirculated back to the washing unit 4. The residual washing liquid 7 is reused for washing the biomass 1 in the washing unit 4. In a further step S5 of the method, an amount of water 2 is fed into the first reactor unit 10 up to a predetermined fill level 12 of the first reactor unit 10. In another step S10, the biomass 1 and the amount of water 2 is fed into the first reactor unit 10 such that the biomass 1 is impregnated using the amount of water 2 while the biomass 1 is transferred through the first reactor unit 10 by a conveyor means 11. In a further step S11, the impregnated biomass 22 is transferred from the first reactor unit 10 into a retention vessel 15 before transferring the impregnated biomass 22 to a separation unit 20. In a further step S12, the impregnated biomass 22 is steamed in the retention vessel 15 by controlling a pressure within the retention vessel 15. Furthermore, it is possible that a pressurization and/or a steam treatment takes place in both the first reactor unit 10 and in the retention vessel 15. The pressure in the retention vessel 15 may be between 1 bar and 25 bar. For example, this pressure is between 1 bar and 2 bar or between 2 bar and 8 bar. It is possible that the pressure in the first reactor unit 10 is the same as in the retention vessel 15.

In a further step S20, the impregnated biomass 22 is transferred from the first reactor unit 10 or from the retention vessel 15 to the separation unit 20 in which at least a

- 18 -

- part 21 of the amount of water 2 used for impregnation can be separated from the impregnated biomass 22. In a further step S21, a part 21 of water separated in the separation unit 20 is recirculated back to the washing unit 4 wherein the recirculated part 21 of water is used for washing the biomass 1 in the washing unit 4. In a further
- 5 step S22, the part 21 of water separated in the separation unit 20 is recirculated back to the first reactor unit 10 wherein the recirculated part 21 of water is reused for impregnating the biomass 1 in the first reactor unit 10. In another step S23 of the method, a pressure is controlled within the second reactor unit 30 using a plug screw
- 10 23 or a rotary valve wherein the plug screw 23 or the rotary valve is arranged between the separation unit 20 and the second reactor unit 30. In another step S30, the impregnated biomass 22 is transferred from the separation unit 20 into the second reactor unit 30 in which the impregnated biomass 22 is subjected to the predetermined and/or controllable pressure.
- 15 While the invention has been illustrated and described in detail in the drawings and the foregoing description, such illustration and description are to be considered illustrative and exemplary and not restrictive; the invention is not limited to the disclosed embodiments. Other variations to the disclosed embodiments can be understood and effected by those skilled in the art and practicing the claimed
- 20 invention, from a study of the drawings, the disclosure, and the appended claims. In the claims the term “comprising” does not exclude other elements, and the indefinite article “a” or “an” does not exclude a plurality. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage. Any reference signs in
- 25 the claims should not be construed as limiting the scope of protection.

Claims

1. Method for treating biomass, comprising:

5 Feeding the biomass (1) and an amount of water (2) into a first reactor unit (10) such that the biomass (1) is impregnated using the amount of water (2) while the biomass (1) is transferred through the first reactor unit (10) by a conveyor means (11, S10);

10 Transferring the impregnated biomass (22) from the first reactor unit (10) to a separation unit (20) in which at least a part (21) of the amount of water (2) used for impregnation can be separated from the impregnated biomass (22, S20);

15 Transferring the impregnated biomass (22) from the separation unit (20) into a second reactor unit (30) in which the impregnated biomass (22) is subjected to a predetermined pressure (S30).

2. Method according to claim 1,

20 wherein the impregnation of the biomass (1) in the first reactor unit (10) is carried out exclusively using the amount of water (2) fed into the first reactor unit (10).

3. Method according to any one of the preceding claims, comprising:

Feeding the amount of water (2) into the first reactor unit (10) up to a predetermined fill level (12) of the first reactor unit (10, S5).

- 25 4. Method according to any one of the preceding claims, comprising:

Transferring the impregnated biomass (22) from the first reactor unit (10) into a retention vessel (15) before transferring the impregnated biomass (22) to the separation unit (20, S11);

30 Steaming the impregnated biomass (22) in the retention vessel (15) by controlling a pressure within the retention vessel (15, S12).

- 20 -

5. Method according to claim 4,
wherein the pressure in the retention vessel (15) is equal to a pressure
in the first reactor unit (10).
- 5
6. Method according to any one of the preceding claims, comprising,
Controlling the predetermined pressure within the second reactor unit
(30) using a plug screw (23) or a rotary valve, wherein the plug screw (23) or
the rotary valve is arranged between the separation unit (20) and the second
10 reactor unit (30, S23).
7. Method according to any one of the preceding claims, comprising:
Pre-steaming the biomass (1) before feeding the biomass (1) into the
first reactor unit (10), wherein a pressure and/or a temperature during the pre-
15 steaming can be controlled (S2).
8. Method according to claim 7:
Controlling a temperature difference between a temperature during the
pre-steaming of the biomass (1) and a temperature during the impregnation of
20 the biomass (1) in the first reactor unit (10, S3).
9. Method according to any one of the preceding claims, comprising:
Washing the biomass (1) in a washing unit (4) by means of a washing
liquid (3) before feeding the biomass (1) into the first reactor unit (10, S1).
- 25
10. Method according to claim 9, comprising:
Recirculating a part (21) of water separated in the separation unit (20)
back to the washing unit (4) and using the recirculated part (21) of water for
washing the biomass (1) in the washing unit (4, S21).
- 30

11. Method according to any one of claims 9 or 10, comprising:
Compressing the biomass (1) using a plug screw feeder (6) before feeding the compressed biomass (1) into the first reactor unit (10) for impregnation such that residual washing liquid (7) is separated from the biomass (1) and is recirculated back to the washing unit (4), wherein the residual washing liquid (7) is reused for washing the biomass (1) in the washing unit (4, S4).
12. Method according to any one of the preceding claims, comprising:
Recirculating the part (21) of water separated in the separation unit (20) back to the first reactor unit (10) and reusing the recirculated part (21) of water for impregnating the biomass (1) in the first reactor unit (10, S22).
13. Use of a method according to any one of the preceding claims for treating non-wood material.
14. Device for treating biomass, comprising:
a first reactor unit (10);
a separation unit (20) downstream of the first reactor unit (10);
a second reactor unit (30);
wherein the biomass (1) and an amount of water (2) are fed into the first reactor unit (10) such that the biomass (1) is impregnated using the amount of water (2) while the biomass (1) is transferred through the first reactor unit (10) by a conveyor means (11);
wherein the impregnated biomass (22) from the first reactor unit (10) is transferred to the separation unit (20) in which at least a part (21) of the amount of water (2) used for impregnation can be separated from the impregnated biomass (22);
wherein the impregnated biomass (22) from the separation unit (20) is

- 22 -

transferred into the second reactor unit (30) in which the impregnated biomass (22) is subjected to a predetermined pressure.

15. Device according to claim 14,
5 wherein the conveyor means (11) comprises at least one conveyor screw for transferring the biomass (1) through the first reactor unit (10) during impregnation.
16. Device according to any one of claims 14 or 15,
10 wherein the first reactor unit (10) is a vertically arranged, longitudinal vessel in which the biomass (1) is conveyed in an upward direction (40) when the biomass (1) is impregnated using the amount of water (2).

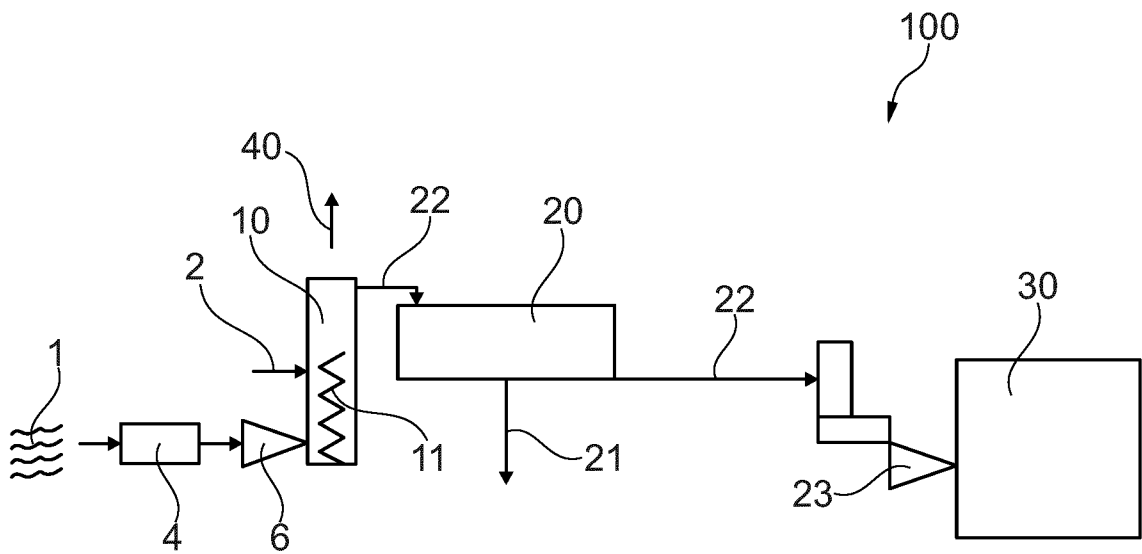


Fig. 1

2/3

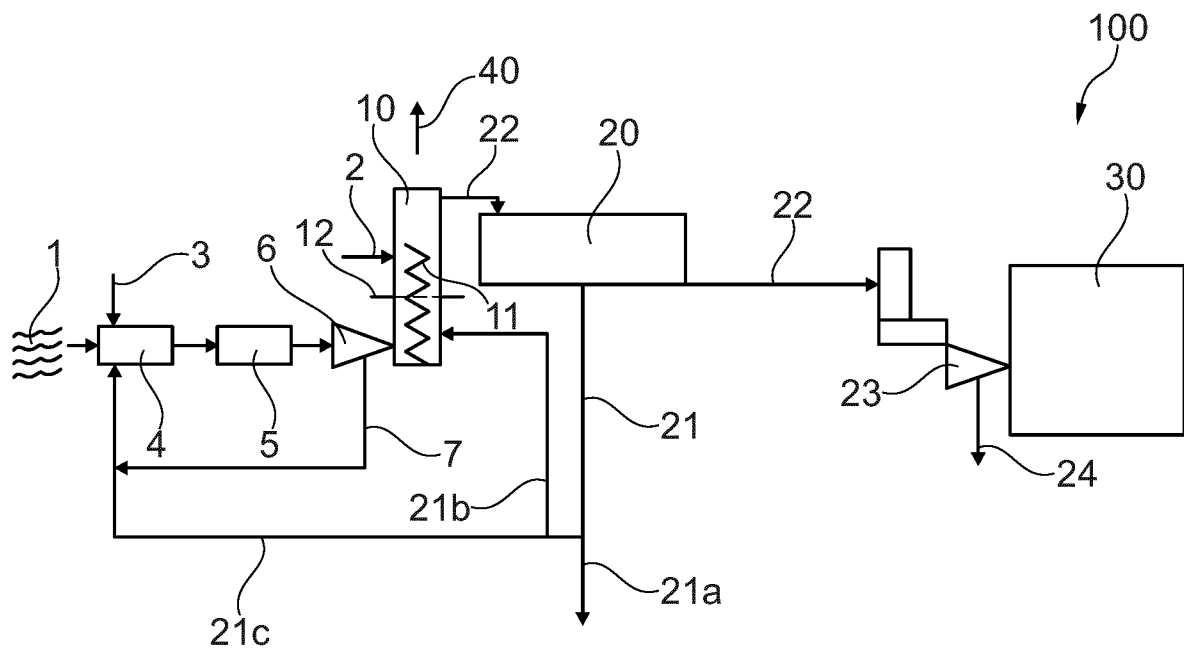


Fig. 2

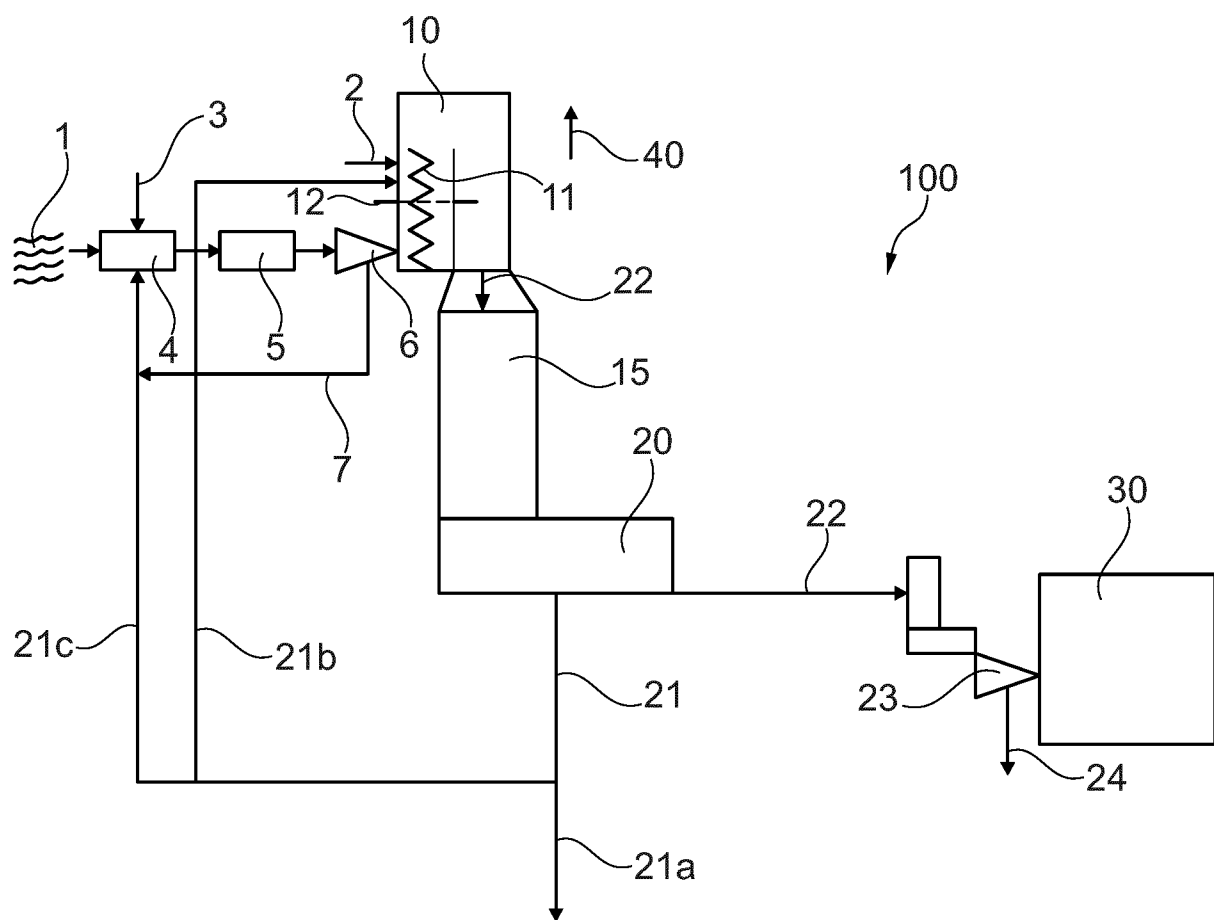


Fig. 3

3/3

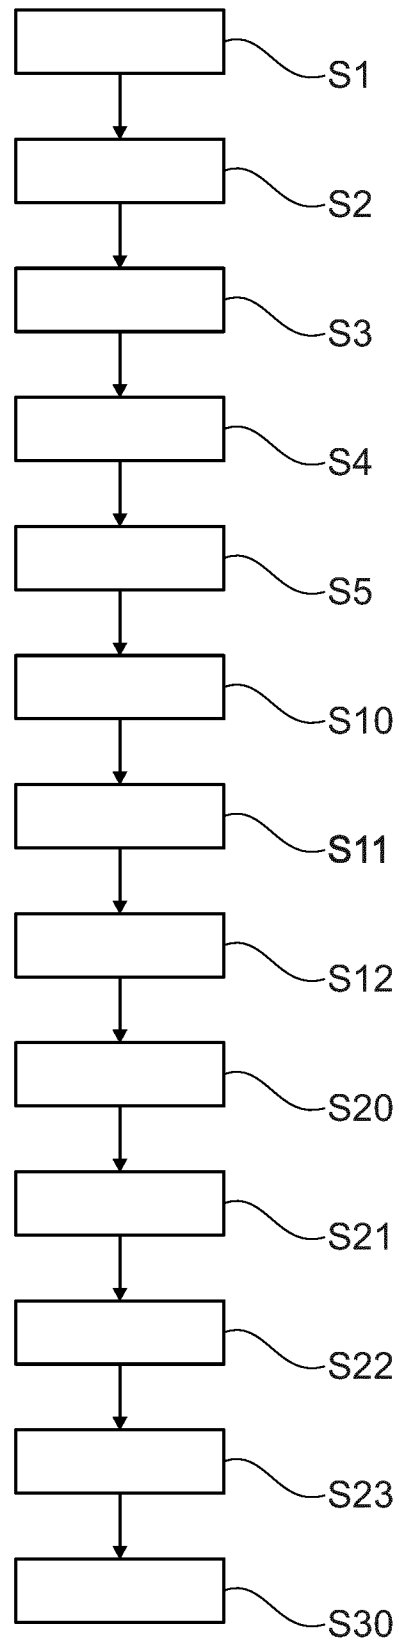


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/081916

A. CLASSIFICATION OF SUBJECT MATTER INV. D21C1/02 D21B1/22 D21B1/34 D21D1/34 D21D5/00 ADD.																	
According to International Patent Classification (IPC) or to both national classification and IPC																	
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) D21C Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data																	
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>X</td> <td>WO 2015/199604 A1 (VALMET OY [SE]) 30 December 2015 (2015-12-30) claim 10</td> <td>1-16</td> </tr> <tr> <td>X</td> <td>US 4 187 141 A (AHREL BO [CA]) 5 February 1980 (1980-02-05) claim 1</td> <td>1-16</td> </tr> <tr> <td>A</td> <td>WO 2009/012779 A2 (ATLAS STORD DENMARK [DK]; FOSBOL PEDER [DK]; HANSEN PALLE [DK]) 29 January 2009 (2009-01-29) claims 1-6</td> <td>1-16</td> </tr> <tr> <td>X</td> <td>WO 2007/009463 A2 (HOLM CHRISTENSEN BIOSYSTEMER A [DK]; HOLM CHRISTENSEN BOERGE [DK]; HOL) 25 January 2007 (2007-01-25) claims 1,17,18</td> <td>1-16</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X	WO 2015/199604 A1 (VALMET OY [SE]) 30 December 2015 (2015-12-30) claim 10	1-16	X	US 4 187 141 A (AHREL BO [CA]) 5 February 1980 (1980-02-05) claim 1	1-16	A	WO 2009/012779 A2 (ATLAS STORD DENMARK [DK]; FOSBOL PEDER [DK]; HANSEN PALLE [DK]) 29 January 2009 (2009-01-29) claims 1-6	1-16	X	WO 2007/009463 A2 (HOLM CHRISTENSEN BIOSYSTEMER A [DK]; HOLM CHRISTENSEN BOERGE [DK]; HOL) 25 January 2007 (2007-01-25) claims 1,17,18	1-16
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.															
X	WO 2015/199604 A1 (VALMET OY [SE]) 30 December 2015 (2015-12-30) claim 10	1-16															
X	US 4 187 141 A (AHREL BO [CA]) 5 February 1980 (1980-02-05) claim 1	1-16															
A	WO 2009/012779 A2 (ATLAS STORD DENMARK [DK]; FOSBOL PEDER [DK]; HANSEN PALLE [DK]) 29 January 2009 (2009-01-29) claims 1-6	1-16															
X	WO 2007/009463 A2 (HOLM CHRISTENSEN BIOSYSTEMER A [DK]; HOLM CHRISTENSEN BOERGE [DK]; HOL) 25 January 2007 (2007-01-25) claims 1,17,18	1-16															
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.																	
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family																	
Date of the actual completion of the international search		Date of mailing of the international search report															
9 January 2018		18/01/2018															
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Ponsaud, Philippe															

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/081916

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2015199604	A1	30-12-2015	EP 3161169 A1 03-05-2017 SE 1450789 A1 27-12-2015 US 2017175209 A1 22-06-2017 WO 2015199604 A1 30-12-2015
US 4187141	A	05-02-1980	NONE
WO 2009012779	A2	29-01-2009	AT 503027 T 15-04-2011 BR PI0814664 A2 18-02-2015 CA 2694245 A1 29-01-2009 DK 2185734 T3 18-07-2011 EP 2185734 A2 19-05-2010 US 2010216202 A1 26-08-2010 WO 2009012779 A2 29-01-2009
WO 2007009463	A2	25-01-2007	AU 2006272198 A1 25-01-2007 BR PI0613681 A2 13-07-2010 BR PI0622271 A2 09-08-2011 CA 2615844 A1 25-01-2007 CA 2831082 A1 25-01-2007 CA 2959268 A1 25-01-2007 CN 101268121 A 17-09-2008 CN 101798584 A 11-08-2010 DK 1910448 T3 02-01-2017 EP 1910448 A2 16-04-2008 EP 2172568 A1 07-04-2010 EP 2520608 A1 07-11-2012 EP 2520609 A1 07-11-2012 EP 2657275 A1 30-10-2013 ES 2606281 T3 23-03-2017 HR P20161565 T1 10-03-2017 MX 343301 B 01-11-2016 NZ 565629 A 30-06-2011 NZ 592233 A 31-08-2012 NZ 601075 A 31-01-2014 UA 100662 C2 25-01-2013 UA 114465 C2 26-06-2017 US 2010041119 A1 18-02-2010 US 2012138246 A1 07-06-2012 US 2013143263 A1 06-06-2013 US 2015232579 A1 20-08-2015 US 2016153010 A1 02-06-2016 WO 2007009463 A2 25-01-2007 ZA 200801439 B 26-11-2008