



(22) **Date de dépôt/Filing Date:** 2013/09/12

(41) **Mise à la disp. pub./Open to Public Insp.:** 2015/03/12

(45) **Date de délivrance/Issue Date:** 2020/10/06

(51) **Cl.Int./Int.Cl.** **B61D 3/00** (2006.01),
B61D 17/10 (2006.01)


(72) **Inventeurs/Inventors:**
BLACK, KEN, CA;
BATCHELOR, JAMES, CA;
FORBES, JAMES W., CA;
QUAN, DAMON KING, CA

(73) **Propriétaire/Owner:**
NATIONAL STEEL CAR LIMITED, CA

(74) **Agent:** RIDOUT & MAYBEE LLP

(54) **Titre :** WAGON DE MARCHANDISES

(54) **Title:** RAILROAD FREIGHT CAR

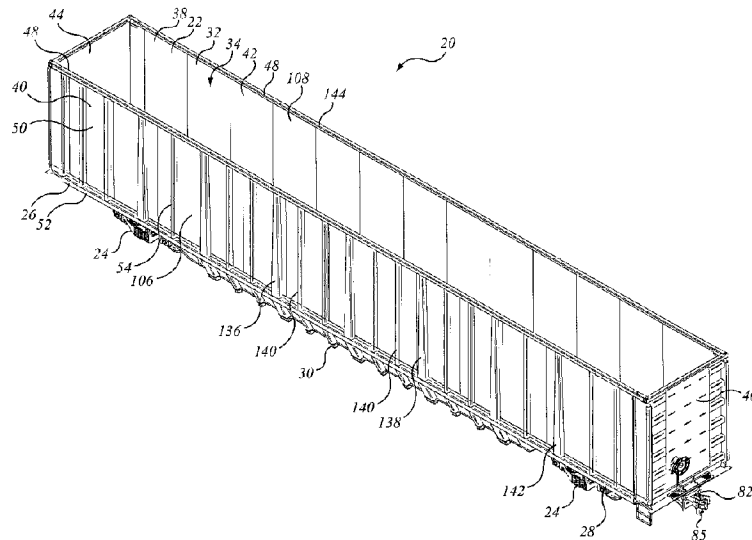

(57) **Abrégé/Abstract:**

A drop-center railroad freight car may have a gondola body for carrying lading, which may have end sections and a deep central section therebetween. The body may include a decking or floor structure, and longitudinally extending side beams bordering the floor structure. The car may have U-shaped bending-moment transmitting cross-bearers. The cross-bearers and side beam stiffeners may have inner and outer flange continuity such as to transmit a bending moment. The car may have stub sills. The stub sills may each have an inboard goose-neck that extends downward and inboard. The goose-neck may have a longitudinally extending portion that connects to the endmost cross-bearer of the central portion of the car. The main shear plate may lap the side sills, and may be bent downwardly to mate with the end margins of the side sheet lower portion to form a converging box-like truncated pyramidal structure.

Rail Road Freight Car

Abstract

5 A drop-center railroad freight car may have a gondola body for carrying lading, which
may have end sections and a deep central section therebetween. The body may include a
decking or floor structure, and longitudinally extending side beams bordering the floor structure.
The car may have U-shaped bending-moment transmitting cross-bearers. The cross-bearers and
side beam stiffeners may have inner and outer flange continuity such as to transmit a bending
10 moment. The car may have stub sills. The stub sills may each have an inboard goose-neck that
extends downward and inboard. The goose-neck may have a longitudinally extending portion
that connects to the endmost cross-bearer of the central portion of the car. The main shear plate
may lap the side sills, and may be bent downwardly to mate with the end margins of the side
sheet lower portion to form a converging box-like truncated pyramidal structure.

RAILROAD FREIGHT CAR

Field of the Invention

5 This invention relates to the field of railroad freight cars.

Background

10 In North American railroad history one of the more common types of freight car rolling stock has been the gondola car. Gondola cars have been used to transport many different kinds of freight, from bulk commodities to scrap steel. Traditionally, gondola cars have tended to have two relatively deep side beams. Typically, the side beams, the floor, and the end walls of the body of a gondola car define an open topped container, or receptacle, into which lading may be placed. Gondola cars may sometimes have a center sill of relatively modest size. The side
15 beams may often be the dominant vertical load bearing members, and may tend, at their ends, to be mated to a laterally extending main bolster and shear plate. The side beams themselves have tended to be deep beams having a top chord, a side sill, and a vertical web extending between the top chord and side sill.

20 The top chord is, typically, a continuous chord member running substantially the full length of the car. The top chord defines the upper edge or upper margin of the side beam of the car. It performs the function of the upper flange of the side beam. Most typically the top chord may be a hollow section. While top chords in the form of I-beams and C-channels can, and have been, used, top chords are frequently formed of closed hollow sections, such as rectangular (or
25 square) steel tubes. Most often, vertical lading in the gondola car may tend to cause the top chord to be placed in compression.

30 Similarly, a side sill may be, or may include, a bottom chord of the deep side beam. That is, the side sill may include a lengthwise running member that defines the lower bounding member of the side beam of the car. The lengthwise running member may run substantially the entire length of the side beam, and may function to define the lower flange of the side beam. That lengthwise member is sometimes called a side sill, and sometimes called a bottom chord, but in either case may tend to function as the lower flange of the side beam. The side sill terminology may be more commonly used where the longitudinally extending member links the
35 ends of cross-bearers and cross-ties at the edge of a deck or floor. In use, under vertical load the bottom chord or side sill, as it may be called, is most typically in tension. A side sill or bottom

chord member may typically tend to be of quite substantial cross-sectional area. It may have a cross-sectional area of a comparable order of magnitude to that of the top chord. It may not necessarily be of closed hollow section, but may, for example, have the form of a large angle iron. Under vertical loading, the top chord and bottom chord may tend to work in opposition to carry bending moments from the center of the car to the end sections, with the vertical side sheets of the car carrying shear between the top chord and the bottom chord.

Summary of the Invention

10 In an aspect of the invention there is a railroad gondola car. It has a gondola car body carried by railroad car trucks for rolling motion in a lengthwise direction along railroad tracks. The gondola car body includes a drop-center portion located between the trucks. The drop-center portion has a floor structure and a wall structure standing upwardly of the floor structure. The floor structure and the wall structure define a lading receptacle. The drop center portion of the floor structure having at least one cross-wise oriented bending-moment-transmitting frame.

In a feature of that aspect of the invention, the car is a stub sill car. In another feature, the drop center portion of the car is free of a center sill. In yet another feature, the car has a stub center sill. The stub center sill has an inboard end that terminates at the drop-center portion. The inboard end has a goose-neck formed thereat. The goose-neck co-operates with the drop center portion.

25 In another aspect of the invention there is a drop-center railroad freight car. A gondola car body is mounted on trucks for rolling motion in a longitudinal direction along railroad tracks. The gondola car body has first and second end portions and a deeper central portion located longitudinally between the first and second end portions. The central portion has a floor and at least a first cross-member to which the floor is mounted. The first cross-member defines a spring. The spring has a middle portion and first and second ends. The first and second ends are upturned relative to the central portion. In a further feature, the cross-member has the form of an upwardly opening bow member. In another further feature, each of the end portions is joined to the central portion at a structural knee. In a still another further feature, the car has first and second stub center sills mounted at the first and second end sections respectively. In another feature, the freight car is free of a straight-through center sill. In still another feature, the freight car has first and second laterally spaced apart side sills, and the first and second ends of the cross-bearer extend upwardly toward the first and second side sills respectively.

In another aspect of the invention, there is a drop-center railroad freight car. It has a gondola car body mounted on trucks for rolling motion in a longitudinal direction along railroad tracks. The gondola car body has first and second end portions and a deeper central portion located longitudinally between the first and second end portions. The gondola car body is free of a straight-through center sill. The deeper central portion has a floor. The deeper central portion has at least a first cross-bearer to which the floor is mounted.

In a feature of that aspect of the invention, the cross-member has the form of an upwardly opening bow member. In another feature, each of the end portions is joined to the central portion at a structural knee. In a further feature, each of the end portions of the first cross-member extend upwardly and laterally outwardly on an incline corresponding to the underframe portion of AAR Plate C. In another feature, the gondola car body has first and second sidewalls running along opposite sides thereof. The first and second sidewalls have upstanding posts and top chords. The first cross-bearer is aligned with respective posts of the first and second sidewall whereby the posts and the first cross-bearer co-operate as a spring resistive to lateral deflection of the top chords.

In another feature, the car has first and second stub center sills mounted at the first and second end sections respectively. Alternately expressed, the freight car is free of a straight-through center sill. In another feature, the freight car has first and second laterally spaced apart side sills, and the first and second ends of the cross-bearer extend upwardly toward the first and second side sills respectively. In another feature, each of the first and second end sections have respective first and second stub center sills; and the first center sill has a downwardly inclined goose-neck. In another feature, the goose-neck of the first stub center sill terminates at an endmost cross-bearer of the central portion. In still another feature, the goose-neck of the first stub center sill meets the endmost cross-member at a structural knee.

In another aspect of the invention there is a drop-center railroad gondola car. It has a gondola body having first and second end sections and a drop-center middle section therebetween. The drop center middle section has at least a first cross-bearer, the first cross-bearer having a U-shape.

In another feature of that aspect of the invention the gondola body has first and second side sills, and the U-shaped cross-bearer has first and second upturned ends connected to the first and second side sills respectively. In another feature, the first cross-bearer has a low central portion, and first and second upwardly extending ends connected thereto. The first end portion is

connected to the central portion at a first elbow. The second end portion being connected to the central portion at a second elbow. In a further feature, the first and second elbows are structural knees.

5 In another aspect of the invention, there is a drop-center railroad gondola car. It has first and second end sections, and a deeper central portion located length-wise between the first and second end sections. It has a floor, and a containment wall standing upwardly therefrom, the floor and containment wall defining a receptacle for lading, the containment wall including first and second walls extending length-wise along opposite side of the gondola car. Each of the end
10 sections has a main shear web. The main shear web has a substantially horizontal first portion extending cross-wise between the first and second side walls. The main shear web has a lengthwise inboard second portion defining a main shear web extension. The second portion extends length-wise inboard and downward of the first portion. The second portion of the main shear web has margins mated with predominantly downwardly extending margins of the first and
15 second side walls.

 In a feature of that aspect of the invention, the first and second wall members have upper portions and lower portions. The lower portions are angled downwardly and cross-wise inwardly. The lower portions mate with the second portion of the main shear web to define a
20 box end that converges both length-wise and cross-wise. In another feature, the gondola car has straight through side sills running lengthwise from end section to end section. The first portion of the main shear web mates with the side sills at a lap joint. The main shear web has a margin that deviates crosswise inboard of the lap joint to mate with the sidewalls downwardly of the side sills. In another feature, the second portion of the main shear web defines at least a portion of an
25 intermediate bulkhead between one of the first and second end portions and the central portion of the gondola car. In another feature, the gondola car has a stub center sill mated to the main shear web. The stub center sill has a downwardly and lengthwise inboard extending member mated to the second portion of the main shear web. In yet another feature, the central portion of the gondola car has an endmost cross-bearer, and the stub center sill includes a member mated to the
30 endmost cross-bearer. In still yet another feature, the first and second sidewalls of the gondola car have respective top chords and side sheets extending between the top chords and side sills. The first and second sidewalls have side posts mounted to the side sheets. The posts extend between the side sills and the top chords. Particular side posts are in bending-moment-transmitting connection with the endmost cross-bearer whereby a large spring is formed to resist
35 lateral deflection of the side walls and top chords.

It may be understood that the various aspects and features may be mixed and matched as may be appropriate. It may also be understood that the foregoing is not intended to be an exhaustive listing of aspects and features of the invention. These and other aspects and features of the invention may be understood with reference to the description which follows, and with the aid of the illustrations of a number of examples.

Brief Description of the Figures

The description is accompanied by a set of illustrative Figures in which:

Figure **1a** is an isometric, general arrangement view of a drop-center railroad freight car;

Figure **1b** shows a side, or elevation, view of the freight car of Figure **1a**;

Figure **1c** shows a top, or plan, view of the drop-center railroad freight car of Figure **1a**;

Figure **1d** shows a bottom view of the drop-center railroad freight car of Figure **1a**;

Figure **1e** shows an end view of the railroad freight car of Figure **1a**;

Figure **1f** shows a side, or elevation, cross-section taken along the longitudinal centerline of the drop-center railroad freight car of Figure **1a**;

Figure **2a** is a view, in elevation, on section '2a - 2a' of the freight car of Figure **1b** looking longitudinally outboard toward the main bolster with the truck removed;

Figure **2b** is a cross-sectional view, in elevation, on section '2b - 2b' of the railroad freight car of Figure **1c** looking toward a cross-bearer;

Figure **2c** is an enlarged detail of a cross-section of a cross-member of the railroad freight car of Figure **2b**;

Figure **3a** is an isometric underside view of a portion of the freight car of Figure **1a**;

Figure **3b** is an enlarged detail of the isometric view of Figure **3a** showing a transition between a stub center sill and a drop-center cross-bearer;

Figure **3c** is an enlarged detail of a side sheet transition abreast of the view of Figure **3a**;

Figure **3d** is an enlarged detail of the cross-section of Figure **1f**;

Figure **4a** is an isometric, general arrangement view of another alternate embodiment of railroad freight car to that of Figure **1a** having internal structural members;

Figure **4b** shows a side, or elevation, view of the railroad freight car of Figure **4a**;

Figure **4c** is longitudinal sectional view, in elevation, along the centerline of the railroad freight car of Figure **4b**;

Figure **4d** is a left-hand half cross-sectional view, in elevation, on section '4d - 4d' of the railroad freight car of Figure **4b** looking toward a cross-bearer;

Figure 4e is an enlarged detail of a cross-section of a cross-bearer to side post knee of the railroad freight car of Figure 4a; and

Figure 4f is a view of the detail of Figure 4e, looking outboard on arrow '4f'.

5 **Detailed Description**

10 The description that follows, and the embodiments described therein, are provided by way of illustration of an example, or examples, of particular embodiments of the principles, aspects or features of the present invention. These examples are provided for the purposes of explanation, and not of limitation, of those principles and of the invention. In the description, like parts are marked throughout the specification and the drawings with the same respective reference numerals. The drawings may be taken as being to scale unless noted otherwise.

15 The terminology used in this specification is thought to be consistent with the customary and ordinary meanings of those terms as they would be understood by a person of ordinary skill in the railroad industry in North America. The Applicant expressly excludes all interpretations that are inconsistent with this specification, and, in particular, expressly excludes any interpretation of the claims or the language used in this specification such as may be made in the USPTO, or in any other Patent Office, other than those interpretations for which express support
20 can be demonstrated in this specification or in objective evidence of record, (for example, earlier publications by persons not employed by the USPTO or any other Patent Office), demonstrating how the terms are used and understood by persons of ordinary skill in the art, or by way of expert evidence of a person or persons of at least 10 years' experience in the railroad industry in North America or in other former territories of the British Empire and Commonwealth.

25 In terms of general orientation and directional nomenclature, for railroad cars described herein the longitudinal or lengthwise direction is defined as being coincident with the rolling direction of the railroad car, or railroad car unit, when located on tangent (that is, straight) track. In the case of a railroad car having a center sill, be it a stub sill or a straight-through center sill,
30 the longitudinal direction is parallel to the center sill, and parallel to the top chords and side sills, as may be. Unless otherwise noted, vertical, or upward and downward, are terms that use top of rail, **TOR**, as a datum. In the context of the car as a whole, the terms cross-wise, lateral, or laterally outboard, or transverse, or transversely outboard refer to a distance or orientation relative to the longitudinal centerline of the railroad car, or car unit, or of the centerline of a
35 centerplate at a truck center. The term "longitudinally inboard", or "longitudinally outboard" is a distance taken relative to a mid-span lateral section of the car, or car unit. The commonly used

engineering terms “proud”, “flush” and “shy” may be used herein to denote items that, respectively, protrude beyond an adjacent element, are level with an adjacent element, or do not extend as far as an adjacent element, the terms corresponding conceptually to the conditions of “greater than”, “equal to” and “less than”. The directions correspond generally to a Cartesian frame of reference in which the x-direction is longitudinal, the y-direction is lateral, and the z-direction is vertical. Pitching motion is angular motion of a railcar unit about a horizontal axis perpendicular to the longitudinal direction. Yawing is angular motion about a vertical axis. Roll is angular motion about the longitudinal axis. Given that the railroad car described herein may tend to have both longitudinal and transverse axes of symmetry, a description of one half of the car may generally also be intended to describe the other half as well, allowing for differences between right hand and left hand parts. In this description, if used, the abbreviation kpsi stands for thousands of pounds per square inch. Also, it may be taken as a default that the structure of the car is of all-welded mild steel fabrication except as otherwise shown in the illustrations or indicated in the text. This need not necessarily be the case. Other materials, such as aluminum or stainless steel might be used.

In this discussion it may be understood that persons of ordinary skill in the art are familiar with the Rules and Standards of the Association of American Railroads (the AAR), which govern interchange service in North America. This specification or the accompanying illustrations may refer to standards of the Association of American Railroads (AAR), such as to AAR plate sizes. To the extent necessary or appropriate, those references are to be interpreted in a manner consistent with the Rules and Standards as extant on the earliest of the date of filing of this application or the date of priority of the earliest application from which this application claims priority, as if they formed part of this specification on that date.

Figure 1a shows an isometric view from above and to one corner of an example of a railroad car **20** that is intended to be generically representative of a wide range of railroad cars, and in particular railroad freight cars in which the present invention may be incorporated. While car **20** may be suitable for many different uses, it may in one embodiment be a gondola car, which may be used for the carriage of bulk commodities. With the exception of brake fittings, safety appliances and other secondary fittings, car **20** is substantially symmetrical about both its longitudinal and transverse, or lateral, centreline axes. Consequently, where reference is made to a first or left hand side beam, or first or left hand bolster, it will be understood that the car has first and second, left and right hand side beams, bolsters and so on.

Railroad freight car **20** has a rail car body **22** and a pair of first and second trucks **24** upon

which rail car body **22** is carried for rolling motion along railroad tracks in the manner of railroad cars generally. Railroad freight car **20** is a “drop-center” railroad car. That is, it has first and second end sections, **26**, **28** each carried over a truck **24**, and a medial or central portion **30** located longitudinally between end sections **26** and **28**. Medial or central portion **30** is deeper than end portions **26** and **28**, such that the lowermost portion of central portion **30** is lower than end sections **26** and **28**.

Rail car body **22** may include a wall structure **32** defining a lading containment receptacle **34**, in which lading may be carried. Wall structure **32** may include a base wall, which may be in the nature of a floor or flooring **36**, and a generally upstanding peripheral wall **38** which may include a pair of first and second side walls **40**, **42**, and first and second end walls **44**, **46**. Flooring **36**, sidewalls **40**, **42** and first and second end walls **44**, **46** may tend to define an open topped box, namely receptacle **34**, into which lading may be introduced. Generally speaking, car **20** may be of all steel, or predominantly steel construction, although in some embodiments other materials such as aluminum or engineered polymers or composites may be used for some or a predominant portion of the containment receptacle structure. Side walls **40**, **42** stand vertically, or predominantly vertically, upwardly from flooring **36**. Inclined sheets or gussets **35** may be located at the junction of flooring **36** and end walls **44**, **46**, such as may protect the junction and facilitate unloading the car with a hydraulic shovel.

As illustrated in the embodiment of Figure **1a**, each of sidewalls **40**, **42** may have a top chord **48**, a side sheet, **50**, and a side sill **52**. Each side wall **40**, **42** has an array of sidewall stiffeners **54**, mated to side sheet **50**, that extend between side sill **52** and top chord **48**. In the embodiment illustrated, the main shear plate is carried at the level of, and defines, the top cover plate of the draft pocket (i.e., the top flange of the stub sill, as discussed below). The bottom flange of side sill **52** mates with the main shear plate. In the terminology defined herein, the “dropped center” is that portion of the car where the bottom of the containment receptacle lies, or extends, below the level of side sills **52**, i.e., also below the level of the main shear plate of the respective end sections.

Flooring **32** may include a floor panel **56**, which may be made of a plurality of floor sheets joined together, in an abutting fashion such as may yield a continuous lading containing surface, or, in one embodiment, may be made from a single, monolithic steel sheet **58**. Steel sheet **56** may be a single sheet having its profile cut from a monolithic sheet of stock by a plasma arc cutting device, or cut at the steel mill. Use of a single sheet may simplify manufacture. In the case of drop center car **20**, sheet **58** may, after being cut, be formed on a break or other

bending tool to form bends as indicated at **60**, **62**, **64**, and **66**, such as to yield a first end portion **68**, a second end portion **70**, a central portion **72**, and first and second transition portions **74** and **76**, transition portion **74** being located between, and adjoining, first end portion **68** and central portion **72**; transition portion **76** being located between, and adjoining, second end portion **70** and central portion **72**. As bent or otherwise formed, central portion **72** and end portions **68** and **70** may tend to lie in substantially horizontal planes, central portion **72** being stepped downwardly from end portions **68** and **70**; and transition portions **74** and **76** running through the respective height change regions of the upward step. Transition portions **74** and **76** may also be termed bulkheads. In the example illustrated, they are intermediate bulkheads (i.e., their location is intermediate the ends of the car) and they may be sloped bulkheads. Alternatively, floor panel **56** may not be entirely of one sheet, but may be predominantly of one sheet, such that, by area, more than half of floor panel **56** is cut from a single monolithic piece of stock. In another embodiment more than 1/4 of floor panel **56** is cut from a single piece of monolithic stock. In another embodiment more than 3/4 of floor panel **56** may be cut from a single monolithic piece of stock, such as rolled sheet or plate. Floor panel **56** may be between 1/4 and 3/4 inch thick steel plate, and may, in one embodiment be between 5/16 and 1/2 inches thick, and, one embodiment may be about 7/16" thick, and may provide a uniform common flange thickness above the center sill, cross-bearings, cross-ties and underneath the side beam web. Alternatively, each of portions **68**, **70**, **72**, **74** and **76** may be separate pieces, being welded together on assembly, or, alternatively, portions **68** and **74** may be formed as a single piece with a radiused bend as at **60**, and portions **70** and **76** may be formed as a single piece with a radiused bend as at **66**.

Each of end sections **26** of body **22** of car **20** may include an underframe member such as a longitudinally running stub center sill, or simply a "stub sill" **80**. A stub sill is a sill that runs only part of the length of the car inboard from the striker **82**, and is to be contrasted with a "straight-through" center sill which runs the full length of the car from striker to striker. Stub sill **80** may have a draft sill, or draft sill portion **84** at the longitudinally outboard end thereof, into which draft gear fittings and releasable couplers **85** may be mounted. Respective stub sills **80** may be fabricated by welding a pair of spaced apart webs **86**, **88** to the underside of portions **68** and **70** of floor panel **56**. Stub sill **80** may have a bottom flange member **90**, such as may be in the nature of a bottom or lower cover plate **92**, welded across the bottom edges of webs **86**, **88**. Stub sill **80** may also include internal web separators.

Generally speaking, a center sill may tend to have a distinct top flange, a bottom flange, and two webs extending between, and carrying vertical shear between, the top and bottom flanges. Gondola cars have tended to have had underframes that included a center sill, side sills,

and cross-bearers and cross-ties extending between the center sill and side sills. Not infrequently, the cars have also had longitudinally running stringers at spaced intervals between the side sills and the center sill, carried by the cross-bearers and cross-ties. Some gondola cars had floors of wooden timbers, or planks, laid side by side over the stringers and over the center sill. In such a car, analysis of the resistance to vertical bending of the car might well have tended not to have attributed any strength to the wooden floor members.

In railroad freight car **20**, stub sill **80** has a distinct bottom flange **90**, and vertical webs **86, 88**. Stub sill **80** also has a top flange, that top flange being a central region **94** of floor panel portion **68** that is influenced by the presence of webs **86, 88**. That region of influence may extend between webs **86, 88** and a distance laterally outboard from each of them to yield an "effective width". That effective width may be equivalent to roughly 40 to 60 times the thickness of panel **56** plus the distance between the webs. The effective width distance may sometimes be estimated as being about 44 - 48 times the thickness. In one embodiment, panel **56** may be abnormally thick for a floor sheet. That is, floor panel **56** may be more than 5/16 inches thick, and may be more than 3/8 inches thick. In one embodiment floor panel **56** may be about 7/16 inches thick, such that the effective width of top flange region **94** may extend roughly 8 - 12 inches (e.g., about 10 1/2 inches) outboard of webs **86, 88**. Inasmuch as webs **86, 88** are welded directly to the underside of floor panel **44**, there is a direct path for shear flow to pass between them, in contrast to arrangements in which the center sill has a top flange, and the floor sheets are then mounted above, and in addition to, that top flange such that shear flow from the webs cannot pass directly into the floor sheet but must flow via the intermediate medium of the center sill top flange. By contrast, in one embodiment of car **20**, in vertical bending a predominant portion of the shear flow from webs **86, 88**, (indeed, all of it), flows directly to and from floor panel **56** across the weld interface between the upper marginal edges of webs **86, 88** and the underside of floor panel **56**. In this embodiment there is no other flange or cap plate, or doubler plate exchanging shear flow with webs **86, 88**.

Longitudinally inboard of the draft sill is the truck center, at which there is a center plate **96** such as may seat within a mating center plate bowl of a truck, such as truck **24**. Longitudinally inboard of the truck center, stub sill **50** may have a downwardly depending goose-neck **98**.

Railroad car **20** may also include an array of supports or reinforcements **100** that run cross-wise between side beams **106, 108**. That array includes an array of cross-bearers **102** and may include an array of cross-ties **104**. Car **20** may include longitudinally extending first and

second side beams **106, 108**. Those side beams may define part or all of side walls **36, 38**, and may be the dominant structural assemblies of car **20** in terms of resistance to vertical bending. They may be aided in that resistance by the co-operative adjoining effective flange width region of the floor panel. Each cross-bearer **102** extends across the full width of the car between side beams **106** and **108**. Each cross-bearer has a moment connection at both ends to respective side beams **106** and **108**. Each cross-tie **104** extends between side beams **106, 108**. Expressed somewhat differently, the ability of the connection at the junction cross-tie and the sidewall stiffener to carry a moment may be smaller than, if not much smaller than, the ability of the junction between a cross-bearer and the corresponding sidewall stiffener to carry a moment. The difference may be greater than an order of magnitude, such that, for the purposes of this description the cross-tie junction may be considered not to pass, and not to be relied upon to pass, a moment from the side beam stiffener to the cross-tie. Car **20** may also have main bolsters **110** that extend laterally from stub sill **80** to side beams **106, 108**, at the locations of the truck centers (**CL Truck**).

Considering the embodiment of Figure **1d**, *et seq.*, each cross-bearer **102** may have the form of a beam mated to, or co-operating with, the floor panel. Each cross-bearer **102** may be generally U-shaped, or have the form of a U-frame, when viewed looking in the **x**-direction along the car. The U shape may include a low central portion **112**, and upwardly extending end portions **114, 116**, such that cross-bearer **102** may have the form of an upwardly opening U-shaped frame or bow. Central portion **112** may meet, and join, end portions **114, 116** at respective knees **118, 120**. Central portion **112** may be straight and horizontal. End portions **114, 116** may be straight and inclined on an angle, such as that corresponding to the angle of the AAR Plate C underframe profile. That is, at the joint or corner, there is a shear web **122** (or parallel, spaced-apart webs, as may be) that is surrounded about its periphery by the two flanges of central portion **112** on two sides, and the two flanges of an end portion, be it **114** or **116**, on the other two sides, such that the bending moment is carried into the corner in one pair of flanges, and out of the corner in the other pair of flanges. Each of end portions **114, 116** may be angled upwardly and outwardly on an angle corresponding to the angle of the AAR underframe clearance profile for AAR plate C (or plate F, which is the same). That is, unlike a membrane-style gondola tub, the underfloor cross-bearers **102** are designed to transmit, or to be capable of transmitting, a bending moment.

The beam defined by the cross-bearer may be of a T-section, or a closed hollow section, or a channel welded to the floor section. Each cross-bearer **102** may have the form of a channel welded toes-in to the floor panel, each toe being identified as a web **124**, and the back of the

channel being identified as flange member **128**. Each web **124** may abut floor panel **56** directly, and be connected directly thereto by such means as welding, thereby forming a closed hollow section. Cross-bearer **102** may not have a distinct top or upper flange apart from floor panel **56** such that there is a direct shear flow connection between the upper margins of the webs at which shear is exchanged directly with floor panel **56**, rather than, for example, passing into or through an intermediate member.

Each cross-tie **104** may have a single web **132**, or more than one web **132**. Each web **132** extends downwardly from floor panel **56**. A bottom flange **134** is welded across, and along, the bottom margins of the web, or webs **132** as may be. As with cross-bearers **102**, the web or webs **132** of cross-ties **106** may abut floor panel **56** directly, without the intervention, or addition, of a top flange or cover plate, other than floor panel **56**. As such, any shear flow may tend to flow directly from one to the other. In the embodiment of Figure **1a** et seq., the depth of webs **132** may be equal to the depth of webs **124**. Floor panel **56** may tend to define the upper flanges of both cross-bearers **102** and cross-ties **104**. As discussed above in the context of the top flange of center sill **56**, the effective cross-bearer upper flange region **102** of cross-bearer **102** and upper flange region **104** of cross-tie **106** may have an effective width of the order of 40 - 60 times the thickness of the floor panel sheet, and may for convenience sometimes be taken as being 44 - 48 times that thickness where there is a single web, and that much plus the web spacing where there are two webs. As shown in Figure **3a**, floor panel **56** may also overlie main bolsters **110**. Each main bolster **110** may have an upper flange, web, and lower flange, side bearing fittings and so on. The main bolster meets center sill **80** at the truck centers.

Side Beam Construction

Side beams **106** and **108** are substantially identical in structure, hence a description of side beam **108** may also be taken as a description of side beam **106**. Side beam **108** may include top chord **48**, and may have a generally upstanding shear membrane or web namely side sheet **50**, and side sill **52**. Side sheet **50** may have an inboard face or inwardly facing surface oriented toward receptacle **34**, and an outboard face, or outwardly facing surface oriented away from receptacle **34**. An array of vertical stiffeners **136** may be mounted to web or sheet **50** at longitudinally spaced locations along side-beams **106**, **108**. Vertical stiffeners **136** may be mounted outboard of web or sheet **50**. Vertical stiffeners **136** may include a first array, or sub array, of stiffeners **138** mounted at locations for structural co-operation with (and typically abreast of) cross-bearers **102**, and another array, or sub-array, of stiffeners **140** for structural co-operation with (and typically abreast of) cross-ties **104**. There may also be vertical stiffeners

abreast of, and for co-operation with, main bolsters **110**.

Top chord **48** may tend to function as the top flange of the side beam **106** (or **108**, as may be), and may have a formed cross-section. The cross-section may be that of a structural angle, or it may be that of an I-beam or wide flange beam, or it may be a specialty formed section, such as a bulb angle, or it may be a channel, or it may be a closed hollow section, such as a rectangular or square steel tube **144**. Top chord **48** may include one or more doublers along part or all of the upper portions thereof, such as a central, or mid-span portion corresponding to the location of greatest bending moment due to vertical lading loads in the gondola.

At the ends of the car, side sill **52** may lie upon, and be mated with, the laterally outboard margins of end section floor panel portions **68** and **70** which, in those locations define the main horizontal shear panels of car **20**, by which longitudinal buff and draft loads are transferred between stub sills **80** and side sills **52** (and hence side beams **106**, **108**). In the middle, or central, portion or section of car **20** between the end sections, the webs defined by side wall sheets **50** have depending skirts in the nature of web or sheet extensions **150** that extend downwardly and inwardly of side sills **52** and form the upper or inward closing members, or flanges, of cross-bearers **102** and cross-ties **104**. Side sheet extensions **150** may be formed integrally as a single sheet with side sheets **50**, and bent, or they may be separate sheets that overlap the inside face of side sill **52** and the lower margin of side sheets **50** and are welded thereto.

In one embodiment, side sheet **50** may be a monolithic steel sheet cut from a single piece of stock and which may run substantially the entire length of car **20** from truck center to truck center or from end bulkhead to end bulkhead. That monolithic steel sheet may have an upper margin mated with top chord **48**, typically at a welded lap joint; and a lower margin mated directly with the decking of the car end sections or with the side sheet extensions **150**, as may be. The junction at floor panel **56** may be such that floor panel **56** extends somewhat beyond sheet **50**, or extensions **150**, as may be in the laterally outboard direction by some marginal distance. That is to say, the lower margin of sheet **50**, or sheet extension **150**, may abut, and be welded to, floor panel **56**. This abutment may occur at a T in which floor panel **56** has a laterally outboard margin that may extend laterally proud of sheet **50** or extension **150**. Sheet **50** may not necessarily be a monolithic member, but could be made of two or more pieces joined together side-by-side, as by welding. Alternatively, sheet **50** might be connected to supporting members or to longitudinal stiffeners by mechanical fasteners such as Huck™ bolts.

In an alternate or optional feature, the connection between the lower margin of sheet **50** or extension **150** (as may be) and floor **56** may be overlain by a longitudinally running protective shroud member, which may be a chamfered flat bar lying at an angle such as might run a portion or substantially all of the length of the joint, and joined to floor panel **56** by welding, and may serve to protect the welded joint from damage in the instance where the car is unloaded using an hydraulic shovel or other potentially damaging equipment.

It may be that sheet **50** (or extension **150**) is a continuous sheet. It may also be that in some embodiments the greater portion of web or sheet **50** may be relatively thin, being perhaps less than 3/16 inches thick, and on some embodiments 1/8 inch thick or less. In one embodiment the web thickness may be about 1/10 inch. In one embodiment, a doubler, or base margin plate, is mounted along the bottom edge of the web, either on the inside, or on the outside. The doubler or base margin plate may have a depending margin that is not overlapped by the main portion of the web, and may itself be thicker than the main portion of the web, and may have a thickness comparable to (i.e., within +/- 40 % of) the thickness of floor sheet **56**.

Stiffeners

Vertical stiffener **138** may have a cross-section in a variety of forms, be it an I-beam, a structural section of arbitrary shape, an H.S.S. tube, and so on. In one embodiment, it may include a back **166** and a pair of legs **164** mounted to cooperate with an adjacent opposed region **168** of sheet **50**. Back **166** and legs **164** may be an integrally formed pressing, or a pre-fabricated sub-assembly which is then joined to sheet **50**. Back **166** may stand spaced from sheet **50**, and may be in a parallel plane thereto, which plane may be an x-z plane, with the width of stiffener **138** being in the longitudinal, or x-direction, and the length being in the vertical or z-direction, or generally upward direction toward top chord **48**. Legs **164** may connect back **166** to sheet or web **50**, the distal ends of legs **164** being connected thereto by suitable means, such as welding. A closed hollow section may be developed, such as may define an upwardly running beam for resisting lateral deflection of the webs defined by legs **164** and top chord member **48** of beam **106** (or **108**) generally. Stiffener **138** may be of constant section from bottom to top, or may have a tapering section. A tapering section may be broad at its base, near floor panel **56**, and narrower at its tip, where it may be connected to top chord **48**. Put somewhat differently, stiffener **138** may be such that, in the context of resisting lateral deflection of top chord **48** and sheet **50**, the effective second moment of area at the base (including the co-operative effect of the adjoining region of side sheet **50**) of stiffener **138** may be greater than at the tip, and may diminish progressively upwardly along the length thereof. The effective width of cooperative

adjoining region may be the distance between legs **164** plus an effective distance to either side thereof that is, in total, in the range of 20-30 times the thickness of sheet **50**. In one embodiment, this effective distance may be about 24 times that thickness plus the distance once between the webs.

5

A stiffener extension assembly **148** may be mounted beneath each of stiffeners **138** generally in line with each of cross-bearers **102**. Stiffener extension assembly **144** may include a first wall or member **154**, a second wall or member **156**, and a third wall or member **158**. The first, second, and third members may be substantially planar, and may be formed as a single, integrally formed part, such as a section of channel **160**, which may be a forged, pressed, roll formed or other structural section cut to length as a stub section. That length may be 6 inches or more. First wall member **154** may be the back of the stub channel **160**, and second and third wall members **156**, **158** may be the legs of the stub channel **160**. Stiffener extension assembly **148** may also include a fourth wall, such as may be identified as a cross-bearer bottom flange extension member **162**, which may be welded in place to mate with extension **148** opposite cross-bearer bottom flange member **128**, and which may be co-planar with bottom flange member **128**. Cross-bearer bottom flange extension member **162** may be welded across the lower end of the stub section of channel **160**, to provide a shear flow transfer connection along a line between the lower margins of second and third wall members **156** and **158** and bottom flange extension member **162**. The most laterally outboard distal end of bottom flange extension member **162** may adjoin, and connect to, the lowermost distal margin of first wall member **154**.

Stiffeners **140** may be mounted along sheet **50** in an alternating manner with stiffeners **138**. Each stiffener **140** may include a web member **172** running predominantly up-and-down on sheet **50**, and standing predominantly outwardly therefrom, and a flange member **170** running with, and having a shear flow connection with web member **172**, the flange member being spaced from sheet **50**, and typically standing laterally outboard thereof. In one embodiment, stiffener **140** may have the form of a formed section such as an angle, a hollow tube, which may be rectangular or square, a roll formed, forged, or U-pressing channel in which flange member **166** may be the back of the channel, and web member **172** may be either of two legs of the channel whose toes are welded to sheet **50**.

The upper end of stiffener **140** may be welded to top chord member **48**. As with stiffener **138** described above, the co-operation of the channel with sheet **50** may tend to yield a hollow structural section that stiffens sheet **50** in the up-and-down direction, perpendicular to top chord **48**, and that may tend to discourage buckling of sheet **50**. That structural section may tend to

have an effective inner flange width equal to the width of the channel between the legs, plus an effective flange width to either side of 40 to 60 (i.e., 20 to 30 times to each side, for a total of 40 to 60 times the thickness of sheet **50** (and which may in some embodiments be taken as roughly 44 - 48 times that thickness). Similar to cross-bearer **102**, cross-tie **104** may have arms or extensions that have the form of structural sections, such as channels, that are welded toes-in to side sheet extension **150**.

The Structural Knees

Conceptually, it may be desired for the side posts at the cross-bearer ends to act as springs that may tend to resist lateral deflection of top chord **48**, and perhaps of the sidebeam generally, due to the lading, and such other forces as may tend to wish to flex the top chords laterally. To this end the combination of the cross-bearer and the sideposts (with the adjacent portions of the sidewall sheets, sheet extensions, and the floor that act as co-operating flanges thereof) may function like the ribs or frames of a ship, generally defining a large spring, the tips of the spring ending at the top chords. In this regard, the lading may be considered as a distributed lateral pressure load, P_{Lading} working against the sidebeams **106**, **108**, and, more particularly, working against the containment membranes. The containment membranes may, in this context, be the webs, or web sheets **50** (and **150**), as well as floor panel **56**, and the end wall bulkheads. To this end, it may be desirable for the structural connection between the upstanding sideposts and their associated cross-bearers to be able to transmit a bending moment.

Inasmuch as the loads may be large and cyclic, it may be desirable to avoid sharp stress field discontinuities. The general object then is to transmit a moment couple carried by the sidepost flanges (e.g., **162** and **168**) into the flanges of the cross-bearer (e.g., **56** and **128**) while trying to avoid unduly sharp variations in the stress fields in the flanges and webs, and while trying to keep the stress fields relatively evenly spread out such that the peak stresses may be closer to the mean stresses than they might perhaps otherwise be.

As this is a multi-dimensional stress field problem, understanding may be aided by considering that a sidepost such as stiffener **138** is to be considered in the generic sense as representing any sidepost, which may have a single web, or in the context where it is understood that side post has a hollow section, such as a roll formed section having a back or flange, and a pair of spaced apart legs. There is an associated cross-bearer **102**. It may be that cross-bearer **102** has the same number of webs as the side post or it may not. There is structure identified in association with the sidepost that performs the function of a first flange member (region **168**);

that performs the function of a second flange member (back **166**); and also structure that performs the function of a shear transfer web member (leg **164**) joined to and working between the flanges. Region **168** runs vertically and extends in the longitudinal direction, substantially planar in the z-x plane. In extension **150** this need not necessarily be so. The plane of extension
5 **150** could be inclined with respect to the vertical, as illustrated, or might not necessarily be a plane at all, but could be a curve. Similarly, the other spaced-away flange member (back **162**) may tend to be planar, and may lie in a parallel x-z plane but, generically, it need not necessarily be planar, and need not be parallel, but could in one embodiment be at an inclined angle. The second flange member may tend to run, and to carry tensile or compressive stresses, in the
10 generally up-and-down direction of the flange generally. The web members' legs (**164**) are also intended to define a generic shear coupling between the flange members, and need not be planar. However, the web member, or members, may be generally planar, and may lie in a plane that is perpendicular to the flange members, such as a laterally outboard extending, vertically running, y-z plane.

15 The web member(s) carry the lateral load due to the lading working against the sidewall, and the flange members carry the accumulated bending moment associated with lateral load. Since the lateral load P_{Lading} is a distributed load working in the positive y-direction (i.e., laterally outboard) it is assumed that the inboard flange carries a tensile stress field, and the
20 outboard flange carries a compressive stress field, the two stress fields, σ_{t-Post} and σ_{c-Post} , being such that, when integrated and taken over their moment arms, define a moment couple, M_{Lading} having a generally clockwise sense when viewed looking into the page. Ideally, these stress fields would have a roughly uniform stress distributed across the flanges and the moment couple would be roughly the product of that stress multiplied by the areas of the flanges, multiplied by
25 the square of the moment arm, it being conservatively assumed that the share of the moment carried by the webs can be ignored as small. In this explanation, the inboard flange may be a flange of a formed post, or may be a portion of the side sheet web (e.g., sheet **50** or **150**) of the side beam of the railroad car more generally, where the effective width of the flange relative to the intersecting web is a function of side beam web sheet thickness, for example.

30 Similarly, there is structure identified in association with cross-bearer **102** that performs the function of a first, or upper, flange member; structure that performs the function of a second flange member, which may be a bottom or lower flange member such as member **128**; and also structure that performs the function of a shear transfer web member (webs **124**, **126**) joined to
35 and working between the flange members. That is, it may be substantially planar in the x-y plane, with a width perpendicular to the page, and a major dimension, or length, along which

tensile $\sigma_{t-Floor}$ or compressive $\sigma_{c-Floor}$ stresses due to the moment couple $M_{Reaction}$ may be carried, that major dimension being substantially parallel to the y axis laterally inboard of elbow **118** or **120**. This need not necessarily be so. The plane might be inclined, as along extension **150**, or might not necessarily be a plane at all, but could be a curve, or have a camber. Similarly, the lowest flange member **128** may tend to be planar, and may lie in a parallel plane to that of the upper (or inner) flange member, but, generically, it need not necessarily be planar, and need not be parallel. Webs **124** and **126** are intended to define a generic shear coupling between the flange members, and need not be planar. However, the web member or members may be generally planar, and may lie in a plane that is perpendicular to the flange members, such as a vertically extending, laterally outboard running, y-z plane.

As above, it may be assumed that each web member provides a shear connection between the flange members and that those flange members carry the bending moment reaction $M_{Reaction}$ to moment M_{Lading} . Since M_{Lading} works clockwise in the example, the reactive moment $M_{Reaction}$ must be counter-clockwise, such that it is assumed that the first, or upper flange member carries a tensile stress field $\sigma_{t-Floor}$, and the second or lower flange member carries a compressive stress field, $\sigma_{c-Floor}$, the two stress fields, when integrated and taken over their moment arms, defining the reactive moment couple. $M_{Reaction}$ clearing, for static determinacy the sum of $M_{Lading} + M_{Reaction} = 0$, i.e., they are equal and opposite.

Although not necessarily generically essential, and not always possible, it may often be desirable for the various flanges and associated webs to be substantially planar and mutually perpendicular. This may tend to minimize, or to avoid giving rise to, secondary or tertiary out-of-plane forces (and hence also to avoid the need for provision of reaction load paths for those secondary or tertiary out-of-plane loads). These secondary and tertiary out-of-plane forces may not necessarily be considered benign. Where out of plane members are employed, they may sometimes be employed in opposed pairs in which the out-of-plane effects may be equal and opposite, and so may tend to have a balancing effect.

The web portion in elbow **118** may be considered part of, or an extension of, **124** or **126** of cross-bearer **102**, or may be considered part of, or an extension of the web (i.e., leg **164**) of the post (stiffener **138**). This web portion may be part of either, or an extension of either, or may be a separate member that is not formed as an integral part of either, but is attached to both by fabrication, such as welding. Similarly, the web portion in elbow **118** may be bounded by stress field transfer members such as an inboard post flange continuity member (e.g., **150**), an outboard post flange continuity member (e.g., **154**), an upper cross-bearer flange continuity member (e.g.,

56), and a lower cross-bearer flange continuity member (e.g., 128). Each of these members may have the form of a substantially planar gusset, or may have another form, such that one edge abuts, or is substantially aligned with, and connected to communicate compressive or tensile forces with, the flange member with which it is associated, and another portion thereof runs along, and is connected to transmit shear forces to, an associated edge of the web portion of elbow 118.

For the purpose of this explanation with respect to laterally outwardly working forces tending to bend the upstanding posts outboard, the reaction to the vertical lading load is not discussed. The vertical lading load is reacted, primarily, in the side beam, which carries the vertical shear and the associated bending moment to the end sections of the car. The embodiment may share the common feature of flange continuity, and transfer of longitudinal stress fields in the flanges on one side of the knee by shear flow into shear stress fields in one or more webs at the corner of the knee, which are then again transferred into longitudinal stresses in the flanges on the other side of the knee. In these embodiments, the shear flow is encouraged to occur over a line interface, and out-of-plane deflection of the various flanges is discouraged.

Stub Center Sill Transition

As may be seen in Figures 3b, 3c and 3d, stub sill 80 has, at its inboard end, a stub sill extension, or goose-neck 98. The main portion of stub sill 80, which runs straight inboard from the truck center, may be identified as 180. Main portion 180 terminates at the interface wall defined by the sloped intermediate bulkhead, be it transition portion 74 or 76. At this location the stub sill side webs may be formed to conform to the downward curve of floor sheet 56. Goose neck 98 is attached to, or extends from, the inboard end of main portion 180 may include a first portion 182 and a second portion 184. First portion 182 may extend generally downward and longitudinally inboard along the slope of the transition portion. Second portion 184 may extend generally horizontally beneath floor 56 to terminate at an inboard end mated to the first structural cross-member, namely cross-bearer, 188. The cross-section of each of the portions of goose-neck 98 may be that of a channel welded toes-in against transition 74 or 76, as may be, and against the underside of floor 56. Second portion 184 may have the same depth of section as cross-bearer 188, and may have a bottom flange 190 that overlaps, and is welded to, back 192 of cross-bearer 188. Cross-bearer 188 has internal gussets 194 providing web continuity with webs 196 of second portion 184. The depth of section of cross-bearer 188 may be less than the depth of section of stub sill 80, such that first portion 182 tapers, as seen in its webs 178. The bottom or outer flange 186 of first portion 182 is spaced away from transition 74 or 76, and mates with

bottom flange **190** inboard, and stub sill bottom cover plate **92** outboard. An internal gusset **198** provides web continuity and vertical reaction at the junction of cover plate **92** and flange **190**. The co-operation of floor sheet **56**, second portion **184** and cross-bearer **188** is such that floor sheet **56** functions as a shear web carrying shear between the side sheet extensions **150** and stub sill **80**.

As noted above, side sheet extensions **150** are angled laterally inwardly and downwardly. Floor sheet **56** is trimmed laterally inwardly immediately longitudinally outboard of the transition, such that the laterally outboard edge of transition portion **74** (or **76**, as may be) of floor sheet **56** is abutted by, and is welded to, the tapering end margin of side sheet extension **150**, forming one corner of a downwardly converging truncated pyramid. Transition portion **74** is effectively a deep laterally extending beam that is inclined on a slope. The tapering mating with the inclined side sheets forms a torsionally stiff box end outboard of cross-bearer **188**.

Embodiment of Figure 4a

Figure **4a** shows an isometric view from above and to one corner of an example of a railroad car **200** that is intended to be generically representative of a wide range of railroad cars, and in particular railroad freight cars, in which the present invention may be incorporated. While car **200** may be suitable for many different uses, it may in one embodiment be a gondola car. With the exception of brake fittings, safety appliances and other secondary fittings, car **200** is substantially symmetrical about both its longitudinal and transverse, or lateral, centreline axes. Consequently, where reference is made to a first or left-hand side beam, or first or left-hand bolster, it will be understood that the car has first and second, left and right-hand side beams, bolsters and so on. Railroad car **200** is substantially similar to railroad car **20**, but differs therefrom in having its floor and side wall sheets outside of the framing structure rather than inside. That is, if the combination of cross-bearers and side posts in moment-transmitting connection each define, in effect, a skeletal rib or frame in car **20**, and each such frame lies outside floor sheet **56** and side sheets **50**, such as may facilitate unloading with hydraulic shovels, car **200** may include substantially the same structure, indicated as frame **202**. However, frames **202**, including cross-bearers **204** and cross-ties **206**, lie predominantly or wholly within lading containment receptacle **210**. The frames **202** may be made up of sets of cross-bearers **204** and side posts **218**; or of sets of cross-ties **206** and side posts **220**. Floor sheet **212** is mounted to on the outside, to define the bottom flange of those cross-bearers **204** and cross-ties **206** in the central portion of the car, and side sheets **214** and side sheet extensions **216** are similarly mounted on the outside of the posts **218** and cross-bearers **204** and cross-ties **206**, respectively.

Railroad car **200** may be a rotary dump car, i.e., one that is emptied by being turned upside-down. A car with outside sheets may have a larger internal volume than one with internal sheets, per unit length of car; and alternatively, may have a slightly lower center of gravity for sidewalls of a given height.

5

Railroad car **200** has a pair of first and second trucks **222**, **224**, and a rail car body **226** that is carried upon, and supported by, trucks **222**, **224** for rolling motion along railroad tracks in the manner of railroad cars generally. Rail car body **226** may include a wall structure **228** defining lading containment receptacle **210**. Wall structure **228** may include a base wall, which
10 may be in the nature of a floor or flooring **212**, and a generally upstanding peripheral wall **234** which may include a pair of first and second side walls **236**, and first and second end walls **240**, **242**. Flooring **212**, sidewalls **236** and first and second end walls **240**, **242** may define an open topped box, namely receptacle **210**, into which lading may be introduced. Generally speaking, car **200** may be of all steel, or predominantly steel construction, although in some embodiments
15 other materials such as aluminum or engineered polymers or composites may be used for some or a predominant portion of the containment receptacle structure. The car may have left and right hand side sills **244**, which may be roll formed to have a “P” shape, as indicated, such that inside leg **248** extends downward to meet side sheet extension **216**. Side sill **244** may have internal gussets to provide web continuity between the webs of post **218** (or **220**, as may be) and
20 the webs of cross-bearer **204** (or cross-tie **206**, as may be). The straight, i.e., predominantly vertical, join of leg **248** with extension **216** may tend to prevent creation of an internal ledge (i.e., on the underside of side sill **244**) upon which lading may lodge during emptying. Optionally, as in the alternative embodiment of Figure 4e, cross-bearers **204** and cross-ties **206** may have vertical webs with square corners in the normal manner of a channel of generally rectangular
25 section, or they may have outwardly inclined, or splayed webs **208**, again, the object of the splayed angle being to encourage or facilitate dislodgement of lading when car **200** is being unloaded, as by rotary dumping. The central portion **238** of cross-bearer **204** (and the corresponding central section of each cross-tie **206**) lies flat and horizontal on floor sheet **212**, while the up-turned end portions **246** lie against the inside face of side sheet extension **216**. As
30 above, the members of cross-bearers **204** and cross-ties **206** may be hollow structural sections, such as channels welded with their toes against the floor sheet or side sheet extension, as may be. The back **239** of the channel defining central portion **238** may extend through to side sheet extension **216**. An internal gusset **247** may be mounted to provide continuity to the back or flange of the channel forming end portion **246**. Similarly, car **200** may have a goose-neck
35 assembly **98** on the inboard end of the stub sill, in which the downward-angled portion of the goose-neck lies outside the transition bulkhead wall, be it **74** or **76**, and the horizontal portion

runs on top of floor sheet **212** to meet the end-most cross-bearer. The structure of goose-neck **98** is otherwise substantially the same in car **200** as it is in car **20**.

It may also be that rather than having one or more laterally extending internal bulkheads or partitions within the body of the wall structure defining receptacle **210** more generally, it may be that a clear space is obtained, free of, or substantially free of, internal lateral partitions or other laterally extending obstructions. For a high aspect ratio car, with relatively tall sides, the resistance of the top chord (and of the associated side beam web) to lateral deflection at the mid-span station may not be overly great, or may not be as great as might otherwise be desirable. To that end, rather than employ a laterally extending bulkhead to tie the top chords laterally, car **200** may employ springs. Those springs may be cantilever springs, such as may be defined by the co-operative effort of cross-bearers **204** and their associated vertical side-posts **218**, in which the side-posts are connected to the outboard ends of the cross-bearers at moment connections. Inasmuch as the location of greatest compliance to lateral deflection may tend to be the mid-span location, it may be that the additional spring stiffness may be more concentrated near the central section of the side beam than at the end sections. That is, either in terms of number of springs, or in terms of average spring rate per unit of length of side beam, the auxiliary resistance to lateral resistance of the top chord may be more densely concentrated at the mid-span location than toward the ends of the car. In one embodiment that may mean that two cross-bearers (and their associated moment connected side posts) are placed adjacent to each other without an intermediate cross-tie (with or without an associated side-post). It may mean that more than two cross-bearers (and their associated side-posts) are located side-by-side without intermediate cross-ties. In one embodiment there may be four such cross-bearer and side post sets arranged one beside the other without intervening cross-ties. Those multiple side-by-side cross-bearer and post sets may be located near to the mid-span cross-section of the car, and may be located symmetrically with respect to that cross-section.

In some embodiments, car **200** may be employed to carry materials that may tend to foul or grapple the inside of the car. For example, steel scrap may have sharp edges or protrusions. When the scrap is extracted from the car using an electromagnet, the protrusions may tend to wish to ride up the inside walls of the car body, and may have a tendency to grapple, impact, or tear at, the underside of the top chord. This may not be desirable.

In some embodiments the underside of the top chord may have, or may include, a shedding device which may serve to encourage the deflection of objects around the top chord, or may serve as a protective shield for the top chord. For example, in one embodiment, top chord

member **250** may be connected to the upper margin **252** of side sheet **214** at a lap joint. The lap joint may be against the outboard side face of top chord member **250**. In addition, the top chord assembly may include a protective shield member, or deflector member, such as may be in the nature of a skirt or fender **254**. Fender **254** may be located generally underneath top chord member **250**, and may provide a progressively lead-in for objects moving in the vertically upward direction. The lead-in may be sloped or tapered. An example of such a skirt is shed plate **256**. Shed plate **256** may be a roll formed member with a long dimension running generally parallel to top chord member **250**. Shed plate **256** may run along sheet **214** between vertical stiffener posts **218**. Alternatively, shed plate **256** may run continuously, or substantially continuously across the tops of stiffener posts **218**. Those posts **218** may be trimmed or chamfered at their upper ends to conform to the profile of shed plate **256**. The end of the post may then be welded circumferentially to shed plate **256**.

In this arrangement shed plate **256** may have an upper flange portion that may be formed to conform to the inside face of top chord member **250**, such that the upper margin of shed plate **256** may lap on the inside face of top chord member **250**, and may be welded thereto. The lower, or major, portion of shed plate **256** may extend downwardly and in the outboard direction to meet sheet **214**. The lower margin of shed plate **256** may be welded along its length to web or sheet **214**. The major portion may be substantially planar, and may extend along an angled, or inclined plane.

Various embodiments have been described in detail. Since changes in and or additions to the above-described examples may be made without departing from the nature, spirit or scope of the invention, the invention is not to be limited to those details.

Claims

I claim:

1. A railroad gondola car comprising:
5 a gondola car body carried by railroad car trucks for rolling motion in a lengthwise direction along railroad tracks;
said gondola car body including a drop-center portion located between the trucks;
said drop center portion having a floor structure and a wall structure standing upwardly
10 of said floor structure, said floor structure and said wall structure defining a lading receptacle; and
said drop center portion of said floor structure having at least one cross-wise oriented bending-moment-transmitting frame said frame being mounted outside of said lading receptacle whereby said lading receptacle is free of internal obstructions to
15 unloading.
2. The railroad gondola car of claim 1 wherein said car is a stub sill car.
3. The railroad gondola car of claim 1 wherein said drop center portion of said car is free of
20 a center sill.
4. The railroad gondola car of claim 1 wherein said car has a stub center sill, said stub center sill has an inboard end terminating at said drop-center portion; said inboard end having a goose-neck formed thereat, and said goose-neck co-operating with said drop center portion.
- 25 5. The railroad gondola car of claim 1 wherein said railroad gondola car is a drop-center railroad freight car, and wherein:
said gondola car body has first and second end sections and a deeper central section located longitudinally between said first and second end sections, said deeper central section defining said drop center portion of said railroad gondola car;
30 said floor structure including a floor and at least a first cross-member to which said floor is mounted;
said first cross-member being said bending moment transmitting frame and defining a spring;
said spring having a middle portion and first and second end portions; and
35 said first and second end portions of said spring being upturned relative to said middle portion.

6. The railroad gondola car of claim 5 wherein said cross-member has the form of an upwardly opening bow member.

7. The railroad gondola car of claim 5 wherein each of said end portions of said spring is joined to said middle portion of said spring at a structural knee.

8. The railroad gondola car of claim 5 wherein said car has first and second stub center sills mounted at said first and second end sections respectively.

9. The railroad gondola car of claim 5 wherein said freight car is free of a straight-through center sill.

10. The railroad gondola car of claim 5 wherein said cross-member is a cross-bearer, said freight car has first and second laterally spaced apart side sills, and said first and second end portions of said cross-bearer extend upwardly toward said first and second side sills respectively.

11. The railroad gondola car of claim 1 wherein said railroad freight car is a drop-center railroad freight car, comprising:

said gondola car body has first and second end sections and a deeper central section located longitudinally between said first and second end sections, said deeper central section defining said drop center portion of said railroad gondola car;

said gondola car body being free of a straight-through center sill;

said floor structure including a floor;

said bending-moment-transmitting frame including at least a first cross-bearer to which said floor is mounted; and

upwardly of said first cross-bearer said gondola car body being free of obstructions to unloading.

12. The railroad gondola car of claim 11 wherein said first cross-bearer has the form of an upwardly opening bow member.

13. The railroad gondola car of claim 11 wherein:

said first cross-bearer has a depressed central portion and first and second end portions; said depressed central portion of said first cross-bearer runs across said floor;

each of said end portions of said cross-bearer extends upwardly from said depressed central portion to a respective side beam of said gondola car body; and

each of said end portions of said cross-bearer is joined to said central portion of said cross-bearer at a respective structural knee.

14. The railroad gondola car of claim 13 wherein each of said end portions of said first cross-bearer extends upwardly and laterally outwardly from said central portion of said cross-bearer on an incline corresponding to the underframe portion of AAR Plate C.

5 15. The railroad gondola car of claim 13 wherein said gondola car body has first and second sidewalls running along opposite sides thereof, said first and second sidewalls have upstanding posts and top chords, and said first cross-bearer is aligned with respective posts of said first and second sidewalls; and said posts and said first cross-bearer co-operate as a U-shaped spring resistive to lateral deflection of said top chords.

10 16. The railroad gondola car of claim 11 wherein said car has first and second stub center sills mounted at said first and second end sections respectively.

15 17. The railroad gondola car of claim 11 wherein:
said gondola car body has first and second sidewalls running along opposite sides thereof;
said first and second sidewalls have respective upstanding posts, top chords, and bottom margins distant from said top chords;
said first cross-bearer is aligned with respective ones of said upstanding posts of said
20 first and second sidewalls;
said first cross-bearer has a depressed central portion and first and second end portions;
said depressed central portion of said first cross-bearer runs across said floor;
each of said end portions of said cross-bearer is joined to said central portion;
each of said end portions of said first cross-bearer extends upwardly from said depressed
25 central portion of said first cross-bearer to a mate with a respective bottom end of
a respective aligned post of said side beam of said gondola car body; and
said posts and said first cross-bearer co-operate as a U-shaped spring resistive to lateral deflection of said top chords.

30 18. The railroad gondola car of claim 11 wherein:
said freight car has first and second laterally spaced apart side sills;
said first cross-bearer has a depressed central portion and first and second end portions connected to said depressed central portion; and
said first and second ends of said cross-bearer extend upwardly from said depressed
35 central portion of said cross-bearer toward said first and second side sills respectively.

19. The railroad gondola car of claim 11 wherein said first and second end sections have first and second stub center sills respectively; and said first stub center sill has a downwardly inclined goose-neck.

5 20. The railroad gondola car of claim 19 wherein said goose-neck of said first stub center sill terminates at an endmost cross-bearer of said central section.

21. The railroad gondola car of claim 20 wherein said goose-neck of said first stub center sill meets said endmost cross-bearer at a structural knee.

10 22. The drop-center railroad gondola car of claim 1 wherein:
said gondola body has first and second end sections and a drop-center middle section therebetween; and
said drop center middle section having at least a first cross-bearer defining said bending-
15 moment transmitting frame of said drop center portion, said first cross-bearer having a U-shape.

20 23. The railroad gondola car of claim 22 wherein said gondola body has first and second side sills, and said U-shaped cross-bearer has first and second upturned ends connected to said first and second side sills respectively.

24. The railroad gondola car of claim 22 wherein said first cross-bearer has a low central portion, and first and second upwardly extending end portions connected thereto; said first end portion being connected to said central portion at a first elbow; said second end portion being
25 connected to said central portion at a second elbow.

25. The railroad gondola car of claim 24 wherein said first and second elbows are structural knees.

30 26. The railroad gondola car of claim 1 wherein said railroad gondola car is a drop-center railroad gondola car, comprising:
first and second end sections, and a deeper central section located length-wise between the first and second end sections, said deeper central section defining said drop center portion;
35 said floor structure including a floor, and said wall structure including a containment wall standing upwardly therefrom, said floor and containment wall defining said receptacle for lading, said containment wall including first and second side walls extending length-wise along opposite sides of the gondola car;

each of said end sections having a main shear web, said main shear web having a substantially horizontal first portion extending cross-wise between said first and second side walls;

5 said main shear web having a second portion defining a main shear web extension, said second portion extending length-wise inboard and downward of said first portion; and

 said second portion of said main shear web having margins mated with predominantly downwardly extending margins of said first and second side walls.

10 27. The railroad gondola car of claim 26 wherein said first and second side walls have upper portions and lower portions; said lower portions are angled downwardly and cross-wise inwardly; and said lower portions mate with said second portion of said main shear web to define a box end that converges both length-wise and cross-wise.

15 28. The railroad gondola car of claim 26 wherein said gondola car has straight through side sills running lengthwise from end section to end section; said first portion of said main shear web mates with said side sills at a lap joint; and said main shear web has a margin that deviates crosswise inboard of said lap joint to mate with said sidewalls downwardly of said side sills.

20 29. The railroad gondola car of claim 26 wherein said second section of said main shear web defines at least a portion of a sloped intermediate bulkhead between one of said first and second end sections and said central section of said gondola car.

25 30. The railroad gondola car of claim 26 wherein said gondola car has a stub center sill mated to said main shear web, and said stub center sill has a downwardly and lengthwise inboard extending member mated to said second portion of said main shear web.

30 31. The railroad gondola car of claim 30 wherein said central portion of said gondola car has an endmost cross-bearer, and said stub center sill includes a member mated to said endmost cross-bearer.

35 32. The railroad gondola car of claim 31 wherein said first and second sidewalls of said gondola car have respective side sills, top chords and side sheets extending between said top chords and said side sills; said first and second sidewalls have side posts mounted to said side sheets and extending between said side sills and said top chords; and ones of said side posts are in bending-moment transmitting connection with said endmost cross-bearer.

33. The railroad gondola car of claim 30 wherein said gondola car has a flat floor sheet; said central portion of said first cross-member is mated to said flat floor sheet; and said inboard extending member is downwardly sloped to define at least a portion of a goose-neck; and said goose-neck is connected to said central portion of said first cross-member beneath said flat floor sheet.

34. A drop-center railroad gondola car comprising:
a gondola body having first and second end sections and a drop-center middle section therebetween; and
said drop-center middle section having at least a first cross-bearer, said first cross-bearer having a U-shape.

35. The drop-center railroad gondola car of claim 34 wherein said gondola body has first and second side sills, and said U-shaped cross-bearer has first and second upturned ends connected to said first and second side sills respectively.

36. The drop-center railroad gondola car of claim 34 wherein said first cross-bearer has a low central portion, and first and second upwardly extending end portions connected thereto; said first end portion being connected to said central portion at a first elbow; said second end portion being connected to said central portion at a second elbow.

37. The drop-center railroad gondola car of claim 36 wherein said first and second elbows are structural knees.

38. The drop-center railroad gondola car of claim 34, wherein:
said gondola body is carried by railroad car trucks for rolling motion in a lengthwise direction along railroad tracks;
said gondola car body drop-center middle section is located between the trucks;
said drop-center middle section has a floor structure and a wall structure standing upwardly of said floor structure, said floor structure and said wall structure defining a lading receptacle; and
said floor structure having at least one cross-wise oriented bending-moment-transmitting frame said frame being mounted outside of said lading receptacle whereby said lading receptacle is free of internal obstructions to unloading.

39. The railroad gondola car of claim 34 wherein said car is a stub sill car.

40. The railroad gondola car of claim 34 wherein said drop-center middle section of said car is free of a center sill.

41. The railroad gondola car of claim 34 wherein said car has a stub center sill, said stub center sill has an inboard end terminating at said drop-center middle section; said inboard end having a goose-neck formed thereat, and said goose-neck co-operating with said drop center middle section.

42. The drop-center railroad gondola car of claim 34 wherein:
said gondola body is mounted on trucks for rolling motion in a longitudinal direction
along railroad tracks;
said central section has a floor mounted to said first cross-bearer;
said first cross-bearer defines a spring;
said spring has a middle portion and first and second end portions; and
said first and second end portions of said spring being upturned relative to said middle portion to define said U-shape.

43. The drop-center railroad freight car of claim 42 wherein said cross-bearer has the form of an upwardly opening bow member.

44. The drop-center railroad gondola car of claim 42 wherein each of said end portions of said spring is joined to said middle portion of said spring at a structural knee.

45. The drop-center railroad freight car of claim 42 wherein said car has first and second stub center sills mounted at said first and second end sections respectively.

46. The drop-center railroad gondola car of claim 42 wherein said freight car is free of a straight-through center sill.

47. The drop-center railroad gondola car of claim 42 wherein said gondola car has first and second laterally spaced apart side sills, and said first and second end portions of said cross-bearer extend upwardly toward said first and second side sills respectively.

48. The drop-center railroad gondola car of claim 34, wherein:
said gondola body is mounted on trucks for rolling motion in a longitudinal direction
along railroad tracks;
said gondola body has first and second end sections and said drop-center middle section located longitudinally between said first and second end sections;

said gondola body is free of a straight-through center sill;
said drop-center middle section has a floor that is mounted to said first cross-bearer; and
upwardly of said first cross-bearer said gondola car body is free of obstructions to
unloading.

49. The drop-center railroad gondola car of claim 48 wherein said first cross-bearer has the
form of an upwardly opening bow member.

50. The drop-center railroad gondola car of claim 48 wherein:

said first cross-bearer has a depressed central portion and first and second end portions;
said depressed central portion of said first cross-bearer runs across said floor;
each of said end portions of said cross-bearer extends upwardly from said depressed
central portion to a respective side beam of said gondola car body; and
each of said end portions of said cross-bearer is joined to said central portion of said
cross-bearer at a respective structural knee.

51. The drop-center railroad gondola car of claim 50 wherein each of said end portions of
said first cross-bearer extends upwardly and laterally outwardly from said central portion of said
cross-bearer on an incline corresponding to the underframe portion of AAR Plate C.

52. The drop-center railroad gondola car of claim 50 wherein said gondola body has first and
second sidewalls running along opposite sides thereof, said first and second sidewalls have
upstanding posts and top chords, and said first cross-bearer is aligned with respective posts of
said first and second sidewalls; and said posts and said first cross-bearer co-operate as a U-
shaped spring resistive to lateral deflection of said top chords.

53. The drop center railroad gondola car of claim 48 wherein said car has first and second
stub center sills mounted at said first and second end sections respectively.

54. The drop-center railroad gondola car of claim 48 wherein:

said gondola body has first and second sidewalls running along opposite sides thereof;
said first and second sidewalls have respective upstanding posts, top chords, and bottom
margins distant from said top chords;
said first cross-bearer is aligned with respective ones of said upstanding posts of said
first and second sidewalls;
said first cross-bearer has a depressed central portion and first and second end portions;
said depressed central portion of said first cross-bearer runs across said floor;
each of said end portions of said cross-bearer is joined to said central portion;

each of said end portions of said first cross-bearer extends upwardly from said depressed central portion of said first cross-bearer to a mate with a respective bottom end of a respective aligned post of said side beam of said gondola body; and said posts and said first cross-bearer co-operate as a U-shaped spring resistive to lateral deflection of said top chords.

55. The drop center railroad gondola car of claim 48 wherein:
said gondola car has first and second laterally spaced apart side sills;
said first cross-bearer has a depressed central portion and first and second end portions connected to said depressed central portion; and
said first and second ends of said cross-bearer extend upwardly from said depressed central portion of said cross-bearer toward said first and second side sills respectively.

56. The drop-center railroad gondola car of claim 48 wherein said first and second end sections have first and second stub center sills respectively; and said first stub center sill has a downwardly inclined goose-neck.

57. The railroad freight car of claim 56 wherein said goose-neck terminates at an endmost cross-bearer of said drop-center middle section.

58. The railroad freight car of claim 57 wherein said goose-neck of said first stub center sill meets said endmost cross-bearer at a structural knee.

59. The drop-center railroad gondola car of claim 34, wherein:
said drop-center middle section has a floor, and a containment wall standing upwardly therefrom, said floor and containment wall defining a receptacle for lading, said containment wall including first and second side walls extending length-wise along opposite sides of the gondola car;
each of said end sections having a main shear web, said main shear web having a substantially horizontal first portion extending cross-wise between said first and second side walls;
said main shear web having a second portion defining a main shear web extension, said second portion extending length-wise inboard and downward of said first portion;
and
said second portion of said main shear web having margins mated with predominantly downwardly extending margins of said first and second side walls.

60. The drop-center railroad gondola car of claim 59 wherein said first and second side walls have upper portions and lower portions; said lower portions are angled downwardly and cross-wise inwardly; and said lower portions mate with said second portion of said main shear web to define a box end that converges both length-wise and cross-wise.

61. The drop-center railroad gondola car of claim 59 wherein said gondola car has straight through side sills running lengthwise from end section to end section; said first portion of said main shear web mates with said side sills at a lap joint; and said main shear web has a margin that deviates crosswise inboard of said lap joint to mate with said sidewalls downwardly of said side sills.

62. The drop center railroad gondola car of claim 59 wherein said second section of said main shear web defines at least a portion of a sloped intermediate bulkhead between one of said first and second end sections and said central section of said gondola car.

63. The drop center railroad gondola car of claim 59 wherein said gondola car has a stub center sill mated to said main shear web, and said stub center sill has a downwardly and lengthwise inboard extending member mated to said second portion of said main shear web.

64. The drop center railroad gondola car of claim 63 wherein said drop-center middle section of said gondola car has an endmost cross-bearer, and said stub center sill includes a member mated to said endmost cross-bearer.

65. The drop center railroad gondola car of claim 64 wherein said first and second sidewalls of said gondola car have respective side sills, top chords and side sheets extending between said top chords and said side sills; said first and second sidewalls have side posts mounted to said side sheets and extending between said side sills and said top chords; and ones of said side posts are in bending-moment transmitting connection with said endmost cross-bearer.

66. The drop center railroad gondola car of claim 63 wherein said gondola car has a flat floor sheet; said central portion of said first cross-member is mated to said flat floor sheet; and said inboard extending member is downwardly sloped to define at least a portion of a goose-neck; and said goose-neck is connected to said central portion of said first cross-member beneath said flat floor sheet.

67. A drop-center railroad freight car, comprising:

a gondola car body mounted on trucks for rolling motion in a longitudinal direction
along railroad tracks;
said gondola car body having first and second end sections and a deeper central section
located longitudinally between said first and second end sections;
5 said central section having a floor and at least a first cross-member to which said floor is
mounted;
said first cross-member defining a spring;
said spring having a middle portion and first and second end portions; and
said first and second end portions of said spring being upturned relative to said middle
10 portion.

68. The drop-center railroad freight car of claim 67 wherein said cross-member has the form
of an upwardly opening bow member.

15 69. The drop-center railroad freight car of claim 67 wherein each of said end portions of said
spring is joined to said middle portion of said spring at a structural knee.

70. The drop-center railroad freight car of claim 67 wherein said car has first and second stub
center sills mounted at said first and second end sections respectively.

20 71. The drop-center railroad freight car of claim 67 wherein said freight car is free of a
straight-through center sill.

72. The drop-center railroad freight car of claim 67 wherein said cross-member is a cross-
25 bearer, said freight car has first and second laterally spaced apart side sills, and said first and
second end portions of said cross-bearer extend upwardly toward said first and second side sills
respectively.

73. A drop-center railroad freight car, comprising:
30 a gondola car body mounted on trucks for rolling motion in a longitudinal direction
along railroad tracks;
said gondola car body having first and second end sections and a deeper central section
located longitudinally between said first and second end sections;
said gondola car body being free of a straight-through center sill;
35 said deeper central section having a floor;
said deeper central section having at least a first cross-bearer to which said floor is
mounted; and

upwardly of said first cross-bearer said gondola car body being free of obstructions to unloading.

74. The drop-center railroad freight car of claim 73 wherein said first cross-bearer has the form of an upwardly opening bow member.

75. The drop-center railroad freight car of claim 73 wherein:
said first cross-bearer has a depressed central portion and first and second end portions;
said depressed central portion of said first cross-bearer runs across said floor;
each of said end portions of said cross-bearer extends upwardly from said depressed central portion to a respective side beam of said gondola car body; and
each of said end portions of said cross-bearer is joined to said central portion of said cross-bearer at a respective structural knee.

76. The drop-center railroad freight car of claim 75 wherein each of said end portions of said first cross-bearer extends upwardly and laterally outwardly from said central portion of said cross-bearer on an incline corresponding to the underframe portion of AAR Plate C.

77. The drop-center railroad freight car of claim 75 wherein said gondola car body has first and second sidewalls running along opposite sides thereof, said first and second sidewalls have upstanding posts and top chords, and said first cross-bearer is aligned with respective posts of said first and second sidewalls; and said posts and said first cross-bearer co-operate as a U-shaped spring resistive to lateral deflection of said top chords.

78. The drop center railroad freight car of claim 73 wherein said car has first and second stub center sills mounted at said first and second end sections.

79. The drop-center railroad freight car of claim 73 wherein:
said gondola car body has first and second sidewalls running along opposite sides thereof;
said first and second sidewalls have respective upstanding posts, top chords, and bottom margins distant from said top chords;
said first cross-bearer is aligned with respective ones of said upstanding posts of said first and second sidewalls;
said first cross-bearer has a depressed central portion and first and second end portions;
said depressed central portion of said first cross-bearer runs across said floor;
each of said end portions of said cross-bearer is joined to said central portion;

each of said end portions of said first cross-bearer extends upwardly from said depressed central portion of said first cross-bearer to a mate with a respective bottom end of a respective aligned post of said side beam of said gondola car body; and said posts and said first cross-bearer co-operate as a U-shaped spring resistive to lateral deflection of said top chords.

80. The drop center railroad freight car of claim 73 wherein:
said freight car has first and second laterally spaced apart side sills;
said first cross-bearer has a depressed central portion and first and second end portions connected to said depressed central portion; and
said first and second ends of said cross-bearer extend upwardly from said depressed central portion of said cross-bearer toward said first and second side sills respectively.

81. The drop-center railroad freight car of claim 73 wherein said first and second end sections have first and second stub center sills respectively; and said first stub center sill has a downwardly inclined goose-neck.

82. The railroad freight car of claim 81 wherein said goose-neck of said first stub center sill terminates at an endmost cross-bearer of said central section.

83. The railroad freight car of claim 82 wherein said goose-neck of said first stub center sill meets said endmost cross-bearer at a structural knee.

84. A drop-center railroad gondola car, comprising:
first and second end sections, and a deeper central section located length-wise between the first and second end sections;
a floor, and a containment wall standing upwardly therefrom, said floor and containment wall defining a receptacle for lading, said containment wall including first and second side walls extending length-wise along opposite sides of the gondola car;
each of said end sections having a main shear web, said main shear web having a substantially horizontal first portion extending cross-wise between said first and second side walls;
said main shear web having a second portion defining a main shear web extension, said second portion extending length-wise inboard and downward of said first portion;
and

said second portion of said main shear web having margins mated with predominantly downwardly extending margins of said first and second side walls.

5 85. The drop-center railroad gondola car of claim 84 wherein said first and second side walls have upper portions and lower portions; said lower portions are angled downwardly and cross-wise inwardly; and said lower portions mate with said second portion of said main shear web to define a box end that converges both length-wise and cross-wise.

10 86. The drop-center railroad gondola car of claim 84 wherein said gondola car has straight through side sills running lengthwise from end section to end section; said first portion of said main shear web mates with said side sills at a lap joint; and said main shear web has a margin that deviates crosswise inboard of said lap joint to mate with said sidewalls downwardly of said side sills.

15 87. The drop center railroad gondola car of claim 84 wherein said second section of said main shear web defines at least a portion of a sloped intermediate bulkhead between one of said first and second end sections and said central section of said gondola car.

20 88. The drop center railroad gondola car of claim 84 wherein said gondola car has a stub center sill mated to said main shear web, and said stub center sill has a downwardly and lengthwise inboard extending member mated to said second portion of said main shear web.

25 89. The drop center railroad gondola car of claim 88 wherein said central portion of said gondola car has an endmost cross-bearer, and said stub center sill includes a member mated to said endmost cross-bearer.

30 90. The drop center railroad gondola car of claim 89 wherein said first and second sidewalls of said gondola car have respective side sills, top chords and side sheets extending between said top chords and said side sills; said first and second sidewalls have side posts mounted to said side sheets and extending between said side sills and said top chords; and ones of said side posts are in bending-moment transmitting connection with said endmost cross-bearer.

35 91. The drop-center railroad gondola car of claim 88 wherein said gondola car has a flat floor sheet; said central portion of said first cross-member is mated to said flat floor sheet; and said inboard extending member is downwardly sloped to define at least a portion of a goose-neck; and said goose-neck is connected to said central portion of said first cross-member beneath said flat floor sheet.

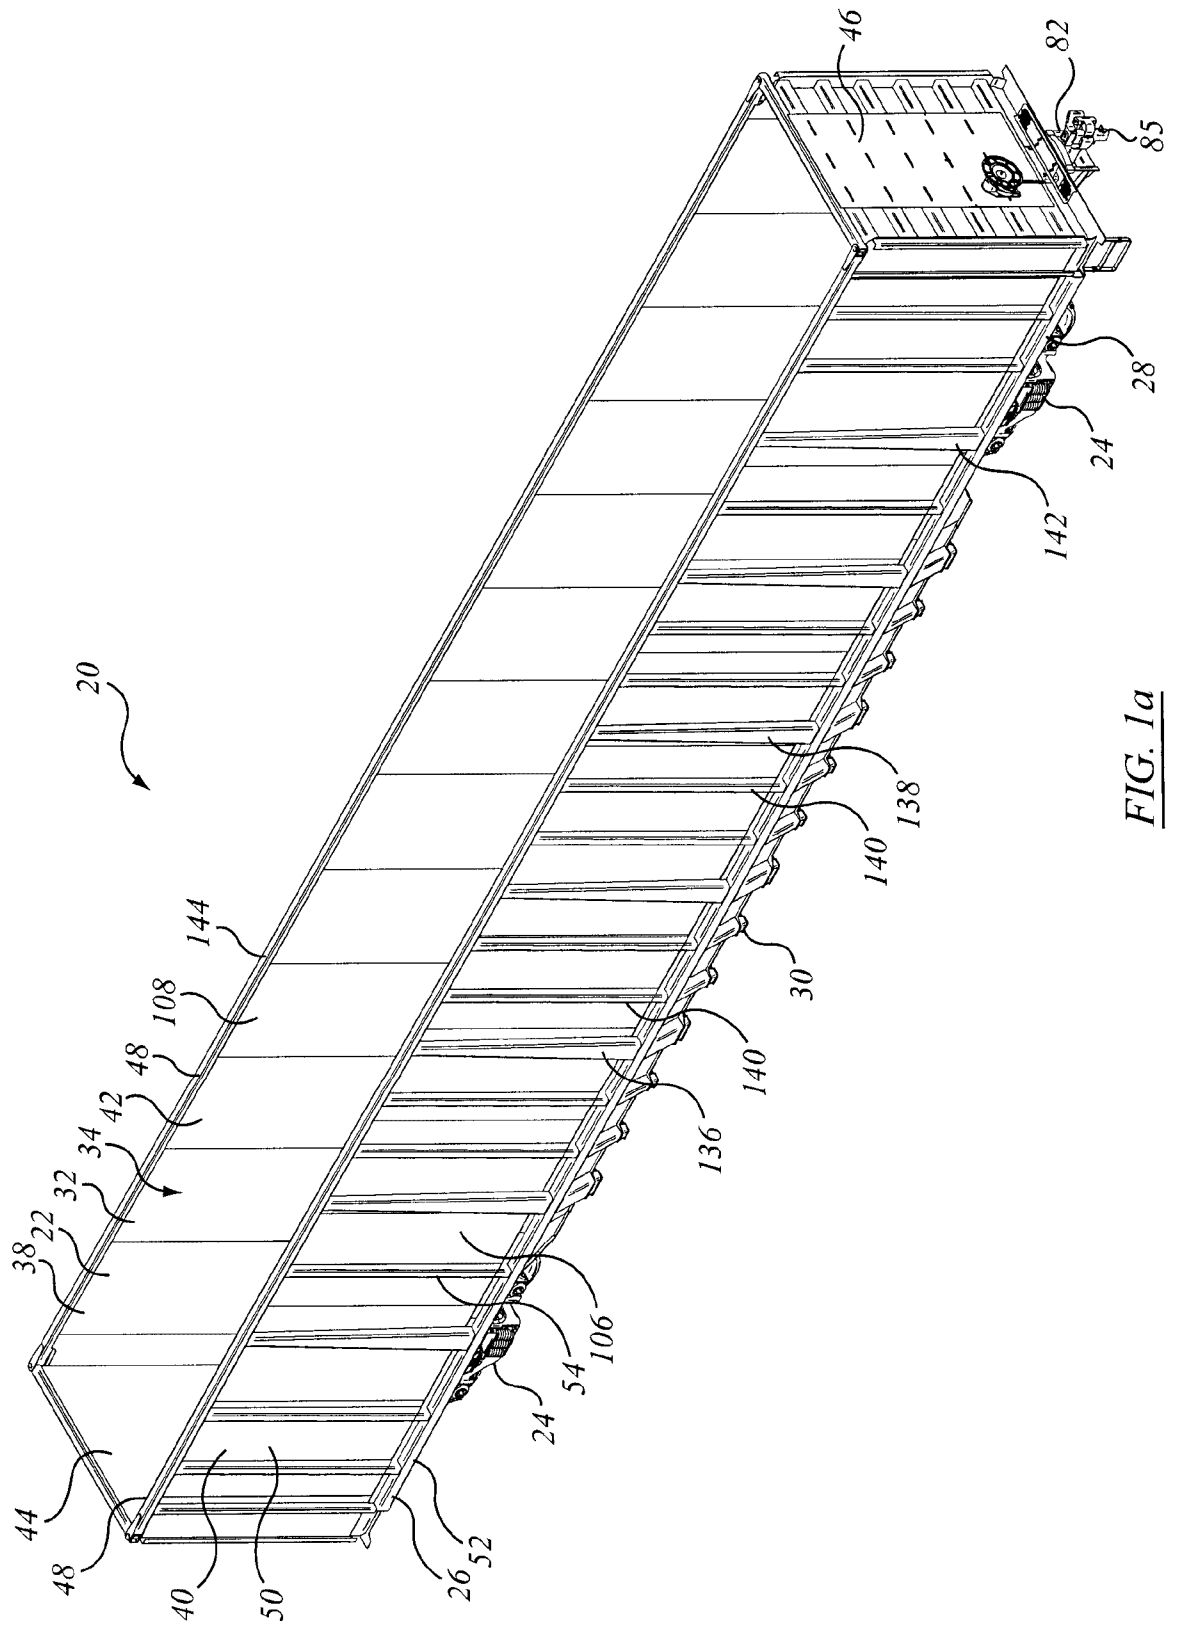
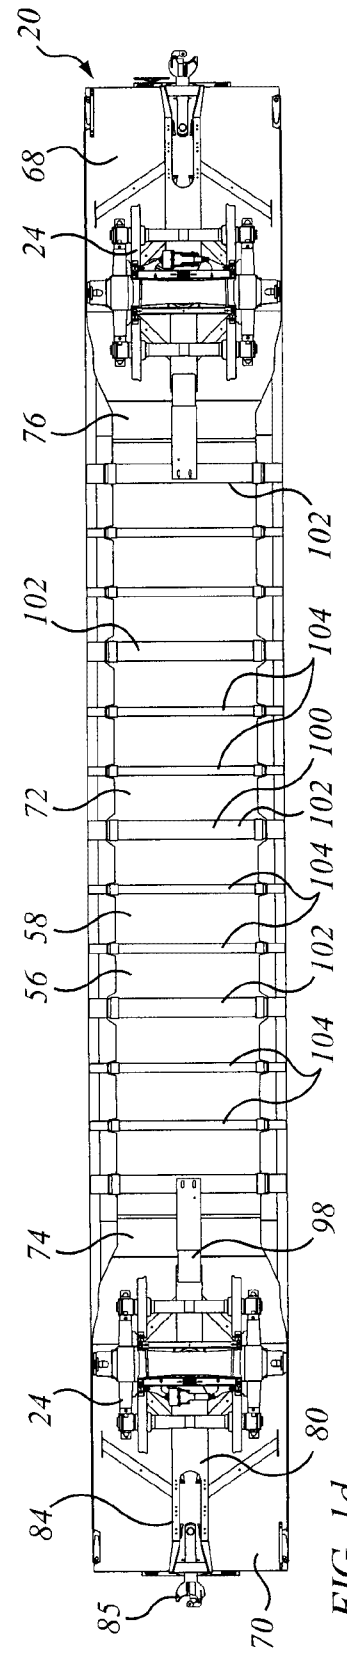
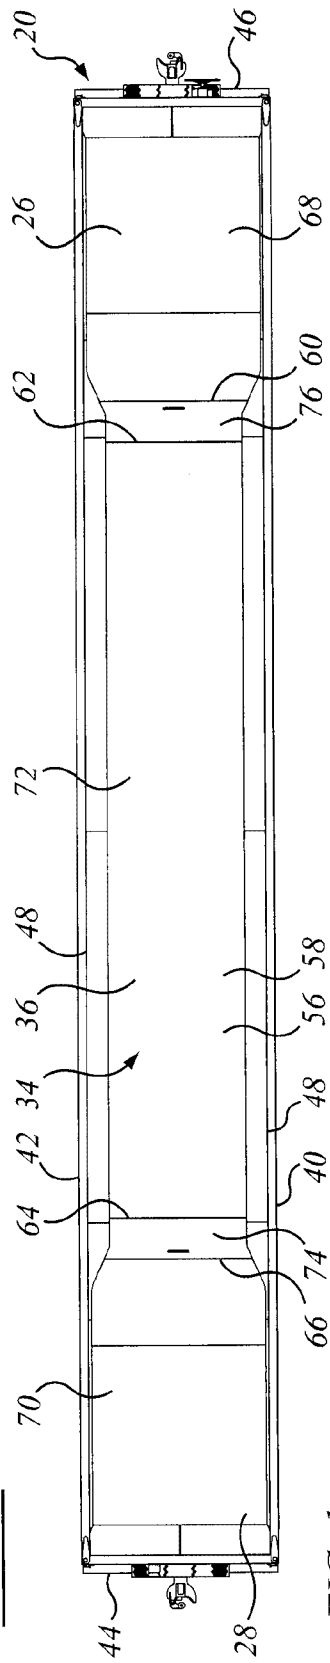
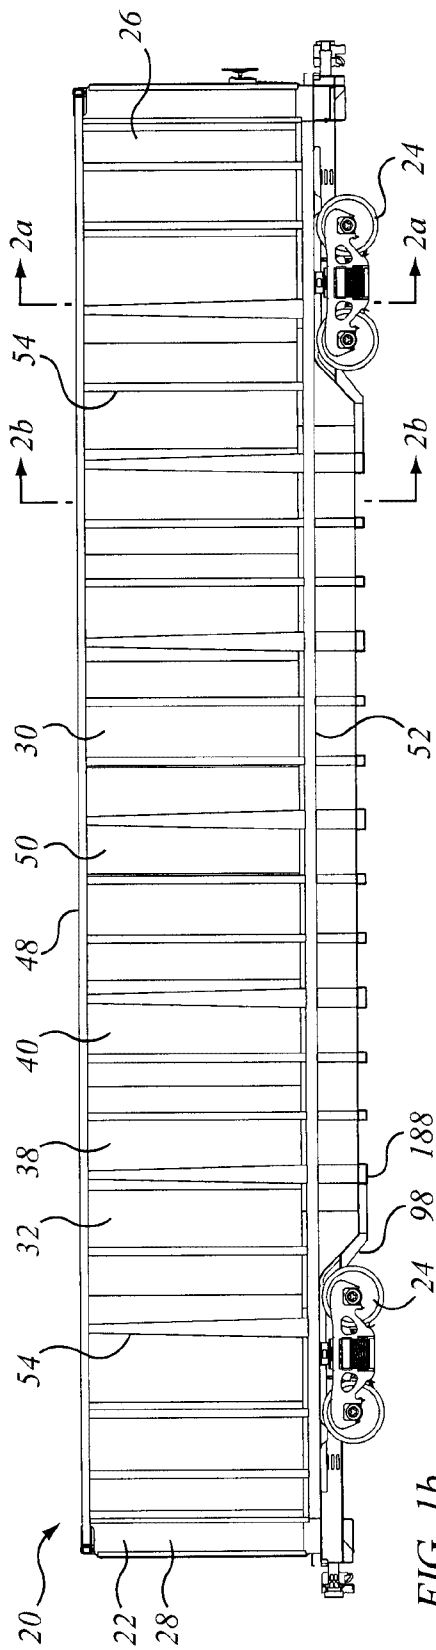


FIG. 1a



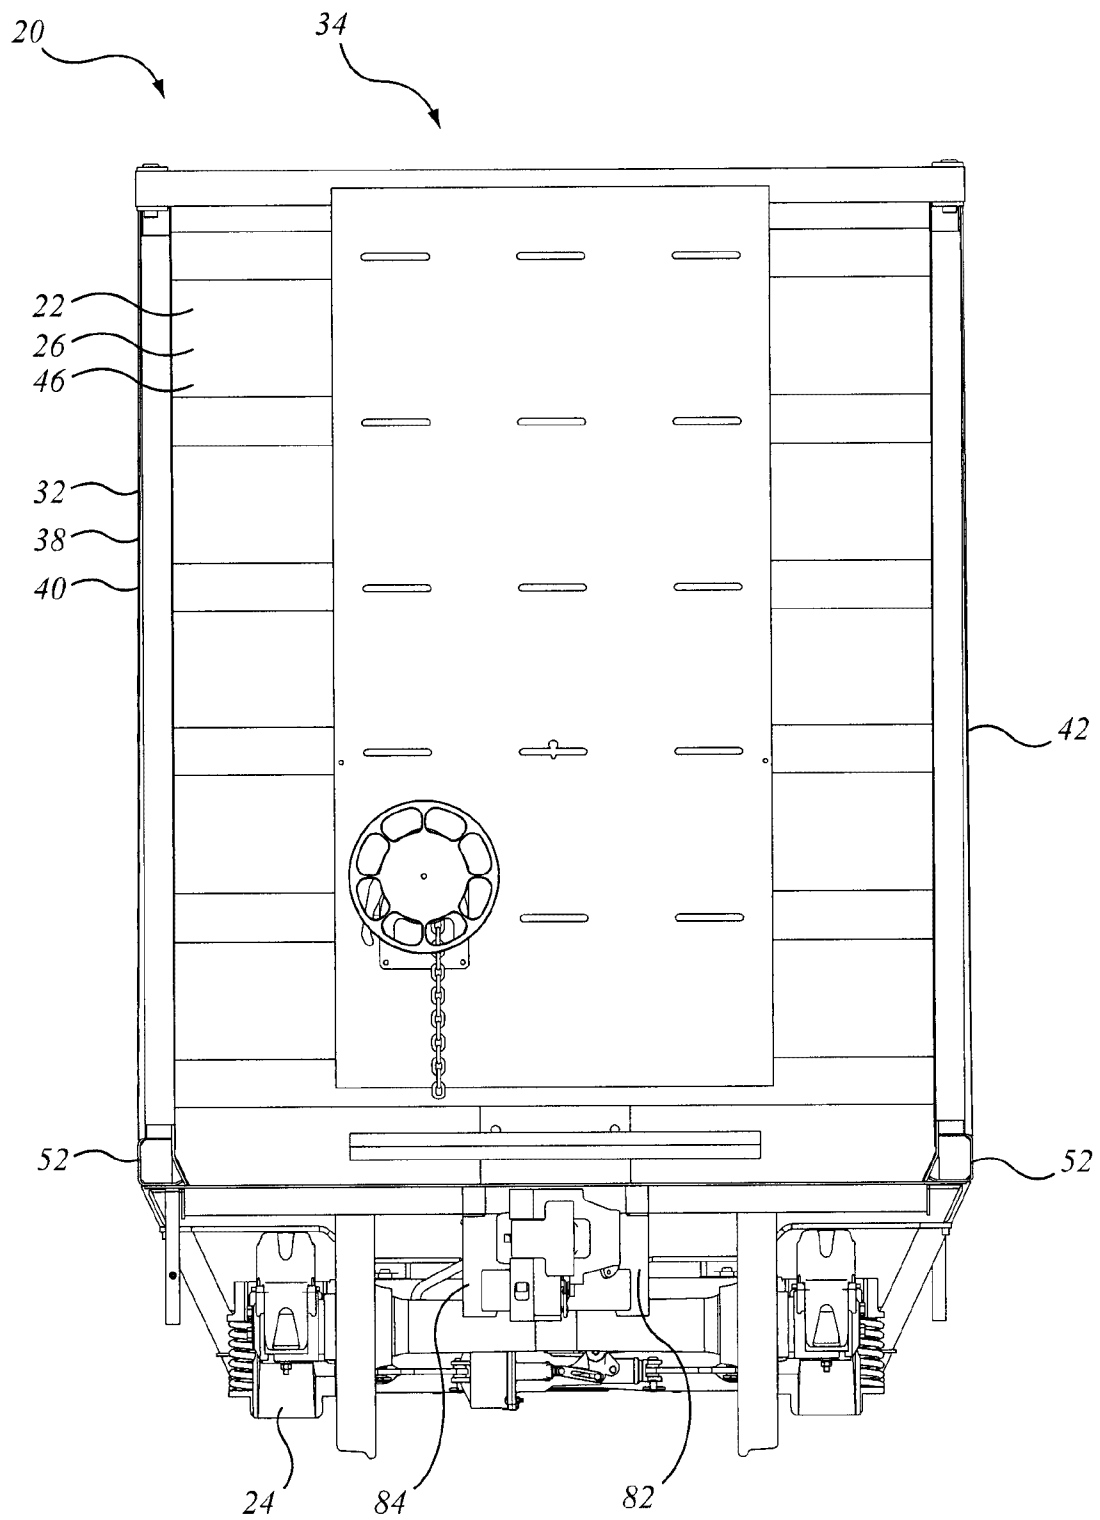
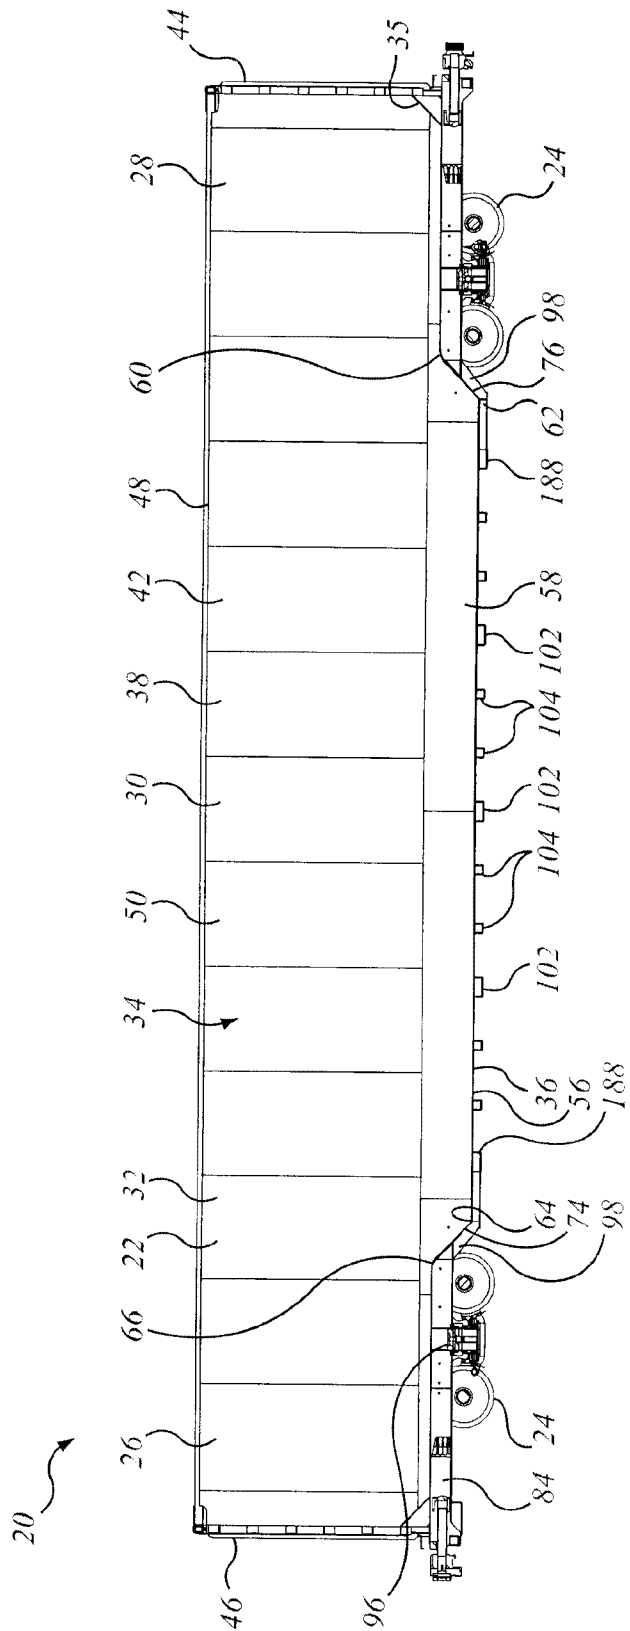


FIG. 1e



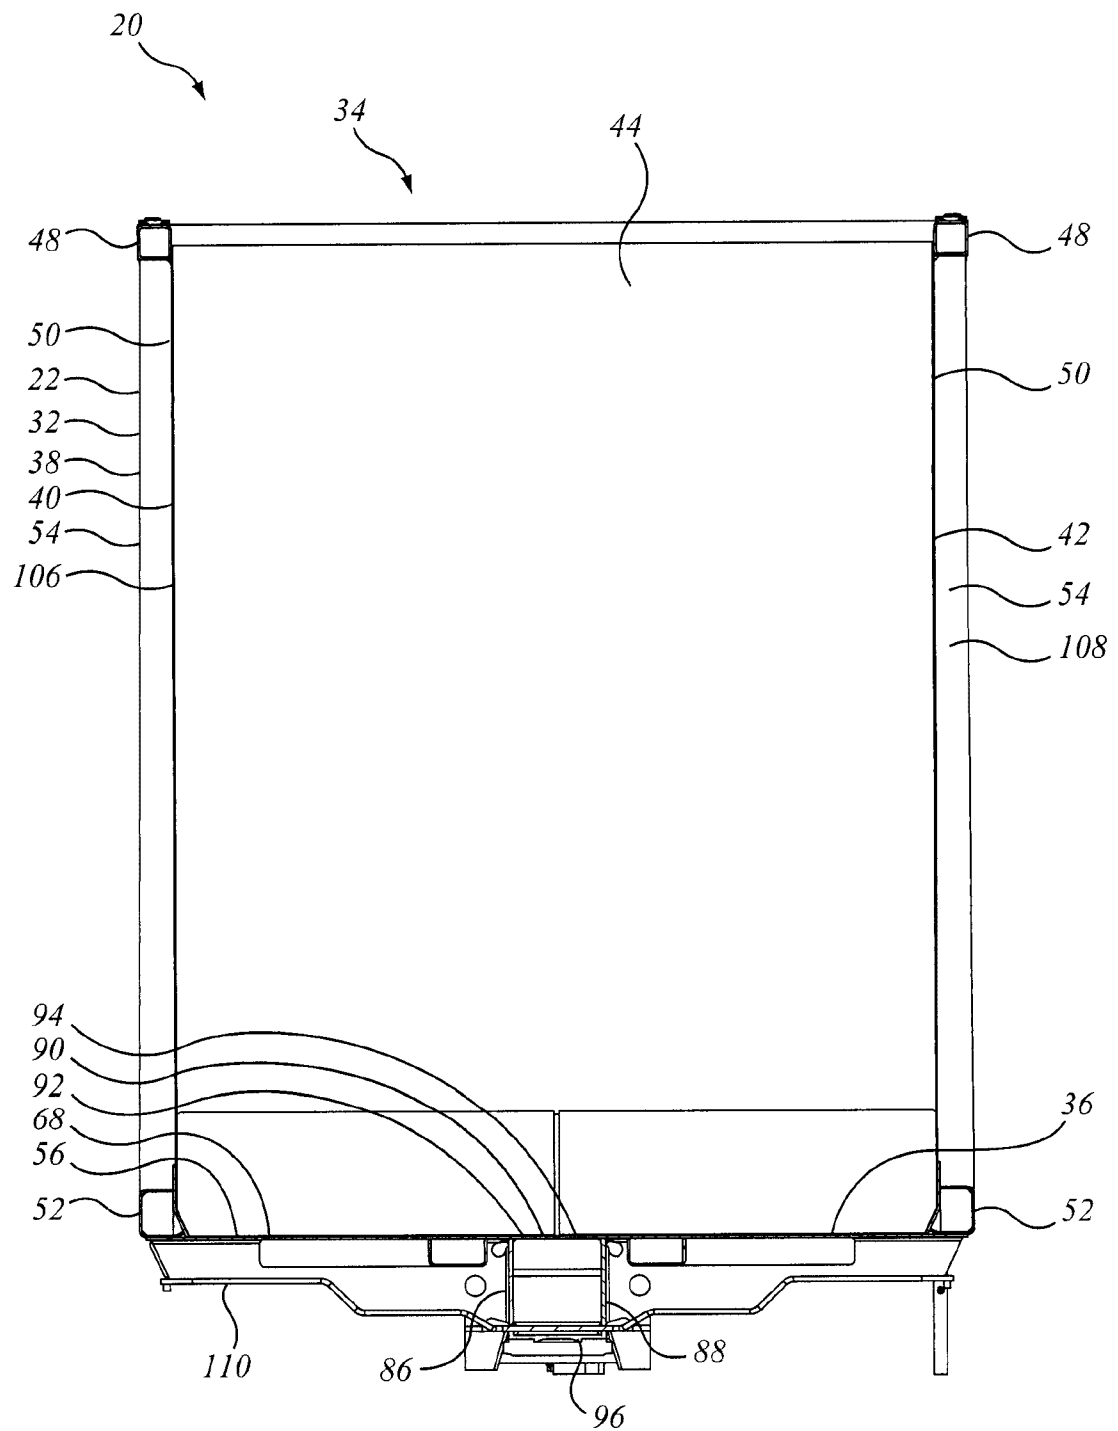


FIG. 2a

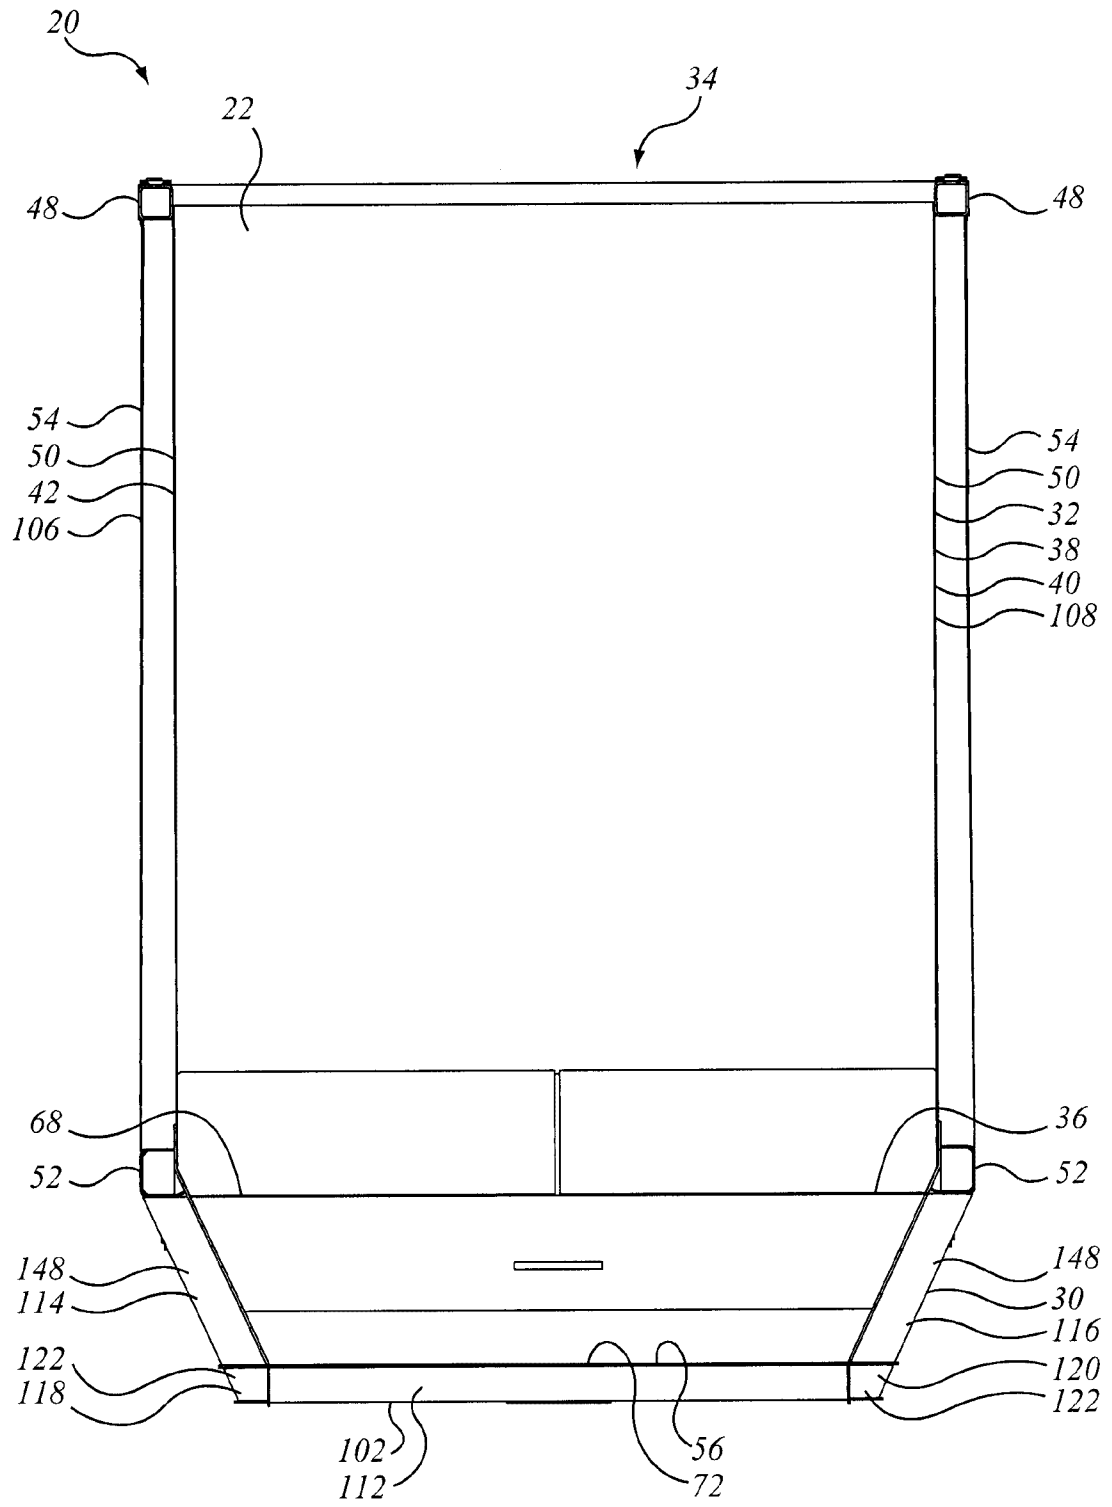


FIG. 2b

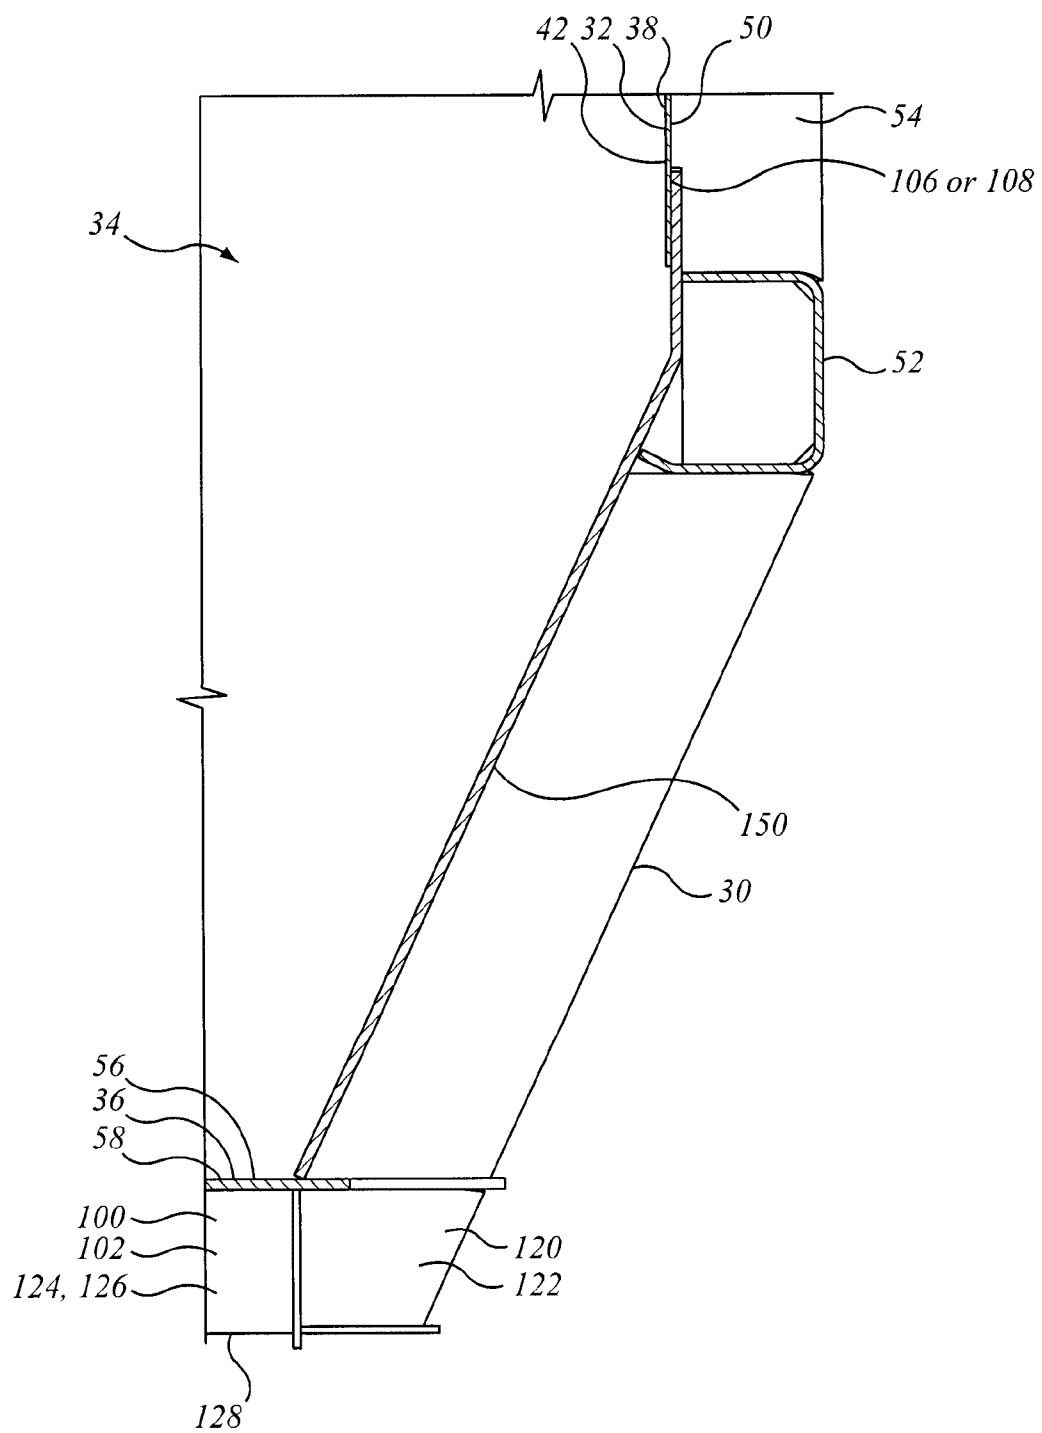


FIG. 2c

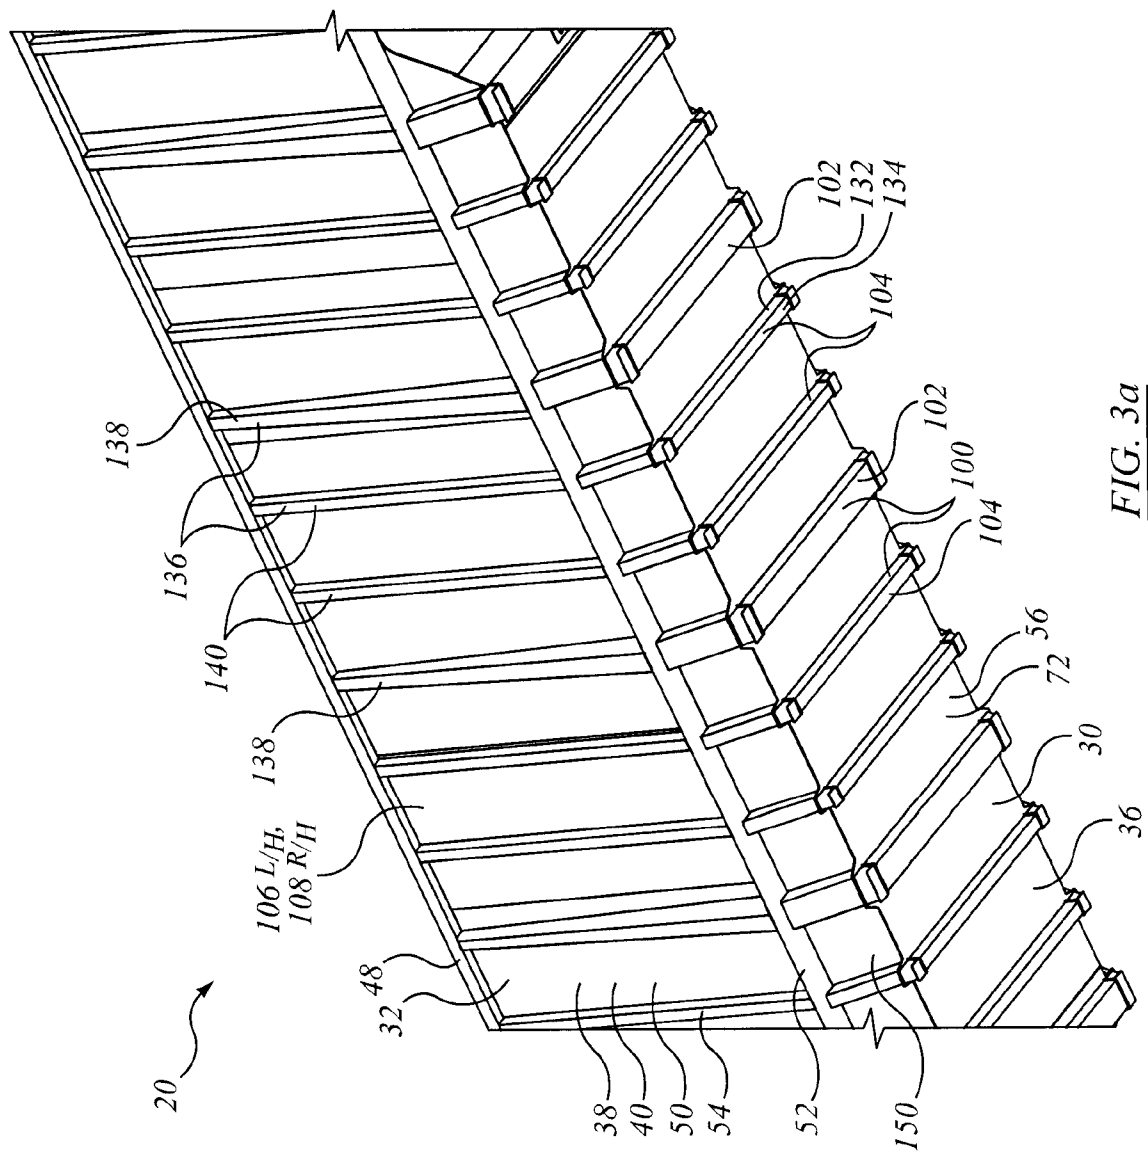


FIG. 3a

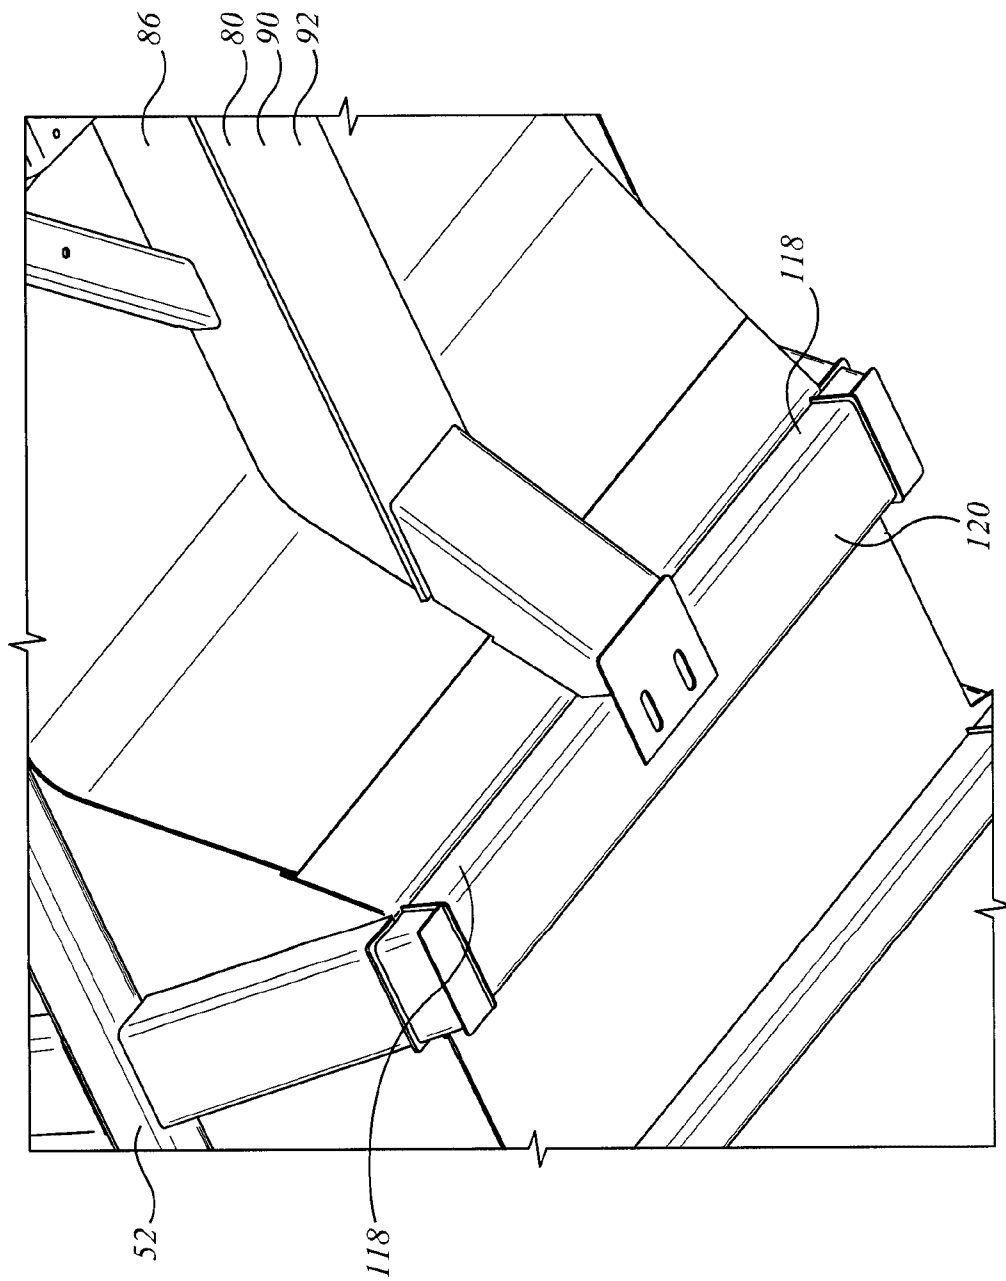


FIG. 3b

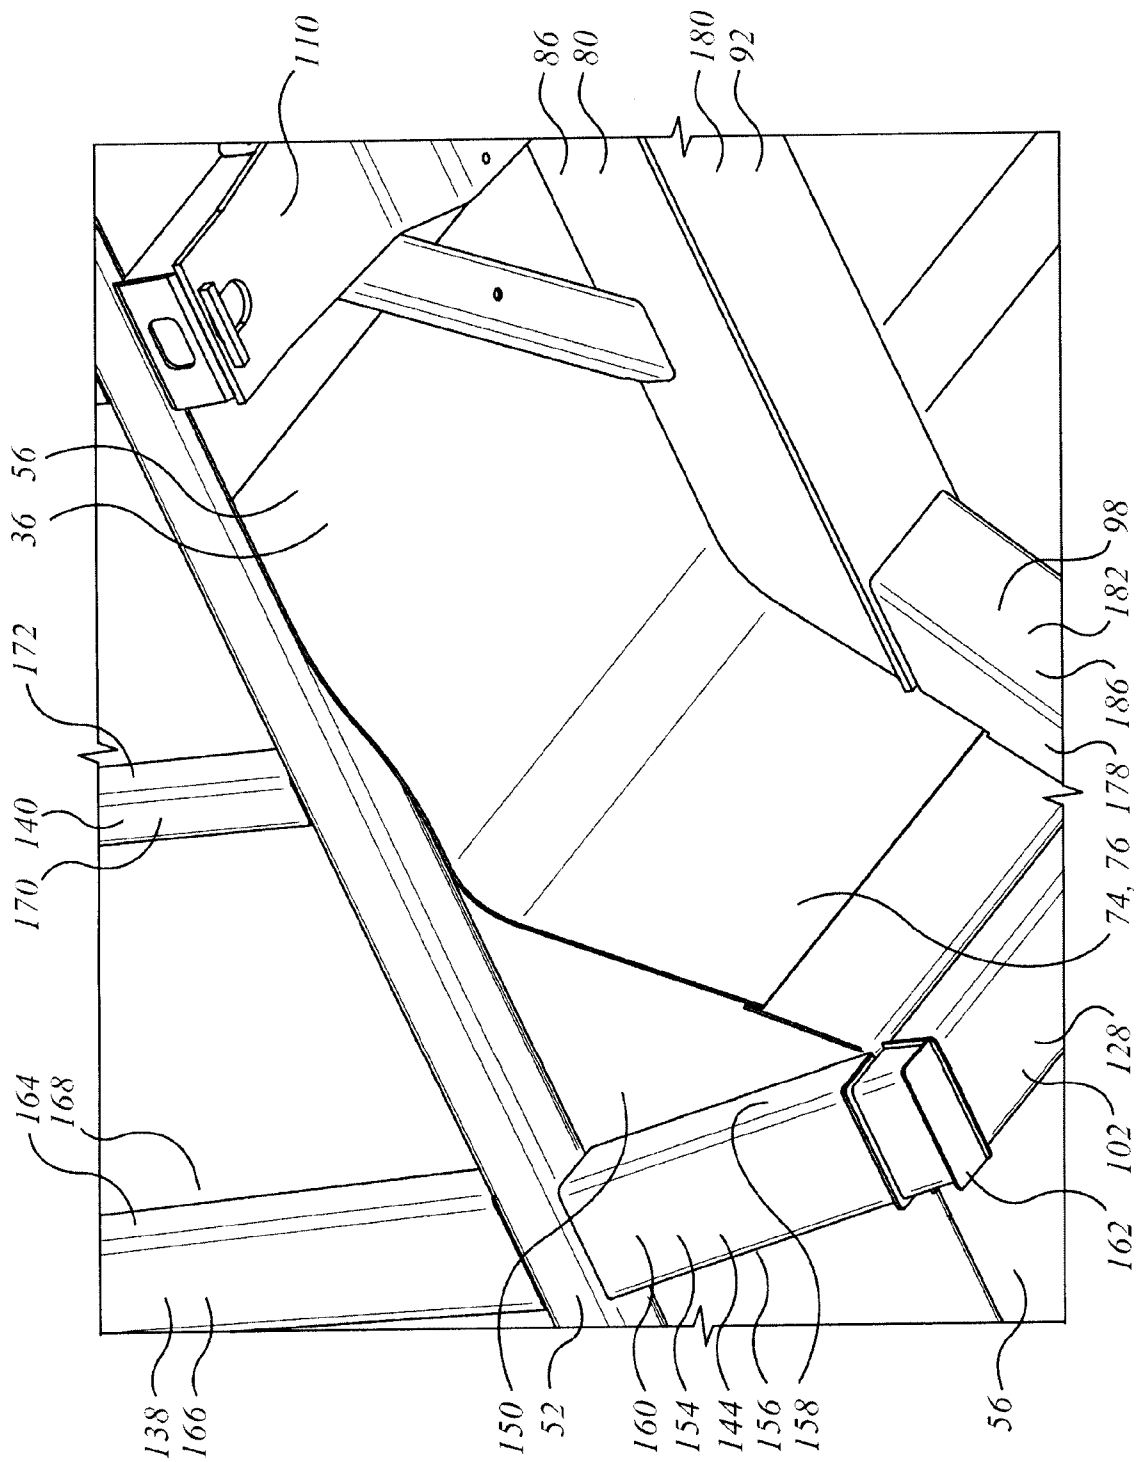


FIG. 3c

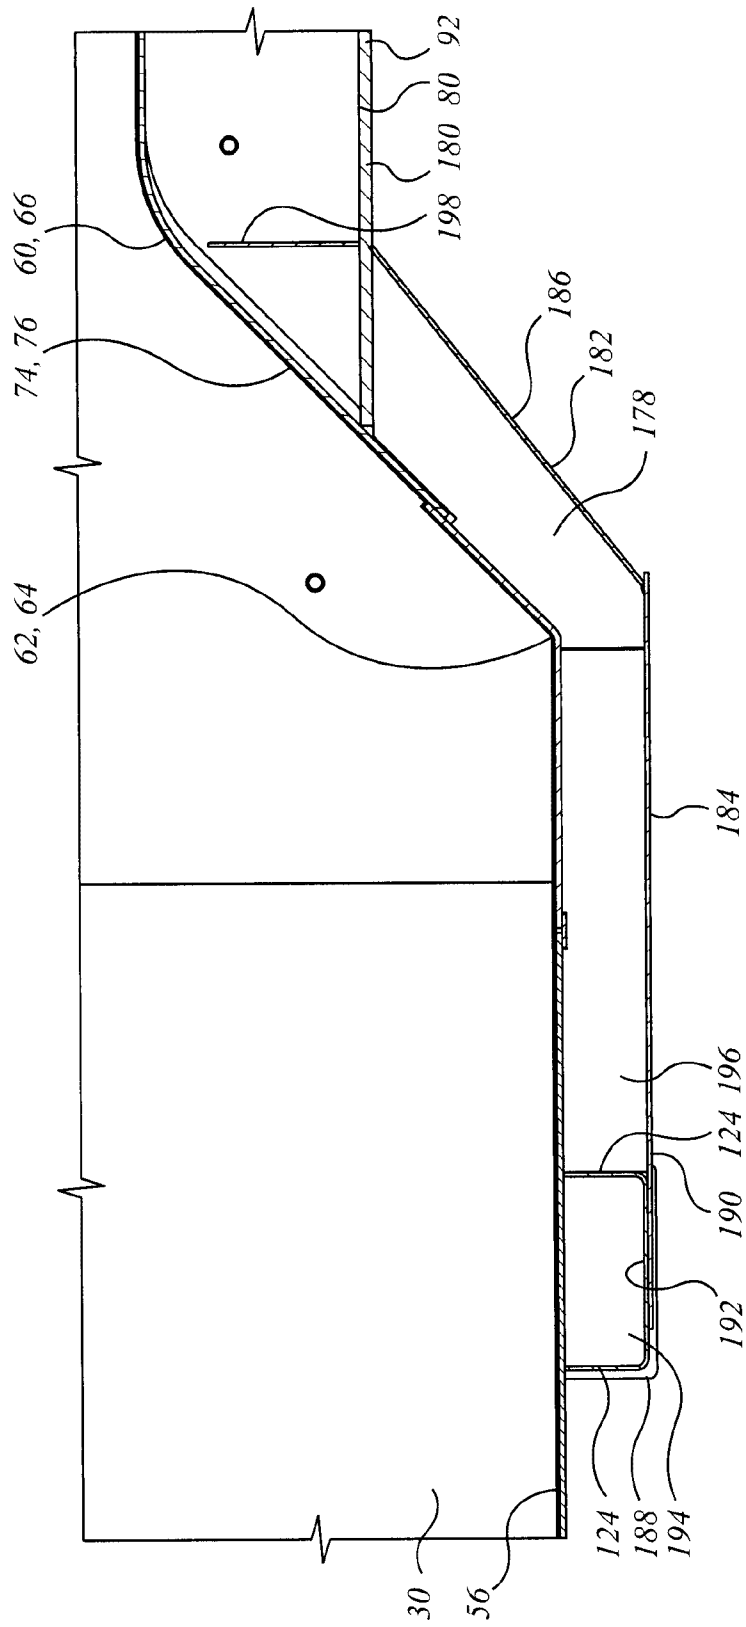


FIG. 3d

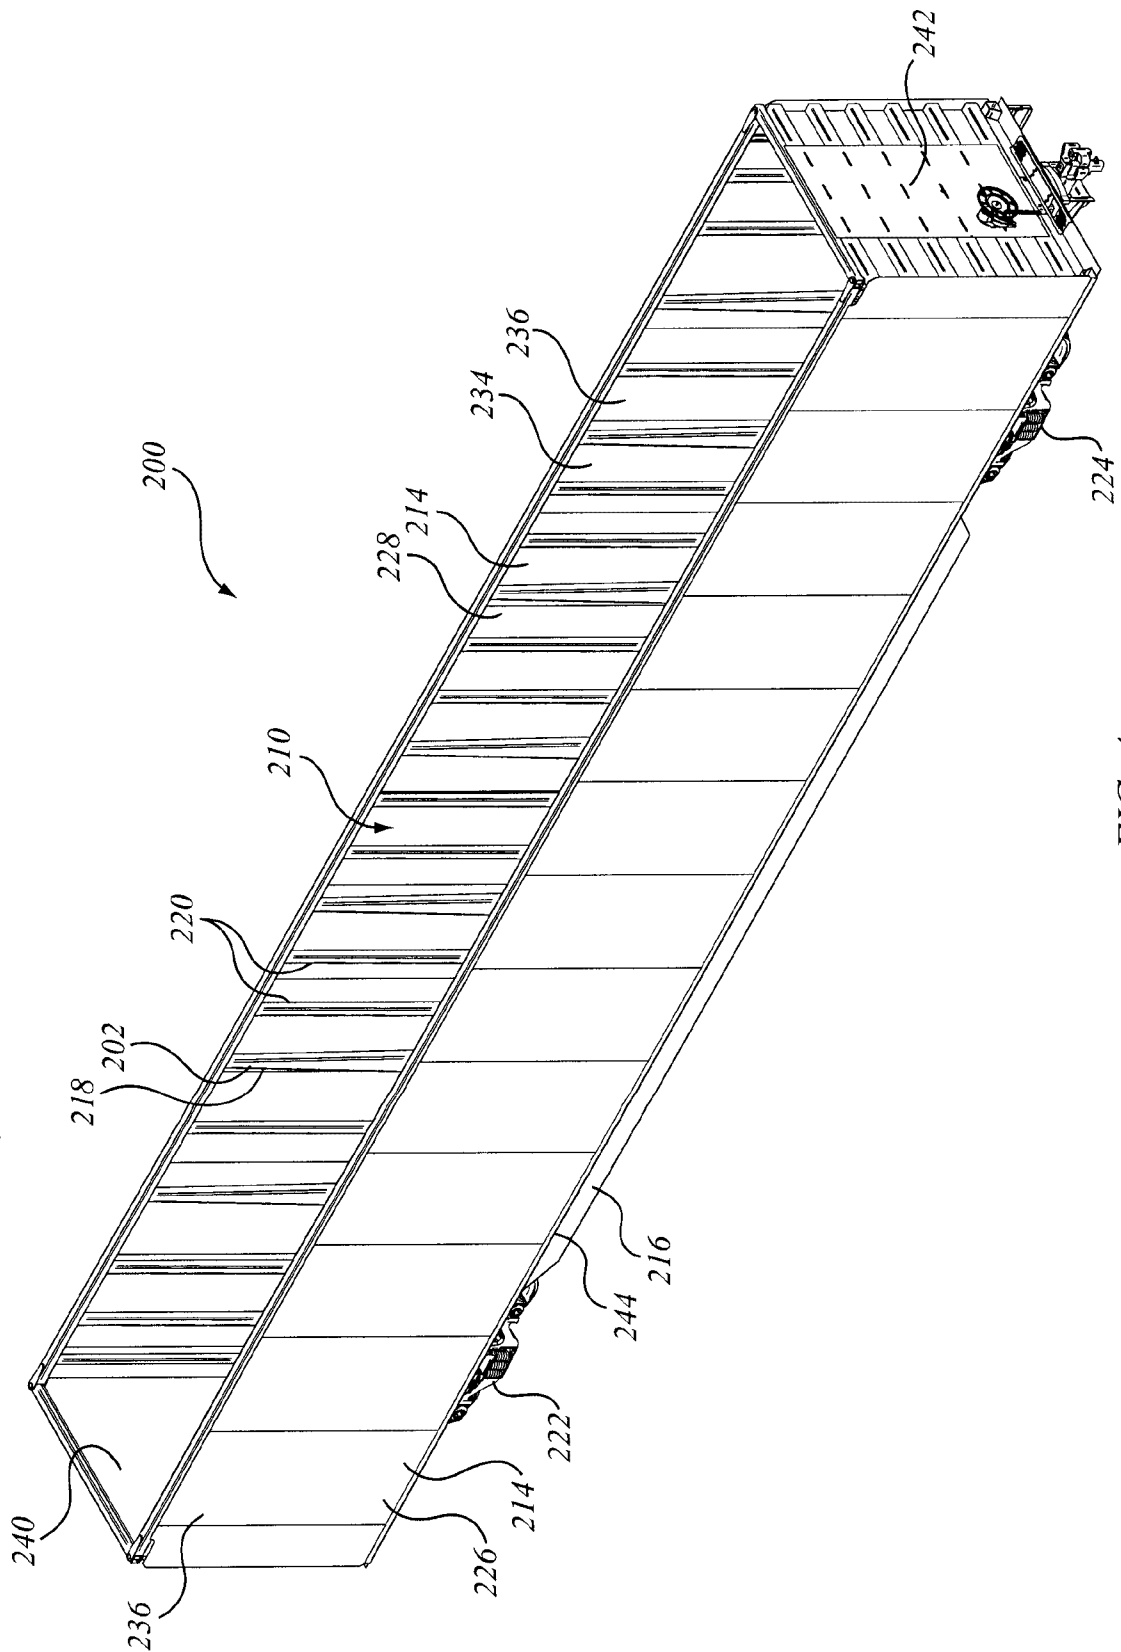


FIG. 4a

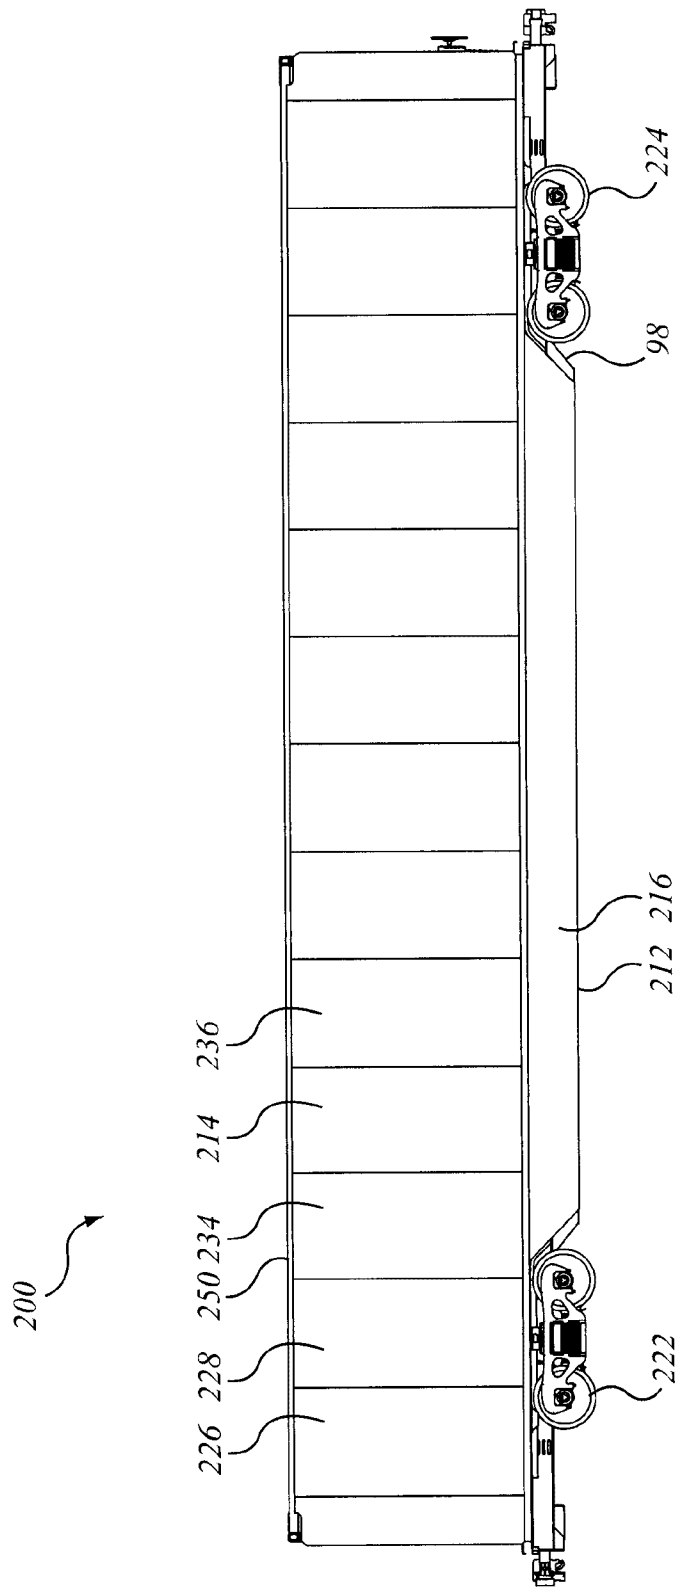


FIG. 4b

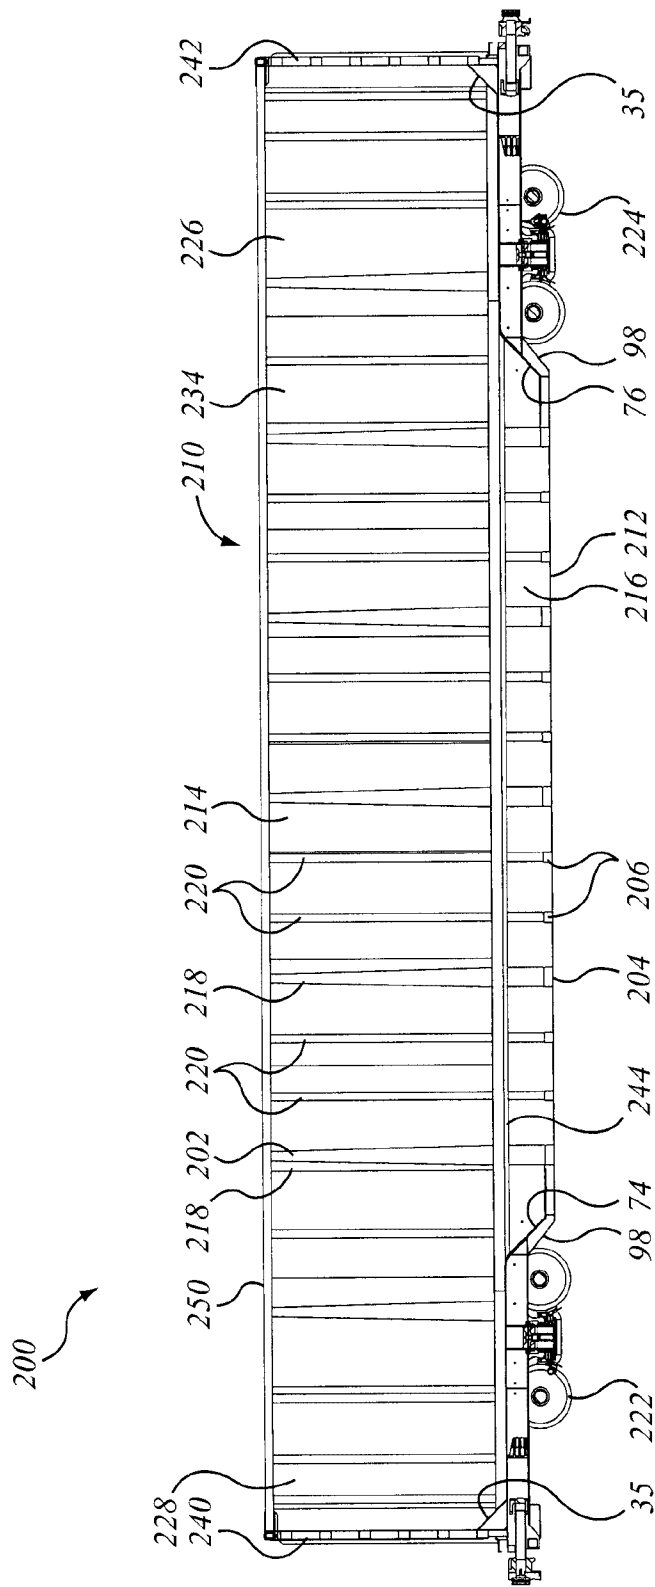


FIG. 4c

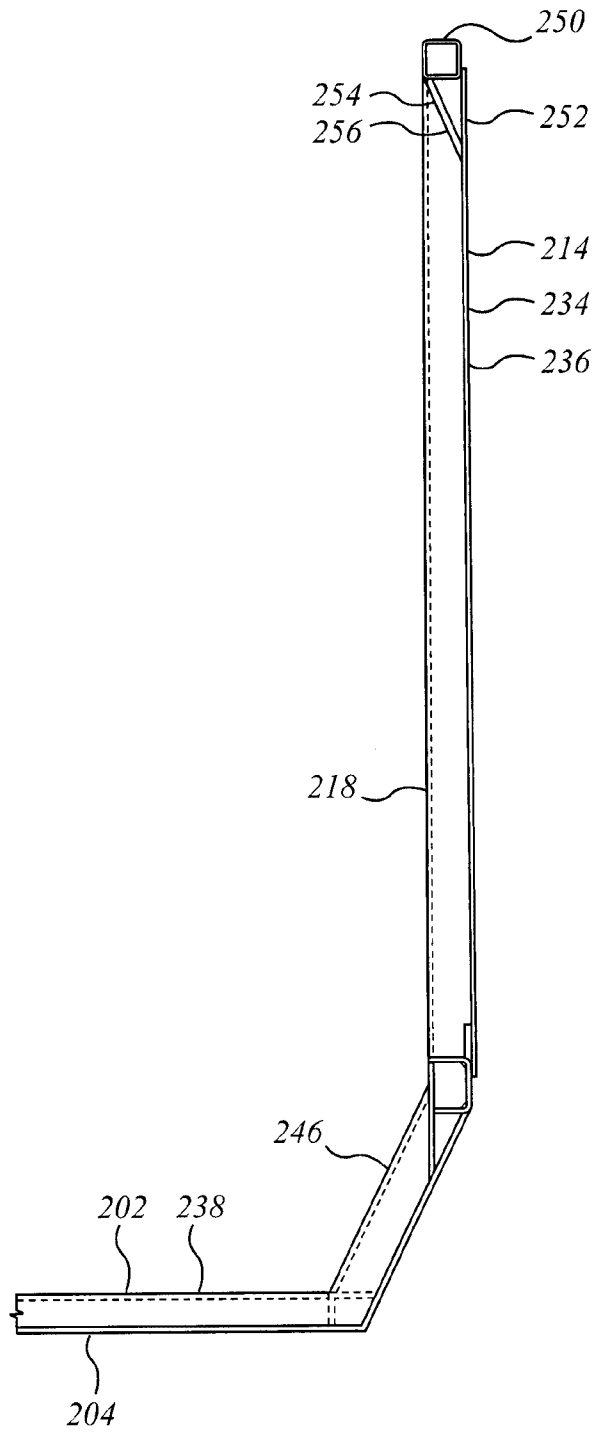


FIG. 4d

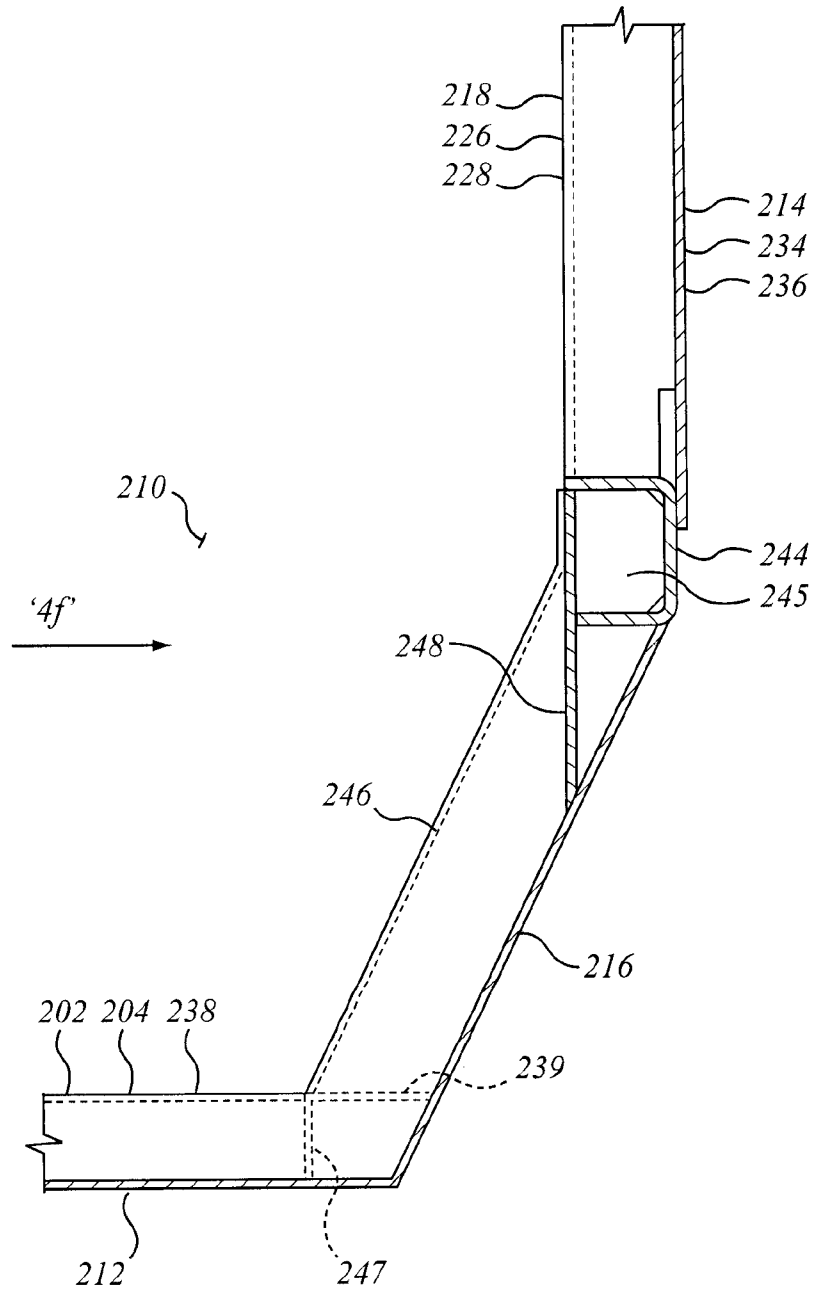


FIG. 4e

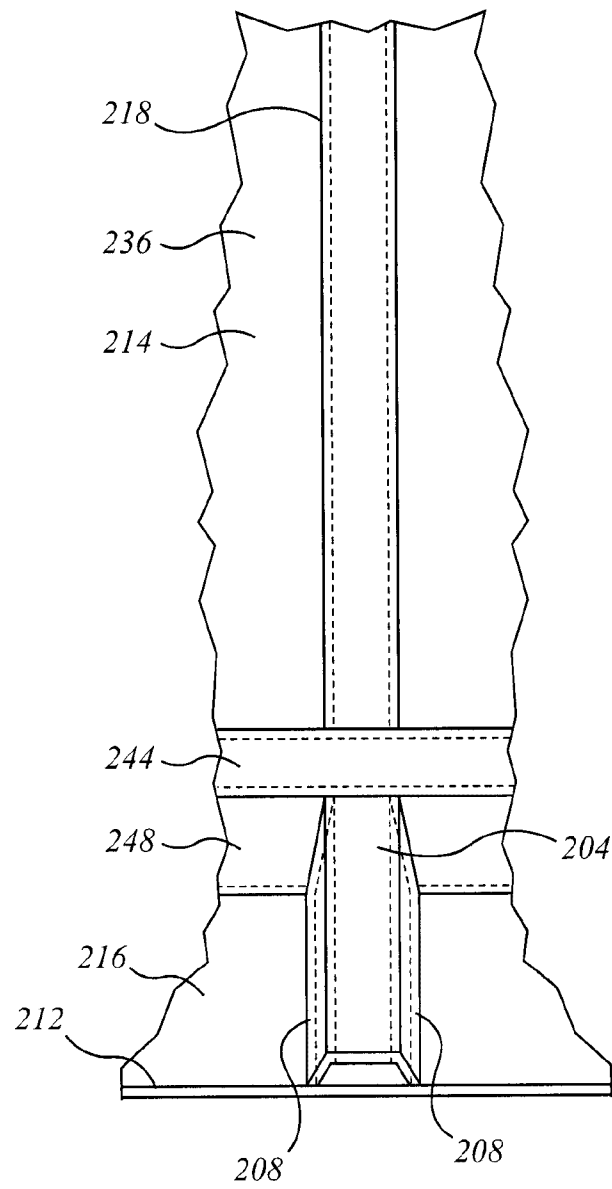


FIG. 4f

