



(51) International Patent Classification:

B29C 47/00 (2006.01) *B29C 47/34* (2006.01)
B29C 65/08 (2006.01) *B29L 31/00* (2006.01)
B29C 47/08 (2006.01)

(21) International Application Number:

PCT/US2018/038182

(22) International Filing Date:

19 June 2018 (19.06.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/522,457	20 June 2017 (20.06.2017)	US
62/577,517	26 October 2017 (26.10.2017)	US
16/010,967	18 June 2018 (18.06.2018)	US

(71) Applicant: **ORBIS CORPORATION** [US/US]; 1055 Corporate Center Drive, Oconomowoc, Wisconsin 53066 (US).

(72) Inventors: **MCMAHON, William F.**; 2073 St. Patrick Circle, Hartford, Wisconsin 53027 (US). **BALAZS, Donald J.**; 617 Rose St., Oconomowoc, Wisconsin 53066 (US).

(74) Agent: **HIMELHOCH, Richard C.**; Greensfelder Hemker & Gale P.C., 200 W. Madison Street, Suite 3300, Chicago, Illinois 60606 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) Title: BALANCED PROCESS FOR EXTRUSION OF PLASTIC CORRUGATED SHEET AND SUBSEQUENT CONVERTING INTO PLASTIC BOXES

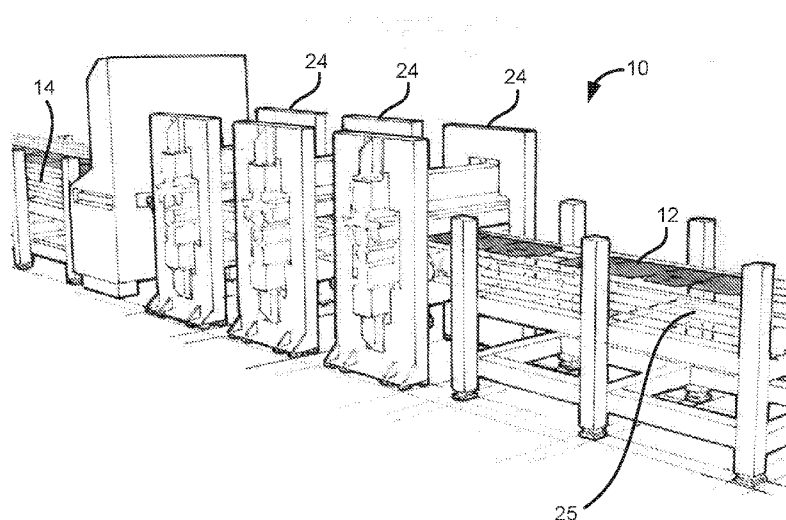


FIG. 1

(57) Abstract: The invention is directed to a balanced process for extrusion of a plastic corrugated sheet or blanks, and subsequent converting of the blanks into plastic boxes. The process includes conveying the blanks to a plurality of forming stations for incrementally forming features on the blank needed for forming a box. The present process is performed at a slower speed than typical paper corrugated forming.



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

BALANCED PROCESS FOR EXTRUSION OF PLASTIC CORRUGATED SHEET AND SUBSEQUENT CONVERTING INTO PLASTIC BOXES

DESCRIPTION

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present invention claims the benefit of U.S. Provisional Patent Application No. 62/522,457 filed June 20, 2017, U.S. Provisional Patent Application No. 62/577,517 filed October 26, 2017 and U.S. Patent Application No. 16/010,967 filed June 18, 2018, the contents of which are incorporated herein by reference.

FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0002] N/A

FIELD OF THE INVENTION

[0003] The present invention is directed toward a balanced process for the extrusion of plastic corrugated sheet and converting the sheet into plastic boxes.

DESCRIPTION OF THE PRIOR ART

[0004] Typical processing of corrugated boxes includes cutting blanks to size; printing (if necessary); die cutting the sized blanks; and folding and gluing the die cut blanks into a completed box assembly. Printing of box blanks can be done using a variety of processes and equipment. The most common are silk screen, flexographic, and digital printing.

Flexographic printing is far and away the most commonly used method for printing of secondary packaging and shippers. Rotary equipment that print and die cut/score blanks is the most cost effective method when high end graphics are not required. Through put speeds with corrugated are in excess of 10,000-12,000 per hour. Through put speeds in a flexographic print, and rotary die cut machine are in excess of 6,000-12,000 per hour.

[0005] Die cutting technology and equipment has been developed and refined for the production of paper corrugated boxes for over 100 years. Flatbed die cutting machines, with a straight up down cutting motion, provide the most precise and consistent die cut and scored blanks in both paper corrugated and plastic corrugated. Through put of top end flatbed die cut

machines is in excess of 7000 per hour when converting paper corrugated; slightly less for plastic corrugated. Flat Bed die cutters produce the best quality and most consistent boxes when compared to other die cutting processes.

[0006] Rotary Die cutting machines are the fastest commonly use machines to die cut and score blanks into boxes. Rotary machines typically combine printing and die cutting into a single machine so that both operations are completed in a single process step. The cutting and scoring of the blanks in these machines is done as the blanks are moved between two rotating cylinders: one with a cutting and scoring rule, and the other an anvil to cut into and compression score against. Rotary die cutting produces good quality paper corrugated boxes that will typically be a few cents per box less than boxes cut on a flat bed. This few cents per box can be important for large companies that purchase millions and millions of single use corrugated boxes per year. The few cents per box lower cost is less important for multiple use plastic corrugated boxes.

[0007] Additional converting machinery is used to form the box once the blank is formed. Folder Gluer machines take paper corrugated or plastic corrugated die cut and scored blanks and fold and glue them into a completed box.

[0008] The conventional approach of using converting equipment designed for paper corrugated to convert plastic corrugated results in an overall production process that is out of balance. In very simplified terms, the extrusion of plastic corrugated blanks is very slow and the equipment to convert blanks into boxes is very, very fast.

[0009] Using state of the art technology, a plastic corrugated extrusion and edge seal line can produce 40,000 – 60,000 blanks per week running 24 hours per day and seven days per week. A full week of production running 24/7 on a plastic corrugated extrusion line can be converted in less than one 8 hour shift using conventional paper corrugated converting equipment. The plastic corrugated box blanks produced by three state of the art extrusion/edge sealing lines running 24/7 could be converted into boxes in one day using conventional paper corrugated converting equipment.

[0010] However, the speed and size of conventional converting equipment and processes comes at a price. Such equipment and processes cannot consistently be utilized to convert plastic corrugated sheet.

[0011] The present invention provides an improved process for forming plastic corrugated material.

SUMMARY OF THE INVENTION

[0012] The present invention is directed to a process for forming plastic corrugated boxes in a plurality of steps at separate stations in an in-line system.

[0013] In accordance with one aspect of the invention, a balanced in-line process for forming blanks that can be used for forming boxes is provided. The process comprises sequencing a blank of corrugated plastic material having a first outer layer, a second outer layer and a plurality of flutes between the first outer layer and the second outer layer through a plurality of forming stations. This can be accomplished on a conveyor that moves the blank through each of the forming stations. The process includes forming a first body fold line separating a first box side wall and a second box side wall in the blank at a first forming station. Additionally, other body fold lines can be formed at this station as well. The process also includes forming a score line to create a first flap in the blank at a second forming station. Again, other score lines can be formed at this time for additional flaps.

[0014] The process can also include the steps of forming a first slot between the first flap and a second flap in the blank at a third forming station (or between additional flaps), and sealing the edges of the first slot. The process can further include forming a glue tab (or manufacturer's joint) at one end of the blank at a fourth forming station and cutting a hand hold into the blank at a fifth forming station.

[0015] The fold lines can be formed by joining the first outer layer of the blank to the second outer layer of the blank at each fold line. The score lines can be similarly formed.

[0016] The step of joining the first outer layer of the blank to the second outer layer of the blank can comprise contacting the blank with a die rule and a heated plate to weld the first outer layer to the second outer layer at the first fold line. Alternatively, this joining step can comprise contacting the blank with an ultrasonic emitter, which can be part of a plunge ultrasonic system or a rotary ultrasonic system. Further, the joining step can be contacting the blank with an impulse welding device.

[0017] The step of forming a glue tab at one end of the blank at a fourth forming station can comprise cutting the end of the blank to form a tab and joining the first outer layer of the

tab to the second outer layer of the tab. Again, the joining can utilize a rule and heated plate, ultrasonics or an impulse welding device.

[0018] The process can include other steps preformed at other forming stations. For example, the process can include forming smooth sealed edges on the blank, adding latch and hook material to a portion of the blank, and/or printing one or both surfaces of the blank.

[0019] Typical operating speeds for forming paper corrugated material are 2500-4500 blanks per hour. At this rate, there is not enough time to transfer heat from a heated plate to the plastic layers in a plastic corrugated material. Accordingly, the process is preferably run at a slower rate, for example, the blanks can be processed at a speed of approximately 325-450 blanks per hour. This slower rate provides more dwell time for transferring heat.

[0020] In accordance with another aspect of the invention, a balanced in-line process for forming a plurality of blanks on a conveyor system is provided. The process comprises sequencing a plurality of blanks of corrugated plastic material through a plurality of forming stations by a conveyor. Each blank has a first outer layer, a second outer layer and a plurality of flutes between the first outer layer and the second outer layer and can be initially formed in an extruder device. The process includes moving each of the plurality of blanks through a first forming station by the conveyor and forming a plurality of fold lines in each blank by joining the first outer layer to the second outer layer at each fold line at the first forming station. The process also includes moving each of the plurality of blanks through a second forming station by the conveyor and forming a plurality of flap score lines in each blank by joining the first outer layer to the second outer layer at each score line at the second forming station.

[0021] The process can further include moving each of the plurality of blanks through a third forming station by the conveyor and forming slots between flaps in each blank at the third forming station. The process can also include sealing edges of the slots formed in each blank.

[0022] The process can also include moving each of the plurality of blanks through a third (or fourth) forming station by the conveyor and forming a glue tab at an end of each blank by joining the first outer layer to the second outer layer at the glue tab. The joining step can be accomplished by contacting each blank with a die rule and a heated plate to weld

the first outer layer to the second outer layer at the fold lines. Alternatively, the joining can be accomplished by ultrasonics or impulse welding.

[0023] Further aspects of the invention are discussed herein and are shown in the Figures.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] To understand the present invention, it will now be described by way of example, with reference to the accompanying drawings in which:

[0025] FIGURE 1 is a perspective view of an in-line system for forming plastic corrugated blanks for forming boxes;

[0026] FIGURE 2 is a top perspective view of an in-line system for forming plastic corrugated blanks for forming boxes;

[0027] FIGURE 3 is a perspective view of steel rollers forming score lines in plastic corrugated blanks in a step of an in-line system;

[0028] FIGURE 4 is a partial perspective view of a steel scoring rule against a steel plate or “plunge” ultrasonic technology for folding body scores or fold lines;

[0029] FIGURE 5 is a partial side view of a heated steel plate and multiple scoring rules for forming score or fold lines in plastic corrugated blanks;

[0030] FIGURE 6 is an upper partial perspective view of an upper rule to flatten portions of a plastic corrugated blank and forming flap slots;

[0031] FIGURE 7 is partial perspective view of a plastic corrugated blank showing a slot between two flaps of the blank;

[0032] FIGURE 8 is a perspective view of an edge sealing system and a partial side view of the system;

[0033] FIGURE 9 is a perspective view of a prior flatbed die cutting system; and,

[0034] FIGURE 10 is a perspective view a prior rotary die cutter.

DETAILED DESCRIPTION

[0035] While this invention is susceptible of embodiments in many different forms, there is shown in the drawings and will herein be described in detail preferred embodiments of the invention with the understanding that the present disclosure is to be considered as an exemplification of the principles of the invention and is not intended to limit the broad aspect of the invention to the embodiments illustrated.

[0036] The conventional approach of using box converting equipment designed for paper corrugated material, to convert plastic corrugated material, results in an overall production process that is out of balance. In very simplified terms, the extrusion of plastic corrugated blanks is very slow and the conventional equipment to convert paper corrugated blanks into boxes is very, very fast.

[0037] As discussed herein, both paper and plastic corrugated boxes have been mass produced at high speed using flatbed or rotary die cutters as shown in Figures 7 and 8, respectively. In each instance, all (or most) of the features needed in the blanks is formed in a single pass by each cutter. While this works well for paper corrugated material, it can cause issues with plastic corrugated material, leaving such plastic blanks less desirable or un-useable.

[0038] Plastic corrugated material is typically extruded to include a first outer layer, a second outer layer, and a plurality of internal parallel flutes or ribs connecting the first outer layer to the second outer layer. Forming features in such material can be problematic because plastic has an inherent memory. That is, over time (in some cases immediately or in merely minutes) the plastic partially or completely returns to its pre-formed shape. Accordingly, scoring or fold lines, or other features tend to disappear if formed simply by compression.

[0039] One method for overcoming the tendency of the plastic to return to its original state, is to utilize heat (or heat plus pressure) when reforming the plastic. In particular, it is necessary in many instances to, in effect, weld the first outer layer of the corrugated material to the second outer layer when forming score or fold lines, or flattening portions of the material.

[0040] This “welding” of the plastic can be accomplished by heating elements of the die cutter. However, it is challenging and perhaps impossible to keep a full size plate of steel (i.e., as used in a conventional die cutter) perfectly flat when heated. This inability will affect the blanks produced. Moreover, the speed such conventional die cutting machinery uses is not conducive to forming good welds in the plastic.

[0041] The present invention provides an in-line process which utilizes a slower speed and modifies the blanks in smaller increments or portions (i.e., as opposed to a single pass by a conventional die cutter). It is much easier to keep small cutting/sealing platens flat at

elevated temperatures. Additionally, the slower speed of the in-line process allows more dwell time to seal edges and weld the plastic where necessary.

[0042] Figure 1 illustrates an in-line processing system 10 for converting plastic corrugated material into blanks 12 for forming boxes. The system 10 removes individual blanks from a stack 14. The blanks 12 are singulated for transfer through a number of steps to impart features onto each blank 12 in a series of operations.

[0043] One optional first step, shown in Figure 8, is sealing the edges of the plastic corrugated blank 12. Each blank 12 is drawn past a first die 16 that contacts a first edge 18 of the blank 12, and a second die 20 that contacts the second edge 22 of the blank 12. The dies 16, 20 seal the edge and form a rounded, smooth edge surface. A typical edge sealer can form 325-400 blanks 12 per hour – this is much slower than traditional die cutting equipment.

[0044] The blank 12 can then be indexed on a continuous belt 25 through an in-line series of additional operations at separate stations 24 of the system 10 to form the typical features needed for the blank 12 to be converted into a box. These include: (1) die cutting of glue tab (i.e., formation of manufacturer's joint connecting one end of the blank to the other); (2) die cutting of slots between bottom and top flaps; (3) flap scores; and (4) body scores or fold lines). The in-line process can also be used to impart other cuts and features to the blank, such as print or labels, or latch and hook material (e.g., Velcro®). After one step is performed, the blanks 12 are then transferred to the next station 24 for another operation.

[0045] Box flap and body scores can be imparted to the blank using several methods. These include using standard die rule to compress the material against a hard rigid plate (as is done with paper corrugated material). Using steel die rule or a steel bar to compress the plastic corrugated material against a heated steel plate to bond the upper and lower skins together. Using plunge type ultrasonic technology to impart the scores. Or using score rules to compress the plastic corrugated material against a steel plate. The plate could be heated to bond the upper and lower skins of the material for consistent score.

[0046] Figures 3-5 show components and process steps for forming flap and/or body scores. Flap scores 26 are shown being formed using steel rollers 28 in Figure 3. The steel rollers 28 compress, or compress and bond the plastic material as the sheet moves through the process sequence. If bonding (i.e., welding of the top and bottom skin) is desired, it can be

accomplished by compressing the material against a heated steel plate, or using rotary ultrasonic equipment.

[0047] Body scores 30 can also be imparted to the plastic corrugated blank using simple up and down compression of a steel scoring rule 32 against a steel plate as shown in Figure 4. Alternatively, “plunge” ultrasonic technology can be used.

[0048] Figure 5 also shows fold lines being formed in a blank 12. The blank 12 is on a heated steel plate 34. A plurality of scoring rules 36 compress the blank 12 against the steel plate 34.

[0049] By using a heated steel cutting plate 34, it is possible to bond the two outer skins of the plastic corrugated material together to form a clear fold line 30. When scored in this way the blank 12 will fold in the intended location and follow the imparted score line 30 rather than following the path of least resistance and jump to the area between the flutes adjacent to imparted score and the intended fold line 30.

[0050] A separate station 24 can be used to form and seal slots 38 between flaps 40 of the blank 12. As illustrated in Figures 6 and 7, a first die 42 and a second die 44 are each arranged to cut a slot 38 between adjacent flaps 40, and to seal the edges 46 of the slot 38. As blanks 12 are transferred and indexed through the sequential process steps, the flap slots 38 can be cut and sealed by a simple vertical press with mirror image cutting and sealing features on opposing sides of the transfer line. By using plunge ultrasonic technology or using steel rule to compress the plastic corrugated material to a heat steel plate 34 a quality cut and edge seal of slots 38 can be achieved.

[0051] Other stations – using similar dies, can be used to form other features, such as the glue joint 48 (i.e., manufacturer’s joint). The glue joint 48 is shown, for example, in Figures 2 and 4. Additionally, such stations can cut out portions of the blank 12, such as hand holds 50 as shown in Figure 2.

[0052] The in-line balanced process is designed for slower speeds (e.g., formation of 325-450 blanks 12 per hour). At such speeds, there is more dwell time for the heated steel plate to transfer enough heat to the blank 12 to get a good bond between the outer skins or layers of the material. At the 500+ per hour rate of conventional converting equipment there simply isn’t enough dwell time to get consistent quality bonded score lines.

[0053] The process of indexing blanks in an in-line series of operations has the added benefit of imparting features on smaller areas of the blank 12 in any single operational step. This allows doing things that are very challenging to do when doing all of the cutting and scoring in a single stroke as typically done in the converting of paper corrugated boxes.

[0054] The balanced in-line process indexes the sheet through a series of operations. Only the area for each individual step needs to have the heated cutting area.

[0055] Prior to the present invention, substantially all of the processing steps would have been done in a single pass of a die cutter, such as the flatbed die cutter 52 of Figure 9 or the rotary die cutter 54 of Figure 10. Because of the difficulty of heating the entire die cutter (which can distort the die), such prior processing did not result in consistently satisfactory blanks 12.

[0056] Instead of heating a large die cut plate (platen or striker plate) typical on a production flatbed die cutter 52, individual heated plates and vertical presses are used at the multiple stations 24. Such plates and presses are small when compared to the traditional flatbed die cutter 52. For boxes with 8 inch flaps, the heated cutting plate could be as small as 10 inches by 2 inches. For a box with 12 inch flaps the heated cutting plate could be as small as 14 inches by 2 inches. There is significantly less warp and distortion issues in heating a sequence of small plates as opposed to the large 82 inch x 48 inch platen of a flatbed die cut machined designed for paper corrugated material.

[0057] The order in which sequence steps are conducted is not important in the in-line process. Moreover, the in-line process allows for modular sequential operational steps. That is, not all boxes will require all features and not all modules of the in-line process needs to be used in the production of every box.

[0058] Many modifications and variations of the present invention are possible in light of the above teachings. It is, therefore, to be understood within the scope of the appended claims the invention may be protected otherwise than as specifically described.

CLAIMS

I/We claim:

1. A balanced in-line process for forming blanks for forming boxes comprising:
sequencing a blank of corrugated plastic material having a first outer layer, a second outer layer and a plurality of flutes between the first outer layer and the second outer layer through a plurality of forming stations;
forming a first body fold line separating a first box side wall and a second box side wall in the blank at a first forming station; and,
forming a score line to create a first flap in the blank at a second forming station.
2. The process of claim 1 further comprising the step of:
forming a first slot between the first flap and a second flap in the blank at a third forming station.
3. The process of claim 2 further comprising the steps of:
sealing edges of the first slot at the third forming station.
4. The process of claim 2 further comprising the step of:
forming a glue tab at one end of the blank at a fourth forming station.
5. The process of claim 4 further comprising the step of:
cutting a hand hold into the blank at a fifth forming station.
6. The process of claim 1 wherein the first fold line is formed by the step of:
joining the first outer layer of the blank to the second outer layer of the blank at the first fold line.
7. The process of claim 6 wherein the step of joining the first outer layer of the blank to the second outer layer of the blank at the first fold line comprises:

contacting the blank with a die rule and a heated plate to weld the first outer layer to the second outer layer at the first fold line.

8. The process of claim 6 wherein the step of joining the first outer layer of the blank to the second outer layer of the blank at the first fold line comprises:

contacting the blank with an ultrasonic emitter.

9. The process of claim 8 wherein the ultrasonic emitter is part of a plunge ultrasonic system.

10. The process of claim 8 wherein the ultrasonic emitter is part of a rotary ultrasonic system.

11. The process of claim 6 wherein the step of joining the first outer layer of the blank to the second outer layer of the blank at the first fold line comprises:

contacting the blank with an impulse welding device.

12. The process of claim 4 wherein the step of forming a glue tab at one end of the blank at a fourth forming station comprises:

cutting the end of the blank to form a tab;

joining the first outer layer of the tab to the second outer layer of the tab.

13. The process of claim 1 further comprising the step of:
forming smooth sealed edges on the blank at a third forming station.

14. The process of claim 1 further comprising the step of:
adding latch and hook material to a portion of the blank at a third forming station.

15. The process of claim 1 further comprising the step of:
printing a surface of the blank at a third forming station.

16. The process of claim 1 wherein the blanks are processed at a speed of approximately 325-450 blanks per hour.
17. A balanced in-line process for forming blanks for forming boxes comprising:
sequencing a plurality of blanks of corrugated plastic material through a plurality of forming stations by a conveyor, each blank having a first outer layer, a second outer layer and a plurality of flutes between the first outer layer and the second outer layer;
moving each of the plurality of blanks through a first forming station by the conveyor;
forming a plurality of fold lines in each blank by joining the first outer layer to the second outer layer at each fold line at the first forming station;
moving each of the plurality of blanks through a second forming station by the conveyor; and,
forming a plurality of flap score lines in each blank by joining the first outer layer to the second outer layer at each score line at the second forming station.
18. The process of claim 17 further comprising the steps of:
moving each of the plurality of blanks through a third forming station by the conveyor;
forming slots between flaps in each blank at the third forming station; and,
sealing edges of the slots formed in each blank.
19. The process of claim 17 further comprising the steps of:
moving each of the plurality of blanks through a third forming station by the conveyor;
forming a glue tab at an end of each blank at the third forming station by joining the first outer layer to the second outer layer at the glue tab.
20. The process of claim 17 wherein the step of forming a plurality of fold lines in each blank by joining the first outer layer to the second outer layer at each fold line at the first forming station comprises:

contacting each blank with a die rule and a heated plate to weld the first outer layer to the second outer layer at the fold lines.

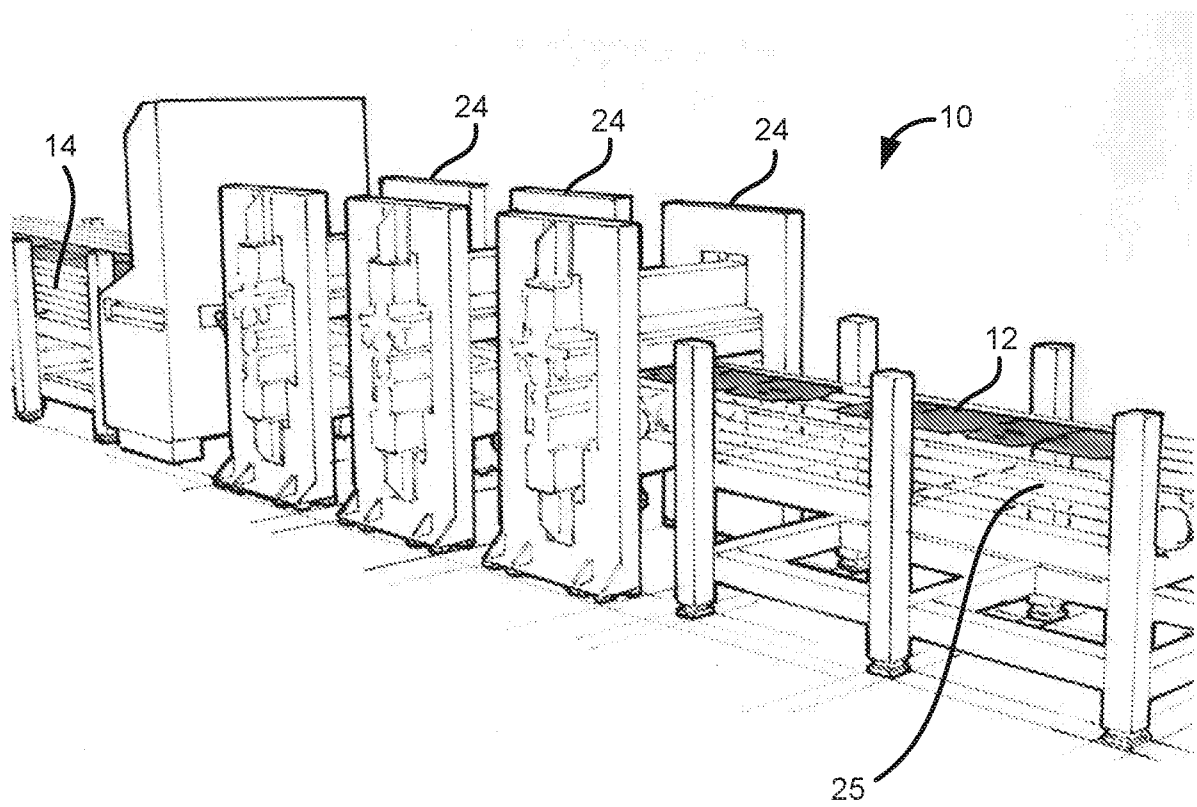


FIG. 1

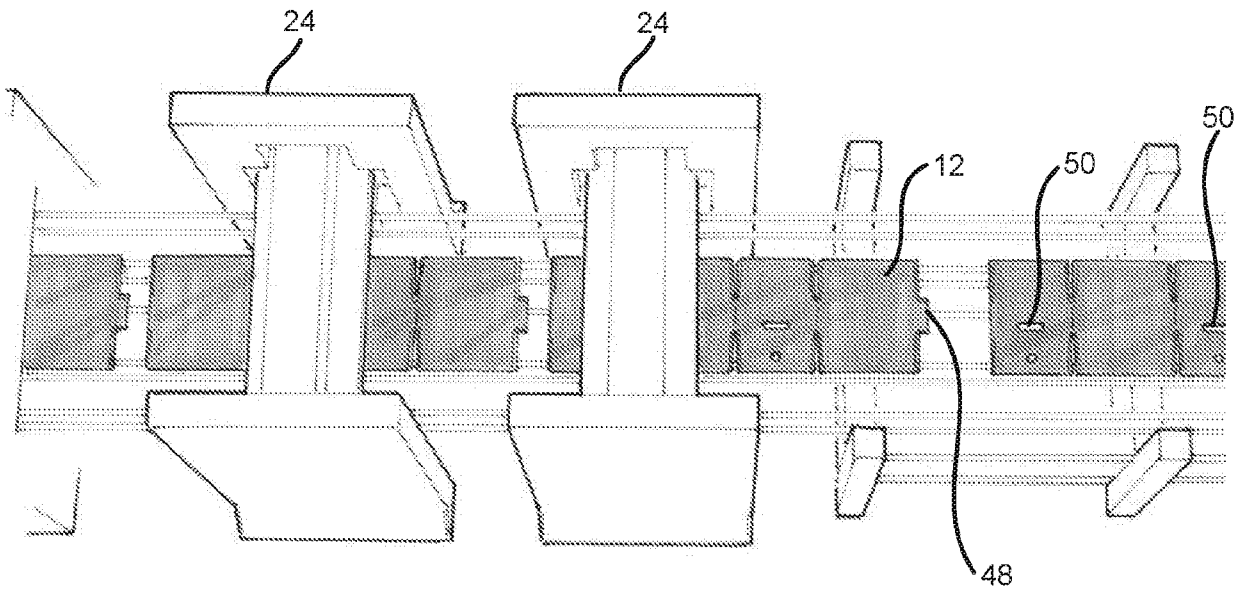
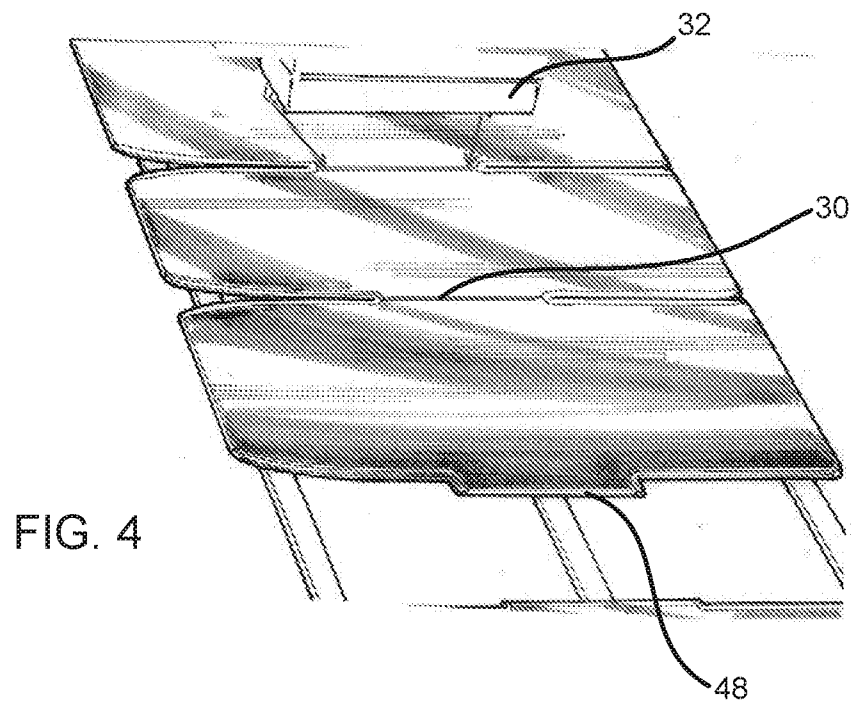
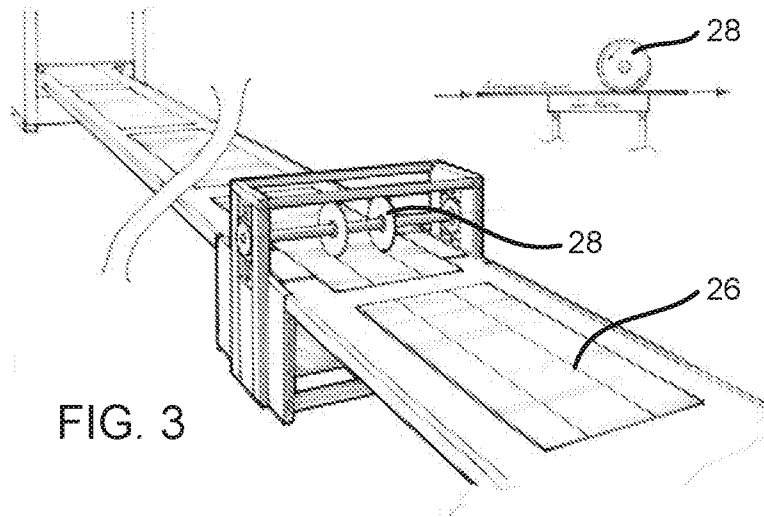


FIG. 2



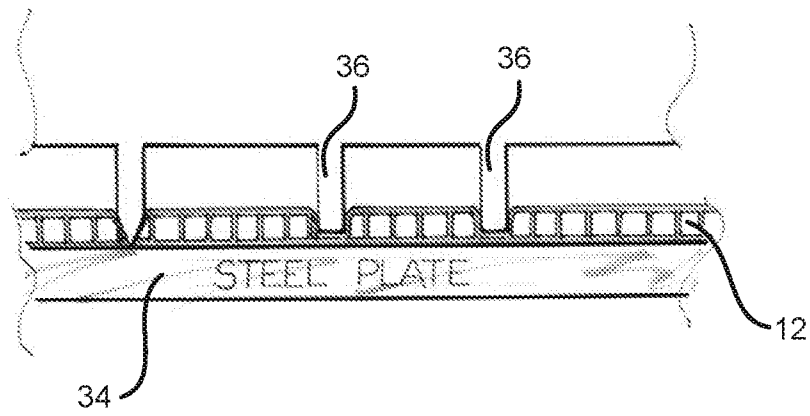


FIG. 5





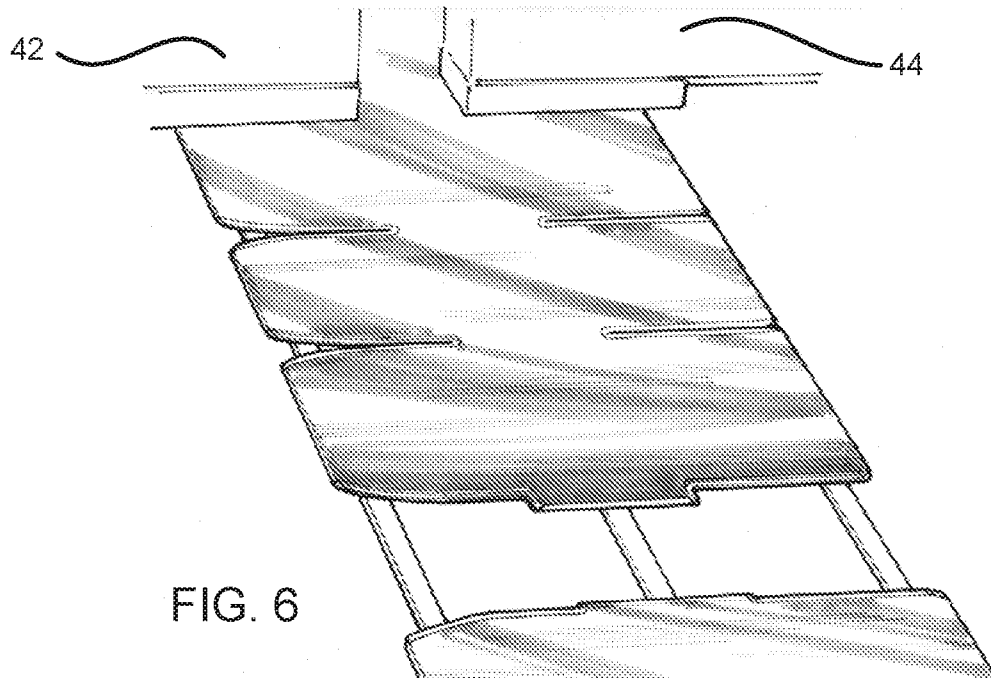


FIG. 6

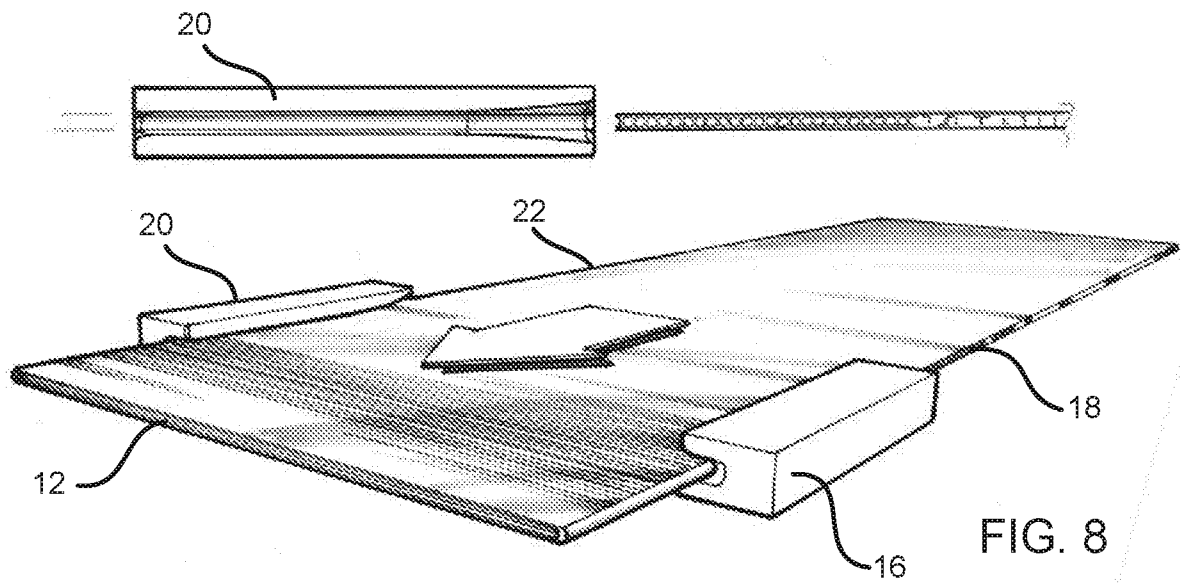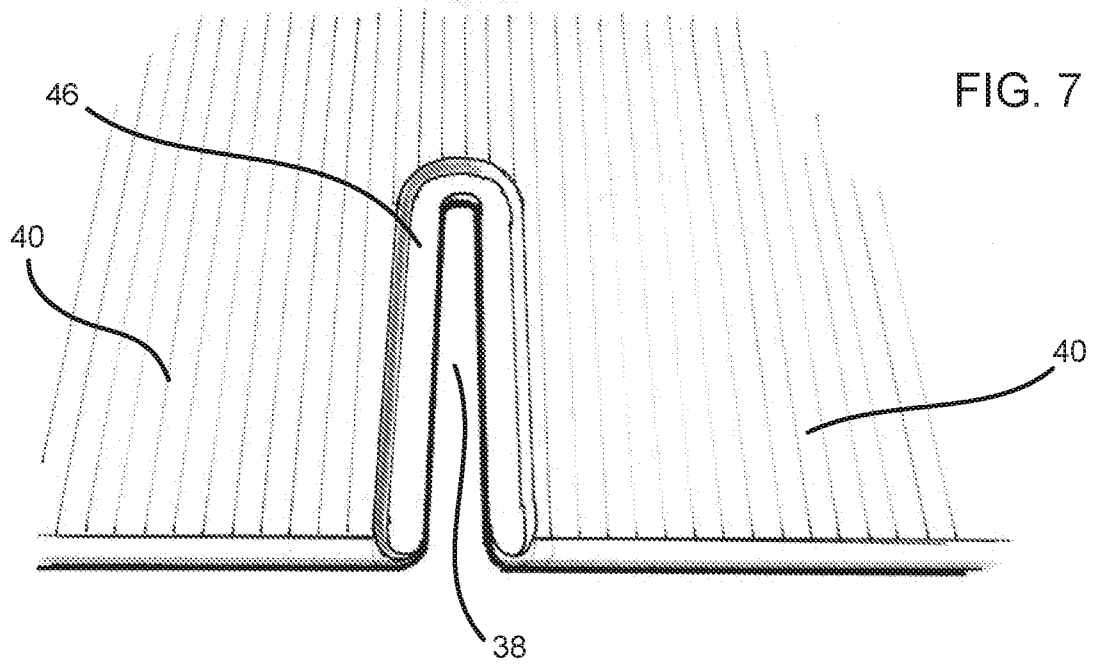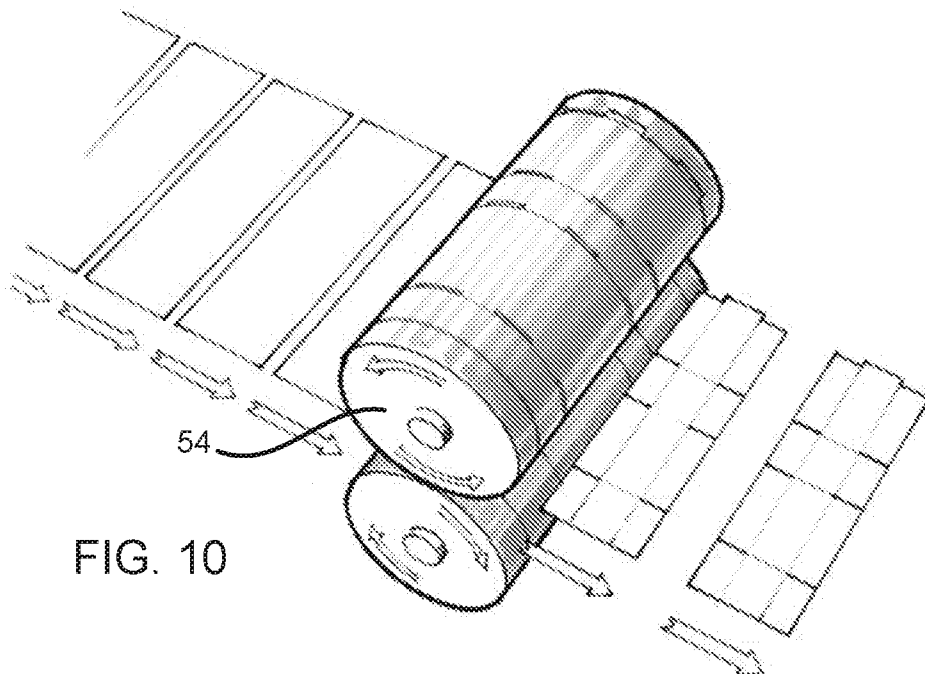

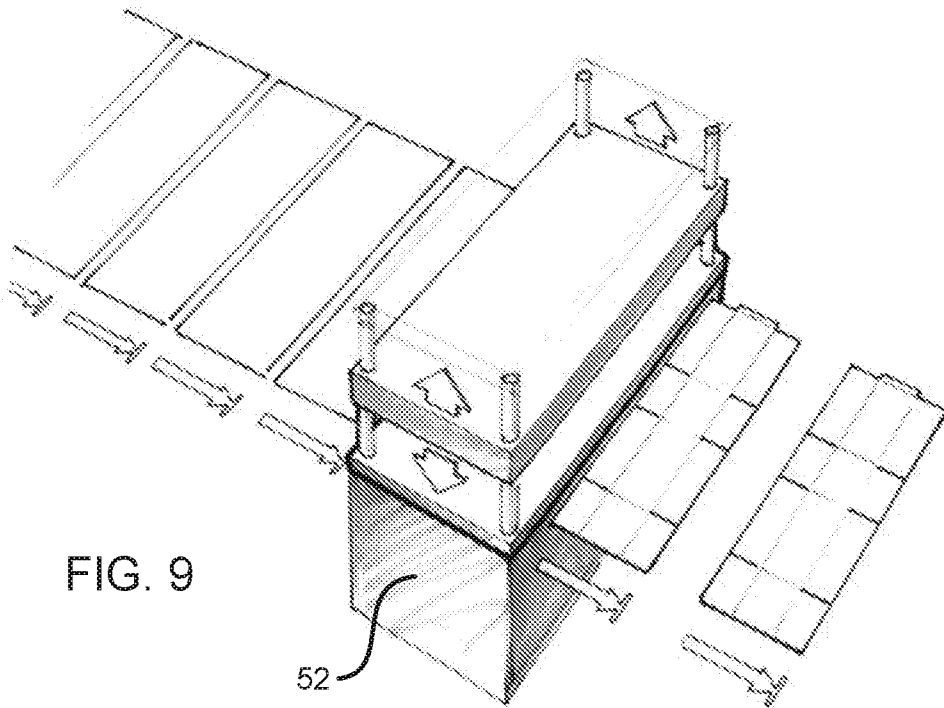

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2018/038182**A. CLASSIFICATION OF SUBJECT MATTER****B29C 47/00(2006.01)i, B29C 65/08(2006.01)i, B29C 47/08(2006.01)i, B29C 47/34(2006.01)i, B29L 31/00(2006.01)n**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B29C 47/00; B31B 1/36; B31B 1/60; B31B 1/86; B65D 5/42; B65D 5/46; B65D 6/10; C08L 23/12; B29C 65/08; B29C 47/08; B29C 47/34; B29L 31/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: corrugated box, blank, container, board, automatic, manufacture, conveyor, move, weld, ultrasonic and heat

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2017-0066214 A1 (POLIKOV, YURY) 09 March 2017 See paragraphs [0004], [0015] and figure 1.	1-20
Y	US 2015-0175297 A1 (ORBIS CORPORATION) 25 June 2015 See paragraphs [0032]-[0039], [0102]-[0117], [0124] and figures 8-9.	1-20
A	US 2016-0102196 A1 (ORBIS CORPORATION) 14 April 2016 See paragraphs [0012]-[0017] and figure 1.	1-20
A	US 2016-0096651 A1 (BRAUN GMBH) 07 April 2016 See paragraphs [0005]-[0009] and figure 1A.	1-20
A	US 2004-0248717 A1 (CALUGI, CANDIDO) 09 December 2004 See paragraphs [0012]-[0017] and figure 1.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 October 2018 (17.10.2018)

Date of mailing of the international search report

17 October 2018 (17.10.2018)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

KWON, Yong Kyong



Telephone No. +82-42-481-3371

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2018/038182

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2017-0066214 A1	09/03/2017	None	
US 2015-0175297 A1	25/06/2015	EP 3089917 A2 EP 3089917 B1 US 2015-0174849 A1 US 2015-0174850 A1 US 2015-0175298 A1 US 9604750 B2 US 9630739 B2 WO 2015-100249 A2 WO 2015-100249 A3	09/11/2016 20/06/2018 25/06/2015 25/06/2015 25/06/2015 28/03/2017 25/04/2017 02/07/2015 20/08/2015
US 2016-0102196 A1	14/04/2016	CA 2961959 A1 EP 3204225 A1 MX 2017004472 A TW 201627206 A WO 2016-057256 A1	14/04/2016 16/08/2017 07/06/2017 01/08/2016 14/04/2016
US 2016-0096651 A1	07/04/2016	CN 107074398 A EP 3002225 A1 EP 3002225 B1 US 9517857 B2 WO 2016-050888 A1	18/08/2017 06/04/2016 19/07/2017 13/12/2016 07/04/2016
US 2004-0248717 A1	09/12/2004	IT B020030349 A1	07/12/2004