



(51) International Patent Classification:

A24F 47/00 (2006.01) A61M 15/06 (2006.01)

A61M 11/00 (2006.01) B05B 17/00 (2006.01)

A61M 15/00 (2006.01) B05B 17/06 (2006.01)

(21) International Application Number:

PCT/US2019/047790

(22) International Filing Date:

22 August 2019 (22.08.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/721,310 22 August 2018 (22.08.2018) US

(71) Applicant: RESPIRA TECHNOLOGIES, INC.

[US/US]; 750 N San Vicente Blvd, Pacific Design Ctr Red Bldg, Los Angeles, CA 90069 (US).

(72) Inventor: DANEK, Mario; 11571 Ohio Ave., #2, Los Angeles, CA 90025 (US).

(74) Agent: TILLMAN, Chad, D. et al.; Tillman Wright, PLLC, P.O. Box 49309, Charlotte, NC 28277 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,

HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ELECTRONIC DEVICE FOR PRODUCING AN AEROSOL FOR INHALATION BY A PERSON

FIG. 12

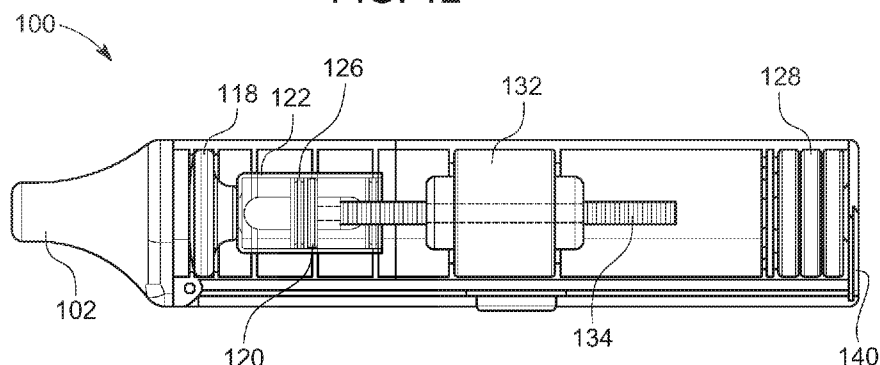

(57) Abstract: An electronic device for producing an aerosol for inhalation has a mouthpiece and an elongate housing. The mouthpiece attaches to an upper end of the housing. The housing contains a liquid container and a mesh assembly with mesh material that vibrates when actuated for aerosolizing liquid from the container. The mouthpiece covers the mesh assembly at the upper end of the housing, and the aerosol produced by the mesh assembly may be inhaled through the mouthpiece by a person. The housing contains circuitry and a power supply, preferably are located in a lower half of the housing, for actuating vibration of the mesh material. Electrical pathways connect the mesh assembly with the circuitry and power supply. The power supply may comprise one or more batteries located at the lower end of the housing. The aerosol is produced without smoldering of the liquid and without using a compressed gas.



ELECTRONIC DEVICE FOR PRODUCING AN AEROSOL FOR INHALATION BY A PERSON

COPYRIGHT STATEMENT

[001] Any new and original work of authorship in this document--including any source code--is subject to copyright protection under the copyright laws of the United States and other countries. Reproduction by anyone of this document as it appears in official governmental records is permitted, but otherwise all other copyright rights whatsoever are reserved.

BACKGROUND OF THE INVENTION

[002] The invention generally relates to apparatus, systems, and methods for producing an aerosol for inhalation by a person, whether intended for personal or recreational use or for the administration of medicines.

[003] Vaping has been rapidly increasing in popularity, primarily because vaping provides a convenient, discreet, and presumably benign way to self-administer nicotine, cannabis, drugs or other micronutrients. Indeed, there is a common belief that vaping is healthier than smoking cigarettes; vaping purportedly lets smokers avoid dangerous chemicals inhaled from regular cigarettes while still getting nicotine. Vaping also can be used for cannabis. Vaping is performed using a vaporizer. A vaporizer includes a vape pen or a cigarette style vape, referred to by many as an e-cigarette or “eCig”. A vape pen generally is an elongate, thin, and stylized tube that resembles a fancy pen. In contrast, an e-cigarette resembles an actual cigarette. The e-cigarette is usually small in size (usually smaller and more discreet than vape pens), easily portable, and easy to use. A common vaporizer comprises a liquid container, which may be a tank—which is typically refillable, or a cartridge—which is typically single-use and not refillable. The tank or cartridge holds a liquid often referred to as an e-liquid or e-juice. Tanks are made out of polycarbonate plastic, glass, or stainless steel. The vaporizer also includes a mouthpiece for inhaling by a user through the mouth; an atomizer comprising a tiny heating element that converts the liquid into tiny, airborne droplets that are inhaled; and a controller for turning on the atomizer. Many vape pens turn on automatically when a user inhales. Others require the user to push a button to activate the atomizer. Many vape pens are button activated. Others are mouth-activated. Vaporizers are electrically powered using one or more batteries. The batteries typically are lithium ion batteries that are rechargeable and primarily are used to heat the heating element of the atomizer. A charger usually accompanies a vaporizer when purchased for charging the batteries. The charger may be a USB charger, car charger, or wall charger, and such chargers are generally very similar to phone chargers.

[004] The battery-powered vaporizer produces vapor from any of a variety of substances, especially liquid containing nicotine or cannabinoids, allowing the user to inhale the vapor. Many different types and flavors of liquid are available. Moreover, the liquid can be non-medicated (i.e.,

containing no nicotine or other substances—just pure vegetable glycerin and flavoring), or the liquid can contain nicotine or even in some instances if and where legal, the liquid can contain THC/CBD. The liquid also may contain one or more of a variety of flavors as well as micronutrients such as, for example, vitamin B12. A user can mix the liquid for use with a vape pen. E-cigarettes typically are purchased with prefilled cartridges. The heating element turns the contents of the liquid into an aerosol—the vapor—that is inhaled into the lungs and then exhaled by the user. Perhaps one of the most popular vaporizers today is known as the “JUUL”, which is a small, sleek device that resembles a computer USB flash drive.

[005] It is believed that while promoted as healthier than traditional cigarette use, vaping actually may be more dangerous. Propylene glycol, vegetable glycerin and combinations or methylations thereof, are chemicals that are often mixed with nicotine, cannabis, or hemp oil for use in vaporizers. Propylene glycol is the primary ingredient in a majority of nicotine-infused e-cigarette solutions. Unfortunately, at high temperatures propylene glycol converts into tiny polymers that can wreak havoc on lung tissue. In particular, scientists know a great deal about propylene glycol. It is found in a plethora of common household items—cosmetics, baby wipes, pharmaceuticals, pet food, antifreeze, etc. The U.S. Food and Drug Administration and Health Canada have deemed propylene glycol safe for human ingestion and topical application. But exposure by inhalation is another matter. Many things are safe to eat but dangerous to breathe. Because of low oral toxicity, propylene glycol is classified by the FDA as “generally recognized as safe” (GRAS) for use as a food additive, but this assessment was based on toxicity studies that did not involve heating and breathing propylene glycol. Indeed, a 2010 study published in the International Journal of Environmental Research and Public Health concluded that airborne propylene glycol circulating indoors can induce or exacerbate asthma, eczema, and many allergic symptoms. Children were said to be particularly sensitive to these airborne toxins. An earlier toxicology review warned that propylene glycol, ubiquitous in hairsprays, could be harmful because aerosol particles lodge deep in the lungs and are not respirable.

[006] Moreover, when propylene glycol is heated, whether by a red-hot metal coil of a heating element of a vaporizer or otherwise, the potential harm from inhalation exposure increases. It is believed that high voltage heat transforms the propylene glycol and other vaping additives into carbonyls. Carbonyls are a group of cancer-causing chemicals that includes formaldehyde, which has been linked to spontaneous abortions and low birth weight. A known thermal breakdown product of propylene glycol, formaldehyde is an International Agency for Research on Cancer group 1 carcinogen!

[007] Prevalent in nicotine e-cig products and present in some vape oil cartridges, FDA-approved flavoring agents pose additional risks when inhaled rather than eaten. The flavoring compounds smooth and creamy (diacetyl and acetyl propionyl) are associated with respiratory illness

when inhaled in tobacco e-cigarette devices. Another hazardous-when-inhaled-but-safe-to-eat flavoring compound is Ceylon cinnamon, which becomes cytotoxic when aerosolized.

[008] When heating element gets red hot in a vaporizer, the liquid undergoes a process called “smoldering”, which is a technical term for what is tantamount to “burning”; while much of the liquid is vaporized and atomized, a portion of the liquid undergoes pyrolysis or combustion. In that sense, most of the vaporizers that have flooded the commercial market may not be true vaporizers.

[009] In view of the foregoing, it is believed that a need exists for a vaporizer that provides an aerosol of the desired chemicals without the harmful byproducts that arise from smoldering. This and other needs are believed to be provided by a vaporizer in accordance with one or more aspects and features of the invention.

SUMMARY OF THE INVENTION

[010] The invention includes many aspects and features. Moreover, while many aspects and features relate to, and are described in, the context of vaping, the invention is not limited to use only in such context. Indeed, depending on the context of use, the electronic device of the invention may be considered a vaporizer and may be in the form of a vape pen or e-cigarette. Indeed, those who vape may come to refer to embodiments of the invention as a vape pen even though heat is not utilized to create the aerosol that is inhaled. In the delivery of pharmaceuticals, patients may come to refer to embodiments of the invention as a nebulizer even though compressed gas is not utilized and even though the aerosol that is produced in accordance with the invention may have a smaller particle size than the mist produced by common nebulizers. Other separate and distinct contexts of use of embodiments of the invention may similarly result in different nomenclature of the electronic device. Nonetheless, while the appearance and form factor of embodiments of the invention may vary depending on the context of use, the basic components and operation remain the same.

[011] In an aspect of the invention, an electronic device for producing an aerosol for inhalation by a person comprises: a mouthpiece and an upper housing component to which the mouthpiece attaches, wherein the upper housing component contains a liquid container and a mesh assembly having a mesh material that vibrates when actuated for aerosolizing liquid from the liquid container that comes into contact with the vibrating mesh material, and wherein the aerosol so produced may be inhaled through the mouthpiece; and a lower housing component containing circuitry and a power supply for actuating vibration of the mesh material, wherein electrical pathways connect the mesh assembly of the upper housing component with the circuitry and power supply of the lower housing component.

[012] In a feature, the upper housing component and the lower housing component are detachable from each other, and electrical contacts connect the electrical pathways between the upper

housing component and the lower housing component when the upper housing component and the lower housing component are connected.

[013] In a feature, the mouthpiece is detachable from the upper housing component to expose the vibrating mesh material. In this respect, the mouthpiece preferably snaps onto a rim surrounding a recessed area or opening of the upper housing component in which the vibrating mesh material is located, thereby defining a partially enclosed space above the vibrating mesh material.

[014] In a feature, the device comprises no heating element configured to heat the liquid to aerosolize the liquid.

[015] In a feature, the device comprises no compressed gas configured to aerosolize the liquid.

[016] In a feature, the electronic device produces a fine particle, low velocity aerosol for central and deep lung deposition.

[017] In a feature, the mesh material comprises an oscillating piezoelectric material that aerosolizes liquid that comes into contact with one side thereof, the aerosol being produced on the opposite side of the vibrating mesh material in the partially enclosed space defined by the mouthpiece when attached to the upper housing component. The oscillating piezoelectric material may be a single layer oscillating piezoelectric material, or the oscillating piezoelectric material may be a multi-layer oscillating piezoelectric material. The oscillating piezoelectric material preferably is in the form of a mesh disk.

[018] In a feature, the liquid is pressured into contact with a first side of the vibrating mesh material, and the vibrating mesh material comprises small openings through which droplets of the liquid pass to form the aerosol as the vibrating mesh material oscillates. Furthermore, the droplets of the aerosol produced preferably are between 1 and 4 micron aerosol droplets.

[019] In a feature, the liquid container comprises a cartridge.

[020] In a feature, the power supply comprises one or more lithium-ion batteries.

[021] In a feature, the power supply comprises one or more rechargeable batteries.

[022] In a feature, the circuitry and power supply are configured to further operate a pump system that causes the liquid from the liquid container to come into contact with the first side of the vibrating mesh material. The pump system preferably comprises a motor and a threaded shaft that is rotated by the motor, the rotation of the threaded shaft causing the liquid to be pushed toward the vibrating mesh material. The liquid preferably is pushed toward the vibrating mesh material by a stopper that is advanced by the rotating shaft; the stopper is advanced by engagement with a plunger that is attached to the threaded shaft and that is directly driven by rotation of the threaded shaft by the motor, or alternatively, the stopper is attached to the threaded shaft and is directly driven by rotation of the threaded shaft by the motor.

[023] In another feature, the electronic device further comprises means for causing the liquid to be in contact with a lower side of the mesh material facing the liquid container. The means may comprise any of the pump systems disclosed herein, whether actively powered or a passive system, such as a capillary pump.

[024] In another feature, the electronic device comprises a capillary pump, wherein the liquid is drawn into contact with the mesh material through capillary action.

[025] In another feature, the upper housing component and the lower housing component fit together to define a body of the electronic device, which body is of a size and shape for gripping and holding by hand during use of the electronic device.

[026] In another aspect, an electronic device for producing an aerosol for inhalation by a person comprises: (a) a mouthpiece; and (b) an elongate housing having opposite first and second ends, with the mouthpiece being attached to the first end and with the housing comprising therein, (i) a mesh assembly comprising a mesh material that vibrates when actuated, (ii) a liquid container containing a liquid that is aerosolized by the mesh material when actuated for inhalation through the mouthpiece, and (iii) circuitry and a power supply for actuating vibration of the mesh material, wherein electrical pathways connect the mesh assembly with the circuitry and power supply; (c) wherein the mesh assembly and the liquid container are arranged in-line along a longitudinal axis of the electronic device.

[027] In a feature, the mesh assembly extends between and separates the mouthpiece and the liquid container.

[028] In a feature, the power supply of the electronic device comprises batteries that are arranged along the longitudinal axis of the device and that are located at the second end of the housing.

[029] In a feature, the liquid contacts the mesh material as a result of capillary action.

[030] In a feature, the electronic device further comprises means for causing the liquid to be in contact with a lower side of the mesh material facing the liquid container.

[031] In another aspect, a method for producing an aerosol for inhalation by a person using an electronic device comprises the steps of causing a mesh material to vibrate while causing a liquid to contact a first side of the mesh material, whereby droplets of the liquid are formed on the opposite side of the mesh material to create an aerosol for inhalation.

[032] In a feature, the mesh material is a mesh disk and the liquid is caused to contact the first side of the mesh disk at a generally constant pressure so that the aerosol that is produced will have a generally consistent concentration of the liquid. Additionally, the liquid preferably is maintained in constant contact with the first side of the mesh disk, even when the vibrating mesh is not being actuated.

[033] Additionally, the electronic device preferably is actuated for a predetermined period of time by a button press, whereby a consistent volume of aerosol for inhalation is produced for each button press. Alternatively, the electronic device is actuated by depressing a button by a user of the electronic device, with the aerosol being produced while the button is depressed. The liquid may be pushed from a cartridge by a stopper that is advanced through a liquid container of the cartridge, and the liquid container of the cartridge may be cylindrical. Furthermore, the stopper may be advanced through the liquid container by actuation of a motor that drives a threaded shaft. This may be accomplished by the stopper being attached to the threaded shaft such that the stopper advances through the liquid container when the threaded shaft is rotated, or by a plunger (or plunger head) being attached to the threaded shaft and advancing through the liquid container when the threaded shaft is rotated such that the plunger engages and advances the stopper for pushing the liquid into contact with the vibrating mesh material.

[034] In another feature, the aerosol preferably is produced without smoldering of the liquid.

[035] In another feature, the aerosol is produced without utilizing a compressed gas.

[036] In another aspect, a method for producing an aerosol for inhalation by a person using an electronic device having a mouthpiece comprises the steps of causing a mesh material to vibrate while causing a liquid to contact a first side of the mesh material, whereby droplets of the liquid are formed on a second, opposite side of the mesh material to create the aerosol for inhalation through the mouthpiece.

[037] In a feature, the device has opposite longitudinal ends and the mouthpiece is located on one of the opposite longitudinal ends of the device.

[038] In a feature, the mesh material has a side facing the mouthpiece and an opposite side facing a liquid container containing the liquid for aerosolized.

[039] In a feature, the mouthpiece, the mesh material, and the liquid container are arranged in-line along the longitudinal axis of the electronic device, with the mesh material extending between and separating the mouthpiece from the liquid container. The mesh material in preferred embodiments is a mesh disk.

[040] In a feature, the electronic device is actuated for a predetermined period of time for producing a consistent volume of aerosol for inhalation.

[041] In a feature, the electronic device is actuated by depressing a button by a user of the electronic device.

[042] In a feature, the liquid is caused to contact the first side of the mesh material at a

generally constant pressure.

[043] In a feature, the liquid is pushed from a cartridge by a stopper that is advanced through a liquid container of the cartridge. The liquid container of the cartridge preferably is cylindrical but may have another geometric profile. The stopper preferably is advanced through the liquid container by actuation of a motor that drives a shaft. The stopper may be attached to the shaft and directly driven so as to advance through the liquid container when the shaft is rotated, or the electronic device may further comprise a plunger is attached to the shaft and that is directly driven so as to advance through the liquid container when the shaft is rotated, wherein the plunger engages and advances the stopper for pushing the liquid into contact with the vibrating mesh material.

[044] In a feature, the aerosol preferably is produced without smoldering of the liquid.

[045] In a feature, the aerosol preferably is produced without utilizing a compressed gas.

[046] In a feature, the method further comprises a step for causing the fluid to be in constant contact with the mesh material using capillary action. The step may be carried out by an active pump system or a passive pump system such as a capillary pump system using capillary action.

[047] Another aspect comprises using an electronic device in accordance with one or more of the aforementioned aspects and features to perform a method of producing an aerosol for inhalation by a person using such electronic device.

[048] In addition to the aforementioned aspects and features of the invention, it should be noted that the invention further encompasses the various logical combinations and subcombinations of such aspects and features.

BRIEF DESCRIPTION OF THE DRAWINGS

[049] One or more preferred embodiments of the invention now will be described in detail with reference to the accompanying drawings, wherein the same elements are referred to with the same reference numerals.

[050] FIG. 1 is a perspective view of a preferred electronic device in accordance with one or more aspects and features of the invention.

[051] FIG. 2 is an exploded view of components of the electronic device of FIG. 1.

[052] FIG. 3 is another exploded view of components of the electronic device of FIG. 1.

[053] FIG. 4 is a partial, exploded view of components of the electronic device of FIG. 1.

[054] FIG. 5 is another partial exploded view of components of the electronic device of FIG. 1.

[055] FIG. 6 is another exploded view of components of the electronic device of FIG. 1.
[056] FIG. 7 is a transparent view of components of the electronic device of FIG. 1.
[057] FIG. 8 is a partial view of components of the electronic device of FIG. 1.
[058] FIG. 9 is another partial view of components of the electronic device of FIG. 1.
[059] FIG. 10 is another transparent view of the cartridge of the electronic device of FIG. 1.

[060] FIGS. 11, 12, 13 and 14 are partial internal views of the electronic device of FIG. 1.

[061] FIG. 15 is a block diagram of a method for producing a fine particle, low velocity aerosol using a preferred electronic device in accordance with one or more aspects and features of the invention.

[062] FIG. 16 is a partial internal view of another preferred electronic device in accordance with one or more aspects and features of the invention.

[063] FIG. 17 is a schematic illustration of yet another preferred electronic device in accordance with one or more aspects and features of the invention.

[064] FIG. 18 is a partial schematic illustration of an electromagnetic cartridge of the electronic device of FIG. 17.

[065] FIG. 19 is a transparent view of internal components of another preferred electronic device in accordance with one or more aspects and features of the invention.

DETAILED DESCRIPTION

[066] As a preliminary matter, it will readily be understood by one having ordinary skill in the relevant art (“Ordinary Artisan”) that the invention has broad utility and application. Furthermore, any embodiment discussed and identified as being “preferred” is considered to be part of a best mode contemplated for carrying out the invention. Other embodiments also may be discussed for additional illustrative purposes in providing a full and enabling disclosure of the invention. Furthermore, an embodiment of the invention may incorporate only one or a plurality of the aspects of the invention disclosed herein; only one or a plurality of the features disclosed herein; or combination thereof. As such, many embodiments are implicitly disclosed herein and fall within the scope of what is regarded as the invention.

[067] Accordingly, while the invention is described herein in detail in relation to one or more embodiments, it is to be understood that this disclosure is illustrative and exemplary of the invention and is made merely for the purposes of providing a full and enabling disclosure of the invention. The detailed disclosure herein of one or more embodiments is not intended, nor is to be construed, to limit the scope of patent protection afforded the invention in any claim of a patent issuing here from, which scope is to be defined by the claims and the equivalents thereof. It is not intended that the scope of

patent protection afforded the invention be defined by reading into any claim a limitation found herein that does not explicitly appear in the claim itself.

[068] Thus, for example, any sequence(s) and/or temporal order of steps of various processes or methods that are described herein are illustrative and not restrictive. Accordingly, it should be understood that, although steps of various processes or methods may be shown and described as being in a sequence or temporal order, the steps of any such processes or methods are not limited to being carried out in any particular sequence or order, absent an indication otherwise. Indeed, the steps in such processes or methods generally may be carried out in various different sequences and orders while still falling within the scope of the invention. Accordingly, it is intended that the scope of patent protection afforded the invention be defined by the issued claim(s) rather than the description set forth herein.

[069] Additionally, it is important to note that each term used herein refers to that which the Ordinary Artisan would understand such term to mean based on the contextual use of such term herein. To the extent that the meaning of a term used herein—as understood by the Ordinary Artisan based on the contextual use of such term—differs in any way from any particular dictionary definition of such term, it is intended that the meaning of the term as understood by the Ordinary Artisan should prevail.

[070] With regard to any method claim including a condition precedent step, such method requires the condition precedent to be met and the step to be performed at least once but not necessarily every time during performance of the claimed method.

[071] Furthermore, it is important to note that, as used herein, “comprising” is open-ended insofar as that which follows such term is not exclusive. Additionally, “a” and “an” each generally denotes “at least one” but does not exclude a plurality unless the contextual use dictates otherwise. Thus, reference to “a picnic basket having an apple” is the same as “a picnic basket comprising an apple” and “a picnic basket including an apple”, each of which identically describes “a picnic basket having at least one apple” as well as “a picnic basket having apples”; the picnic basket further may contain one or more other items beside an apple. In contrast, reference to “a picnic basket having a single apple” describes “a picnic basket having only one apple”; the picnic basket further may contain one or more other items beside an apple. In contrast, “a picnic basket consisting of an apple” has only a single item contained therein, i.e., one apple; the picnic basket contains no other item.

[072] When used herein to join a list of items, “or” denotes “at least one of the items” but does not exclude a plurality of items of the list. Thus, reference to “a picnic basket having cheese or crackers” describes “a picnic basket having cheese without crackers”, “a picnic basket having crackers without cheese”, and “a picnic basket having both cheese and crackers”; the picnic basket further may contain one or more other items beside cheese and crackers.

[073] When used herein to join a list of items, “and” denotes “all of the items of the list”. Thus, reference to “a picnic basket having cheese and crackers” describes “a picnic basket having cheese, wherein the picnic basket further has crackers”, as well as describes “a picnic basket having crackers, wherein the picnic basket further has cheese”; the picnic basket further may contain one or more other items beside cheese and crackers.

[074] The phrase “at least one” followed by a list of items joined by “and” denotes an item of the list but does not require every item of the list. Thus, “at least one of an apple and an orange” encompasses the following mutually exclusive scenarios: there is an apple but no orange; there is an orange but no apple; and there is both an apple and an orange. In these scenarios if there is an apple, there may be more than one apple, and if there is an orange, there may be more than one orange. Moreover, the phrase “one or more” followed by a list of items joined by “and” is the equivalent of “at least one” followed by the list of items joined by “and”.

[075] Referring now to the drawings, one or more preferred embodiments of the invention are next described. The following description of one or more preferred embodiments is merely exemplary in nature and is in no way intended to limit the invention, its implementations, or uses.

[076] In accordance with electronic devices of the invention, a vibrating mesh is provided for aerosolizing a liquid without smoldering. In the context of vaping, such preferred devices of the invention therefore are believed to produce an aerosol that is carcinogen free. This is in stark contrast to vaporizers used today to aerosolize e-liquids by heating the e-liquids as a way to aerosolize the liquid carrier and desired compounds contained therein (e.g., nicotine) or supplements such as B12, THC/CBD and other drugs or stimulants. As a result of using heating to aerosolize the e-liquids, these vaporizers produce toxic byproducts like formaldehyde, a recognized Group 1 carcinogen for cancer, which toxic byproducts then are unfortunately inhaled by a person using the vaporizer. For example, when the liquid carriers are heated, the liquid carriers undergo a thermochemical reaction producing unwanted emissions. The unwanted emissions of the toxic byproducts may cause bodily harm from extended inhalation exposure.

[077] By utilizing a vibrating mesh, preferred electronic devices in accordance with one or more aspects and features of the invention produce an aerosol without using heat and thus advantageously avoid such toxic byproducts created by the vaporizers currently on the market. The electronic devices thereby advantageously produce a carcinogen free aerosol free of harmful emission byproducts.

[078] One of the primary performance metrics evaluated for aerosols is the residual aerodynamic particle size distribution ("APSD") of the aerosolized drug product. The residual APSD is characterized by the residual mass median aerodynamic diameter ("MMAD") and the geometric

standard deviation ("GSD"). The MMAD signifies the aerodynamic diameter at which half of the aerosolized drug mass lies below the stated diameter.

[079] The $MMADR = MMDI \times pI \times CNV^{1/3} \times pR^{1/6}$, where $MMADR$ (μm) is the mass median aerodynamic diameter of the residual particles, $MMDI$ (μm) is the mass median diameter (MMD) of the initial droplets, CNV (weight fraction) is the concentration of the non-volatile components (e.g., dissolved drug and excipients) in the formulation, and pI and pR are the densities (g/cm^3) of the formulation and the residual particles, respectively.

[080] In electronic devices of the invention, the vibrating mesh may include a single layer oscillating piezoelectric material to aerosolize the liquid. In an example, the mesh may have a double or multi-layer structure. Multiple mesh membranes may be arranged to induce an optimum MMAD and/or APSD for the aerosolized liquid.

[081] Additionally, the mesh may be constructed from one or more different piezoelectric materials to optimize the MMAD and/or APSD.

[082] Additionally, the arrangement and design of the mesh (e.g., placement of the holes, angstrom size) and hygroscopic effects of the lungs may be considered for optimum deposition and diffusion into the bloodstream. In an example, the vibrating mesh is configured to create a fine particle low velocity aerosol which is well suited for central and deep lung deposition. By producing a fine particle, low velocity aerosol, one or more preferred electronic devices of the invention advantageously can produce an aerosol that is adapted to target small airways in the management of asthma and COPD.

[083] Additionally, a pump system is utilized to pump or push the liquid to be aerosolized into contact with the vibrating mesh whereby droplets of the liquid are created on the other side of the vibrating mesh on the order of 1 to 4 microns. While it is contemplated that a capillary pump may be used (wherein the liquid is drawn into contact with the mesh material through capillary action), electronic devices of the invention preferably further include a pump system that is powered by an electrical power source of the device, such as batteries and, preferably, rechargeable batteries. Such a pump system preferably comprises a piezoelectric motor, as further described in detail below.

[084] Turning now to the drawings, FIG. 1 is a perspective view of a preferred electronic device 100 for producing an aerosol for inhalation in accordance with one or more aspects and features of the invention. The electronic device 100 comprises a mouthpiece 102 having an opening 104 through which the aerosol is inhaled; an upper housing component 106; and a lower housing component 108. The mouthpiece 102, upper housing component 106, and lower housing component 108 fit together to define a body of the electronic device 100, which body is of a size and shape for gripping and holding by hand during use of the device 100. When used as intended, the electronic device 100 would be held with the mouthpiece 102 oriented upright

or at an inclination to horizontal, or any orientation therebetween. Regardless of the orientation, the device **100** works the same in producing the aerosol for inhalation.

[085] The top housing **106** is attached to the lower housing component **108** via a hinge **110** including hinge pin **112** for pivoting movement of the top housing **106** relative to the bottom housing **108** between an open position and a closed position. The closed position is shown, for example, in FIG. 1. The mouthpiece **102** preferably snaps in friction fit onto the top housing **106**.

[086] The form factor of the electronic device **100** resembles that of a nebulizer for administering drugs including, for example, prescription medicines. Electronic devices of the invention are not limited to such form factors. For example, another electronic device **300** of the invention is illustrated in FIG. 19, discussed below; electronic device **300** has a form factor resembling that of a vape pen.

[087] Continuing with the description of the electronic device **100**, and with further reference to FIG. 1, the device **100** further comprises a button **114** for turning on or otherwise actuating the device **100** and a window **116** for viewing a level of liquid in the device **100**. When actuated, the device preferably produces an aerosol for inhalation. A set, predetermined volume of liquid contained in the device preferably is aerosolized each time the device is turned on or actuated using button **114**. The amount of liquid remaining in the device to be aerosolized preferably is viewable through the window **116**.

[088] FIG. 2 is an exploded view of components of the electronic device **100**. As seen in FIG. 2, the mouthpiece **102**, upper housing component **106**, and lower housing component **108** are separable from each other. Thus, the body can be disassembled by a user. A glimpse of a mesh assembly **118** including a vibrating mesh in the form of a vibrating mesh material contained within the upper housing component **106** and a glimpse of a plunger **120** contained within the lower housing component **108** also are seen in FIG. 2.

[089] FIG. 3 is another exploded view of components of the electronic device **100**. FIG. 3 is perhaps best notable for revealing a liquid container in the form of a cartridge **122** that is contained within the upper housing component **106**. The cartridge **122** contains the liquid that is aerosolized and the cartridge **122** preferably is removable from the upper housing component **106** either when the upper housing component is disconnected and separated from the lower housing component **108** or when the upper housing component **106** is rotated from the closed position to an open position by pivoting around the hinge **110** and hinge pin **112**. Preferably following use and depletion the cartridge **122** is replaced with a new cartridge having a full supply of liquid to be aerosolized. The cartridge **122** of FIG. 3 is full of a liquid and is seen

being inserted into the upper housing component 106. In alternatives, the liquid container may be a tank, i.e., a refillable liquid container that is intended for multiple uses.

[090] As further seen in FIG. 3, the cartridge 122 comprises a cylinder or barrel 124 and a stopper 126. FIG. 3 further reveals that the upper housing component 106 comprises two windows 116 for viewing the volume of liquid contained within the cartridge during use of the device 100.

[091] FIG. 4 is a partial, exploded view of components of the electronic device 100. FIG. 4 reveals one or more batteries 128 that are contained within a bottom portion of the lower housing component 108. The batteries preferably are rechargeable lithium-ion batteries. The device 100 preferably includes a charging port 140 (illustrated in FIGS. 11-14) for plugging in a power source for charging the batteries 128. The charging port preferably is a micro-USB charging port. FIG. 4 additionally reveals wall supports 130 of the upper housing component 106 which conform to, receive and support in friction fit the cartridge 122 when inserted into the upper housing component 106. The supports 130 preferably are formed as part of the upper housing component 106, such as during an injection molding process of the upper housing component 106. The lower housing component 108 and mouthpiece 102 also preferably are made by injection molding or other manufacturing methodology.

[092] Similar to supports 130, the upper housing component 106 also comprises wall supports 131 (seen for example in FIG. 5) that hold the mesh assembly 118 in place in the upper housing component 106. Supports 131 also preferably form part of the upper housing component 106 and are similarly formed in a molding process.

[093] FIGS. 5 and 6 each is another partial, exploded view of components of the electronic device 100 and each reveals a motor 132 and threaded shaft 134. The motor 132 preferably is a piezoelectric motor. The motor 132 drives rotation of the threaded shaft 134 and is actuated by the button 114. The plunger 120 is attached to an end of the shaft 134 and rotation of the shaft 134 by the motor 132 causes the plunger to move in a direction parallel to a longitudinal axis of the rotating shaft 134. FIGS. 8 is a partial view of components of the electronic device 100 and additionally shows the plunger 120 attached to the end of the threaded shaft 134 and moved to a fully retracted position in which the plunger 120 is located immediate adjacent the motor 132.

[094] In the device 100, the piezoelectric motor 132 preferably utilizes piezoelectric actuation technology using mechanical waves. The motor advantageously provides a high-power density combined with a high efficiency (e.g., greater than 20W mechanical) for small motors. In an example, the motor is a purely mechanical structure without any winding. An example suitable motor is the piezoelectric motor WLG-30. The motor may have a stator diameter of approximately 30mm (1.18 inches), a length of approximately 34mm (1.34 inches), and a height

of approximately 15mm (0.59 inches). The motor may weight approximately 37g with an electronic card weight of 23g. In an example, the motor may have a max speed of approximately 300 rpm with a rated torque of approximately 250 mN.m, a max torque of approximately 50 mN.m, a hold torque of approximately 150 mN.m, and a torque resolution of approximately 0.18 mN.m. Additionally, the motor may have an output power of approximately 150W. The motor response time may be approximately 1.3 milliseconds with a direction change time (CW/CCW) of approximately 1 millisecond and an angular accuracy of approximately 1 degree. In an example, the motor **132** may have a power supply of approximately 7.5V and a max current of approximately 1.2 A.

[095] FIG. 7 is a transparent view of the cartridge **122** and components thereof in the electronic device **100**. The cartridge **122** is similar to a syringe in that the stopper **126**, when advanced within the cylinder **124** toward a tapered end **123** of the cartridge **122**, pushes liquid in the cylinder **124** toward the tapered end **123**. The stopper **126** forms a seal with the cylinder wall **124** and the stopper **126** prevents or stops the liquid from leaking around the stopper **126**.

[096] With reference to FIGS. 9 and 10, the tapered end **123** includes an opening **125** through which the liquid passes when the stopper **126** advances toward the tapered end **123**. In particular the tapered end **123** is inserted with the opening **127** when the cartridge **122** is inserted into the upper housing component **106**, as indicated by the dashed line extending between FIGS. 9 and 10. Thus, when inserted, the tapered end **123** is located within an opening **127** of the mesh assembly **118** (seen in FIG. 4).

[097] Of course, it will be appreciated that in the electronic device **100** the stopper **126** is not attached to the threaded shaft **134** and, therefore, is not directly driven by rotation of the threaded shaft **134** by the motor **132**. Instead, the plunger **120** attached to the end of the threaded shaft **134** is directly driven by rotation of the threaded shaft **134** by the motor **132**, which causes the plunger **120** to advance into engagement with the stopper **126** and push the stopper toward the taper end **123**. This advancement of the plunger **120** and retraction back is illustrated in the sequence seen in FIGS. 11 through 14, which are partial internal views of the electronic device **100**.

[098] It will be appreciated from this sequence of FIGS. 11 through 14 that the components are arranged in-line. In particular, the mouthpiece **102**, the mesh assembly **118**, and the cartridge **122** containing the fluid are arranged sequentially along a longitudinal axis **90** (seen in FIG. 11) of the device **100** in said order, with the mesh assembly **118** being located between the mouthpiece **102** and the liquid to be aerosolized. The stopper **126**, plunger **120**, and shaft **134** similarly are arranged along the longitudinal axis **90** of the device **100**. Additionally, the motor **132** and batteries **128** also are arranged along the longitudinal axis **90** of the device **100**.

[099] When the fluid passes through the opening **125** into the opening **127** it contacts a

mesh disk **146** (perhaps best seen in FIG. 15) of the mesh assembly. The mesh disk **146** is held or retained in the mesh assembly **118** by an annular plate **144** similar to a washer. The mesh disk **146** preferably is formed from a piezoelectric material (or “piezo”) having small openings or holes **148** formed therein for the passage of small droplets of the liquid of a consistent size when the piezo mesh disk is caused to vibrate. This aerosolizes the liquid producing an aerosol. Preferably the droplets produced are between 1 and 4 micron aerosol droplets.

[0100] This sequence **400** of steps is illustrated in FIG. 15. Indeed, FIG. 15 includes a picture of an aerosol for inhalation that is actually produced by the vibrating piezo mesh disk. The aerosol produced by the vibrating mesh is a fine particle, low velocity aerosol that is believed to be optimum for central and deep lung deposition.

[0101] After the plunger **120** has been advanced through the entire cylinder **124** of the cartridge **122** (at which point the cartridge **122** is depleted of the liquid and is empty, as illustrated in FIG. 13), the motor **132** rotates the threaded drive shaft **134** in a reverse direction to return the plunger **120** to the retracted position, as seen in FIG. 14.

[0102] An alternative is illustrated in FIG. 16, which is a partial internal view of another electronic device **170** in accordance with one or more aspects and features of the invention. In this device **170**, the cartridge includes the threaded shaft **134'** extending therethrough. The other components illustrated and having the same reference numbers as those with respect to device **100** are the same.

[0103] Yet another alternative is illustrated schematically in FIGS. 17-18. Specifically, FIG. 17 is a schematic illustration of yet another preferred electronic device **200** in accordance with one or more aspects and features of the invention, and FIG. 18 is a partial schematic illustration of an electromagnetic cartridge of the electronic device **200**. Electronic device **200** preferably comprises an electromagnetic propulsion system cartridge (e.g., an electromagnetic syringe pump cartridge **201** having cartridge housing **203**) that is utilized to push the liquid into contact with the vibrating mesh when the device **200** is activated. The electronic device **200** includes a liquid window **202**. Additionally, the electromagnetic cartridge includes a magnetic stopper **204**, an anode **206**, a cathode **208**, and a magnetic ring **210**.

[0104] FIG. 19 is a transparent view of internal components of another preferred electronic device **300** in accordance with one or more aspects and features of the invention. The device **300** comprises a number of components that are arranged in-line along a longitudinal axis **390** of the device **300**. These components include a mouthpiece **302** from which aerosol produced by the device **300** can be inhaled; a mesh assembly **304** comprising a vibrating mesh and aperture plate; a liquid container **306** comprising a liquid cartridge or reservoir combined with a threaded shaft **308** that longitudinally extends within the liquid container **306** and a

stopper 310 that moves longitudinally within the liquid container 306 along the shaft 308 to ensure liquid moves towards and stays in contact with the vibrating mesh; and a motor and battery assembly 312 that drives rotation of the shaft 308 and consequent movement of the stopper 310 within the liquid container 306.

[0105] Other contemplated ways of pumping, pushing, or otherwise forcing the liquid into contact with the vibrating mesh include using a solenoid pump, a capillary tube, and a vacuum pump. In each instance regardless of the manner in which the liquid is pushed from the cartridge into contact with the vibrating mesh, the liquid preferably is supplied to the vibrating mesh at a generally constant pressure whereby a generally uniform aerosol is produced. This is preferably done regardless of the orientation of the electronic device. The electronic device also preferably comprises a reservoir for the liquid. In an example, the reservoir is an anti-pyrolysis vape reservoir with no smoldering and no combustion. The device also features a thermostable liquid carrier.

[0106] Circuitry (not shown for clarity of illustration) preferably is included in each electronic device for controlling actuation of the vibrating mesh. The circuitry also preferably controls actuation of the pump mechanism for pushing the liquid into contact with the vibrating mesh at a generally constant pressure. A printed circuit board may be included, and an application specific integrated circuit may be included. A microcontroller also may be included (e.g., microchip 8-bit microcontroller-based piezo mesh disk driver board). The microcontroller preferably is located within the lower housing component when included, but in some embodiments the microcontroller may be located within the upper housing component.

[0107] Based on the foregoing description, it will be readily understood by those persons skilled in the art that the invention has broad utility and application. Electronic devices of the invention can be utilized to deliver liquids, supplements, drugs, or therapeutically effective amounts of pharmaceuticals using an aerosol having particles of a size that can easily be inhaled. The aerosol can be used, for example, by a patient within the bounds of an inhalation therapy, whereby the liquid, supplement, therapeutically effective pharmaceutical, or drug reaches the patient's respiratory tract upon inhalation. The aerosol also can be used to aerosolize the liquid carrier and desired compounds used in vaping such as nicotine, flavoring, and supplements like B12, without the toxic byproducts like formaldehyde, a recognized Group 1 Carcinogen for cancer, which is created when heat traditionally is used to aerosolize the liquid for inhalation. Electronic devices of the invention further can be used in the marijuana industries, *but only where legal*, for delivery of cannabinoids and CBD oils and the like. Moreover, many embodiments and adaptations of the invention other than those specifically described herein, as well as many variations, modifications, and equivalent arrangements,

will be apparent from or reasonably suggested by the invention and the foregoing descriptions thereof, without departing from the substance or scope of the invention.

[0108] Accordingly, while the invention has been described herein in detail in relation to one or more preferred embodiments, it is to be understood that this disclosure is only illustrative and exemplary of the invention and is made merely for the purpose of providing a full and enabling disclosure of the invention. The foregoing disclosure is not intended to be construed to limit the invention or otherwise exclude any such other embodiments, adaptations, variations, modifications or equivalent arrangements, the invention being limited only by the claims appended hereto and the equivalents thereof.

What is claimed is:

1. An electronic device for producing an aerosol for inhalation by a person, comprising:
 - (a) a mouthpiece and an upper housing component to which the mouthpiece attaches, wherein the upper housing component contains a liquid container and a mesh assembly having a mesh material that vibrates when actuated for aerosolizing liquid from the liquid container that comes into contact with the vibrating mesh material, and wherein the aerosol so produced may be inhaled through the mouthpiece; and
 - (b) a lower housing component containing circuitry and a power supply for actuating vibration of the mesh material, wherein electrical pathways connect the mesh assembly with the circuitry and power supply of the lower housing component.
2. The electronic device of claim 1, wherein the upper housing component and the lower housing component are detachable from each other, and wherein electrical contacts connect the electrical pathways between the upper housing component and the lower housing component when the upper housing component and the lower housing component are connected.
3. The electronic device of claim 1, wherein the mouthpiece is detachable from the upper housing component to expose the vibrating mesh material.
4. The electronic device of claim 1, wherein the device comprises no heating element configured to heat the liquid to aerosolize the liquid.
5. The electronic device of claim 1, wherein the device comprises no compressed gas configured to aerosolize the liquid.
6. The electronic device of claim 1, wherein the electronic device produces a fine particle, low velocity aerosol for central and deep lung deposition.
7. The electronic device of claim 1, wherein the mesh material comprises an oscillating piezoelectric material that aerosolizes liquid that comes into contact with one side thereof, the aerosol being produced on the opposite side of the vibrating mesh material.
8. The electronic device of claim 7, wherein the oscillating piezoelectric material is a single layer oscillating piezoelectric material.
9. The electronic device of claim 7, wherein the oscillating piezoelectric material is multi-layer oscillating piezoelectric material.
10. The electronic device of claim 7, wherein the oscillating piezoelectric material is in the form of a mesh disk.
11. The electronic device of claim 1, wherein the liquid is pressured into contact with a first side of the vibrating mesh material, and wherein the vibrating mesh material comprises small

openings through which droplets of the liquid pass to form the aerosol as the vibrating mesh material oscillates.

12. The electronic device of claim 11, wherein the droplets of the aerosol produced are between one-micron and four-micron aerosol droplets.
13. The electronic device of claim 1, wherein the liquid container comprises a cartridge.
14. The electronic device of claim 1, wherein the power supply comprises one or more rechargeable batteries.
15. The electronic device of claim 1, further comprising means for causing the liquid to be in contact with a lower side of the mesh material facing the liquid container.
16. The electronic device of claim 1, wherein the circuitry and power supply are configured to further operate a pump system that causes the liquid from the liquid container to come into contact with the first side of the vibrating mesh material.
17. The electronic device of claim 16, wherein the pump system comprises a motor and a shaft that is rotated by the motor, the rotation of the shaft causing the liquid to be pushed toward the vibrating mesh material.
18. The electronic device of claim 17, wherein the liquid is pushed toward the vibrating mesh material by a stopper that is advanced by the rotating shaft.
19. The electronic device of claim 18, wherein the stopper is advanced by engagement with a plunger that is attached to the shaft and that is directly driven by rotation of the shaft by the motor.
20. The electronic device of claim 17, wherein the liquid is pushed toward the vibrating mesh material by a stopper that is advanced by the rotating shaft, and wherein the stopper is attached to the shaft and is directly driven by rotation of the shaft by the motor.
21. The electronic device of claim 1, further comprising a capillary pump, wherein the liquid is drawn into contact with the mesh material through capillary action.
22. The electronic device of claim 1, wherein the upper housing component and the lower housing component fit together to define a body of the electronic device, which body is of a size and shape for gripping and holding by hand during use of the electronic device.
23. An electronic device for producing an aerosol for inhalation by a person, comprising:
 - (a) a mouthpiece; and
 - (b) an elongate housing having opposite first and second ends, with the mouthpiece being attached to the first end and with the housing comprising therein,
 - (i) a mesh assembly comprising a mesh material that vibrates when actuated,
 - (ii) a liquid container containing a liquid that is aerosolized by the mesh material when actuated for inhalation through the mouthpiece, and

- (iii) circuitry and a power supply for actuating vibration of the mesh material, wherein electrical pathways connect the mesh assembly with the circuitry and power supply;
 - (c) wherein the mesh assembly and the liquid container are arranged in-line along a longitudinal axis of the electronic device.
24. The electronic device of claim 23, wherein the mesh assembly extends between and separates the mouthpiece and the liquid container.
 25. The electronic device of claim 23, wherein the power supply of the electronic device comprises batteries that are arranged along the longitudinal axis of the device and that are located at the second end of the housing.
 26. The electronic device of claim 23, wherein the liquid contacts the mesh material as a result of capillary action.
 27. The electronic device of claim 23, further comprising means for causing the liquid to be in contact with a lower side of the mesh material facing the liquid container.
 28. A method for producing an aerosol for inhalation by a person using an electronic device having a mouthpiece, comprising the steps of causing a mesh material to vibrate while causing a liquid to contact a first side of the mesh material, whereby droplets of the liquid are formed on a second, opposite side of the mesh material to create the aerosol for inhalation through the mouthpiece.
 29. The method of claim 28, wherein the device has opposite longitudinal ends and the mouthpiece is located on one of the opposite longitudinal ends of the device.
 30. The method of claim 28, wherein the mesh material has a side facing the mouthpiece and an opposite side facing a liquid container containing the liquid for aerosolized.
 31. The method of claim 28, wherein the mouthpiece, the mesh material, and the liquid container are arranged in-line along the longitudinal axis of the electronic device, with the mesh material extending between and separating the mouthpiece from the liquid container.
 32. The method of claim 31, wherein the mesh material is a mesh disk.
 33. The method of claim 31, wherein the electronic device is actuated for a predetermined period of time for producing a consistent volume of aerosol for inhalation.
 34. The method of claim 31, wherein the electronic device is actuated by depressing a button by a user of the electronic device.
 35. The method of claim 31, wherein the liquid is caused to contact the first side of the mesh material at a generally constant pressure.
 36. The method of claim 35, wherein the liquid is pushed from a cartridge by a stopper that is advanced through a liquid container of the cartridge.

37. The method of claim 36, wherein the liquid container of the cartridge is cylindrical.
38. The method of claim 36, wherein the stopper is advanced through the liquid container by actuation of a motor that drives a shaft.
39. The method of claim 38, wherein the stopper is attached to the shaft and advances through the liquid container when the shaft is rotated.
40. The method of claim 38, wherein a plunger is attached to the shaft and advances through the liquid container when the shaft is rotated, and wherein the plunger engages and advances the stopper for pushing the liquid into contact with the vibrating mesh material.
41. The method of claim 28, wherein the aerosol is produced without smoldering of the liquid.
42. The method of claim 28, wherein the aerosol is produced without utilizing a compressed gas.
43. The method of claim 28, further comprising causing the fluid to be in constant contact with the mesh material using capillary action.

1/14

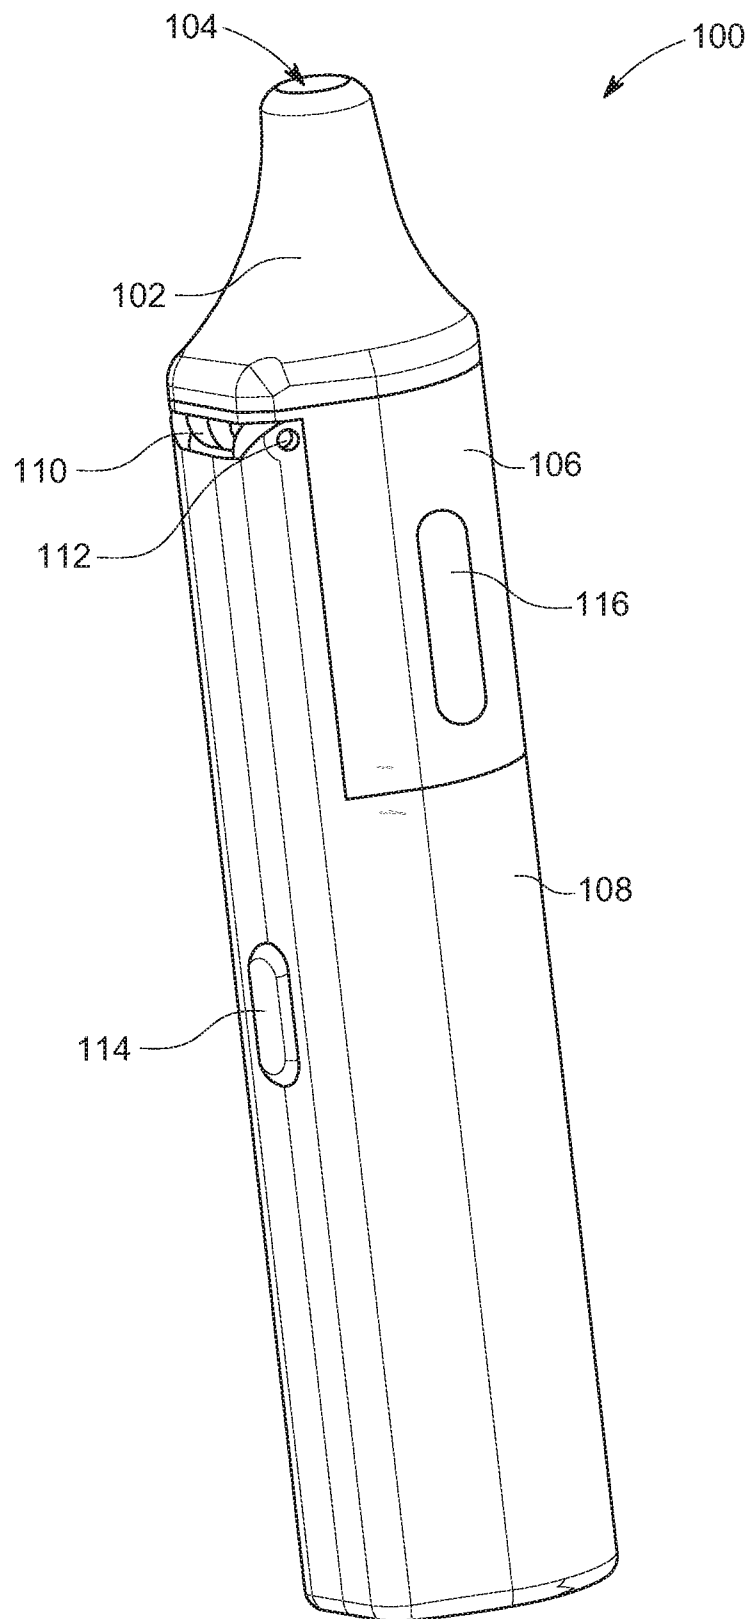


FIG. 1
SUBSTITUTE SHEET (RULE 26)

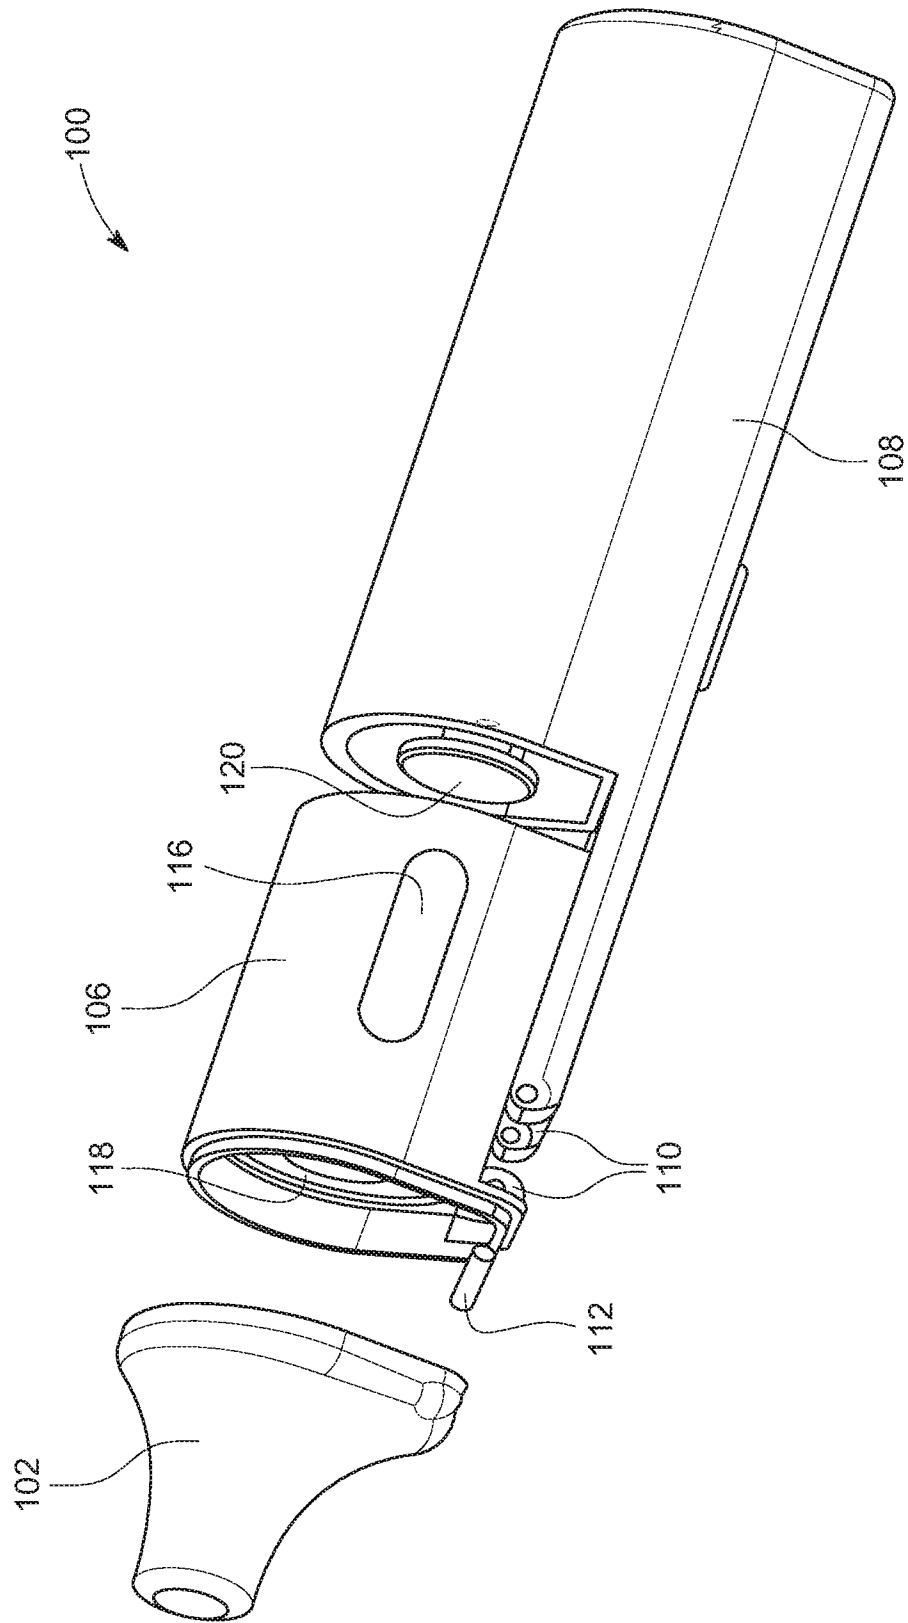


FIG. 2


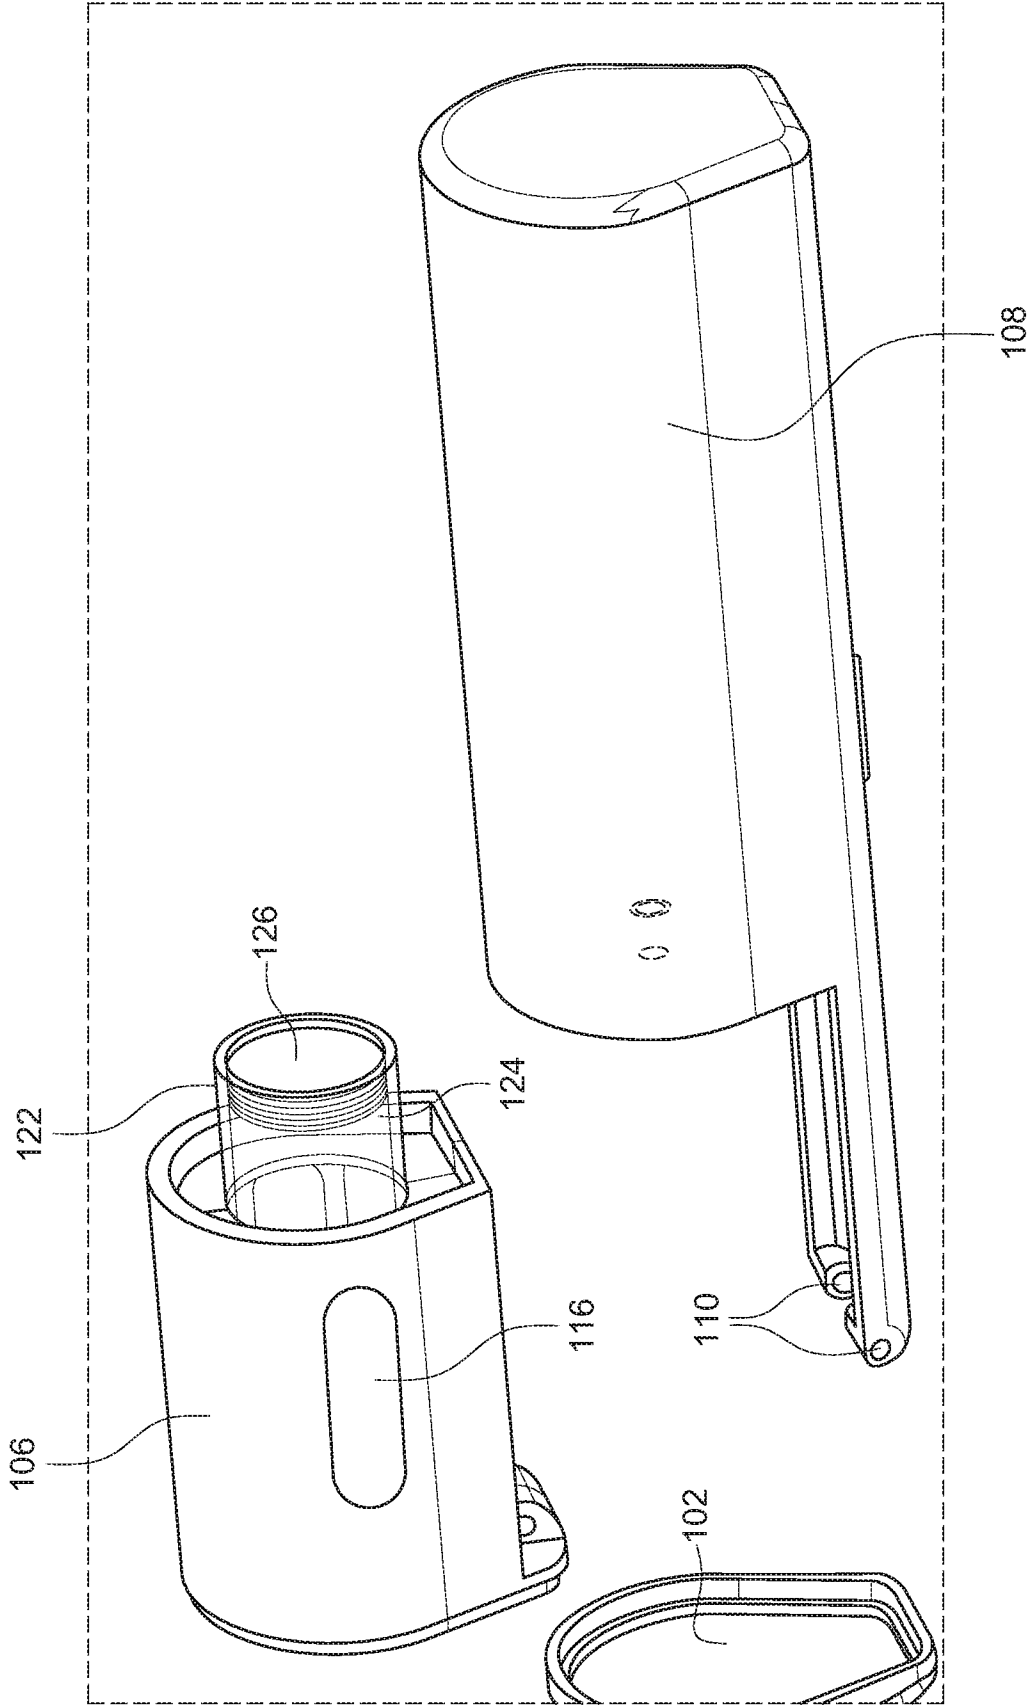


FIG. 3

4/14

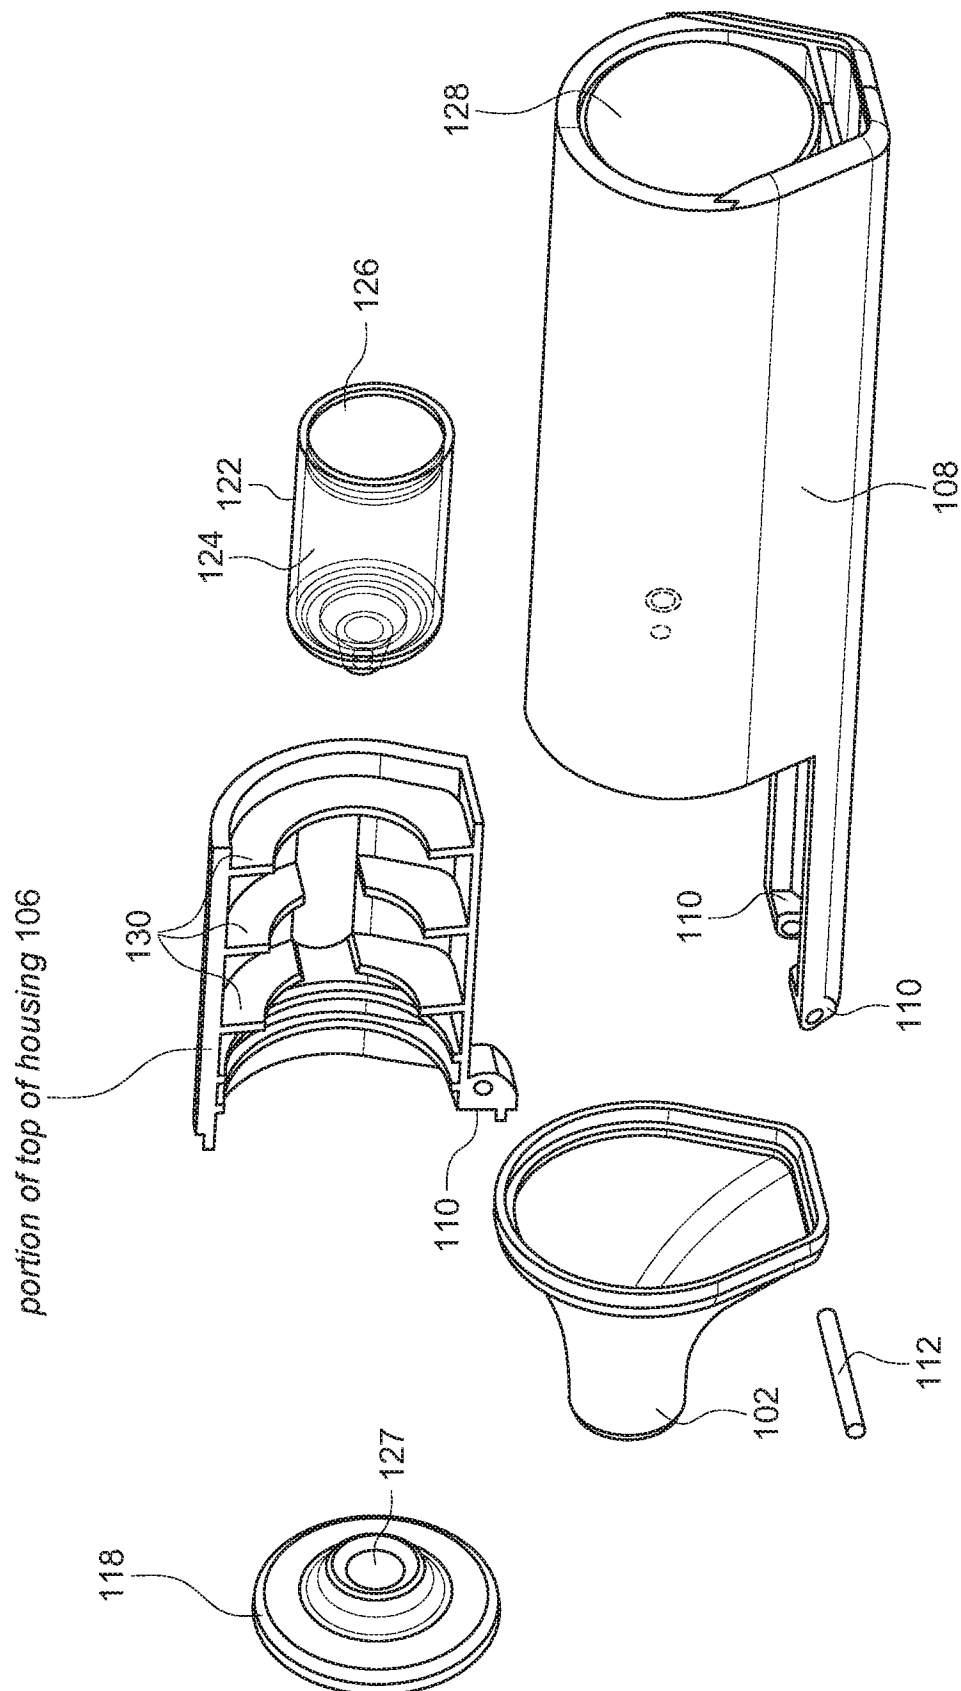

4
5
6
7
8

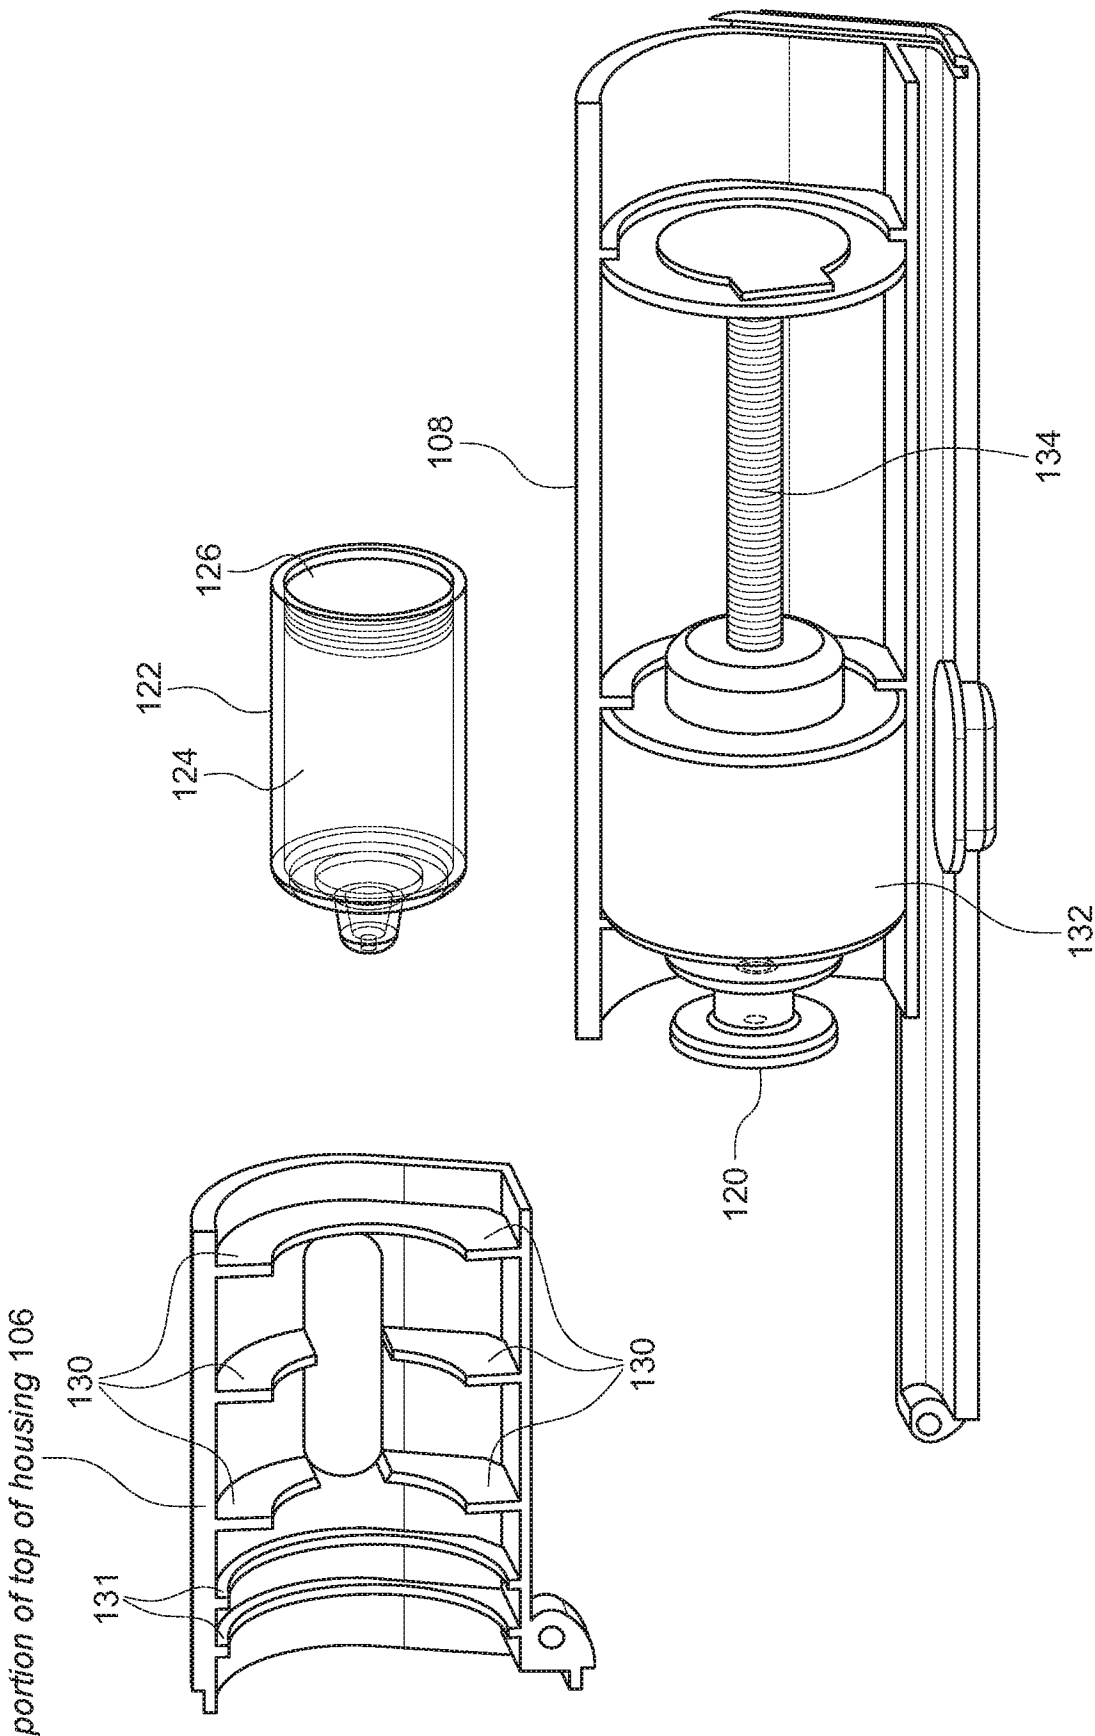


FIG. 5

6/14

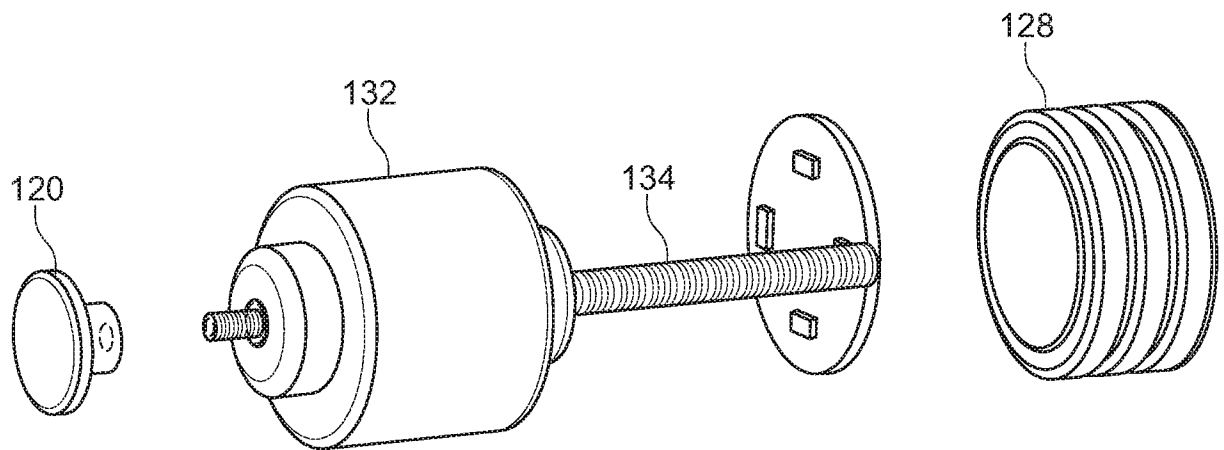


FIG. 6

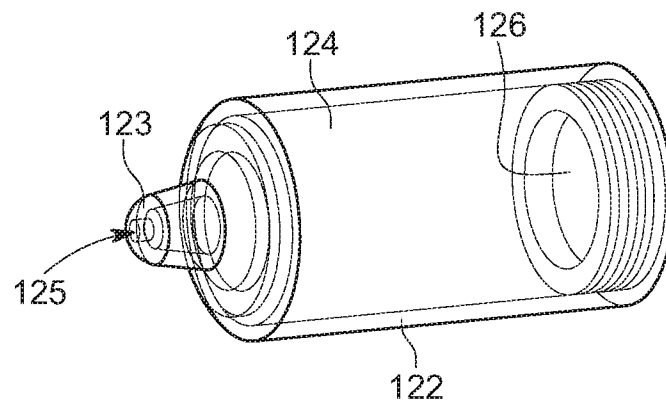


FIG. 7

7/14

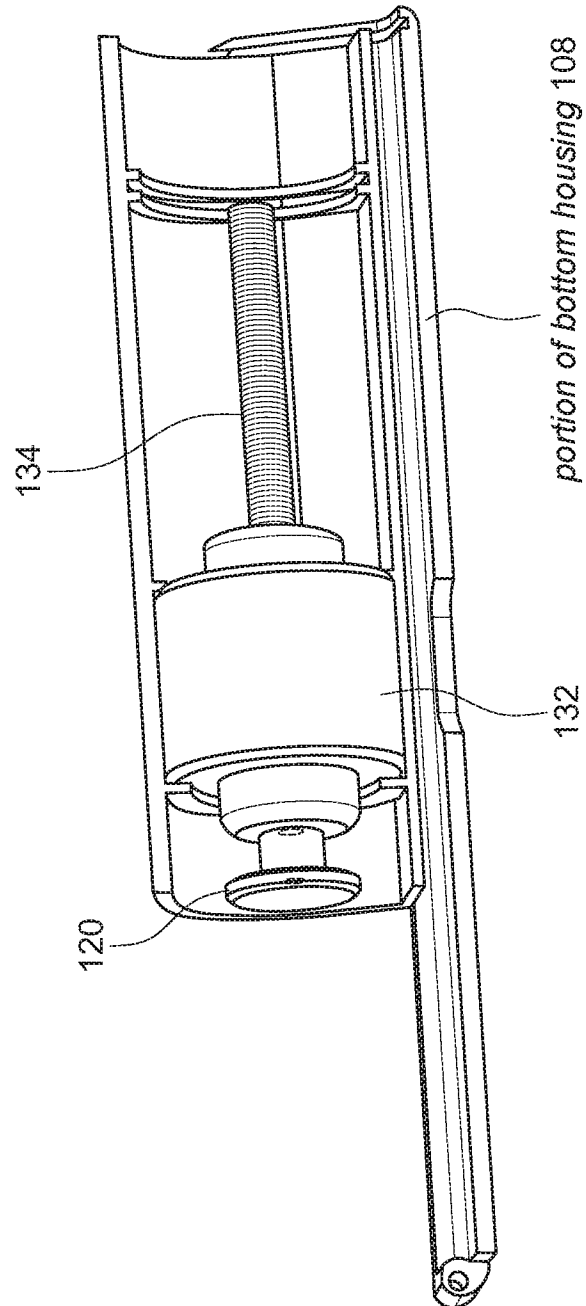


FIG. 8

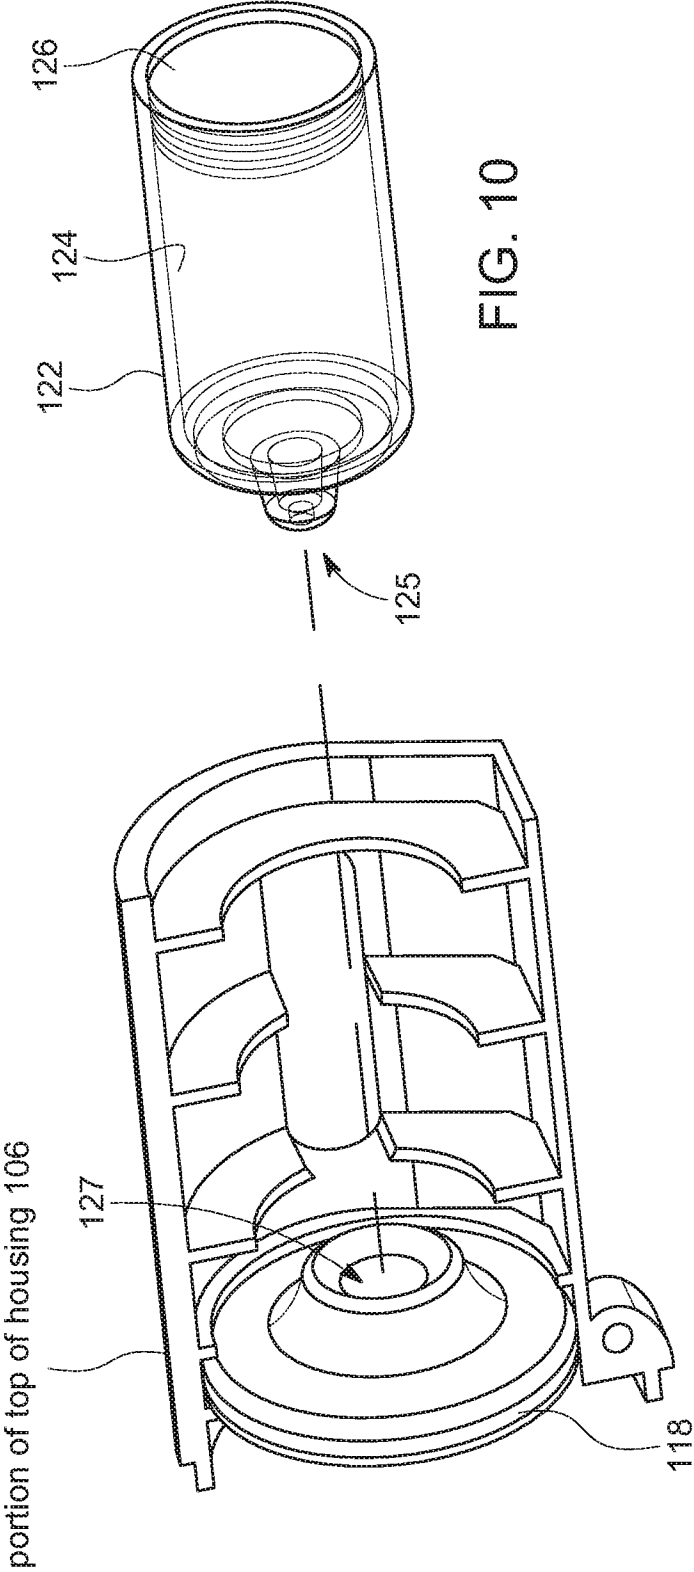


FIG. 10

FIG. 9

9/14

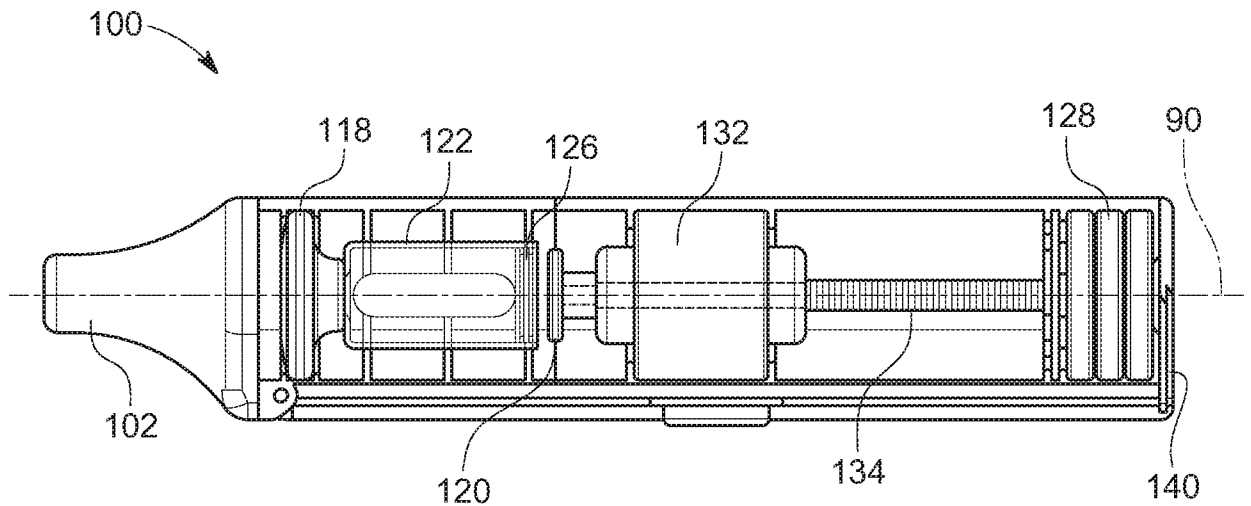


FIG. 11

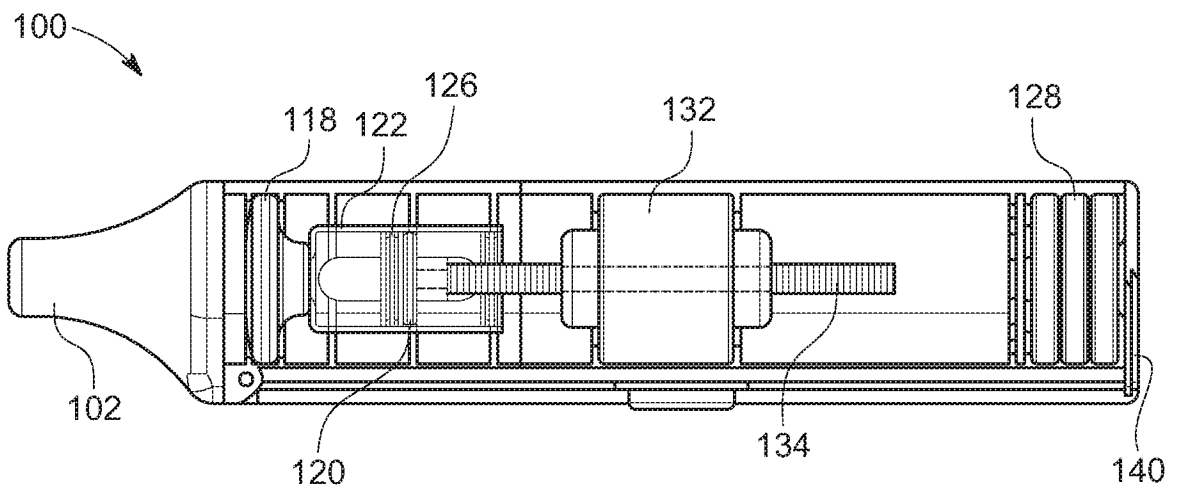


FIG. 12

10/14

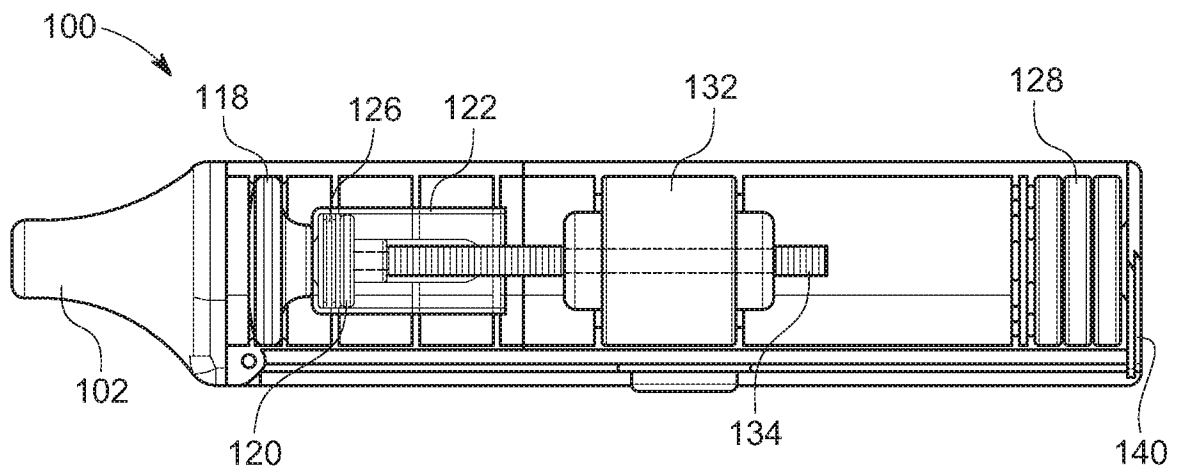


FIG. 13

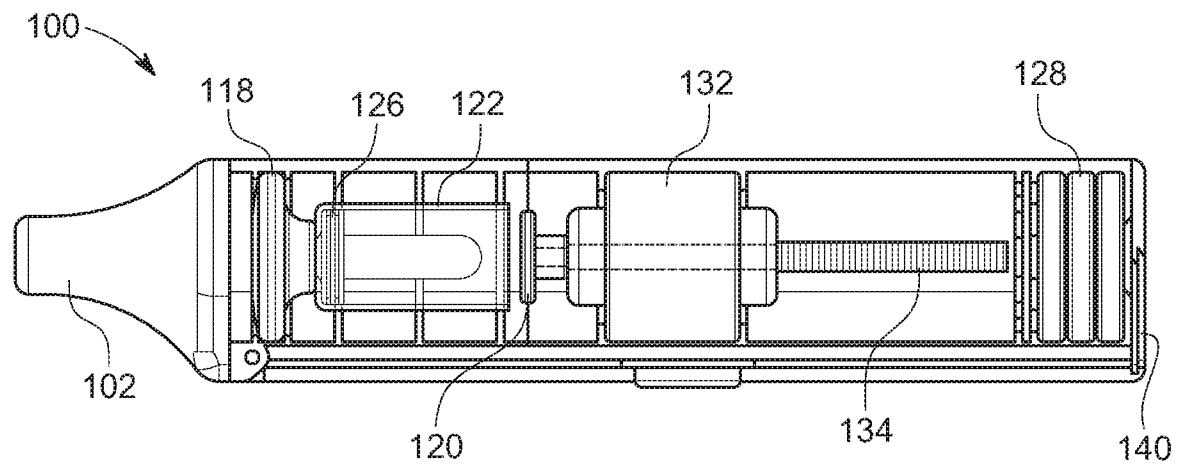


FIG. 14

11/14

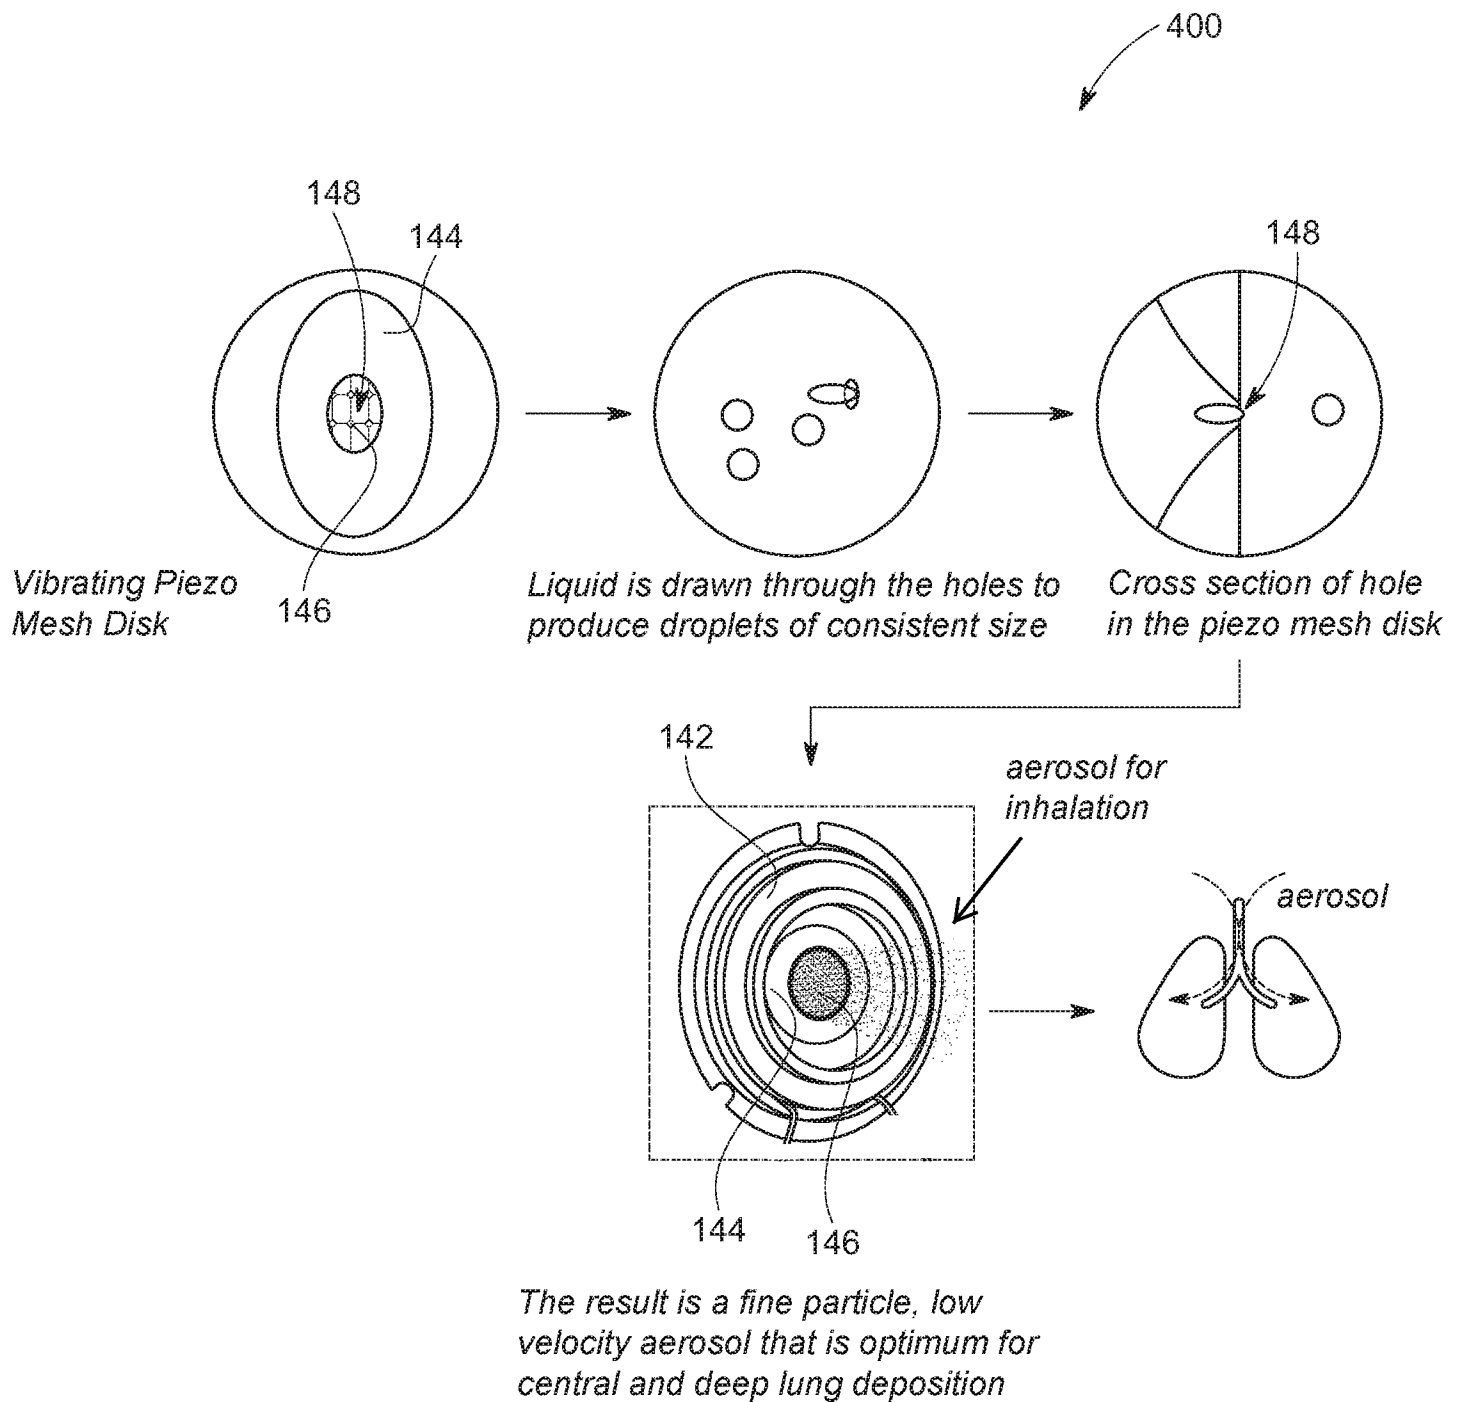


FIG. 15

12/14

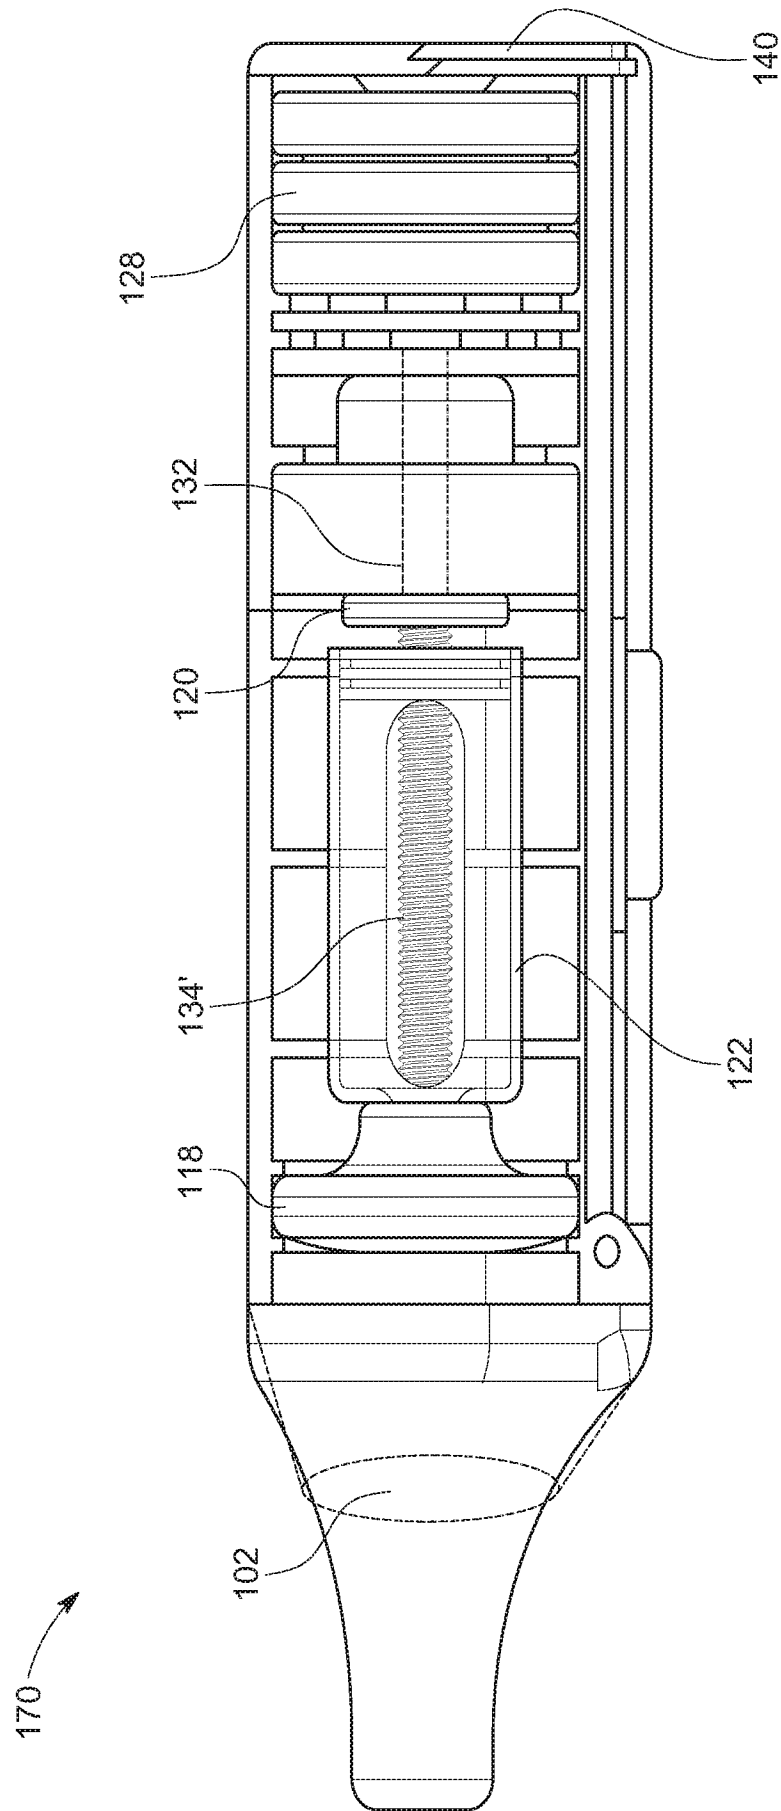


FIG. 16

13/14

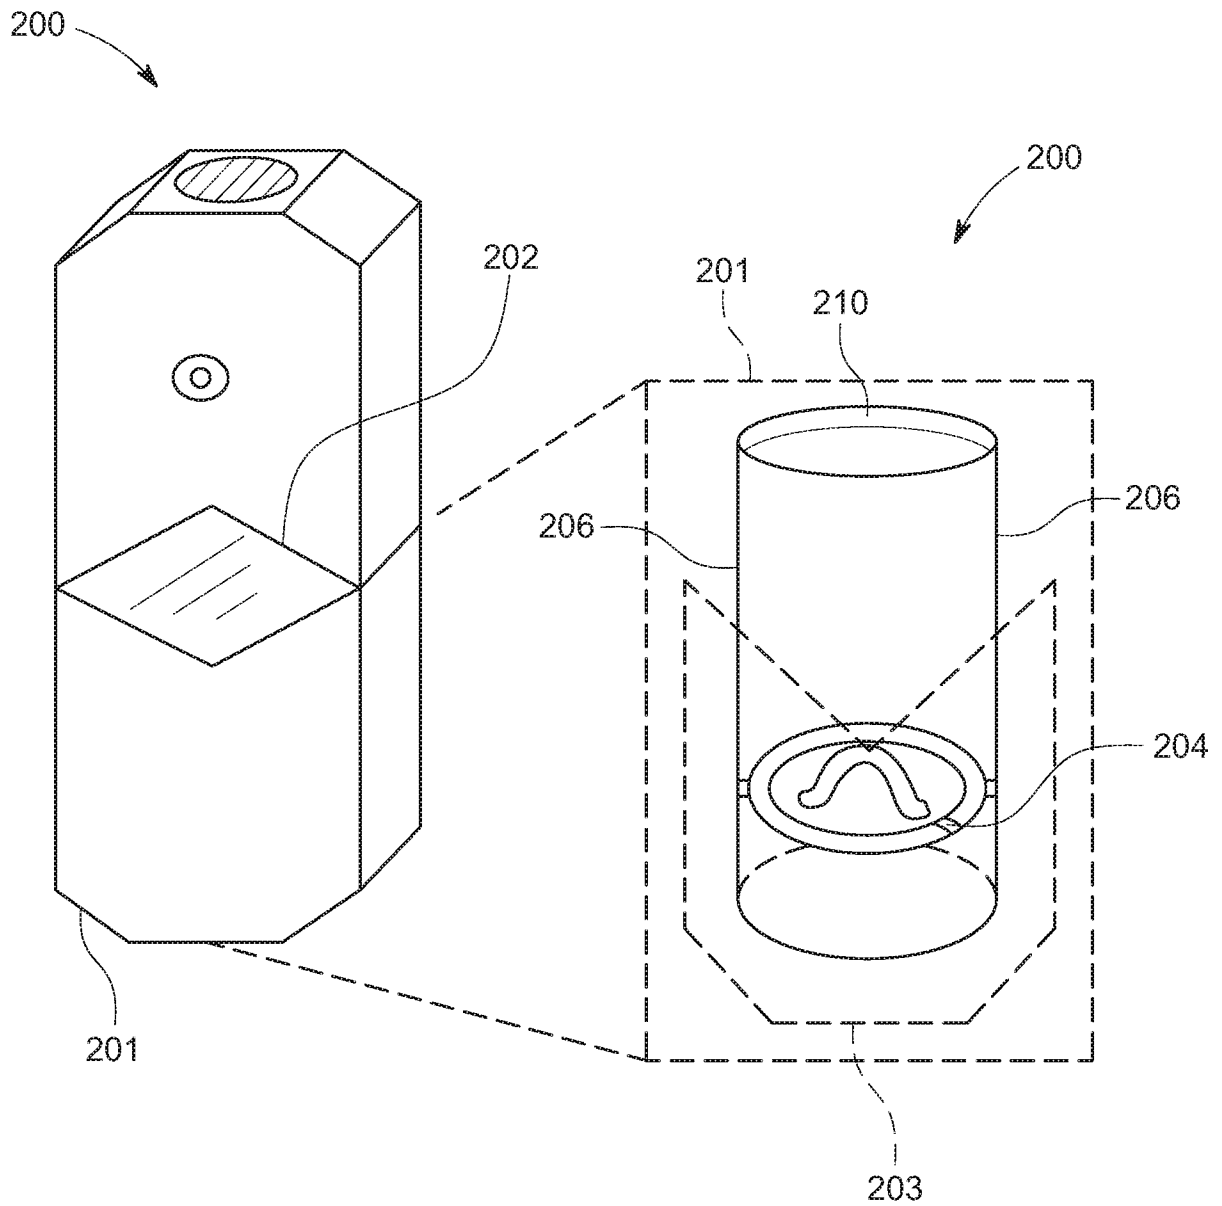


FIG. 17

FIG. 18

14/14

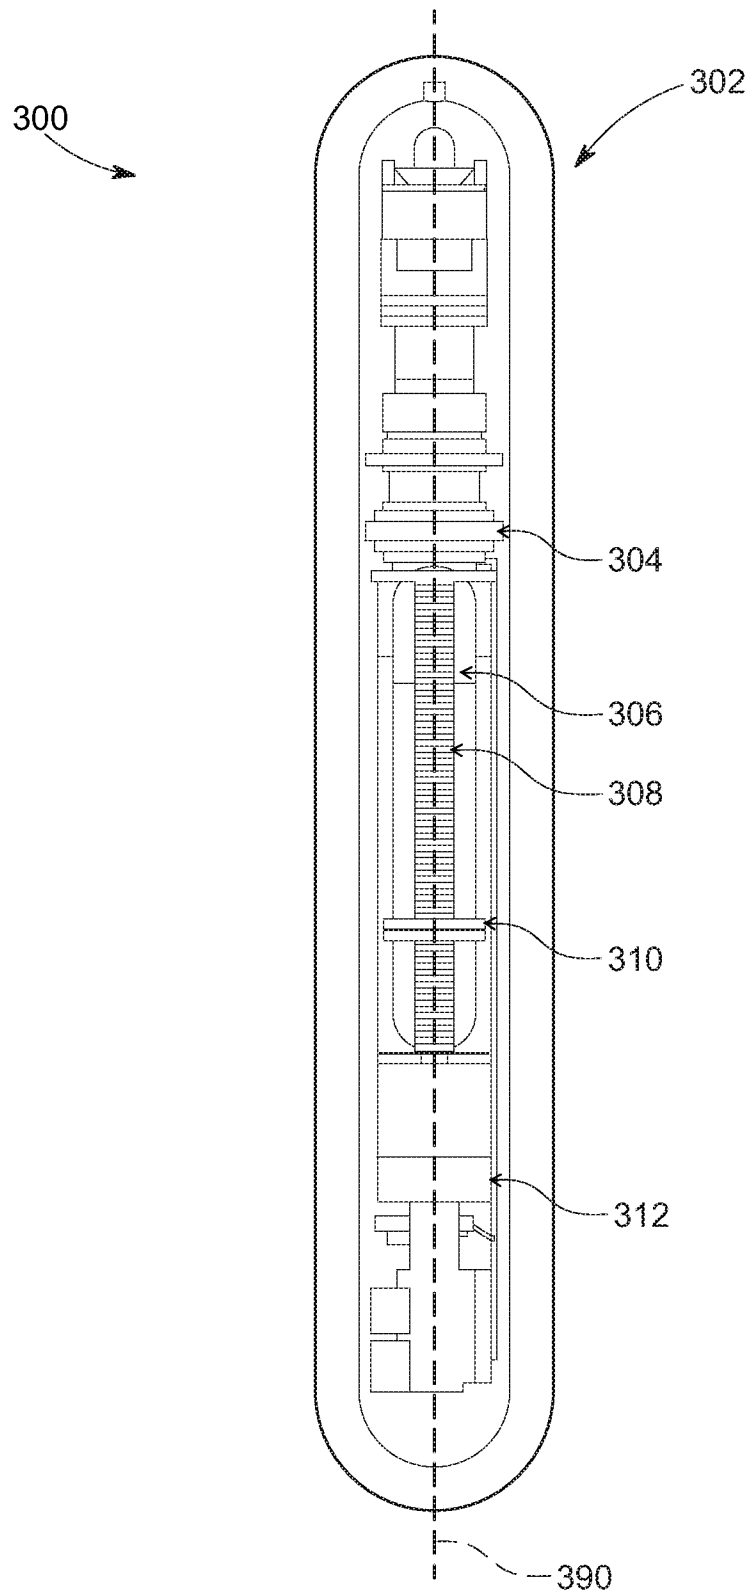


FIG. 19
SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US19/47790

A. CLASSIFICATION OF SUBJECT MATTER

IPC - A24F 47/00; A61M 11/00, 15/00, 15/06 B05B 17/00, 17/06 (2019.01)

CPC - A24F 47/002, 47/008; A61M 11/005, 15/00, 15/06, 15/0028, 15/0085; B05B 17/06, 17/0607, 17/0615, 17/0638, 17/0646; A61K 9/007, 9/0073, 9/0078

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2016/0001019 A1 (DANCE BIOPHARM INC.) 07 January 2016; figures 1B, 4A; paragraphs [0036], [0042], [0046]	1-5, 7, 15, 22-24, 27-30, 41-42

Y		6, 8-14, 16-21, 25-26, 31-40, 43
Y	US 5586550 A (IVRI, Y et al.) 24 December 1996; figure 2; column 7, lines 51-52; column 8, lines 9-11, 15-19	11-12, 31, 33-35
Y	US 2007/0267010 A1 (FINK, J et al.) 22 November 2007; paragraphs [0005], [0094]; claim 10	6
Y	WO 2017/149165 A1 (UNIVERSITY COLLEGE CORK – NATIONAL UNIVERSITY OF IRELAND, CORK) 08 September 2017; figures 5A-B; page 12, lines 15-20	8-10, 32
Y	WO 2016/019353 A1 (MJAR HOLDINGS, LLC) 04 February 2016; paragraphs [0080], [0085]	14, 25
Y	US 5970974 A (VAN DER LINDEN, K et al.) 26 October 1999; column 4, lines 55-67; column 5 lines 20-33; column 11, lines 51-55	13, 16-20, 36-40
Y	WO 2017/076590 (PHILIP MORRIS PRODUCTS) 11 May 2017; page 18, lines 22-29, page 19, lines 10-12	21, 26, 43

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 October 2019 (18.10.2019)

Date of mailing of the international search report

05 NOV 2019

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Shane Thomas

Telephone No. PCT Helpdesk: 571-272-4300