

(51) International Patent Classification:
B23K 9/10 (2006.01) **H02J 7/34** (2006.01)(21) International Application Number:
PCT/US2010/038010(22) International Filing Date:
9 June 2010 (09.06.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/186,160 11 June 2009 (11.06.2009) US
12/783,265 19 May 2010 (19.05.2010) US(71) Applicant (for all designated States except US): **ILLINOIS TOOL WORKS INC.** [US/US]; 3600 West Lake Avenue, Glenview, Illinois 60026-1215 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BEESON, Richard** [US/US]; 1509 South Midpark Drive, Appleton, Wisconsin 54915 (US).(74) Agent: **YODER, Patrick S.**; P.O. Box 692289, Houston, Texas 77269-2289 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: WELDING SYSTEMS POWERED BY HYBRID VEHICLES COMPRISING AN ENGINE AND AN ENERGY STORAGE DEVICE

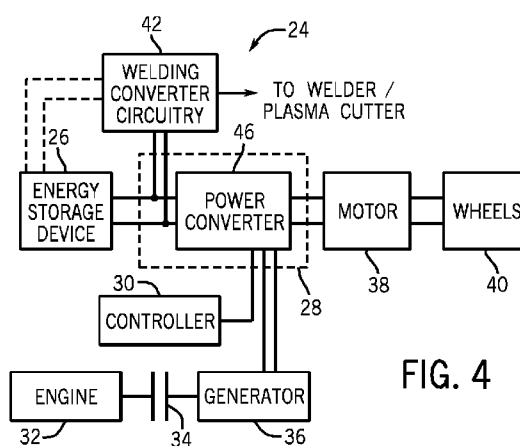


FIG. 4

(57) Abstract: A hybrid vehicle including a welder that is adapted to be powered off a direct current (DC) bus generated by the electronics of the hybrid vehicle is provided. A variety of exemplary placements of the welder on or in the hybrid vehicle are provided. Additionally, a parallel hybrid configuration, a series hybrid configuration, and a series-parallel configuration including welding converter circuitry that is adapted to utilize the DC bus from the hybrid vehicle to generate welding power are provided. The figure is a block diagram illustrating components of an exemplary drivetrain (24) arranged in a series configuration that may be located in the hybrid vehicle. The series drivetrain (24) includes an energy storage device (26) (e.g. a battery, electronics (28), a motor (38), wheels (40), and welding converter circuitry (42). In the illustrated embodiment, the electronics (28) include a power converter (46). However, in additional embodiments the electronics may include additional components, such as additional power converters, rectifiers, capacitism and so forth suitable for the given application. The energy storage device (26) may be any device capable of storing and dissipating energy, such as a battery, a fuel cell, a solar cell, a capacitor, and so forth.

WELDING SYSTEMS POWERED BY HYBRID VEHICLES COMPRISING AN ENGINE AND AN ENERGY STORAGE DEVICE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] *This application is a Non-Provisional Patent Application of US Provisional Patent Application No. 61/186,160, entitled "Hybrid Vehicle Welder", filed June 11, 2009, which is herein incorporated by reference.*

BACKGROUND

[0002] The invention relates generally to welding systems, and, more particularly, to welding systems powered off of hybrid vehicles.

[0003] Welding is a process that has become increasingly ubiquitous in various industries and applications. For example, welding is used to join workpieces in applications such as construction, shipbuilding, factory equipment repair, and so forth. Accordingly, welding is often performed in close proximity to one or more work vehicles used to transport supplies to the work location, to aid in construction performed at the work location, and so forth. Such work vehicles are typically associated with high emissions levels and high engine noise levels that may decrease productivity. Additionally, if such vehicles are required to be run for the duration of the workday, such as to power welding or other operations, high fuel consumption may lead to high fuel costs, higher total emissions, and reduced life of the vehicle engine.

[0004] Somewhat apart from such applications, a variety of hybrid work vehicles, including trucks have been developed that utilize power from both an engine and a battery to provide the required power for locomotion and any other on-board operations. Such hybrid vehicles are often more efficient than conventional vehicles powered by internal combustion engines alone, and so are particularly attractive for applications in which emissions, noise, and so forth are of concern. As in other hybrid applications, the ability of such vehicles to serve their intended functions typically depends upon the actual application demands, particularly in terms of the duty cycle imposed on the battery and engine. To date, little or no synergy has been

developed between such hybrid vehicle development and applications requiring intermittent welding capability.

BRIEF DESCRIPTION

[0005] In one exemplary embodiment described below, a welding system includes a hybrid vehicle including an engine and an energy storage device. The engine and the energy storage device are adapted to cooperate with electronic circuitry to generate a direct current (DC) bus output. The welding system also includes a welding device coupled to the hybrid vehicle and adapted to utilize the DC bus output from the hybrid vehicle as a source of power.

[0006] In another embodiment, a hybrid vehicle includes an engine and an energy storage device adapted to cooperate with the engine to generate a DC bus output and to drive a motor. The hybrid vehicle also includes converter circuitry coupled to the engine and the energy storage device and adapted to receive the DC bus output and to convert the DC bus output to a power output appropriate for use by a welding device.

[0007] In another embodiment, a welding device includes an engine and a generator driven by the engine to produce weld power. The welding device also includes converter circuitry adapted to receive a DC bus power output from electronic circuitry located in a hybrid vehicle, to convert the DC bus power output to a welding power output, and to transfer the welding power output to the engine.

DRAWINGS

[0008] These and other features, aspects, and advantages of the present invention will become better understood when the following detailed description is read with reference to the accompanying drawings in which like characters represent like parts throughout the drawings, wherein:

[0009] FIG. 1 illustrates an exemplary hybrid work vehicle including a welder integrated into a hybrid work vehicle and coupled to an internal vehicle DC bus to

utilize power generated by the hybrid work vehicle in accordance with aspects of the present invention;

[0010] FIG. 2 illustrates an exemplary hybrid work vehicle including a non-integrated welder (located on top of a side of the hybrid work vehicle) and coupled to a DC bus to similarly utilize power generated by the hybrid work vehicle in accordance with aspects of the present invention;

[0011] FIG. 3 illustrates an exemplary hybrid work vehicle including a separate welder (located next to a side of the hybrid work vehicle) and coupled to a DC bus to again utilize power generated by the hybrid work vehicle in accordance with aspects of the present invention;

[0012] FIG. 4 is a block diagram illustrating exemplary components of a series configuration drivetrain that may be located in the hybrid vehicle of the previous figures in accordance with aspects of the present invention;

[0013] FIG. 5 is a block diagram illustrating exemplary components of a parallel configuration drivetrain that may be located in the hybrid vehicle of the previous figures in accordance with aspects of the present invention; and

[0014] FIG. 6 is a block diagram illustrating exemplary components of a series-parallel configuration drivetrain that may be located in the hybrid vehicle of the previous figures in accordance with aspects of the present invention.

DETAILED DESCRIPTION

[0015] As described in detail below, embodiments are provided of a hybrid vehicle including a welder that is adapted to be powered off a DC bus generated by the electronics of the hybrid vehicle. That is, presently contemplated embodiments provide welders either permanently or removably coupled to hybrid vehicles for operation in such positions. To that end, a variety of exemplary placements of the welder on or in the hybrid vehicle are provided. For instance, the welder may be integrated into one or more sides of the hybrid vehicle for use by a welding operator.

Furthermore, a variety of configurations of internal components of the hybrid vehicle are provided. For example, embodiments of a parallel hybrid configuration, a series hybrid configuration, and a series-parallel configuration including welding converter circuitry that is adapted to utilize the DC bus from the hybrid vehicle to generate welding power are provided. Still further, it should be noted that the term welder, as used herein, could be any welding or plasma cutting system designed to provide power and/or consumables to a welding or plasma cutting operation. For example, the welder may be any system designed for use in a metal inert gas (MIG) welding operation, tungsten inert gas (TIG) welding operation, stick welding operation, pulse welding operations, constant current process, constant voltage processes, and so forth.

[0016] Turning now to the drawings, FIG. 1 illustrates a hybrid work vehicle 10 including a welder 12 coupled to a DC bus 14 to utilize power generated by the hybrid work vehicle 10. In this particular arrangement, the hybrid work vehicle 10 includes a first side panel 16, a second side panel 18, and a front end compartment 20, although such vehicles may be variously equipped, often depending upon the type of application for which they are designed (e.g., construction, service, farming and ranching, etc.). The illustrated hybrid work vehicle 10 is a work truck, yet other embodiments of the hybrid vehicle may include other types and configurations of vehicles. In the illustrated embodiment, the welder 12 is located in the first side panel 16 of the work vehicle 10. The welder 12 may be configured to be operated while remaining in the side panel 16, or some other location of the vehicle in some embodiments. That is, the welder may be fully integrated into the vehicle design. For instance, the welder 12 may be located in a compartment that is adapted to open for use and to close to protect the welder 12 during transportation or when use of the welder 12 is not desired. For further example, the welder 12 may be located in the side panel 16 such that a control panel of the welder is accessible to the user. Still further, the welder may be configured to be removed from the side panel 16 of the hybrid vehicle 10 for use. In such embodiments, the welder 12 remains connected to the DC bus 14 of the hybrid vehicle 10 to utilize the vehicle power via one or more cables or conduits.

[0017] FIGS. 2 and 3 illustrate alternate placements of the welder in and on the hybrid vehicle 10. Specifically, FIG. 2 illustrates the welder 12 positioned on top of the second side panel 18 for use in a welding operation. As before, the welder 12 is connected to and receives power from the DC bus of the hybrid vehicle. In this embodiment, the welder 12 may be configured to be mounted in the illustrated position when the hybrid vehicle is stopped at a work location and to be stored within the vehicle during transportation, such as when being transported to and from a garage or parking lot.

[0018] FIG. 3 illustrates an embodiment of the hybrid vehicle 10 with the welder 12 located adjacent to the second side panel 18 of the hybrid vehicle 10. In this embodiment, the welder 12 may be configured for use while located next to the second side panel 18 or may be configured to be removed from the hybrid truck for use. However, as before, the welder 12 is coupled to the DC bus 14 of the hybrid welder during operation. Indeed, it should be noted that the welder 12 may be located anywhere on, in, or around the hybrid vehicle 10 during operation such that the welder may still be coupled to the DC bus 14. For example, the welder may be located around the front end 20 of the hybrid vehicle 10 and connected to the DC bus 14 via an external connection. It should also be noted that such embodiments enable the use of a hybrid vehicle DC bus-powered welder on any desired hybrid vehicle, not simply trucks and work vehicles.

[0019] The DC bus 14 output of the hybrid vehicle may be any of a variety of possible output voltage levels. For example, in some embodiments, the DC bus output 14 may be between approximately 48 volts and approximately 400 volts. As such, a variety of welding converter circuitry may be provided to convert the output received from the hybrid vehicle to an output suitable for use by a welding or cutting device. For example, in embodiments in which the DC bus output is greater than approximately 100 volts, the welding converter circuitry may include isolation circuitry adapted to isolate the high voltage output of the DC bus from an end user. For further example, if the DC bus output is greater than approximately 100 volts, the converter circuitry may also include a buck converter, a transformer, an inverter, or some combination thereof. As such, it should be noted that a variety of components

may be included in such converter circuitry depending on the voltage level of the DC bus output.

[0020] FIG. 4 is a block diagram illustrating components of an exemplary drivetrain 24 arranged in a series configuration that may be located in the hybrid vehicle. The series drivetrain 24 includes an energy storage device 26 (e.g., a battery), electronics 28, a controller 30 for the electronics 28, an engine 32, a clutch 34, a generator 36, a motor 38, wheels 40, and welding converter circuitry 42. In the illustrated embodiment, the electronics 28 include a power converter 46. However, in additional embodiments the electronics may include additional components, such as additional power converters, rectifiers, capacitors, and so forth suitable for the given application. The energy storage device 26 may be any device capable of storing and dissipating energy, such as a battery, a fuel cell, a solar cell, a capacitor, and so forth.

[0021] The welding converter circuitry 42 may be positioned in a variety of suitable locations. That is, although the welding converter circuitry 42 is illustrated adjacent to the drivetrains in the illustrated embodiments, such circuitry may be located in the hybrid vehicle, in the welding device, or in a separate enclosure. Indeed, the converter circuitry need not be located in the hybrid vehicle in some embodiments. Furthermore, the welding converter circuitry 42 may include a variety of components, such as rectifiers, capacitors, and so forth. For example, in one embodiment, the welding converter circuitry may be a one to one transformer configured for isolation operating in conjunction with a chopper circuit. Still further, the welding converter circuitry may be determined based on the DC bus output of the hybrid vehicle. For example, for high bus voltages, the converter circuitry may be a DC to DC inverter. For further example, the converter circuitry may be a DC to AC inverter when used with tungsten inert gas (TIG) or auxiliary welding applications.

[0022] During operation of the hybrid vehicle, the energy storage device 26 and the engine 32 are configured to cooperate to power the hybrid vehicle and rotate the wheels 40 as desired. Concurrently, the welding converter circuitry 42 is configured to draw power from the DC bus output in the electronics 28 and convert the power to an output suitable for use by a welder, plasma cutter, or similar device. It should be

noted that the DC bus output may also be drawn from alternate locations, such as from the energy storage device 26. In this way, internal components of the hybrid vehicle 10 may be configured to generate both the power necessary for the proper functioning of the vehicle as well as the power needed by an associated welding device. Indeed, existing hybrid vehicles may be adapted to provide power for a welding operation by coupling the welding device to the DC bus output of the hybrid vehicle and providing welding converter circuitry adapted to convert the DC bus output to a suitable power output for the welding device.

[0023] In particular, when a low power output is required, the energy storage device 26 may provide power through the power converter 46 to the motor 38, which drives the wheels 40. As the desired power output increases, the engine 32 supplements the power provided from the energy storage device 26 to the motor 38 via the clutch 34 and the generator 36. During instances when the required vehicle power remains steady, the power from the engine 32 may be utilized to charge the energy storage device 26. As such, the power converter 46 may be configured to operate as an AC to DC converter or as a DC to AC converter, depending on the flow of power through the circuitry. For example, when discharging, the energy storage device 26 may be configured to output an AC power output, which is converted to the DC bus output by the power converter 46 acting as an AC to DC converter, rectifying the output of the energy storage device 26. However, when charging the energy storage device 26, the power converter 46 may be configured to receive DC power and output AC power. Indeed, the power converter 46 may be configured to convert between AC power and DC power as needed by the system.

[0024] The controller 30 coupled to the electronics 28 may facilitate the process of switching the functionality of the power converter 46 between an AC to DC converter and a DC to AC converter. That is, the controller 30 may receive one or more feedback signals indicating whether the energy storage device 26 is charging or discharging and may direct the function of the converter 46 accordingly. The controller 30 may also direct the operation of the electronics 28 to ensure that the DC bus output utilized by the welding converter circuitry 42 is appropriately output at a level suitable for a welding operation. To this end, the controller 30 may individually

control the converter 46 to meet the needs of the system. Furthermore, if additional components are included in the electronic circuitry 28, the controller 30 may output different control signals to each of the components as necessary.

[0025] As will be appreciated by those skilled in the art, unlike conventional internal combustion engine-powered vehicles, which typically include an alternator driven by the engine, and capable of charging a 12 volt (or in some cases, 24 volt or other battery), the DC bus of a hybrid vehicle is typically maintained at a much higher voltage level, such as on the order of hundreds of volts. Accordingly, depending upon the type of waveform (or more generally, power) desired for welding, in accordance with the present technique, welding may be accomplished by drawing power directly from the DC bus, with no conversion circuitry, or with circuitry for performing only minimal conversion (e.g., voltage regulation). This will typically be the case where a DC welding process is performed. Where more complex waveforms are desired (e.g., pulsed waveforms, waveforms for AC welding, conversion circuitry coupled to and powered by the internal DC bus may generate such waveforms, and include control circuitry of generally known topologies for this purpose.

[0026] It should be noted that in some embodiments described above the welder may not be permanently integrated into the vehicle, but connected to the DC bus when welding operations are desired. In such cases, the vehicle may be designed to provide a convenient location at which the welder (or in some cases, simply weld cables) may be connected, such as under a cover or panel that can be opened to provide access, and closed when not in use.

[0027] It should also be noted that, although the present discussion contemplates performing welding operations powered by the internal DC bus of a hybrid vehicle, in some embodiments the welder or welding power circuitry may be able to be powered by this as well as other sources. For example, the welder may also use batteries, capacitors or other energy storage devices as an alternate (or even principal) source of power. Power generation capabilities, such as fuel cells and engine-generators may also be used as a secondary or primary power source. Further, where desired, a connection to the power grid may be provided, such as for welders that are removable

from the vehicle, or for integrated welders that are sometimes used when the vehicle is in proximity to a grid connection (e.g., in a shop or garage).

[0028] FIG. 5 is a block diagram illustrating components of an exemplary drivetrain 48 arranged in a parallel configuration that may be located in the hybrid vehicle. The parallel drivetrain 48 includes the engine 32, the clutch 34, a generator/motor unit 50, a transmission 52, wheels 40, an energy storage device 26, electronics 28, the controller 30 for the electronics, and the welding converter circuitry 42. As before, the parallel configuration drivetrain may be configured to provide power for the hybrid vehicle operations. In doing so, the drivetrain 48 generates a DC bus suitable for use as a primary welding power source. However, in the parallel configuration, both the engine 32 and the generator/motor 50 generate the power to drive the wheels 40. This is in contrast to the series drivetrain configuration in which the motor 38 exclusively generates such power.

[0029] During operation of the parallel configuration drivetrain 48, the energy storage device 26 outputs power that is routed through the electronics 28 (e.g., a power converter) to the generator/motor unit 50 and to the engine 32 to start the engine 32 when desired. When an increase in power demand occurs, the engine 32 provides the primary source of power to the generator/motor 50, to the transmission 52, and to the wheels 40. The energy storage device may also provide a secondary power source through the electronics 28 to the generator/motor unit 50 and through the transmission 52 to the wheels 40. During steady state conditions, the engine 32 may power any desired rotation of the wheels 40 and a recharging of the energy storage device 26. As such, as before, the power converter 46 may be configured to operate as a DC to AC converter or as an AC to DC converter.

[0030] The welding converter circuitry 42 is configured to draw power from the DC bus generated when the energy storage device 26 discharges and the first power converter rectifies the power output from the energy storage device 26. It should be noted that the DC bus output may be drawn from any of a variety of suitable locations, such as from the energy storage device 26, the electronics 28, or both. The welding converter circuitry 42 then converts the DC bus output to an output suitable

for the welding or plasma cutting device. Since the converter circuitry 42 is adapted to receive the DC bus output that is already generated by the hybrid vehicle electronics, embodiments of the present invention may be utilized in conjunction with existing hybrid vehicles by supplying appropriate converter circuitry that interfaces with the existing DC bus output.

[0031] FIG. 6 is a block diagram illustrating components of an exemplary drivetrain 54 arranged in a series-parallel configuration that may be located in the hybrid vehicle. The series-parallel drivetrain 54 includes the energy storage device 26, the electronics 28, the controller 30 associated with the electronics 28, the generator 36, the electric motor 38, a power splitter 56, the engine 32, the wheels 40, and the welding converter circuitry 42. In this configuration, the engine 32 is configured to both directly drive the motion of the wheels 40 and to allow the electric motor 38 to drive the wheel rotation when desired.

[0032] During use, when a low power demand is desired, the energy storage device 26 outputs power to the power converter 46, which rectifies the power output of the energy storage device 26. The power converter 46 then routes the power to the electric motor 38, which powers the wheels 40 through the use of the power splitter 56. When a greater power demand is desired, power from the engine 32 is routed by the power splitter 56 through the generator 36 to supplement the power from the energy storage device 26. When the hybrid vehicle is operating at a steady state condition, the engine 32 supplies power through the power splitter 56, to the generator 36, and through the second power converter 46 to power the electric motor 38, which drives the wheels 40. Concurrently, the power converter 46 may route energy back to the energy storage device 26 to recharge the device while the steady state condition persists.

[0033] As before, the controller 30 is adapted to individually regulate the activity of the components of the electronic circuitry 28. The welding converter circuitry 42 is adapted to draw power from the DC bus generated by the drivetrain 54 in the electronics 28 and convert the DC bus power to a power output suitable for use by the welder or plasma cutter. It should be noted that the DC bus output may be drawn

from any of a variety of suitable locations, such as from the energy storage device 26, the electronics 28, or both. As such, the welding converter circuitry 42 may include rectifiers, capacitors, and any other electrical circuitry needed for the given application.

[0034] While the illustrated embodiments show welding converter circuitry as associated with series, parallel, and series-parallel drivetrains, it should be noted that embodiments of the present invention may be utilized in conjunction with any hybrid vehicle. That is, the DC bus in any part of any type of drivetrain may be utilized as a source of power for a welding device. Still further, the hybrid vehicle need not be a hybrid work vehicle as illustrated herein. Indeed, the welding converter circuitry may be utilized with any hybrid vehicle, such as hybrid cars or trucks. Furthermore, the illustrated components of the shown drivetrains are merely exemplary, and other drivetrains may include additional components not shown or may eliminate some of the illustrated components. Still further, while embodiments of the present invention may be used with hybrid vehicles as described herein, it should be noted that in certain embodiments, the DC bus of alternate vehicles, such as plug-in electric vehicles may also be utilized to power one or more welding devices.

[0035] While only certain features of the invention have been illustrated and described herein, many modifications and changes will occur to those skilled in the art. It is, therefore, to be understood that the appended claims are intended to cover all such modifications and changes as fall within the true spirit of the invention.

CLAIMS:

1. A welding system, comprising:
a hybrid vehicle comprising an engine and an energy storage device, wherein the engine and the energy storage device are configured to cooperate with electronic circuitry to generate a direct current (DC) bus output; and
a welding or cutting device coupled to the hybrid vehicle and configured to utilize the DC bus output from the hybrid vehicle as a source of power.
2. The welding system of claim 1, wherein the welding or cutting device comprises welding converter circuitry configured to receive the DC bus output and to convert the DC bus output to a welding output appropriate for use by the welding device.
3. The welding system of claim 1, wherein the welding or cutting device is a plasma cutter.
4. The welding system of claim 1, wherein the welding or cutting device is coupled to a first side of the hybrid vehicle.
5. The welding system of claim 1, wherein the welding or cutting device is integrated into the hybrid vehicle.
6. The welding system of claim 5, wherein the welding or cutting device is accessible to an operator via a removable panel that encloses the welding device in the side of the hybrid vehicle.
7. The welding system of claim 1, wherein the engine, the energy storage device, and the electronic circuitry of the hybrid vehicle are arranged in a series configuration.

8. The welding system of claim 1, wherein the engine, the energy storage device, and the electronic circuitry of the hybrid vehicle are arranged in a parallel configuration.

9. The welding system of claim 1, wherein the engine, the energy storage device, and the electronic circuitry of the hybrid vehicle are arranged in a series-parallel configuration.

10. A hybrid vehicle, comprising:
an engine;
an energy storage device configured to cooperate with the engine to generate a direct current (DC) bus output of greater than approximately 48 volts and to drive a motor;
converter circuitry coupled to the engine and the energy storage device and configured to receive the DC bus output and to convert the DC bus output to a power output appropriate for use by a welding or cutting device.

11. The hybrid vehicle of claim 10, further comprising electronic circuitry configured to function as at least one of an alternating current (AC) to DC converter and a DC to AC converter.

12. The hybrid vehicle of claim 11, further comprising a controller configured to control the function of the electronic circuitry based on feedback regarding an operating parameter of the hybrid vehicle.

13. The hybrid vehicle of claim 10, wherein the DC bus output is greater than approximately 100 volts.

14. The hybrid vehicle of claim 11, wherein the converter circuitry comprises a transformer and an inverter.

15. The hybrid vehicle of claim 11, wherein the converter circuitry comprises isolation circuitry configured to isolate the DC bus output from an operator.

16. A welding or cutting device, comprising:
converter circuitry configured to receive a direct current (DC) bus power output of between approximately 48 volts and approximately 340 volts from electronic circuitry located in a hybrid vehicle and to convert the DC bus power output to a welding power output.



17. The welding or cutting device of claim 16, wherein the hybrid vehicle comprises an engine and an energy storage device configured to cooperate to provide the DC bus power output.

18. The welding or cutting device of claim 16, wherein the hybrid vehicle comprises a parallel drivetrain configured to output the DC bus power output.

19. The welding or cutting device of claim 16, wherein the hybrid vehicle comprises a series drivetrain configured to output the DC bus power output.

20. The welding or cutting device of claim 16, wherein the welding or cutting device is a plasma cutter.

1 / 3

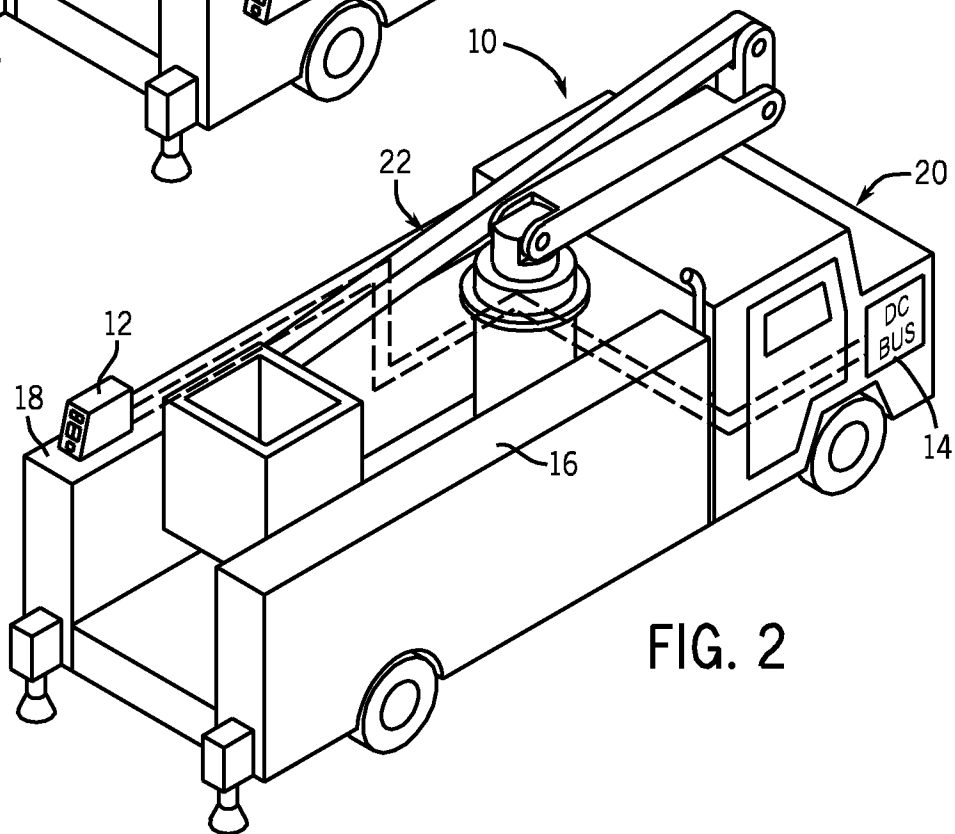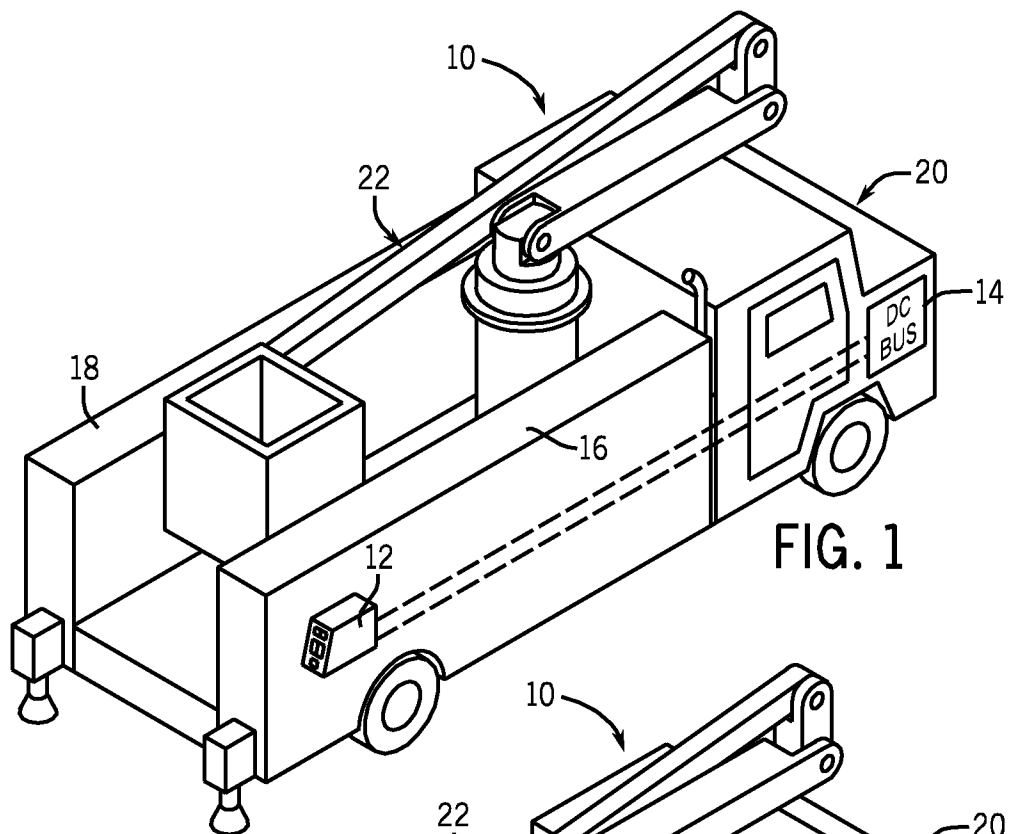

2 / 3

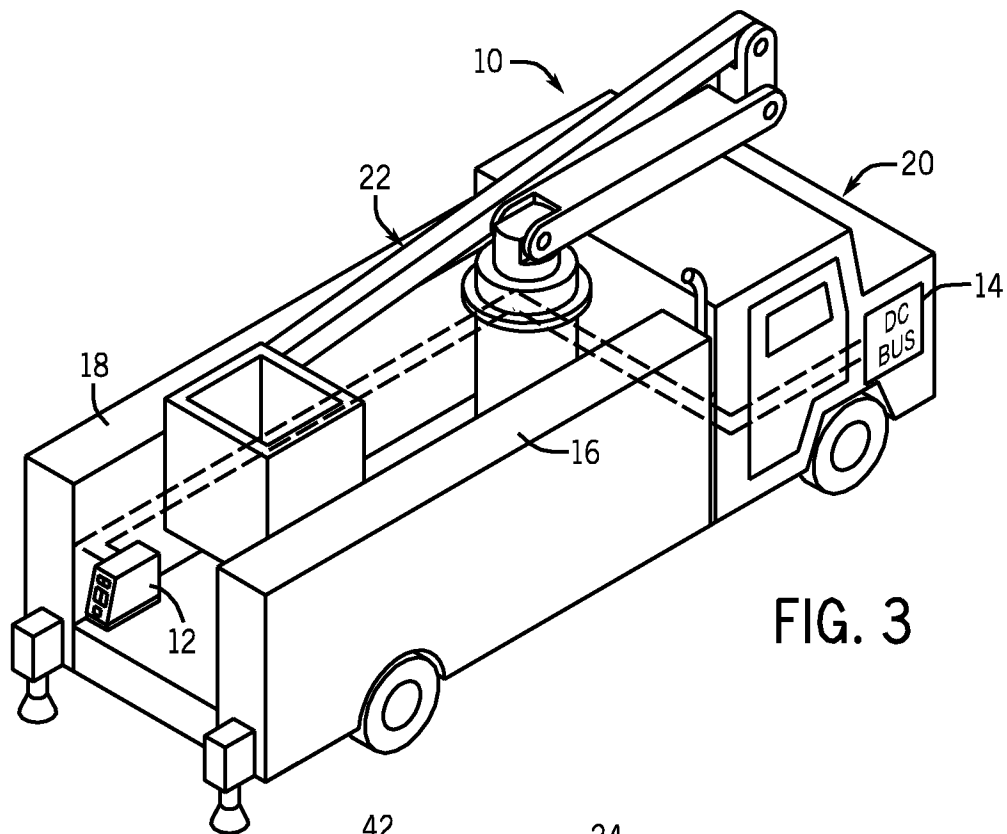


FIG. 3

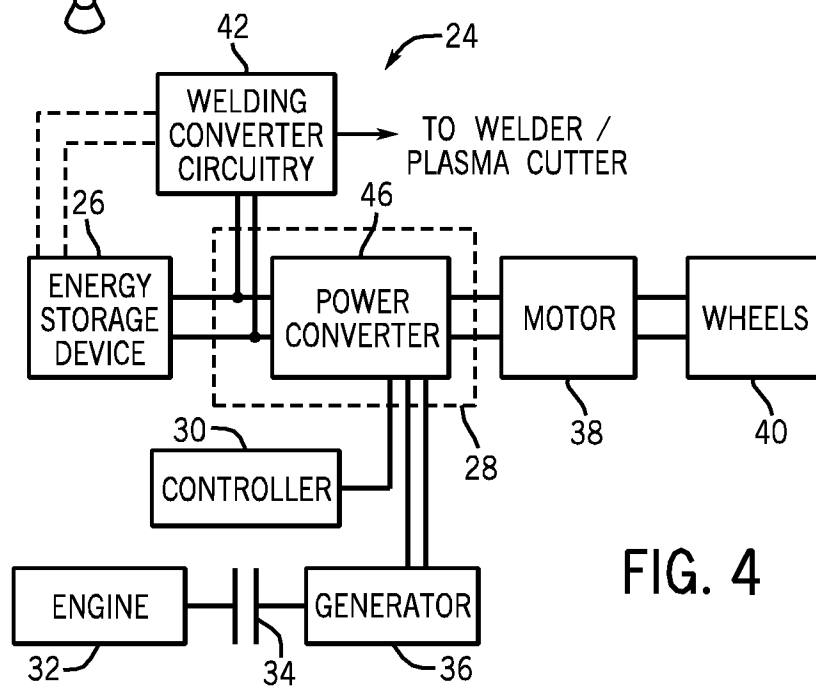


FIG. 4

FIG. 5


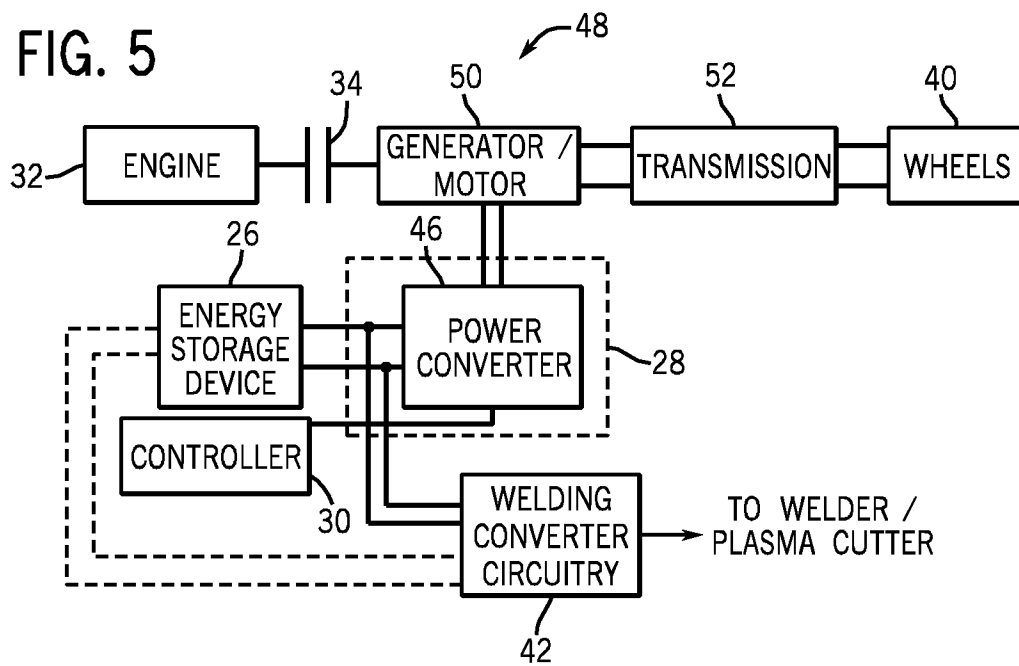


FIG. 6

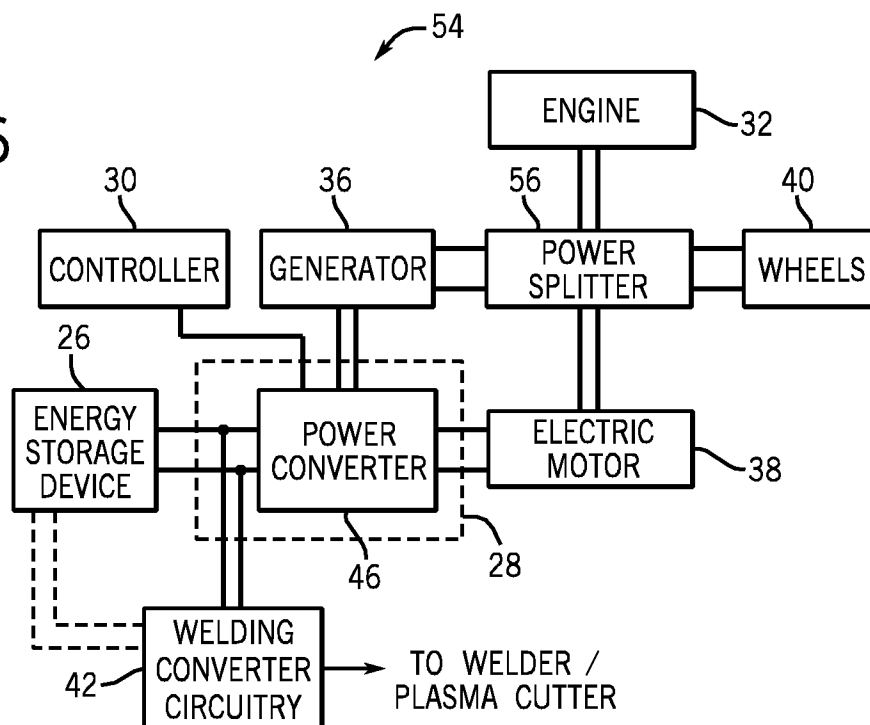

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2010/038010

A. CLASSIFICATION OF SUBJECT MATTER

INV. B23K9/10 H02J7/34
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B23K H02J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2008/156946 A1 (ILLINOIS TOOL WORKS [US]; HUTCHINSON RICHARD M [US]) 24 December 2008 (2008-12-24)	1-6,8-20
A	paragraph [00017] - paragraph [00019] paragraph [00022] - paragraph [00025] figures 1-2	7
X	US 2006/037953 A1 (MATTHEWS WILLIAM T [US] ET AL) 23 February 2006 (2006-02-23) paragraph [0004] - paragraph [0008] paragraph [0029] - paragraph [0040]; figures 1-3 ----- -/--	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 September 2010

Date of mailing of the international search report

15/09/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

De Backer, Tom

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2010/038010

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/164645 A1 (CRANDELL JOHN O [US] CRANDELL III JOHN O [US]) 4 September 2003 (2003-09-04)	1-8, 10-20
A	paragraph [0018] - paragraph [0024]; figures 1-4,6 paragraph [0036] - paragraph [0038]	9
X	US 5 250 786 A (KIKUCHI SHINJI [JP] ET AL) 5 October 1993 (1993-10-05)	1-6,8, 10-20
A	column 4 - column 5; figures 1,2	7,9
X	JP 2005 224838 A (DENYO CO LTD) 25 August 2005 (2005-08-25) * abstract; figures 1,2	1,10, 16-19
X	US 3 770 976 A (STROUD L ET AL) 6 November 1973 (1973-11-06) column 2 - column 4; figures 1-4	1,10, 16-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/038010

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2008156946 A1	24-12-2008	CN 101743088 A EP 2160265 A1 US 2008314885 A1	16-06-2010 10-03-2010 25-12-2008
US 2006037953 A1	23-02-2006	NONE	
US 2003164645 A1	04-09-2003	NONE	
US 5250786 A	05-10-1993	NONE	
JP 2005224838 A	25-08-2005	JP 4253260 B2	08-04-2009
US 3770976 A	06-11-1973	CA 1001229 A1 DE 2330781 A1 JP 49059057 A	07-12-1976 07-03-1974 07-06-1974