




(86) Date de dépôt PCT/PCT Filing Date: 2009/12/18  
(87) Date publication PCT/PCT Publication Date: 2011/06/23  
(45) Date de délivrance/Issue Date: 2017/04/04  
(85) Entrée phase nationale/National Entry: 2012/06/15  
(86) N° demande PCT/PCT Application No.: EP 2009/067570  
(87) N° publication PCT/PCT Publication No.: 2011/072754


(51) Cl.Int./Int.Cl. *B02C 4/30* (2006.01)  
(72) Inventeurs/Inventors:  
SIITONEN, PEKKA, FI;  
KAIPAINEN, MIKKO, FI;  
LIIMATAINEN, JARI, FI;  
GROENVALL, LARS, SE  
(73) Propriétaire/Owner:  
METSO MINERALS (WEAR PROTECTION) AB, SE  
(74) Agent: SMART & BIGGAR

(54) Titre : ELEMENTS D'INSERTION ALLONGES A DEUX MATERIAUX POUR ROULEAU DE BROYAGE  
(54) Title: BIMATERIAL ELONGATED INSERT MEMBER FOR A GRINDING ROLL

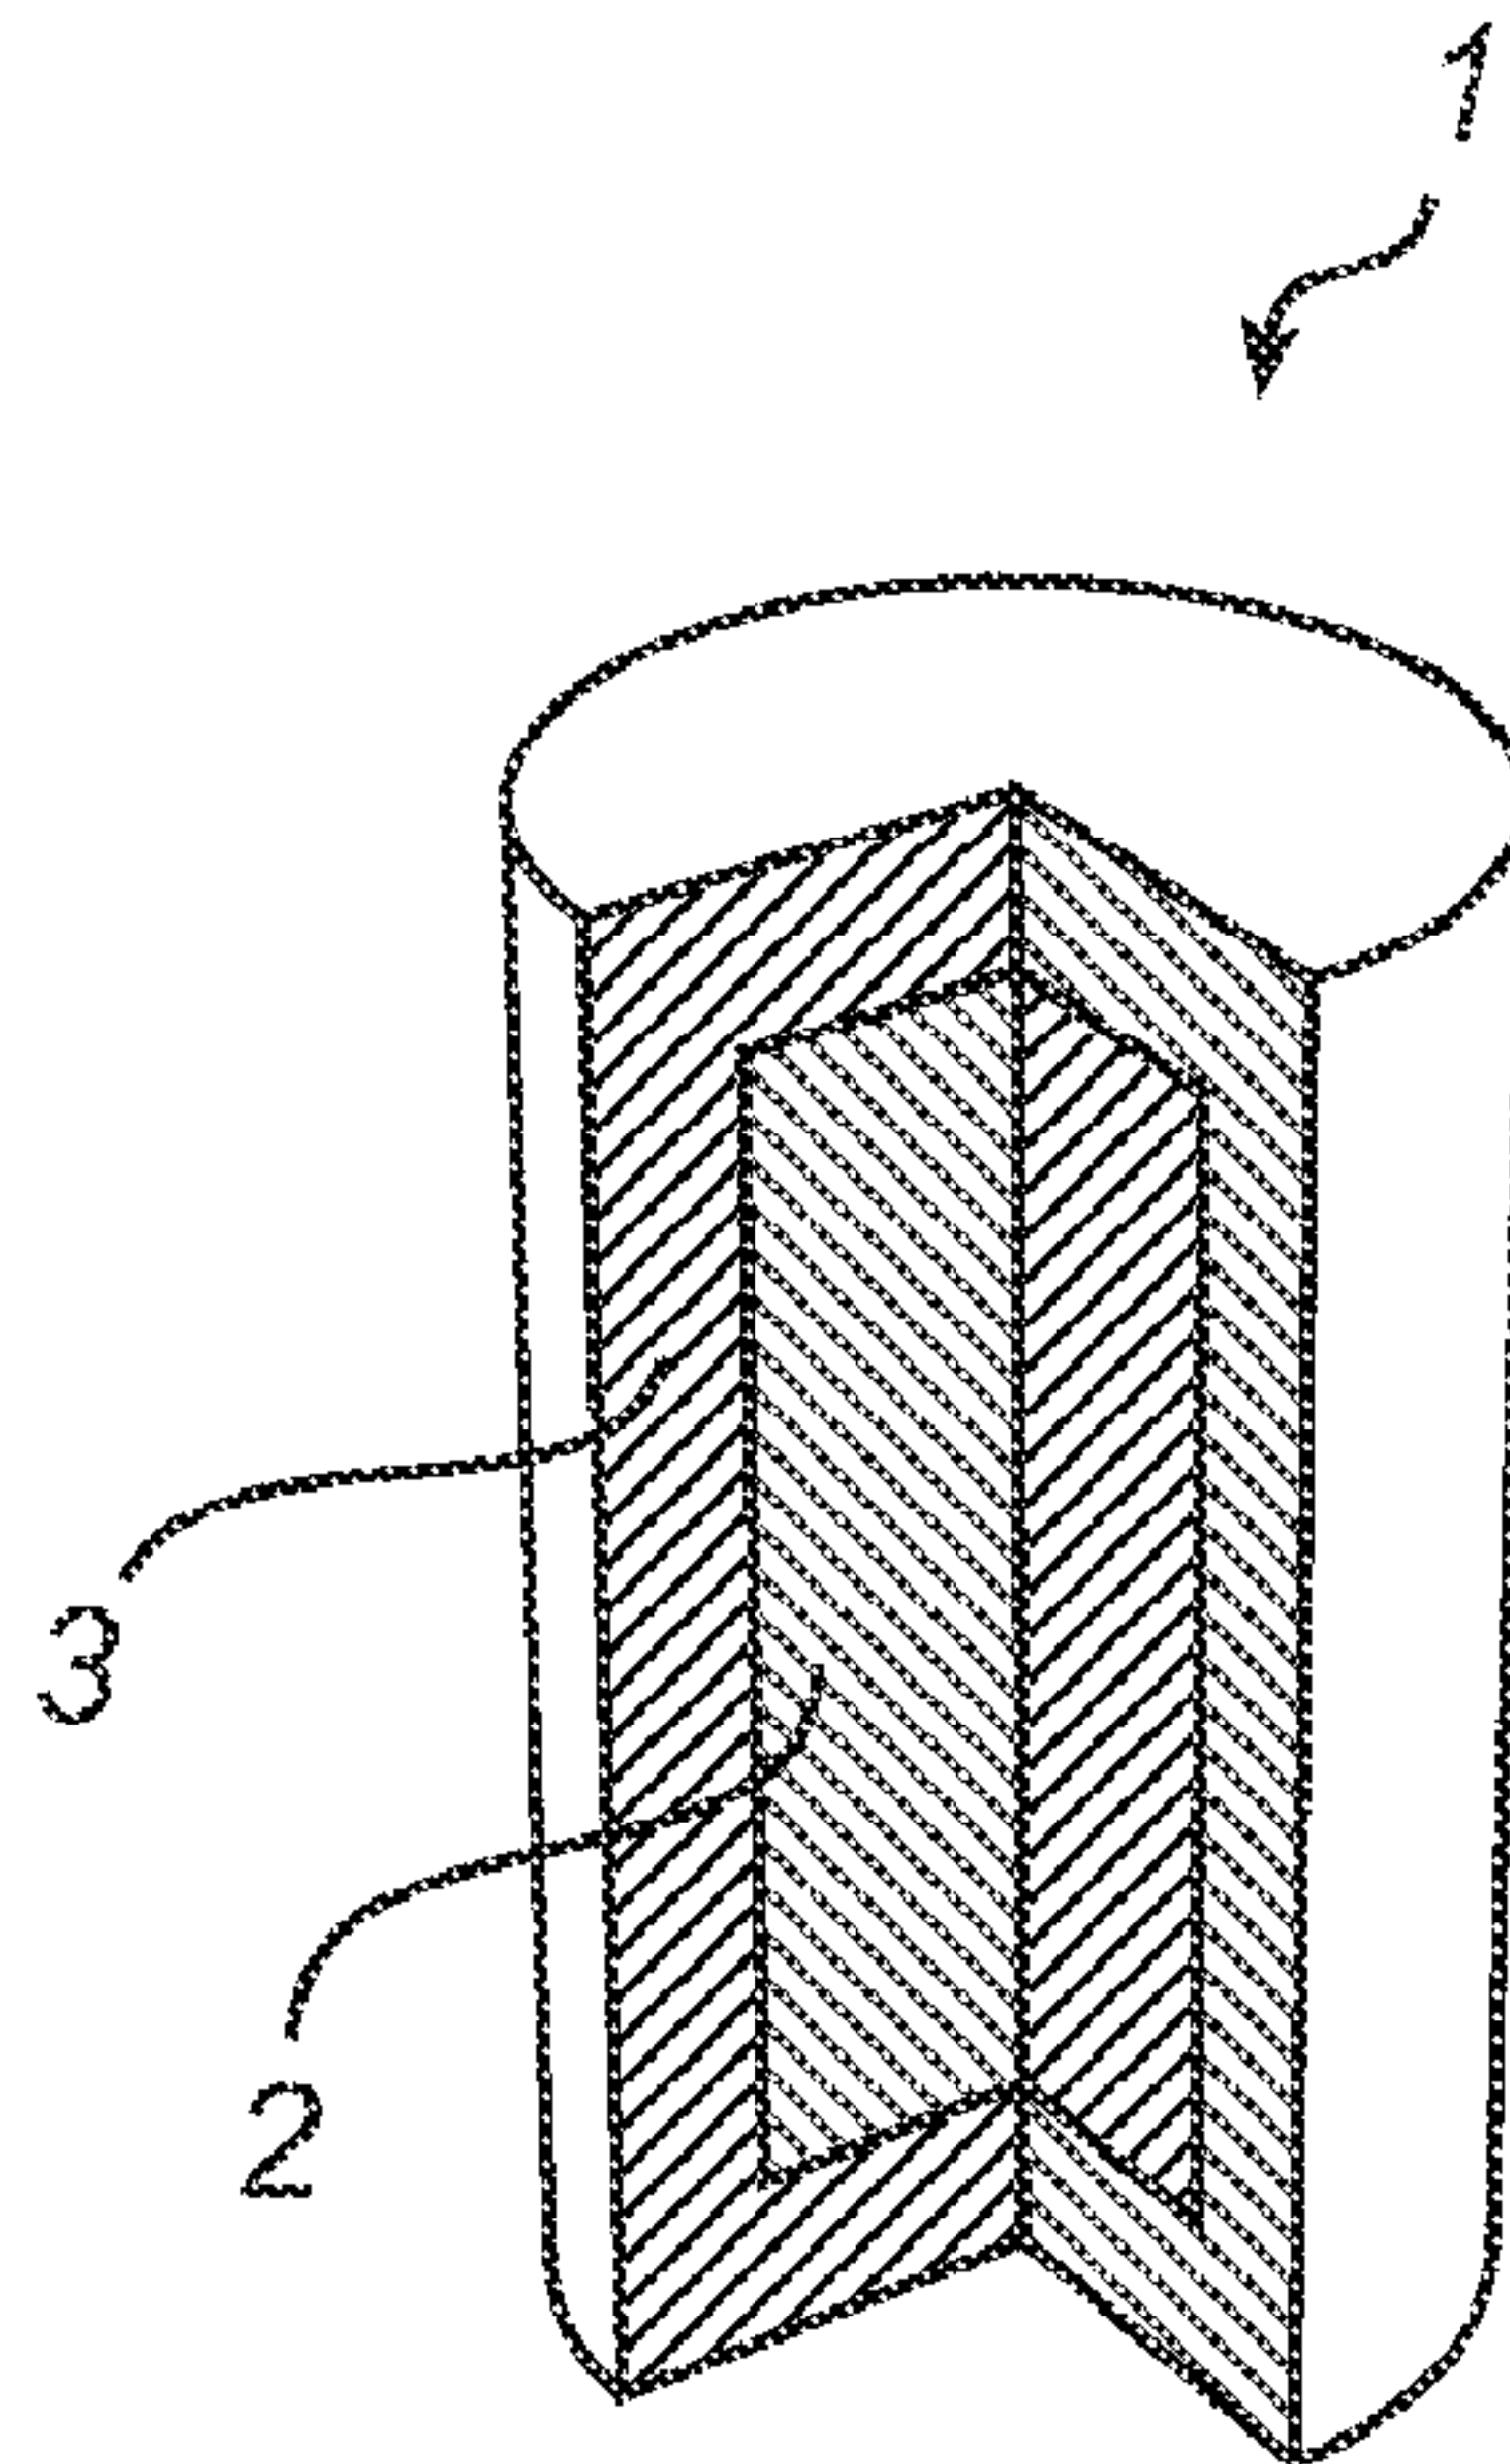

(57) Abrégé/Abstract:

The invention relates to an elongated insert member (1) for a grinding roll for heavy wear operation. The insert member (1) comprises a core (2) of a first material having a first hardness, said core (2) having an extension in the longitudinal direction of said insert member (1), and a body (3) of a second material having a second hardness, said body (3) enclosing said core (2). The first hardness is greater than the second hardness. The invention also relates to a cassette and a segment for a grinding roll, a grinding roll and a roll machine.

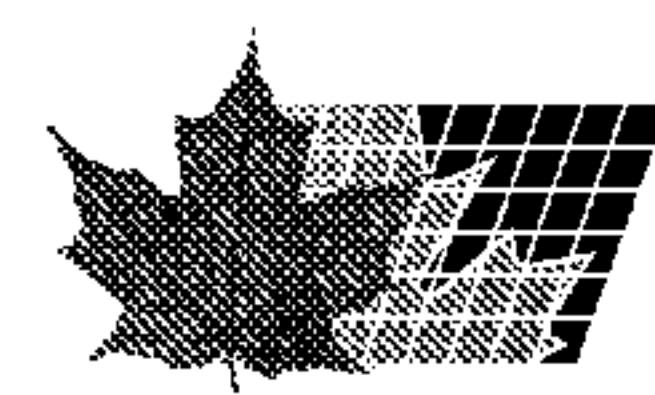

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
23 June 2011 (23.06.2011)(10) International Publication Number  
**WO 2011/072754 A1**(51) International Patent Classification:  
*B02C 4/30* (2006.01)(21) International Application Number:  
PCT/EP2009/067570(22) International Filing Date:  
18 December 2009 (18.12.2009)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **METSO MINERALS (WEAR PROTECTION) AB** [SE/SE]; P.O. Box 74, S-231 21 Trelleborg (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SIITONEN, Pekka** [FI/FI]; Säöksjärventie 9, FIN-33880 Lempäälä (FI). **KAIPIAINEN, Mikko** [FI/FI]; Pättiniemenkatu 11 A2, FIN-33270 Tampere (FI). **LIIMATAINEN, Jari** [FI/FI]; Ansiokatu 5, FIN-33241 Tampere (FI). **GRÖNVALL, Lars** [SE/SE]; Granlundagatan 17 A, S-231 55 Trelleborg (SE).(74) Agent: **STENBÄCK, Maria**; Awapatent Ab, P.O. Box 5117, S-200 71 Malmö (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: BIMATERIAL ELONGATED INSERT MEMBER FOR A GRINDING ROLL

Fig. 1a

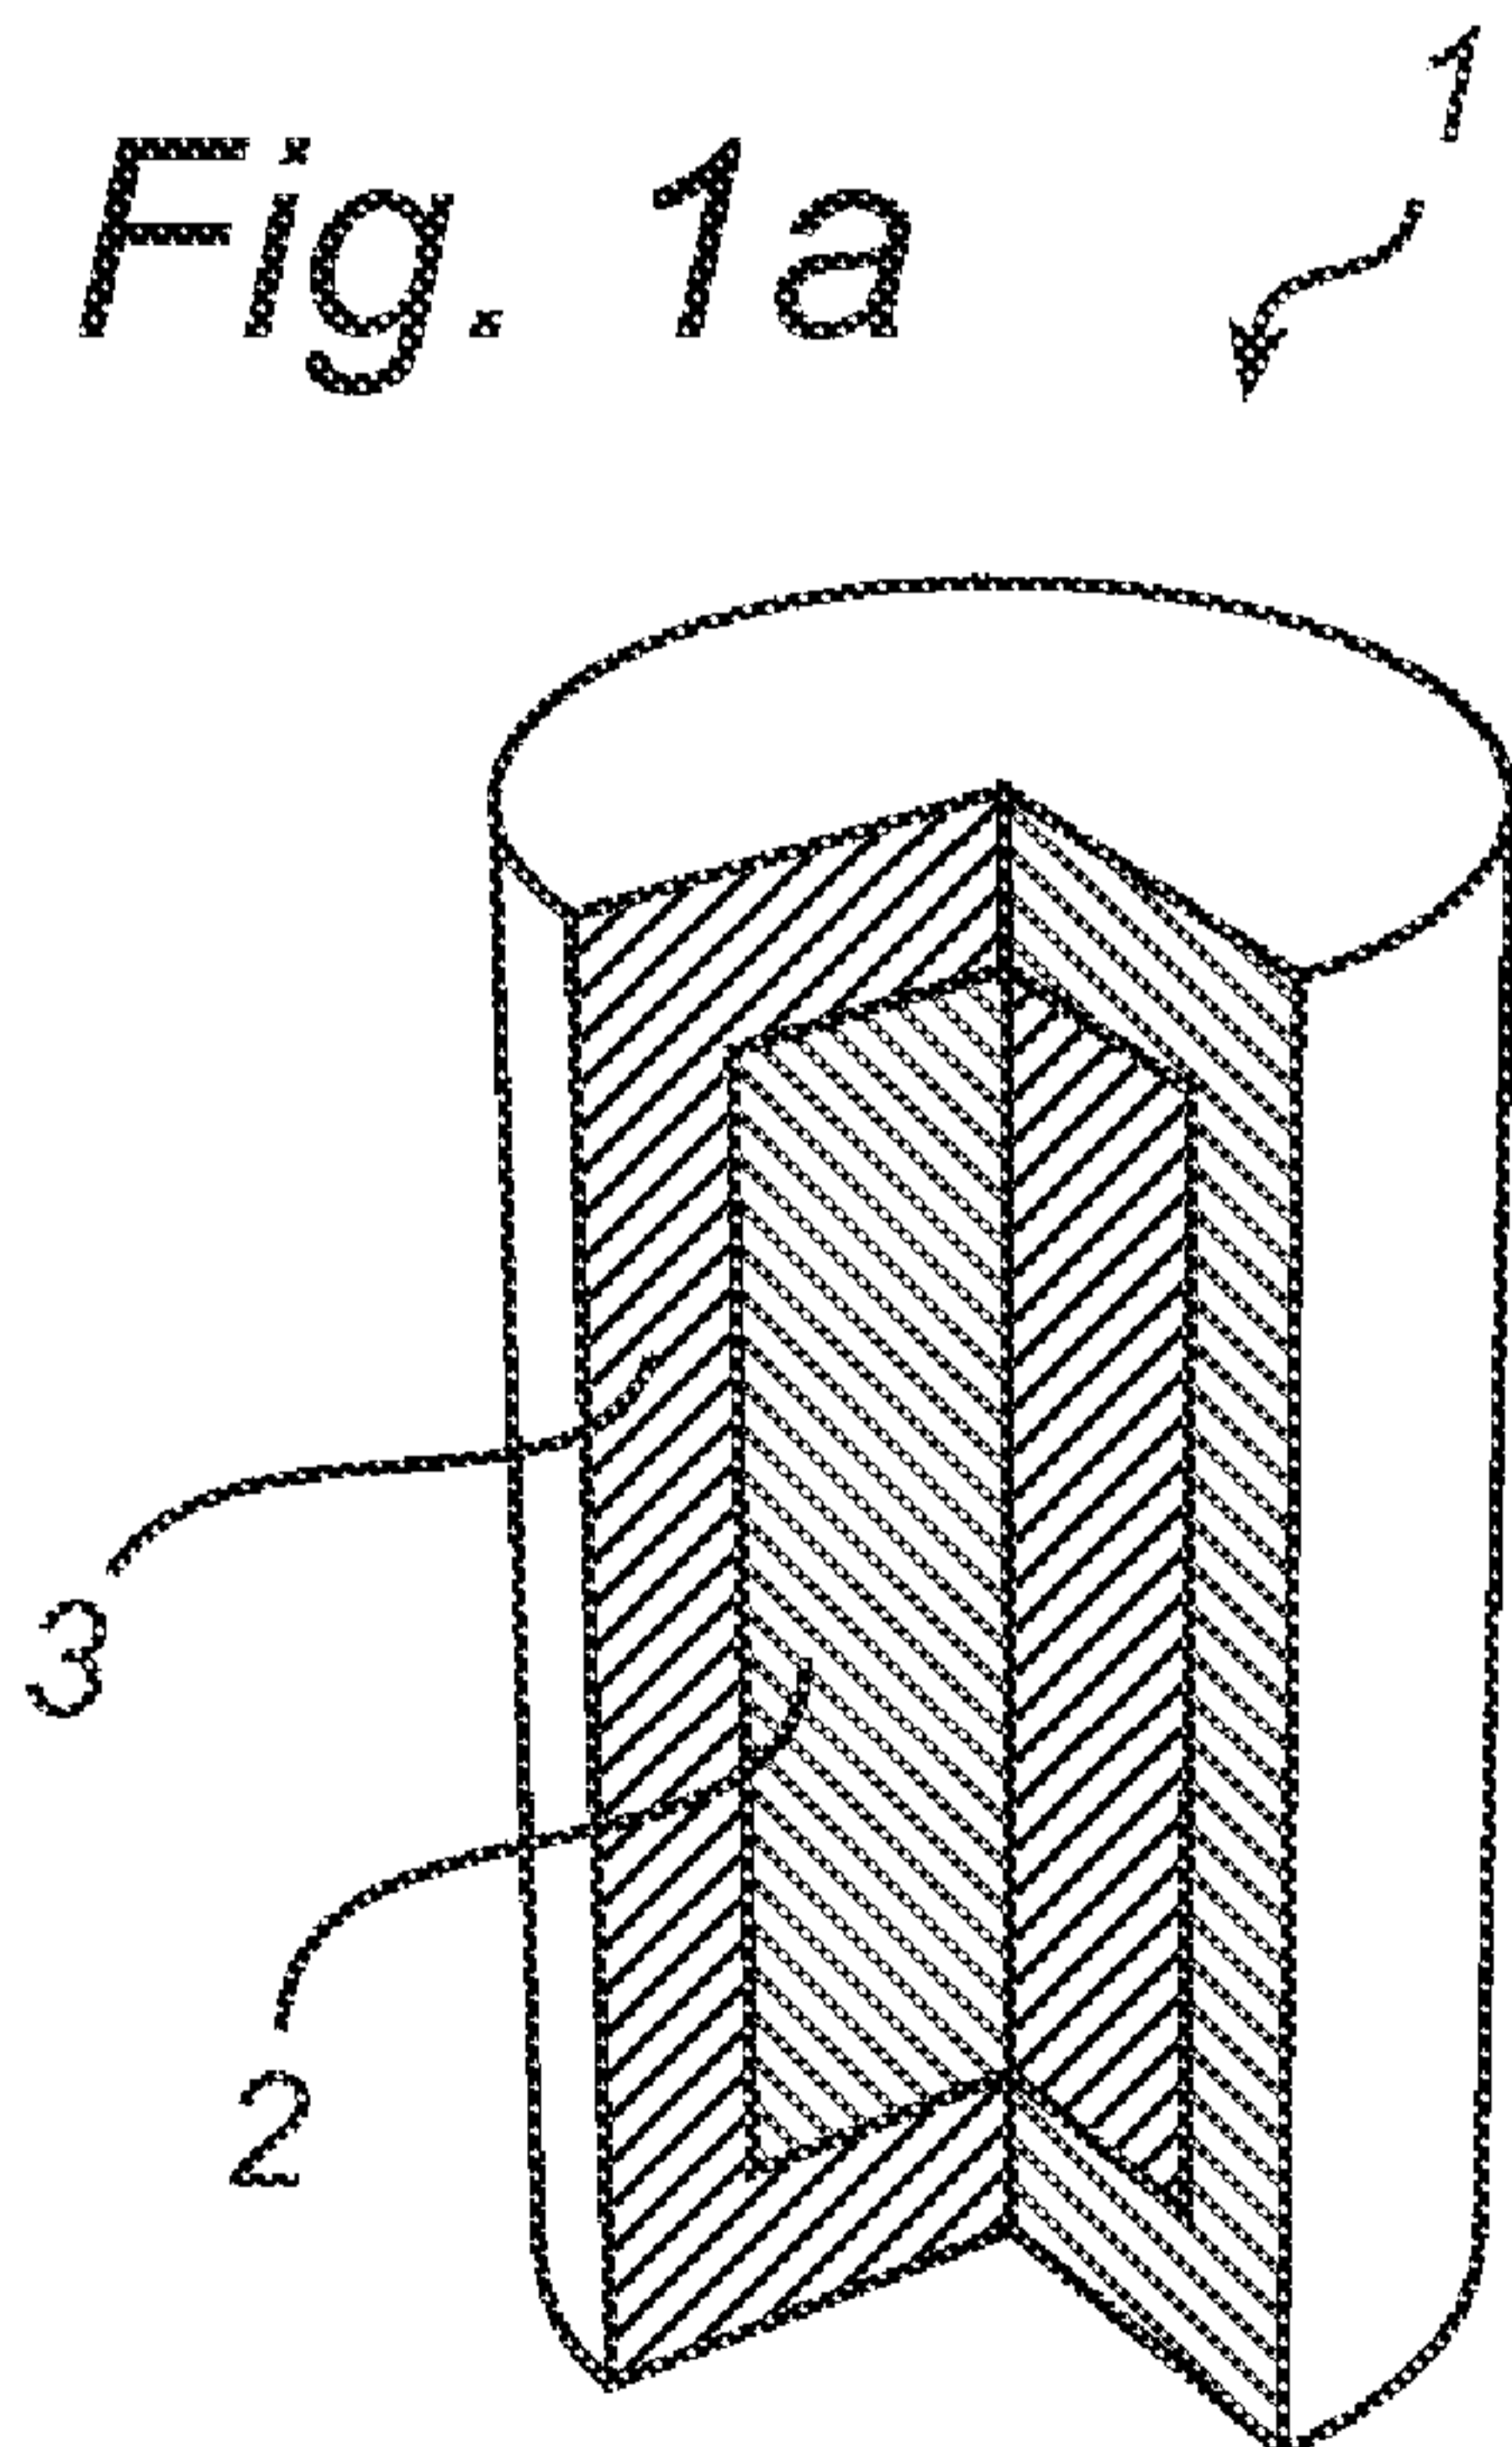

(57) Abstract: The invention relates to an elongated insert member (1) for a grinding roll for heavy wear operation. The insert member (1) comprises a core (2) of a first material having a first hardness, said core (2) having an extension in the longitudinal direction of said insert member (1), and a body (3) of a second material having a second hardness, said body (3) enclosing said core (2). The first hardness is greater than the second hardness. The invention also relates to a cassette and a segment for a grinding roll, a grinding roll and a roll machine.

WO 2011/072754 A1

**BIMATERIAL ELONGATED INSERT MEMBER FOR A GRINDING ROLL**Technical field

The present invention relates to an elongated insert member for a grinding roll for heavy wear operation. The invention also relates to a cassette and a segment for a grinding roll, a grinding roll and a roll machine.

5

Background art

When materials are crushed or pulverised using interparticle crushing, two opposed rotatably mounted rolls, separated from each other by a gap, form a draw-in nip where the materials are drawn in, either force fed or fed by gravity, and crushed against each other. An advantage of interparticle crushing is that an effective crushing may be achieved, even to very small grain sizes, with a reduced energy consumption as compared to many other crushing techniques. Further, the level of noise during the process is essentially reduced as compared to other crushing techniques.

10 The present invention relates to an improved wear resistant element for a roll arrangement using interparticle crushing and single particle crushing wherein great wear conditions exist during crushing or pulverising of materials between two rolls in the roller arrangement. The outer surfaces of the roll are subjected to extraordinarily high stressing from which, among other things, high wear emerges. It has been known to counter this wear by means of different shaping and coating of the roll surfaces exposed to the wear.

15 EP-699 479 discloses rolls of high-pressure roll presses for the compressive size reduction of granular material having hard surfaces with nub pins which are wear-resistant and suitable for autogenous wear protection. The nub pins, which have a long potential service life even under the action of high compressive loads, have a radially inner pin part which is easily welded to the roll surface and a radially outer harder pin part protectively covering the radially inner pin part.

20 There are problems associated with the above mentioned technique. Due to the enormous amount of stress applied on the rollers, the wear

30

resistant nub pins inserted into the surface regions of the rollers must be able to handle a large amount of pressure without failure. However, even nub pins as describes in EP-699 479 wear down in a pace being unsatisfying. The edges of the nub pins are particularly exposed and have a tendency of  
5 breaking prematurely, thereby accelerating the wear pace of the nub pins.

#### Summary of the invention

It is an object of the present invention to provide an improvement of the above technique and prior art. More particularly, it is an object of the present  
10 invention to provide an improved insert member for a grinding roll such that the outer surface of the grinding roll is given a high wear resistance. Further, it is an object of the present invention to provide a cassette and a segment for a grinding roll, a grinding roll and a roll machine.

These and other objects as well as advantages that will be apparent  
15 from the following description of the present invention are achieved by an elongated insert member for a grinding roll for heavy wear operation according to the independent claim.

An elongated insert member for a grinding roll for heavy wear operation is provided. The insert member comprises a core of a first material  
20 having a first hardness, said core having an extension in the longitudinal direction of said insert member, and a body of a second material having a second hardness, said body enclosing said core. The first hardness is greater than the second hardness. This is advantageous in that an insert member with this type of structure is considerably more reliable than the hard metal  
25 studs according to the prior art. Due to a more ductile body of the insert member, hard metal grades having less binding content can be used making the insert member more wear resistant. This in turn leads to a decreased amount of insert member failure, which in current grinding rolls incorporating wear resistant insert members has lead to failures during use. A more ductile  
30 body of the insert member further counteracts prematurely breakage of the edges of the insert members, which are particularly exposed to wear. When the insert member is subjected to wear, the ductile but tough body will be worn off rather quickly on the top of the insert member, thereby exposing the

## 3

core. Accordingly, the top of the insert member being subjected to wear will be constituted by a hard and wear resistant core enclosed in a radial direction by a more tough but ductile body. Since the surface of the body being subjected to wear is so much smaller than the surface of the core being  
5 subjected to wear, the body and the core will wear off in a approximately the same pace. As mentioned above, the body of the insert member also function as a protection for the more sensitive edges of the core. Another advantage of having a tough but more ductile body is that the insert members are made less likely to dislodge from the grinding roll due to the elasticity created  
10 between the insert member and the grinding roll when attached.

The first material may have a first toughness and the second material a second toughness, the first toughness being smaller than the second toughness, which is advantageous in that the effects of a more ductile body are further enhanced.

15 The first material may be selected from a group comprising metallic material, ceramic material or a combination thereof, which is advantageous in that this material is very resistant against wear.

The second material may be selected from a group comprising metallic material, ceramic material or a combination thereof, which is advantageous in  
20 that this material is very resistant against wear.

The first material may have a preferred hardness from at least 600 to 1200 HV. This is an especially preferred hardness of the core of the insert member.

25 The second material may have a preferred hardness from 400 to 1200 HV. This is an especially preferred hardness of the body of the insert member.

The cross-section of the insert member may be cylindrical and the insert member may have the shape of a pin. This simple shape makes the insert members easy to manufacture.

30 The core may be cylindrical, which is a simple shape making an insert member with such a core easy to manufacture.

The geometric center axis of said core may be unaligned with the geometric center axis of said insert member.

The core may extend along the entire length of said insert member in the longitudinal direction.

The core may extend from the top of said insert member and along a part of the length of said insert member in the longitudinal direction.

5 Accordingly, the insert member may be adapted to different shapes and sizes in order to obtain the characteristics needed for a certain crushing operation, depending on what kind of material which is to be crushed or pulverised.

10 The outer surface of said insert member may be profiled, which is advantageous in that an uneven surface is provided on the roll, thereby improving the drawing-in of the material to be crushed. Additionally, the materials to be crushed or pulverised filling the spaces created between the insert members and thereby creating an autogenous protection of the roll, is retained due to the uneven surface of the insert members.

15 According to a second aspect of the invention, the invention relates to a cassette for a grinding roll for heavy wear operation, comprising a plurality of insert members according to the above described features.

20 According to a third aspect of the invention, the invention relates to a segment for a grinding roll for heavy wear operation, comprising a plurality of insert members or cassettes according the features above.

According to a fourth aspect of the invention, the invention relates to a grinding roll for heavy wear operation comprising a plurality of insert members, cassettes or segments according the features above.

25 According to a fifth aspect of the invention, the invention relates to a roll machine for comminuting a bed of material, comprising at least one grinding roll according to the features above.

30 According to a sixth aspect of the invention, the invention relates to a method for improving the wear resistance of a high pressure grinding roll. The method comprises manufacturing a grinding roll, arranging at least one recess to the circumference of said grinding roll, manufacturing at least one insert member, and arranging and attaching said at least one insert member to said at least one recess, wherein the step of manufacturing said at least one insert member comprises arranging a core of a first material having a first

50842-18

5

hardness in a body of a second material having a second hardness, said core having an extension in the longitudinal direction of said at least one insert member and said body enclosing said core, wherein the first hardness is greater than the second hardness. This is advantageous in that it results in a reliable attachment of the at least one insert member to the grinding roll, thereby securing a high wear resistance of the envelope surface of the grinding roll.

According to a further aspect of the invention, the invention relates to an elongated insert member for a grinding roll for heavy wear operation, the insert member extending along a longitudinal axis, the insert member comprising a core of a first material having a first hardness, said core extending in the longitudinal direction of said insert member and including a first and second axial ends, and a body of a second material having a second hardness, said body including first and second ends and enclosing said core in radial direction to protect edges of the core, wherein the first and second axial ends of the core do not extend past the first and second ends of the body in the longitudinal direction, wherein the first hardness is greater than the second hardness.

According to a further aspect of the invention, the invention relates to a cassette for a grinding roll for heavy wear operation, comprising a plurality of insert members as described above.

According to a further aspect of the invention, the invention relates to a segment for a grinding roll for heavy wear operation, comprising a plurality of insert members as described above or a plurality of cassettes as described above.

According to a further aspect of the invention, the invention relates to a grinding roll for heavy wear operation, comprising a plurality of insert members as described above, a plurality of cassettes as described above or a plurality of segments as described above.

50842-18

5a

According to a further aspect of the invention, the invention relates to a roll machine for comminuting a bed of material, comprising at least one grinding roll as described above.

According to a further aspect of the invention, the invention relates to a  
5 method for improving the wear resistance of a high pressure grinding roll, comprising  
manufacturing a grinding roll, arranging at least one recess to the circumference of  
said grinding roll, manufacturing at least one insert member, and arranging and  
attaching said at least one insert member to said at least one recess, wherein the  
step of manufacturing said at least one insert member comprises arranging a core of  
10 a first material having a first hardness in a body of a second material having a second  
hardness, said core having an extension in a longitudinal direction of said at least one  
insert member and including first and second axial ends and said body including a  
first and second ends and enclosing said core in a radial direction to protect edges of  
the core, wherein the first and second axial ends of the core do not extend past the  
15 first and second ends of the body in the longitudinal direction, wherein the first  
hardness is greater than the second hardness.

Generally, all terms used in the claims are to be interpreted according  
to their ordinary meaning in the technical field, unless explicitly defined otherwise  
herein. All references to "a/an/the [element, device, component, means, etc]" are to  
20 be interpreted openly as referring to at least one instance of said element, device,  
component, means, etc., unless explicitly stated otherwise. Further, by the term  
"toughness" it is meant the "fracture toughness" throughout the application, and by  
"comprising" it is meant "comprising but not limited to" throughout the application.  
The term "grinding" is meant to include "crushing".

## 25 Brief description of the drawings

The above, as well as additional objects, features and advantages of  
the present invention, will be better understood through the following illustrative and  
non-limiting detailed description of preferred embodiments of the present invention,

50842-18

5b

with reference to the appended drawings, where the same reference numerals will be used for similar elements, wherein:

Figs. 1a-l are perspective views of an insert member according to twelve different embodiments of the present invention,

5 Fig. 2 is a perspective view of a cassette for a grinding roll comprising a plurality of insert members,

Fig. 3 is a perspective view of a segment for a grinding roll comprising a plurality of cassettes or insert members,

10 Fig. 4 is a perspective view of a grinding roll comprising a plurality of segments, cassettes or insert members,

Fig. 5 is a perspective view of a roll machine comprising at least one grinding roll, and

Fig. 6 is a perspective view of an insert member according to ninth embodiment of the invention.

Detailed description of preferred embodiments of the invention

Fig. 1a illustrates an insert member 1 for a grinding roll for heavy wear operation according to a first embodiment of the invention. The cross-section of the insert member 1 is cylindrical and it has the shape of a pin. The insert member 1 has a core 2 of a first material having a first hardness. The core 2 is cylindrical and extends in the longitudinal direction of the insert member 1. The geometric axis of the core 2 is aligned with the geometric axis of the inert member 1. The insert member 1 further has a body 3 of a second material having a second hardness, which body 3 completely encloses the core 2. The first hardness is greater than the second hardness. The first material, that is to say the material of the core 2 of the insert member 1, is preferably constituted by a metallic material, ceramic material or a combination thereof. However, other material solutions for the core 2 of the insert member 1 are naturally also possible. The first material has a preferred hardness from at least 600 to 1200 HV. The second material, that is to say the material of the body 3 of the insert member 1, is preferably constituted by a metallic material, ceramic material or a combination thereof. However, other material solutions for the body 3 of the insert member 1 are naturally also possible. The second material has a preferred hardness from 400 to 1200 HV. In a preferred embodiment of the invention, the first material has a first toughness and the second material has a second toughness, and the first toughness is smaller than the second toughness.

In Fig. 1b, the insert member 1 according to a second embodiment of the invention is illustrated. The core 2 is cylindrical and extends along the entire length of the insert member 1 in the longitudinal direction. The geometric axis of the core 2 is aligned with the geometric axis of the inert member 1. The body 3 of the insert member 1 radially encloses the core 2. The core 2 is thus exposed on the top and the bottom of the insert member 1, when standing in a vertical direction.

Fig. 1c illustrates the insert member 1 according to a third embodiment of the invention. The core 2 is cylindrical and extends in the longitudinal

direction of the insert member 1. The geometric axis of the core 2 is offset or displaced with respect to the geometric axis of the insert member 1. The body 3 of the insert member 1 completely encloses the core 2. In Fig. 1d, the insert member 1 according to a fourth embodiment of the invention is  
5 illustrated. The core 2 is cylindrical and extends from the top of the insert member 1 and along a part of the length of the insert member in the longitudinal direction. The geometric axis of the core 2 is aligned with the geometric axis of the insert member 1. The body 3 of the insert member 1 radially encloses the core 2. The core 2 is exposed on the top of the insert  
10 member 1, when standing in a vertical direction.

Fig. 1e illustrates the insert member 1 according to a fifth embodiment of the invention. The core 2 is cylindrical and extends in the longitudinal direction of the insert member 1. The geometric axis of the core 2 is aligned with the geometric axis of the insert member 1. The body 3 of the insert  
15 member 1 completely encloses the core 2. The outer surface 4 of the insert member 1 is profiled. That is to say, the outer surface 4 of the insert member 1 is provided with bulges in order to help keeping the material to be crushed or pulverized in the spaces created between the insert members 1 when provided on a roll, such that a protective autogenous layer is created and  
20 maintained during use of that roll. The bulges may be formed integrally with the body 3 or may be provided as a sleeve arranged on said body.

In Fig. 1f, the insert member 1 according to a sixth embodiment of the invention is illustrated. The core 2 is cylindrical and extends in the longitudinal direction of the insert member 1. The geometric axis of the core 2 is aligned  
25 with the geometric axis of the insert member 1. The body 3 of the insert member 1 completely encloses the core 2. The whole body 2 is covered with a surface layer or coating. The surface layer or the coating may be obtained by dipping the insert member 1 into a liquid coating and allowing it to dry on the insert member surface or to react with the insert member surface. The  
30 coating or surface layer may also be obtained by mechanical or physical processes, for example by deposition or carburizing.

Fig. 1g illustrates the insert member 1 according to a seventh embodiment of the invention. The body 3 has the form of a hollow tube,

having ring-like cross sectional form. Accordingly, in the centre of the insert member 1 is an empty and hollow space, which will be filled with the material to be ground in the grinding process. A plurality of circular cores 2 are inserted into the ring-like body 3. The cores 2 have parallel longitudinal axes.

5 In Fig. 1h, the insert member 1 according to an eighth embodiment of the invention is illustrated. The insert member 1 has a circular cross section and plurality of circular cores 2 inserted into the body 3. The cores 2 are parallel and they are of the same size, i.e. their cross sectional areas are the same. However, it is not necessary in the embodiments employing a plurality  
10 of cores in one single body that all the cores are of same size. They may differ from each other and have different lengths, cross sectional forms and/or cross sectional areas. Also, the cores may be made of different materials. This improves the possibility to tailor the insert member properties for different materials to be ground and/or for different locations on the grinding roll  
15 surface.

Fig. 1i illustrates the insert member 1 according to a ninth embodiment of the invention. The insert member 1 has a circular cross section. A circular core 2 is inserted into the centre of a circular body 3 so that the longitudinal axes of the core 2 and body 3 are parallel and overlapping each other. The  
20 insert member 1 comprises also an intermediate layer arranged between the core 2 and the body 3. The intermediate layer may improve the mechanical properties of the insert member 1 or it may improve the attachment of the core 2 to the body 3. The insert member 1 comprises also a coating on the outer surface of the body 3. The coating may also improve the mechanical  
25 properties of the insert member 1 or the attachment of the insert member 1 to the grinding roll. The intermediate layer and the coating may be of the same or different material.

In Fig. 1j, the insert member 1 according to a tenth embodiment of the invention is illustrated. The insert member 1 has a body 3 in form of a hollow  
30 tube, having ring-like cross sectional form. The core 2 is arranged on the inner surface of the body 3, and the core 2 is thus also in form of a hollow tube with a ring-like cross sectional form. In the centre of the insert member 1 is an empty and hollow space, defined by the core material.

Fig 1k illustrates the insert member 1 according to an eleventh embodiment of the invention. The core 2 is cylindrical and substantially extends in the diagonal direction of the insert member 1 when standing up. The geometric axis of the core 2 is thus angled with respect to the geometric axis of the insert member 1. The angle of the geometric axis of the core in relation to the geometric axis of the insert member may naturally be varied. The body 3 of the insert member 1 completely encloses the core 2. However, the core 2 may be exposed at the top and the bottom of the insert member 1. Also, different sizes and shapes of the core 2 are naturally possible. When crushing material using grinding rolls having insert members, it is likely that the material to be crushed hits the insert members diagonally from the top of the insert member. By orienting the core 2 of the insert member 1 in different angles in relation to the insert member 1, the wear-resistance of the insert member 1 may be especially enhanced in the directions of the insert member 1 believed to be heavily exposed to wear. Naturally, different sizes and shapes of the insert member 1 are also possible.

Fig. 1l illustrates the insert member 1 according to a twelfth embodiment of the invention. The cross-section of the insert member 1 and the core 2 is quadratic. The core 2 extends in the longitudinal direction of the insert member 1. The geometric axis of the core 2 is aligned with the geometric axis of the insert member 1. The body 3 of the insert member 1 completely encloses the core 2.

In Fig. 2, a cassette 5 for a grinding roll 6 is illustrated. The cassette 5 comprises a plurality of insert members 1. The cassettes 5 are to be attached to the envelope surface of the grinding roll 6, thereby facilitating both mounting and possible replacement or service of the insert members 1. The outer surface 7 of the cassettes 5 surrounding the insert members 1 may be coated or treated, for example carburized, in order to be more resistant to wear.

Fig. 3 illustrates a segment 8 for a grinding roll 6 for heavy wear operation. The segment 8 comprises a plurality of insert members 1. The segments 8 are to be attached to the envelope surface of the grinding roll 6, thereby facilitating both mounting and possible replacement or serving of the

insert members 1. The outer surface 9 of the segments 8 surrounding the insert members 1 may be coated or treated, for example carburized, in order to be more resistant to wear.

In Fig. 4, a grinding roll 6 for heavy wear operation is illustrated. The grinding roll 8 comprises a plurality of insert members 1. The insert members are to be attached to the envelope surface of the grinding roll 6. The attachment of the insert members 1 to the envelope surface of the grinding roll 5 can be made in many different ways. For example, cassettes 4 or segments 8 as described above may be used in order to facilitate the mounting of the insert members 1. Another possibility is the use of a binding ring. The outer surface 10 of the roll 5 (or the cassettes, segments, binding ring etc.) surrounding the insert members 1 may be coated or treated, for example carburized, in order to be more resistant to wear.

The insert members may be fastened in the envelope surface of the grinding roll, or in a cassette or a segment, by a number of different techniques. Thus, the individual insert element may for example be fastened by means of shrink fit, welding, gluing, clamping, wedging or a screw joint.

Fig. 5 illustrates a roll machine 11 for comminuting a bed of material. The roll machine 11 comprises two grinding rolls 6. During use, the insert members 1 attached the grinding rolls 6 of the roll machine 11 will be subjected to wear. When the insert member 1 is subjected to wear, the ductile but tough body 3 will be worn off rather quickly on the top of the insert member 1 thereby exposing the core 2. Accordingly, the top of the insert member 1 being subjected to wear will be constituted by a hard and wear resistant core 2 enclosed in a radial direction by a more tough but ductile body 3. Since surface of the body 3 being subjected to wear is so much smaller than the surface of the core 2 being subjected to wear, the body 3 and the core 2 will wear off in a approximately the same pace. This leads to a longer life time of the insert members 1 and thus of the grinding rolls 6.

In order to even further prolong the life time of the grinding rolls 6, they may be provided with a wear resistant layer on the envelope surface covering the spaces created on the grinding rolls 6 between the insert members 1. The wear resistant layer reduces the wear caused below the autogenous layer

created between the insert members 1 and also protects the surface from wear in the case of failure of the insert members 1. The wear resistant layer may for example be made of a tool steel material.

In Fig. 6, the insert member 1 according to a ninth embodiment is  
5 illustrated. In this embodiment, the first and the second material is of the same material type. That is to say, that the entire insert member 1 is made of one material type. Thus, both materials may contain grains of a single, specific material type, but the grain size may be varied in the two materials. The body 3 may thus be formed by a first material comprising grains which  
10 are bigger than the grains of a second material forming the core 2 in order to obtain the same effect as for the other embodiments of the insert member 1. Thus, the hardness of the core 2 is greater than the hardness of the body 3 and the toughness of the core 2 is smaller than the toughness of the body 3. The core 2 is cylindrical and extends in the longitudinal direction of the insert  
15 member 1. The geometric axis of the core 2 is aligned with the geometric axis of the insert member 1. The body 3 of the insert member 1 completely encloses the core 2.

In use, two grinding rolls are arranged essentially parallel to each other with a gap between them. Material to be crushed is fed into the gap, generally  
20 choke fed, but possibly by gravity only, and crushed between the grinding rolls. In interparticle crushing, only part of the crushing work is performed by the crushing surface of the grinding rolls and part of the crushing takes place in the material bed formed between the grinding rolls as particles in the material bed grind against each other. The spaces between the insert  
25 members will fill with crushed material, thereby creating a protective wear resistant layer. Thus, the wear on the actual envelope surface is reduced, prolonging the working life of the grinding roll.

The first material of the core and the second material of the body may have same chemical composition, i.e. they may be chemically the same, but  
30 they are different in their physical properties, such as Vickers hardness and/or fracture toughness. The difference in the physical properties may be achieved by different treatment of the first and second material, e.g. by hardening.

The body may be made of a material having a Vickers hardness value in the range of 400 – 1200 HV, and the core may be made of a material having a Vickers hardness value of at least 600 – 1200 HV. According to one embodiment of the invention the body has a Vickers hardness of at least 600 HV, and the core has a Vickers hardness of at least 1000 HV. Preferably, the body has a Vickers hardness of at least 1000 HV, whereby the core has a Vickers hardness of at least 1200 HV. The hardness of the core is always higher than the hardness of the body, thus providing the improved wear resistance and fracture toughness properties during grinding of hard and abrasive mineral materials.

The first material, which is used for making the core, has typically a fracture toughness, which is lower than the fracture toughness of the second material. The fracture toughness on the first material is typically  $< 18 \text{ MN/m}^{3/2}$ , often in the range of  $10 - 18 \text{ MN/m}^{3/2}$ , more typically in the range of  $11 - 16 \text{ MN/m}^{3/2}$ , preferably in the range of  $12 - 14 \text{ MN/m}^{3/2}$ . Usually, the wear resistance of the first material is higher than the wear resistance of the second material. The first material may be a composite of metal and ceramic, so called Cermet or hardmetal, where the metal functions as a binder. Typical binder may be, for example, cobalt, and the binder content may be 0 – 20 weight-%. Other metals that may be used as binder are cobalt based alloys, nickel and nickel based alloys, titanium and titanium based alloys, iron based alloys as well as molybdenum and molybdenum based alloys. The ceramic material may be any suitable carbide material, such as tungsten carbide (WC), titanium carbide (TiC), vanadium carbide (VC), chromium carbide (CrC), tantalum carbide (TaC), a mixture of two or more carbides, or a mixture of two or more ceramic materials. The first material may also be a metal oxide, such as partially stabilised zirconium oxide or aluminium oxide, or a metal nitride or a metal boride. The first material may also be a ceramic carbide material.

According to one embodiment of the invention the second material, which is used for making the body, has a fracture toughness of at least  $14 \text{ MN/m}^{3/2}$ , typically in the range of  $15 - 30 \text{ MN/m}^{3/2}$ , more typically in the range of  $16 - 25 \text{ MN/m}^{3/2}$ , more preferably in the range of  $18 - 25 \text{ MN/m}^{3/2}$ . The second material may be a composite of metal and ceramic, so called Cermet

or hard metal, in which composite the metal functions as a binder. Typical metal binder may be, for example, cobalt, and the binder content may be 10 – 25 weight-%. Other metals that may be used as binder are cobalt based alloys, nickel and nickel based alloys, titanium and titanium based alloys, iron based alloys as well as molybdenum and molybdenum based alloys. The ceramic material may be any suitable carbide material, such as tungsten carbide (WC), titanium carbide (TiC), vanadium carbide (VC), chromium carbide (CrC), tantalum carbide (TaC), a mixture of two or more carbides, or a mixture of two or more ceramic materials. The second material may also be a metal oxide, such as partially stabilised zirconium oxide or aluminium oxide, or a metal nitride or a metal boride. The second material may also be industrial diamond or tool steel, preferably tool steel. Tool steel is here understood as iron based material, which comprises a carbide, such as chromium carbide, vanadium carbide, niobium carbide, tungsten carbide or any combination thereof. Examples of tool steel types are carburizing steel, tempering steel, high speed steel, spray-formed steel or cast iron. Typically the Vickers hardness of tool steel is at least 400 HV, more typically at least 500 HV, more preferably at least 600 HV. The amount of carbide in the tool steel is at least 5 volume-%, typically over 10 volume-%, preferably over 20 volume-%.

According to one preferred embodiment of the present invention the body is made a material which is a Cermet or a hard metal, while the core is made a material which is also a Cermet or a hard metal. According to another preferred embodiment of the present invention the body is made of a material which is tool steel, while the core is made of a material which is a Cermet or a hard metal.

According to another preferred embodiment of the invention the hardness of the body varies throughout the body. The hardness may for example increase continuously from the outer surface of the body to the centre of the body, independent of the core inserted in the body.

The core may also be made of a plurality of individual core parts. For example, the core may comprise a number of cylindrical parts, which have been arranged into the body one after another. In this manner, the core is not

continuous, but the core comprises a number of discontinuities where the one core part ends and the second core part starts. The ends of the individual core parts may be in contact with each other or there may be material between them. The discontinuity points of the core make the core more resistant for fracture, but the core still retains its wear improving properties. The core may comprise 2 – 4 individual core parts.

The cross sectional form of the core may be circular, elongated, triangular, quadrangular, parallelogram, polygon or irregular. The cross sectional form and area of the core is normally constant over the whole core length. In certain embodiments, however, it is possible that the diameter and the cross sectional area decrease from the first end towards the second end of the core, whereby the core has a shape of a truncated cone. It is also possible that the core is T-shaped.

Typically the length of the insert member is 25 – 100 mm, typically 30 – 80 mm, more typically 30 – 60 mm, and the total diameter of the insert member is in the range of 10 – 60 mm. The diameter of the core is typically 2 – 50 mm. It is also possible that the body comprises a plurality of parallel cores. One single body may comprise, for example 2 – 6, typically 2 – 4 parallel cores. These parallel cores may have a diameter in the range of 5 – 30 mm. When an insert member has a plurality of parallel cores, its mechanical reliability is improved, even if the individual cores are thinner than cores used in an insert member comprising only a single core. Plurality of cores provides the advantage that even if one of the cores would be broken or damaged, the strength of the insert member is still maintained at acceptable level due to the other unbroken cores. Insert members, which have a plurality of cores, may be used for example for protection of grinding roll edges.

The cross section of the insert member may be circular, elongated, triangular, quadrangular, parallelogram, polygon or irregular. It is possible to control the flow of the material to be crushed so that the material is more uniformly distributed in the axial direction of the grinding roll. For example, elongated insert members may be placed in angular relationship with the centre line of the grinding roll, so that the insert members guide material

which is ground towards the ends of the grinding roll away from the centre part of the grinding roll. It is also possible to improve the crushing results by employing inserts with different cross sectional forms at different locations of the grinding roll.

5 It is also possible that the body has a shape of a hollow tube, torus or ring. The cores may be arranged in the tube, torus or ring walls, or the core may form a core layer on the inner wall of the body. During the grinding the hollow space inside the insert member is filled with the material which is ground, thus providing autogenous protection.

10 In one embodiment, the insert member has a plurality of cores, each core having the shape of a sphere.

According to one embodiment of the invention the insert member comprises further a surface layer or coating, which envelopes at least part of the body. The surface layer or coating may be different material than the body or the outer surface of the body may have been treated or processed in a manner that provides it with different characteristics and/or properties than the bulk material of the body. For example, the surface of the body may be carburized. The surface layer or coating may improve the wear resistance of the insert member or it may improve its bonding to the grinding roll. It is also  
15 possible that the core comprises a corresponding surface layer or coating, improving the mechanical properties of the core or its bonding to the body. In case a surface layer or coating is arranged on the outer surface of the core before the core is inserted into the body, it will become an intermediate layer between the core and the body.

25 In one embodiment of the invention it is possible to arrange one or several intermediate layers between the body and the core. The intermediate layer may be material, which is chemically different from materials of both the core and the body. The intermediate layer may also be chemically similar material than the material of the core and/or body, but in that case it differs  
30 from them by its physical properties. The intermediate layers may be arranged one at a time on the surface of the core before it is inserted and attached to the body.

The core and the body can be attached to each other with any suitable method which provides for sufficient strength for the attachment. In case both the body and the core are made of composite of metal and ceramic, Cermet, they are typically sintered together. In case the body is made of tool steel and the core is made of composite of metal and ceramic, Cermet, they are attached together by using an adhesive, press fitting, interference fitting or brazing. A suitable adhesive is epoxy based adhesive, preferably two-component epoxy adhesives. In press fitting the core is pressed into a recess in the body, the recess having slightly smaller diameter than the core. The pattern of the insert members along the grinding roll to which they are attached may be varied in order to adapt each grinding roll to different types of wear.

The grinding roll may have a diameter 0.15 m to 5 m, typically 1.0 – 2.5 m and its length in axial direction may be up to 2.0 m. The grinding roll may be wrought, forged, cast or hot-isostatic pressed steel, and the grinding roll may be expanded by hot forming, e.g., ring rolling. The Vickers hardness of the material of the grinding roll has the same or lower Vickers hardness value than the body. The grinding roll comprises roll ends that extend from the roll edge towards the centre of the grinding roll, and have a length of 10 – 20 % of the total length of the grinding roll. Between these roll ends is located a centre part of the grinding roll, comprising 60 – 80 % of the total length of the grinding roll. Normally the volume flow of the material to be ground is higher in the centre part of the grinding roll than in the roll ends. The circumferential speed of the grinding roll is usually 1 to 2 m/s during the grinding. The grinding roll is used in high pressure grinding unit comprising two counter-rotating rolls which crush the material between them under great hydraulic pressure.

According to one embodiment of the invention the grinding roll is covered by a wear resistant surface layer manufactured by hot isostatic pressing, spray forming, induction hardening, hybrid casting or welding. The surface of the grinding roll may also be surface treated, e.g. by carburized, nitrated or by combinations thereof. By arranging a wear resistant surface layer on the roll surface between the insert members it is possible to reduce the risk of wear underneath an autogenous layer possibly formed during

grinding process. The surface layer also protects the roll surface from catastrophic wear in the case of accidental insert member failure and it also protects the surface in case no autogenous layer is formed during grinding. For example, if one or several insert members are damaged and/or broken off during the grinding the wear resistant layer allows more time for the process operator to notice the insert member failure and to react to it, before the surface of the grinding roll is irrevocably damaged. The grinding roll comprises at least one, preferably a plurality of recesses for the insert members comprising a core and a body surrounding the core. The insert member may be attached to the recess of the grinding roll with adhesive bonding, brazing, shrink fitting, welding, press fitting, interference fitting or mechanical joint. An adhesive that may be used for adhesive bonding is epoxy adhesives, especially two-component epoxy adhesives. In many embodiments the adhesive bonding provides a fast, inexpensive and simple way of bonding the insert members to the grinding roll. It also has lower requirements for the clearance of the insert member and recess dimensions. Adhesive bonding may also provide for changing the damaged and/or worn insert members. For example, an adhesive, which is temperature sensitive may be used, whereby heating of the roll at the location of the insert member leads to decomposing of the adhesive and makes it possible to remove the insert member from the recess and change it for a new insert member.

The depth of a recess in the grinding roll is typically such that the insert member extends out of the roll surface typically 5 – 20 mm, more typically 5 – 15 mm. This makes possible the formation of an autogenous wear protection by crushed material, when the material is capable of being stacked between the insert members. It is also possible that the depth of the recess is such that the end of the insert member is in the same plane with the main roll surface.

It is possible to define an insert member coverage area on the grinding roll. Insert member coverage area denotes here proportion of the additive cross-sectional area of the insert members on a defined surface area of the grinding roll to that defined surface area of the grinding roll, given in %. The insert member coverage area is at least 20 %, typically at least 30 %, and it does not exceed 100 %, and is typically less than 90 %. The insert member

coverage area may vary on or along the roll surface, and it is typically chosen so that an autogenous layer of the material which is ground is formed between the insert members. The insert member coverage area is may also be chosen so that an even wear of the roll surface is obtained. Typically the  
5 the insert member coverage area is higher in the centre part of the grinding roll and lower in the ends of the roll.

According to a second aspect of the invention a cassette for a grinding roll for heavy wear operation is provided, comprising a plurality of insert members according to the features above.

10 According to a third aspect of the invention a segment for a grinding roll for heavy wear operation is provided, comprising a plurality of insert members or cassettes according the features above.

According to a fourth aspect of the invention a grinding roll for heavy wear operation is provided, comprising a plurality of insert members,  
15 cassettes or segments according to the features above.

According to a fifth aspect of the invention a roll machine for comminuting a bed of material is provided, comprising at least one grinding roll according to the features above.

20 According to a sixth aspect of the invention a method for improving the wear resistance of a high pressure grinding roll is provided.

The invention has mainly been described above with reference to a few embodiments. However, as is readily appreciated by a person skilled in the art, other embodiments than the ones disclosed above are equally possible within the scope of the invention, as defined by the appended claims.

25 Accordingly, the size and shape of the insert member, the body and the core according to the present invention may be varied in a vast number of different embodiments without deviating from the scope of the invention.

50842-18

19

CLAIMS:

1. An elongated insert member for a grinding roll for heavy wear operation, the insert member extending along a longitudinal axis, the insert member comprising  
a core of a first material having a first hardness, said core extending in  
5 the longitudinal direction of said insert member and including a first and second axial ends, and  
a body of a second material having a second hardness, said body including first and second ends and enclosing said core in radial direction to protect edges of the core, wherein the first and second axial ends of the core do not extend  
10 past the first and second ends of the body in the longitudinal direction, wherein the first hardness is greater than the second hardness.
2. An elongated insert member according to claim 1, wherein said first material has a first toughness and said second material has a second toughness, and wherein the first toughness is smaller than the second toughness.
- 15 3. An elongated insert member according to claim 1 or 2, wherein said first material is selected from a group comprising metallic material, ceramic material or a combination thereof.
4. An elongated insert member according to any one of claims 1 to 3, wherein said second material is selected from a group comprising metallic material,  
20 ceramic material or a combination thereof.
5. An elongated insert member according to any one of claims 1 to 4, wherein said first material has a hardness from at least 600 to 1200 HV.
6. An elongated insert member according to any one of claims 1 to 5, wherein said second material has a hardness from 400 to 1200 HV.

50842-18

20

7. An elongated insert member according to any one of claims 1 to 6, wherein the cross-section of said insert member is circular.
8. An elongated insert member according to any one of claims 1 to 7, wherein said insert member has the shape of a cylinder.
- 5 9. An elongated insert member according to any one of claims 1 to 8, wherein said core is cylindrical.
10. An elongated insert member according to any one of claims 1 to 9, wherein a geometric center axis of said core is unaligned with the geometric center axis of said insert member.
- 10 11. An elongated insert member according to any one of claims 1 to 10, wherein the first and second axial ends of said core are aligned with the first and second ends of the body in the longitudinal direction.
12. An elongated insert member according to any one of claims 1 to 11, wherein the first end of said core is aligned with the first end of the body and a length  
15 of the core is less than a length of the body in the longitudinal direction.
13. An elongated insert member according to any one of claims 1 to 12, wherein the outer surface of said insert member is profiled and includes a plurality of bulges extending from the outer surface of the insert member.
14. A cassette for a grinding roll for heavy wear operation, comprising a  
20 plurality of insert members according to any one of claims 1 to 13.
15. A segment for a grinding roll for heavy wear operation, comprising a plurality of insert members according to any one of claims 1 to 13 or a plurality of cassettes according to claim 14.

50842-18

21

16. A grinding roll for heavy wear operation, comprising a plurality of insert members according to any one of claims 1 to 13, a plurality of cassettes according to claim 14 or a plurality of segments according to claim 15.

17. A roll machine for comminuting a bed of material, comprising at least  
5 one grinding roll according to claim 16.

18. A method for improving the wear resistance of a high pressure grinding roll, comprising

manufacturing a grinding roll,

arranging at least one recess to the circumference of said grinding roll,

10 manufacturing at least one insert member, and

arranging and attaching said at least one insert member to said at least one recess, wherein the step of manufacturing said at least one insert member comprises

15 arranging a core of a first material having a first hardness in a body of a second material having a second hardness, said core having an extension in a longitudinal direction of said at least one insert member and including first and second axial ends and said body including a first and second ends and enclosing said core in a radial direction to protect edges of the core, wherein the first and second axial ends of the core do not extend past the first and second ends of the  
20 body in the longitudinal direction, wherein the first hardness is greater than the second hardness.

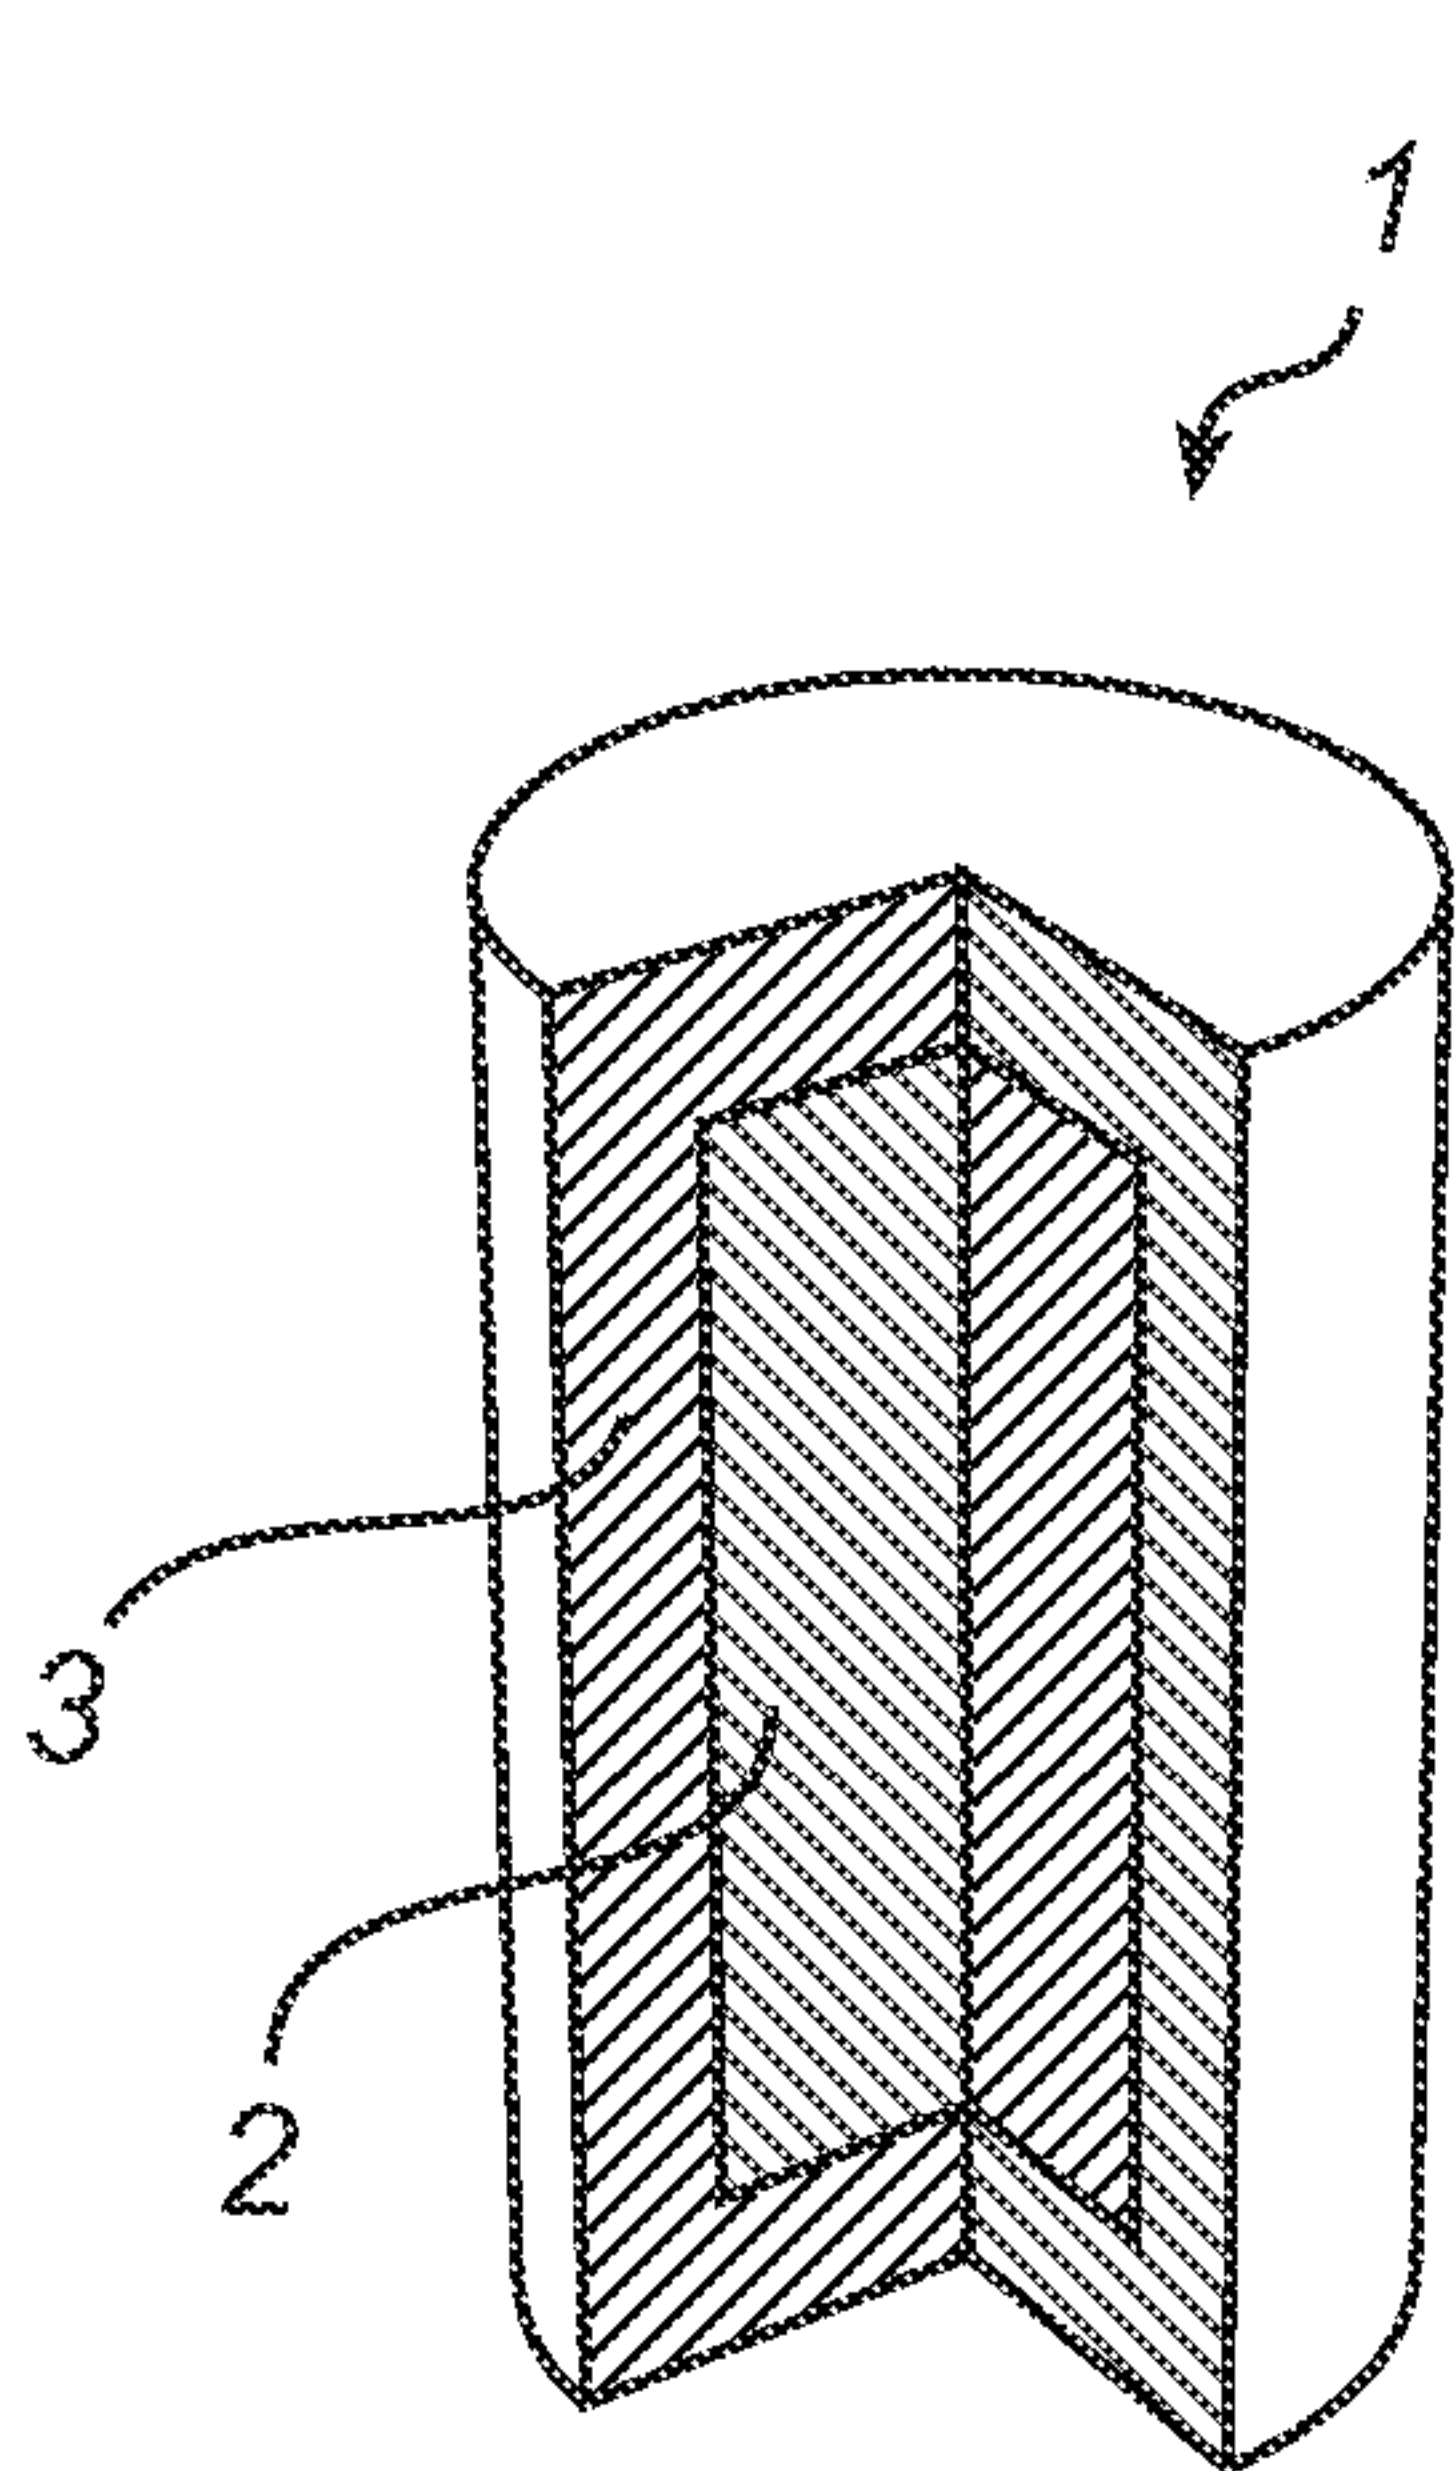


Fig. 1a

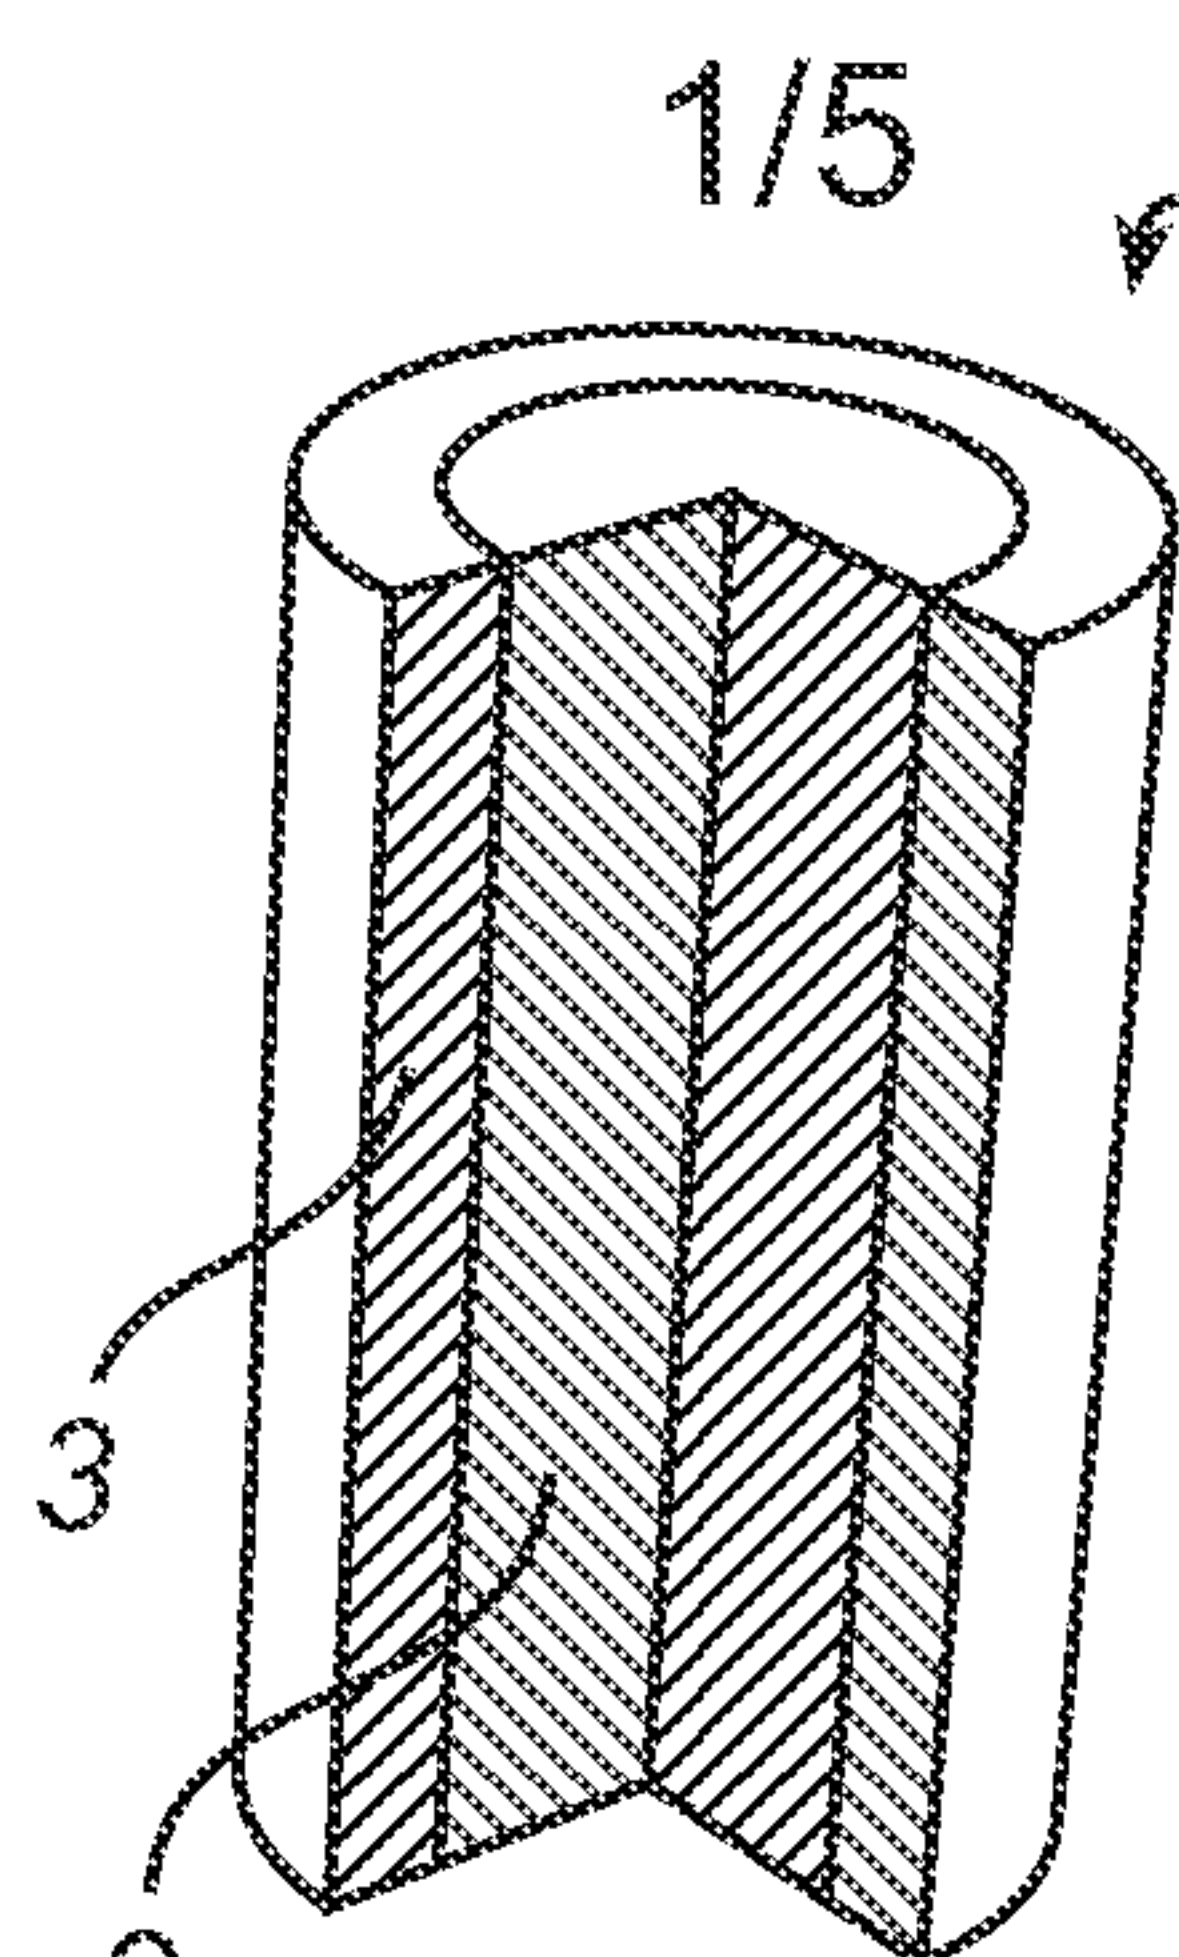


Fig. 1b

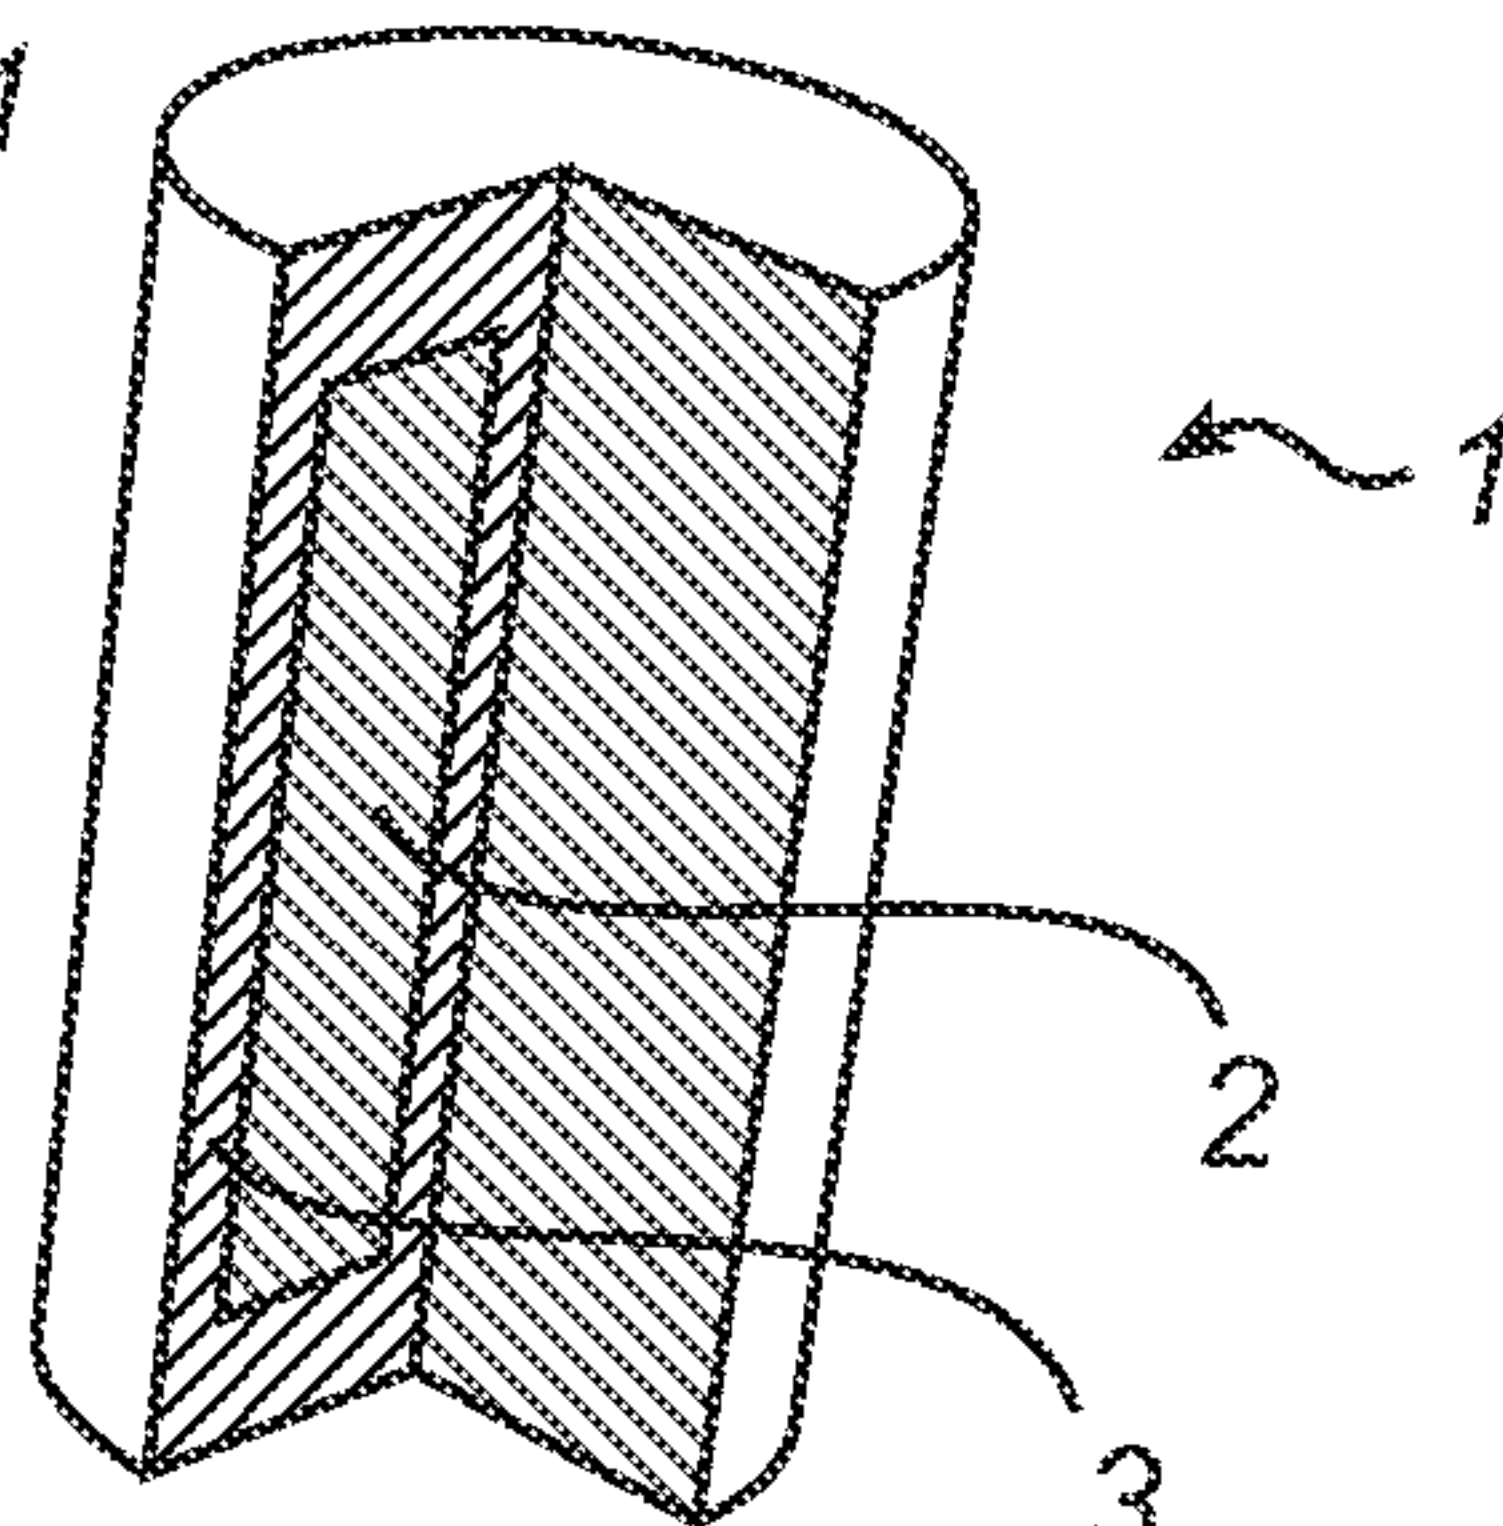


Fig. 1c

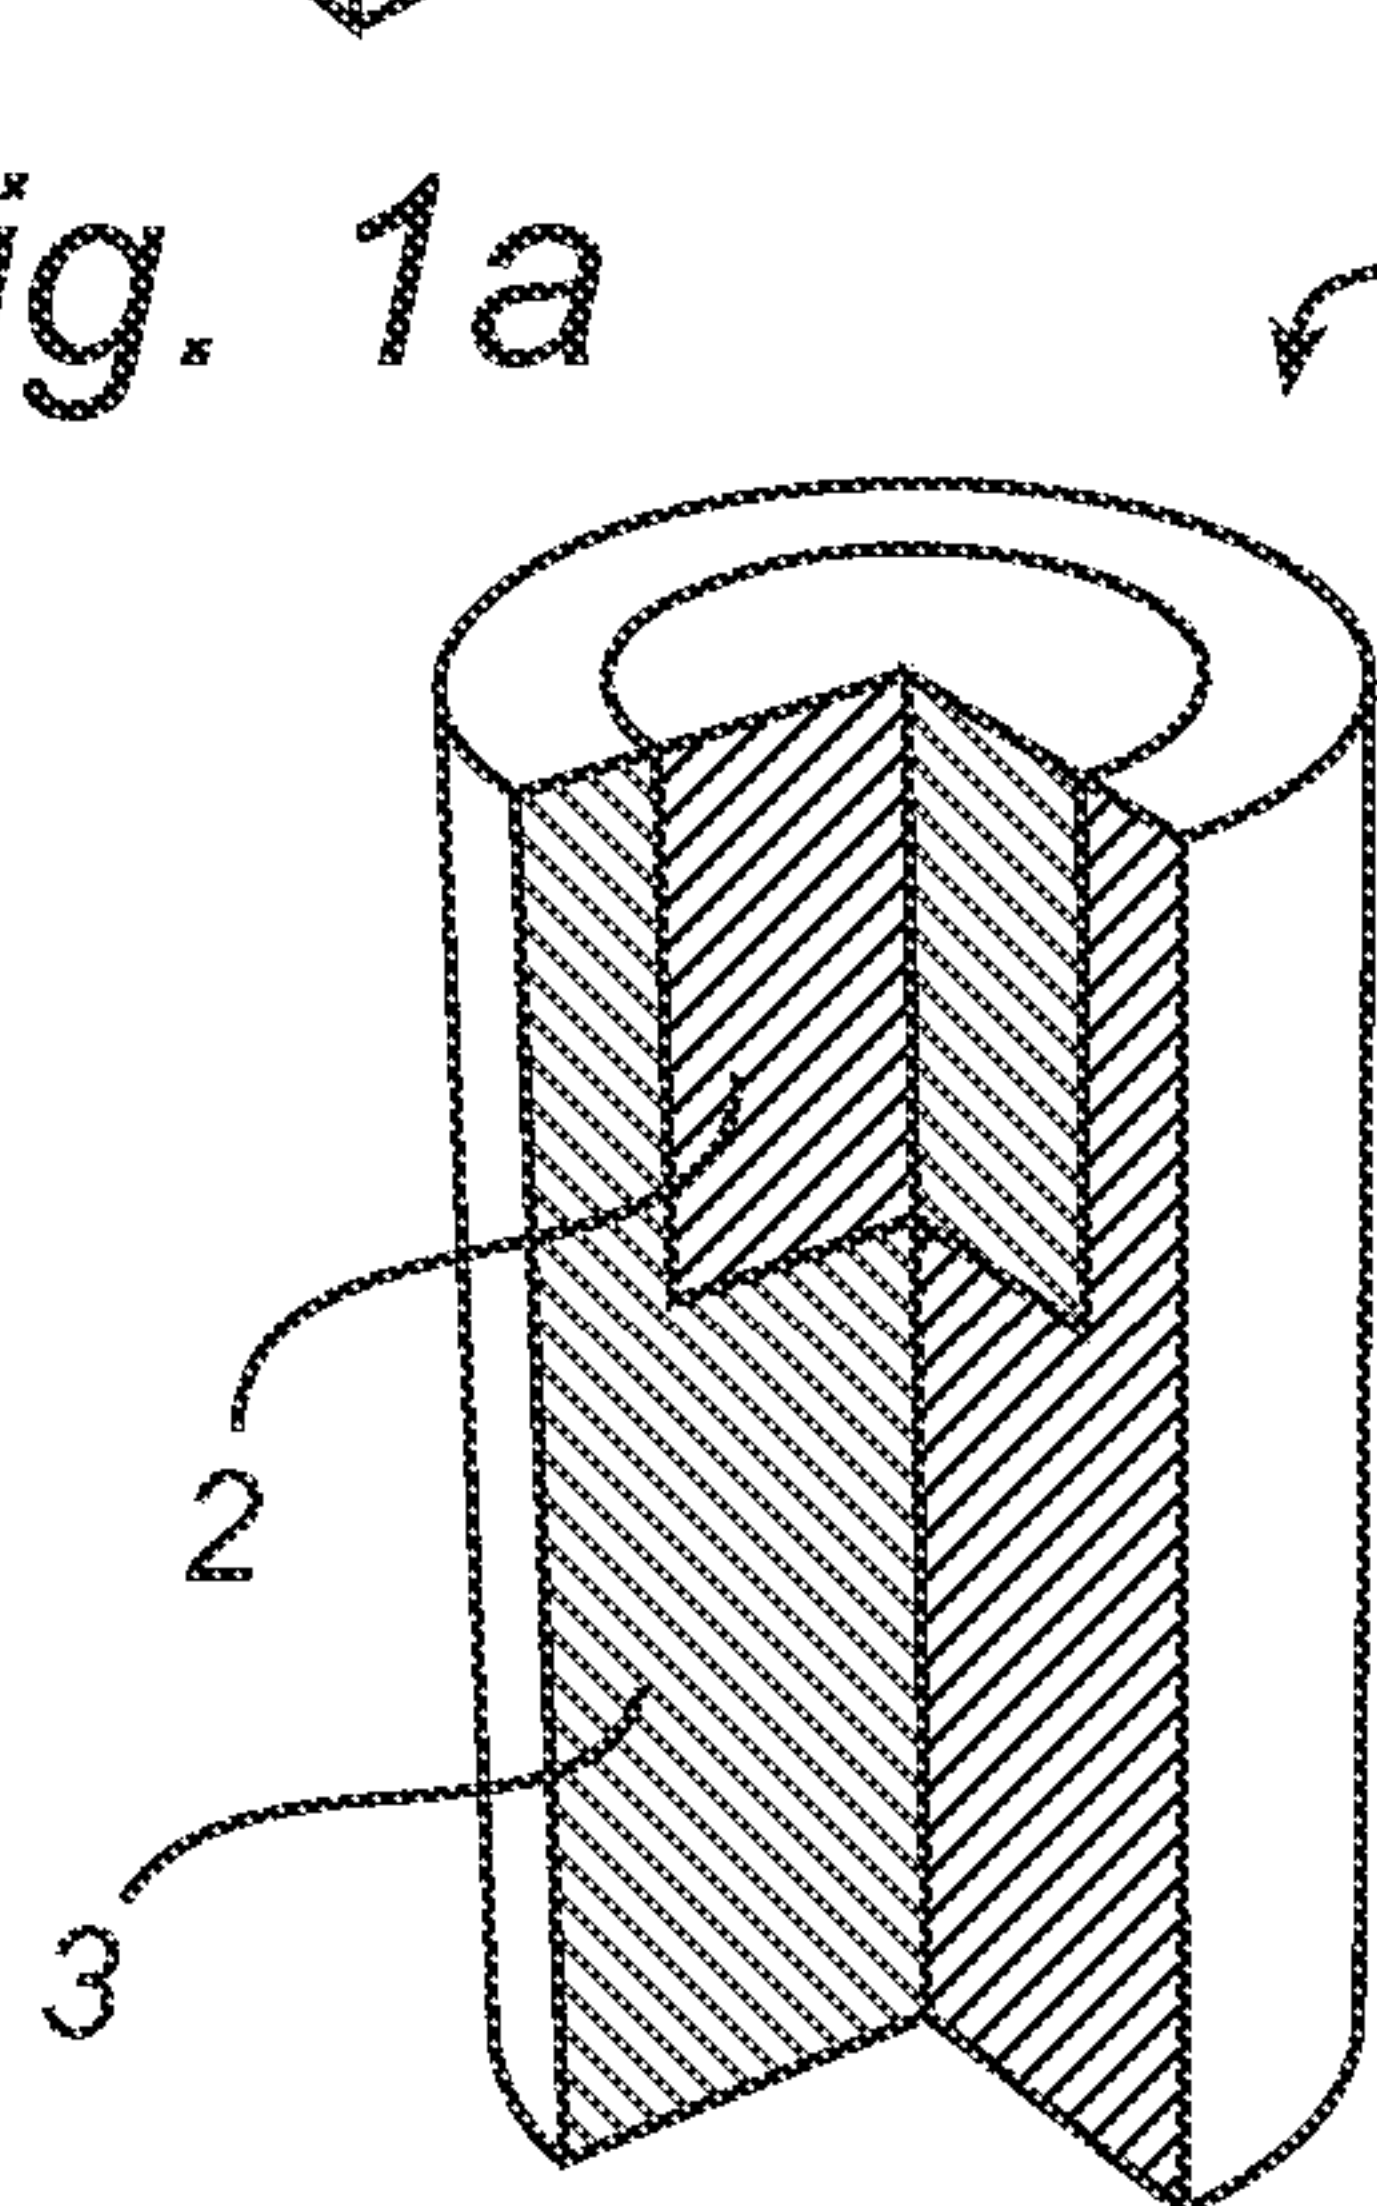


Fig. 1d

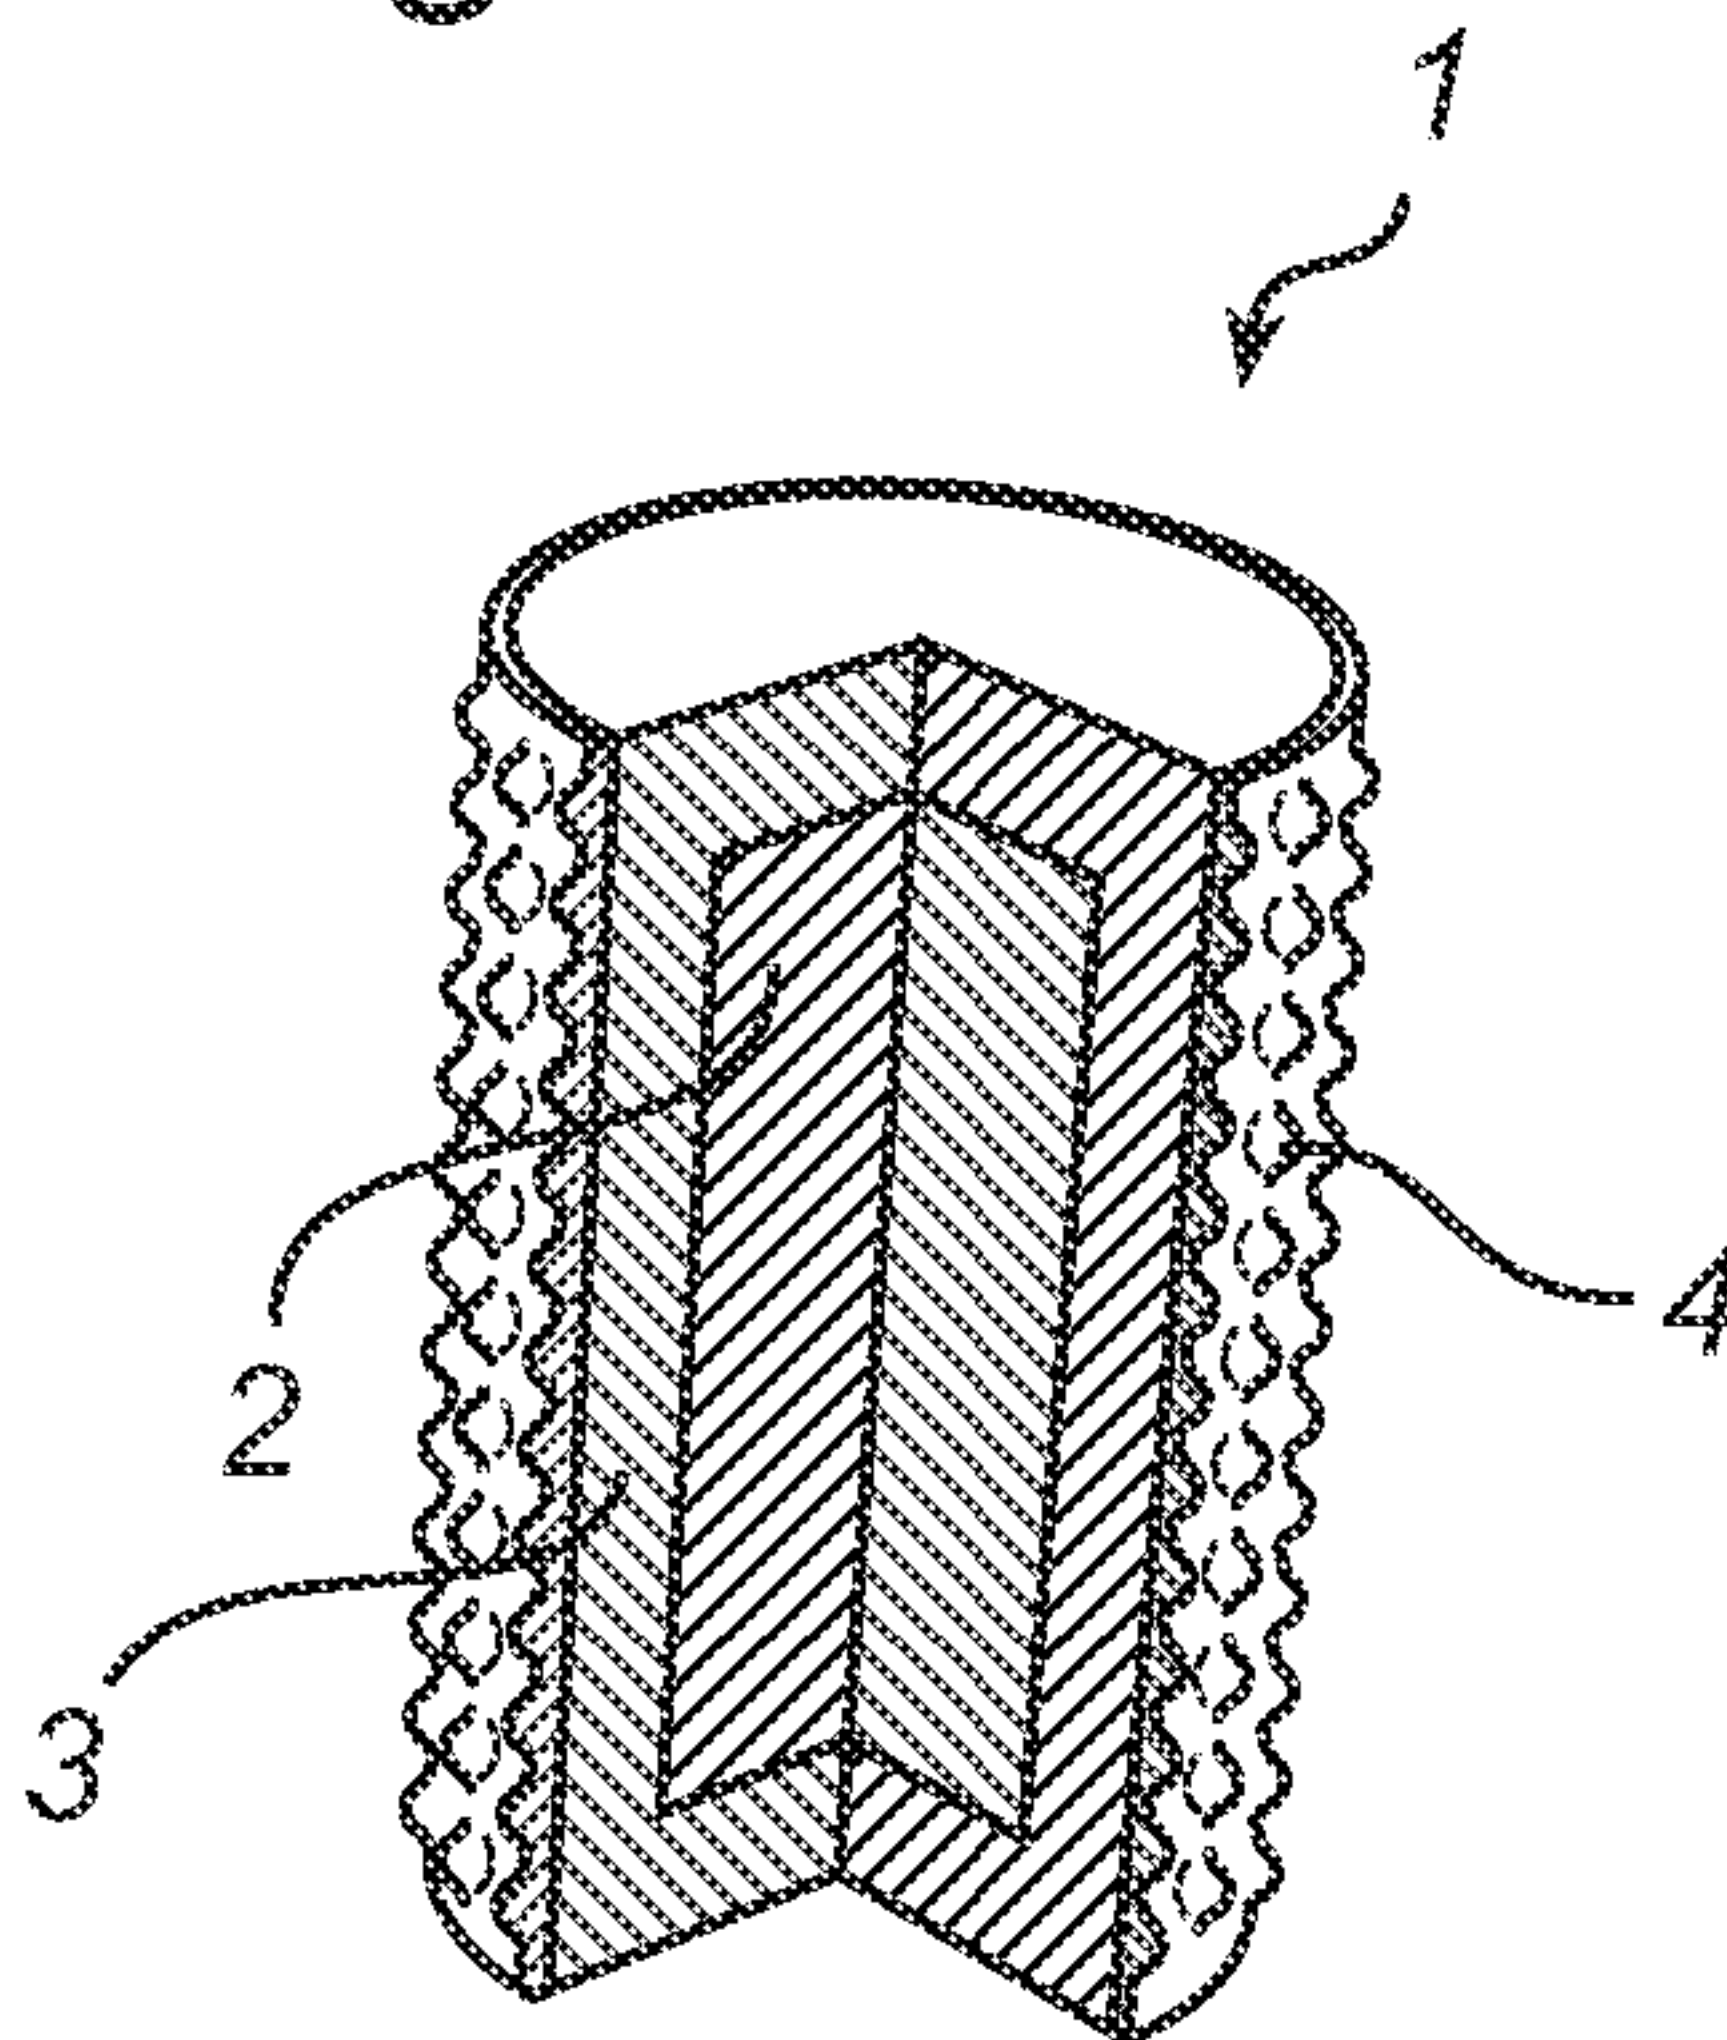


Fig. 1e

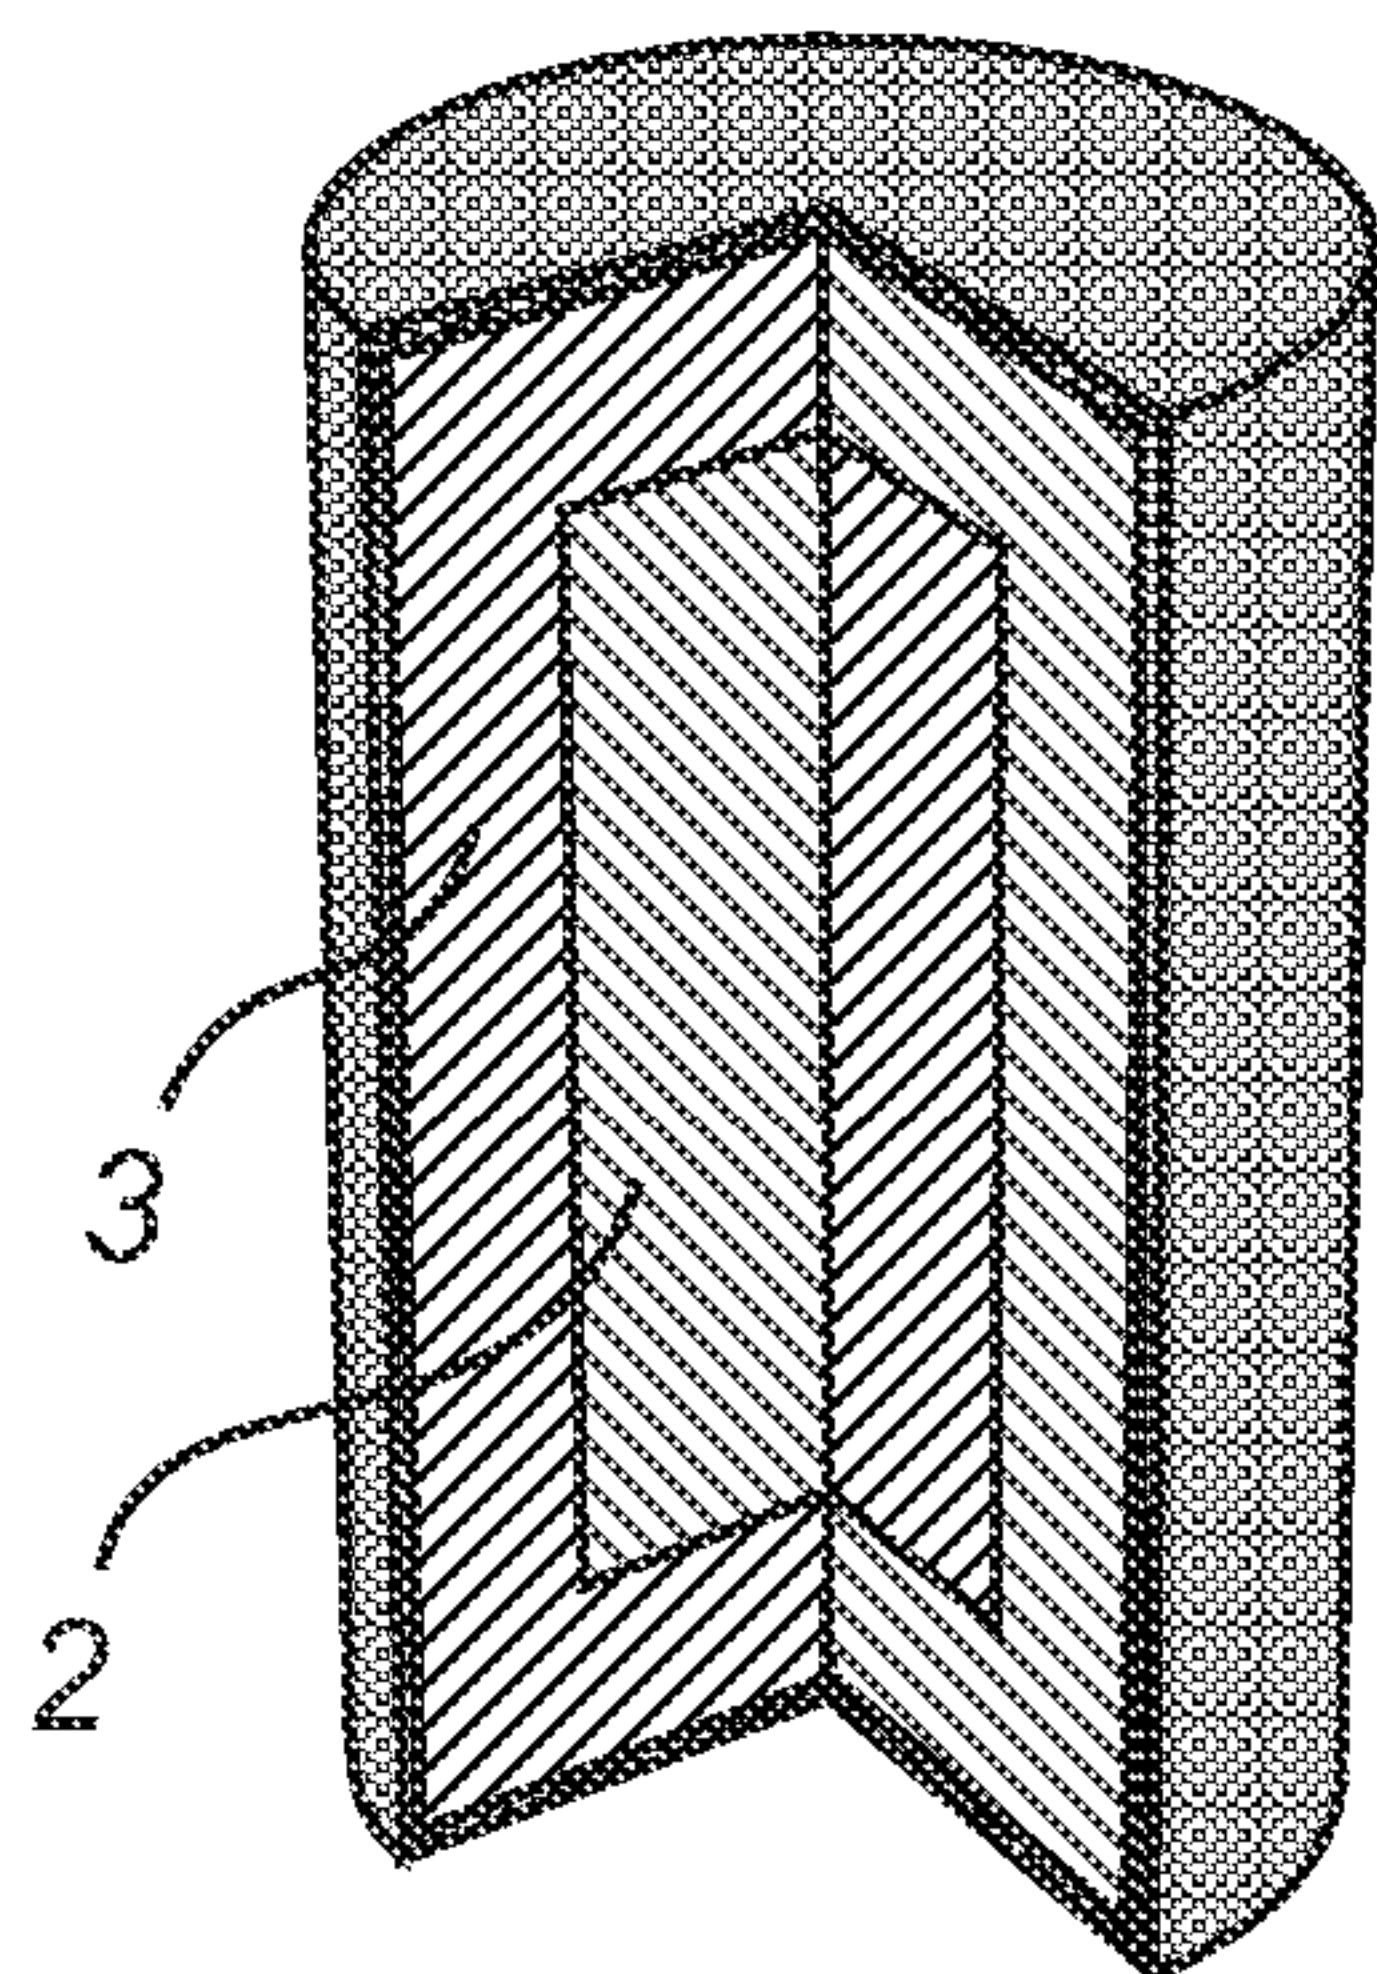


Fig. 1f

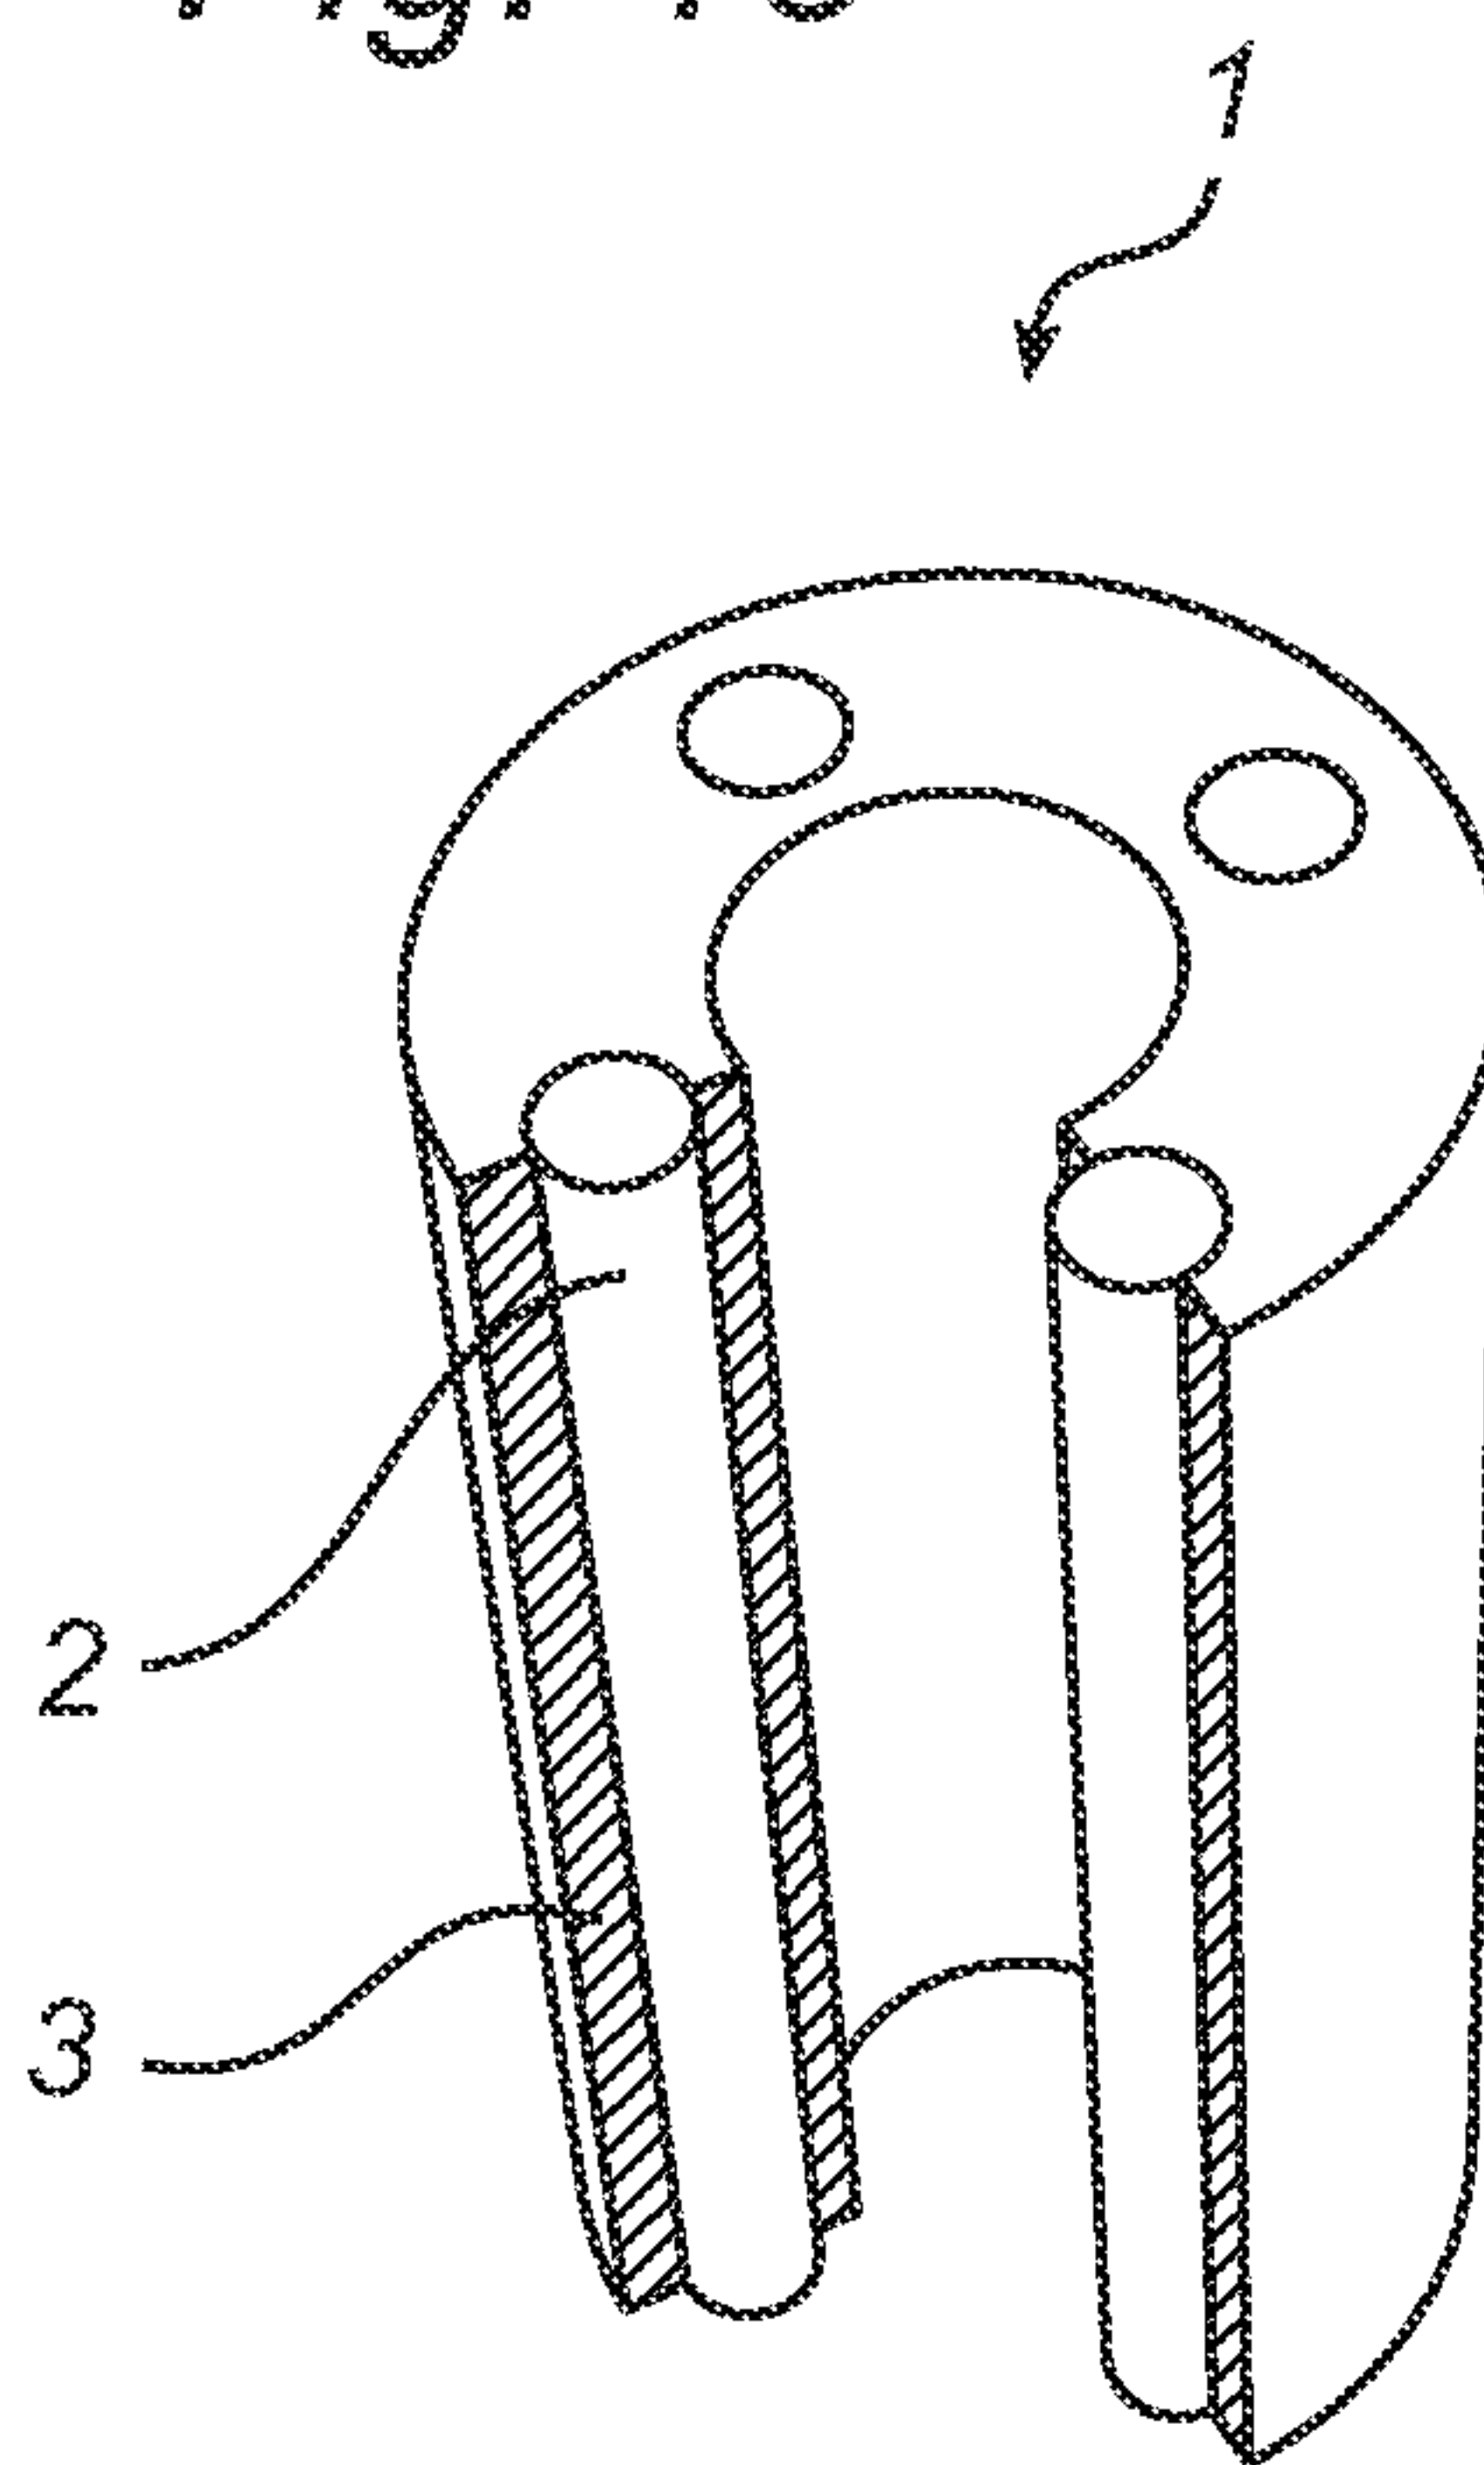


Fig. 1g

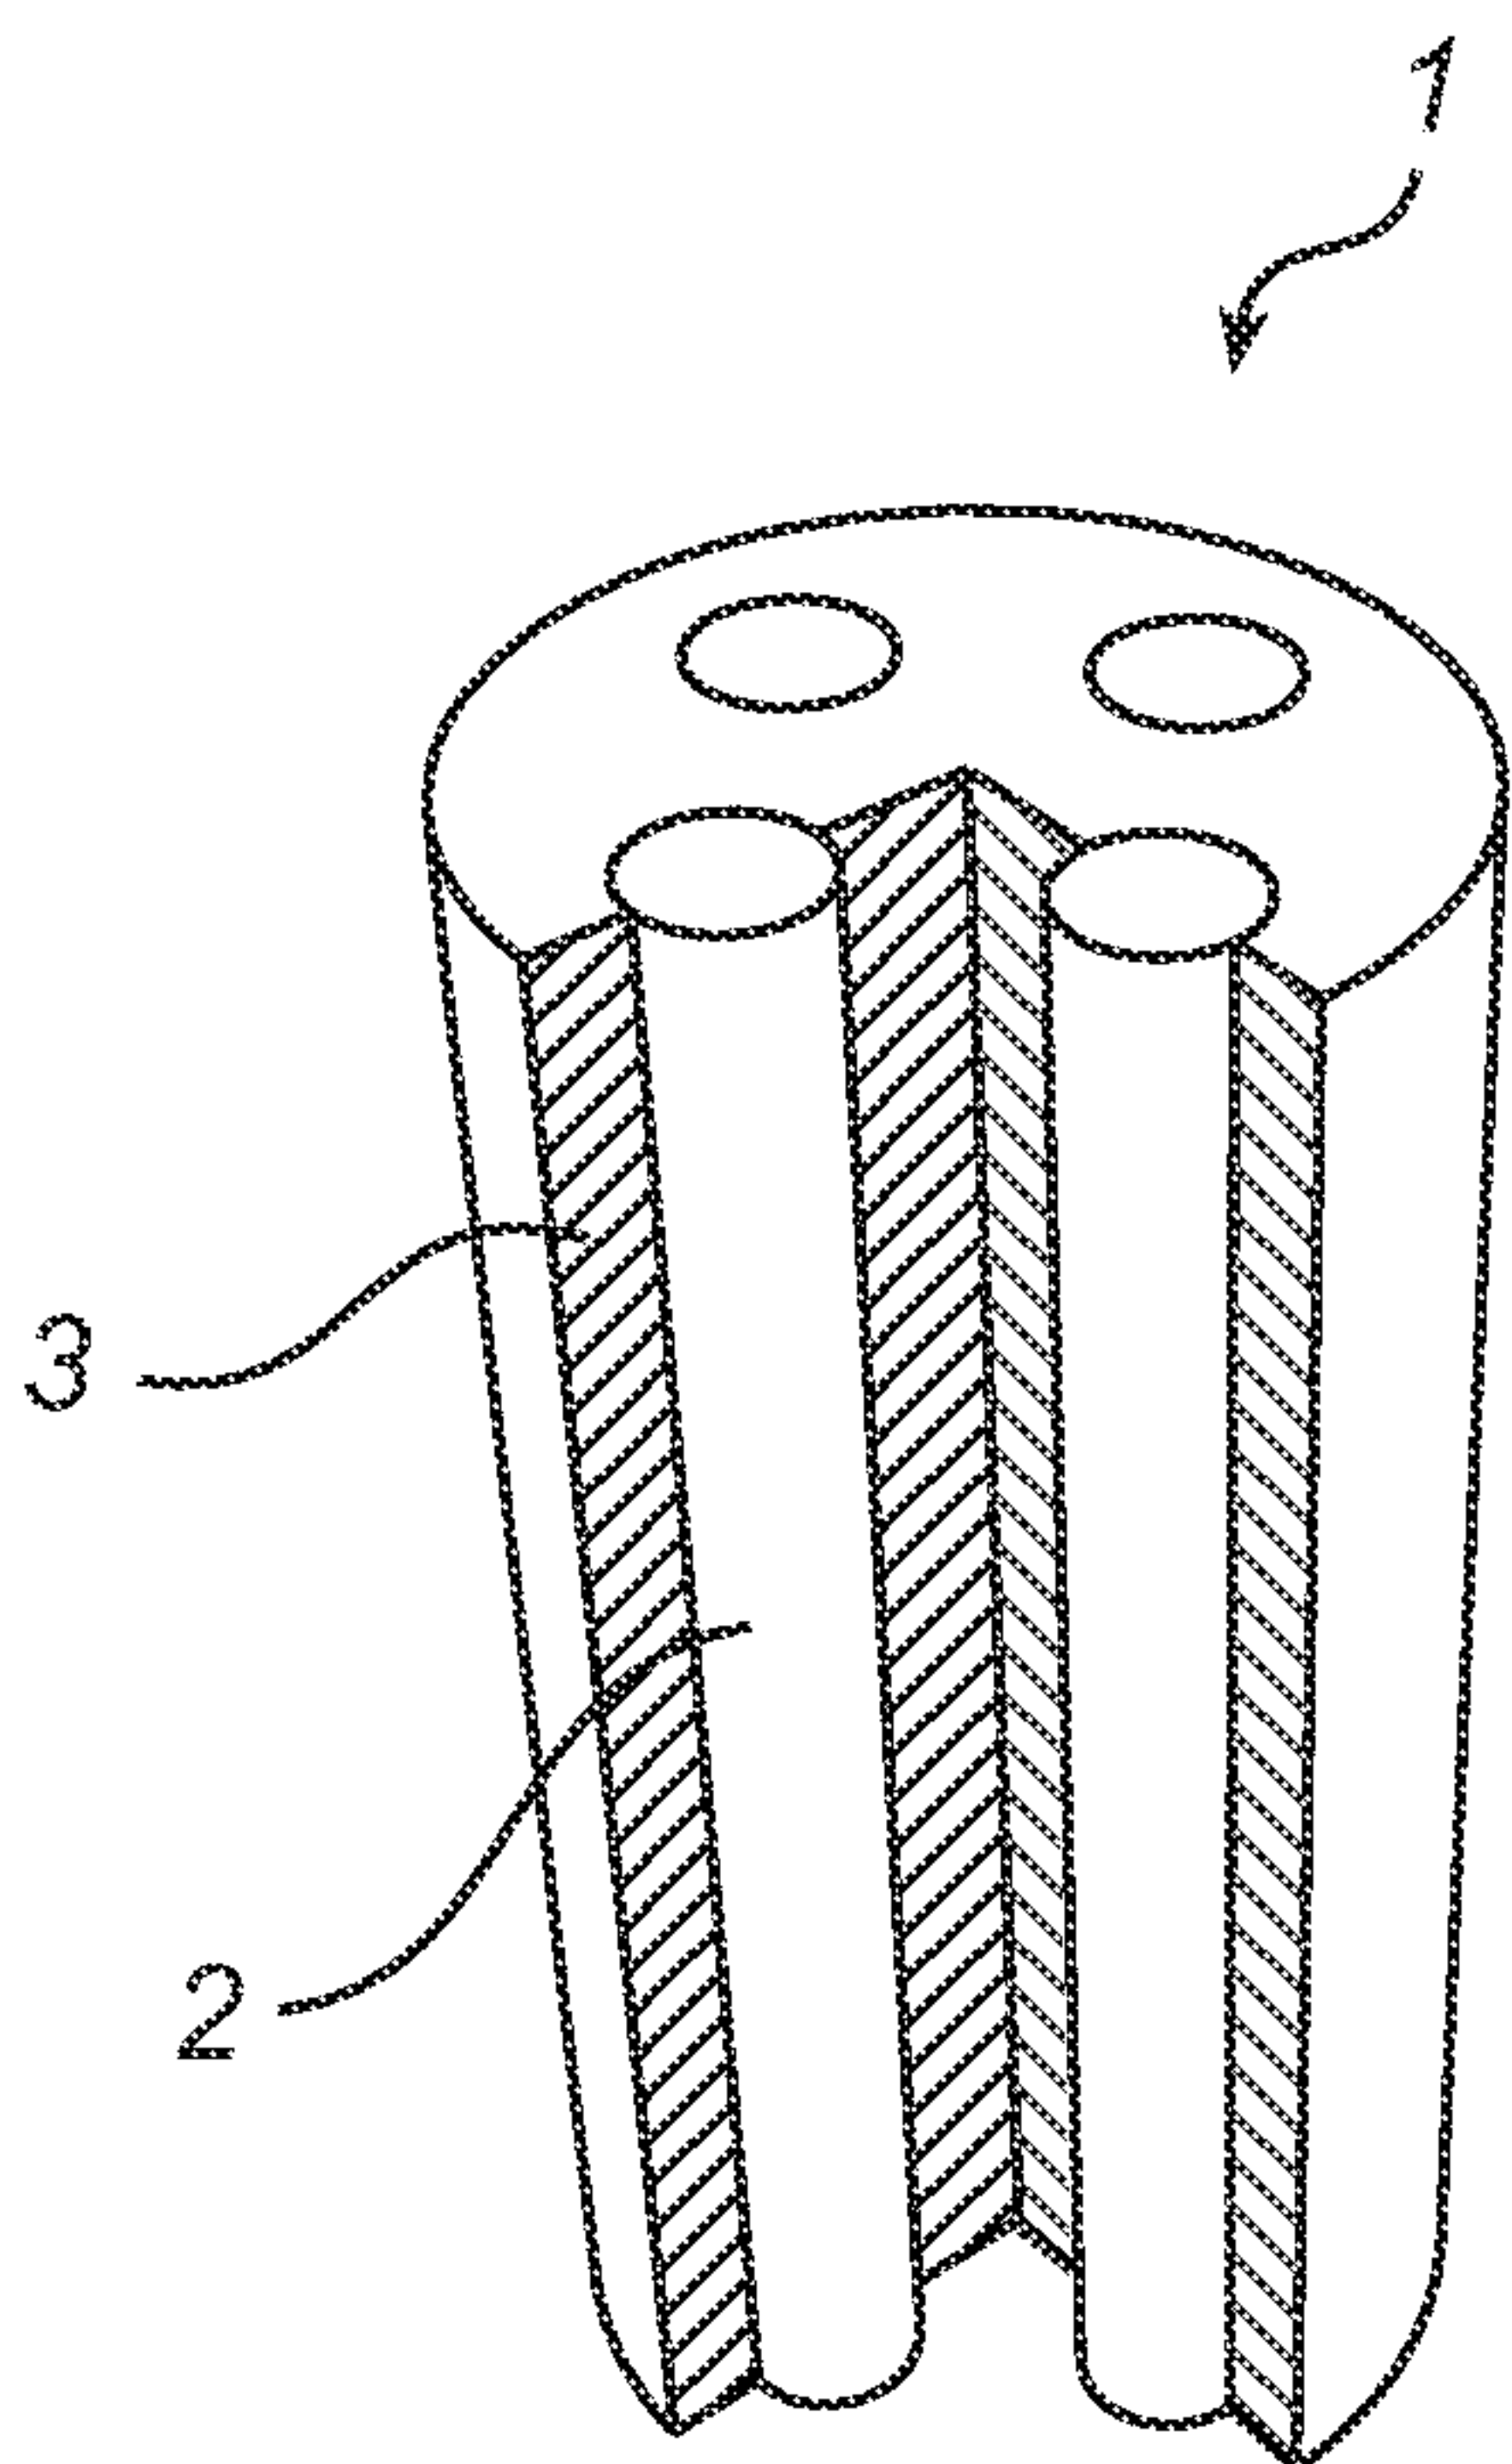


Fig. 1h

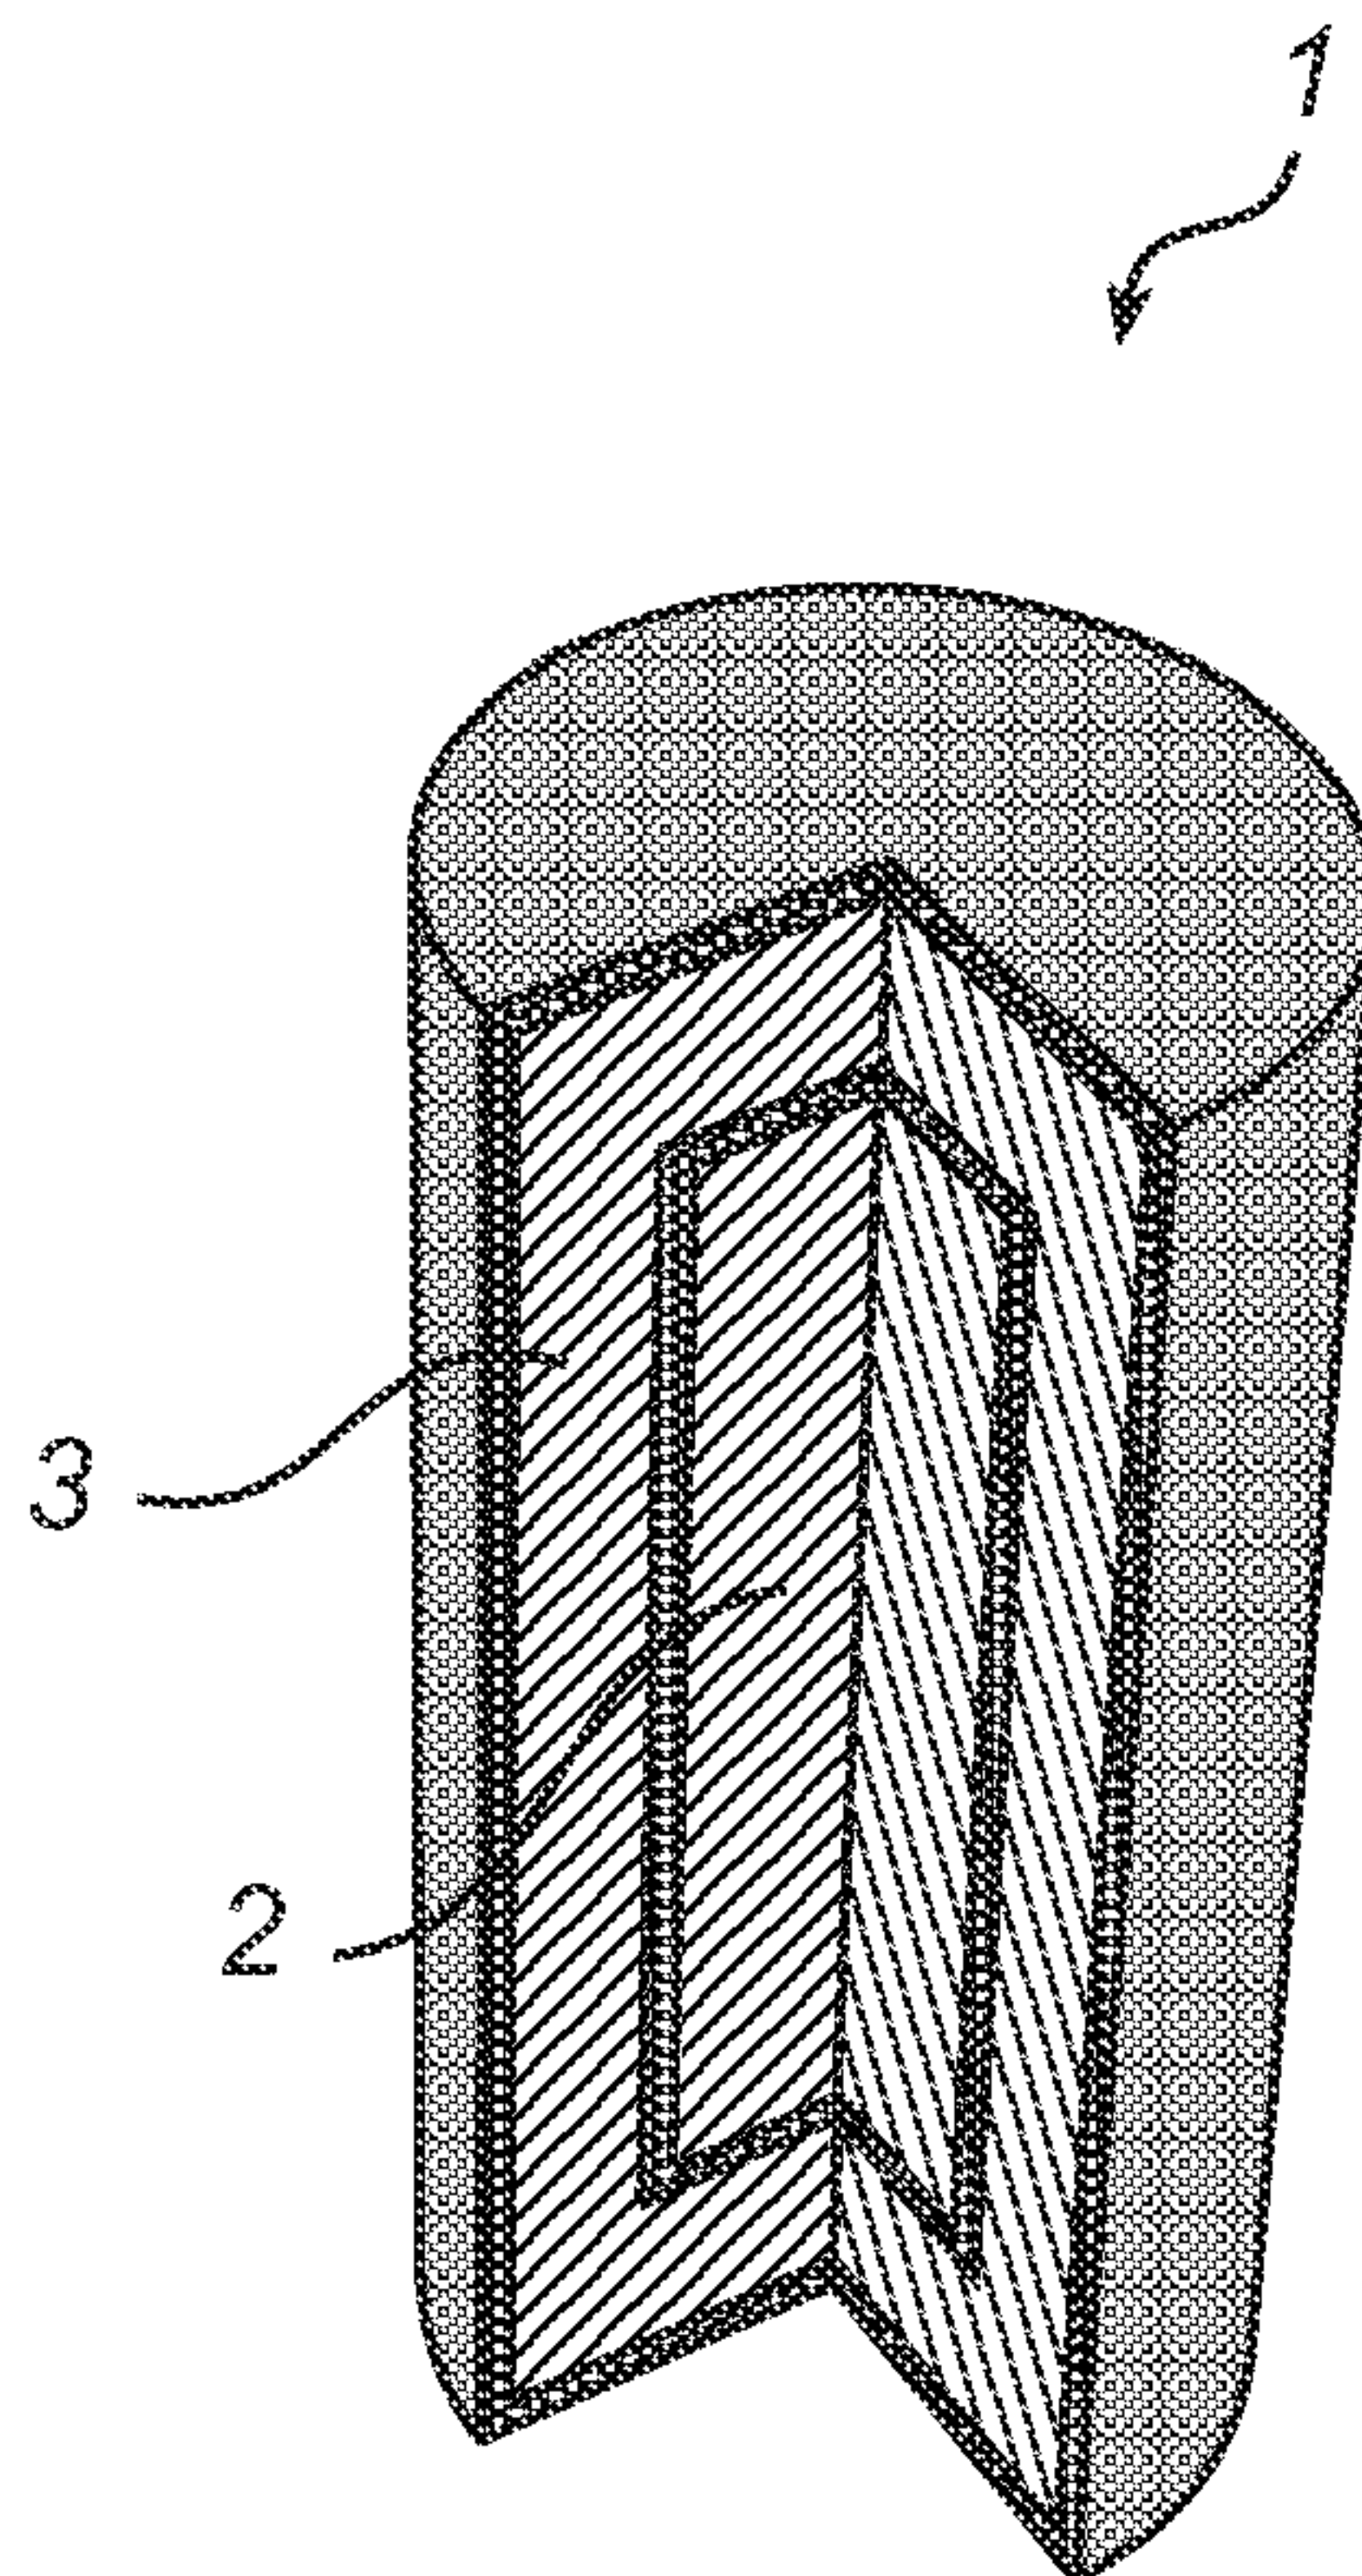


Fig. 1i

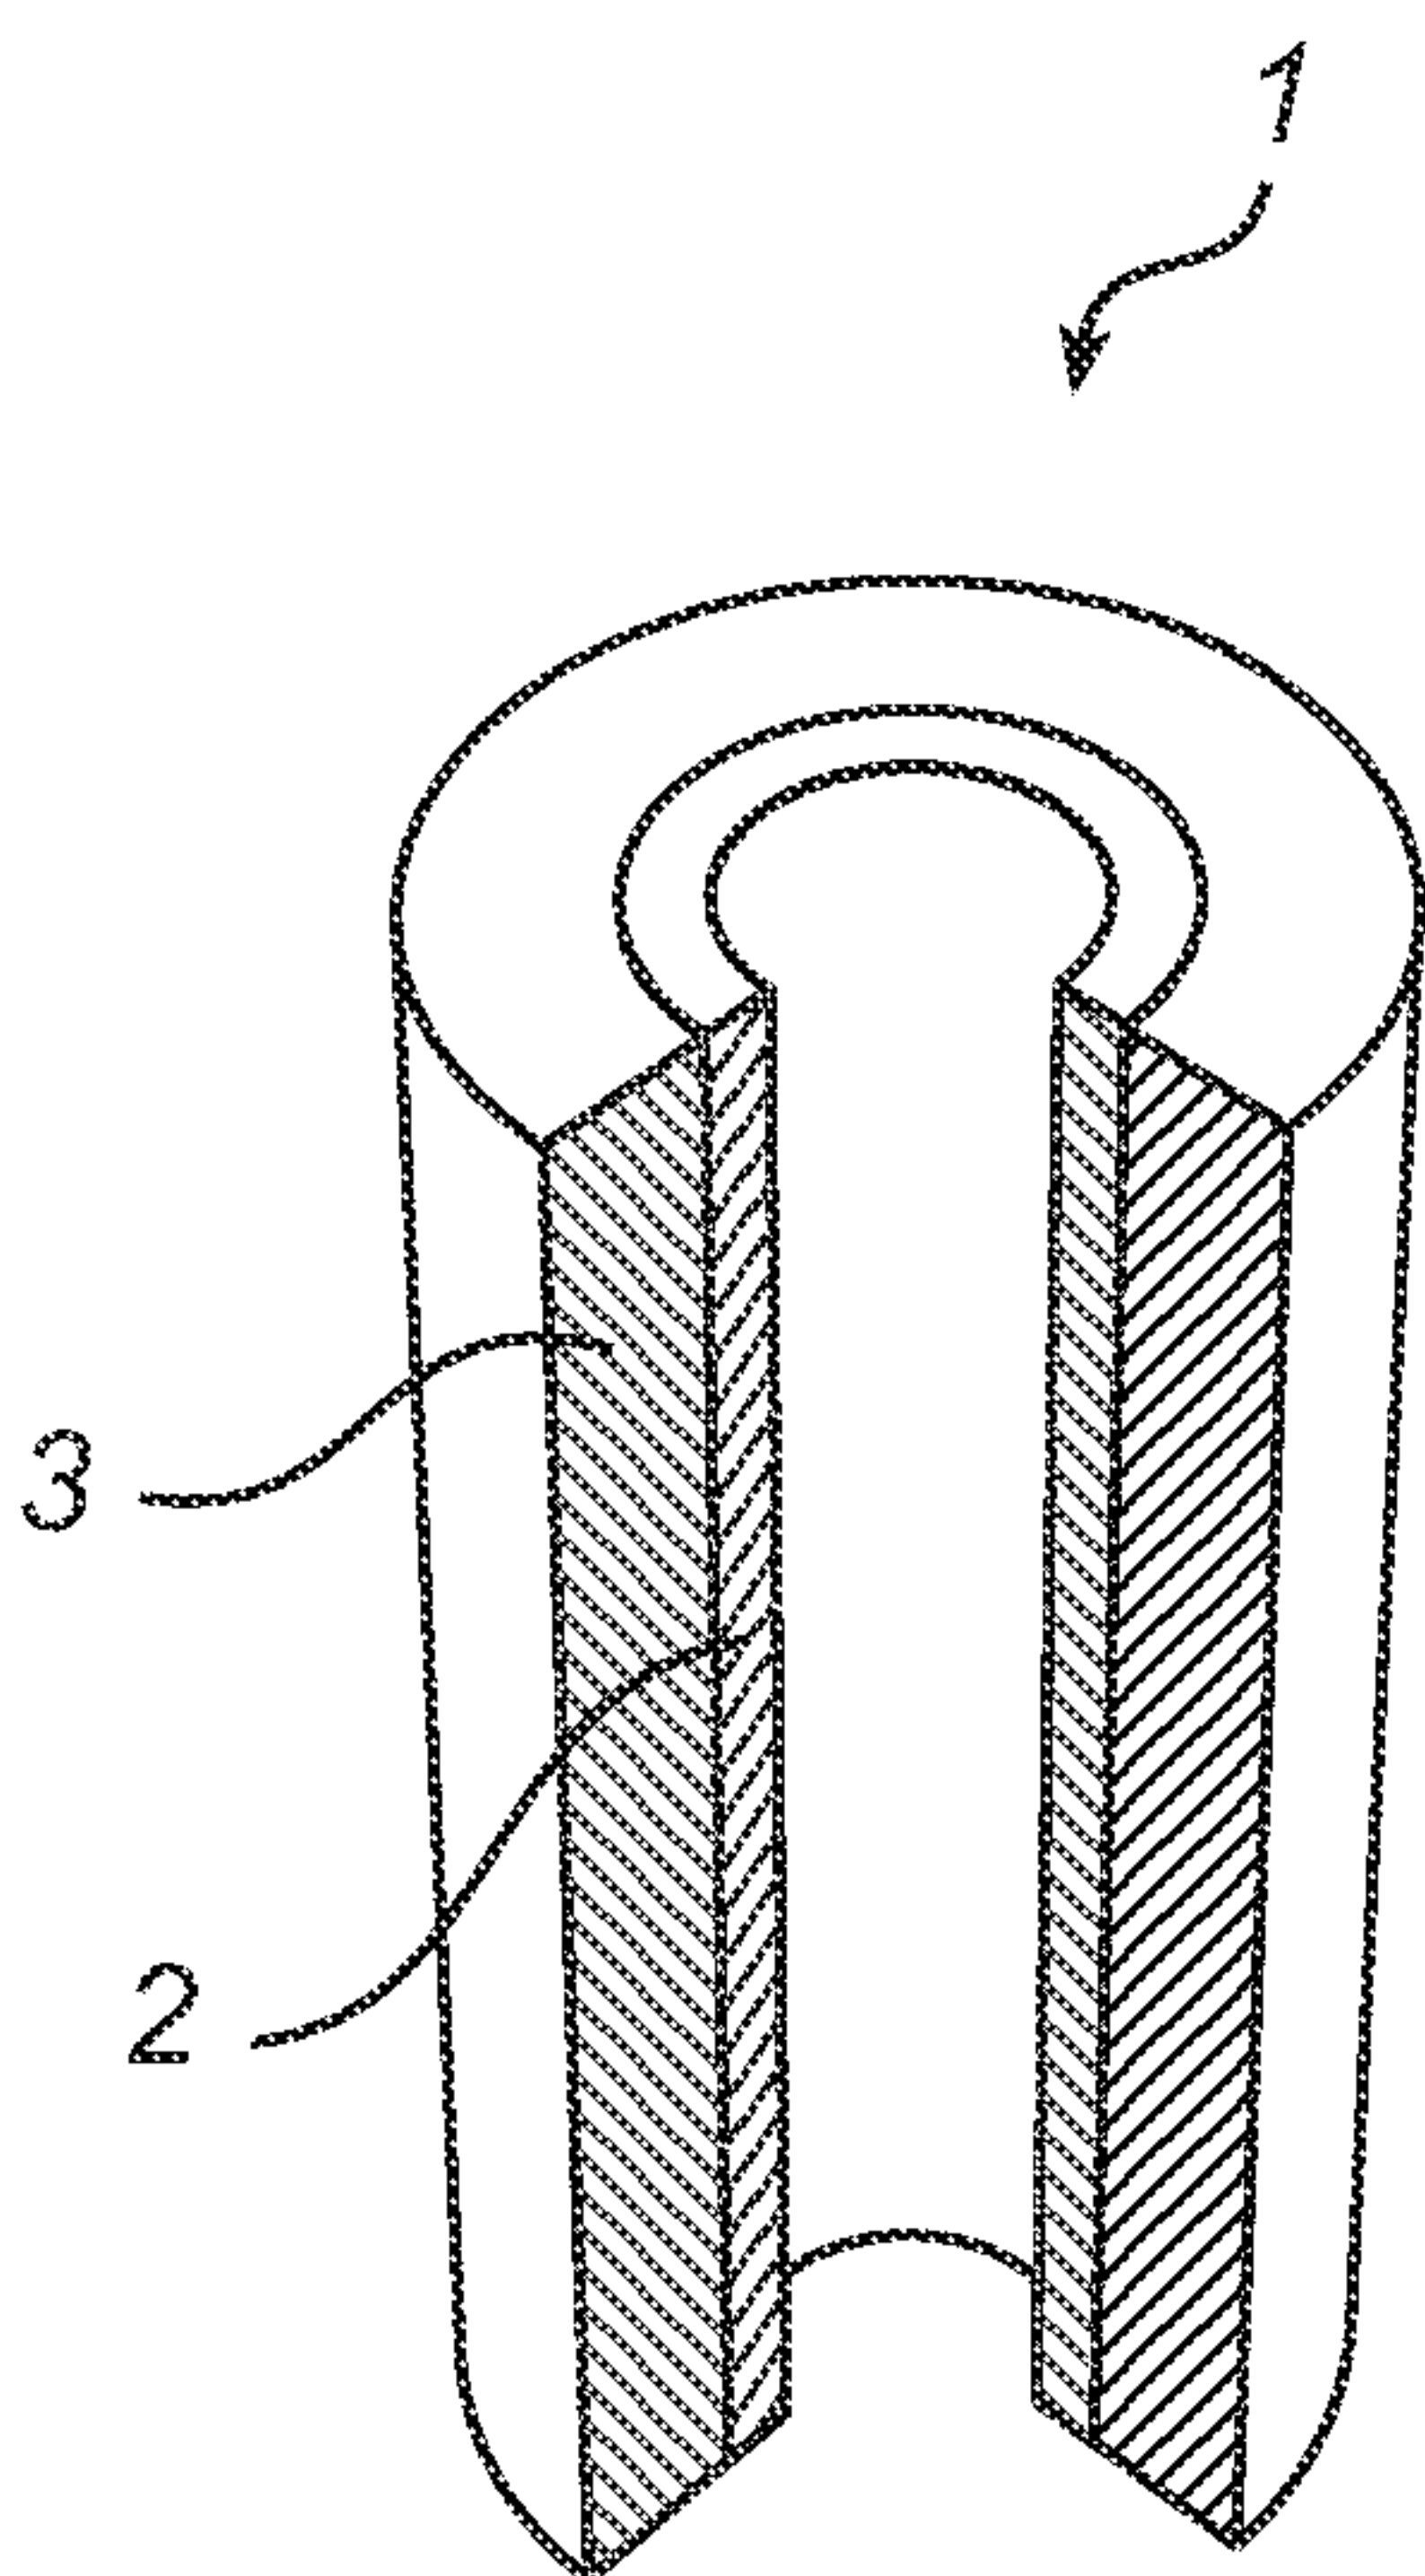


Fig. 1j

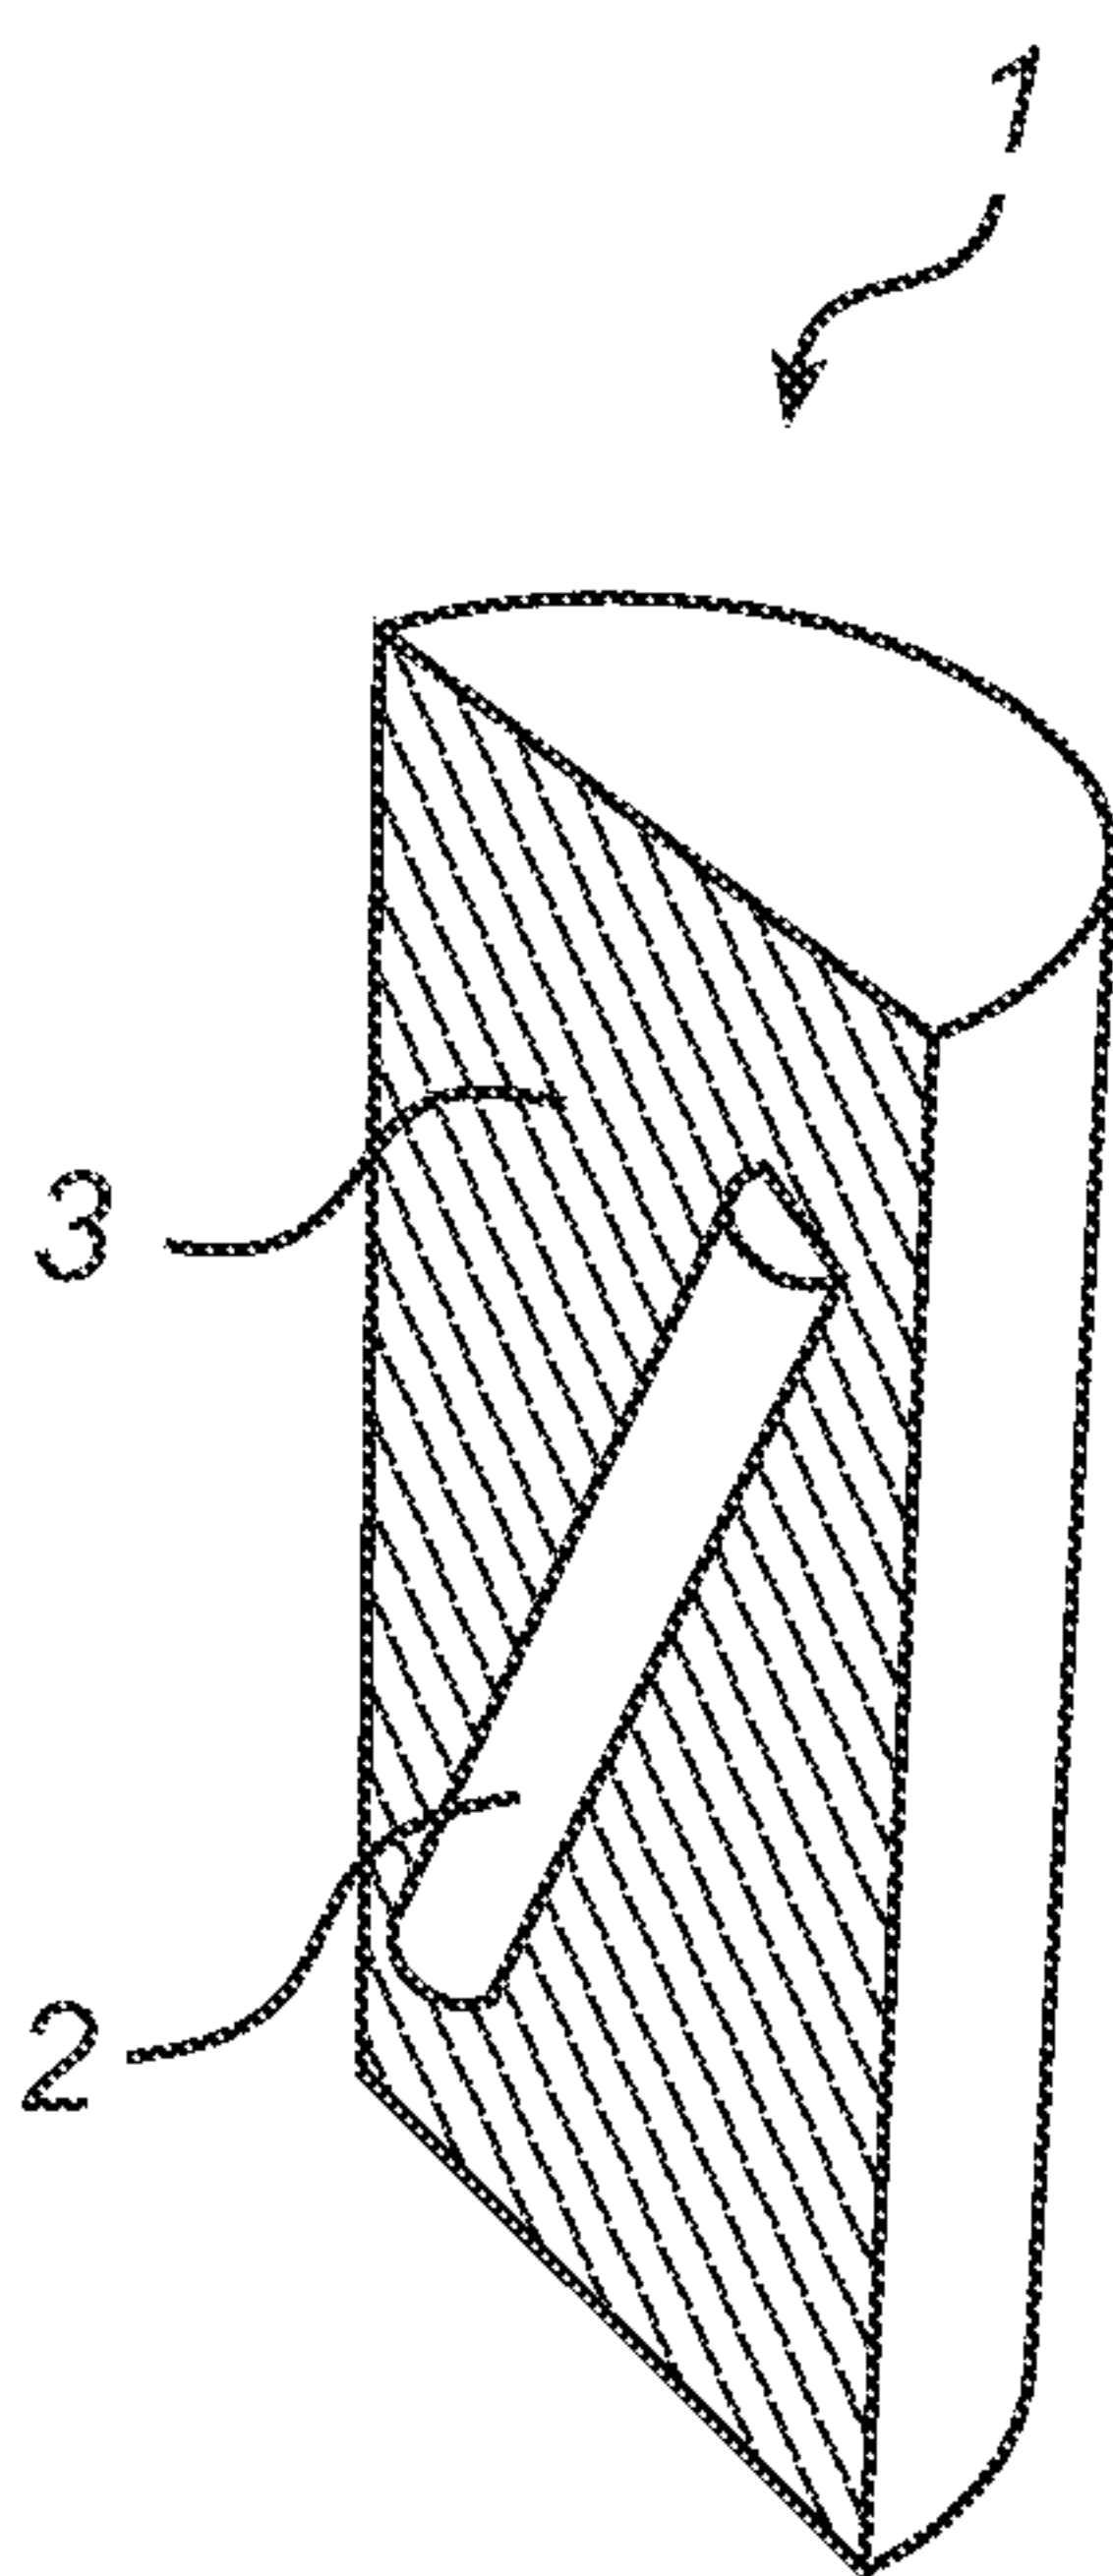


Fig. 1k



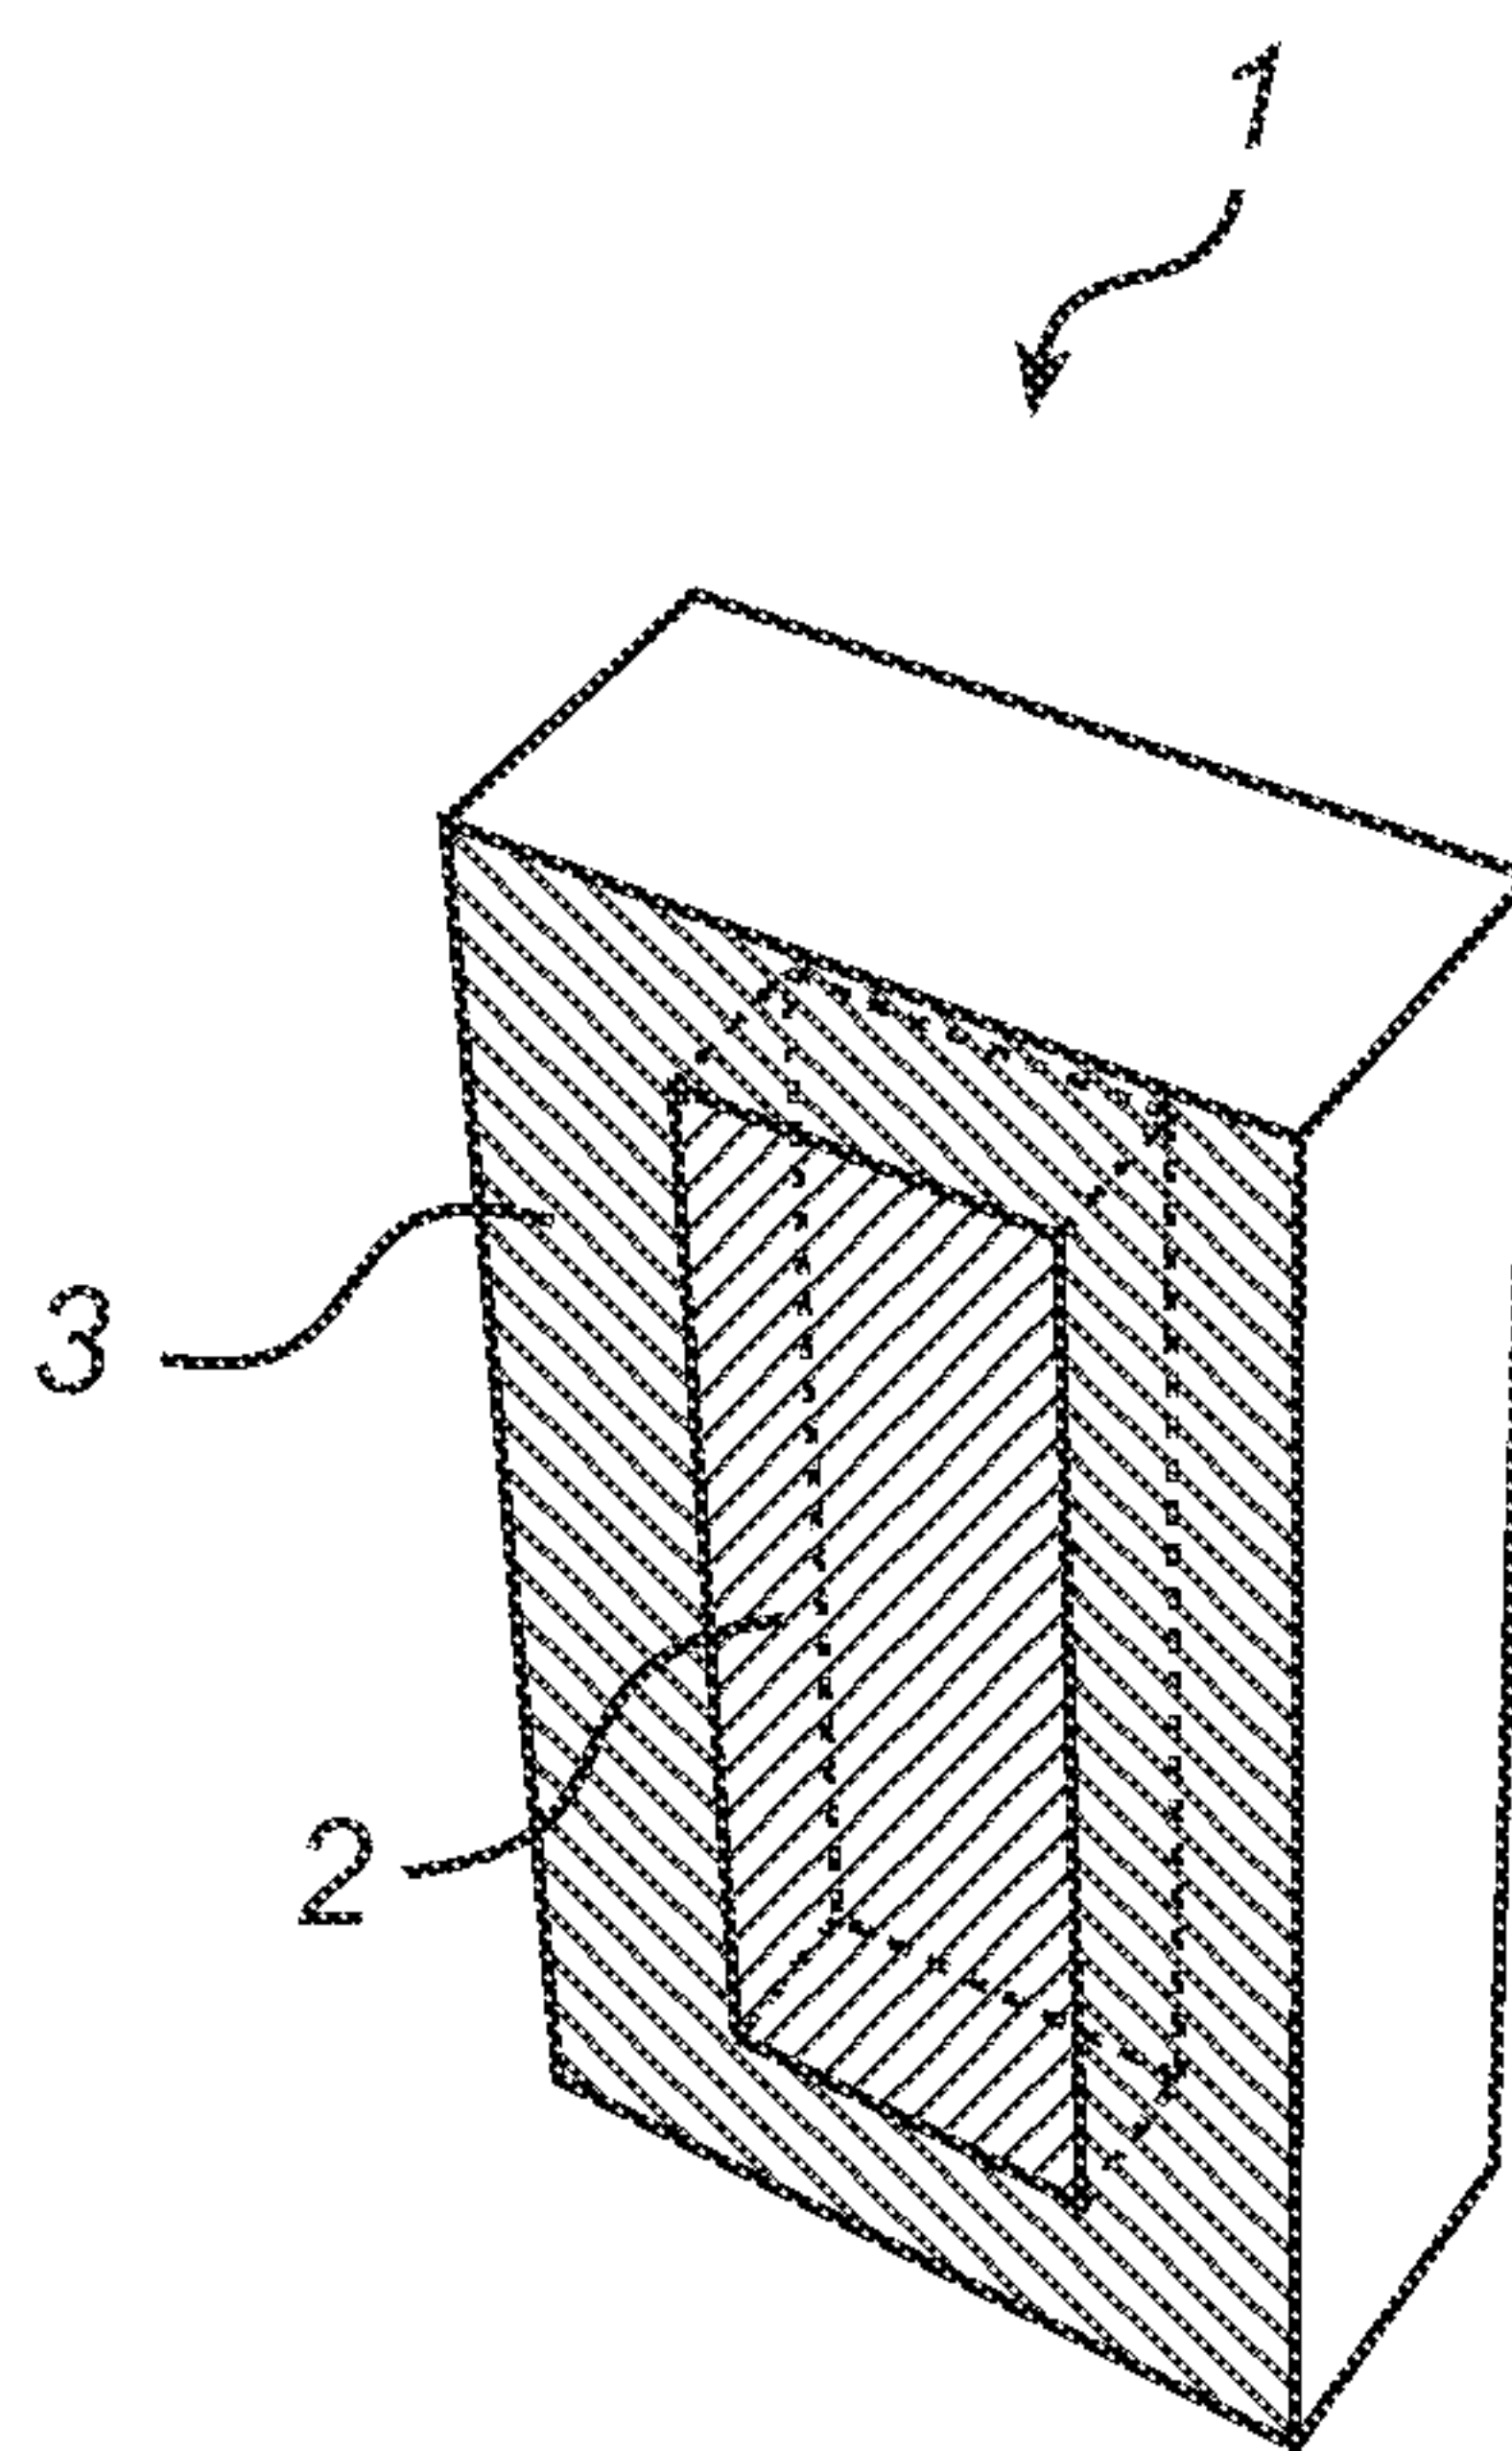


Fig. 1l

3/5

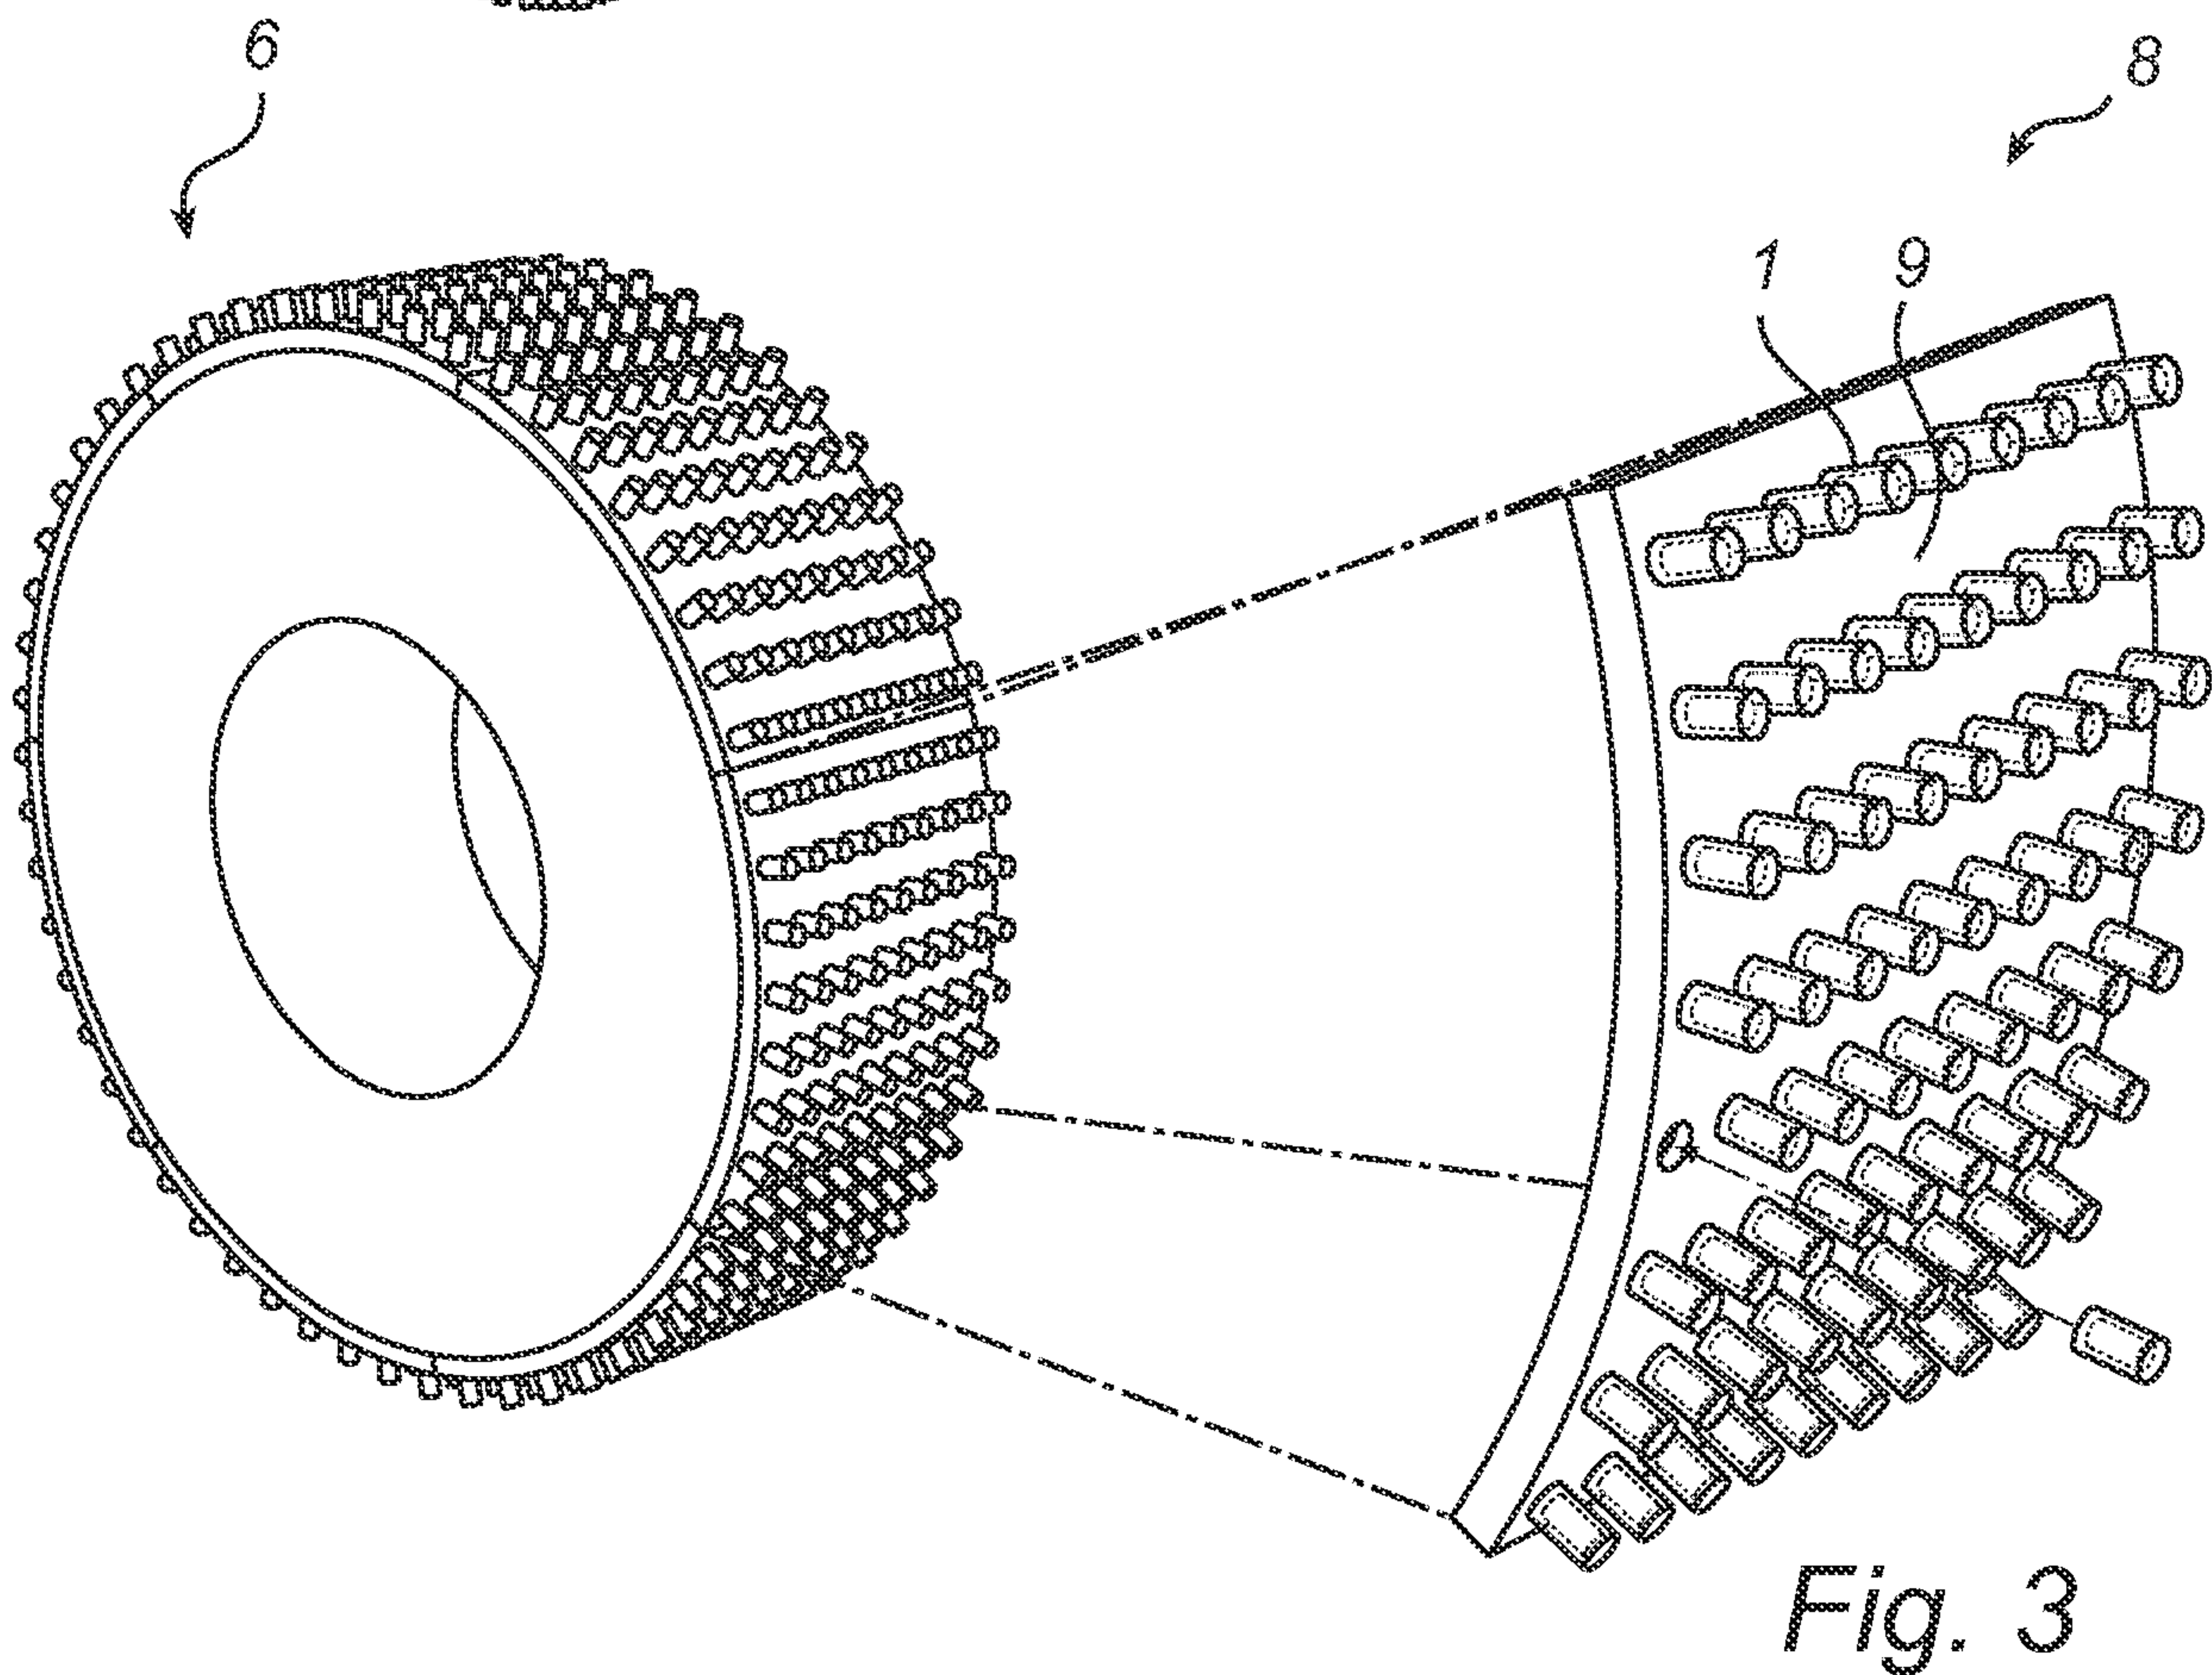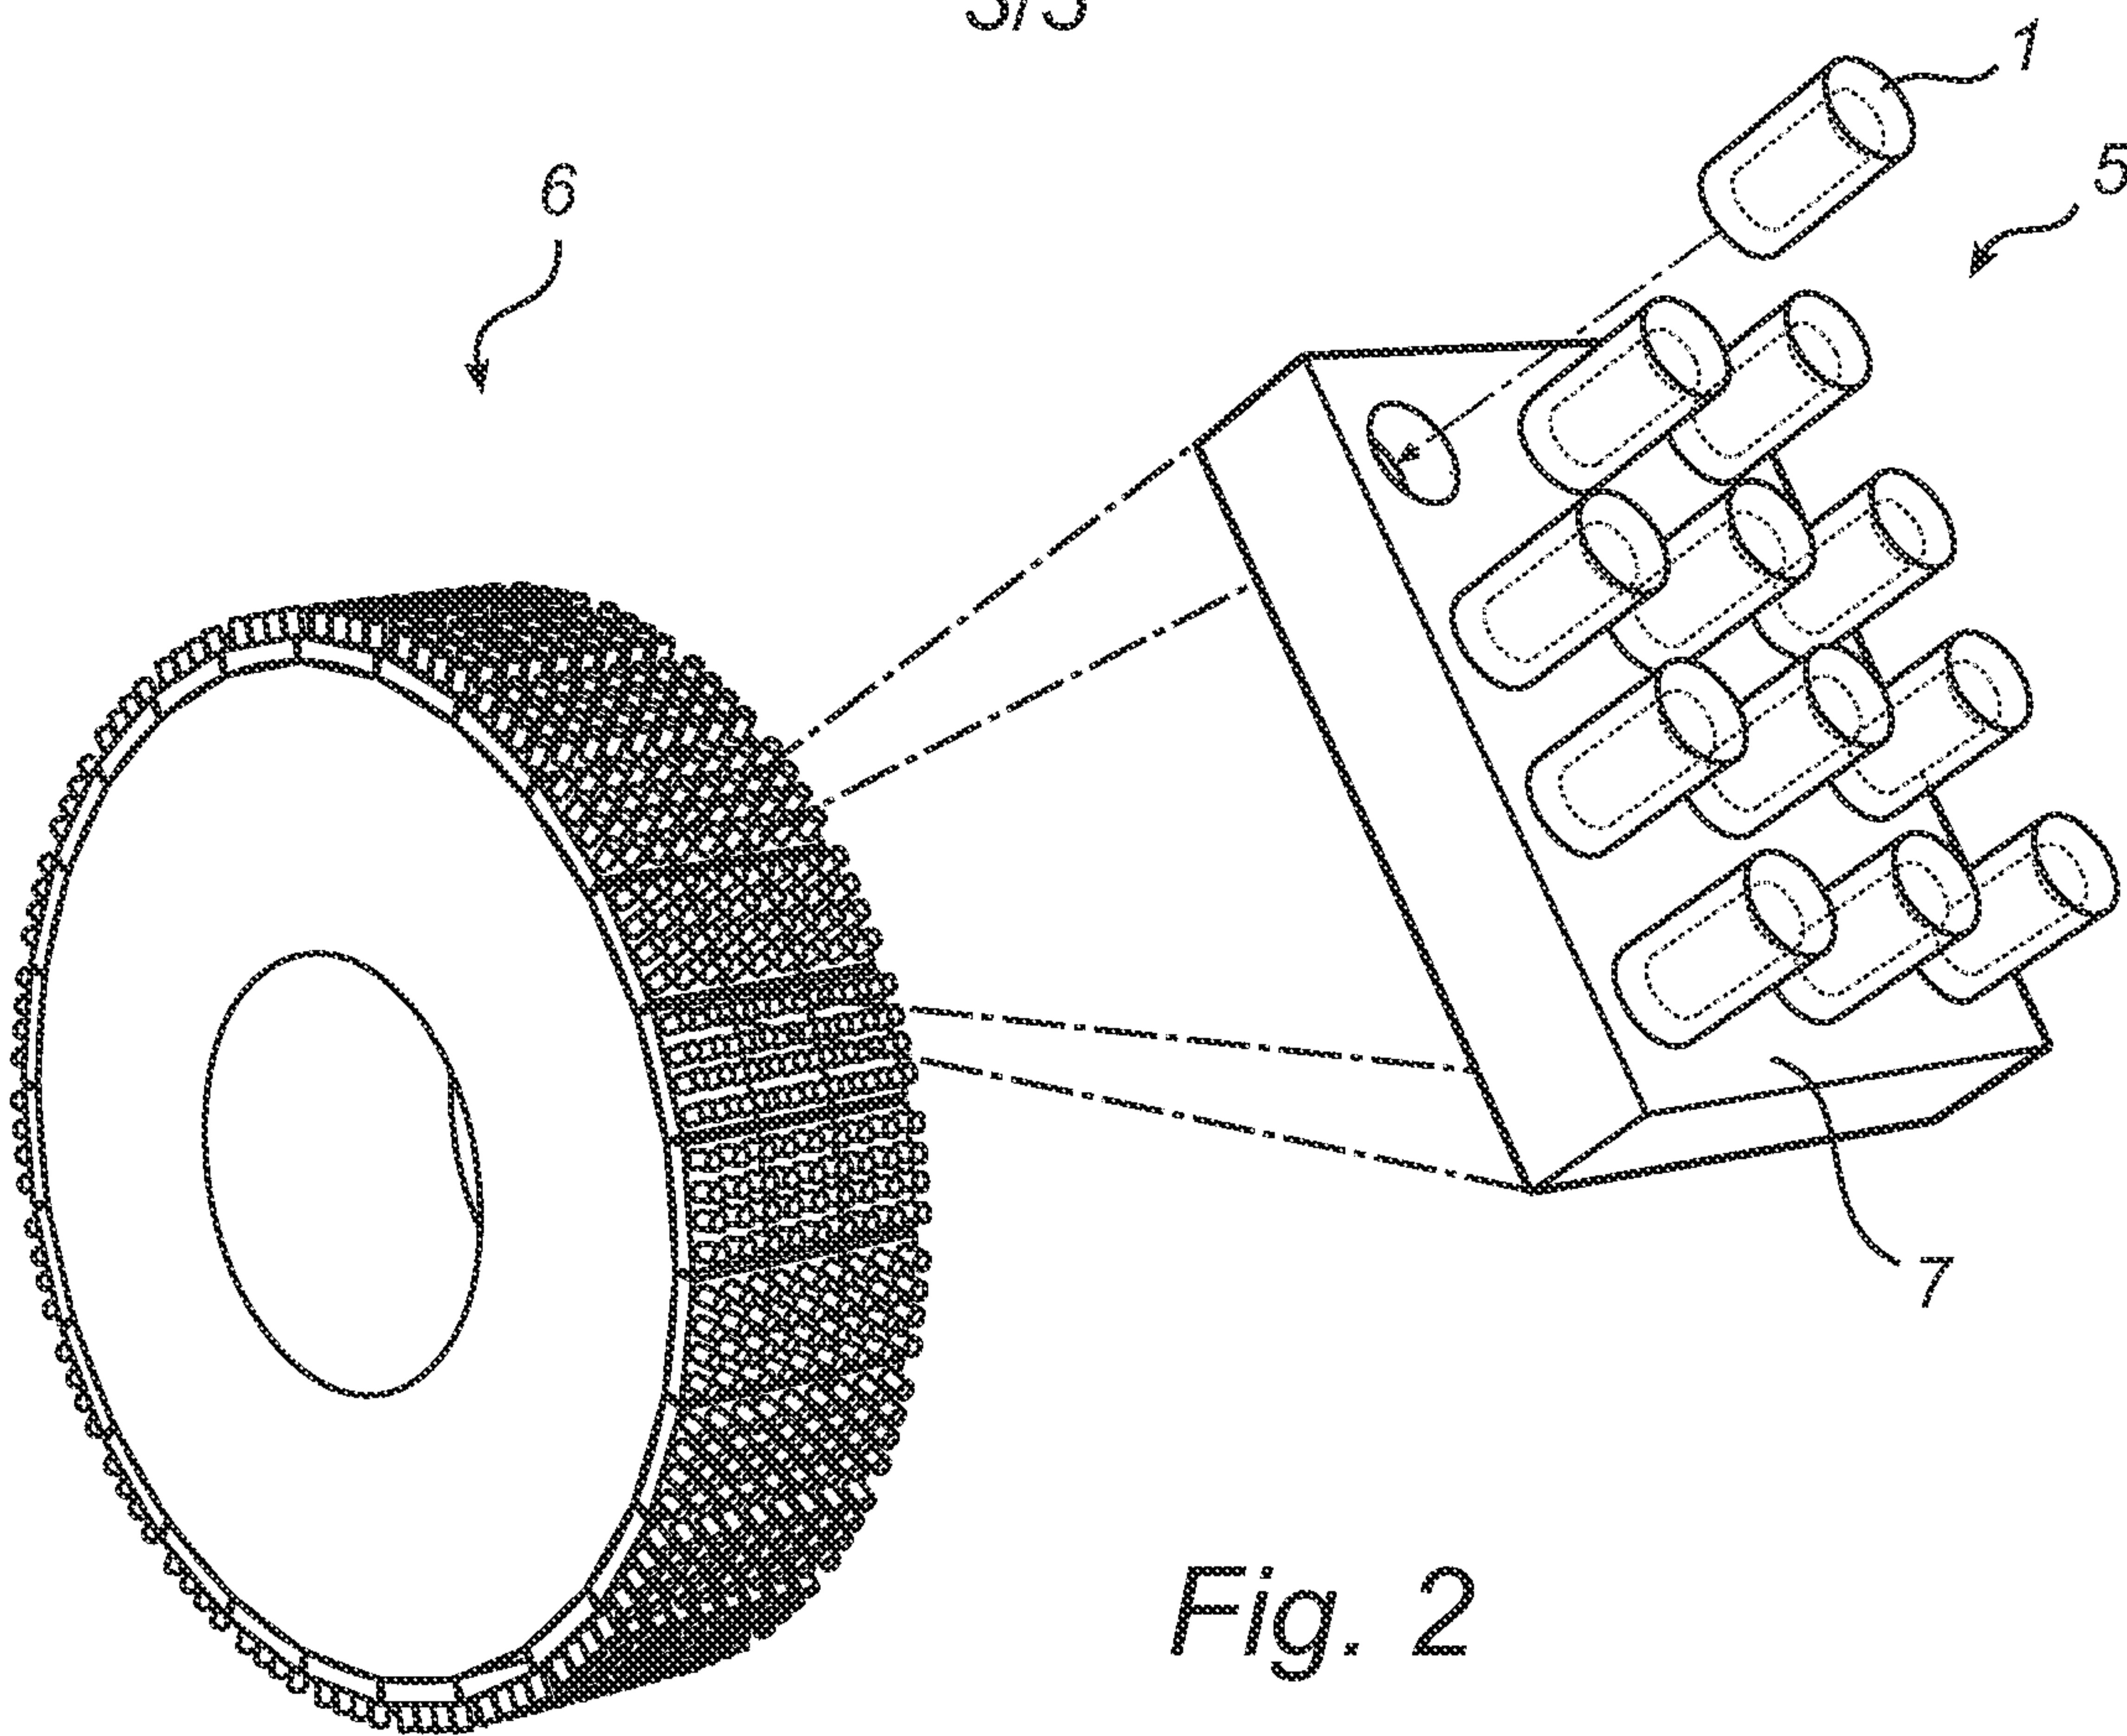

4/5

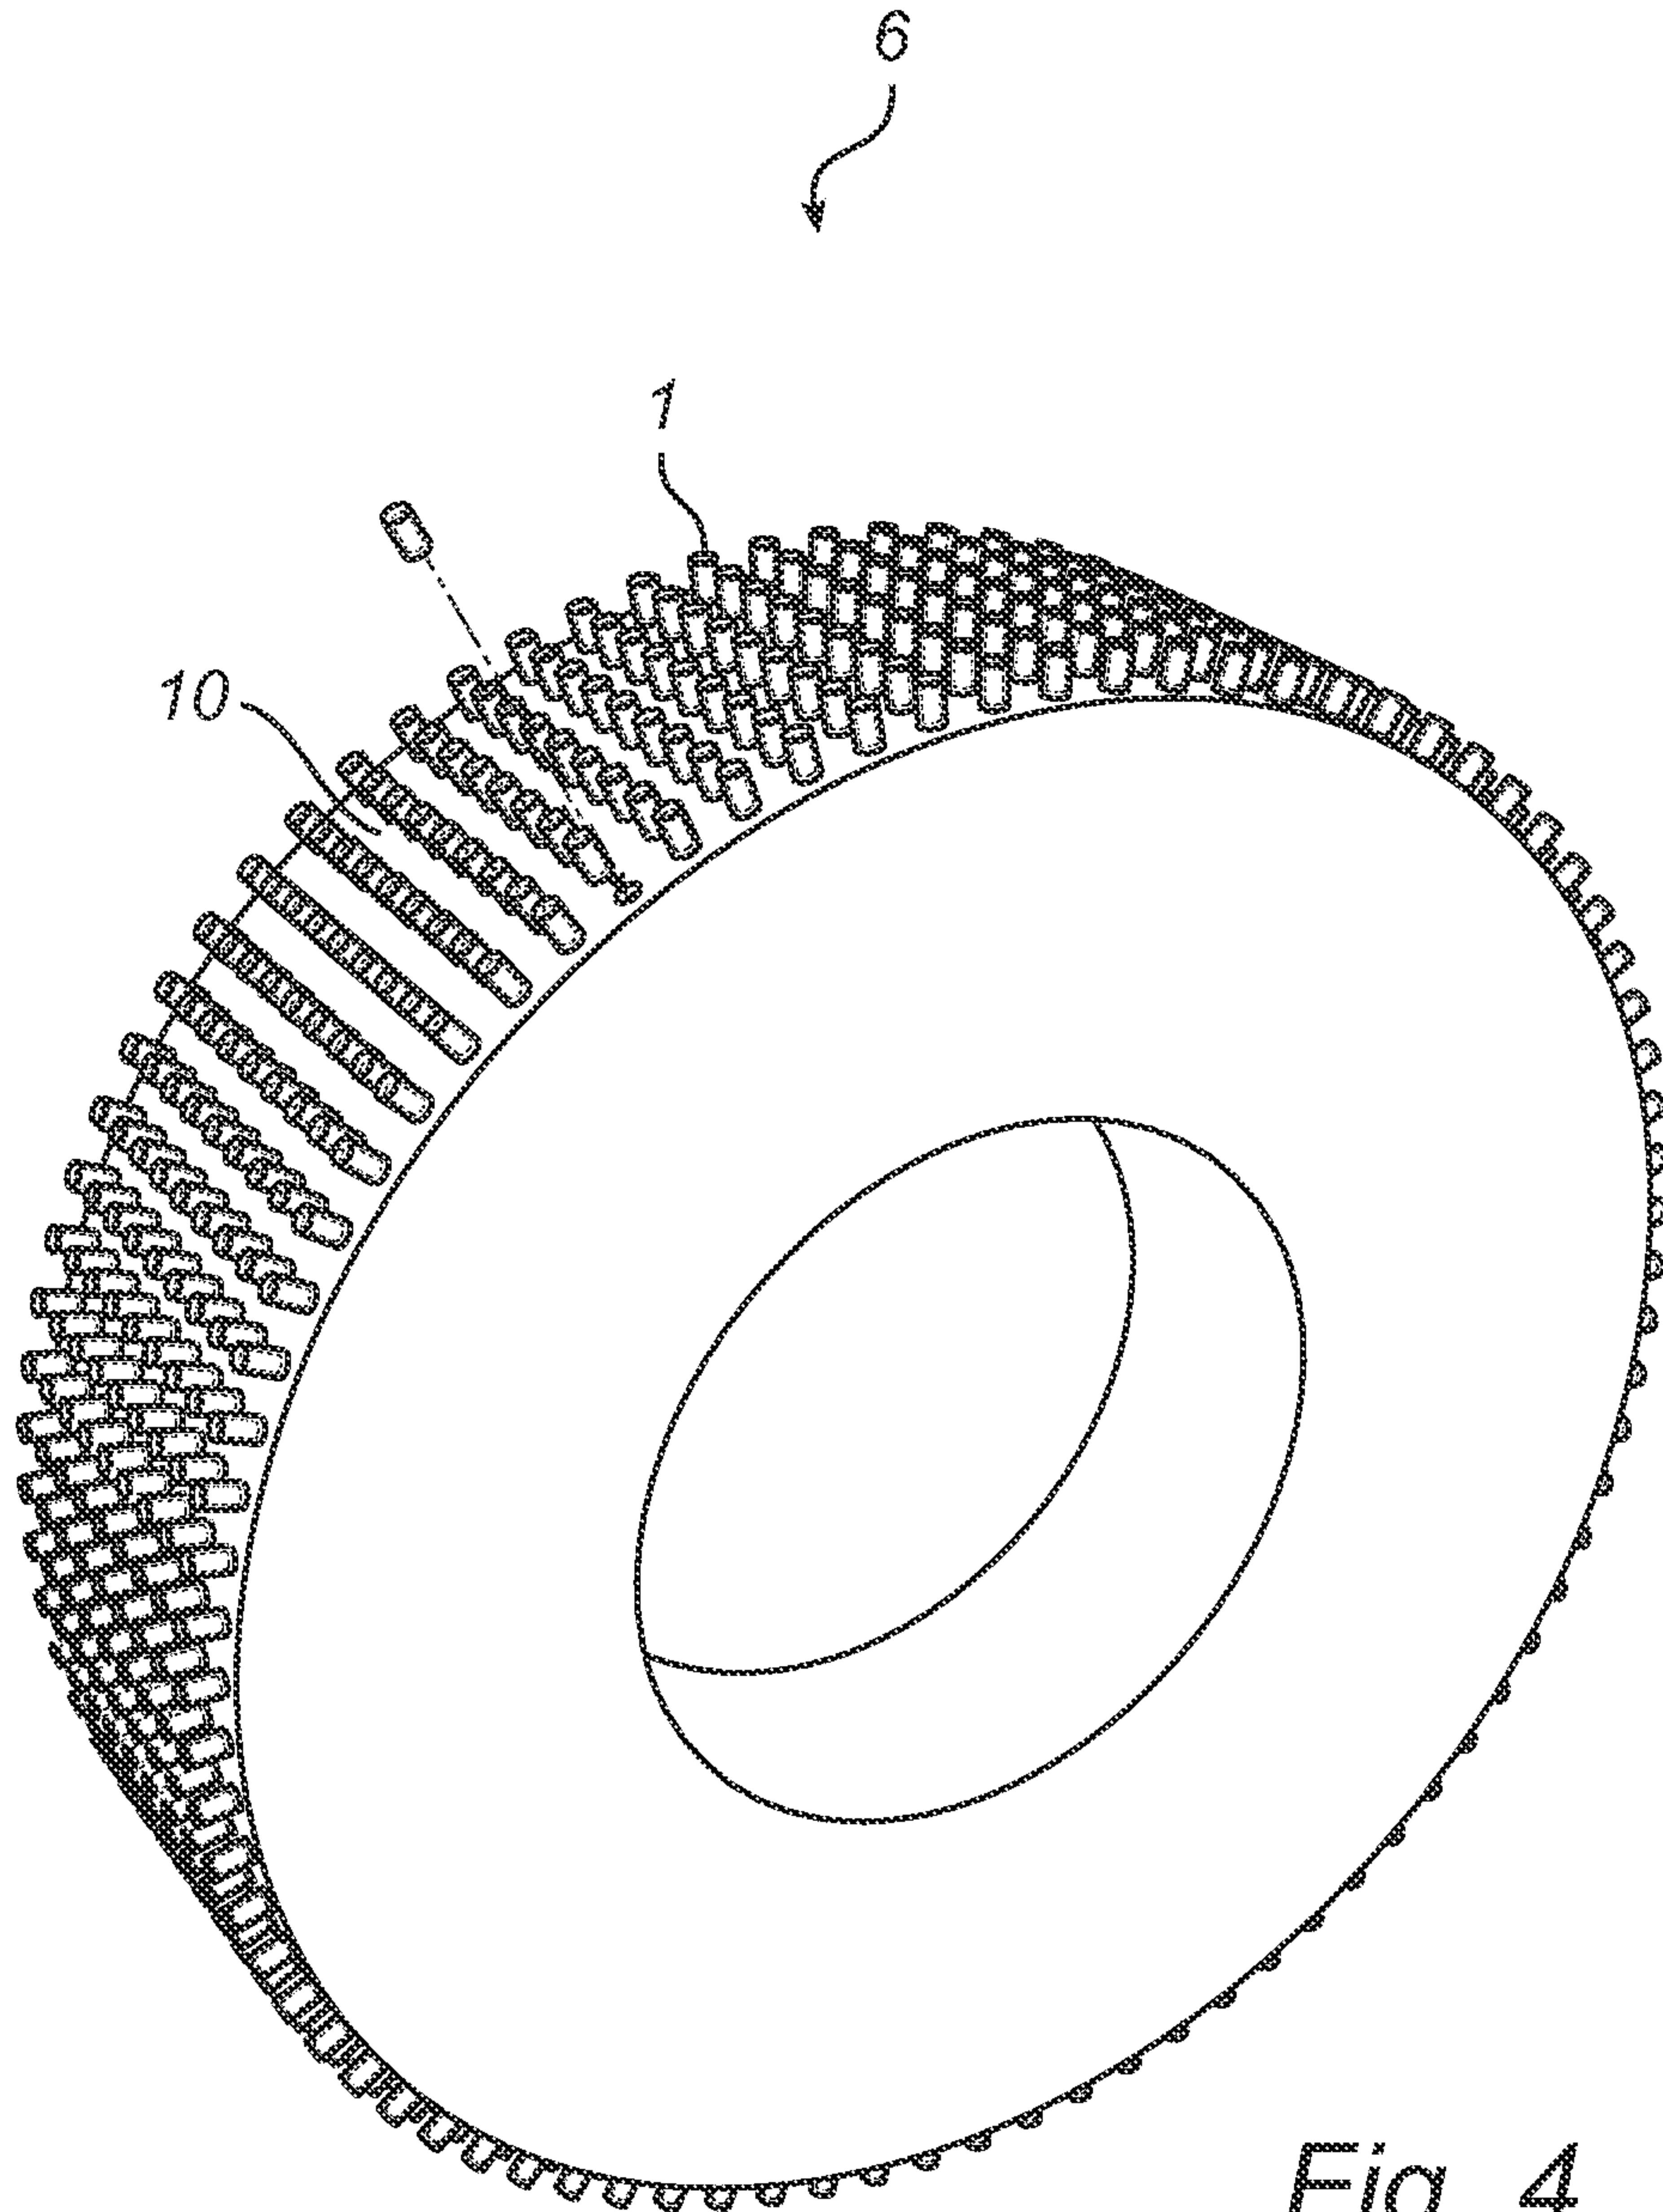
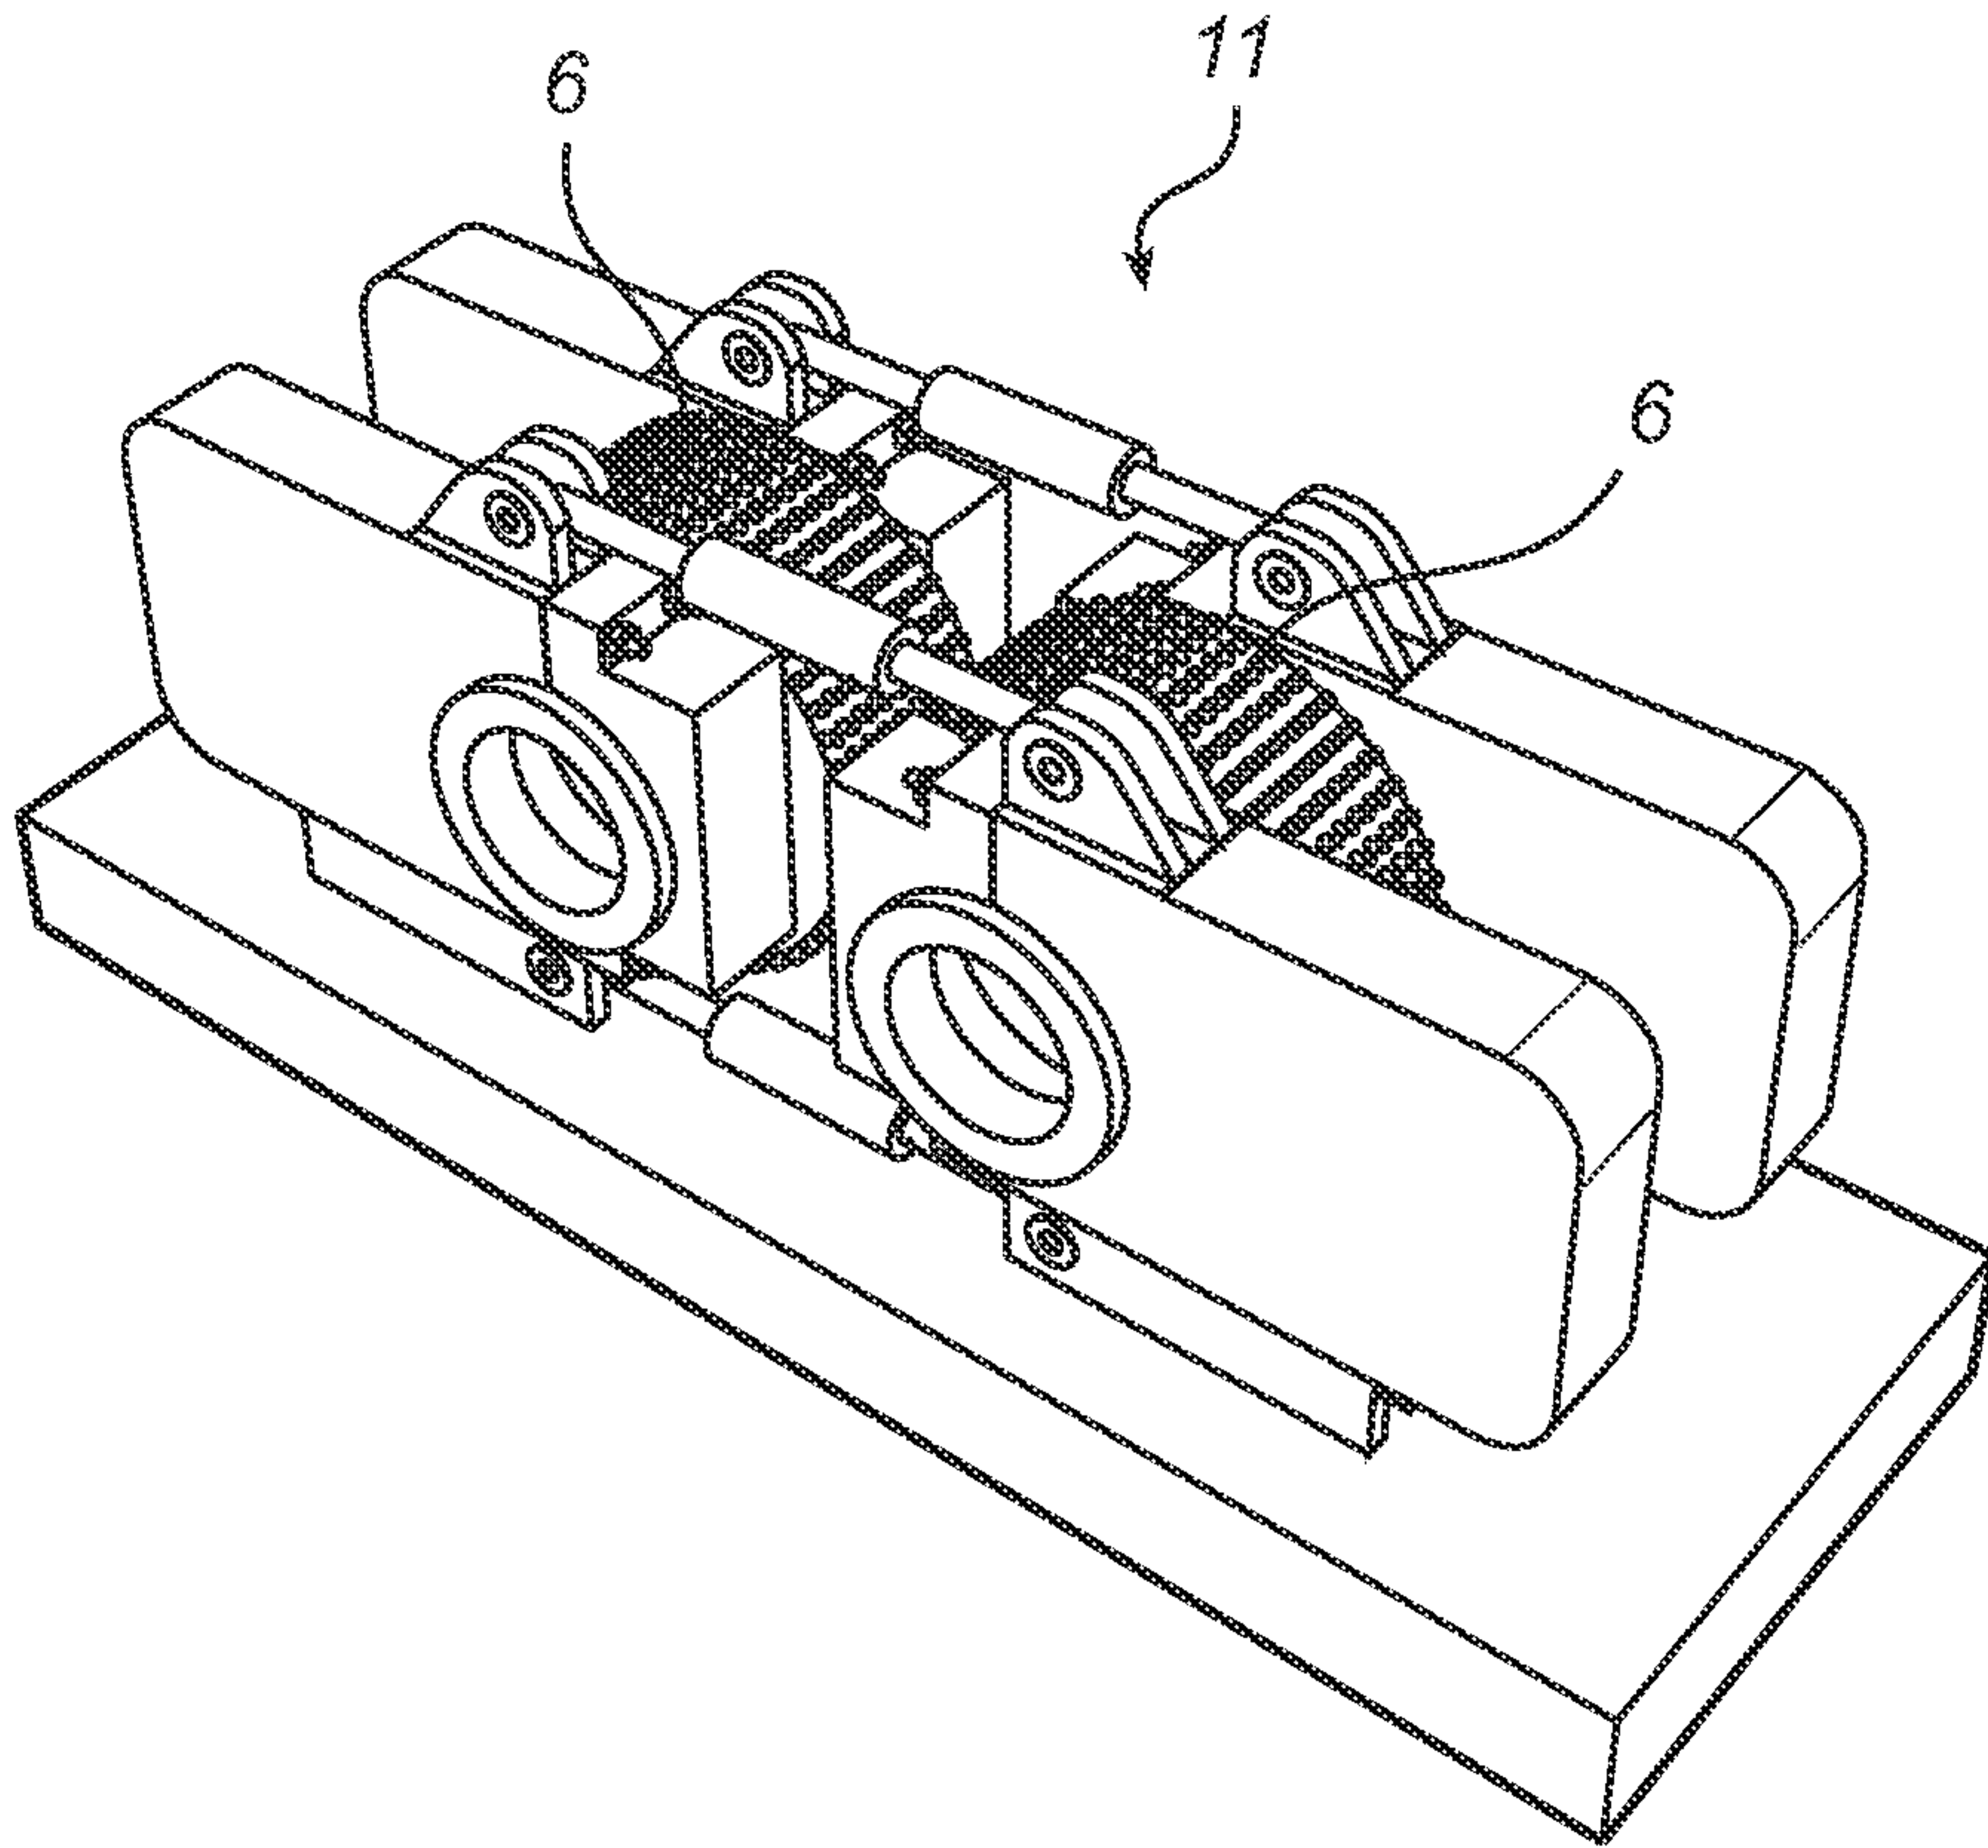
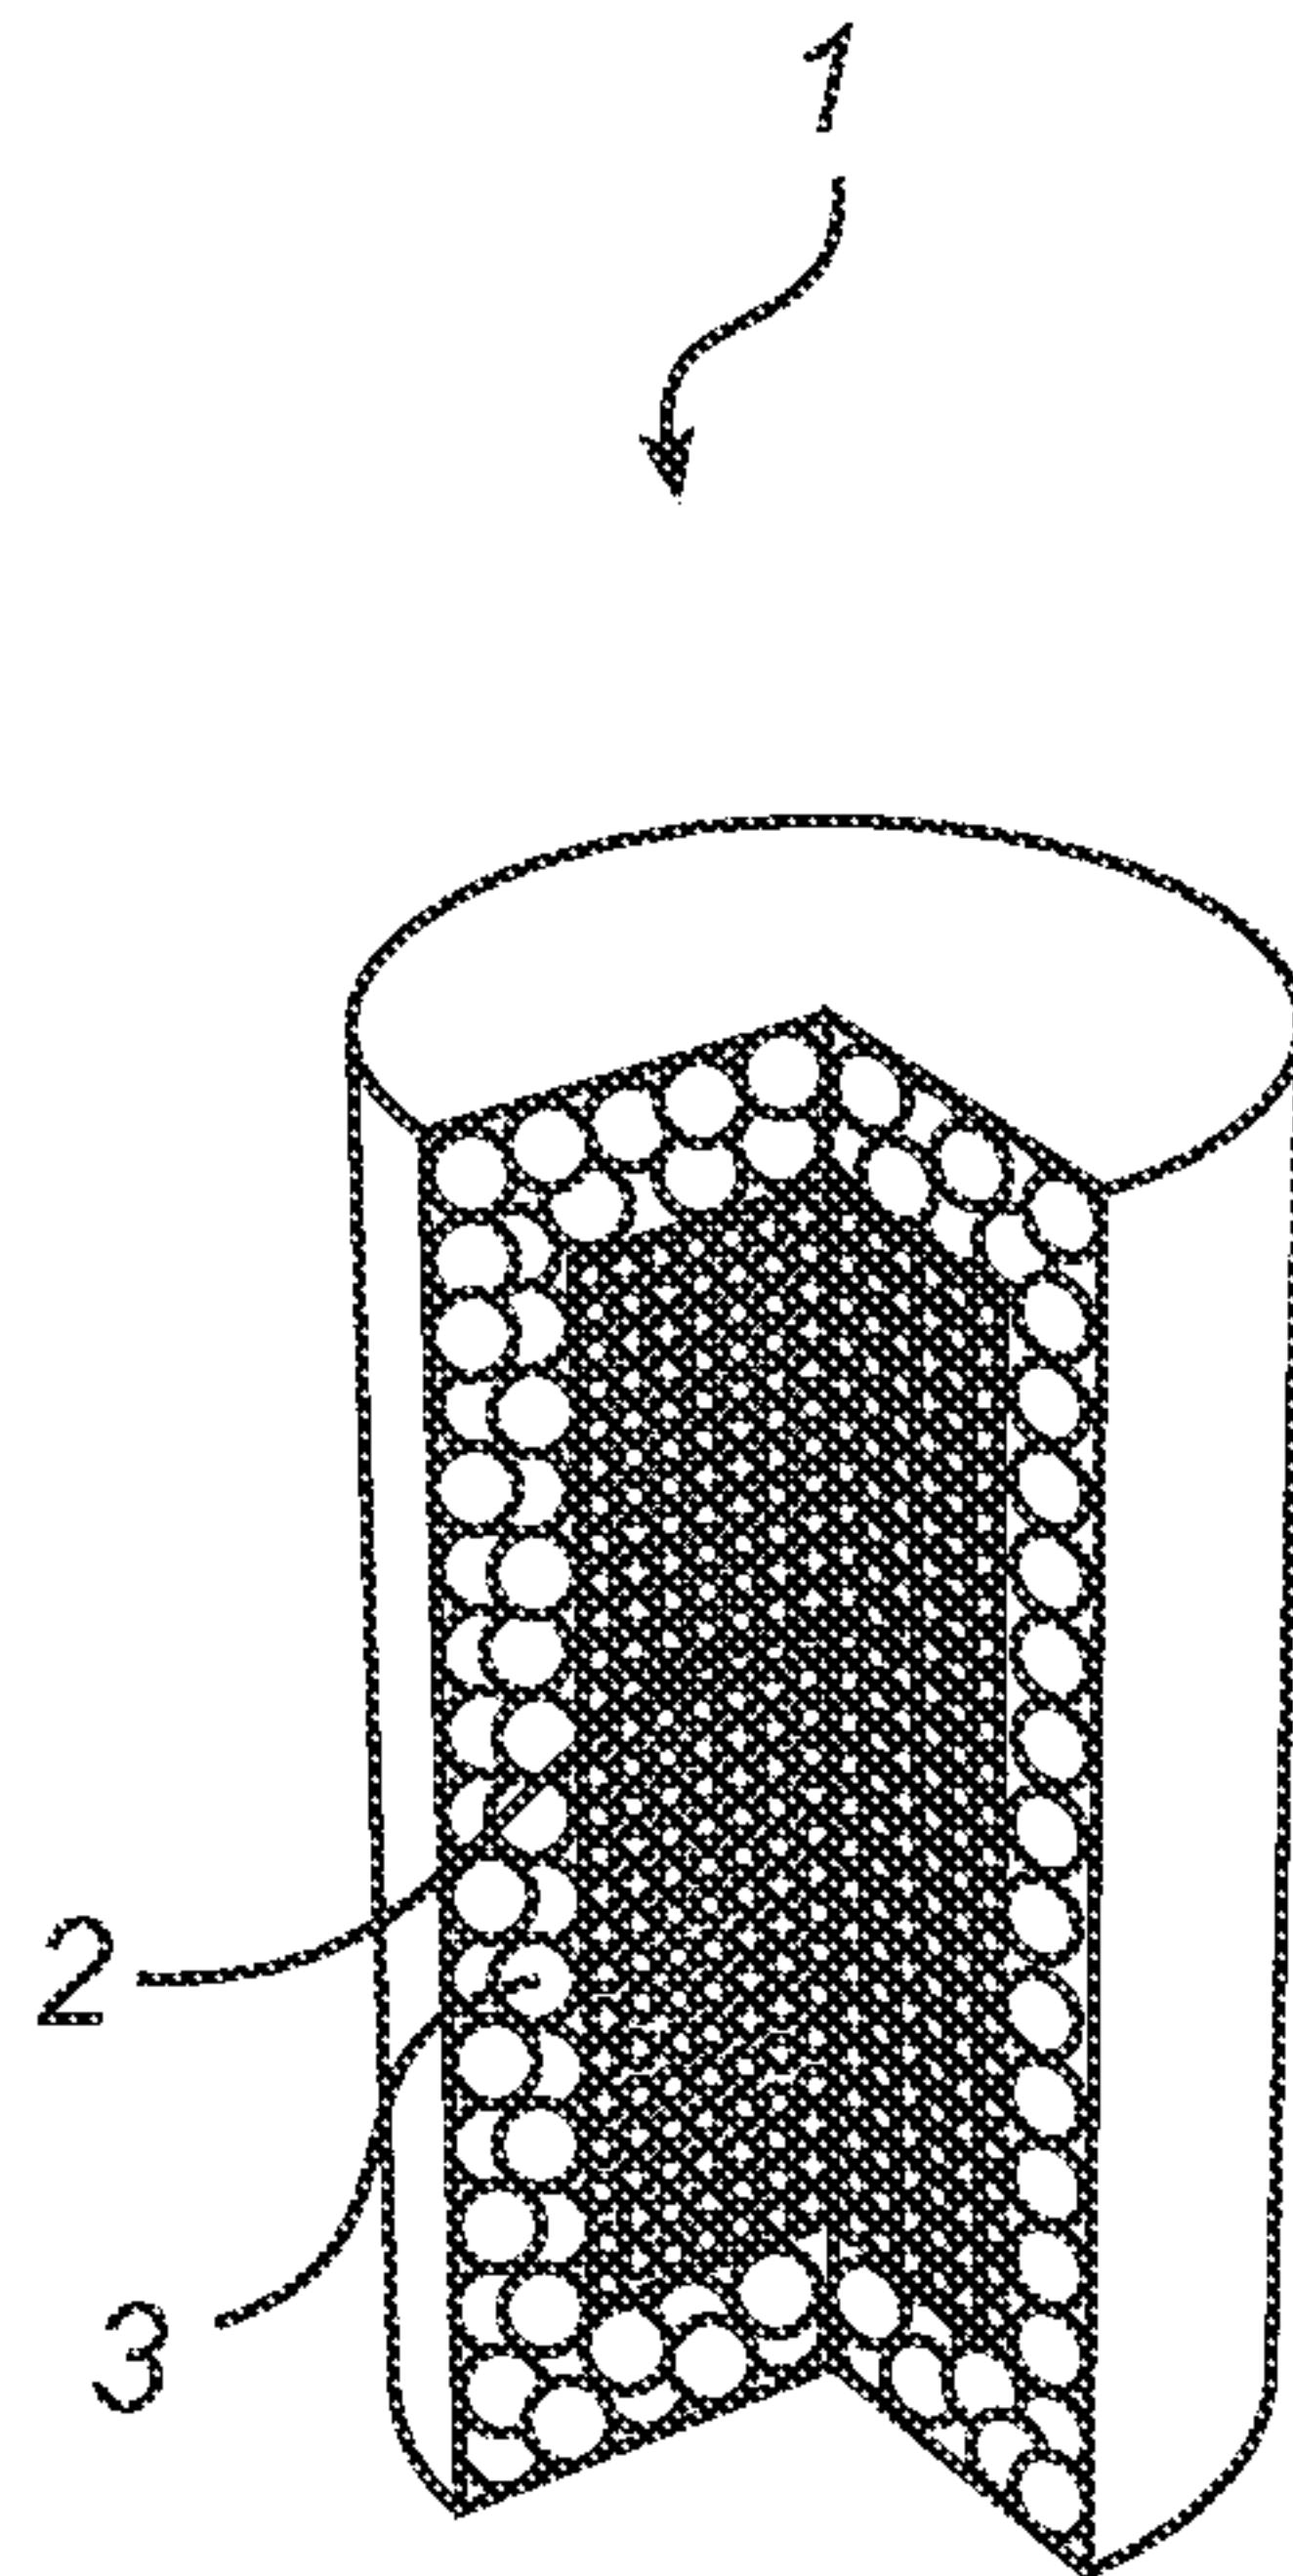


Fig. 4

5/5



*Fig. 5*



*Fig. 6*

