



(51) International Patent Classification:

C08J 7/04 (2006.01) **H05K 1/03** (2006.01)
H05K 3/12 (2006.01)

(21) International Application Number:

PCT/US2017/059258

(22) International Filing Date:

31 October 2017 (31.10.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/418,338 07 November 2016 (07.11.2016) US

(71) Applicant: **E. I. DU PONT DE NEMOURS AND COMPANY** [US/US]; Chestnut Run Plaza, 974 Centre Road, P. O. Box 2915, Wilmington, Delaware 19805 (US).

(72) Inventors: **WOLFE, Michael Stephen**; 112 SCHOOL ROAD, Wilmington, Delaware 19803 (US). **ROSENDELDT, H. David**; 1927 SUSQUEHANNOCK DRIVE, Drumore, Pennsylvania 17518 (US). **KOBREN, Robin**; 294 OLD FURNACE ROAD, Riegelsville, Pennsylvania 18077 (US).

(74) Agent: **HAAS, Charles**; E. I. du Pont de Nemours and Company, Legal Patent Records Center, Chestnut Run Plaza 721/2340, 974 Centre Road, PO Box 2915, Wilmington, Delaware 19805 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: ARTICLES AND SUBSTRATES PROVIDING IMPROVED PERFORMANCE OF PRINTABLE ELECTRONICS

(57) Abstract: This invention is directed to substrates and articles utilizing these substrates that provide improved performance of printable electronics on polymer substrates. The article comprises an elastomer or thermoplastic elastomer film substrate, being coated with a solvent solution or water-based dispersion of an elastomer or thermoplastic elastomer, and an elastic, electrical conductor deposited on the coating. Application of a thin polymeric coating to the polymer film provides the improved performance of the printed conductors.



TITLE

ARTICLES AND SUBSTRATES PROVIDING IMPROVED PERFORMANCE OF PRINTABLE ELECTRONICS

5

FIELD OF THE INVENTION

This invention is directed to substrates and articles utilizing these substrates that provide improved performance of printable electronics on polymer substrates. In particular, the improved substrates relate to polymer films and electrical conductors printed on them. These articles
10 may be used in applications where significant stretching is required, for example in wearable garments

BACKGROUND OF THE INVENTION

Conductive and dielectric inks for printable electronics are sensitive
15 to the substrate on which they are printed. Surface smoothness, surface energy and substrate compatibility with ink solvents can all influence conductivity or insulating behavior of as-printed circuit materials. They can also compromise adhesion and wash-fastness of the printed electronics. There is a need to improve print quality on polymer substrate films.

20

SUMMARY OF THE INVENTION

This invention provides an article containing an electrical conductor, the article comprising:

- a) an elastomer or thermoplastic elastomer polymer film;
- 25 b) an elastomer or thermoplastic elastomer coating on one side of the polymer film, wherein there is between 1 and 50 g of coating per square meter of polymer film and wherein the coating has been formed from either a solvent solution or a water-based dispersion; and
- 30 c) an elastic, electrical conductor deposited on the coating.

In an embodiment of the above article, the polymer of the thermoplastic elastomer polymer film is selected from the group consisting

of thermoplastic polyurethane, thermoplastic polyester and thermoplastic polyether and the thermoplastic elastomer coating is a thermoplastic urethane coating formed from a water-based thermoplastic urethane dispersion.

- 5 In one embodiment, the side of the polymer film without the coating is adhered to a carrier film comprising polypropylene, polyethylene terephthalate (PET), silicone treated paper, polypropylene, a polypropylene/polyethylene copolymer or polyvinyl fluoride.

- 10 This invention also provides a method for preparing an article containing a printed electrical circuit, the method comprising:
- a) providing an elastomer or thermoplastic elastomer polymer film;
 - b) using a solvent solution of or a water-based dispersion of an elastomer or thermoplastic elastomer to deposit a coating onto one side of the polymer film wherein there is between 1 and 50 g of coating per square meter of polymer film; and
 - c) depositing an elastic conductive ink on the coating and drying the elastic conductive ink to form the printed circuit.
- 15
- 20

The invention further provides a method for preparing an article containing a printed electrical circuit, the method comprising:

- a) providing a carrier film comprising polypropylene, a polypropylene/polyethylene copolymer or polyvinyl fluoride;
 - b) attaching one side of an elastomer or thermoplastic elastomer polymer film to the carrier film;
 - c) using a solvent solution of or a water-based dispersion of an elastomer or thermoplastic elastomer to deposit a coating onto the other side of the polymer film wherein there is between 1 and 50 g of coating per square meter of polymer film;
- 25
- 30

- d) depositing an elastic conductive ink on the coating and drying the elastic conductive ink to form the printed circuit.

In one embodiment, the method above, further comprises:

- 5 e) removing the carrier from the polymer film.

The invention also provides a composite substrate comprising:

- a) an elastomer or thermoplastic elastomer polymer film; and
- b) an elastomer or thermoplastic elastomer coating on
10 one side of the polymer film, wherein there is between 1 and 50 g of coating per square meter of polymer film and wherein the coating has been formed from either a solvent solution or a water-based dispersion.

In one embodiment of the above composite substrate, the polymer
15 of the thermoplastic elastomer polymer film is selected from the group consisting of thermoplastic polyurethane, thermoplastic polyester and thermoplastic polyether.

In one embodiment, the invention provides a composite substrate comprising:

- 20 a) a polymer film, wherein the polymer is selected from the group selected consisting of thermoplastic polyurethane, thermoplastic polyester and thermoplastic polyether; and
- b) a polyurethane coating on one side of the polymer film,
25 wherein there is between 1 and 50 g of polyurethane coating per square meter of polymer film and wherein the polyurethane coating has been formed from a water-based polyurethane dispersion.

In another embodiment, the invention provides a composite
30 substrate comprising:

- a) a polymer film, wherein the polymer is selected from the group selected consisting of thermoplastic

polyurethane, thermoplastic polyester and thermoplastic polyether; and

- 5 b) a polyurethane coating on one side of the polymer film, wherein there is between 1 and 50 g of polyurethane coating per square meter of polymer film and wherein the polyurethane coating has been formed from an organic solvent-based polyurethane solution.

10 In some embodiments of the above article, method and substrate, the polymer film has been subjected to a corona or plasma treatment prior to the deposition of the coating.

BRIEF DESCRIPTION OF THE FIGURES

Figure 1A shows strips of silver paste printed and cured on an untreated thermoplastic polyurethane film substrate.

15 Figure 1B shows strips of silver printed and cured on a composite treated substrate of the invention, i.e., a thermoplastic polyurethane film with a polyurethane coating formed from a water-based polyurethane dispersion.

20 Figure 2 shows the maximum resistance of silver conductors screen-printed on untreated and treated substrates in each 0%-40%-0% strain cycle as a function of the number of subsequent cycles of stretch.

Figure 3 shows the minimum resistance of silver conductors screen-printed on untreated and treated substrates in each 0%-40%-0% strain cycle as a function of the number of subsequent cycles of stretch.

DETAILED DESCRIPTION OF INVENTION

25 The invention relates to an article containing an electrical conductor or electrical circuit with improved electrical properties and to composite substrates that make these improvements possible. These articles and substrates may be used in various application but are especially useful for stretchable circuits such as those applications where functional circuitry is generated on fabrics, e.g., for wearable garments. A layer of conductor is printed and dried on a substrate so as to produce a functioning circuit and then the entire circuit is subjected to the typical bending/creasing that a

30

fabric would receive. Additionally, as is typical for fabrics, they must be washed and dried on a periodic basis and the conductivity and integrity of the conductor must be maintained.

5 The invention overcomes three deficiencies of thermoplastic and elastomeric film substrates. It reduces or eliminates damage to the substrate from solvents in the inks used to print electronics on the substrate. It improves adhesion of the printed electronics to the substrate which affects durability and wash ability. And it reduces surface roughness.

10 Application of a thin polymeric coating to the polymer film substrate prior to the printing of electronics on the substrate results in a composite substrate with a surface that is more compatible with inks for printing electronics while maintaining the desired mechanical and thermal bulk properties of the untreated polymer film substrate.

15 The composite substrate comprises an elastomer or thermoplastic elastomer polymer film; and an elastomer or thermoplastic elastomer coating on one side of the polymer film, wherein there is between 1 and 50 g of coating per square meter of polymer film and wherein the coating has been formed from either a solvent solution or a water-based
20 dispersion. As used herein, "treated substrate", "treated surface" or "treated" all refer to a "composite substrate" and "untreated substrate", "untreated surface" or "untreated" all refer to a substrate without an elastomer or thermoplastic elastomer coating.

In one embodiment the composite substrate comprises a polymer
25 film, wherein the polymer is selected from the group consisting of thermoplastic polyurethane (TPU), thermoplastic polyester and thermoplastic polyether; and a polyurethane coating on one side of the polymer film, wherein there is between 1 and 50 g of polyurethane coating per square meter of polymer film and wherein the polyurethane coating
30 has been formed from a water-based polyurethane dispersion.

One polymer for the polymer film is thermoplastic polyurethane (TPU), such as Covestro PT6410S available from Covestro, Pittsburgh, PA and Bemis ST-604 available from Bemis Associates, Inc., Shirley, MA.

Another polymer is thermoplastic polyester, such as DuPont™ Hytrel® available from the DuPont Co., Wilmington, DE.

The coating is a polymeric coating with elastic properties similar to those of the polymer film to which it is applied. It may be applied
5 immediately following a corona or plasma treatment to improve wetting of the polymer film surface or it may be applied without the corona or plasma preconditioning of the polymer film surface. The coating may be formed from a water-based polymer dispersion or a solvent-based polymer solution. There is between 1 and 50 g of coating per square meter of
10 polymer film. The coating is cured at temperatures between 120°C and 250°C depending on the polymer film.

In one embodiment of the composite substrate, the side of the polymer film without the coating is adhered to a carrier film comprising polypropylene, polyethylene terephthalate (PET), silicone treated paper,
15 polypropylene, a polypropylene/polyethylene copolymer or polyvinyl fluoride. The carrier film provides mechanical support for the polymer film and makes it easier to handle. It is especially important when using polymer films of thickness less than about 0.003 in (80 µm). The adhesive used to adhere the polymer film to the carrier must be such that the carrier
20 can be removed after the electrical circuit or conductor has been formed on the composite substrate.

The invention provides an article comprising an elastomer or thermoplastic elastomer polymer film, an elastomer or thermoplastic elastomer coating on one side of the polymer film, wherein there is
25 between 1 and 50 g of coating per square meter of polymer film and wherein the coating has been formed from either a solvent solution or a water-based dispersion and an elastic, electrical conductor deposited on the coating.

An electrical conductor or circuit is deposited onto the coating of the
30 composite substrate. Typically, this circuit is applied using a polymer thick film silver conductor composition referred to as an ink or paste. The polymer portion of the organic medium of the polymer thick film silver conductor composition remains as an integral part of the conductor

composition after drying. Herein, circuit and conductor are used interchangeably to describe the electrically conductive entity that is deposited and formed on the coating. Improved printability of the conductor on the composite substrate versus that on the uncoated polymer film is demonstrated by lower as-printed resistivity on the composite substrate as well as the absence of solvent swelling or surface blistering associated with chemical attack of the polymer film by ink solvents.

Printed conductors of polymer thick film silver ink showed 40% to as much as 70% reductions in resistivity when printed on the composite substrate of DuPont™ Hytrel® 3078 coated with polyurethane as compared to those printed directly on DuPont™ Hytrel® 3078. Resistivity of a single coating of printed ink was stable for conductors printed on the composite substrate while those printed directly on Hytrel® 3078 showed unstable resistivity until two or three coatings were applied. In addition, with the composite substrate there was no evidence of ink solvent damage. No swelling or blistering was observed.

Polymer thick film silver ink did not print well directly on TPU Covestro PT6410S. When printed on the composite substrate of Covestro PT6410S coated with polyurethane the resistance was lowered 70% compared to that printed directly on Covestro PT6410S.

EXAMPLES AND COMPARATIVE EXPERIMENTS

EXAMPLE 1 AND COMPARATIVE EXPERIMENT A

For Example 1, a 2 mil film of DuPont™ Hytrel® 3078 TPC-ET was mounted on a PET carrier using a low tack adhesive. The exposed side of the DuPont™ Hytrel® film was subjected to a corona treatment of 5 kw/cm² and an aqueous-based dispersion was used to apply a polyurethane coating at a rate of 4 g of coating per square meter of DuPont™ Hytrel® film using a drawbar. The coating was cured at between 80°C and 110°C for 30 seconds. DuPont™ PE873 conductive, elastic silver paste was screen printed onto the treated surface and cured

at 130°C for 15 min. Thickness and resistance were measured and resistivity was calculated as 33 mohm/sq/mil.

- Comparative Experiment A was carried out as described for Example 1 except that untreated DuPont™ Hytrel® film was used, i.e.
- 5 there was no corona treatment or polyurethane coating. The resistivity for the same silver paste screen printed on the untreated DuPont™ Hytrel® 3078 was 65 mohm/sq/mil

EXAMPLE 2 AND COMPARATIVE EXPERIMENT B

- For Example, 2, a 1 mil film of an ester based, high stretch
- 10 recovery thermoplastic polyurethane with a durometer of 74A, and a melt point of 150°C was mounted on a polypropylene carrier with a 3 mil melt adhesive. The exposed surface of the polyurethane film was subjected to a corona treatment of 5 kw/cm² and an aqueous-based dispersion was used to apply a polyurethane coating at a rate of 1 g of coating per square
- 15 meter of polyurethane film in a roll-to-roll process. The coating was cured at between 80°C and 110°C for 30 seconds. DuPont™ PE873 conductive, elastic silver paste was screen printed onto the treated surface and cured at 130°C for 15 min. Thickness and resistance were measured and resistivity was calculated as 22 mohm/sq/mil.

- 20 Comparative Experiment B was carried out as described for Example 2 except that untreated polyurethane film was used, i.e. there was no corona treatment or polyurethane coating. The resistivity for the same silver paste screen printed on the untreated polyurethane was 51 mohm/sq/mil.

EXAMPLE 3 AND COMPARATIVE EXPERIMENT C

- For Example 3, a 3 mil film of an ether based, high stretch recovery thermoplastic polyurethane with a durometer of 71A, and a minimum softening point of 140°C was mounted on a silicone treated paper carrier with a 1 mil melt adhesive. The exposed surface of the polyurethane film
- 30 was subjected to a corona treatment of 5 kw/cm² and an aqueous-based dispersion was used to apply a polyurethane coating at a rate of 1 g of coating per square meter of polyurethane film in a roll-to-roll process. The coating was cured at between 80°C and 110°C for 30 seconds. DuPont™

PE873 conductive, elastic silver paste was screen printed onto the treated surface and cured at 130°C for 15 min. Thickness and resistance were measured and resistivity was calculated as 58 mohm/sq/mil.

Comparative Experiment C was carried out as described for Example 3 except that untreated polyurethane film was used, i.e. there was no corona treatment or polyurethane coating. The resistivity for the same silver paste screen printed on the untreated polyurethane was also 58 mohm/sq/mil. However, 18% of the parts printed on the untreated film failed resistance testing as open circuits. Treated film yielded no failed parts. As seen in Figure 1A the untreated polyurethane 1 has silver prints 2 that contain many pinhole defects 3. For clarity only two such pinholes have been denoted but numerous other pinholes are evident. As seen in Figure 1B the treated polyurethane 11 has silver prints that show more uniform silver coverage.

15 **EXAMPLE 4 AND COMPARATIVE EXAMPLE D**

For Example 4, a 1 mil film of an ester based, high stretch recovery thermoplastic polyurethane with a durometer of 74A, and a melt point of 150°C was mounted on a polypropylene carrier with a 3 mil melt adhesive. The exposed surface of the polyurethane film was subjected to a corona treatment of 5 kw/cm² and an aqueous-based dispersion was used to apply a polyurethane coating at a rate of 1 g of coating per square meter of polyurethane film in a roll-to-roll process. The coating was cured at between 80°C and 110°C for 30 seconds. DuPont™ PE873 conductive, elastic silver paste was screen printed onto the treated surface and cured at 130°C for 15 min. The 6" gauge length silver prints were repeatedly stretched between 0% and 40% strain at a rate of 20 in/min, 300 times. Resistance of the specimens was measured by a four-point probe method continuously during the stretching. The maximum and minimum resistance in each 0%-40%-0% cycle was recorded.

30 Comparative Experiment D was carried out as described for Example 4 except that untreated polyurethane film was used, i.e. there was no corona treatment or polyurethane coating. The silver prints were

subjected to the same strain procedure and resistance measurements as those on the treated surface.

The maximum and minimum resistance in each strain cycle for the silver on the treated surface and that on the untreated surface is shown in

- 5 Figures 2 and 3. Maximum resistance increases more slowly with cycle number for the silver on the treated surface than for the silver on the untreated surface. Minimum resistance in each cycle also increases more slowly in the treated sample and, unlike the untreated sample, the resistance of the treated sample recovers to a resistance of less than
- 10 100 ohms.

CLAIMS

What is claimed is:

- 5 1. An article comprising:
- a) an elastomer or thermoplastic elastomer polymer film;
 - b) an elastomer or thermoplastic elastomer coating on
one side of the polymer film, wherein there is between
1 and 50 g of coating per square meter of polymer film
10 and wherein the coating has been formed from either a
solvent solution or a water-based dispersion; and
 - c) an elastic, electrical conductor deposited on the
coating.
- 15 2. The article of claim 1, wherein the polymer of the thermoplastic
elastomer polymer film is selected from the group consisting of
thermoplastic polyurethane, thermoplastic polyester and
thermoplastic polyether, wherein the thermoplastic elastomer
coating is a thermoplastic polyurethane coating formed from a
20 water-based thermoplastic polyurethane dispersion, and wherein
the elastic, electrical conductor is formed from a polymer thick film
silver paste.
- 25 3. The article of claim 1, wherein the polymer film has been subjected
to a corona or plasma treatment prior to the deposition of the
coating.
- 30 4. The article of claim 1, wherein the side of the polymer film without
the coating is adhered to a carrier film comprising polypropylene,
polyethylene terephthalate (PET), silicone treated paper,
polypropylene, a polypropylene/polyethylene copolymer or polyvinyl
fluoride.

5. A method for preparing an article containing a printed electrical circuit, the method comprising:
- a) providing an elastomer or thermoplastic elastomer polymer film;
 - 5 b) using a solvent solution of or a water-based dispersion of an elastomer or thermoplastic elastomer to deposit a coating onto one side of the polymer film wherein there is between 1 and 50 g of coating per square meter of polymer film; and
 - 10 c) depositing an elastic conductive ink on the coating and drying the elastic conductive ink to form the printed circuit.
6. The method of claim 5, wherein the polymer of the thermoplastic elastomer polymer is selected from the group consisting of
- 15 thermoplastic polyurethane, thermoplastic polyester and thermoplastic polyether and wherein the thermoplastic elastomer coating is a thermoplastic polyurethane coating formed from a water-based thermoplastic polyurethane dispersion and wherein the
- 20 polymer film has been subjected to a corona or plasma treatment prior to step b).
7. The method of claim 5, further comprising:
- 25 providing a carrier film comprising polypropylene, polyethylene terephthalate (PET), silicone treated paper, polypropylene, a polypropylene/polyethylene copolymer or polyvinyl fluoride and
- 30 attaching the side of the elastomer or thermoplastic elastomer polymer film without the coating to the carrier film.

8. A composite substrate comprising:
- a) an elastomer or thermoplastic elastomer polymer film;
and
 - b) an elastomer or thermoplastic elastomer coating on
one side of the polymer film, wherein there is between
1 and 50 g of coating per square meter of polymer film
and wherein the coating has been formed from either a
solvent solution or a water-based dispersion.
9. The composite substrate of claim 8, wherein the polymer of the
thermoplastic elastomer polymer film is selected from the group
selected consisting of thermoplastic polyurethane, thermoplastic
polyester and thermoplastic polyether and wherein the
thermoplastic elastomer coating is a thermoplastic polyurethane
coating formed from a water-based polyurethane dispersion and
wherein the polymer film has been subjected to corona or plasma
treatment prior to the deposition of the polyurethane coating.
10. The composite substrate of claim 8, wherein the side of the polymer
film without the coating is adhered to a carrier film comprising
polypropylene, polyethylene terephthalate (PET), silicone treated
paper, polypropylene, a polypropylene/polyethylene copolymer or
polyvinyl fluoride.

1/2

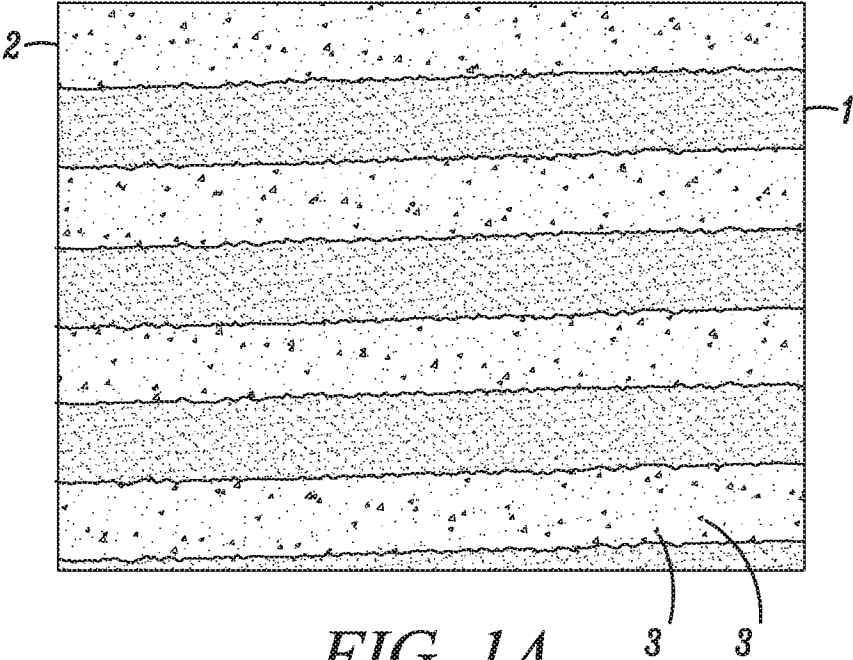


FIG. 1A

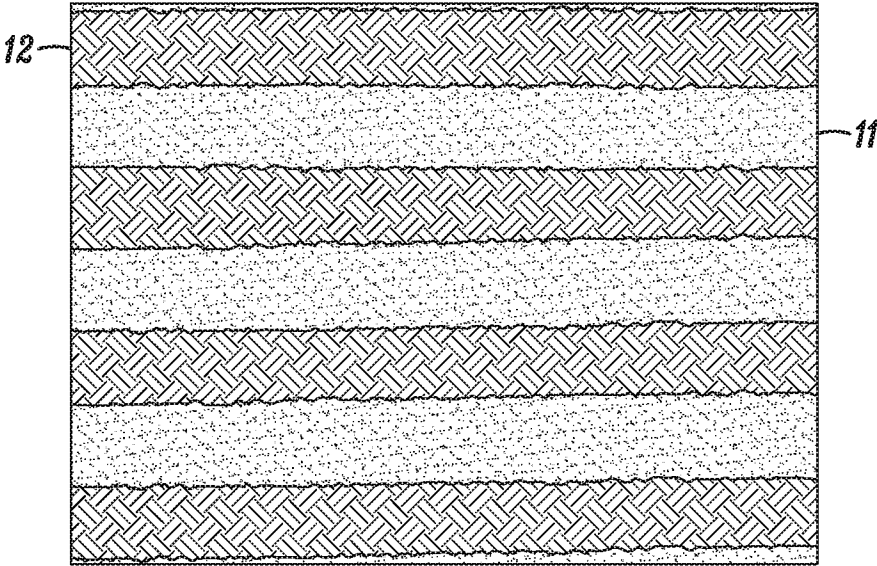


FIG. 1B

2/2

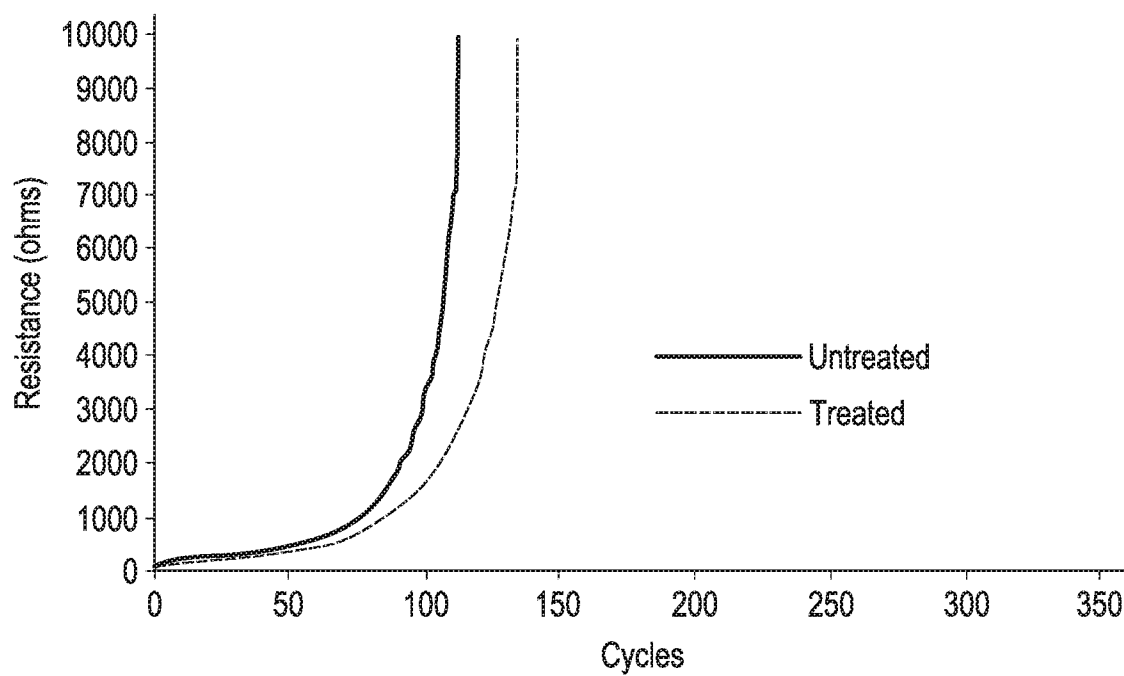


FIG. 2

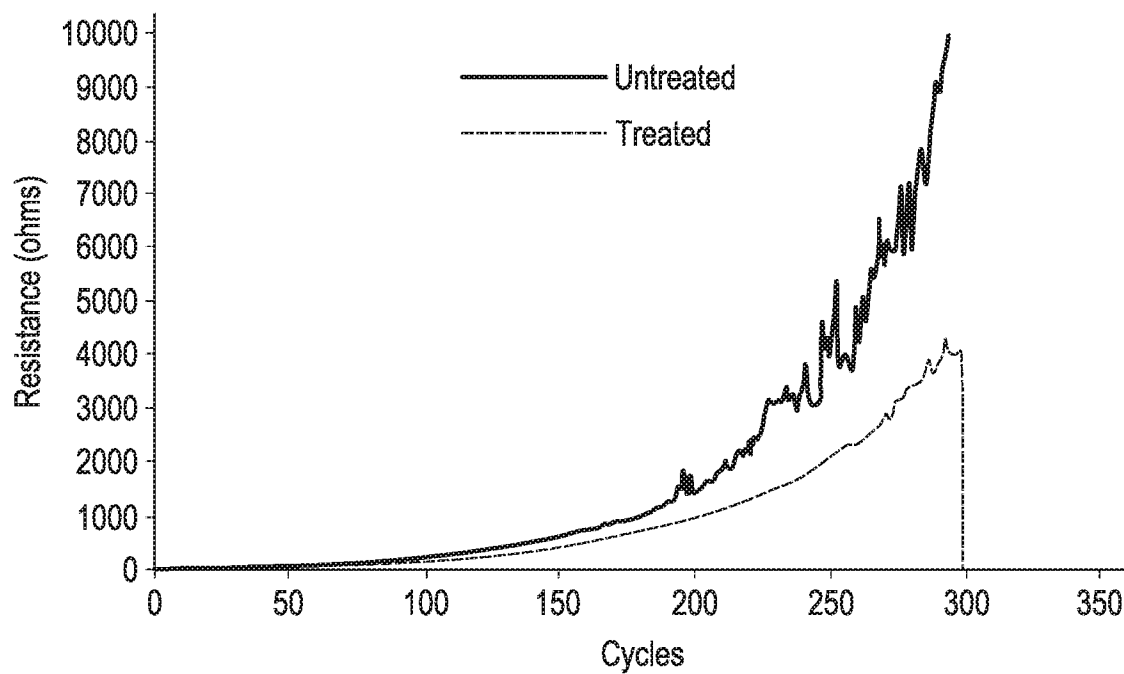


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2017/059258

A. CLASSIFICATION OF SUBJECT MATTER

INV. C08J7/04 H05K3/12 H05K1/03
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C08J H05K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2016/073465 A1 (DU PONT [US]) 12 May 2016 (2016-05-12) page 1, paragraph 1; claims page 3, line 22 - page 4, line 5 page 7, lines 14-17 page 8, line 10 - page 9, line 22 -----	1-10
A	WO 2012/028686 A2 (BAYER MATERIALSCIENCE AG [DE]; SUGANUMA KATSUAKI [JP]; NOGI MASSAYA [J]) 8 March 2012 (2012-03-08) paragraphs [0007], [0012], [0034], [0038], [0040], [0044]; claims 1,2,5-7,12 -----	1-10
X	WO 2015/174505 A1 (NAT INST OF ADVANCED IND SCIEN [JP]) 19 November 2015 (2015-11-19)	8-10
A	paragraphs [0001], [0021], [0030], [0054]; claims 1,10 -/-	1-7



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 February 2018

Date of mailing of the international search report

26/02/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Pamies Olle, Silvia

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/059258

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	& EP 3 145 283 A1 (NAT INST ADVANCED IND SCIENCE & TECH [JP]) 22 March 2017 (2017-03-22)	8-10
A,P	paragraphs [0001], [0021], [0030], [0054]; claims 1,10 -----	1-7
A	EP 3 035 771 A1 (CONTITECH AG [DE]) 22 June 2016 (2016-06-22) paragraphs [0001], [0017], [0019], [0029], [0031]; claims 1,2,5,13 -----	1-10
X	WO 2016/145309 A1 (HARVARD COLLEGE [US]) 15 September 2016 (2016-09-15)	8-10
A	paragraphs [0004] - [0009], [0027], [0031], [0033], [0037], [0038], [0057], [0059], [0071], [0072]; claims 1,2,6,7,19-22,49,50,52,61,67,69,71,76,80; figures 4A-4B -----	1-7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/059258

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2016073465 A1	12-05-2016	CN 107001686 A EP 3216029 A1 JP 2017533333 A US 2016130471 A1 WO 2016073465 A1	01-08-2017 13-09-2017 09-11-2017 12-05-2016 12-05-2016
WO 2012028686 A2	08-03-2012	JP 5570353 B2 JP 2012054192 A WO 2012028686 A2	13-08-2014 15-03-2012 08-03-2012
WO 2015174505 A1	19-11-2015	EP 3145283 A1 JP WO2015174505 A1 KR 20160147921 A US 2017153152 A1 WO 2015174505 A1	22-03-2017 20-04-2017 23-12-2016 01-06-2017 19-11-2015
EP 3035771 A1	22-06-2016	DE 102014226210 A1 EP 3035771 A1	23-06-2016 22-06-2016
WO 2016145309 A1	15-09-2016	NONE	