



(22) Date de dépôt/Filing Date: 2013/10/08  
(41) Mise à la disp. pub./Open to Public Insp.: 2014/04/19  
(45) Date de délivrance/Issue Date: 2020/03/10  
(30) Priorité/Priority: 2012/10/19 (DE10 2012 110 010.1)

(51) Cl.Int./Int.Cl. *C21D 9/573* (2006.01),  
*C22F 1/00* (2006.01)  
(72) Inventeur/Inventor:  
NOE, ANDREAS, DE  
(73) Propriétaire/Owner:  
BWG BERGWERK- UND WALZWERK-  
MASCHINENBAU GMBH, DE  
(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : APPAREIL ET PROCEDE POUR TRAITEMENT CONTINU D'UNE BANDE METALLIQUE  
(54) Title: APPARATUS AND METHOD FOR CONTINUOUSLY TREATING METAL STRIP

**(57) Abrégé/Abstract:**

The invention relates to an apparatus for continuously treating metal strip (1), in particular metal strip made of aluminum, an aluminum alloy, a nonferrous metal, or a nonferrous-metal alloy, having at least one heat-treatment device (2) through which the metal strip (1) is passed without contact and having a strip centering device (7) that can adjust the position of the metal strip (1) within the strip-travel plane and transverse to the strip-travel direction. The heat-treatment device (2) has at least one heating zone (3) at the upstream inlet end and one cooling zone (4) at the downstream outlet end. According to the invention, the strip centering device (7) is arranged within the cooling zone (4).

**Abstract:**

The invention relates to an apparatus for continuously treating metal strip (1), in particular metal strip made of aluminum, an aluminum alloy, a nonferrous metal, or a nonferrous-metal alloy, having at least one heat-treatment device (2) through which the metal strip (1) is passed without contact and having a strip centering device (7) that can adjust the position of the metal strip (1) within the strip-travel plane and transverse to the strip-travel direction. The heat-treatment device (2) has at least one heating zone (3) at the upstream inlet end and one cooling zone (4) at the downstream outlet end. According to the invention, the strip centering device (7) is arranged within the cooling zone (4).

## APPARATUS AND METHOD FOR CONTINUOUSLY TREATING METAL STRIP

5                   The invention relates to a apparatus for continuous treatment of metal strip, in particular a metal strip made of aluminum (or an aluminum alloy) or nonferrous metal (or a nonferrous-metal alloy), comprising at least one heat-treatment device through which the metal strip is passed without contact, and comprising a strip centering device that controls the position of the metal strip within and transverse to the strip-travel plane with or without feedback, the heat-treatment device having at least one heating zone on the upstream inlet end and one cooling zone on the downstream outlet end. The metal strip preferably has a thickness of 0.1 mm to 6 mm.

10

15

                  The heat-treatment device is preferably a noncontact tunnel furnace having a heating zone and a cooling zone. The heating zone usually consists of a plurality of heating subzones (heating and/or holding zones) and the cooling zone usually consists of a plurality of cooling subzones. In such a heat-treatment device, the metal strip is heated to a certain (target) temperature, optionally held at this temperature for a certain period of time and then cooled again. The strip passes through the furnace without contact by suspending the strip between fluid jets from nozzles supplied with appropriately pressurized fluid. The cooling in the cooling zones may be done by air or water or a combination of air and water. Such noncontact tunnel furnaces having a

20

25

heating zone at one end and a cooling zone at the other end are known (see DE 198 04 184 [US 6,413,470] for example).

Such an apparatus of the above-described type for continuously treating metal strip comprising a heat-treatment device and/or a noncontact tunnel furnace may be, for example, an annealing line and/or a continuous annealing line in which the metal strip is heat treated for metallurgical purposes, for example, to achieve certain strength and deformation properties. Alternatively, however, the apparatus may be a strip-coating system and/or a strip-coating line in which the metal strip is not heat treated for the purpose of annealing but instead to dry a coating on the strip, so that the furnace is then a continuous dryer.

The metal strip is preferably an aluminum strip or a nonferrous metal strip with a thickness of 0.1 mm to 6 mm.

In annealing lines, for example, the metal strip is heated to temperatures approaching the melting point, so it is usually necessary to set a relatively low tension in the heat-treatment device to prevent the strip from rupturing. The strip tension is dissipated in a tension roller set at the upstream intake end, for example, and then after cooling, it is built up again at the downstream outlet end at another tension roller set. In the heat-treatment device (noncontact tunnel furnace), the specific strip tension amounts to 0.5 to 1 MPa, for example. The strip may "run off center" in particular at low tension in the furnace, for example, due to strip defects, if any, so it is necessary to position the strip in a suitable manner with the help of a strip adjuster, preferably positioning the strip centrally. Consequently, the

positioning of the strip is performed transverse to the strip-travel direction and within the strip-travel plane. Such a strip centering device usually has at least one control roller as well as suitable position sensors (e.g. strip edge detectors). With the systems known in practice, the strip centering device is downstream of the heat-treatment device, i.e. downstream of the cooling zone. The control roller in practice is usually embodied as a so-called PI strip center regulation, i.e. using a proportional P-component and an integral I-component. The I-component is in the furnace, thereby preventing the strip from running too much off center in the furnace. The control roller usually sits on a movable base frame, which causes the roller to rotate about an imaginary center of rotation and/or about an imaginary axis of rotation situated within the furnace section, where it is perpendicular to the strip-travel plane. Detection of displacement of the roller out of the central axis of the furnace section is the proportional amount while the measure of the skewed position of the roller is the integral amount of the strip center regulation. With the roller positioned at a skewed angle, the strip travels back in the direction of the center of the strip due to the so-called winding effect. Such systems that are known in practice have proven to be fundamentally suitable.

A system of the type defined in the introduction is known from DE 103 37 502, for example. A deflecting roller that serves to control the center of the strip is provided downstream of the furnace having heating zones and cooling zones.

In practice there is a need for more efficient and more productive continuous annealing lines due to the rapidly growing demand for automotive body sheets made of aluminum.

5 To achieve higher production capacities, the strip passes through the treatment section at a higher rate. However, since only a limited heat can be imparted to the strip in each furnace zone, it follows from this that the heat-treatment device would have to be designed with a greater length for a

10 higher production capacity. Since the strip runs off center in the furnace section more easily due to the low strip tension, there is the risk with long furnace lengths that the known strip centering devices will no longer be sufficient to keep the strip travel stable in the furnace, so there is the

15 risk of the strip running off center laterally and/or running up against the furnace structure. This could then lead to unwanted damage to the strip or to a rupture of the strip, so systems with an increased production capacity cannot be readily implemented in this way. This is where the present

20 invention begins.

The object of the present invention is to create an apparatus for continuously treating metal strip of the above-described type that is characterized by improved strip-position control and guarantees satisfactory running of the

25 strip, especially in lengthy furnace zones.

To solve this problem, the invention teaches that in the case of a generic apparatus for continuously treating metal strip, the strip centering device is within the cooling zone. The cooling zone is therefore preferably divided into

at least one first cooling subzone and one subsequent second cooling subzone spaced from the first one such that the strip centering device is between the first cooling subzone and the second cooling subzone. According to the invention the strip centering device is consequently no longer downstream of the outlet end of the heat-treatment device and consequently no longer downstream of the last cooling subzone but instead it is integrated into the cooling zone in that the latter is preferably divided into at least two cooling subzones. In a first section the strip is cooled down to the extent that it can easily pass through the strip centering device. The strip centering device is therefore downstream of the first cooling subzone. The strip next passes through the second cooling subzone and consequently the second part of the cooling zone so that the strip can then be cooled down to the desired final temperature. It is possible in this way on the whole to work with a long furnace and therefore with long heating and cooling zones, so that the production capacity is increased without having to significantly increase the free strip length in the region of low strip tension. An unacceptable off-center running of the strip in the furnace is therefore reliably prevented in this way.

The strip centering device itself may be designed in the traditional way and consequently traditional approaches may be used. According to the invention, the special positioning of the strip centering device within the furnace section and/or within the cooling zone is important.

The strip centering device may thus have a traditional adjustable deflecting roller, e.g. a 90°

deflecting roller for strip position control, for example, and/or may be designed as such. However, it is advisable to provide the deflecting roller with a suitable (high) temperature-resistant coating because the temperature of the strip between the first cooling zone and the second cooling zone is preferably 100°C to 200°C, especially preferably 120°C to 150°C. As an alternative to a 90° control roller, it is possible to work with a different type of strip center control, for example, with the help of a multiroller control apparatus, for example a three-roller adjusting apparatus or a control driver (e.g. a pair of rollers). Again in this case, suitable coatings are preferably provided. The strip-position control and/or the strip center control is/are designed as PI regulation in a manner that is basically known. Consequently, the control roller and/or the multiroller arrangement sits on a movable base frame in a manner that is fundamentally known. This frame causes the roller(s) to rotate about an imaginary center of rotation that in turn is in the furnace. The extent of displacement of the roller out of the central axis of the furnace section is the proportional amount, while the extent of skewed position of the roller is the integral component of the strip center control.

As an alternative, the strip centering device may be a strip centering device that operates without contact. To do so, the strip center control may be accomplished in a noncontact manner, for example, by linear motors. It is fundamentally possible here to use known arrangements for influencing the metal strip with the help of linear motors as described in DE 197 19 994 [US 5,964,114], for example.

The strip-treating apparatus preferably has a first set of tension rollers at the upstream inlet end upstream from the heat-treatment device to reduce the strip tension.

5 Furthermore, there is an additional set of tension rollers at the downstream outlet end downstream of the heat-treatment device, such that the strip tension is increased again with this set of tension rollers so that additional process steps may then follow, e.g. straightening, cleaning or edge trimming.

10 It is optionally within the scope of the invention that an (additional) set of tension rollers is provided between the first cooling subzone and the second cooling subzone downstream of the strip centering device to increase the strip tension on both sides of this location. This has 15 the advantage that the strip may pass through the second part of the cooling zones with a somewhat elevated strip tension. Again in this case, it is advantageous to provide the rollers of such a roller set with appropriate temperature-resistant coatings. According to the invention, it is important that 20 strip-position control is effected between the first cooling subzone and the second cooling subzone. It may optionally be advantageous to provide an additional strip centering device downstream of the second cooling subzone. This may be 25 advantageous in particular if an additional set of tension rollers is not provided between the first cooling subzone and the second cooling subzone so that the system works with a lower strip tension in the second cooling subzone. If a set of tension rollers is provided between the two cooling subzones and as a result the strip tension is already

increased at this point, it may be possible to omit a second strip centering device downstream of the second cooling subzone.

Dividing the cooling zone into two cooling subzones has the result that the two cooling subzones are (substantially) shorter than a corresponding uniform cooling subzone. The entire heat-treatment device can be lengthened in comparison with traditional systems in this way, i.e. the heating zone may be lengthened and the total cooling zone may also be lengthened.

The subject matter of the present invention is also a method for continuously treating a metal strip using an apparatus of the type defined in the introduction such that the metal strip is guided through the heating zone and the cooling zone without contact during this thermal treatment. This method is characterized in that the position of the metal strip (within the strip-travel plane and transverse to the strip-travel direction) is controlled or regulated with a strip centering device arranged within the cooling zone.

As already described, such a strip centering device is preferably equipped with suitable sensors and a feedback loop so that there is accurate control of the strip position. However, embodiments that work without measurement and/or without feedback and in which the strip position is just controlled but there is no feedback control are fundamentally also covered by the invention.

The first cooling subzone is preferably of such a length that the temperature of the metal strip is up to 200°C, for example 100°C to 200°C, between the first cooling subzone

5 and the second cooling subzone and consequently at the strip centering device. The temperature is especially preferably up to 150°C, for example 120°C to 150°C. The length of a second cooling subzone may thus be such that the strip is discharged at a temperature of up to 70°C, for example preferably up to 60°C, for example 40°C to 60°C, so that additional process steps, for example straightening, cleaning or edge trimming 10 may be carried out with no problems.

10 The system according to the invention may be an annealing line, for example, or as a component of an annealing line. The heat-treatment device is then an annealing furnace. Alternatively the system may be a strip-coating system or part of a strip-coating system. The heat-treatment device is a dryer and/or a dryer furnace. In both cases the 15 furnaces/dryers are preferably noncontact tunnel furnaces.

The present invention is illustrated in greater detail below with reference to a drawing that shows embodiments, in which:

20 FIG. 1 is a simplified schematic view of a prior-art strip-treating apparatus according to the prior art,

FIG. 2 is a simplified schematic diagram of a strip-treating apparatus according to the invention, and

FIG. 3 shows a modified embodiment of the system of FIG. 2.

25 To illustrate the idea according to the invention, it is advantageous to first consider again the prior art according to FIG. 1. FIG. 1 shows a known strip-treating apparatus for continuously treating metal strip, namely thermal treatment. This apparatus has a heat-treatment device

2 designed as a noncontact tunnel furnace. The metal strip 1 passes through this noncontact tunnel furnace 2 in a noncontact process, in that the strip is suspended between pressurized air issuing from upper jets and lower jets. No 5 details are shown here. The noncontact tunnel furnace 2 has a heating zone 3 at the upstream inlet region and a cooling zone 4 at the downstream outlet region. The heating zone is usually comprised of multiple heating subzones 3', and the cooling zone is usually comprised of multiple cooling subzones 4' such that the individual subzones are controllable 10 individually, i.e. separately. The metal strip is usually heated with the help of air in the heating zones, so that the jets, for example the lower jets, can also assume the temperature-control function in addition to a support 15 function. The cooling in the cooling zones is usually also performed by air or by a combination of air and water. In the case of an annealing line for aluminum strips for automotive use, the target temperature in the heating zone is approximately 550°C to approximately 570°C, for example. The 20 heating zones therefore comprise heating and holding zones. It can be seen that the system has a set of tension rollers 5 at the upstream inlet end with which the strip tension is reduced to a specific strip tension of 0.5 to 1 MPa, for example. Downstream of the noncontact tunnel furnace 2 and/or 25 downstream of the last cooling subzone, the metal strip 1 is maintained at a centered position with the help of a strip centering device 7, i.e. the position of the metal strip is adjusted within the strip-travel plane and transverse to the strip-travel direction. Then the strip tension is again

increased to the usual line level of specifically 10 to 20  
5 MPa, for example by a set of tension rollers 6 at the  
downstream outlet end. Because of the low specific strip  
tension within the noncontact tunnel furnace, it is necessary  
to center the metal strip 1 with the help of the strip  
centering device 7.

To increase the production capacity of such a system  
as that shown in FIG. 1, it is necessary to lengthen the  
noncontact tunnel furnace. With the state-of-the-art system  
10 shown in FIG. 1, there is the risk that, beyond a certain  
length of the noncontact tunnel furnace, the strip centering  
device 7, for example the control roller 8, will no longer be  
sufficient so movement of the strip through the furnace can  
become unstable, with the strip skewing laterally and/or  
15 coming into contact with the furnace structure. This could  
lead to unwanted damage to the strip or even rupture of the  
strip, so that merely lengthening the noncontact tunnel  
furnace is not advisable without taking additional measures.

Therefore, according to the present invention the  
20 strip centering device 7 is no longer downstream of the heat-  
treatment device 2 and consequently is no longer downstream of  
the cooling zone 4 but instead is within the cooling zone 4  
per se. This is shown in FIGS. 2 and 3 that show respective  
embodiments of the invention. FIGS. 2 and 3 in turn show a  
25 strip-treating apparatus having a heat-treatment device 2 that  
in turn has a heating zone 3 in the upstream inlet region and  
a cooling zone 4 in the downstream outlet region. One set of  
tension rollers 5 is again provided at the upstream inlet end,  
and another set of tension rollers 6 may again be provided at

the downstream outlet end, as shown FIG. 3 but not in FIG. 2. The heating zone 3 is in turn made up of multiple heating subzones 3', while the cooling zone 4 is made up of multiple cooling subzones 4'. According to the invention, the cooling zone 4 is divided into two cooling subzones, namely a first cooling subzone 4a and a subsequent second cooling subzone 4b. The strip centering device 7 is according to the invention between the first cooling subzone 4a and the second cooling subzone 4b. The metal strip is heated to the desired 5 temperature in the heating zone 3 with the heating and holding subzones 3' by a known method, and this temperature can then be maintained over a desired period of time. The heating zone 3 need not be modified subsequently in comparison with the prior art - except for lengthening it. Then the first cooling 10 subzone 3a immediately downstream of the heating zone 3 cools the metal strip in a first step, preferably to a temperature of 100°C to 200°C, for example 120°C to 150°C. After emerging from the first cooling subzone 4a, the strip is centered with the help of the strip centering device 7. In the embodiment 15 according to FIG. 2, it has a 90° control roller 8. In the embodiment according to FIG. 2, this is followed by another set of tension rollers 9 to increase the strip tension. Then the strip passes through the second cooling subzone 4b, so that it is cooled down to the desired final temperature of 20 40°C to 60°C, for example. It is possible to increase production capacity in this way without significantly lengthening the free strip length, thereby avoiding an inadmissible strip wandering in the furnace. Another strip 25 centering device and/or another set of tension rollers may

then follow the second cooling subzone 4b. This is not illustrated in FIG. 2.

FIG. 3 shows a modified embodiment of the invention in which the strip centering device 7 is a three-roller strip center control with three rollers 10. Furthermore, FIG. 3 shows that another strip center adjusting apparatus 11 and another set of tension rollers 6 may be downstream of the second cooling subzone 4b. The additional strip center control 11 downstream of the second cooling subzone 4b is appropriate because with this embodiment no set of tension rollers is arranged between the cooling zones 4a and 4b and therefore the second section 4b also operates at a lower strip tension.

To compare FIGS. 1 and 2, for example, it can be seen that the furnace subzones 3', 4' in the embodiment according to the invention have a length greater than the length in the known embodiment according to FIG. 1 on the whole. Nevertheless, the free strip length is not greater because the strip center control 7 follows the first cooling subzone 4a. Thus the heating zone 3 and the cooling zone 4 can both be lengthened significantly in comparison with the prior art. However, this division of the cooling zone 4 results in cooling subzones 4a, 4b that are (substantially) shorter than the heating zone 3.

**CLAIMS:**

1. An apparatus for continuously treating strip of aluminum, an aluminum alloy, a nonferrous metal, or a nonferrous-metal alloy, the apparatus comprising:
  - 5 at least one noncontact tunnel furnace having relative to a strip-travel direction
    - an upstream inlet end,
    - a downstream outlet end,
  - 10 a heating zone at the upstream end,
  - a first cooling subzone downstream of the heating zone, and
  - 15 a second cooling subzone spaced downstream in the direction from the first cooling subzone;
  - 15 means for moving the strip through the tunnel in the strip-travel direction;
  - guide means for supporting the strip on movement of the strip in the heating zone and cooling subzones zones in a plane including the strip-travel direction with the strip moving
  - 20 without contact through the heating zone and cooling subzones;
  - and
  - 25 a strip-centering linear motor out of contact with the strip and between the first and second cooling subzones for adjusting a position of the metal strip in the strip-travel plane and transverse to the strip-travel direction.
2. The strip-treating apparatus defined in claim 1, wherein the means for moving include:
  - means upstream of the upstream end for decreasing tension
  - 30 in the strip in the heating and cooling zones; and
  - means downstream of the downstream end for increasing tension in the strip downstream of the downstream end.

3. The strip-treating apparatus defined in claim 1 or 2, further comprising:

5 a second strip-centering linear motor downstream of the second cooling subzone for adjusting a position of the metal strip in the strip-travel plane and transverse to the strip-travel direction.

10 4. A method of continuously treating strip of aluminum, an aluminum alloy, a nonferrous metal, or a nonferrous-metal alloy, the method comprising the steps of:

15 transporting the strip in a strip-travel plane and in a strip-travel direction through a noncontact tunnel furnace having an upstream heating zone, a first downstream cooling subzone and a second downstream cooling subzone spaced in the direction from the first cooling subzone such that the strip is heated in the heating zone and cooled in the first and second cooling subzone;

20 supporting the strip only on a fluid cushion in the noncontact tunnel furnace and keeping the strip out of contact with the furnace; and

25 adjusting a position of the strip in the noncontact tunnel furnace in the strip-travel plane and transverse to the strip-travel direction with a strip-centering linear motor between the first and second subzones and out of contact with the strip to center the strip in the noncontact tunnel furnace.

5. The strip-treating method defined in claim 4, further comprising the steps of:

30 reducing tension in the strip generally at the upstream end; and

increasing tension in the strip generally at the downstream end.

6. The strip-treating method defined in claim 4 or 5, wherein  
5 the strip position is controlled with a PI adjusting method comprising a proportional P component and an integral I component.

7. The strip-treating method defined in any one of claims 4  
10 to 6 wherein at the strip-centering linear motor the strip has a temperature of 100°C to 200°C.

8. The strip-treating apparatus defined in any one of claims 1 to 3, wherein the guide means includes jets in the furnace  
15 forming a fluid cushion underneath and supporting the strip.

1/3

Fig. 1  
State-of-the-art technology

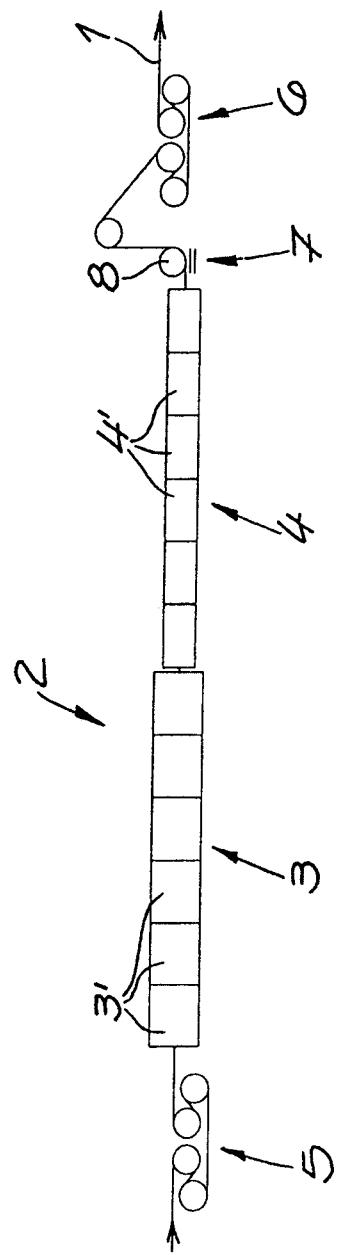


Fig.2

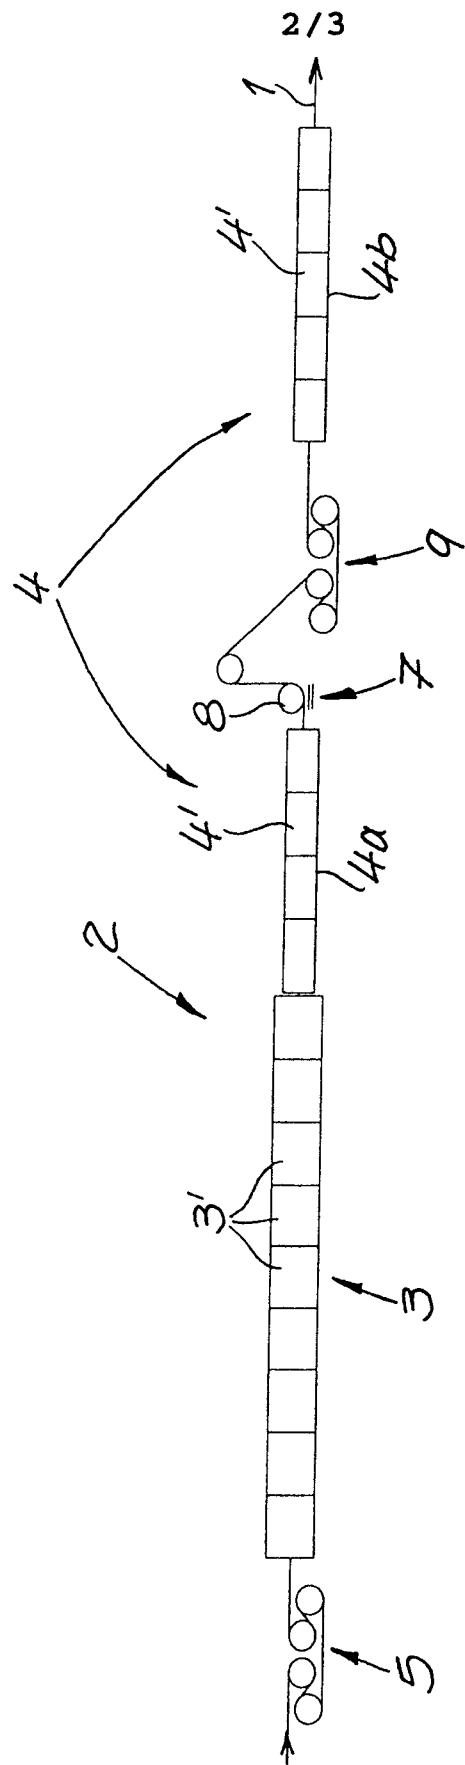


Fig. 3

