(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
10 January 2008 (10.01.2008)

PCT

(10) International Publication Number
WO 2008/005255 A2

(51) International Patent Classification:
H01R 9/05 (2006.01)

(21) International Application Number:
PCT/US2007/014929

(22) International Filing Date: 27 June 2007 (27.06.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/478,863 29 June 2006 (29.06.2006) US

(71) Applicant *(for all designated States except US)*: **CORNING GILBERT INC.** [US/US]; 5310 Camelback Road, Glendale, Arizona 85301 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **BURRIS, Donald A.** [US/US]; 6826 West Sierra Street, Peoria, Arizona 85345 (US). **HENNINGSEN, Jimmy C.** [DK/DK]; Granitvej 3, Fensmark, DK-4684 Holmegaard (DK). **LUTZ, William B.** [US/US]; 5337 West Piute Avenue, Glendale, Arizona 85308 (US). **MILLER, Thomas D.** [US/US]; 6822 West Rowel Road, Peoria, Arizona 85383 (US).

(74) Agent: **HOMA, Joseph M.**; CORNING INCORPORATED, Patent Department, SP-TI-3-1, Corning, New York 14831 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: COMPRESSION CONNECTOR

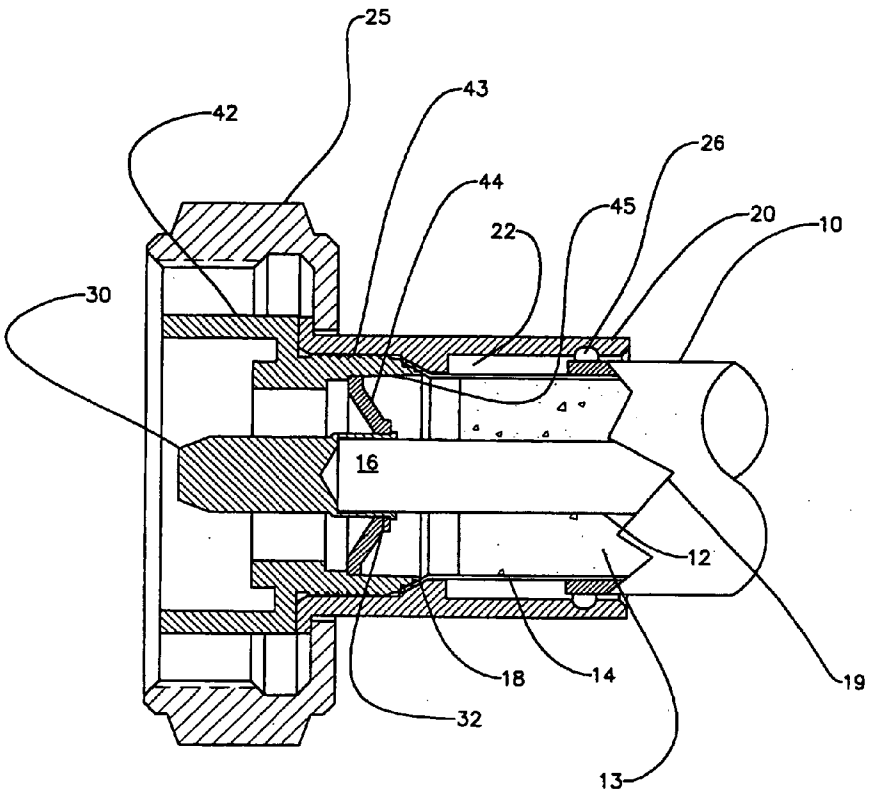

(57) Abstract: A coaxial cable connector assembly is provided wherein a center contact clamping mechanism of the connector assembly is configured to cooperate with a cable adapter and a center contact of the connector assembly such that movement of the clamping mechanism in the direction of the cable adapter results in compression of the center contact about an end portion of the center conductor of the coaxial cable.

WO 2008/005255 A2

European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

COMPRESSION CONNECTOR

BACKGROUND OF THE INVENTION

[0001] The present invention relates generally to coaxial cable connectors and, more particularly to cable connectors configured to provide reliable conductive coupling to the conductive elements of a coaxial cable.

SUMMARY OF THE INVENTION

[0002] Generally, the present invention relates to the provision of a coaxial cable connector that includes a clamping mechanism for compressing a center contact about an end portion of a center conductor of a coaxial cable.

[0003] According to one embodiment of the present invention, a coaxial cable connector assembly is provided wherein a center contact clamping mechanism of the connector assembly is configured to cooperate with a cable adapter and a center contact of the connector assembly such that movement of the clamping mechanism in the direction of the cable adapter results in compression of the center contact about an end portion of the center conductor of the coaxial cable and compression of the center contact about the center conductor is independent of relative movement between the center contact and the center conductor.

[0004] According to another embodiment of the present invention, the center contact clamping mechanism comprises a compressive insulator and a conductive fitting configured to conductively engage the outer conductor of the coaxial cable. A sleeve portion of the center contact defines a tapered cross section and an inner diameter of the compressive insulator is at least as large as the minimum outer diameter of the sleeve and is smaller than the maximum outer diameter of the sleeve.

[0005] According to yet another embodiment of the present invention, the conductive fitting and the compressive insulator cooperate to define a reducible inner diameter. The reducible

inner diameter decreases with movement of the fitting along the axis of the center contact in the direction of the cable adapter.

[0006] According to a further embodiment of the present invention, the center contact clamping mechanism includes a clamping sleeve in addition to an insulator and the conductive fitting. The inner diameter of the clamping sleeve is smaller than the maximum outer diameter of the tapered sleeve portion of the center contact. The clamping sleeve can be urged over the sleeve portion to forcibly compress the sleeve portion about the center conductor of the coaxial cable. For the purposes of describing and defining the present invention, it is noted that the term "about" is recited herein to denote a relationship where one element is positioned to engage the outer surface, or at least a portion of the outer surface of another element, either directly or indirectly.

[0007] According to an additional embodiment of the present invention, a method of electrically coupling a connector assembly according to the present invention to a coaxial cable is provided.

[0008] Additional features and advantages of the invention will be set forth in the detailed description which follows, and in part will be readily apparent to those skilled in the art from that description or recognized by practicing the invention as described herein, including the detailed description, the claims, as well as the appended drawings. For example, the configuration of the connector is environmentally friendly in that it allows for secure, solderless, lead-free coupling of the cable conductors to the contacts of the connector.

[0009] It is to be understood that both the foregoing general description and the following detailed description present embodiments of the invention, and are intended to provide an overview or framework for understanding the nature and character of the invention as it is claimed. The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and constitute a part of this specification. The drawings illustrate various embodiments of the invention and, together with the description, serve to explain the principles and operations of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The following detailed description of specific embodiments of the present invention can be best understood when read in conjunction with the following drawings, where like structure is indicated with like reference numerals and in which:

[0011] **Fig. 1** is a partially assembled view of a connector assembly according to a first embodiment of the present invention;

[0012] **Fig. 2** is a more fully assembled illustration of the connector assembly of **Fig. 1**;

[0013] **Fig. 3** is an assembled illustration of the connector assembly of **Figs. 1 and 2**;

[0014] **Figs. 4A and 4B** illustrate a center contact suitable for use in a connector assembly according to the present invention;

[0015] **Fig. 5** illustrates an alternative center contact suitable for use in a connector assembly according to the present invention;

[0016] **Fig. 6** is a partially assembled view of a connector assembly according to another embodiment of the present invention;

[0017] **Fig. 7** is an assembled illustration of the connector assembly of **Fig. 6**;

[0018] **Fig. 8** is a partially assembled view of a connector assembly according to yet another embodiment of the present invention;

[0019] **Fig. 9** is an assembled illustration of the connector assembly of **Fig. 8**;

[0020] **Figs. 10A and 10B** illustrate a compressive insulator suitable for use in a connector assembly according to the present invention;

[0021] **Fig. 11** is a partially assembled view of a connector assembly according to an additional embodiment of the present invention;

[0022] **Fig. 12** is an assembled illustration of the connector assembly of **Fig. 11**;

[0023] **Fig. 13** is a partially exploded view of a connector assembly according to a further embodiment of the present invention; and

[0024] **Fig. 14** is an assembled illustration of the connector assembly of **Fig. 13**.

DETAILED DESCRIPTION

[0025] Referring initially to **Figs. 1-3**, a connector assembly according to one embodiment of the present invention is illustrated. Generally, connector assemblies according to the present invention are configured to provide an electrically conductive coupling to a coaxial cable **10**. The design particulars of the coaxial cable **10** are beyond the scope of the present invention and, for the purposes of describing and defining the present invention, it is sufficient to note that the cable **10** comprises a center conductor **12**, an outer conductor **14**, and a dielectric **13** disposed there between.

[0026] As will be described in further detail below, the connector assembly comprises a cable adapter **20**, a center contact **30**, and a center contact clamping mechanism **40**. The cable adapter **20** is configured to surround the end portion **15** of the coaxial cable **10** and may include a coupling nut **25** that may be threaded and be configured, for example, to secure the connector assembly to a threaded electrical terminal. The center contact **30** is configured to engage the center conductor **12** of the coaxial cable **10** and define an electrically conductive coupling thereto in the manner illustrated in **Figs. 2 and 3**. The center contact comprises a conductive sleeve portion **32** that at least partially surrounds an end portion **16** of the center conductor **12**. The center contact clamping mechanism **40** is comprised of a conductive fitting **42** and a compressive insulator **44**. In the embodiment illustrated in **Figs. 1-3**, the conductive fitting **42** is configured to engage the cable adapter **20**, securing the clamping mechanism **40** to the end portion **15** of the coaxial cable **10**. **Fig. 1** shows the adapter **20** mounted on the end portion **15** of the coaxial cable **10**.

[0027] Comparing the partially assembled state of **Fig. 2** with the fully assembled state of **Fig. 3**, it is noted that the center contact clamping mechanism **40** is further configured to cooperate with the cable adapter **20** and the center contact **30** such that movement of the clamping mechanism **40** from the partially assembled state illustrated in **Fig. 2** to the assembled state of **Fig. 3**, i.e., along a longitudinal axis **35** of the center contact **30** in the direction of the cable adapter **20**, results in compression of the center contact **30** about the end portion **16** of the center conductor **12**.

[0028] Typically, the center contact clamping mechanism **40** and the cable adapter **20** are configured to define a press-fit engagement. For example, the clamping mechanism **40** may comprise a conductive fitting **42** including a ridged outer surface **43** defining an outside diameter that is slightly larger than the inside diameter of a complementary inner surface **23** of the adapter **20**. Particular embodiments of the present invention will require varying degrees of securement associated with the press fit engagement of the conductive fitting **42** and the cable adapter **20**. For example, it may be necessary to fashion the conductive fitting **42** and the adapter **20** such that a compression tool is required to fully engage the fitting **42** and the adapter **20**. At a minimum, the degree of securement associated with the press fit engagement of the conductive fitting **42** and the cable adapter **20** should be sufficient to ensure the fitting and adapter remain engaged as the cable/connector assembly is removed from the electrical terminal with which it is coupled. According to one embodiment of the

present invention requiring tool-aided engagement of the fitting **42** and adapter **20**, the diameter of the ridged outer surface **43** is about 0.004" larger than the inside diameter of a complementary inner surface **23** and the conductive fitting **42** and the adapter **20** are fabricated from brass or another similar metal and may be plated with, for example, nickel-tin, nickel, silver, chromate, white bronze, a copper-zinc-tin alloy, or any other suitable conductive plating.

[0029] The conductive fitting **42**, the compressive insulator **44**, the center contact **30**, and the adapter **20** may be formed of a variety of materials, it is noted that, at a minimum, significant portions of the conductive fitting **42** and the center contact **30** will need to be formed of an electrically conductive material. In addition, it may be preferable to fabricate the center contact **30** from a relatively pliable conductive material to permit compression of the contact **30** about the center conductor **12** of the cable **10**. It is also noted that the center contact **30** should also be characterized by a suitable degree of rigidity to allow it to effectively couple to a corresponding contact of the conductive terminal to which it is to be coupled. For example, the conductive fitting **42** may be a gold plated, nickel plated, or nickel-tin plated brass fitting. The center contact **30** may also be a gold plated, nickel plated, or nickel-tin plated brass conductor.

[0030] In the embodiment of **Figs. 1-3**, the conductive sleeve portion **32** of the center contact **30** is radially compressible and comprises a tapered section having an outer diameter that increases in the direction of an open end of the sleeve portion **32**. The clamping mechanism **40** comprises a conductive fitting **42** and a compressive insulator **44** that can be lodged within the conductive fitting **42**. The compressive diametrical portion **44D** of the compressive insulator **44** is smaller than an outer diameter defined by the tapered section of the center contact sleeve **32**. Preferably, the point at which the diameter of the tapered section of the contact sleeve **32** begins to increase has a diameter that is roughly the same size as, or slightly smaller than, the inner diameter of the compressive diametrical portion **44D**. However, it is contemplated that the compressive insulator **44** and the tapered section of the sleeve **32** can be sized such that the tapered section begins to increase in diameter from a size that is significantly smaller than the compressive diametrical portion **44D** of the compressive insulator **44**.

[0031] Because the tapered section has at least one diametrical portion having an outer diameter that is larger than the inner diameter of the compressive diametrical portion **44D**, the

tapered section of the center contact sleeve **32** can be radially compressed about the end portion **16** of the center conductor **12** without moving the sleeve along the surface of the center conductor **12**. Stated differently, the compression of the center contact **30** about the center conductor **12** does not require relative axial movement between the center contact **30** and the center conductor **12**. Compression of the center contact **30** is independent of relative movement between the center contact **30** and center conductor **12** in a direction substantially parallel to the longitudinal axis of the center contact **30**.

[0032] Of course, it is contemplated that the configuration of the present invention does permit assembly where the center contact **30** does move along the surface of the center conductor **12**. For example, the contact sleeve **32** could be compressed about the center conductor **12** before the center conductor **12** is fully inserted into the contact sleeve **32**. In which case, engagement of the conductive fitting **42** and the adapter **20** would force the compressed center conductor **12** further into the contact sleeve **32** of the center contact **30**. Similarly, It is contemplated that the configuration of the present invention also permits assembly where the center contact **30** moves along the surface of the center conductor **12** while the contact sleeve **32** is compressed about the center conductor **12**.

[0033] As is noted above, according to one aspect of the present invention, the sleeve **32** may be compressed about the end portion **16** of the center conductor **12** while it remains stationary relative to the center conductor **12**. To do so, the center conductor **12** is first inserted into the sleeve **32**. Subsequently, the compressive insulator **44** is slid over the tapered section of the center contact sleeve **32** in the direction of the increasing diameters of the tapered section of the sleeve **12**. The compressive insulator **44** is sufficiently rigid to ensure that the compressive diametrical portion **44D** of the compressive insulator **44** does not yield to the increasing diameters of the tapered section of the sleeve **32**. Rather, the sleeve **32** yields to the compressive insulator **44**, compressing the sleeve **32** about the center contact **12**. According to this aspect of the present invention, compression of the center contact **12** is achieved without forcibly sliding the center contact sleeve **32** over the center conductor **12** as it is compressed. As a result, substantially all of the force required to slide the compressive insulator **44** over the tapered section of the center contact **30** is translated into compression of the center contact **30** about the center conductor **12**. For the purposes of describing and defining the present invention, it is noted that our use of the term "substantially" in this

context accounts for some loss of force due to friction between the compressive insulator **44** and the contact sleeve **32**.

[0034] The slope and length of the tapered section of the contact sleeve **32** should be selected to ensure sufficient compression of the center conductor **12** and permit proper installation of the connector assembly of the present invention. For example, if the tapered section of the contact sleeve is designed with a slope that is too gradual or a length that is too short, the contact sleeve **32** will not sufficiently compress the center conductor **12**. Conversely, if the tapered section of the contact sleeve is designed with a slope that is too steep and a length that is too long, it may be too difficult to slide the compressive insulator **44** over the contact sleeve **32**. For the purposes of illustration, not limitation, according to one aspect of the present invention, the sleeve **32** defines a depth of about 4-5mm and an inside diameter of about 5mm. The tapered section of the sleeve defines a minimum outside diameter of about 6mm, a maximum outside diameter of greater than about 6-7mm, and a length of about 2-4mm. Other embodiments will have dimensions tailored to different sized cables and/or interfaces.

[0035] As is illustrated in **Figs. 1-3**, the compressive insulator **44** serves multiple purposes within the structure of the connector assembly of the present invention. Specifically, as is noted above, the compressive insulator **44** serves to enhance the degree of conductive coupling between the center contact **30** and the center conductor **12** of the coaxial cable **10** by compressing the contact **30** about the conductor **12**. In addition, the compressive insulator **44** stabilizes the center contact **30** in a proper position relative to the conductive fitting **42**, i.e., concentric with the central axis of the connector assembly. Finally, the compressive insulator **44** serves to isolate electrically the center contact **30** from the conductive fitting **42**. Similar functionality is represented in the other embodiments of the present invention described herein. Significantly, the various connector assembly configurations of the present invention can be configured such that the compressive insulator **44** serves as the sole source of support and electrical isolation within the conductive fitting **42** for the center contact **30**. As a result, according to this aspect of the present invention, the connector assembly presents only one hardware component in addition to the cable adapter **20** and electrically conductive contacts, which contacts are embodied in the center contact **30** and conductive fitting **42**.

[0036] Referring further to the embodiment illustrated in **Figs. 1-3**, it is noted that the outer conductor **14** of the coaxial cable **10** includes a flared end portion **18** that is sandwiched

between the conductive fitting **42** and the adapter **20** when the fitting **42** and adapter **20** are fully engaged. In this manner, the present invention provides a secure electrical coupling between the outer conductor **14** and the conductive fitting **42** and provides mechanical securement of the connector assembly on the cable **10**. Regarding the manner in which the flared end portion is provided, it is noted that the flared end portion **18** can be formed with conventional tooling during installation of the connector assembly. Alternatively, it is contemplated that the flared end portion **18** can be formed prior to installation of the connector assembly, provided the adapter can be subsequently installed over an opposite end of the cable **10** or in some other manner that would not require the adapter **20** to be installed over the cable end portion **15**.

[0037] The connector assembly of the present invention is coupled to the coaxial cable **10** by first preparing the coaxial cable for coupling or providing a prepared coaxial cable **10**. To prepare the coaxial cable **10**, the outermost layer of the cable, i.e., the cable jacket **19**, the outer conductor **14**, and the dielectric **13** are cut to expose the center conductor **12**. Next, the cable jacket **19** is cut again further back along the length of the cable **10** to expose a portion of the outer conductor **14**, as is illustrated in **Fig. 1**. Subsequently, a portion of the cable dielectric **13** is cored out to expose an inner surface of the outer conductor **14**. The exposed portions of the center and outer conductors **12**, **14** may also be exposed to specific cleaning steps to remove nonconductive residue from these conductive elements.

[0038] Referring to **Fig. 1**, once the cable **10** is prepared for coupling, the cable adapter **20** is installed onto the end portion **15** of the cable **10** by disposing the coaxial cable **10** in the throughbore of the adapter **20**. For convenience of illustration, it is noted that the cable adapter **20** can be described as comprising a front end oriented to the left in **Fig. 1**, a rear end oriented to the right in **Fig. 1**, and the inner throughbore extending between the front and rear ends. Care should be taken to ensure that front end of the adapter **20** is sufficiently set back to allow flaring of the outer conductor **14** to form the flared end portion **18** of the outer conductor **14**. Referring to **Fig. 2**, the center contact **30** is coupled to the center conductor **12** by placing the rearward facing opening of the radially compressible tubular rear sleeve **32** over the end portion **16** of center conductor **12** and subsequently sliding the compressive insulator **44** over the tapered section of the sleeve **32**.

[0039] Once the center contact **30** is coupled to the end portion **16** of the center conductor **12**, the conductive fitting **42** can be press fit into secure engagement with the adapter **20** by

sliding the adapter **20** into abutment with the flared portion **18** of the cable **10** and inserting the conductive fitting **42** into the open end portion of the adapter **20**. For the purposes of describing and defining the present invention, it is noted that the conductive fitting **42**, which may also be described as a bushing **42** comprising the ridged outer surface **43**, an internal surface **45**, a front portion with a front end oriented to the left in **Figs. 1-3**, and a rear portion with a rear end oriented to the right in **Figs. 1-3**. The rear portion of the bushing **42** is configured to matingly fit within the inner throughbore of the adapter **20** to engage the inner surface **23** of the adapter **20**. The bushing **42** also defines an internal throughbore extending between the front and rear ends of the bushing **42**. This throughbore includes a relatively small diametrical portion $\mathbf{d_1}$ and a slightly larger diametrical portion $\mathbf{d_2}$. A stepped gradient between the relatively small diametrical portion $\mathbf{d_1}$ and the slightly larger diametrical portion d_2 defines a pair of shoulders, either of which can function as a stop to forward axial movement of the insulator **44** within the fitting **42**. As will be appreciated by those practicing the present invention, the stepped gradient can be configured to define a single shoulder or multiple shoulders of respectively decreasing internal diameters. In addition the diametrical portion $\mathbf{d_2}$ can be configured to define a decreasing taper, as is illustrated in **Figs. 1** and **2**.

[0040] As the conductive fitting **42** is inserted into the open end of the adapter **20**, the ridged outer surface **43** of the fitting **42** engages the inner surface **23** of the adapter **20** in a press-fit engagement, as is described above and illustrated in **Fig. 3**. It is noted that the cable **10**, along with center contact **30**, can be retracted into the adapter **20**, engaging the flared portion **18** of the cable **10** with a complementary flared portion **18** of the adapter **20**, either before the fitting **42** is engaged with the adapter **20** or simultaneous with engagement of the fitting **42** and the adapter **20**.

[0041] The manner in which the connector assembly of the present invention is coupled to the coaxial cable **10** has been illustrated herein with reference to the embodiment of **Figs. 1-3**. However, it is noted that analogous coupling steps will also be effective for the remaining embodiments illustrated herein, with the exception that the compressive insulator 44 is, in some cases, installed over the tapered section of the sleeve **32** as the fitting **42** is engaged with the adapter **20** (see **Figs. 11** and **12**), or after the fitting is engaged with the adapter **20** (see **Figs. 6-9**). In the embodiment of **Figs. 13** and **14**, the compressive insulator is replaced with a clamping sleeve **50** that can be installed over the tapered section of the sleeve 32 as the fitting **42** is engaged with the adapter **20** or after the fitting is engaged with the adapter **20**.

For the purposes of describing and defining the present invention, it is noted that the clamping sleeve **50** may also be referred to as a ferrule and may take a variety of forms in addition to that of a uniform cylindrical sleeve.

[0042] **Figs. 4A** and **4B** illustrate the structure of a center contact **30** according to an aspect of the present invention where one or more longitudinal compression slots **34** are formed in the center contact **30**. The compression slots **34** can be used to help ensure that the sleeve portion **32** can more freely compress about the end portion **16** of the center conductor **12**, and to do so to a degree that might not otherwise be possible if the slots **34** were not present. Although the tapered section of the contact sleeve **32** illustrated in **Figs. 1-4** comprises an increasing outer diameter along the axial direction, it is contemplated that, in another embodiment of the present invention, the tapered section may be alternatively or additionally provided by decreasing the inner diameter of the sleeve **32** in the direction of its open end, as is illustrated in **Fig. 5**.

[0043] As we noted above, the clamping mechanism **40** comprises a conductive fitting **42** and a compressive insulator **44** that can be lodged within the conductive fitting **42**. This lodged state can be enhanced by at least a portion of the compressive insulator **44** having an outer diameter that is larger than the inner diameter of at least a portion of the conductive fitting **42**. In the embodiment of **Figs. 1-3**, the conductive fitting **42** comprises a tapered section **45** having an inner diameter that decreases from a value at least as large as the outer diameter of the compressive insulator **44** to a value as small as or smaller than the outer diameter of the compressive insulator **44**.

[0044] Referring to **Figs. 6** and **7**, the lodged state can be enhanced by alternatively or additionally providing an annular recess **46** in the inner diameter of the fitting **42** and a complementary annular projection **48** on the outside diameter of the compressive insulator **44**. In this configuration, as is illustrated in **Fig. 7**, the compressive insulator **44** can be essentially snap-fit into engagement with the fitting **42** by sliding the annular projection **48** along the inner diameter of the fitting **42** until it is lodged into the space provided by the annular recess 46. In practicing the present invention, it should be clear that the compressive insulator **44** can be lodged within the conductive fitting **42** in a variety of manners including, but not limited to, configurations where the insulator **44** is lodged within the conductive fitting 42 in a nested relationship or via a taper **45** (see **Fig. 1**) or an annular recess **46** provided in an inner diameter of the fitting **42**. In some embodiments such as those shown in **Figs. 6-7**, the end of

the compressive insulator **44** facing away from the cable is deflected radially inwardly as it passes through internal bore of diameter d_1 of fitting **42** and then that end of the insulator deflects radially outwardly and into engagement with fitting **42** in recess **46**. When finally positioned within recess **46**, projection **48** returns to its original diameter, or a fraction of its original diameter, prior to deflection radially inwardly and insertion of **44** into fitting **42**.

[0045] **Figs. 8** and **9** illustrates an alternative embodiment of the present invention where the compressive insulator **44** is configured such that it can be lodged within the conductive fitting **42**. More specifically, the insulator **44** has an outer diameter that is larger than an inner diameter of the fitting **42** and is characterized by a profile and degree of flexibility that allows it to be urged through a relatively small diametrical portion d_1 of the fitting **42** to be introduced into and lodged within a slightly larger diametrical portion d_2 of the fitting **42**. As is illustrated in **Figs. 10A** and **10B**, the compressive insulator **44** may be provided with compression slots **44A** to enhance the diametrical flexibility of the compressive insulator and its ability to be urged through the relatively small diametrical portion d_1 of the fitting **42**. As is the case with the other compressive insulators described above, the tapered section of the contact sleeve **32** illustrated comprises increasing outer diameters and the compressive diametrical portion **44D** of the compressive insulator **44** is smaller than at least a portion of the increasing outer diameters defined by the tapered section of the center contact sleeve **32**. As a result, the compressive insulator can forcibly compress the sleeve portion **32** of the center contact **30** about the center conductor **12** of the axial cable **10** as it is urged along the sleeve portion **32** in the direction of the open end of the sleeve portion **32**.

[0046] In some embodiments such as those shown in **Figs. 8-9**, the end of insulator **44** facing away from the cable is deflected radially inwardly sufficient to allow insulator **44** to pass entirely through the relatively small diametrical portion d_1 of the fitting **42**. In which case, the insulator **44** has the resiliency to deflect radially outwardly to a diameter matching that of the slightly larger diametrical portion d_2 of the fitting **42**, or at least to a diameter that is large enough to allow the end of the insulator **44** facing away from the cable to engage the rearward facing shoulder **49** of the fitting **42**. Stated differently, the compressible outer diameter d_0 of the insulator **44** should be smaller than the relatively small diametrical portion d_1 of the fitting **42** but can be larger than, equal to, or less than the slightly larger diametrical portion d_2 of the fitting **42**. In this manner, as is illustrated in **Figs. 8** and **9**, the shoulder **49** of the

fitting **42** functions as a stop to forward axial movement of the insulator **44** within the fitting **42**.

[0047] **Figs. 11** and **12** illustrate an alternative embodiment of the present invention where the conductive fitting **42** and the compressive insulator **44** cooperate to define a reducible inner diameter d_3. The reducible inner diameter d_3 decreases with movement of the fitting **42** along the axis of the center contact **30** in the direction of the cable adapter **20**. At its largest (see **Fig. 11**), the reducible inner diameter d_3 is at least as large as an outer diameter of the sleeve portion **32**. At its smallest (see **Fig. 12**), the reducible inner diameter d_3 is small enough to enable compression of the sleeve **32** about the center conductor **12**. The conductive fitting **42** comprises a compressible portion **47** having a reducible outer diameter d_4 that is initially larger than an inner diameter d_5 of the cable adapter **20** (see **Fig. 11**). The outer diameter d_4 subsequently decreases as the fitting **42** engages the adapter **20** (see **Fig. 12**). The conductive fitting **42** and the compressive insulator **44** are configured such that a decrease in the reducible outer diameter d_4 of the compressible portion **47** of the fitting **42** causes an inward protrusion **41** of the fitting **42** to engage and maintain contact with the outer surface of the compressive insulator **44** as the fitting **42** engages the adapter **20**.

[0047] As is illustrated in **Figs. 11** and **12**, the compressible portion **47** is configured to define a curved profile but it is contemplated that it may be configured to define any sloped profile or to cooperate with a corresponding sloped or curved profile on the complementary inner surface **23** of the adapter **20** such that the degree of engagement between the inward protrusion **41** of the fitting **42** and the outer surface of the compressive insulator **44** increases as the fitting **42** engages the adapter **20** and is maintained after full assembly. The decrease in the reducible inner diameter d_3 of the compressive insulator **44** compresses the sleeve **32** into mechanical and electrical contact with the center conductor **12**, as is illustrated in **Fig. 12**. In the embodiment shown in **Figs. 11** and **12**, the internal surface of the fitting **42** comprises a shoulder **49**, which provides an axial stop to rearward axial movement of the insulator **44** within the fitting **42**.

[0048] **Figs. 13** and **14** illustrate an alternative embodiment of the present invention where the center contact clamping mechanism **40** includes a clamping sleeve **50** in addition to an insulator **52**, and conductive fitting **42**. As was the case for some of the embodiments described previously, the sleeve portion **32** of the center contact **30** comprises a tapered section. The inner diameter of the clamping sleeve **50** is at least as large as the minimum

outer diameter of the sleeve portion **32** of the center contact **30** and is smaller than the maximum outer diameter of the sleeve portion **32** of the center contact **30**. In this manner, the clamping sleeve **50** can be urged over the sleeve portion **32** to forcibly compress the sleeve portion **32** into contact with the center conductor **12** of the coaxial cable **10**. As is illustrated in **Figs. 10** and **11**, the conductive fitting **42**, the insulator **52**, and the clamping sleeve **50** are configured such that the clamping sleeve **50** can be lodged within the insulator **52** and the insulator **52** can be lodged within the conductive fitting **42**. The portion of the insulator **52** in contact with the internal circumferential surface of the fitting **42** is disposed forward of the clamping sleeve **50** and prevents forward movement of the sleeve **50**.

[0049] For the purposes of describing and defining the present invention, it is noted that reference herein to conductive and insulating materials specifically denotes electrically conductive and electrically insulating materials. Further, it is noted that objects defining inner or outer diameters need not comprise continuous inner or outer diameters. For example, referring to **Fig. 10B**, the compressive insulator **44** illustrated therein can be said to define an outside diameter despite the fact that the periphery of the insulator **44** is discontinuous. It is also noted that a number of elements of the various assemblies of the present invention are assembled in a "lodged" or "nested" relationship. For the purposes of defining and describing the present invention, it is noted that these terms merely require a close fit between the respective elements. The specific degree of precision required to achieve this close fit will vary depending upon the preferences of those practicing the present invention. Preferably, though not a requirement of the present invention, the fit should be close enough to allow convenient device assembly, without the aid of adhesives.

[0050] It will be apparent to those skilled in the art that various modifications and variations can be made to the present invention without departing from the spirit and scope of the invention. Thus it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents. For example, although the center contact clamping mechanism is illustrated herein as a multi-component assembly, it is contemplated that the clamping mechanism can alternatively be formed as a unitary component, in which case the unitary component would be manufactured to include conductive and insulating portions.

[0051] Referring to **Fig. 3**, it is noted that a port may be provided in the cable adapter **20** to enable injection of an electrically insulating sealing material, e.g., silicon, in the adapter gap **22** formed between the adapter **20** and the cable **10**. The port may be provided in a variety of

manners, e.g., by providing a hole in the adapter **20** extending generally perpendicular to the axis of the center contact **30**. In addition, the adapter **20** may be provided with an inner annular recess **22** sized and configured to permit insertion of an o-ring or similar sealing element between the adapter **20** and cable **10**.

[0052] In one set of embodiments, a connector assembly is disclosed herein which is configured to provide an electrically conductive coupling to a coaxial cable comprising a center conductor and an outer conductor, said connector assembly comprising a cable adapter, a center contact, and a center contact clamping mechanism, wherein said cable adapter is configured to at least partially surround an end portion of said coaxial cable, said center contact is configured to conductively engage said center conductor of said coaxial cable and comprises a conductive sleeve portion configured to at least partially surround an end portion of said center conductor, said center contact clamping mechanism is configured to engage said cable adapter so as to secure said cable adapter and said clamping mechanism to said end portion of said coaxial cable, said center contact clamping mechanism is further configured to cooperate with said cable adapter and said center contact such that movement of at least a portion of said clamping mechanism along a longitudinal axis of said center contact in the direction of said cable adapter results in compression of said center contact about said end portion of said center conductor by a compressive member of said center contact clamping mechanism, and said center contact clamping mechanism and said center contact are configured to permit compression of said center contact about said center conductor independent of relative axial movement between said center contact and said center conductor.

[0053] In some embodiments, the conductive sleeve portion of said center contact defines a tapered cross section having an outer diameter that increases in the direction of an open end of said sleeve portion or an inner diameter that decreases in the direction of said open end of said sleeve portion.

[0054] In some embodiments, said compressive member comprises a compressive insulator; and said compressive insulator is configured to stabilize said center contact along a central axis of the connector assembly.

[0055] In some embodiments, said compressive member comprises a conductive fitting and a compressive insulator, and said compressive insulator configured to isolate electrically said center contact from said conductive fitting.

[0056] In some embodiments, said compressive member comprises a conductive fitting and a compressive insulator, and said compressive member is configured such that said compressive insulator serves as the sole source of support and electrical isolation within said conductive fitting for said center contact.

[0057] In some embodiments, said center contact clamping mechanism and said center contact are configured such that said compression is achieved with the center contact and the center conductor in a stationary state relative to each other.

[0058] In some embodiments, said center contact clamping mechanism and said center contact are configured such that said compression is achieved without forcibly sliding the center contact over the center conductor as the center conductor is compressed.

[0059] In some embodiments, said center contact clamping mechanism comprises a conductive fitting and a compressive insulator, and said compressive insulator is lodged within an inner diameter of said conductive fitting and said conductive fitting comprises a tapered cross sectional portion defining an inner diameter that decreases from a value at least as large as an outer diameter of said compressive insulator to a value as small as or smaller than the outer diameter of said compressive insulator in the direction of said open end of said sleeve portion.

[0060] In some embodiments, said center contact clamping mechanism comprises a conductive fitting and a compressive insulator, an inner diameter of at least a portion of said compressive insulator is smaller than an outer diameter of at least a portion of said sleeve portion of said center contact, and an outer diameter of at least a portion of said compressive insulator is larger than an inner diameter of at least a portion of said conductive fitting.

[0061] In some embodiments, said outer conductor of said coaxial cable comprises a flared end portion, and said center contact clamping mechanism and said cable adapter are configured such that said flared end portion is sandwiched between a conductive fitting of said center contact clamping mechanism and said cable adapter.

[0062] In some embodiments, said center contact clamping mechanism comprises a compressive insulator and a conductive fitting configured to conductively engage an outer conductor of said coaxial cable, said sleeve portion of said center contact defines a tapered cross section that defines an outer diameter that increases from a minimum sleeve outer diameter to a maximum sleeve outer diameter in the direction of an open end of said sleeve portion, and an inner diameter of at least a portion of said compressive insulator is at least as large as said minimum sleeve outer diameter and smaller than said maximum sleeve outer

diameter such that said compressive insulator can forcibly compress said sleeve portion of said center contact about said center conductor of said axial cable as it is urged along said sleeve portion in the direction of said open end of said sleeve portion. In some of these embodiments, said compressive insulator, and said center contact are configured such that said compressive insulator can be lodged within said conductive fitting. In some of these embodiments, said compressive insulator is lodged within said conductive fitting in a nested relationship or via a taper or an annular recess provided in an inner diameter of said fitting.

[0063] In some embodiments, said center contact clamping mechanism comprises a compressive insulator and a conductive fitting configured to conductively engage an outer conductor of said coaxial cable, said conductive fitting and said compressive insulator cooperate to define a reducible inner diameter, and said reducible inner diameter decreases with movement of said fitting along said axis of said center contact in the direction of said cable adapter from a size that is at least as large as an outer diameter of said sleeve portion of said center contact. In some of these embodiments, said conductive fitting defines a compressible portion having a reducible outer diameter that can decrease from a size that is larger than an inner diameter defined by said cable adapter to a size that is smaller than said inner diameter of said cable adapter, and said conductive fitting and said compressive insulator are configured such that said reducible inner diameter of said compressive insulator decreases with said compressible portion having a reducible outer diameter of said conductive fitting.

[0064] In some embodiments, said center contact clamping mechanism comprises a clamping sleeve, an insulator, and a conductive fitting configured to conductively engage an outer conductor of said coaxial cable, said sleeve portion of said center contact defines a tapered cross section that defines an outer diameter that increases from a minimum sleeve outer diameter to a maximum sleeve outer diameter in the direction of an open end of said sleeve portion, and an inner diameter of said clamping sleeve is at least as large as said minimum sleeve outer diameter and smaller than said maximum sleeve outer diameter such that said clamping sleeve can forcibly compress said sleeve portion of said center contact about said center conductor of said axial cable as it is urged along said sleeve portion in the direction of said open end of said sleeve portion. In some of these embodiments, said conductive fitting, said insulator, and said clamping sleeve are configured such that said clamping sleeve can be lodged within said insulator and said insulator can be lodged within said conductive fitting.

[0065] In some embodiments, said connector assembly is conductively coupled to said center conductor and said outer conductor of said coaxial cable.

[0066] In another set of embodiments, a connector assembly is disclosed herein for use with a coaxial cable, the coaxial cable comprising a center conductor and an outer conductor, the connector assembly comprising: an adapter comprising a generally cylindrical inner surface, a front portion with a front end, and a rear portion with a rear end, wherein the inner surface defines an inner throughbore configured to receive the coaxial cable; a center contact comprising a body and a generally tubular rear sleeve, wherein the sleeve comprises an internal surface defining a rearward facing opening configured to receive the center conductor of the cable, and wherein the sleeve is radially compressible; a bushing comprising an outer surface, an internal surface, a front portion with a front end, and a rear portion with a rear end, wherein the internal surface defines an internal throughbore, the rear portion is configured to matingly fit within the inner throughbore of the adapter and engage the inner surface of the adapter; and an insulator member configured to contact the bushing and the sleeve, wherein the insulator member and the center contact are configured to compress the sleeve radially inwardly; wherein the rear portion of the bushing and the inner surface of the adapter are configured to compress the outer conductor of the cable.

[0067] In some embodiments, the coaxial cable is disposed in the inner throughbore of the adapter, a portion of the center conductor of the cable is disposed in the rearward facing opening of the center contact, the rear portion of the bushing and the inner surface of the adapter sandwich and compress a portion of the outer conductor of the cable, and the insulator member compresses the sleeve radially inwardly against the center conductor of the cable.

[0068] In another set of embodiments, a connector assembly is disclosed herein for use with a coaxial cable, the coaxial cable comprising a center conductor and an outer conductor, the connector assembly comprising: an adapter comprising a generally cylindrical inner surface, a front portion with a front end, and a rear portion with a rear end, wherein the inner surface defines an inner throughbore configured to receive the coaxial cable; a center contact comprising a body and a generally tubular rear sleeve, wherein the sleeve comprises an internal surface defining a rearward facing opening configured to receive the center conductor of the cable, and wherein the sleeve is radially compressible; a bushing comprising an outer surface, an internal surface, a front portion with a front end, and a rear portion with a rear end, wherein the internal surface defines an internal throughbore, the rear portion is configured to

matingly fit within the inner throughbore of the adapter and engage the inner surface of the adapter; an insulator member having a portion in contact with the internal surface of the bushing and the center contact; and a ferrule surrounding the sleeve and compressing the sleeve radially inwardly against the center conductor of the cable; wherein the portion of the insulator in contact with the internal surface of the bushing insulator member is disposed forward of the ferrule and prevents forward movement of the ferrule.

[0069] In another set of embodiments, a method of electrically coupling a connector assembly to a coaxial cable is disclosed herein, wherein said connector assembly comprises a cable adapter, a center contact, and a center contact clamping mechanism, said method comprising: positioning said cable adapter to at least partially surround an end portion of said coaxial cable; positioning said center contact such that a conductive sleeve portion of said center contact at least partially surrounds an end portion of a center conductor of said coaxial cable; and compressing said center contact about said end portion of said center conductor with a compressive member of said center contact clamping mechanism by engaging said center contact clamping mechanism with said cable adapter while maintaining a stationary relationship between said center contact and said center conductor. In some of these embodiments, said compression is effected without forcibly sliding said center contact over said center conductor as said center contact is compressed about said center conductor.

What is claimed is:

1. A connector assembly configured to provide an electrically conductive coupling to a coaxial cable comprising a center conductor and an outer conductor, said connector assembly comprising a cable adapter, a center contact, and a center contact clamping mechanism, wherein:

said cable adapter is configured to at least partially surround an end portion of said coaxial cable;

said center contact is configured to conductively engage said center conductor of said coaxial cable and comprises a conductive sleeve portion configured to at least partially surround an end portion of said center conductor;

said center contact clamping mechanism is configured to engage said cable adapter so as to secure said cable adapter and said clamping mechanism to said end portion of said coaxial cable;

said center contact clamping mechanism is further configured to cooperate with said cable adapter and said center contact such that movement of at least a portion of said clamping mechanism along a longitudinal axis of said center contact in the direction of said cable adapter results in compression of said center contact about said end portion of said center conductor by a compressive member of said center contact clamping mechanism; and

said center contact clamping mechanism and said center contact are configured to permit compression of said center contact about said center conductor independent of relative axial movement between said center contact and said center conductor.

2. The connector assembly as claimed in claim 1 wherein said conductive sleeve portion of said center contact defines a tapered cross section having an outer diameter that increases in the direction of an open end of said sleeve portion or an inner diameter that decreases in the direction of said open end of said sleeve portion.

3. The connector assembly as claimed in claim 1 wherein:

said compressive member comprises a compressive insulator; and

said compressive insulator is configured to stabilize said center contact along a central axis of the connector assembly.

4. The connector assembly as claimed in claim 1 wherein:

said compressive member comprises a conductive fitting and a compressive insulator; and

said compressive insulator configured to isolate electrically said center contact from said conductive fitting.

5. The connector assembly as claimed in claim 1 wherein:

said compressive member comprises a conductive fitting and a compressive insulator; and

said compressive member is configured such that said compressive insulator serves as the sole source of support and electrical isolation within said conductive fitting for said center contact.

6. The connector assembly as claimed in claim 1 wherein said center contact clamping mechanism and said center contact are configured such that said compression is achieved with the center contact and the center conductor in a stationary state relative to each other.

7. The connector assembly as claimed in claim 1 wherein said center contact clamping mechanism and said center contact are configured such that said compression is achieved without forcibly sliding the center contact over the center conductor as the center conductor is compressed.

8. The connector assembly as claimed in claim 1 wherein:

said center contact clamping mechanism comprises a conductive fitting and a compressive insulator; and

said compressive insulator is lodged within an inner diameter of said conductive fitting and said conductive fitting comprises a tapered cross sectional portion defining an inner diameter that decreases from a value at least as large as an outer diameter of said compressive insulator to a value as small as or smaller than the outer diameter of said compressive insulator in the direction of said open end of said sleeve portion.

9. The connector assembly as claimed in claim 1 wherein:

said center contact clamping mechanism comprises a conductive fitting and a compressive insulator;

an inner diameter of at least a portion of said compressive insulator is smaller than an outer diameter of at least a portion of said sleeve portion of said center contact; and

an outer diameter of at least a portion of said compressive insulator is larger than an inner diameter of at least a portion of said conductive fitting.

10. The connector assembly as claimed in claim 1 wherein:

said outer conductor of said coaxial cable comprises a flared end portion; and

said center contact clamping mechanism and said cable adapter are configured such that said flared end portion is sandwiched between a conductive fitting of said center contact clamping mechanism and said cable adapter.

11. The connector assembly as claimed in claim 1 wherein:

said center contact clamping mechanism comprises a compressive insulator and a conductive fitting configured to conductively engage an outer conductor of said coaxial cable;

said sleeve portion of said center contact defines a tapered cross section that defines an outer diameter that increases from a minimum sleeve outer diameter to a maximum sleeve outer diameter in the direction of an open end of said sleeve portion;

an inner diameter of at least a portion of said compressive insulator is at least as large as said minimum sleeve outer diameter and smaller than said maximum sleeve outer diameter such that said compressive insulator can forcibly compress said sleeve portion of said center contact about said center conductor of said axial cable as it is urged along said sleeve portion in the direction of said open end of said sleeve portion.

12. The connector assembly as claimed in claim 11 wherein said conductive fitting, said compressive insulator, and said center contact are configured such that said compressive insulator can be lodged within said conductive fitting.

13. The connector assembly as claimed in claim 12 wherein said compressive insulator is lodged within said conductive fitting in a nested relationship or via a taper or an annular recess provided in an inner diameter of said fitting.

14. The connector assembly as claimed in claim 1 wherein:

said center contact clamping mechanism comprises a compressive insulator and a conductive fitting configured to conductively engage an outer conductor of said coaxial cable;

said conductive fitting and said compressive insulator cooperate to define a reducible inner diameter; and

said reducible inner diameter decreases with movement of said fitting along said axis of said center contact in the direction of said cable adapter from a size that is at least as large as an outer diameter of said sleeve portion of said center contact.

15. The connector assembly as claimed in claim 14 wherein:

said conductive fitting defines a compressible portion having a reducible outer diameter that can decrease from a size that is larger than an inner diameter defined by said cable adapter to a size that is smaller than said inner diameter of said cable adapter; and

said conductive fitting and said compressive insulator are configured such that said reducible inner diameter of said compressive insulator decreases with said compressible portion having a reducible outer diameter of said conductive fitting.

16. The connector assembly as claimed in claim 1 wherein:

said center contact clamping mechanism comprises a clamping sleeve, an insulator, and a conductive fitting configured to conductively engage an outer conductor of said coaxial cable;

said sleeve portion of said center contact defines a tapered cross section that defines an outer diameter that increases from a minimum sleeve outer diameter to a maximum sleeve outer diameter in the direction of an open end of said sleeve portion;

an inner diameter of said clamping sleeve is at least as large as said minimum sleeve outer diameter and smaller than said maximum sleeve outer diameter such that said clamping sleeve can forcibly compress said sleeve portion of said center contact about said center conductor of said axial cable as it is urged along said sleeve portion in the direction of said open end of said sleeve portion.

17. The connector assembly as claimed in claim 16 wherein said conductive fitting, said insulator, and said clamping sleeve are configured such that said clamping sleeve can be lodged within said insulator and said insulator can be lodged within said conductive fitting.

18. The coaxial cable comprising the connector assembly claimed in claim 1, wherein said connector assembly is conductively coupled to said center conductor and said outer conductor of said coaxial cable.

19. A connector assembly for use with a coaxial cable, the coaxial cable comprising a center conductor and an outer conductor, the connector assembly comprising:

an adapter comprising a generally cylindrical inner surface, a front portion with a front end, and a rear portion with a rear end, wherein the inner surface defines an inner throughbore configured to receive the coaxial cable;

a center contact comprising a body and a generally tubular rear sleeve, wherein the sleeve comprises an internal surface defining a rearward facing opening configured to receive the center conductor of the cable, and wherein the sleeve is radially compressible;

a bushing comprising an outer surface, an internal surface, a front portion with a front end, and a rear portion with a rear end, wherein the internal surface defines an internal throughbore, the rear portion is configured to matingly fit within the inner throughbore of the adapter and engage the inner surface of the adapter; and

an insulator member configured to contact the bushing and the sleeve, wherein the insulator member and the center contact are configured to compress the sleeve radially inwardly;

wherein the rear portion of the bushing and the inner surface of the adapter are configured to compress the outer conductor of the cable.

20. The connector assembly as claimed in claim 19, in combination with a coaxial cable, wherein:

the coaxial cable is disposed in the inner throughbore of the adapter;

a portion of the center conductor of the cable is disposed in the rearward facing opening of the center contact;

the rear portion of the bushing and the inner surface of the adapter sandwich and compress a portion of the outer conductor of the cable; and

the insulator member compresses the sleeve radially inwardly against the center conductor of the cable.

21. A connector assembly for use with a coaxial cable, the coaxial cable comprising a center conductor and an outer conductor, the connector assembly comprising:

an adapter comprising a generally cylindrical inner surface, a front portion with a front end, and a rear portion with a rear end, wherein the inner surface defines an inner throughbore configured to receive the coaxial cable;

a center contact comprising a body and a generally tubular rear sleeve, wherein the sleeve comprises an internal surface defining a rearward facing opening configured to receive the center conductor of the cable, and wherein the sleeve is radially compressible;

a bushing comprising an outer surface, an internal surface, a front portion with a front end, and a rear portion with a rear end, wherein the internal surface defines an internal throughbore, the rear portion is configured to matingly fit within the inner throughbore of the adapter and engage the inner surface of the adapter;

an insulator member having a portion in contact with the internal surface of the bushing and the center contact; and

a ferrule surrounding the sleeve and compressing the sleeve radially inwardly against the center conductor of the cable;

wherein the portion of the insulator in contact with the internal surface of the bushing insulator member is disposed forward of the ferrule and prevents forward movement of the ferrule.

22. A method of electrically coupling a connector assembly to a coaxial cable, wherein said connector assembly comprises a cable adapter, a center contact, and a center contact clamping mechanism, said method comprising:

positioning said cable adapter to at least partially surround an end portion of said coaxial cable;

positioning said center contact such that a conductive sleeve portion of said center contact at least partially surrounds an end portion of a center conductor of said coaxial cable; and

compressing said center contact about said end portion of said center conductor with a compressive member of said center contact clamping mechanism by engaging said center contact clamping mechanism with said cable adapter while maintaining a stationary relationship between said center contact and said center conductor.

23. The method as claimed in claim 22 wherein said compression is effected without forcibly sliding said center contact over said center conductor as said center contact is compressed about said center conductor.

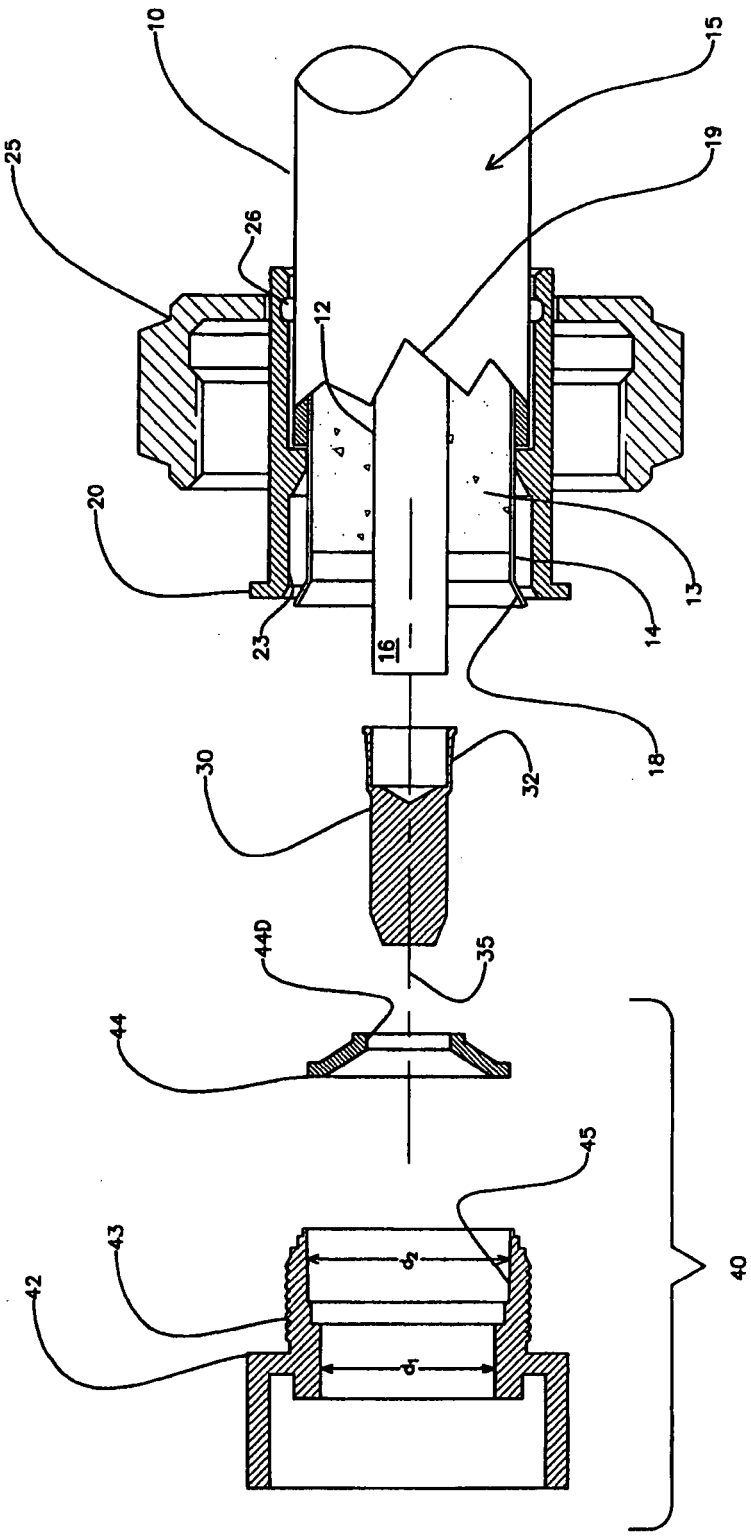

FIGURE 1

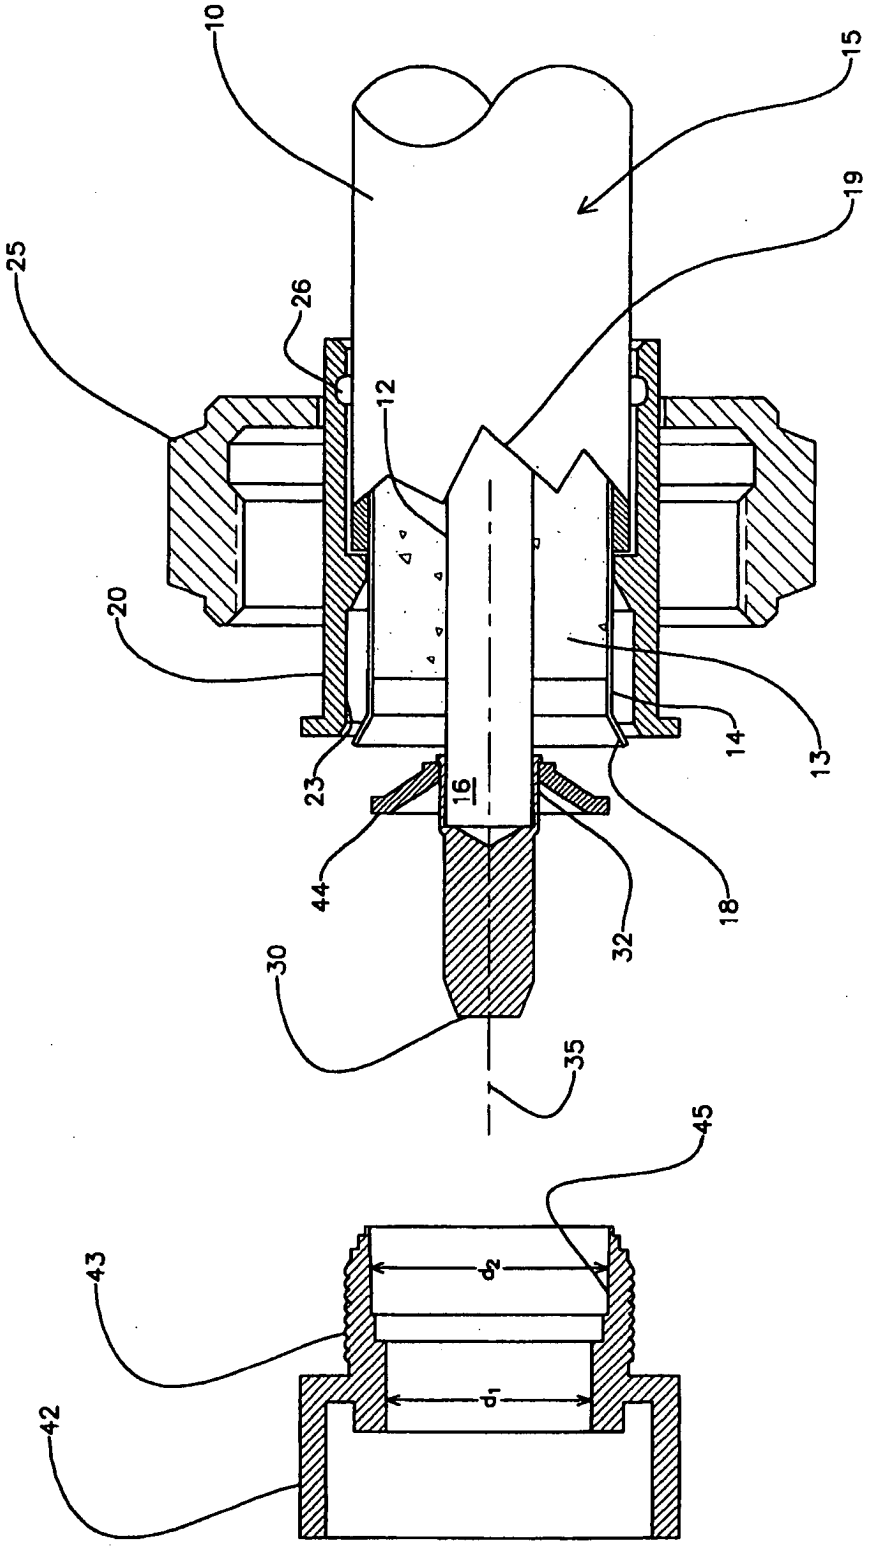

FIGURE 2

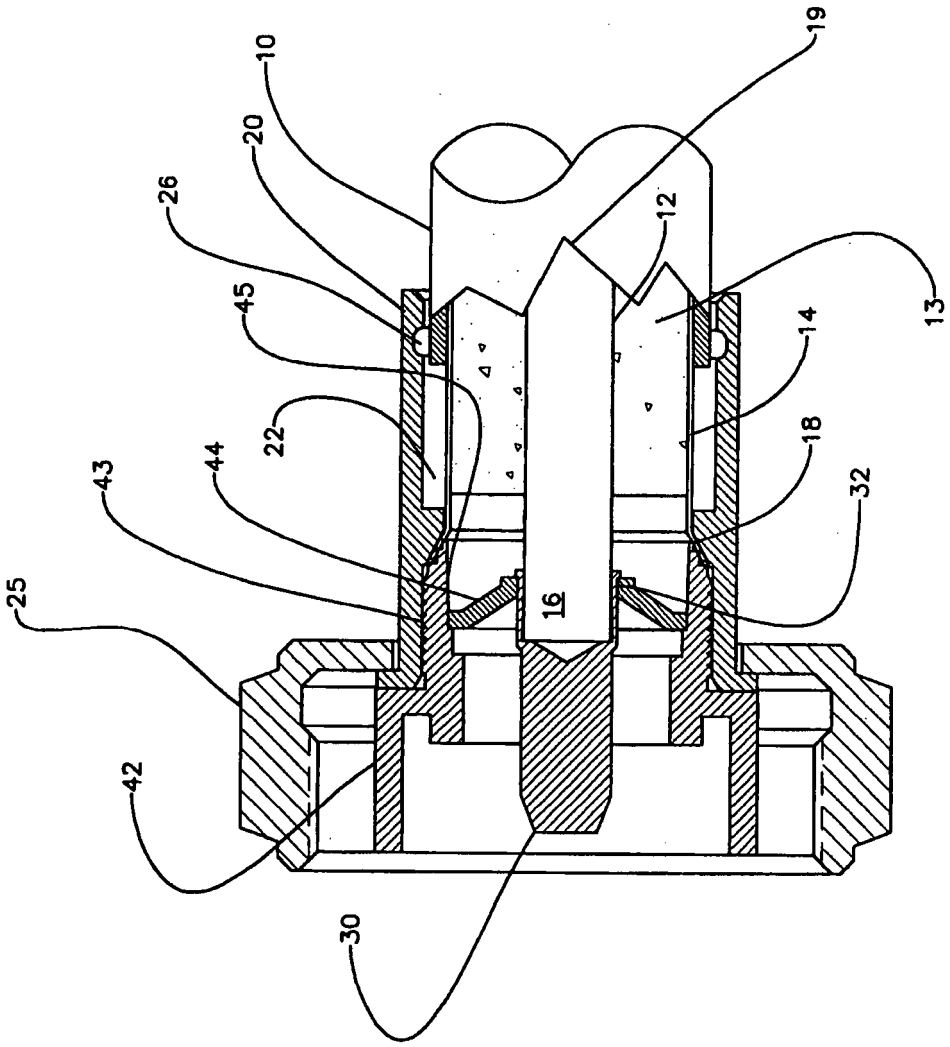

FIGURE 3

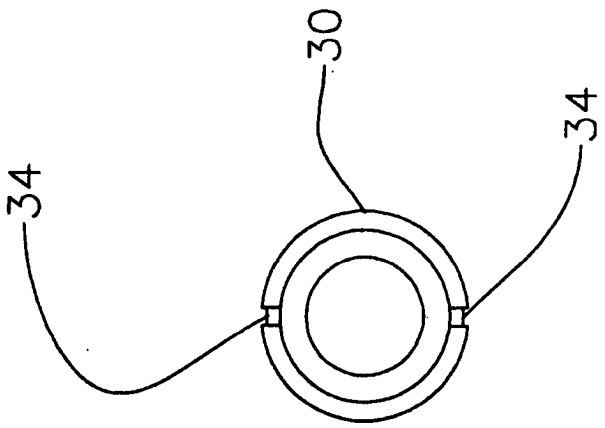

FIGURE 4B

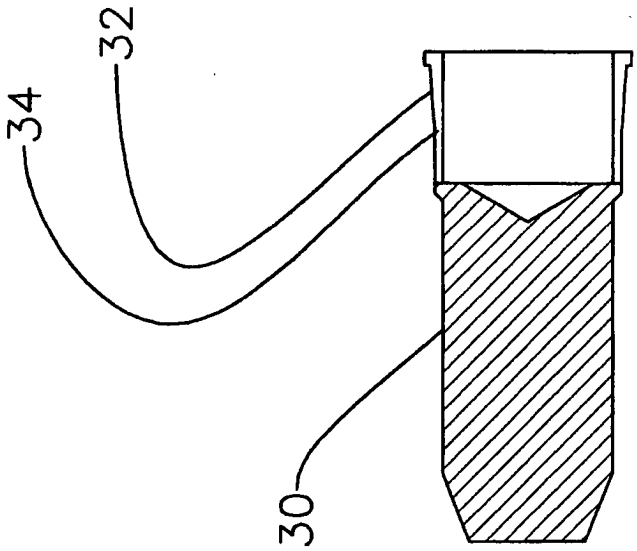

FIGURE 4A

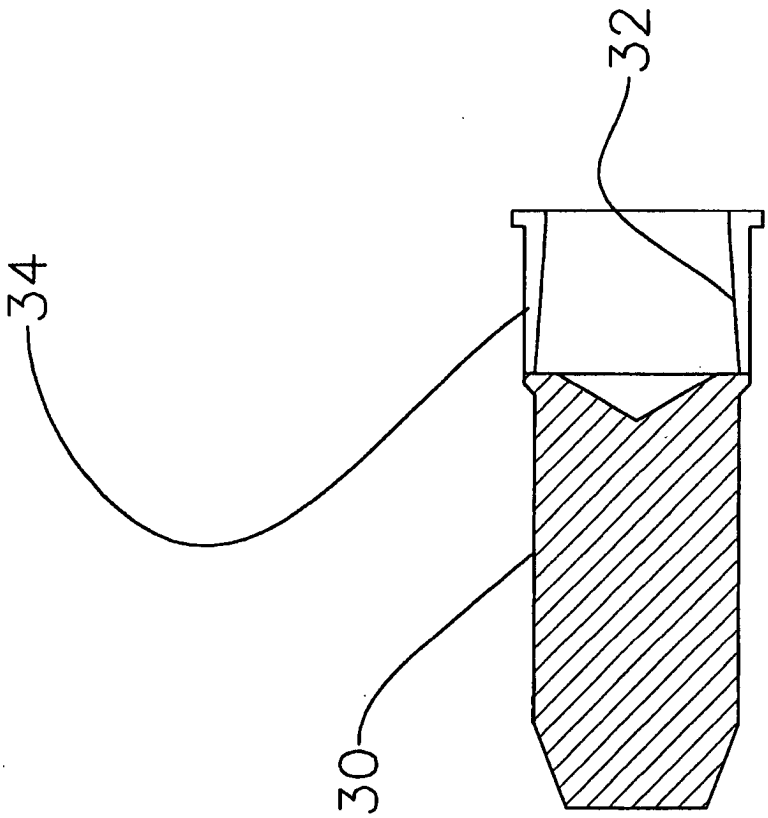

FIGURE 5

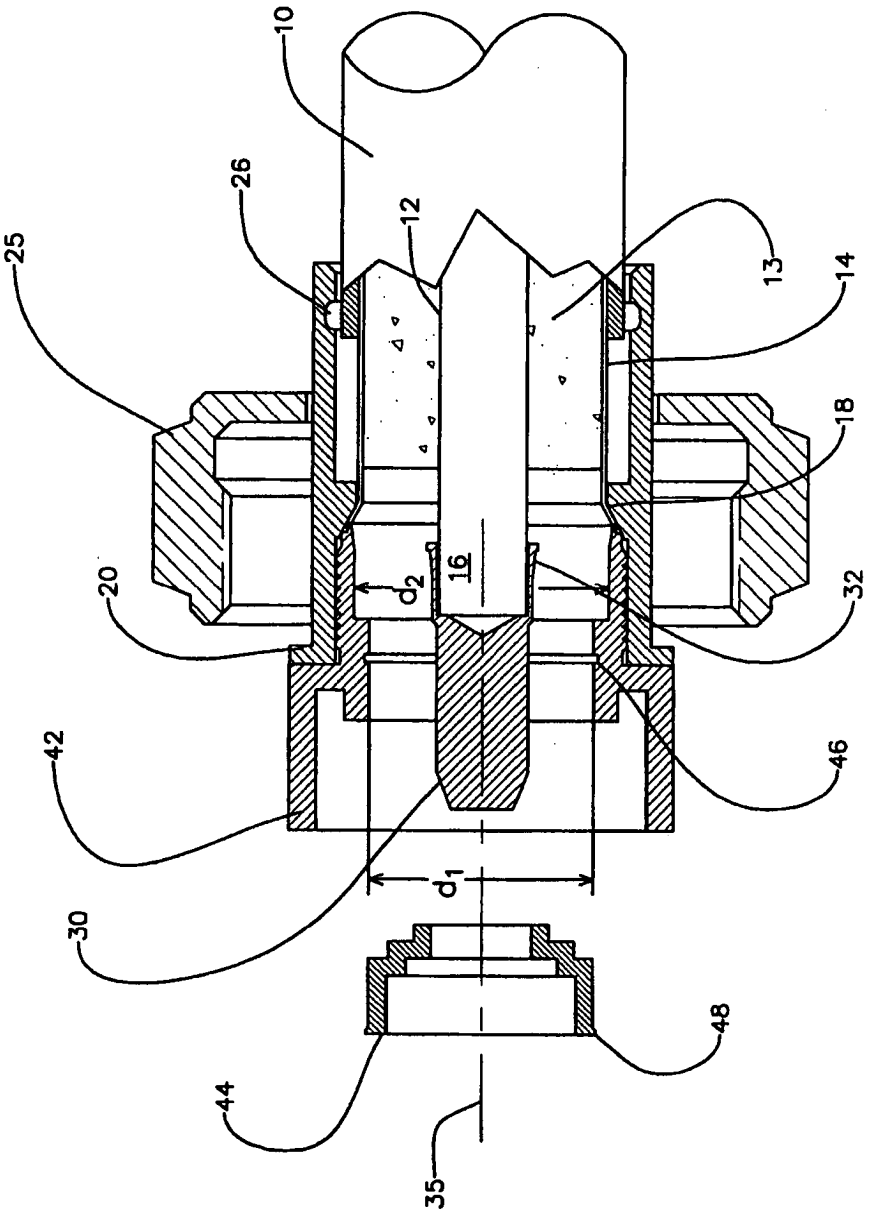

FIGURE 6

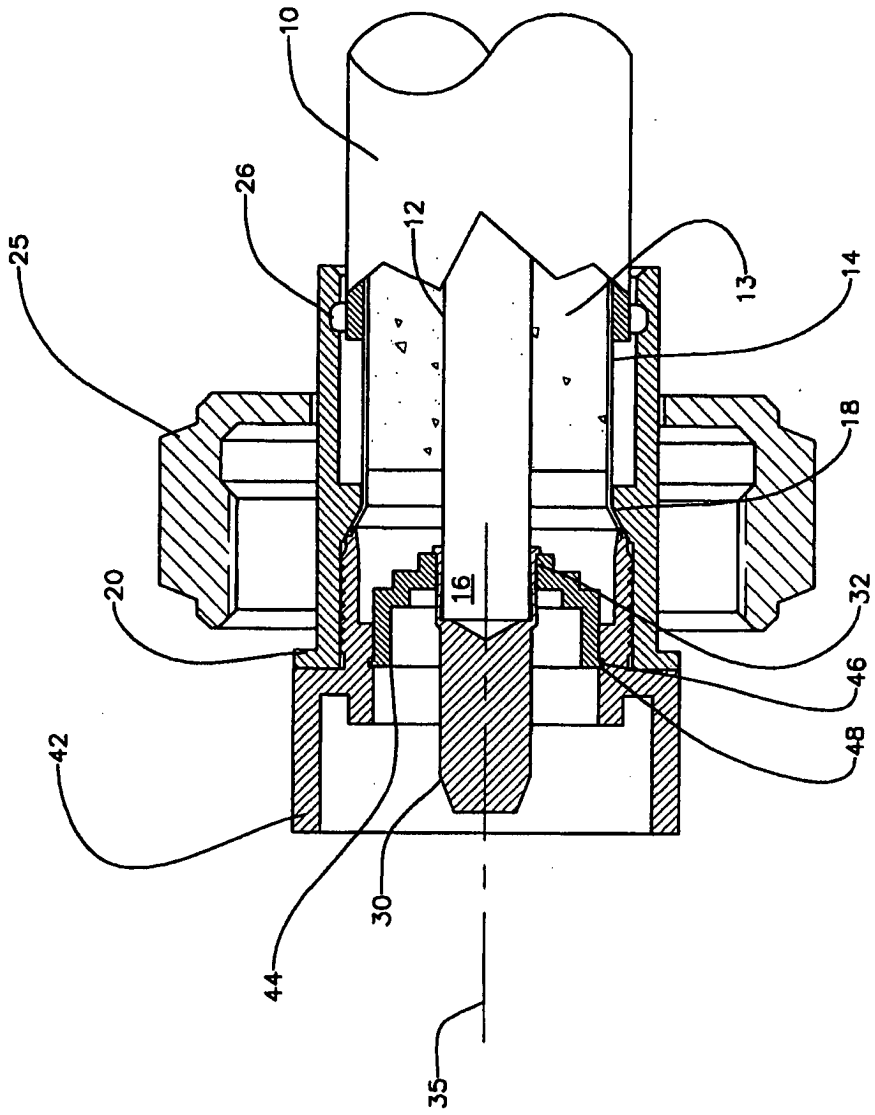

FIGURE 7

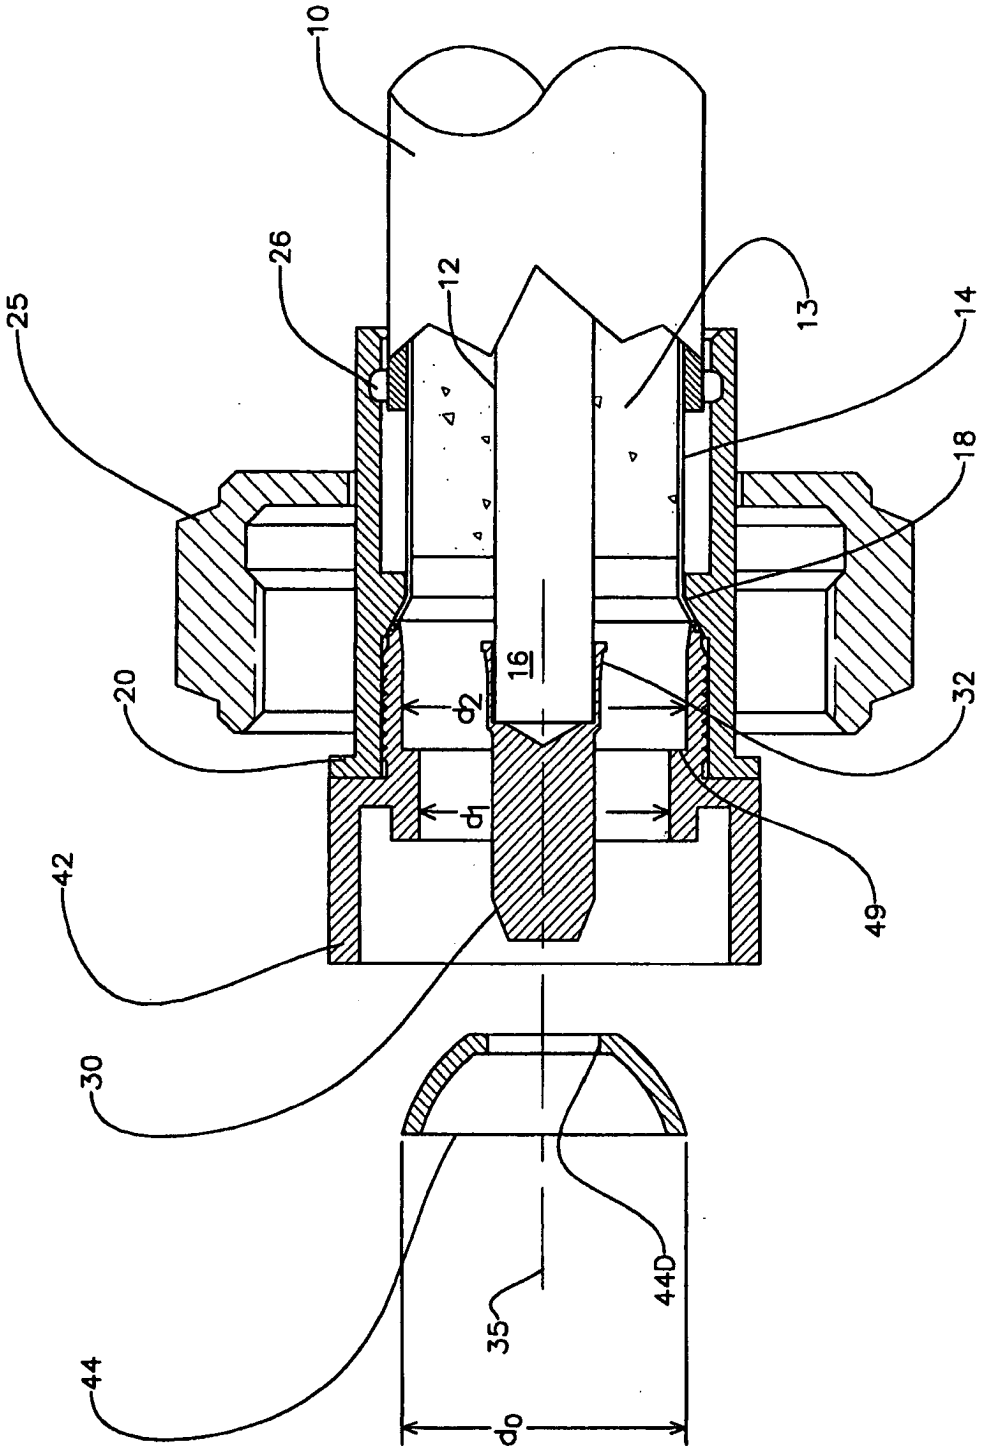

FIGURE 8

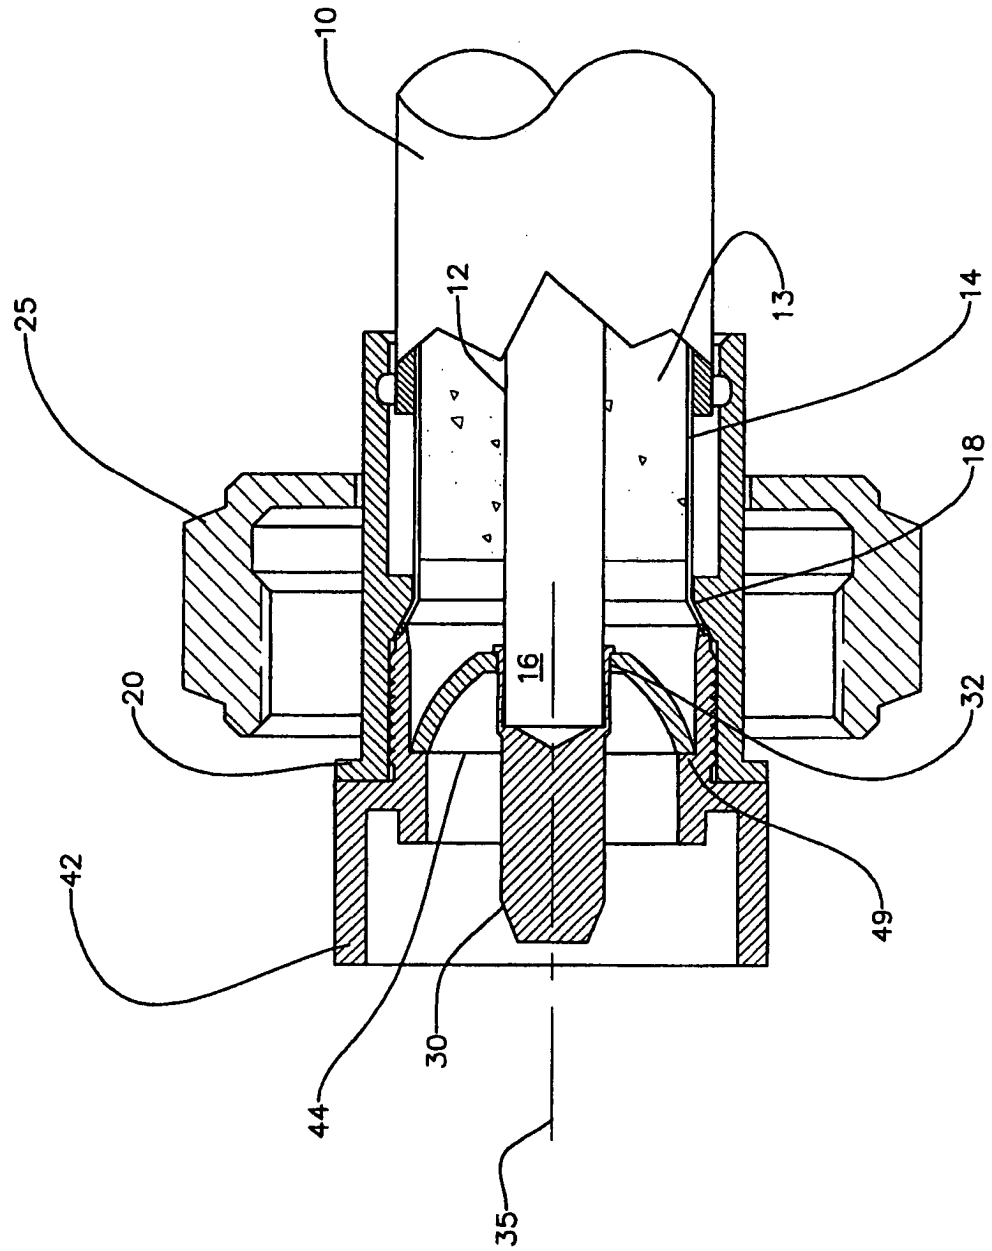

FIGURE 9

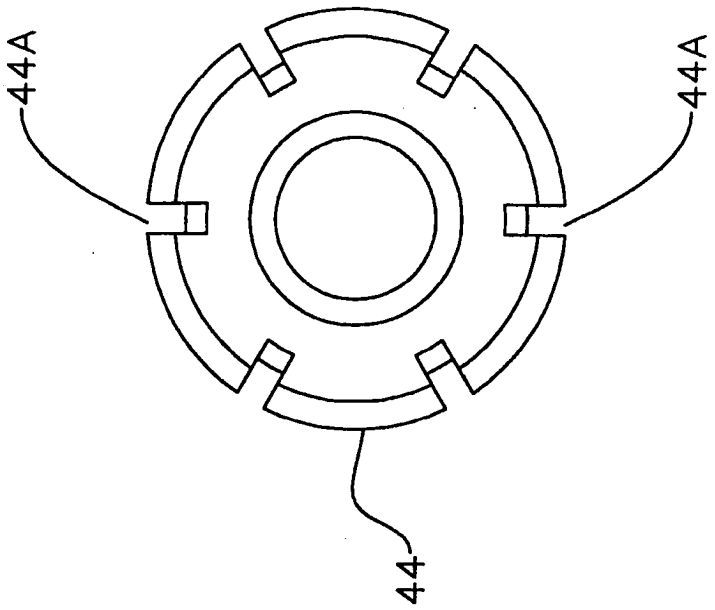

FIGURE 10B

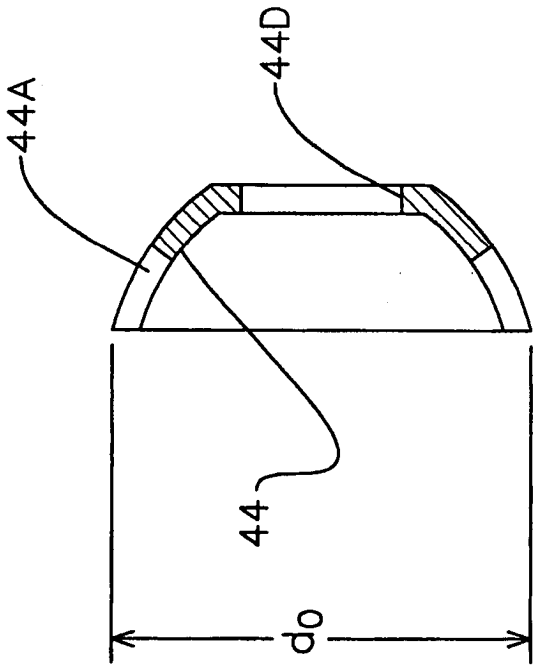

FIGURE 10A

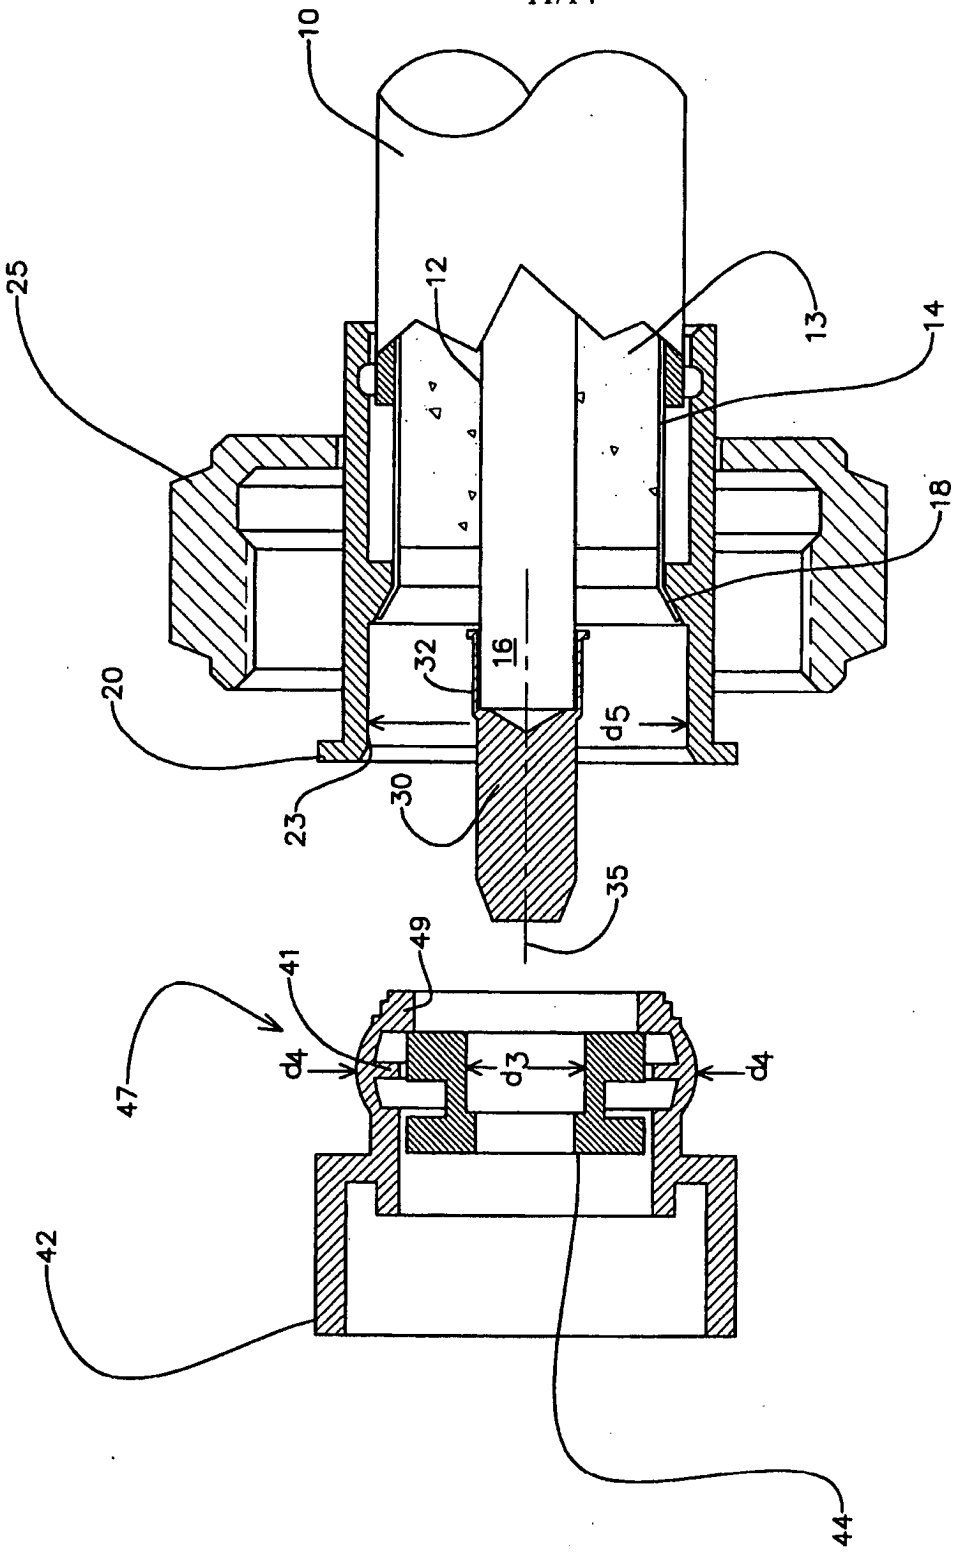

FIGURE 11

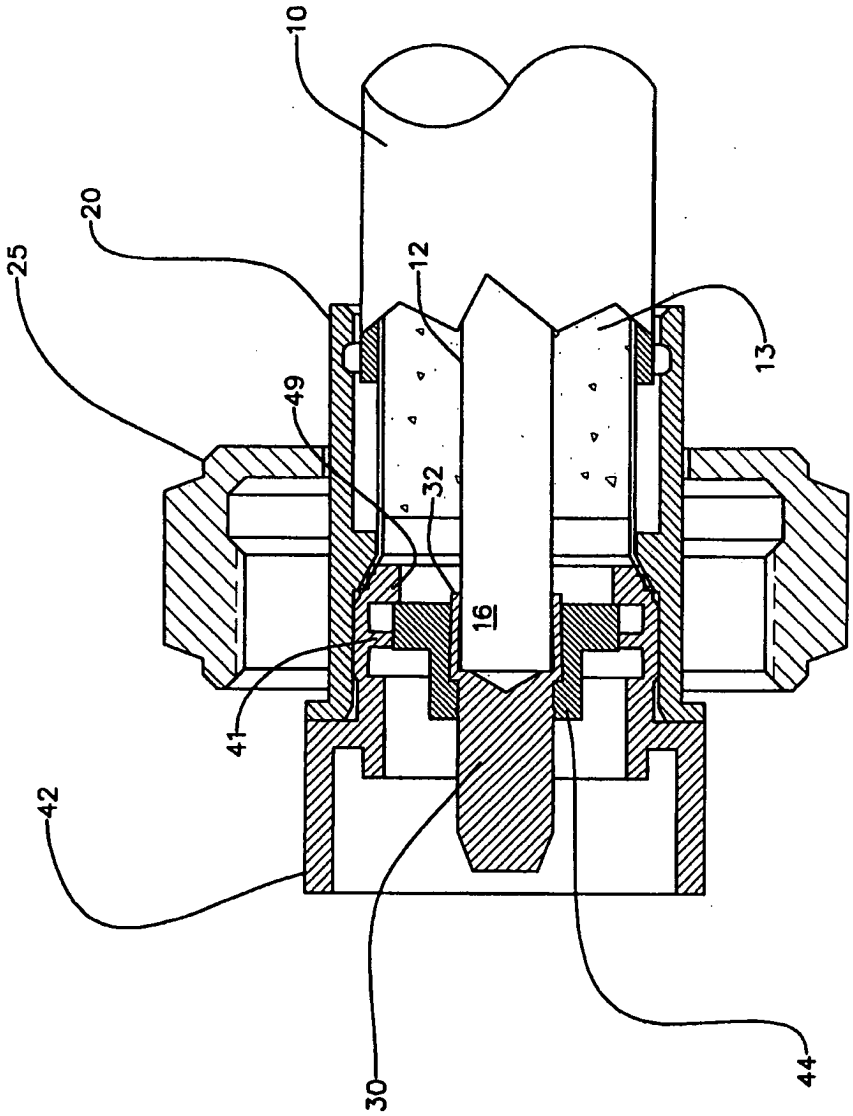

FIGURE 12

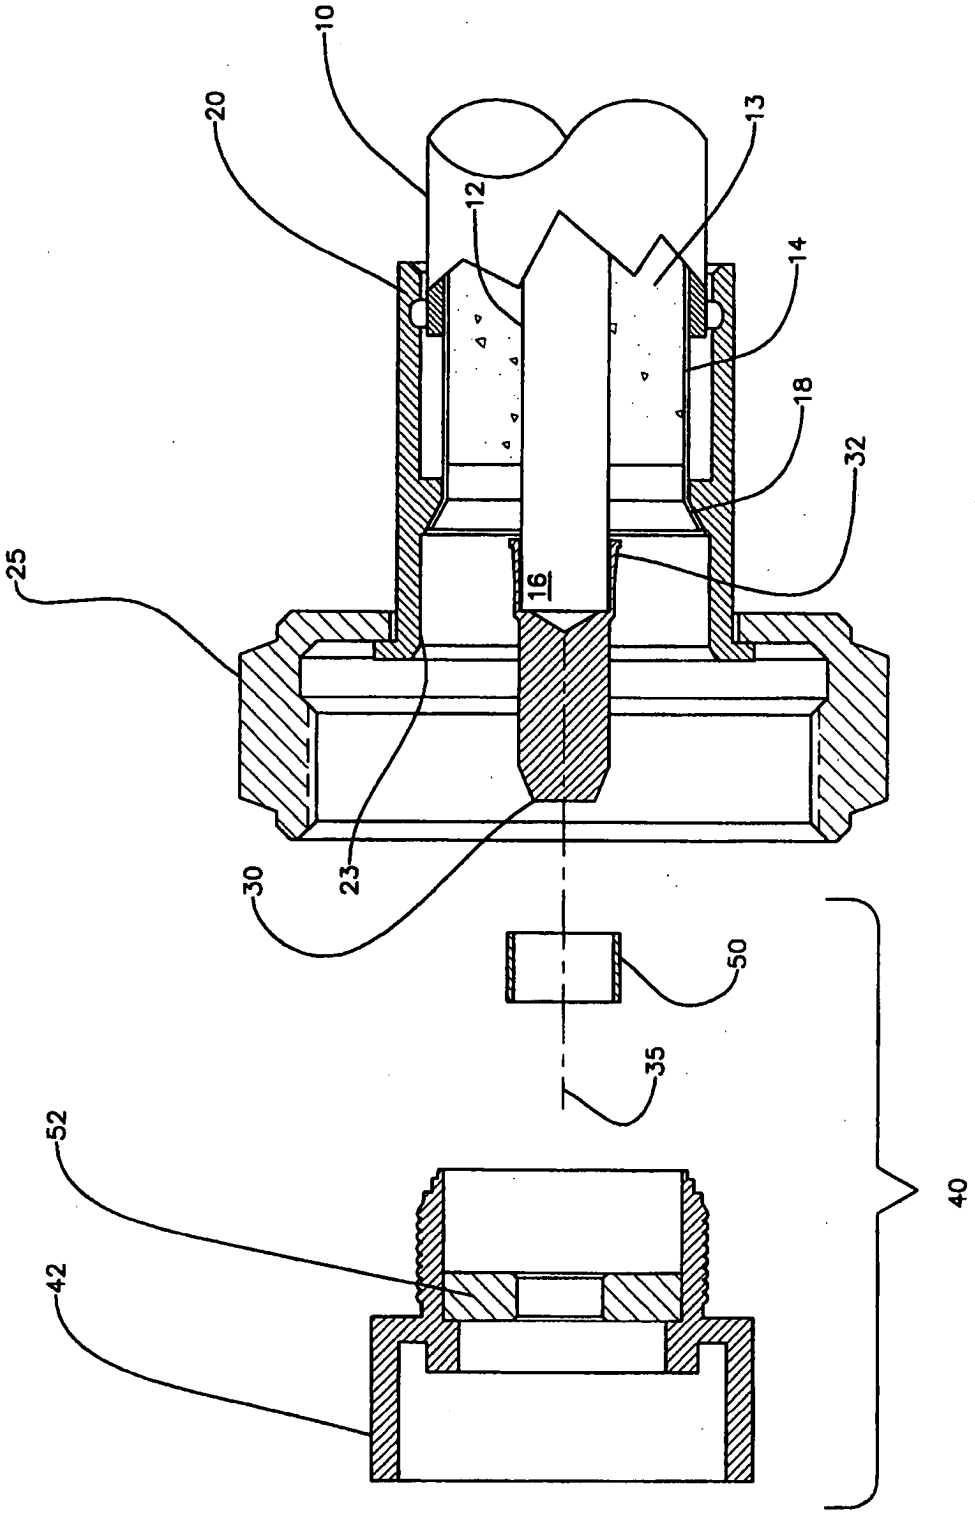

FIGURE 13

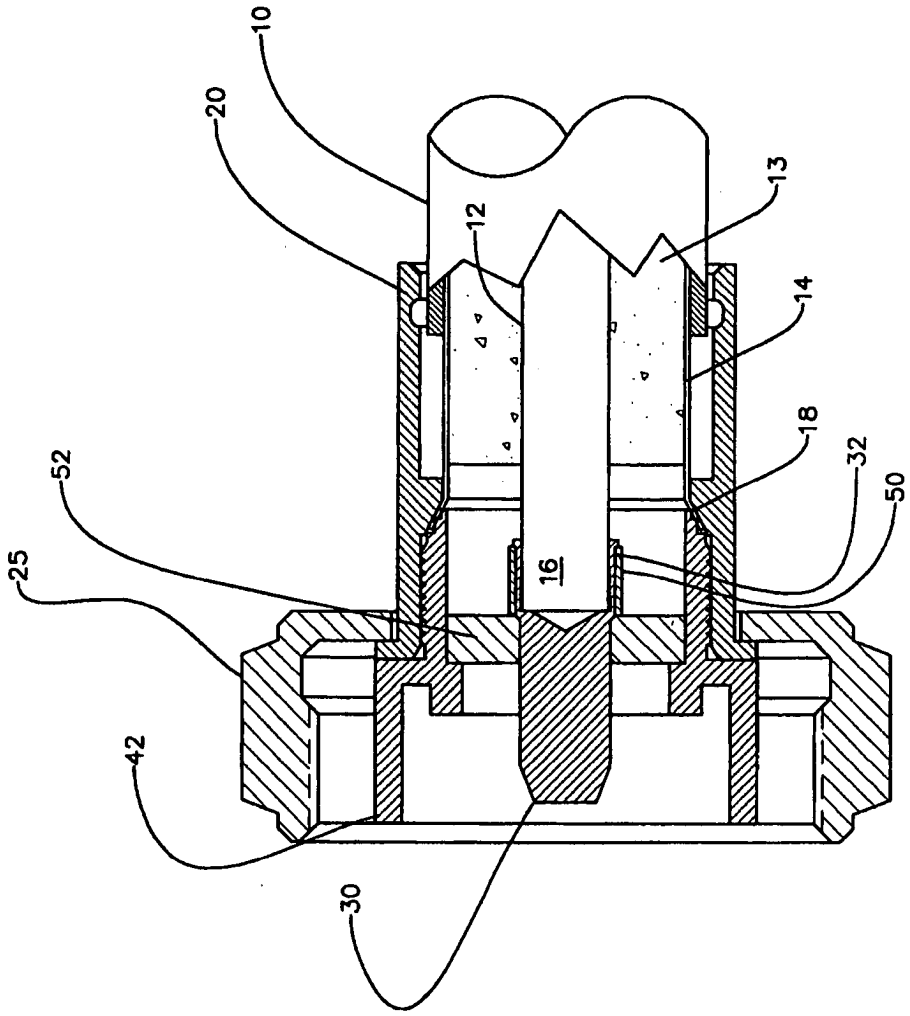

FIGURE 14