



(86) **Date de dépôt PCT/PCT Filing Date:** 2007/05/04
(87) **Date publication PCT/PCT Publication Date:** 2007/11/15
(45) **Date de délivrance/Issue Date:** 2017/03/21
(85) **Entrée phase nationale/National Entry:** 2008/09/24
(86) **N° demande PCT/PCT Application No.:** US 2007/010848
(87) **N° publication PCT/PCT Publication No.:** 2007/130580
(30) **Priorité/Priority:** 2006/05/05 (US11/418,690)

(51) **Cl.Int./Int.Cl. H04N 19/119** (2014.01),
G06T 9/00 (2006.01), **H04N 19/126** (2014.01),
H04N 19/176 (2014.01), **H04N 19/186** (2014.01),
H04N 19/46 (2014.01), **H04N 19/61** (2014.01)
(72) **Inventeurs/Inventors:**
TU, CHENGJIE, US;
SRINIVASAN, SRIDHAR, US
(73) **Propriétaire/Owner:**
MICROSOFT TECHNOLOGY LICENSING, LLC, US
(74) **Agent:** SMART & BIGGAR

(54) **Titre : QUANTIFICATION FLEXIBLE**

(54) **Title: FLEXIBLE QUANTIZATION**

700
↓

FRAME () {	Num bits
...	lots
DC_FRAME_UNIFORM	1
if (DC_FRAME_UNIFORM)	
DC_QUANTIZER	variable
if('lowpass not skipped'){	
USE_DC_QUANTIZER	1
if(USE_DC_QUANTIZER == FALSE){	
LP_FRAME_UNIFORM	1
if(LP_FRAME_UNIFORM){	
LP_QUANTIZERS = 1	
LP_QUANTIZER()	variable
}	
}	
}	
if('highpass not skipped'){	
USE_LP_QUANTIZER	1
if(USE_LP_QUANTIZER == FALSE){	
HP_FRAME_UNIFORM	1
if(HP_FRAME_UNIFORM){	
HP_QUANTIZERS = 1	
HP_QUANTIZER()	variable
}	
}	
}	
}	

(57) **Abrégé/Abstract:**

A digital media encoder/decoder uses a flexible quantization technique that provides the ability to vary quantization along various dimensions of the encoded digital media data, including spatial, frequency sub bands and color channels. The codec utilizes a

(57) **Abrégé(suite)/Abstract(continued):**

signaling scheme to signal various permutations of flexible quantization combinations efficiently for primary usage scenarios. When a choice of quantizer is available, the codec efficiently encodes the current quantizer by defining a subset of quantizers and indexes the current quantizer from the set.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
15 November 2007 (15.11.2007)

PCT

(10) International Publication Number
WO 2007/130580 A3(51) International Patent Classification:
H04N 7/24 (2006.01)(21) International Application Number:
PCT/US2007/010848

(22) International Filing Date: 4 May 2007 (04.05.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/418,690 5 May 2006 (05.05.2006) US(71) Applicant (for all designated States except US): **Microsoft Corporation** [US/US]; One Microsoft Way, Redmond, Washington 98052-6399 (US).(72) Inventors: **TU, Chengjie**; One Microsoft Way, Redmond, Washington 98052-6399 (US). **SRINIVASAN, Sridhar**; One Microsoft Way, Redmond, Washington 98052-6399 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH,

CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report

(88) Date of publication of the international search report:
14 February 2008

(54) Title: FLEXIBLE QUANTIZATION

700
↓

FRAME () {	Num bits
...	lots
DC_FRAME_UNIFORM	1
if (DC_FRAME_UNIFORM)	
DC_QUANTIZER	variable
if('lowpass not skipped'){	
USE_DC_QUANTIZER	1
if(USE_DC_QUANTIZER == FALSE){	
LP_FRAME_UNIFORM	1
if(LP_FRAME_UNIFORM){	
LP_QUANTIZERS = 1	
LP_QUANTIZER()	variable
}	
}	
}	
if('highpass not skipped'){	
USE_LP_QUANTIZER	1
if(USE_LP_QUANTIZER == FALSE){	
HP_FRAME_UNIFORM	1
if(HP_FRAME_UNIFORM){	
HP_QUANTIZERS = 1	
HP_QUANTIZER()	variable
}	
}	
}	
}	

(57) Abstract: A digital media encoder/decoder uses a flexible quantization technique that provides the ability to vary quantization along various dimensions of the encoded digital media data, including spatial, frequency sub bands and color channels. The codec utilizes a signaling scheme to signal various permutations of flexible quantization combinations efficiently for primary usage scenarios. When a choice of quantizer is available, the codec efficiently encodes the current quantizer by defining a subset of quantizers and indexes the current quantizer from the set.

WO 2007/130580 A3

FLEXIBLE QUANTIZATION

Background

1. Block Transform-Based Coding

Transform coding is a compression technique used in many audio, image
5 and video compression systems. Uncompressed digital image and video is
typically represented or captured as samples of picture elements or colors at
locations in an image or video frame arranged in a two-dimensional (2D) grid.
This is referred to as a spatial-domain representation of the image or video. For
example, a typical format for images consists of a stream of 24-bit color picture
10 element samples arranged as a grid. Each sample is a number representing color
components at a pixel location in the grid within a color space, such as RGB, or
YIQ, among others. Various image and video systems may use various different
color, spatial and time resolutions of sampling. Similarly, digital audio is typically
represented as time-sampled audio signal stream. For example, a typical audio
15 format consists of a stream of 16-bit amplitude samples of an audio signal taken at
regular time intervals.

Uncompressed digital audio, image and video signals can consume
considerable storage and transmission capacity. Transform coding reduces the size
of digital audio, images and video by transforming the spatial-domain
20 representation of the signal into a frequency-domain (or other like transform
domain) representation, and then reducing resolution of certain generally less
perceptible frequency components of the transform-domain representation. This
generally produces much less perceptible degradation of the digital signal
compared to reducing color or spatial resolution of images or video in the spatial
25 domain, or of audio in the time domain.

More specifically, a typical block transform-based codec 100 shown in
Figure 1 divides the uncompressed digital image's pixels into fixed-size two
dimensional blocks ($X_1, \dots, X_n$), each block possibly overlapping with other blocks.
A linear transform 120-121 that does spatial-frequency analysis is applied to each
30 block, which converts the spaced samples within the block to a set of frequency (or
transform) coefficients generally representing the strength of the digital signal in

51017-20

corresponding frequency bands over the block interval. For compression, the transform coefficients may be selectively quantized 130 (i.e., reduced in resolution, such as by dropping least significant bits of the coefficient values or otherwise mapping values in a higher resolution number set to a lower resolution), and also
 5 entropy or variable-length coded 130 into a compressed data stream. At decoding, the transform coefficients will inversely transform 170-171 to nearly reconstruct the original color/spatial sampled image/video signal (reconstructed blocks $\hat{X}_1, \dots, \hat{X}_n$).

The block transform 120-121 can be defined as a mathematical operation on
 10 a vector x of size N . Most often, the operation is a linear multiplication, producing the transform domain output $y = Mx$, where M is the transform matrix. When the input data is arbitrarily long, it is segmented into N sized vectors and a block transform is applied to each segment. For the purpose of data compression, reversible block transforms are chosen. In other words, the matrix M is invertible.
 15 In multiple dimensions (e.g., for image and video), block transforms are typically implemented as separable operations. The matrix multiplication is applied separably along each dimension of the data (i.e., both rows and columns).

For compression, the transform coefficients (components of vector y) may be selectively quantized (i.e., reduced in resolution, such as by dropping least
 20 significant bits of the coefficient values or otherwise mapping values in a higher resolution number set to a lower resolution), and also entropy or variable-length coded into a compressed data stream.

At decoding in the decoder 150, the inverse of these operations (dequantization/entropy decoding 160 and inverse block transform 170-171) are
 25 applied on the decoder 150 side, as show in Fig. 1. While reconstructing the data, the inverse matrix M^I (inverse transform 170-171) is applied as a multiplier to the transform domain data. When applied to the transform domain data, the inverse transform nearly reconstructs the original time-domain or spatial-domain digital media.

30 In many block transform-based coding applications, the transform is desirably reversible to support both lossy and lossless compression depending on

the quantization factor. With no quantization (generally represented as a quantization factor of 1) for example, a codec utilizing a reversible transform can exactly reproduce the input data at decoding. However, the requirement of reversibility in these applications constrains the choice of transforms upon which
5 the codec can be designed.

Many image and video compression systems, such as MPEG and Windows Media, among others, utilize transforms based on the Discrete Cosine Transform (DCT). The DCT is known to have favorable energy compaction properties that result in near-optimal data compression. In these compression systems, the inverse
10 DCT (IDCT) is employed in the reconstruction loops in both the encoder and the decoder of the compression system for reconstructing individual image blocks.

2. Quantization

According to one possible definition, quantization is a term used for an approximating non-reversible mapping function commonly used for lossy
15 compression, in which there is a specified set of possible output values, and each member of the set of possible output values has an associated set of input values that result in the selection of that particular output value. A variety of quantization techniques have been developed, including scalar or vector, uniform or non-uniform, with or without dead zone, and adaptive or non-adaptive quantization.

20 The quantization operation is essentially a biased division by a quantization parameter QP which is performed at the encoder. The inverse quantization or multiplication operation is a multiplication by QP performed at the decoder. These processes together introduce a loss in the original transform coefficient data, which shows up as compression errors or artifacts in the decoded image. In a simplistic
25 codec, a certain fixed value of QP can be applied to all transform coefficients in a frame. While this may be an acceptable solution in some cases, it has several deficiencies:

The human visual system is not equally sensitive to all frequencies, or to all spatial locations within a frame, or to all luminance and chrominance channels.
30 Using different QP values for different coefficients may provide a visually superior

51331-683

encoding even with the same or smaller number of compressed bits. Likewise, other error metrics can be suitably optimized as well.

Rate control or the ability of an encoder to
5 produce a compressed file of a desired size is not easy to perform with a single QP across the entire frame.

It is therefore desirable to allow the encoder to vary QP across the image in an arbitrary manner. However, this means that the actual value of QP used for each data
10 partition should be signaled in the bitstream. This leads to an enormous overhead just to carry the QP signaling information, making it unsuitable in practice. What is desired is a flexible yet bit-economic means of signaling QP, particularly for commonly encountered scenarios.

15 In summary, quantization is the primary mechanism for most image and video codecs to control compressed image quality and compression ratio. Quantization methods supported by most popular codecs provide few features or little flexibility, or incur significant overhead of
20 additional bits. Often, an image or a video frame is usually quantized uniformly, or with limited ability to vary quantization over spatial locations. This lack of flexibility hurts compression quality, and prevents accurate rate control on the fly. On the other hand, some codecs
25 provide nearly unrestricted freedom in supporting quantization methods. Encoding to signal use of different quantizers takes additional bits in the encoded media, and could itself adversely affect compression efficiency. Further, the process of building a conformant decoder
30 requires a large number of test passes generated by all possible combinations of the quantizer methods, which can be onerous.

51017-20

Summary

According to one aspect of the present invention, there is provided a method of decoding digital media, comprising: with a computer, receiving compressed digital image data, the compressed digital image data having been partitioned along more than one dimension; determining multiple sets of quantization parameter indices from signals in the compressed digital image data, the compressed digital image data having been quantized across more than one partitioned dimension of the digital image data, the signals indicating whether quantization parameter indices used during decoding vary within a frequency band dimension and within a color channel dimension, the quantization parameter indices available across the frequency band dimension including, for a given set of the multiple sets of quantization parameter indices, a first quantization parameter index for one or more DC components, a second quantization parameter index for multiple low-pass components, and a third quantization parameter index for multiple high-pass components; for each of multiple macroblocks of the compressed digital image data: selecting one of the multiple sets of quantization parameter indices based on a value signaled for the macroblock; and determining one or more quantization parameters for the selected set of quantization parameter indices; dequantizing the compressed digital image data in accordance with the determined quantization parameters; applying an inverse of a block transform to blocks of the dequantized digital image data; and outputting decompressed digital image data, wherein: (a) the multiple high-pass coefficients are AC coefficients from first transforms of values of blocks of a macroblock; (b) the multiple low-pass coefficients are AC coefficients from a second transform of DC coefficients from the first transforms; and (c) the one or more DC coefficients include a DC coefficient from the second transform of the DC coefficients from the first transforms.

According to yet another aspect of the present invention, there is provided at least one memory device or magnetic disk having program code stored thereon for causing a digital media processing device to perform a method of processing digital media data according to a codec, the method comprising decoding a compressed data stream encoded according to the method as described herein.

51017-20

According to a further aspect of the present invention, there is provided at least one memory device or magnetic disk having program code stored thereon for causing a digital media processing device to perform a method of processing digital media data according to a codec, the method comprising: receiving compressed digital image data; determining

5 multiple sets of quantization parameter indices from signals in the compressed digital image data, the signals indicating whether quantization parameter indices used during decoding vary within a frequency band dimension and within a color channel dimension, the quantization parameter indices available across the frequency band dimension including, for a given set of the multiple sets of quantization parameter indices, a first quantization parameter index for

10 one or more DC components, a second quantization parameter index for multiple low-pass components, and a third quantization parameter index for multiple high-pass components; for each of multiple macroblocks of the compressed digital image data: selecting one of the multiple sets of quantization parameter indices based on a value signaled for the macroblock; and determining one or more quantization parameters for the selected set of quantization

15 parameter indices; dequantizing the compressed digital image data in accordance with the determined quantization parameters; applying an inverse of a block transform to blocks of the dequantized digital image data; and outputting decompressed digital image data, wherein (a) the multiple high-pass coefficients are AC coefficients from first transforms of values of blocks of a macroblock; (b) the multiple low-pass coefficients are AC coefficients from a

20 second transform of DC coefficients from the first transforms; and (c) the one or more DC coefficients include a DC coefficient from the second transform of the DC coefficients from the first transforms.

According to one aspect of the present invention, there is provided a method of decoding digital media, comprising: with a computer, receiving compressed digital image

25 data, the compressed digital image data having been partitioned along more than one dimension; determining multiple sets of quantization parameter indices from signals in the compressed digital image data, the compressed digital image data having been quantized across more than one partitioned dimension of the digital image data, the signals indicating whether quantization parameter indices used during decoding vary within a frequency band

30 dimension and within a color channel dimension, the quantization parameter indices available across the frequency band dimension including, for a given set of the multiple sets of

51017-20

quantization parameter indices, a first quantization parameter index for a DC component, a second quantization parameter index for multiple low-pass components, and a third quantization parameter index for multiple high-pass components; for each of multiple macroblocks of the compressed digital image data: selecting one of the multiple sets of
5 quantization parameter indices based on a value signaled for the macroblock; and determining one or more quantization parameters for the selected set of quantization parameter indices; dequantizing the compressed digital image data in accordance with the determined quantization parameters; applying an inverse of a block transform to blocks of the dequantized digital image data; and outputting decompressed digital image data.

10 According to yet another aspect of the present invention, there is provided at least one computer-readable storage medium having program code stored thereon that, when executed, causes a digital media processing device to perform a method of processing digital media data according to a codec as described herein.

 According to a further aspect of the present invention, there is provided at least
15 one computer-readable storage medium having program code stored thereon that, when executed, causes a digital media processing device to perform a method of processing digital media data according to a codec, the method comprising decoding a compressed data stream encoded according to the method as described herein.

 The following Detailed Description presents variations of a flexible
20 quantization technique that provides the ability to vary quantization along various dimensions of the encoded digital media data. For example, one representative implementation of the flexible quantization technique can vary quantization over three dimensions - over (i) spatial locations, (ii) frequency sub bands, and (iii) color channels. The Detailed Description further presents ways to efficiently signal the flexible quantization in the encoded digital media data.
25 The benefit of this

51017-20

multiple DC components, a second quantization parameter for multiple low-pass components, and a third quantization parameter for multiple high-pass components; dequantizing the compressed digital image data in accordance with the determined quantization parameters; applying an inverse of a block transform to blocks of the dequantized digital image data; and
5 outputting decompressed digital image data.

According to another aspect of the present invention, there is provided a digital media processing device comprising: a memory for storing digital media data; and a digital media processor programmed to encode and/or decode the digital media data by applying forward or inverse operations of applying a transform to blocks of the digital media data, and
10 applying quantizers to the blocks of digital media data, wherein the quantizers include a set of frequency band quantizers, the set of frequency band quantizers including a DC quantizer for multiple DC coefficients in a macroblock, an LP quantizer for multiple low-pass coefficients in the macroblock, and an HP quantizer for multiple high-pass coefficients in the macroblock.

According to still another aspect of the present invention, there is provided at
15 least one memory device or storage device having program code stored thereon for causing a digital media processing device to perform a method of processing digital media data according to a codec, the method comprising: selecting combinations of available quantization modes to be applied to the digital media data, the available quantization modes including at least a first quantization mode in which low pass coefficients use the same quantizer as a DC
20 coefficient and a second quantization mode in which high pass coefficients use the same quantizer as low pass coefficients, the first quantization mode being signaled by a first syntax element, the second quantization mode being signaled by a second syntax element; applying a block transform to blocks of the digital media data; quantizing the digital media data according to the selected combinations of quantization modes; encoding the quantized digital
25 media data in a compressed data stream; and signaling the selected combinations of quantization modes in the compressed data stream, the compressed data stream including the first syntax element and the second syntax element.

According to yet another aspect of the present invention, there is provided at least one memory device or storage device having program code stored thereon for causing a

51017-20

digital media processing device to perform a method of processing digital media data according to a codec, the method comprising: receiving compressed digital image data; determining quantization parameters from signals in the compressed digital image data, the signals indicating whether quantization parameters used during dequantization vary within a frequency band dimension and within at least one of a spatial dimension or a color channel dimension, the quantization parameters available across the frequency band dimension including a first quantization parameter for multiple DC components, a second quantization parameter for multiple low-pass components, and a third quantization parameter for multiple high-pass components; dequantizing the compressed digital image data in accordance with the determined quantization parameters; applying an inverse of a block transform to blocks of the dequantized digital image data; and outputting decompressed digital image data.

According to a further aspect of the present invention, there is provided at least one memory device or storage device having a program code stored thereon for causing a digital media processing device to perform a method of processing digital media data according to a codec, the method comprising decoding a compressed data stream encoded according to the method disclosed herein.

According to yet a further aspect of the present invention, there is provided a digital media processing method comprising: storing at least part of a bitstream representing compressed digital media data in a memory; and decoding the at least part of the bitstream by applying quantization parameters to transform coefficients of blocks of the digital media data and applying inverse operations of a transform to the blocks of the digital media data, wherein the quantization parameters are selectively variable across at least a spatial dimension, a frequency dimension, and a color channel dimension, and wherein the selective variability across each of the dimensions is signaled by signals in the bitstream.

According to still a further aspect of the present invention, there is provided a digital media processing method comprising: storing at least part of a bitstream representing compressed digital media data in a memory; and decoding the at least part of the bitstream by applying quantization parameters to transform coefficients of blocks of the digital media data and applying inverse operations of a transform to the blocks of the digital media data, wherein

51017-20

the quantization parameters applied to luminance coefficients and to chrominance coefficients are selectively variable between at least a first chrominance quantization mode in which the chrominance coefficients use the same one or more quantization parameters as the luminance coefficients and a second chrominance quantization mode in which the chrominance

5 coefficients use different quantization parameters than the luminance coefficients.

According to another aspect of the present invention, there is provided a picture decoder device comprising: a data storage buffer for storing at least part of a bitstream of encoded picture data; and a processor programmed to decode the at least part of the bitstream by applying quantization parameters to transform coefficients of blocks of the

10 picture data according to quantization rules selectively applied according to signals in the bitstream and applying inverse operations of a transform to the blocks of the picture data, the signals in the bitstream including a first signal for determining how a quantization rule is to be applied across a spatial dimension, a second signal for determining how a quantization rule is to be applied across a frequency dimension, and a third signal for determining how a

15 quantization rule is to be applied across a color channel dimension.

According to yet another aspect of the present invention, there is provided a picture decoder device comprising: a data storage buffer for storing at least part of a bitstream of encoded picture data; and a processor programmed to decode the at least part of the bitstream by applying quantization parameters to transform coefficients of the blocks of the

20 picture data and applying inverse operations of a transform to the blocks of the picture data, wherein the quantization parameters applied to luminance coefficients and to chrominance coefficients are selectively variable between at least a first chroma quantization mode in which the chrominance coefficients use the same one or more quantization parameters as the luminance coefficients and a second chroma quantization mode in which the chrominance

25 coefficients use different quantization parameters than the luminance coefficients.

According to another aspect of the present invention, there is provided a digital media processing method comprising: encoding digital media data by applying operations of a transform to blocks of the digital media data and applying quantization parameters to transform coefficients of the blocks of the digital media data, wherein the quantization

51017-20

parameters are selectively variable across at least a spatial dimension, a frequency dimension, and a color channel dimension, and generating a bitstream of encoded digital media data, the bitstream further including signals for indicating how the quantization parameters were applied across the spatial dimension, the frequency dimension, and the color channel

5 dimension.

According to still another aspect of the present invention, there is provided a picture encoder device comprising: a data storage buffer for storing picture data to be encoded; and a processor programmed to: encode digital media data by applying operations of a transform to blocks of the digital media data and applying quantization parameters to

10 transform coefficients of the blocks of the digital media data, wherein the quantization parameters are selectively variable across at least a spatial dimension, a frequency dimension, and a color channel dimension, and generate a bitstream of encoded digital media data, the bitstream further including signals for indicating how the quantization parameters were applied across the spatial dimension, the frequency dimension, and the color channel

15 dimension.

The following Detailed Description presents variations of a flexible quantization technique that provides the ability to vary quantization along various dimensions of the encoded digital media data. For example, one representative implementation of the flexible quantization technique can vary quantization over three dimensions - over (i) spatial

20 locations, (ii) frequency sub bands, and (iii) color channels. The Detailed Description further presents ways to efficiently signal the flexible quantization in the encoded digital media data. The benefit of this

51017-20

quantization approach is that the overhead incurred by quantization related side information is minimized for the primary usage scenarios, while allowing maximum flexibility if desired by the encoder.

This Summary is provided to introduce a selection of concepts in a simplified form that is further described below in the Detailed Description. This Summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used as an aid in determining the scope of the claimed subject matter. Additional features and advantages of the invention will be made apparent from the following detailed description of embodiments that proceeds with reference to the accompanying drawings.

Brief Description Of The Drawings

Figure 1 is a block diagram of a conventional block transform-based codec in the prior art.

Figure 2 is a flow diagram of a representative encoder incorporating the block pattern coding.

Figure 3 is a flow diagram of a representative decoder incorporating the block pattern coding.

Figure 4 is a table containing a pseudo-code definition for signaling of a DC quantizer according to a flexible quantization technique.

Figure 5 is a table containing a pseudo-code definition for signaling of a low-pass quantizer according to the flexible quantization technique.

Figure 6 is a table containing a pseudo-code definition for signaling of a high-pass quantizer according to the flexible quantization technique.

Figure 7 is a table containing a pseudo-code definition for signaling of quantizers at a frame layer according to the flexible quantization technique.

Figure 8 is a table containing a pseudo-code definition for signaling of quantizers at a tile layer in spatial mode according to the flexible quantization technique.

Figure 9 is a table containing a pseudo-code definition for signaling of quantizers of a DC sub-band at the tile layer in frequency mode according to the flexible quantization technique.

Figure 10 is a table containing a pseudo-code definition for signaling of quantizers of a low-pass sub-band at the tile layer in frequency mode according to the flexible quantization technique.

Figure 11 is a table containing a pseudo-code definition for signaling of quantizers of a high-pass sub-band at the tile layer in frequency mode according to the flexible quantization technique.

Figure 12 is a table containing a pseudo-code definition for signaling of quantizers at a macroblock layer in spatial mode according to the flexible quantization technique.

Figure 13 is a table containing a pseudo-code definition for signaling of low-pass quantizers at the macroblock layer in frequency mode according to the flexible quantization technique.

Figure 14 is a table containing a pseudo-code definition for signaling of high-pass quantizers at the macroblock layer in frequency mode according to the flexible quantization technique.

Figure 15 is a block diagram of a suitable computing environment for implementing a media encoder/decoder with flexible quantization.

Detailed Description

The following description relates to coding and decoding techniques that provide efficient flexible quantization that can vary the quantization applied along spatial, frequency and color dimensions (referred to herein as “Flexible Quantization”). The following description describes an example implementation of the technique in the context of a digital media compression system or codec. The digital media system codes digital media data in a compressed form for transmission or storage, and decodes the data for playback or other processing. For purposes of illustration, this exemplary compression system incorporating this flexible quantization is an image or video compression system. Alternatively, the technique also can be incorporated into compression systems or codecs for other 2D data. The flexible quantization technique does not require that the digital media compression system encodes the compressed digital media data in a particular coding format.

1. Encoder/Decoder

Figures 2 and 3 are a generalized diagram of the processes employed in a representative 2-dimensional (2D) data encoder 200 and decoder 300. The diagrams present a generalized or simplified illustration of a compression system incorporating the 2D data encoder and decoder that implement the block pattern coding. In alternative compression systems using the block pattern coding, additional or fewer processes than those illustrated in this representative encoder and decoder can be used for the 2D data compression. For example, some encoders/decoders may also include color conversion, color formats, scalable coding, lossless coding, macroblock modes, etc. The compression system (encoder and decoder) can provide lossless and/or lossy compression of the 2D data, depending on the quantization which may be based on a quantization parameter varying from lossless to lossy.

The 2D data encoder 200 produces a compressed bitstream 220 that is a more compact representation (for typical input) of 2D data 210 presented as input to the encoder. For example, the 2D data input can be an image, a frame of a video sequence, or other data having two dimensions. The 2D data encoder divides a frame of the input data into blocks (illustrated generally in Figure 2 as partitioning 230), which in the illustrated implementation are non-overlapping 4x4 pixel blocks that form a regular pattern across the plane of the frame. These blocks are grouped in clusters, called macroblocks, which are 16x16 pixels in size in this representative encoder. In turn, the macroblocks are grouped into regular structures called tiles. The tiles also form a regular pattern over the image, such that tiles in a horizontal row are of uniform height and aligned, and tiles in a vertical column are of uniform width and aligned. In the representative encoder, the tiles can be any arbitrary size that is a multiple of 16 in the horizontal and/or vertical direction. Alternative encoder implementations can divide the image into block, macroblock, tiles, or other units of other size and structure.

A "forward overlap" operator 240 is applied to each edge between blocks, after which each 4x4 block is transformed using a block transform 250. This block transform 250 can be the reversible, scale-free 2D transform described by

51017-20

Srinivasan, U.S. Patent Application Publication No. 2006/0133683, entitled, "Reversible Transform For Lossy And Lossless 2-D Data Compression", filed December 17, 2004. The overlap operator 240 can be the reversible overlap operator described by Tu et al., U.S. Patent Application Publication No. 2006/0133682, entitled, "Reversible Overlap Operator for Efficient Lossless Data Compression," filed December 17, 2004; and by Tu et al., U.S. Patent Application Publication No. 2006/0133684, entitled, "Reversible 2-Dimensional Pre-/Post-Filtering For Lapped Biorthogonal Transform," filed January 14, 2005. Alternatively, the discrete cosine transform or other block transforms and overlap operators can be used. Subsequent to the transform, the DC coefficient 260 of each 4×4 transform block is subject to a similar processing chain (tiling, forward overlap, followed by 4×4 block transform). The resulting DC transform coefficients and the AC transform coefficients are quantized 270, entropy coded 280 and packetized 290.

The decoder performs the reverse process. On the decoder side, the transform coefficient bits are extracted 310 from their respective packets, from which the coefficients are themselves decoded 320 and dequantized 330. The DC coefficients 340 are regenerated by applying an inverse transform, and the plane of DC coefficients is "inverse overlapped" using a suitable smoothing operator applied across the DC block edges. Subsequently, the entire data is regenerated by applying the 4×4 inverse transform 350 to the DC coefficients, and the AC coefficients 342 decoded from the bitstream. Finally, the block edges in the resulting image planes are inverse overlap filtered 360. This produces a reconstructed 2D data output.

In an exemplary implementation, the encoder 200 (Figure 2) compresses an input image into the compressed bitstream 220 (e.g., a file), and the decoder 300 (Figure 3) reconstructs the original input or an approximation thereof, based on whether lossless or lossy coding is employed. The process of encoding involves the application of a forward lapped transform (LT) discussed below, which is implemented with reversible 2-dimensional pre-/post-filtering also described more fully below. The decoding process involves the application of the inverse lapped transform (ILT) using the reversible 2-dimensional pre-/post-filtering.

The illustrated LT and the ILT are inverses of each other, in an exact sense, and therefore can be collectively referred to as a reversible lapped transform. As a reversible transform, the LT/ILT pair can be used for lossless image compression.

The input data 210 compressed by the illustrated encoder 200/decoder 300
 5 can be images of various color formats (e.g., RGB/YUV4:4:4, YUV4:2:2 or YUV4:2:0 color image formats). Typically, the input image always has a luminance (Y) component. If it is a RGB/YUV4:4:4, YUV4:2:2 or YUV4:2:0 image, the image also has chrominance components, such as a U component and a V component. The separate color planes or components of the image can have
 10 different spatial resolutions. In case of an input image in the YUV 4:2:0 color format for example, the U and V components have half of the width and height of the Y component.

As discussed above, the encoder 200 tiles the input image or picture into macroblocks. In an exemplary implementation, the encoder 200 tiles the input
 15 image into 16x16 pixel areas (called "macroblocks") in the Y channel (which may be 16x16, 16x8 or 8x8 areas in the U and V channels depending on the color format). Each macroblock color plane is tiled into 4x4 pixel regions or blocks. Therefore, a macroblock is composed for the various color formats in the following manner for this exemplary encoder implementation:

- 20 1. For a grayscale image, each macroblock contains 16 4x4 luminance (Y) blocks.
2. For a YUV4:2:0 format color image, each macroblock contains 16 4x4 Y blocks, and 4 each 4x4 chrominance (U and V) blocks.
3. For a YUV4:2:2 format color image, each macroblock contains 16 4x4 Y
 25 blocks, and 8 each 4x4 chrominance (U and V) blocks.
4. For a RGB or YUV4:4:4 color image, each macroblock contains 16 blocks each of Y, U and V channels.

Accordingly, after transform, a macroblock in this representative encoder
 200/decoder 300 has three frequency sub bands: a DC sub band (DC macroblock),
 30 a low pass sub band (low pass macroblock), and a high pass sub band (high pass

macroblock). In the representative system, the low pass and/or high pass sub bands are optional in the bitstream – these sub bands may be entirely dropped.

Further, the compressed data can be packed into the bitstream in one of two orderings: spatial order and frequency order. For the spatial order, different sub
 5 bands of the same macroblock within a tile are ordered together, and the resulting bitstream of each tile is written into one packet. For the frequency order, the same sub band from different macroblocks within a tile are grouped together, and thus the bitstream of a tile is written into three packets: a DC tile packet, a low pass tile packet, and a high pass tile packet. In addition, there may be other data layers.

10 Thus, for the representative system, an image is organized in the following “dimensions”:

Spatial dimension : Frame $\rightarrow$ Tile $\rightarrow$ Macroblock;

Frequency dimension : DC | Low pass | High pass; and

Channel dimension: Luminance | Chrominance_0 | Chrominance_1 ... (e.g. as Y |
 15 U | V).

The arrows above denote a hierarchy, whereas the vertical bars denote a partitioning.

Although the representative system organizes the compressed digital media data in spatial, frequency and channel dimensions, the flexible quantization
 20 approach described here can be applied in alternative encoder/decoder systems that organize their data along fewer, additional or other dimensions. For example, the flexible quantization approach can be applied to coding using a larger number of frequency bands, other format of color channels (e.g., YIQ, RGB, etc.), additional image channels (e.g., for stereo vision or other multiple camera arrays).

25 **2. Flexible Quantization Overview**

In the representative encoder/decoder, the quantization operation is essentially a biased division by a quantization parameter QP which is performed at the encoder. The inverse quantization or multiplication operation is a multiplication by QP performed at the decoder. However, alternative
 30 implementations of the flexible quantization described herein can utilize other forms of quantization, including uniform and non-uniform, scalar or vector, with or

without dead zone, etc. The quantization/inverse quantization processes together introduce a loss in the original transform coefficient data, which shows up as compression errors or artifacts in the decoded image. In a simplistic codec, a certain fixed value of QP can be applied to all transform coefficients in a frame.

5 While this may be an acceptable solution in some cases, it has several deficiencies:

The human visual system is not equally sensitive to all frequencies, or to all spatial locations within a frame, or to all luminance and chrominance channels. Using different QP values for different coefficients may provide a visually superior encoding even with the same or smaller number of compressed bits. Likewise,
10 other error metrics can be suitably optimized as well.

Rate control or the ability of an encoder to produce a compressed file of a desired size is not easy to perform with a single QP across the entire frame.

Ideally therefore, it should be possible to allow the encoder to vary QP across the image in an arbitrary manner. However, this means that the actual value
15 of QP used for each data partition (macroblock/tile/channel/sub band, etc.) should be signaled in the bitstream. This leads to an enormous overhead just to carry the QP signaling information, making it unsuitable in practice. What is desired is a flexible yet bit-economic means of signaling QP, particularly for commonly encountered scenarios.

20 The flexible quantization technique described herein provides the ability to vary quantization along various partitions or dimensions of the encoded digital media data. For example, one implementation of the flexible quantization technique in the representative encoder 200/decoder 300 system can vary quantization over three dimensions – over (i) spatial locations, (ii) frequency sub
25 bands, and (iii) color channels. However, quantization can be varied over fewer, additional or other dimensions or partitions of the data in other alternative implementations of the flexible quantization technique. This technique also includes ways to efficiently signal the flexible quantization in the encoded media data. The benefit of this quantization approach is that the overhead incurred by
30 quantization related side information is minimized for the primary usage scenarios, while allowing maximum flexibility if desired by the encoder.

The flexible quantization technique provides fine spatial granularity control of the quantization. In one particular implementation, the flexible quantization allows control over quantization applied to the frame, tile, or down to the macroblock. If the frame is not quantized uniformly, then each tile can be
5 quantized uniformly; if a tile is not quantized uniformly, then each macroblock will be quantized differently.

The flexible quantization further allows quantization control along the frequency sub band dimension. In one particular implementation, the flexible quantization includes a sub band mode to specify a quantization relationship among
10 frequency sub bands. The sub bands can be quantized uniformly, or partially uniformly (low pass sub band using DC sub band quantizer, and/or high pass sub band using low pass quantizer), or independently.

The flexible quantization also allows control over quantization applied along the channel dimension of the data. In one particular implementation, the flexible
15 quantization includes a channel mode to specify a quantization relationship among color channels. The channels can be quantized uniformly, or partially uniformly (chrominance channels uniformly but luminance independently), or independently.

The flexible quantization described herein also provides techniques to efficiently signal in side information of the compressed digital media data,
20 combinations of the above quantization control over spatial, frequency sub band and channel that are of significance to the primary usage scenarios. Further, the flexible quantization technique provides a way to efficiently define choice of quantizer by indexing from a defined subset of possible quantizers in the digital media data.

25 **3. Flexible quantization in the spatial dimension:**

In the spatial dimension, three choices are provided by the flexible quantization technique in the representative encoder/decoder:

- The entire frame can be coded using the same quantization rule.
- Else, an entire tile can be coded using the same quantization rule and
30 different tiles within the frame can use different quantization rules.

- Else, each macroblock within a tile can be coded using the same quantization rule and different macroblocks within the tile can use different quantization rules.

One means of signaling these possibilities is as follows: A binary signal is sent in the bitstream at the frame level indicating whether the first possibility is true. If not, a fixed length symbol is sent in the bitstream within each tile indicating the number of quantization rules used for this tile. If the tile uses more than 1 quantization rule, then a variable length symbol is sent within each macroblock within the corresponding tile that indicates the quantization rule used by the macroblock. The decoder interprets the bitstream in a manner consistent with the encoder.

The representative encoder 200/decoder 300 uses a variant of the above signaling. A binary signal, represented by a generic syntax element, herein labeled as “XXX_FRAME_UNIFORM,” is only sent at the frame level (where XXX is a placeholder specifying the particular frequency sub band or channel dimension of quantizer control). At the tile level, the number of distinct quantizer rules is sent in a tile-level syntax element (XXX_QUANTIZERS) only when the frame level syntax element (XXX_FRAME_UNIFORM) is false. If this number is equal to 1, it means that there is only one rule and therefore all macroblocks within the tile are uniformly coded with the same quantization rule (indicating choice 2), and if not it indicates choice of the third possibility.

4. Flexible quantization across frequency bands:

For flexible quantization across frequency bands, the bitstream syntax of the representative encoder 200/decoder 300 defines two switches:

- The low pass macroblock uses the same quantization rule as the DC macroblock at the same spatial location. This corresponds to the syntax element USE_DC_QUANTIZER.
- The high pass macroblock uses the same quantization rule as the low pass macroblock at the same spatial location. This corresponds to the syntax element USE_LP_QUANTIZER.

These switches are enabled at the frame layer when the entire frame uses the same quantization rule, or at the tile layer otherwise. These switches are not enabled at the macroblock layer. All macroblocks within a tile therefore obey the same rules across frequency bands. A binary symbol is sent for each of the switches at the appropriate (frame or tile) layer.

5. Flexible quantization across image channels:

For flexible quantization across channels, the bitstream syntax of the representative encoder 200/decoder 300 permits three choices:

- All channels – luminance and chrominance have the same quantization rule. This is indicated by the generic syntax element `XXX_CH_MODE == CH_UNIFORM`.
- Luminance follows one quantization rule and all chrominance channels follow a different quantization rule, indicated by `XXX_CH_MODE == CH_MIXED`.
- All channels are free to choose different quantization rules, indicated by `XXX_CH_MODE == CH_INDEPENDENT`.

6. Combinatorial flexible quantization:

The representative encoder 200/decoder 300 uses a bitstream syntax defined in the code tables shown in Figures 4-14 that can efficiently encode the particular choice out of the flexible quantization options across the dimensions discussed above. With several quantization options available across each of the spatial, frequency sub band and channel dimensions, the number of permutations of the available quantization options is large. Adding to the complexity of flexible quantization across the three dimensions is the fact that the bitstream of the representative encoder 200/decoder 300 can be laid out in spatial or frequency ordering. However, this does not change the available quantization options, and only affects the serialization of the signals. The syntax defined in Figures 4-14 provides an efficient coding of the combinatorial flexible quantization rules.

Some salient features of the combinatorial quantization rules as defined in the syntax of the representative encoder/decoder are as follows.

DC quantization is not allowed to vary on a macroblock basis. This allows the differential coding of quantized DC values without having to do an inverse scaling operation. Coding the DC band of an image tile with a relatively small quantizer even when the AC (low pass and high pass) bands are coded with varying
5 quantization does not appreciably affect the bit rate.

At one end of the scale, all transform coefficients within a frame use the same quantization parameter. At the other end of the scale, low pass and high pass quantization rules for all channels are allowed to vary independently for each macroblock of the tile / frame. The only restriction is that the number of distinct
10 low pass and high pass quantizer rules (covering all channels) is each restricted to 16. Each such rule may specify independent values of quantization parameter for each channel.

Between these extremes, several combinations are permitted as specified by the syntax tables shown in Figures 4-14.

15 7. **Indexing of quantizer parameters:**

The specific quantization parameter (QP) in the representative encoder/decoder is based on a harmonic scale. An 8 bit value of a quantizer parameter index (QPI) corresponds to a value of QP which can be relatively large. A second level of indexing is performed so that QPIs varying across macroblocks
20 can be coded in an efficient manner.

More particularly, the encoder 200 can define a set in the bitstream containing between 1 and 16 QPI "vectors." Each QPI vector is composed of one or more QPI values, based on which XXX_CHANNEL_MODE is chosen. Such sets are defined for DC, low pass and high pass sub bands, based on the frequency
25 band switch. Further, the DC set has only one QPI vector since only one DC quantizer is permissible in a tile-channel. The coding of these sets is defined in the tables shown in Figures 4-6.

As shown in the tables of Figures 7-11, signaling of the QPI vector sets of DC, low pass and high pass frequency sub bands occurs as follows. Based on the
30 other coding modes, the cardinality of each set (i.e., the number of QPI vectors in the set) is indicated for low pass and high pass sub bands at the start of the

corresponding tile or frame. The cardinality of the DC set is 1. In the pseudo-code tables, the syntax element denoting cardinality is labeled as “XXX_QUANTIZERS.” (In practice, XXX_QUANTIZERS – 1 is sent in the bitstream.) The syntax elements labeled “XXX_QUANTIZER” in the tables
5 denotes the coding of QPI sets, which is defined in the tables shown in Figures 4-6.

At the macroblock level, it is sufficient to send only the index QI of the desired QPI vector from within the QPI set. The tables in Figures 12-14 define the syntax of sending QI on a macroblock basis. The syntax element corresponding to QI is labeled, “XXX_QUANTIZER_INDEX.” A variable length code is used to
10 signal QI. First, a one bit symbol is sent indicating whether QI is zero or not. If not, then a fixed length code of length being given by $\text{ceil}(\log_2(\text{XXX_QUANTIZERS} - 1))$ is sent indicating the specific QI different from zero. This allows for an efficient encoding of a “default” quantization rule (QI = 0) with as low as one bit per macroblock. When XXX_QUANTIZERS is 1,
15 XXX_QUANTIZER_INDEX is uniquely zero and therefore QI need not be signaled.

8. Extensions

The above description of the flexible quantization is specific to its implementation in a representative encoder and decoder, and syntax. However, the
20 principles of this technique are extensible to other digital media compression systems and formats as well. For instance, the representative encoder/decoder has only three frequency sub bands (DC, low pass and high pass). But, more generally, alternative implementations of the flexible quantization can be extended in a straightforward manner to a multitude of frequency sub bands. Likewise,
25 alternative flexible quantization implementations can vary the quantizer at finer spatial granularity, such as by sending quantization index (QI) information at the sub-macroblock (such as block) level. Many extensions to the underlying principles of the flexible quantization technique are possible within the same framework.

9. Computing Environment

The above-described processing techniques for flexible quantization can be realized on any of a variety of digital media encoding and/or decoding systems, including among other examples, computers (of various form factors, including server, desktop, laptop, handheld, etc.); digital media recorders and players; image and video capture devices (such as cameras, scanners, etc.); communications equipment (such as telephones, mobile phones, conferencing equipment, etc.); display, printing or other presentation devices; and etc. The flexible quantization techniques can be implemented in hardware circuitry, in firmware controlling digital media processing hardware, as well as in communication software executing within a computer or other computing environment, such as shown in Figure 15.

Figure 15 illustrates a generalized example of a suitable computing environment (1500) in which described embodiments may be implemented. The computing environment (1500) is not intended to suggest any limitation as to scope of use or functionality of the invention, as the present invention may be implemented in diverse general-purpose or special-purpose computing environments.

With reference to Figure 15, the computing environment (1500) includes at least one processing unit (1510) and memory (1520). In Figure 15, this most basic configuration (1530) is included within a dashed line. The processing unit (1510) executes computer-executable instructions and may be a real or a virtual processor. In a multi-processing system, multiple processing units execute computer-executable instructions to increase processing power. The memory (1520) may be volatile memory (e.g., registers, cache, RAM), non-volatile memory (e.g., ROM, EEPROM, flash memory, etc.), or some combination of the two. The memory (1520) stores software (1580) implementing the described digital media encoding/decoding with flexible quantization techniques.

A computing environment may have additional features. For example, the computing environment (1500) includes storage (1540), one or more input devices (1550), one or more output devices (1560), and one or more communication connections (1570). An interconnection mechanism (not shown) such as a bus,

controller, or network interconnects the components of the computing environment (1500). Typically, operating system software (not shown) provides an operating environment for other software executing in the computing environment (1500), and coordinates activities of the components of the computing environment (1500).

5 The storage (1540) may be removable or non-removable, and includes magnetic disks, magnetic tapes or cassettes, CD-ROMs, CD-RWs, DVDs, or any other medium which can be used to store information and which can be accessed within the computing environment (1500). The storage (1540) stores instructions for the software (1580) implementing the described digital media
10 encoding/decoding with flexible quantization techniques.

 The input device(s) (1550) may be a touch input device such as a keyboard, mouse, pen, or trackball, a voice input device, a scanning device, or another device that provides input to the computing environment (1500). For audio, the input device(s) (1550) may be a sound card or similar device that accepts audio input in
15 analog or digital form from a microphone or microphone array, or a CD-ROM reader that provides audio samples to the computing environment. The output device(s) (1560) may be a display, printer, speaker, CD-writer, or another device that provides output from the computing environment (1500).

 The communication connection(s) (1570) enable communication over a
20 communication medium to another computing entity. The communication medium conveys information such as computer-executable instructions, compressed audio or video information, or other data in a modulated data signal. A modulated data signal is a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal. By way of example, and not
25 limitation, communication media include wired or wireless techniques implemented with an electrical, optical, RF, infrared, acoustic, or other carrier.

 The described digital media encoding/decoding with flexible quantization techniques herein can be described in the general context of computer-readable media. Computer-readable media are any available media that can be accessed
30 within a computing environment. By way of example, and not limitation, with the

51017-20

computing environment (1500), computer-readable media include memory (1520), storage (1540), communication media, and combinations of any of the above.

The described digital media encoding/decoding with flexible quantization techniques herein can be described in the general context of computer-executable instructions, such as those included in program modules, being executed in a computing environment on a target real or virtual processor. Generally, program modules include routines, programs, libraries, objects, classes, components, data structures, etc. that perform particular tasks or implement particular abstract data types. The functionality of the program modules may be combined or split between program modules as desired in various embodiments. Computer-executable instructions for program modules may be executed within a local or distributed computing environment.

For the sake of presentation, the detailed description uses terms like “determine,” “generate,” “adjust,” and “apply” to describe computer operations in a computing environment. These terms are high-level abstractions for operations performed by a computer, and should not be confused with acts performed by a human being. The actual computer operations corresponding to these terms vary depending on implementation.

In view of the many possible embodiments to which the principles of our invention may be applied, we claim as our invention all such embodiments as may come within the scope of the following claims and equivalents thereto.

51017-20

CLAIMS:

1. A method of decoding digital media, comprising:

with a computer,

receiving compressed digital image data, the compressed digital image data
5 having been partitioned along more than one dimension;

determining multiple sets of quantization parameter indices from signals in the
compressed digital image data, the compressed digital image data having been quantized
across more than one partitioned dimension of the digital image data, the signals indicating
whether quantization parameter indices used during decoding vary within a frequency band
10 dimension and within a color channel dimension, the quantization parameter indices available
across the frequency band dimension including, for a given set of the multiple sets of
quantization parameter indices, a first quantization parameter index for one or more DC
components, a second quantization parameter index for multiple low-pass components, and a
third quantization parameter index for multiple high-pass components;
15 for each of multiple macroblocks of the compressed digital image data:

selecting one of the multiple sets of quantization parameter indices based on a
value signaled for the macroblock; and

determining one or more quantization parameters for the selected set of
quantization parameter indices;
20 dequantizing the compressed digital image data in accordance with the
determined quantization parameters;

applying an inverse of a block transform to blocks of the dequantized digital
image data; and

outputting decompressed digital image data,

51017-20

wherein: (a) the multiple high-pass coefficients are AC coefficients from first transforms of values of blocks of a macroblock; (b) the multiple low-pass coefficients are AC coefficients from a second transform of DC coefficients from the first transforms; and (c) the one or more DC coefficients include a DC coefficient from the second transform of the DC coefficients from the first transforms.

2. The method of claim 1, wherein the signals further include (i) a signal indicating whether the low-pass components are to be decoded using the first quantization parameter index for the DC components and (ii) a signal indicating whether the high-pass components are to be quantized using the second quantization parameter index for low-pass components.

3. The method of claim 1, wherein the signals further indicate whether quantization parameters used during dequantization vary within a color channel dimension, and wherein the signals further include a signal indicating (i) whether to dequantize DC components of a luminance channel and both chrominance channels uniformly, (ii) whether to dequantize the DC component of the luminance channel separately from the DC components of the chrominance channels, or (iii) whether to dequantize the DC component of the luminance channel and each of the DC components for the chrominance channels independently.

4. The method of claim 1, wherein said determining quantization parameters further comprises:

determining whether to specify DC quantization parameters (a) uniformly for a luminance channel and all chrominance channels; (b) separately between (i) the luminance channel and (ii) all chrominance channels; or (c) independently for the luminance channel and each of the chrominance channels.

5. The method of claim 4, wherein said determining quantization parameters further comprises:

determining whether to specify LP quantization parameters using the DC quantization parameters and, if not, determining whether to specify the LP quantization

51017-20

parameters (a) uniformly for a luminance channel and all chrominance channels; (b) separately between (i) the luminance channel and (ii) all chrominance channels; or (c) independently for the luminance channel and each of the chrominance channels.

6. The method of claim 1 wherein the signals include a flag that indicates whether
5 the second quantization parameter index is same as the third quantization parameter index.

7. At least one memory device or magnetic disk having program code stored thereon for causing a digital media processing device to perform a method of processing digital media data according to a codec, the method comprising decoding a compressed data stream encoded according to the method of any one of claims 1 to 6.

10 8. At least one memory device or magnetic disk having program code stored thereon for causing a digital media processing device to perform a method of processing digital media data according to a codec, the method comprising:

receiving compressed digital image data;

15 determining multiple sets of quantization parameter indices from signals in the compressed digital image data, the signals indicating whether quantization parameter indices used during decoding vary within a frequency band dimension and within a color channel dimension, the quantization parameter indices available across the frequency band dimension including, for a given set of the multiple sets of quantization parameter indices, a first quantization parameter index for one or more DC components, a second quantization
20 parameter index for multiple low-pass components, and a third quantization parameter index for multiple high-pass components;

for each of multiple macroblocks of the compressed digital image data:

selecting one of the multiple sets of quantization parameter indices based on a value signaled for the macroblock; and

25 determining one or more quantization parameters for the selected set of quantization parameter indices;

51017-20

dequantizing the compressed digital image data in accordance with the determined quantization parameters;

applying an inverse of a block transform to blocks of the dequantized digital image data; and

5 outputting decompressed digital image data,

wherein (a) the multiple high-pass coefficients are AC coefficients from first transforms of values of blocks of a macroblock; (b) the multiple low-pass coefficients are AC coefficients from a second transform of DC coefficients from the first transforms; and (c) the one or more DC coefficients include a DC coefficient from the second transform of the DC
10 coefficients from the first transforms.

9. The at least one memory device or magnetic disk of claim 8, wherein the signals further indicate whether quantization parameters used during dequantization vary within a color channel dimension, and wherein said determining quantization parameters comprises:

15 determining whether to specify DC quantization parameters (a) uniformly for a luminance channel and all chrominance channels; (b) separately between (i) the luminance channel and (ii) all chrominance channels; or (c) independently for the luminance channel and each of the chrominance channels.

10. The at least one memory device or magnetic disk of claim 9, wherein said
20 determining quantization parameters further comprises:

determining whether to specify LP quantization parameters using the DC quantization parameters and, if not, determining whether to specify the LP quantization parameters (a) uniformly for a luminance channel and all chrominance channels; (b) separately between (i) the luminance channel and (ii) all chrominance channels; or (c)
25 independently for the luminance channel and each of the chrominance channels.

51017-20

11. The at least one memory device or magnetic disk of claim 8, wherein the signals include a flag that indicates whether the second quantization parameter index is same as the third quantization parameter index.

12. A method of decoding digital media, comprising:

5 with a computer,

receiving compressed digital image data, the compressed digital image data having been partitioned along more than one dimension;

determining multiple sets of quantization parameter indices from signals in the compressed digital image data, the compressed digital image data having been quantized
 10 across more than one partitioned dimension of the digital image data, the signals indicating whether quantization parameter indices used during decoding vary within a frequency band dimension and within a color channel dimension, the quantization parameter indices available across the frequency band dimension including, for a given set of the multiple sets of quantization parameter indices, a first quantization parameter index for a DC component, a
 15 second quantization parameter index for multiple low-pass components, and a third quantization parameter index for multiple high-pass components;

for each of multiple macroblocks of the compressed digital image data:

selecting one of the multiple sets of quantization parameter indices based on a value signaled for the macroblock; and

20 determining one or more quantization parameters for the selected set of quantization parameter indices;

dequantizing the compressed digital image data in accordance with the determined quantization parameters;

25 applying an inverse of a block transform to blocks of the dequantized digital image data; and

51017-20

outputting decompressed digital image data.

13. The method of claim 12, wherein the signals further include (i) a signal indicating whether the low-pass components are to be decoded using the first quantization parameter index for the DC component and (ii) a signal indicating whether the high-pass
5 components are to be quantized using the second quantization parameter index for low-pass components.

14. The method of claim 12, wherein the signals further indicate whether quantization parameters used during dequantization vary within a color channel dimension, and wherein the signals further include a signal indicating (i) whether to dequantize DC
10 components of a luminance channel and both chrominance channels uniformly, (ii) whether to dequantize the DC component of the luminance channel separately from the DC components of the chrominance channels, or (iii) whether to dequantize the DC component of the luminance channel and each of the DC components for the chrominance channels independently.

15. The method of claim 12, wherein said determining quantization parameters further comprises:

determining whether to specify DC quantization parameters (a) uniformly for a luminance channel and all chrominance channels; (b) separately between (i) the luminance channel and (ii) all chrominance channels; or (c) independently for the luminance channel and
20 each of the chrominance channels.

16. The method of claim 15, wherein said determining quantization parameters further comprises:

determining whether to specify LP quantization parameters using the DC quantization parameters and, if not, determining whether to specify the LP quantization
25 parameters (a) uniformly for a luminance channel and all chrominance channels; (b) separately between (i) the luminance channel and (ii) all chrominance channels; or (c) independently for the luminance channel and each of the chrominance channels.

51017-20

17. The method of claim 12, wherein the signals include a flag that indicates whether the second quantization parameter index is same as the third quantization parameter index.

18. The method of claim 12, wherein:

5 (a) the multiple high-pass coefficients are AC coefficients from first transforms of values of blocks of a macroblock;

(b) the multiple low-pass coefficients are AC coefficients from a second transform of DC coefficients from the first transforms; and

10 (c) the DC coefficient includes a DC coefficient from the second transform of the DC coefficients from the first transforms.

19. At least one computer-readable storage medium having program code stored thereon that, when executed, causes a digital media processing device to perform a method of processing digital media data according to a codec, the method comprising decoding a compressed data stream encoded according to the method of any one of claims 12 to 18.

Figure 1
Prior Art

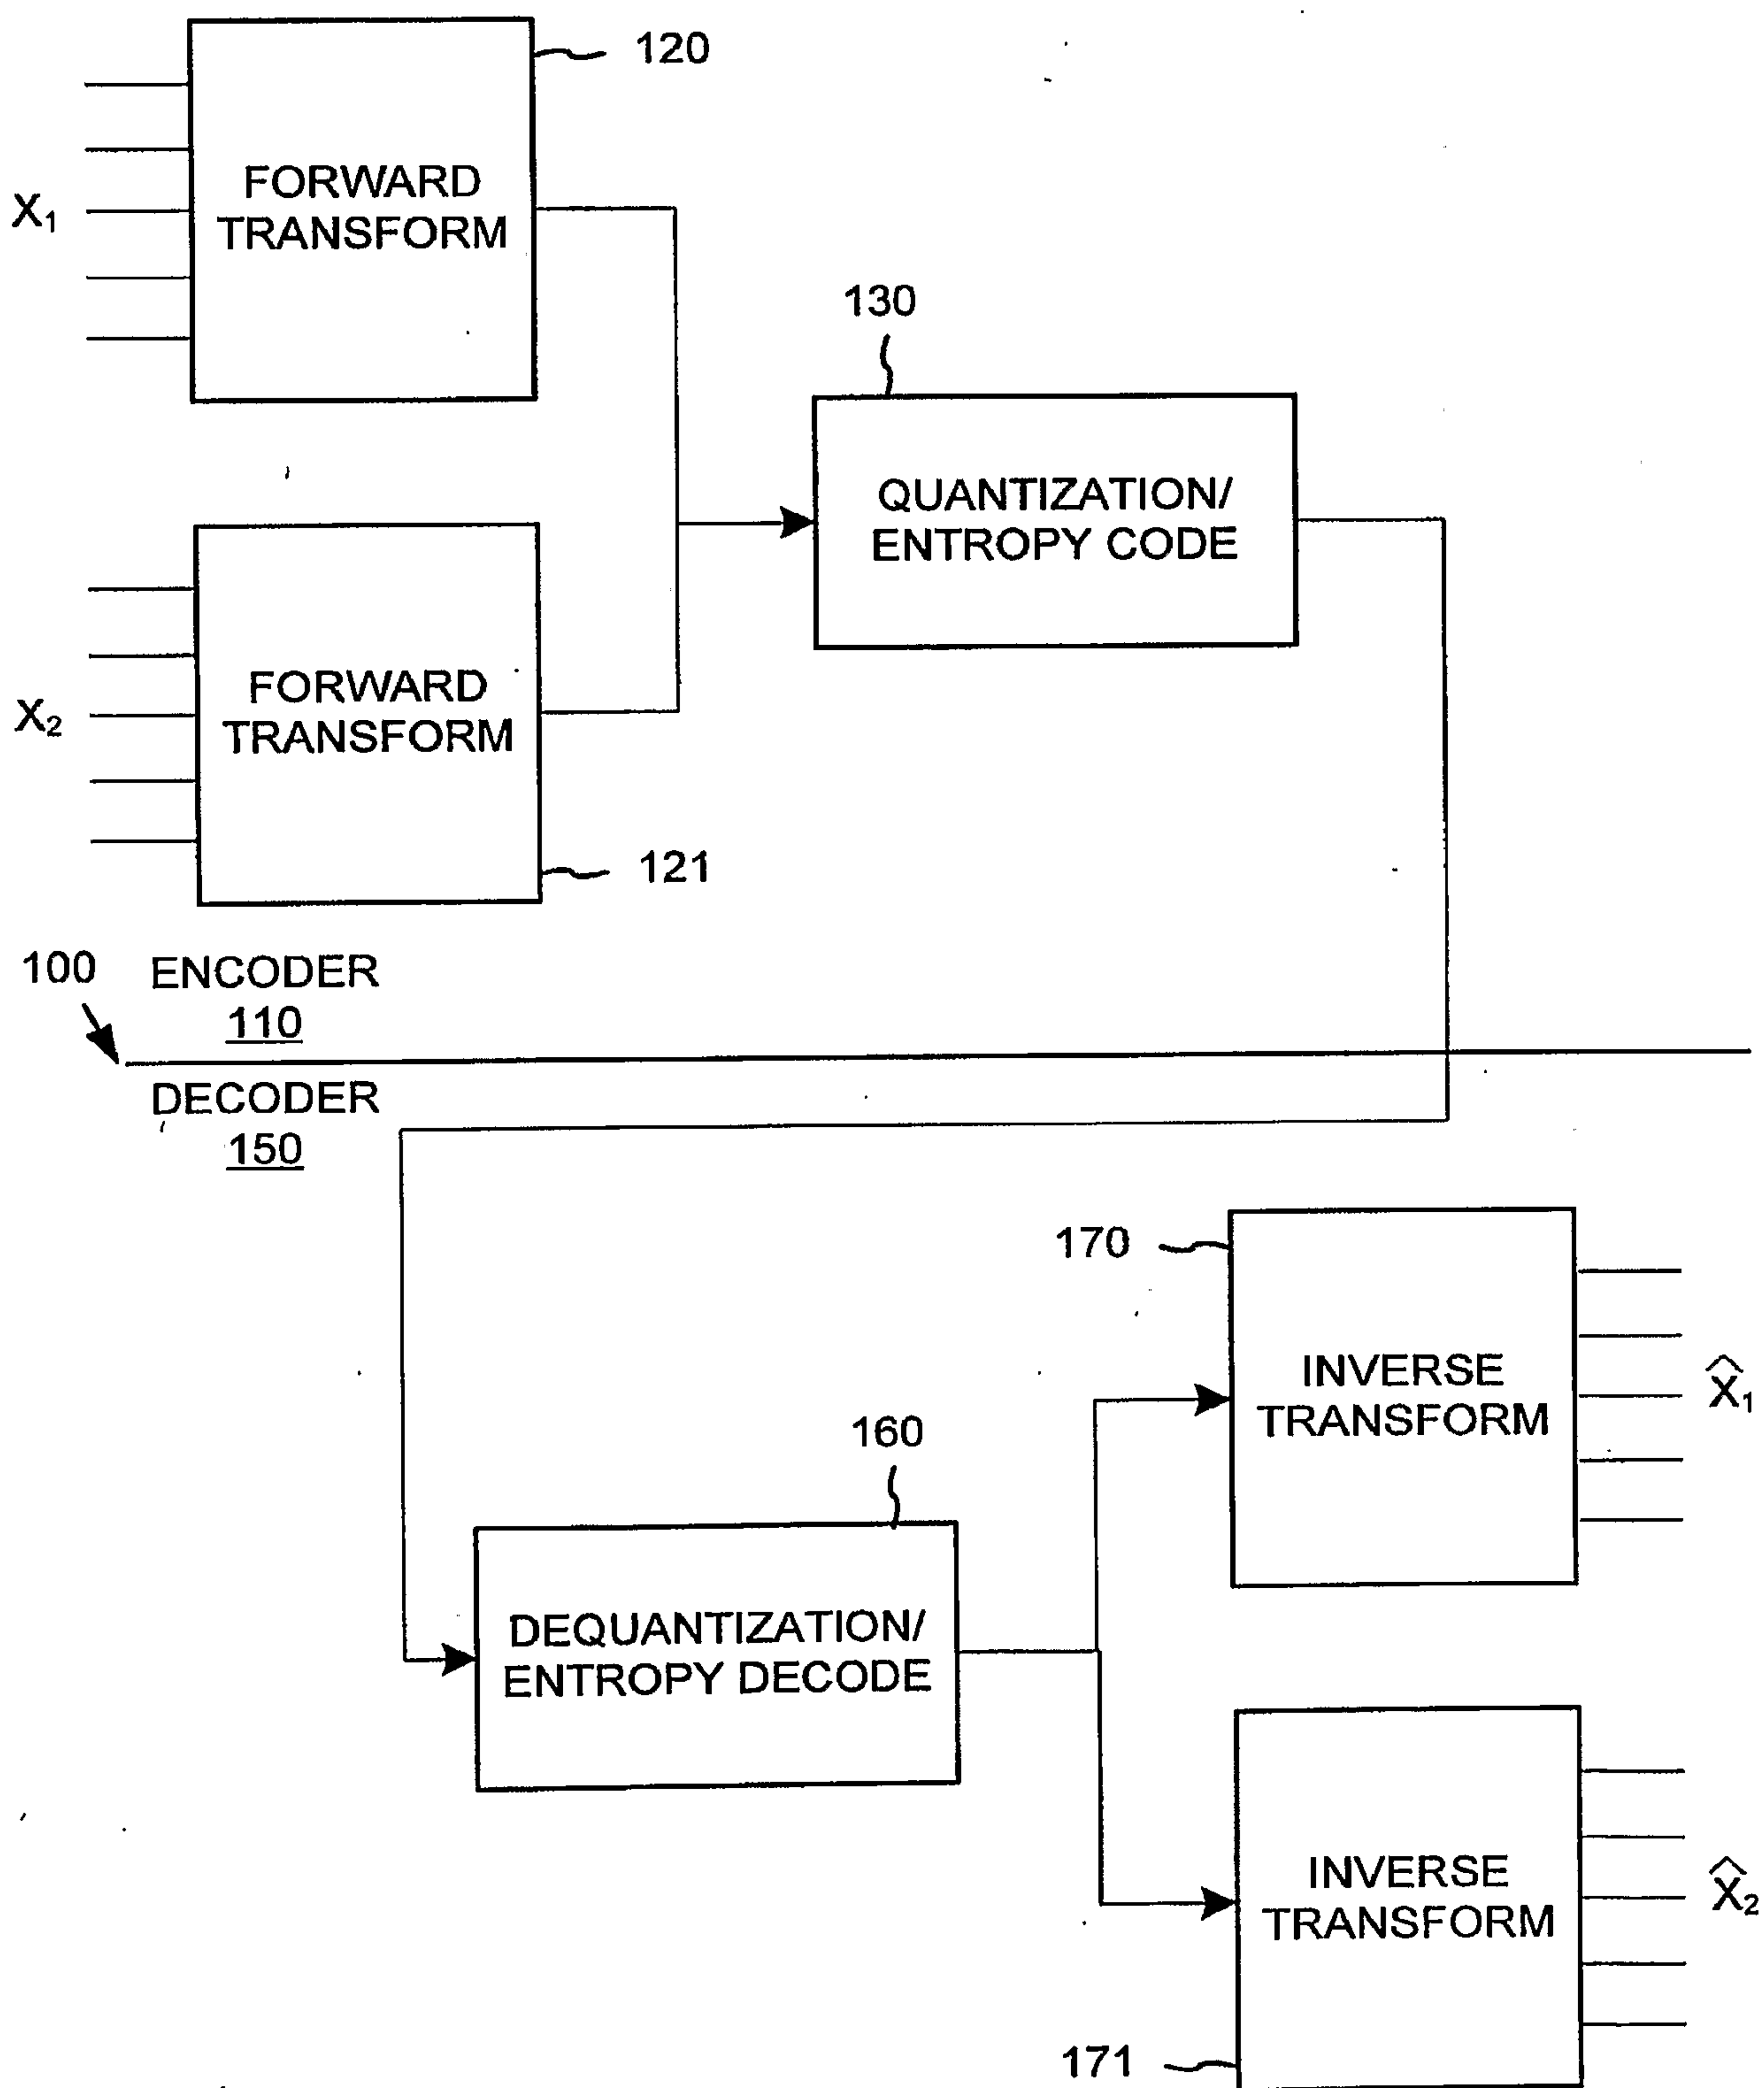


Figure 2

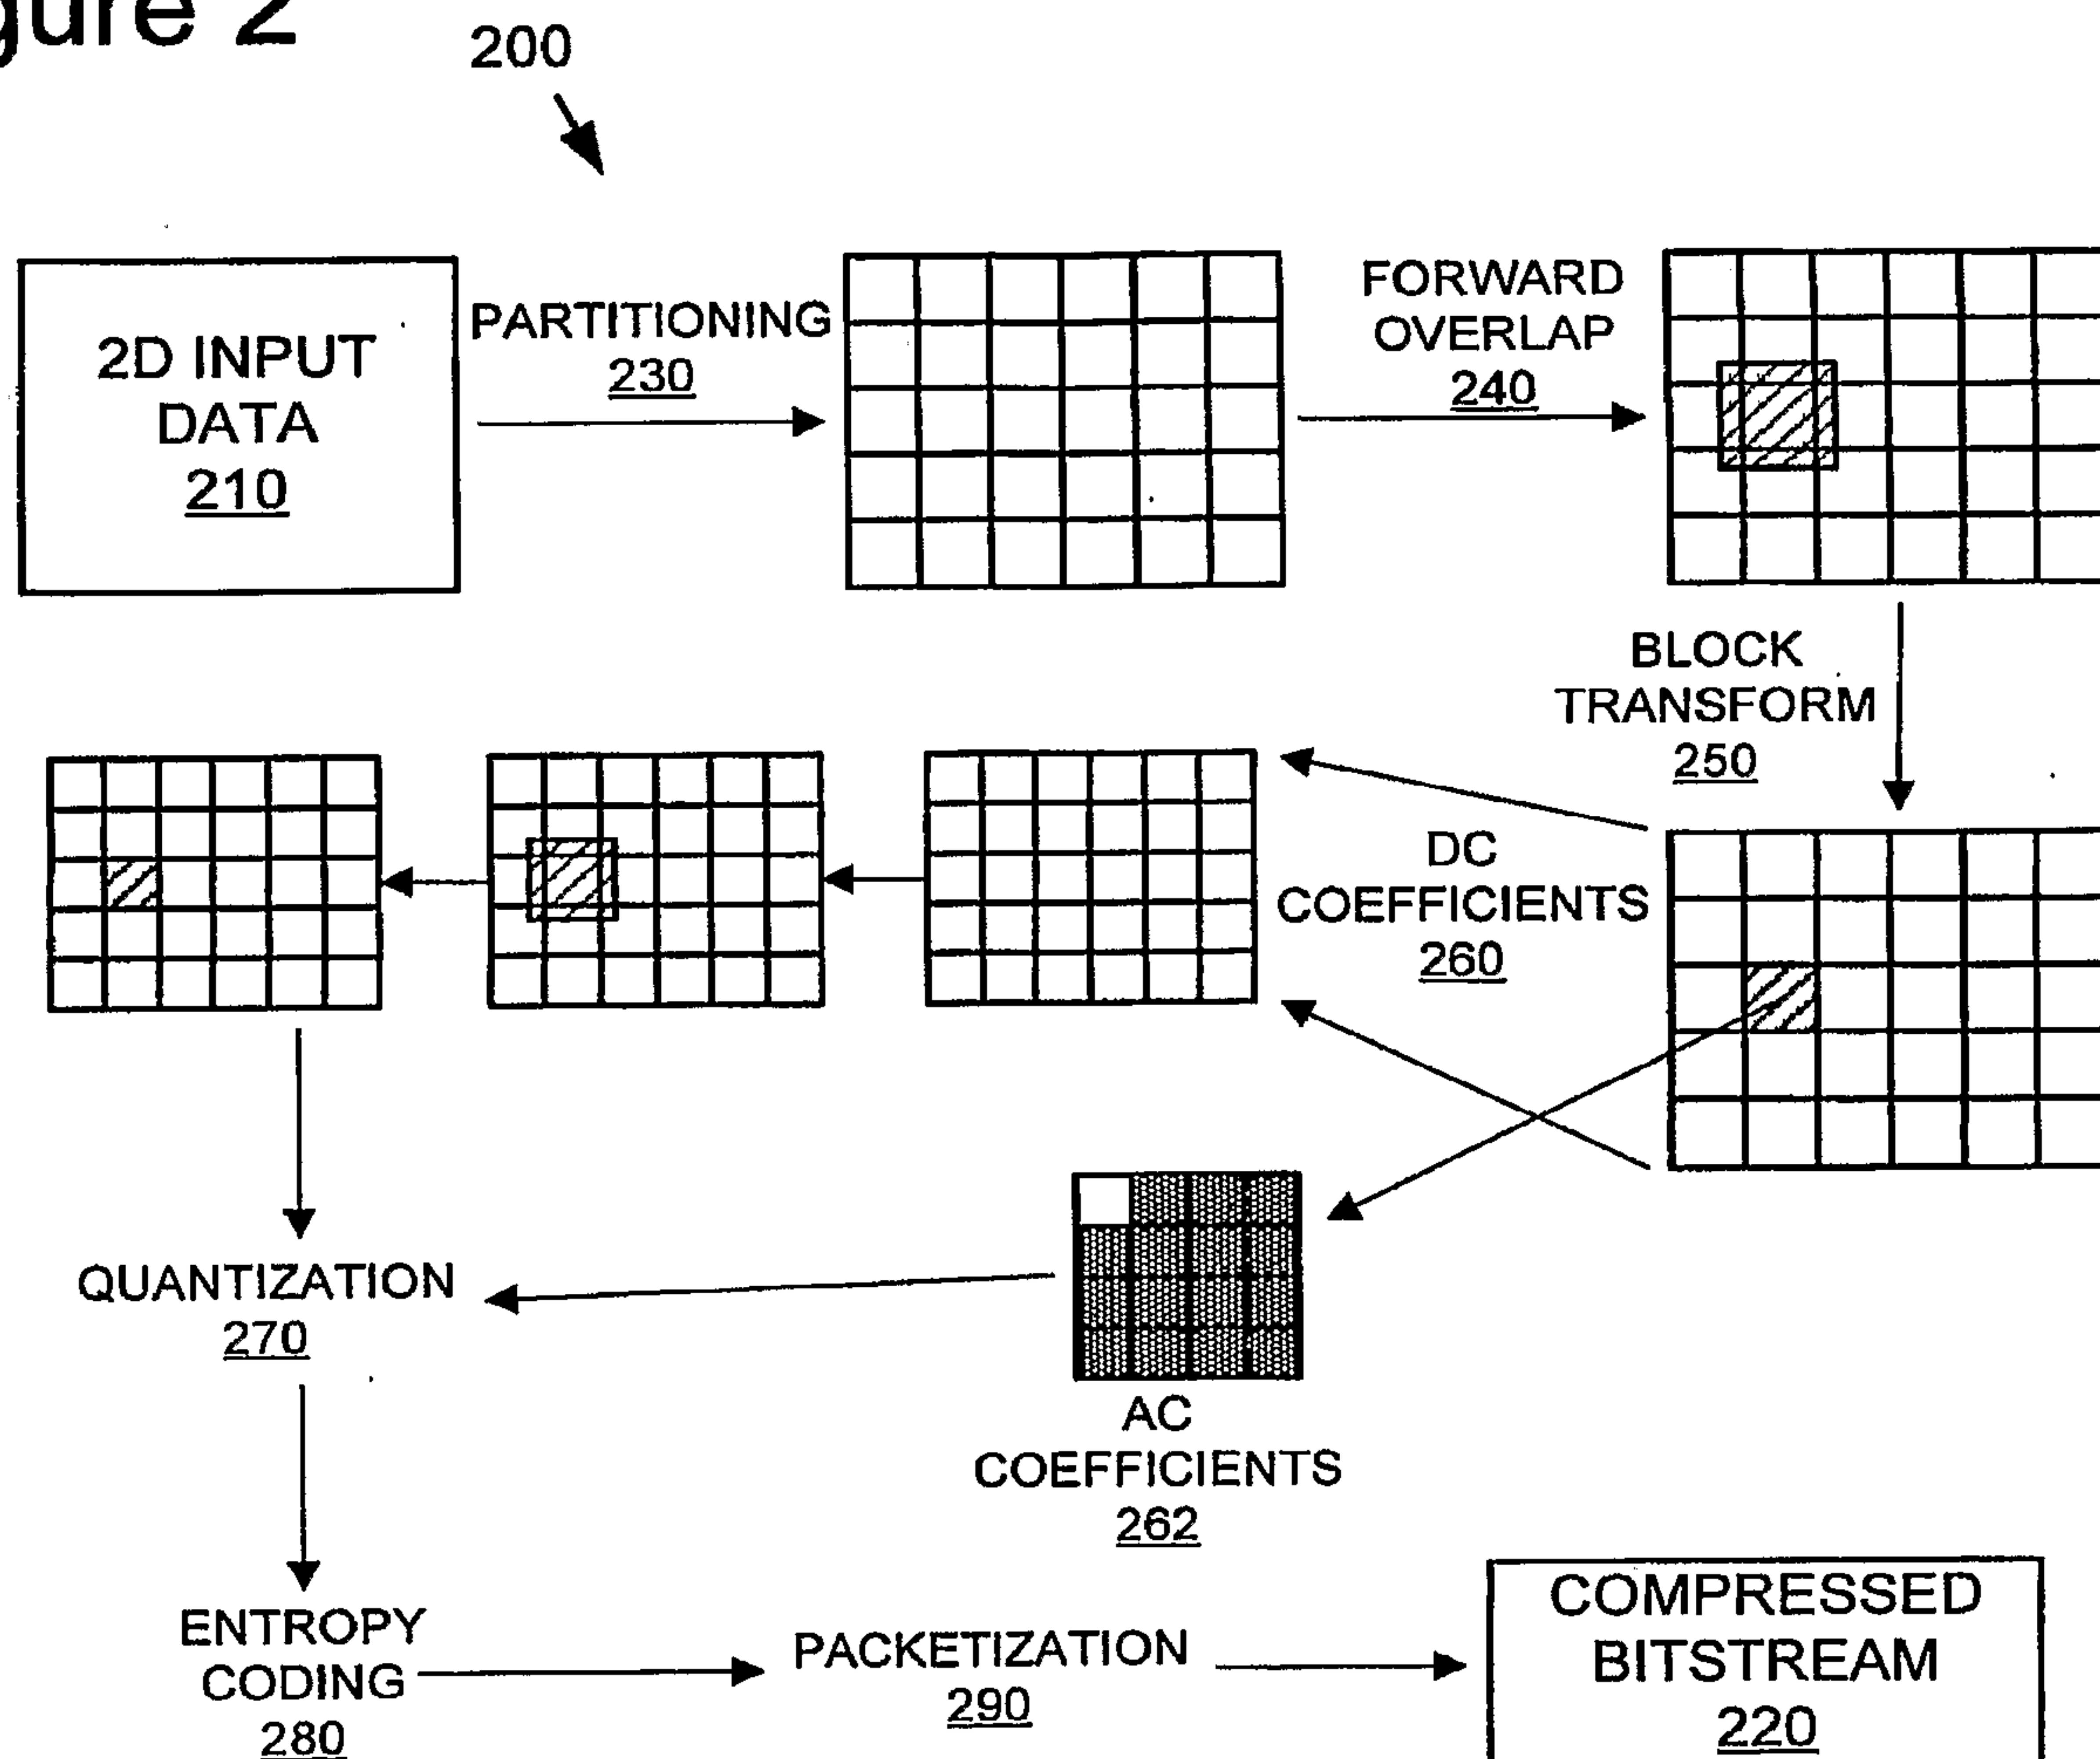


Figure 3

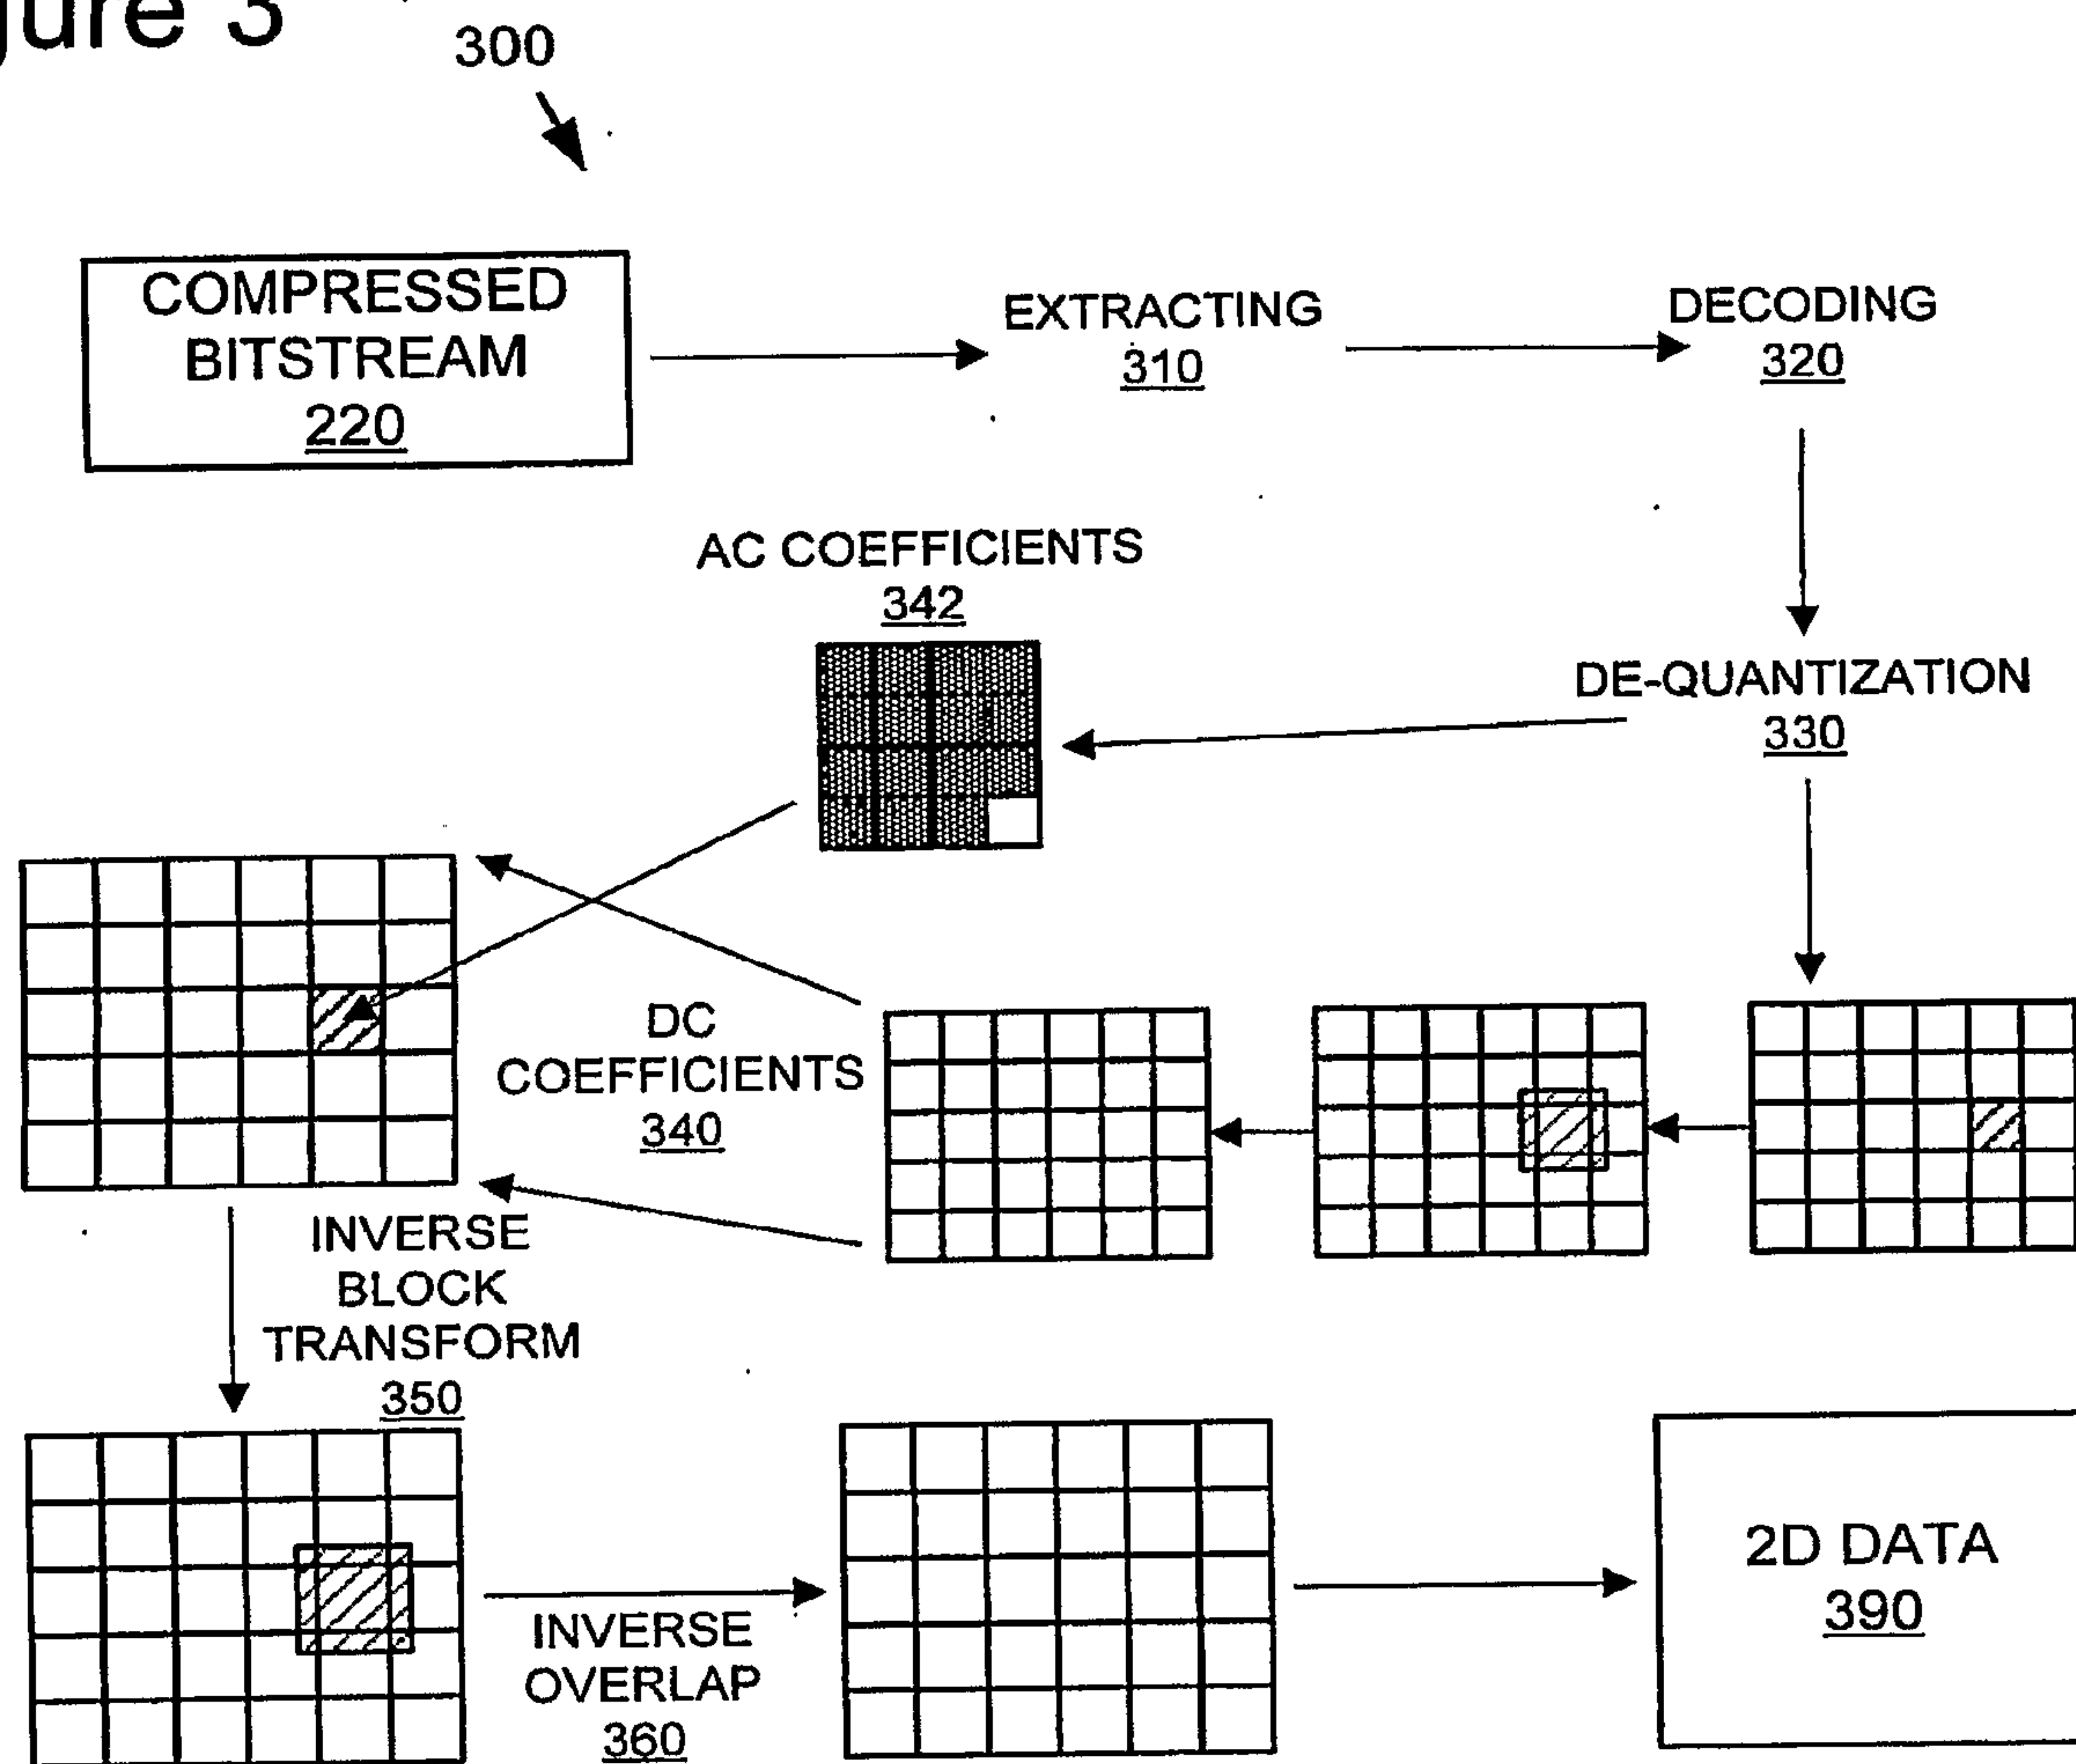


Figure 4

400



DC_QUANTIZER () {	Num bits
if(CHANNELS == 1) DC_CH_MODE = CH_UNIFORM	
Else	
DC_CH_MODE	2
if (DC_CH_MODE == CH_UNIFORM)	
DC_QUANT	8
Else if (DC_CH_MODE == CH_MIXED) {	
DC_QUANT_Y	8
DC_QUANT_UV	8
}	
Else if (DC_CH_MODE == CH_INDEPENDENT) {	
for (i = 0; i < CHANNELS; i++)	
DC_QUANT_CHANNEL_i	8
}	
}	

Figure 5

500



LP_QUANTIZER () {	Num bits
for (q = 0; q < LP_QUANTIZERS; q++) {	
if(CHANNELS == 1)	
LP_CHMODE[q] = CH_UNIFORM	
Else	
LP_CH_MODE[q]	2
if (LP_CH_MODE[q] == CH_UNIFORM)	
LP_QUANT[q]	8
else if (LP_CH_MODE[q] == CH_MIXED) {	
LP_QUANT_Y[q]	8
LP_QUANT_UV[q]	8
}	
else if (LP_CH_MODE[q] == CH_INDEPENDENT)	
for (i = 0; i < CHANNELS; i++)	
LP_QUANT_CHANNEL_i[q]	8
}	
}	

Figure 6

600



HP_QUANTIZER () {	Num bits
for (q = 0; q < HP_QUANTIZERS; q++) {	
if(CHANNELS == 1)	
HP_CH_MODE[q] = CH_UNIFORM	
Else	
HP_CH_MODE[q]	2
if (HP_CH_MODE[q] == CH_UNIFORM)	
HP_QUANT[q]	8
else if (LP_CH_MODE[q] ==	
CH_MIXED) {	
HP_QUANT_Y[q]	8
HP_QUANT_UV[q]	8
}	
else if (HP_CH_MODE[q] ==	
CH_INDEPENDENT)	
for (i = 0; i < CHANNELS; i++)	
HP_QUANT_CHANNEL_i[q]	8
}	
}	

Figure 7

700



FRAME () {	Num bits
...	lots
DC_FRAME_UNIFORM	1
if (DC_FRAME_UNIFORM)	
DC_QUANTIZER	variable
if('lowpass not skipped'){	
USE_DC_QUANTIZER	1
if(USE_DC_QUANTIZER == FALSE){	
LP_FRAME_UNIFORM	1
if(LP_FRAME_UNIFORM){	
LP_QUANTIZERS = 1	
LP_QUANTIZER()	variable
}	
}	
}	
if('highpass not skipped'){	
USE_LP_QUANTIZER	1
if(USE_LP_QUANTIZER == FALSE){	
HP_FRAME_UNIFORM	1
if(HP_FRAME_UNIFORM){	
HP_QUANTIZERS = 1	
HP_QUANTIZER()	variable
}	
}	
}	
}	

Figure 8

800

SPATIAL_TILE () {	Num bits
...	lots
if (DC_FRAME_UNIFORM == FALSE) DC_QUANTIZER	variable
if ('lowpass not skipped' && LP_FRAME_UNIFORM == FALSE) { USE_DC_QUANTIZER	1
if (USE_DC_QUANTIZER == FALSE) LP_QUANTIZERS	4
LP_QUANTIZER	variable
}	
if ('higpass not skipped' && HP_FRAME_UNIFORM){ USE_LP_QUANTIZER	1
if (USE_LP_QUANTIZER == FALSE) HP_QUANTIZERS	4
HP_QUANTIZER	variable
}	
...	lots
}	

Figure 9

900

DC_TILE () {	Num bits
...	lots
if (DC_FRAME_UNIFORM == FALSE) { DC_QUANTIZER	variable
}	
...	lots
}	

Figure 10

1000

LP_TILE () {	Num bits
...	lots
if (LP_FRAME_UNIFORM == FALSE) { USE_DC_QUANTIZER	1
if (USE_DC_QUANTIZER == FALSE) LP_QUANTIZERS	4
LP_QUANTIZER	Variable
}	
...	Lots
}	

Figure 11

1100 ↘

HP_TILE () {	Num bits
...	Lots
if (HP_FRAME_UNIFORM == FALSE) {	
USE_LP_QUANTIZER	1
if (USE_LP_QUANTIZER == FALSE)	
HP_QUANTIZERS	4
HP_QUANTIZER	Variable
}	
...	Lots
}	

Figure 12

1200 ↘

SPATIAL_MB () {	Num bits
if ('lowpass not skipped' && LP_QUANTIZERS > 1 && USE_DC_QUANTIZER == FALSE)	
LP_QUANTIZER_INDEX	Variable
if ('higpass not skipped' && HP_QUANTIZERS > 1 && USE_HP_QUANTIZER == FALSE)	
HP_QUANTIZER_INDEX	Variable
...	Lots
}	

Figure 13


1300 ↘

LP_MB () {	Num bits
...	Lots
if (LP_QUANTIZERS > 1 && USE_DC_QUANTIZER == FALSE)	
LP_QUANTIZER_INDEX	Variable
...	Lots
}	

Figure 14

1400 ↓	HP_MB () {	Num
	...	bits
	if (HP_QUANTIZERS > 1 && USE_LP_QUANTIZER == FALSE) HP_QUANTIZER_INDEX	Lots
	...	Variable
	}	Lots

Figure 15

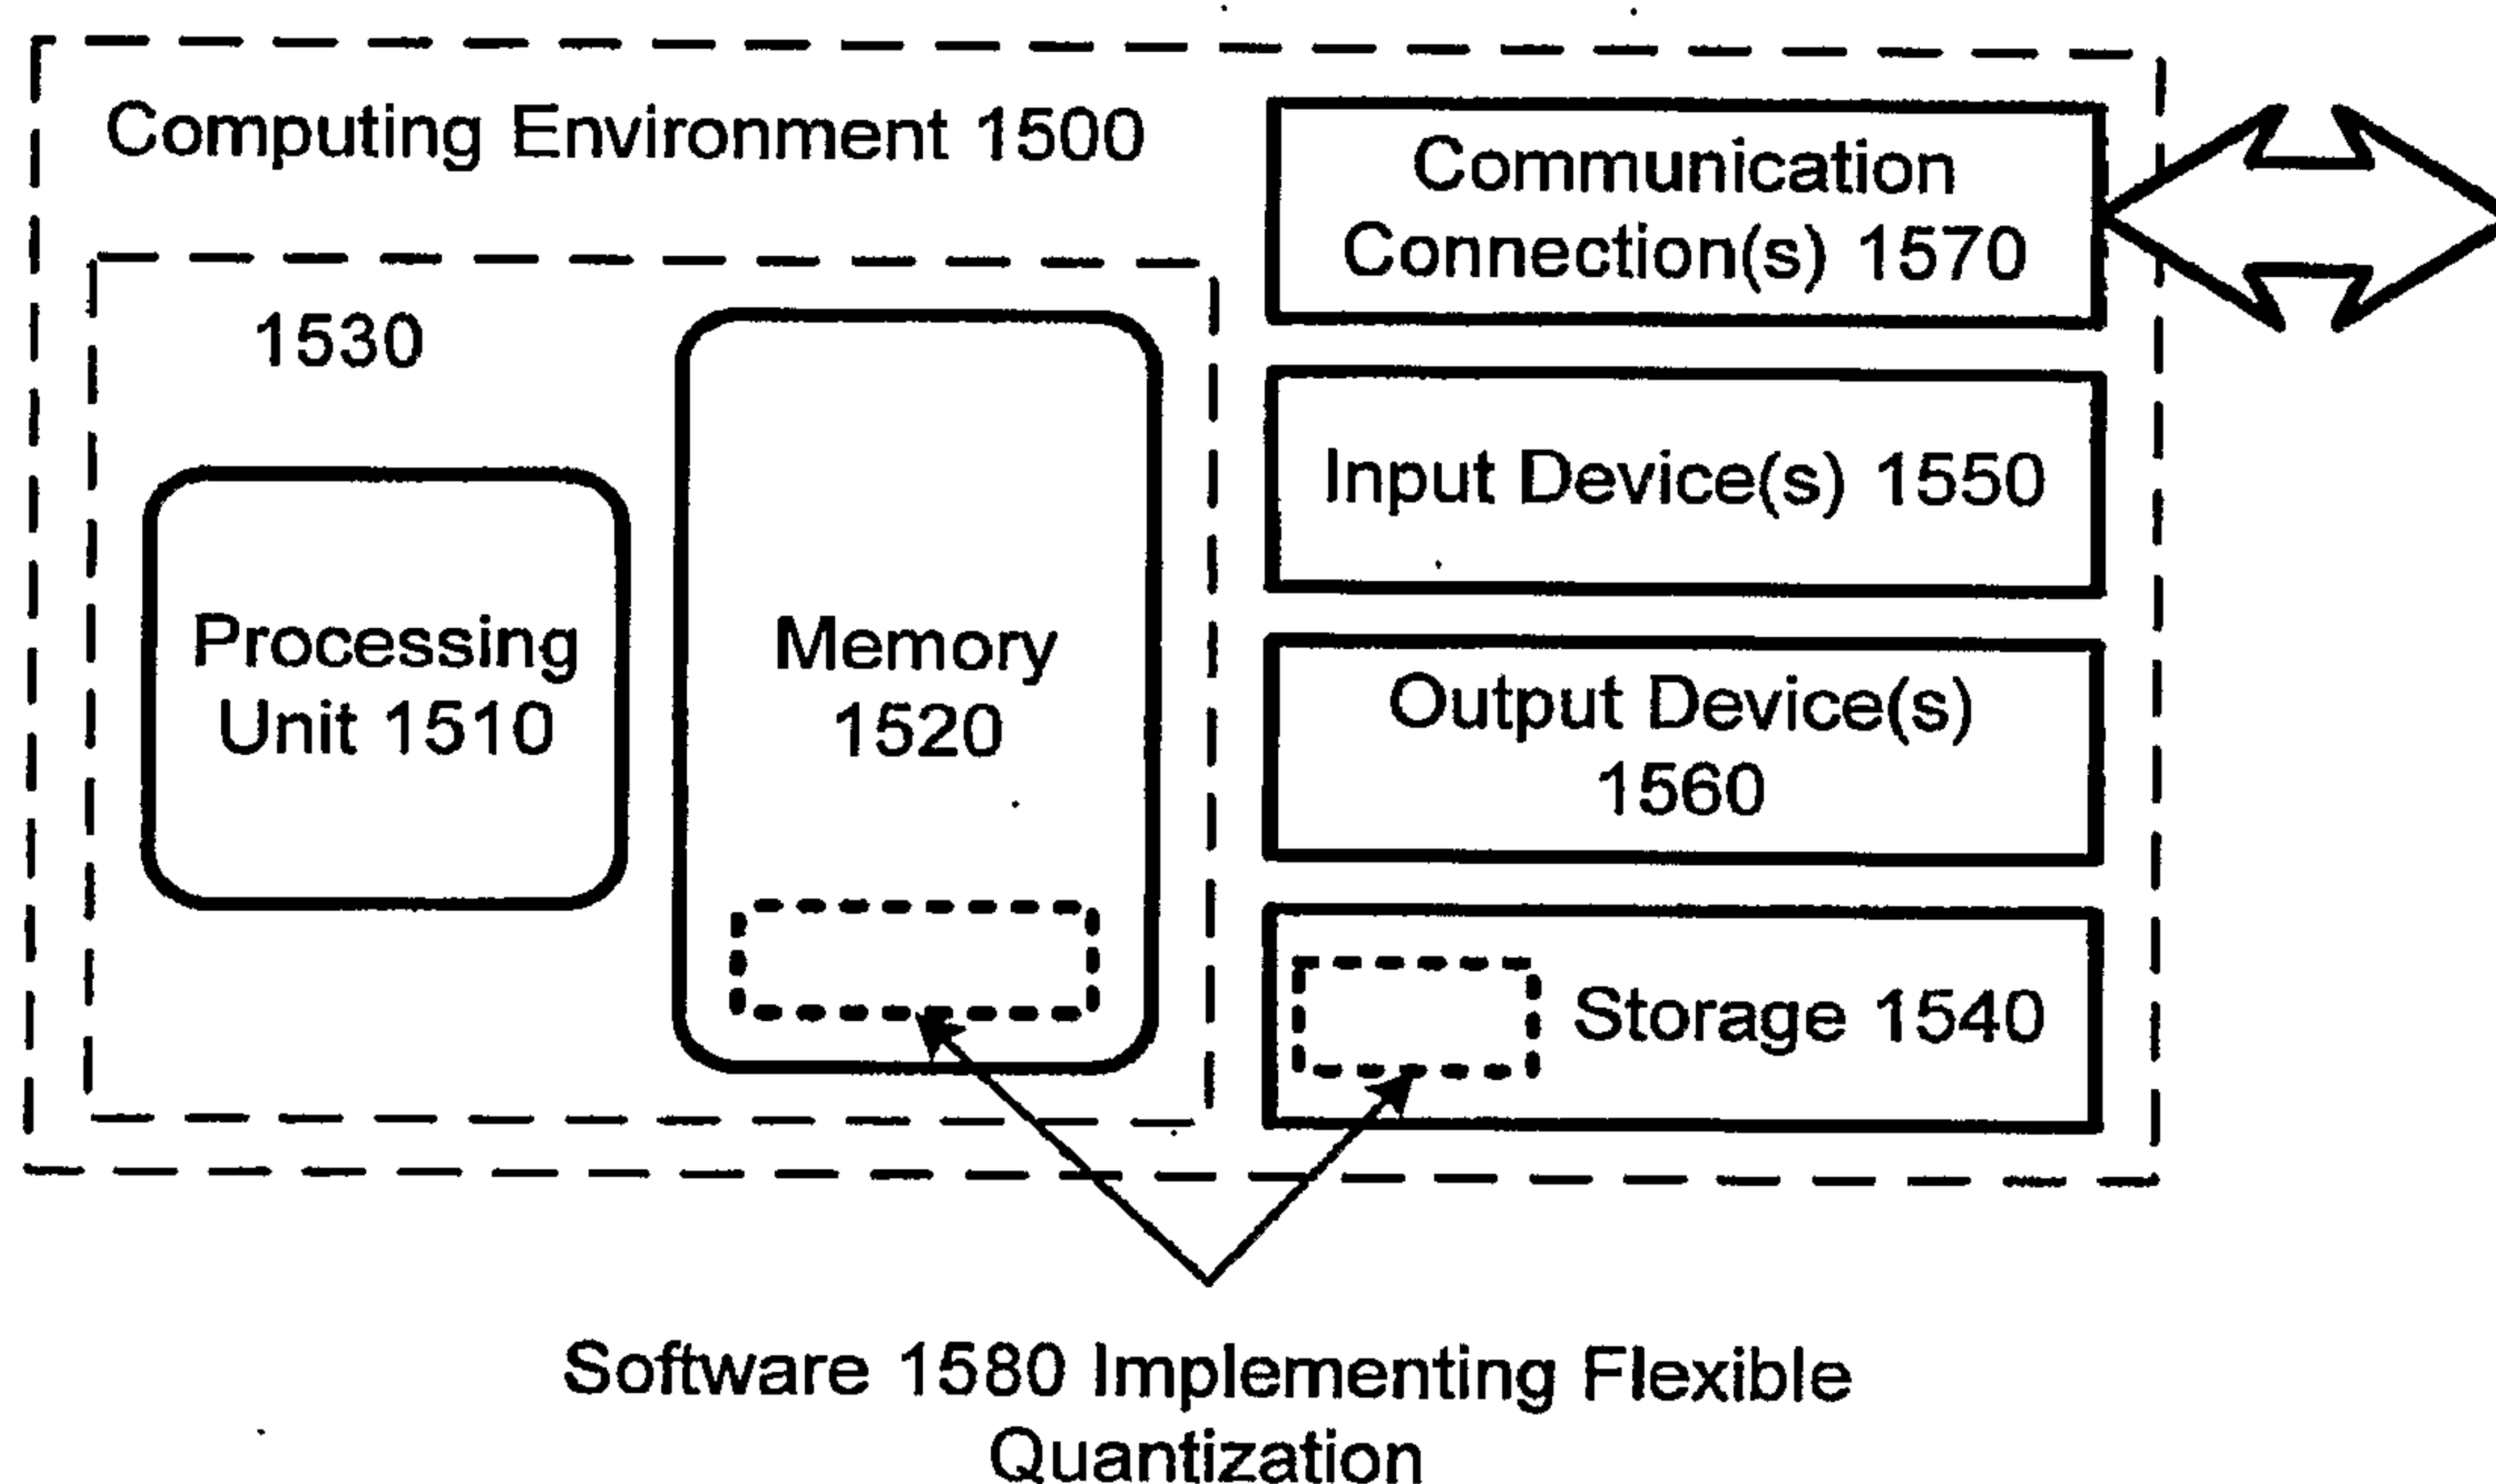

700
↓

FRAME () {	Num bits
...	lots
DC_FRAME_UNIFORM	1
if (DC_FRAME_UNIFORM)	
DC_QUANTIZER	variable
if('lowpass not skipped'){	
USE_DC_QUANTIZER	1
if(USE_DC_QUANTIZER == FALSE){	
LP_FRAME_UNIFORM	1
if(LP_FRAME_UNIFORM){	
LP_QUANTIZERS = 1	
LP_QUANTIZER()	variable
}	
}	
}	
if('highpass not skipped'){	
USE_LP_QUANTIZER	1
if(USE_LP_QUANTIZER == FALSE){	
HP_FRAME_UNIFORM	1
if(HP_FRAME_UNIFORM){	
HP_QUANTIZERS = 1	
HP_QUANTIZER()	variable
}	
}	
}	
}	