(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
24 March 2005 (24.03.2005)

PCT

(10) International Publication Number
WO 2005/027274 A1

(51) International Patent Classification[7]: H01R 12/22

(21) International Application Number:
PCT/US2004/024412

(22) International Filing Date: 29 July 2004 (29.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/658,019 9 September 2003 (09.09.2003) US

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors: **DATTILO, Jerome, P.**; 6801 River Place Boulevard, Austin, TX 78726-9000 (US). **SCHERER, Richard, J.**; 6801 River Place Boulevard, Austin, TX 78726-9000 (US).

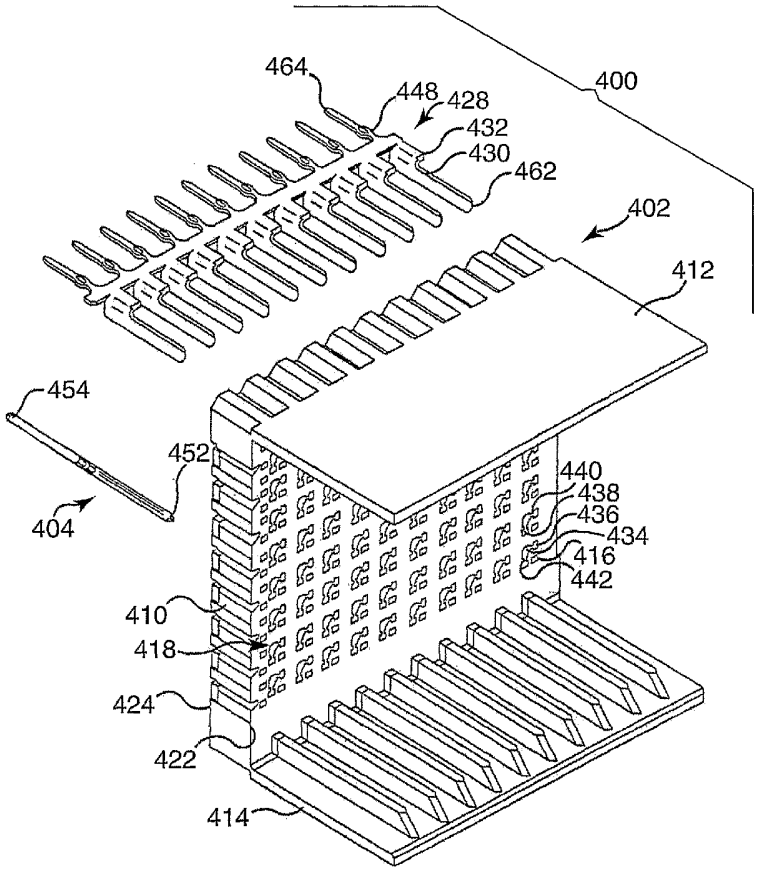
(74) Agents: **GOVER, Melanie, G.** et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: INTERCONNECT SYSTEM



(57) Abstract: Disclosed herein are backplane interconnect systems that use surface mount technology for mating conductive pins (404) in a header connector (400) to surface mount pads (36) on a printed circuit board (34). In particular, the interconnect system uses a plurality of conductive pins (404) that are not fully inserted into the body of the header connector, thus allowing them to move during mating with a printed circuit board. In this way, the interconnect system exhibits self-leveling characteristics.

WO 2005/027274 A1

FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations*

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERCONNECT SYSTEM

Field of Invention

[0001] The present invention relates to an electrical interconnect system. In particular, the present invention relates to a header connector design that exhibits self-leveling when assembled to a printed circuit board.

Background

[0002] Various electronic interconnect systems are available in the market place. In one application, two-part electronic backplane connectors are used to couple a motherboard (also known as a "backplane") to a daughtercard. Typically, a socket connector is assembled to the daughtercard while a header connector is assembled to the motherboard.

[0003] While various two-part backplane connectors may be available in the market, there is a continuing need for other connector designs that exhibit faster data transmission rate while using a smaller footprint, i.e., smaller amount of surface area or real estate on the motherboard or daughtercard.

Summary

[0004] Disclosed herein are interconnect systems that use surface mount technology for mating conductive pins in a header connector to surface mount pads on a printed circuit board. The printed circuit board may and usually does contain other components to mate with the header connector. Although the present invention discloses in detail a header connector for use with a printed circuit board, one skilled in the art will appreciate that the invention can be used in other electronic interconnect systems where self-leveling of the electronic component is desired.

[0005] In one aspect, the present invention relates to a header connector compromising: (a) a header body having a front wall, the front wall having a plurality of first and second passageways disposed between an internal surface and an external

surface; (b) a plurality of conductive pins configured for insertion into the first passageways, each conductive pin having a first end extending from the internal surface, an intermediate section disposed in the first passageway, and a truncated second end extending from the external surface of the front wall, wherein the conductive pins are not fully inserted into the first passageway; and (c) a plurality of shield blades configured for insertion into the second passageways, each shield blade having a first end extending from the internal surface, an intermediate section disposed in the second passageway, and a second end extending from the external surface of the front wall.

[0006] As used herein, the term "truncated", as used to describe the conductive pin, means that one end of the conductive pin, typically the end that will eventually make contact with the surface mount pads of the printed circuit board, is not in the form of an apex but instead is replaced by a substantially planar section. Furthermore, the second end of the conductive pin does not contain a spring like element. The statement that the "conductive pins are not fully inserted into the first opening" means that the conductive pins remain substantially stationary while residing in the header body but during assembly of the header connector to the printed circuit board, the conductive pins will move longitudinally with respect to the front wall of the header body.

[0007] In another aspect, the present invention relates to an interconnect system comprising: (a) a printed circuit board comprising a plurality of surface mount pads and a plurality of conductive vias; (b) the header connector of the present invention; and (c) means for holding the header connector to the printed circuit board. Mechanical tolerances exist in the positioning of each conductive pin, i.e., some pins may be slightly higher than others when they were inserted into the front wall of the header body. As the header connector is being assembled to the printed circuit board, each conductive pin of the header connector moves, in relation to the front wall of the header body, longitudinally in the first passageway. The conductive pin moves and makes contact with the surface mount pads. A few first conductive pins may make contact with the surface mount pads while others may not yet have made contact. As the header connector continues to be assembled to the printed circuit board, with respect to the front wall of the header body, the distance between the truncated end of these first contact conductive pins will shorten

as other conductive pins (those that still have to be mated) make contact with the surface mount pads. Also during the assembly process, the second end of the shield blades of the header connector mate with the plated through holes (commonly referred to as conductive vias) in the printed circuit board. For reference purposes, when the conductive pins move "longitudinally", it is meant that the pins move in a direction perpendicular to the front wall of the header body and thus normal to the printed circuit board, as the front wall of the header body usually lies substantially parallel to the printed circuit board. In other words, the conductive pins move along its length during the assembly to the printed circuit board.

[0008] In yet another aspect, the present invention relates to a method of assembling an interconnect system comprising the steps: (a) providing a printed circuit board comprising a plurality of surface mount pads and a plurality of plated through holes; (b) providing a header connector of the present invention; and (c) assembling the header connector to the printed circuit board such that the shield blades in the header body mate with the conductive vias in the printed circuit board and the conductive pins in the header body move longitudinally to make contact with the surface mount pads on the printed circuit board. The conductive pins stop moving when the header connector is fully assembled to the printed circuit board, i.e., when substantially all of the pins have mated with the surface mount pads.

[0009] An advantage of one exemplary embodiment of the present invention is that because the conductive pins are not fully inserted into the first opening of the header body, the pins are free to move with respect to the front wall of the header body when the header connector is assembled to a printed circuit board. This feature allows the plurality of conductive pins to exhibit self-leveling, i.e., each pin can adjust its height, with respect to the front wall of the header body, so that the header connector as a whole will have intimate mechanical, and thus electrical contact between the pin and the surface mount pad. As one skilled in the art will appreciate, due to the uneven and sometimes warped nature of the printed circuit board and the header connector, having a header connector that allows for self-leveling is an advantageous feature because it reduces the need to have tight mechanical tolerances on the header connector as well as the printed circuit board.

[0010] An advantage of another exemplary embodiment of the present invention is that because the cross-sectional area of the conductive pin is similar to the surface area of the surface mount pad (each pad preferably containing a conductive path into the printed circuit board), minimal discontinuities are present through the entire electrical communication channel thus minimizing the amount of impedance variance present in the system. As a result, the inventive interconnect system exhibits high electrical performance.

[0011] Yet another advantage of another exemplary embodiment is that because the conductive pins are designed to self-level and to contact surface mount pads on the printed circuit board, the insertion force required to assemble a header connector to a printed circuit board can be lower, as compared to an interconnect system using a header connector where both the conductive pins and the shield blades are inserted into plated through hole conductive vias on a printed circuit board.

[0012] The above summary of the present invention is not intended to describe each disclosed embodiment or every implementation of the present invention. The Figures and the detailed description, which follow more particularly exemplify illustrative embodiments.

Brief Description of the Drawings

[0013] The present invention can be described with reference to the following figures, wherein:

[0014] Figure **1** is an exploded perspective view of one exemplary header connector showing a truncated conductive pin, a continuous strip of shield blades, and a header body; wherein remaining pins and strips of shield blades have been omitted for illustrative purposes; and

[0015] Figure **2** is a perspective view of the header connector of Figure **1**; and

[0016] Figure **3** is a cross-sectional view an interconnect system where the header connector of Figure **1** has been assembled to one exemplary printed circuit board.

[0017] These figures are idealized, not drawn to scale and are intended for illustrative purposes.

Detailed Description

[0018] Figure **1** shows an exploded view of one exemplary header connector **400** having header body **402**, one of a plurality of truncated conductive pins **404**, and continuous strip **428** having a plurality of shield blades formed therein. The header body includes vertical front wall **410**, having external surface **424** and internal surface **422**, and top and bottom laterally extending horizontal walls **412** and **414** projecting from the front wall. The front wall further includes a plurality of first passages **416** for receiving the conductive pins and a plurality of second passages **418** for receiving the shield blades, the passages extending between internal and external surfaces **422** and **424** respectively. The header body is typically molded from suitable thermoplastic materials, such as liquid crystal polymers. The conductive pins and continuous strip of shield blades are typically plated copper alloys. One skilled in the connector art will readily understand that method of making the header body, the conductive pins and the continuous strip of shield blades are known in the art. Although Figure **1** shows a continuous strip of shield blades, it is within the scope of the present invention to use individual shield blades if desired.

[0019] In the embodiment of Figure **1**, each conductive pin has a first end **452** that extends above external wall **422**, truncated second end **454** spaced apart from first end **452** and configured for contacting a surface mount pad on a printed circuit board (not shown), and an intermediate portion disposed between the first end and the second end. In use, the intermediate portion lies in the first passages. The shield blades are formed to include generally right angle shielding leg portions (denoted collectively as **430** and **432**) configured for insertion into the second passages **418**. Each shield blade includes first end **462** that extends above internal surface **422** of the vertical front wall of the header body. In use, first end **462** of the shield blade lies generally adjacent to and substantially parallel to first end **452** of the conductive pin. Second end **464** of the shield blade is spaced apart from first end **462** and is configured for insertion into a plated through hole in the printed circuit board (not shown). Each shield blade also includes shield tail **448**, which provides

a friction fit to the printed circuit board once inserted therein, and is substantially perpendicular to first and second leg portions **430** and **432** respectively.

[0020] In the embodiment of Figure **1**, first passages **416** and second passages **418** are arranged symmetrically in front wall **410** of header body **402** such that generally right angle shielding portions of shield blade substantially surround conductive pins **404** to form a coaxial shield around the conductive pins. Each second passage **418** includes a central portion **434** coupled to first and second end portions **436** and **438** respectively by first and second narrowed throat portions **440** and **442** respectively. The first and second narrowed throat portions are dimensioned to frictionally engage first and second leg portions of the shield blades to hold them in place in the header body. That is to say, the shield blades are fully inserted into the header body in second passages **418**. Thus, when header connector **400** is assembled to the printed circuit board, the shield blades remain stationary with respect to the header body. In contrast, conductive pins **404** are not fully inserted into first openings **416** so that as the header connector is assembled to the printed circuit board, the conductive pin can move longitudinally to make contact with the surface mount pad on the printed circuit board. This ability for the conductive pins to move or to float during assembly allows the header connector to self-level, among other advantages.

[0021] Figure **2** shows a perspective view of the header connector of Figure **1** where the conductive pins and shield blades have been installed. As can be seen, the conductive pins are short seated into the header body such that second end **454** extends above front wall **410** by some predetermined height. In one exemplary embodiment, the truncated end of the conductive pin extends about 0.020 inch (0.51 mm) above the external surface of front wall **410** of the header body. One skilled in the art will understand that the height of extension will depend on the intended application of the interconnect system as well as the dimension of the header connector, among other factors. The conductive pins that extend from the external surface of the header body form an array of conductive pins.

[0022] The header connector embodied in Figure **1** represents only one type of header connector that can be used in the present invention. Thus, any header connector that

contains a plurality of conductive pins that have a truncated end and a plurality of shield blades can be used in the present invention.

[0023] Figure **3** shows a cross sectional view of the header connector of Figure **1** assembled on printed circuit board **34**. As can be seen, second end **454** of each conductive pin **404** is in direct contact with surface mount pad **36** of the printed circuit board and second end **464** of the shield blades mate with the plated through holes **38** in the printed circuit board. Because the cross sectional area of the conductive pin is similar in dimension to the surface area of the surface mount pad, electrical discontinuities can be minimized. The conductive pins are also designed to be substantially straight with a substantially constant cross section. Furthermore, unlike the prior art, the conductive pin does not contain and does not rely on a spring element at its second end to made mechanical contact with the surface mount pads. The combination of these features results in minimizing the impedance variance of the electrical signal to yield a higher performing, i.e., faster data transmission, interconnects.

[0024] When the header connector is used with a printed circuit board to yield an interconnect device, there are means to hold the header connector the board. In the embodiment of Figure **3**, as stated above, frictional forces between the shield tail and the pleated through holes hold the header connector to the printed circuit board while also maintaining the conductive pins in their contact positions to the surface mount pads. One skilled in the art will recognize that other means can be used to hold the header connector to the board, such as, e.g., mechanical means including but not limited to screws or clamps.

[0025] Although not shown, socket connectors can be used to mate with the header connector. An exemplary socket connector and connector modules that can be used with the present invention is disclosed in US Patent Nos. 6,146,202 and 6,231,391 both incorporated by reference in their entirety.

Claims

What is claimed is:

1. A header connector compromising:

(a) a header body having a front wall, the front wall having a plurality of first and second passageways disposed between an internal surface and an external surface;

(b) a plurality of conductive pins configured for insertion into the first passageways, each conductive pin having a first end extending from the internal surface, an intermediate section disposed in the first passageway, and a truncated second end extending from the external surface of the front wall, wherein the conductive pins are not fully inserted into the first passageway; and

(c) a plurality of shield blades configured for insertion into the second passageways, each shield blade having a first end extending from the internal surface, an intermediate section disposed in the second passageway, and a second end extending from the external surface of the front wall.

2. The header connector of claim 1, wherein the second end of the conductive pin does not contain a spring like element.

3. The header connector of claim 1, wherein the second end of the conductive pin is substantially flat.

4. The header connector of claim 1, wherein the conductive pin moves longitudinally within the first passageways when the header connector is assembled to a printed circuit board.

5. The header connector of claim 1, wherein the shield blades are fully inserted into the second passageways of the header body.

6. The header connector of claim 1, wherein the intermediate portion of the shield blade has a generally right angle shield portion.

7. An interconnect system comprising:

(a) a printed circuit board comprising a plurality of surface mount pads and a plurality of conductive vias;

(b) the header connector of claim 1; and

(c) means for holding the header connector to the printed circuit board,

wherein when the header connector is assembled to the printed circuit board, each conductive pin of the header connector move, in relation to the front wall of the header body, longitudinally in the first passageway to contact the surface mount pads and the second end of the shield blades of the header connector mate with the conductive vias in the printed circuit board.

8. The interconnect system of claim 7, wherein the means for holding the header connector to the printed circuit board is provided by frictional force created when the shield blades mate with the conductive vias on the printed circuit board.

9. The interconnect system of claim 7, wherein the conductive pin does not contain a spring like element on its second end.

10. The interconnect system of claim 7, wherein the second end of the conductive pin is substantially flat.

11. The header connector of claim 7, wherein the shield blades are fully inserted into the second passageways of the header body.

12. The header connector of claim 7, wherein the intermediate portion of the shield blade has a generally right angle shield portion.

13. A method of assembling an interconnect system comprising the steps of:

(a) providing a printed circuit board comprising a plurality of surface mount pads and a plurality of conductive vias;

(b) providing a header connector of claim 1; and

(c) assembling the header connector to the printed circuit board such that the shield blades in the header body mate with the conductive vias in the printed circuit board and the conductive pins in the header body move longitudinally to make contact with the surface mount pads on the printed circuit board.

14. The method of claim 13 further comprising the step of holding the header connector to the printed circuit board.

15. The method of claim 14, wherein frictional force created when the shield blades mate with the conductive vias on the printer circuit board holds the header connector to the printed board.

16. The method of claim 13, wherein the shield blades of the header connector are fully inserted into the second passageways of the header body.

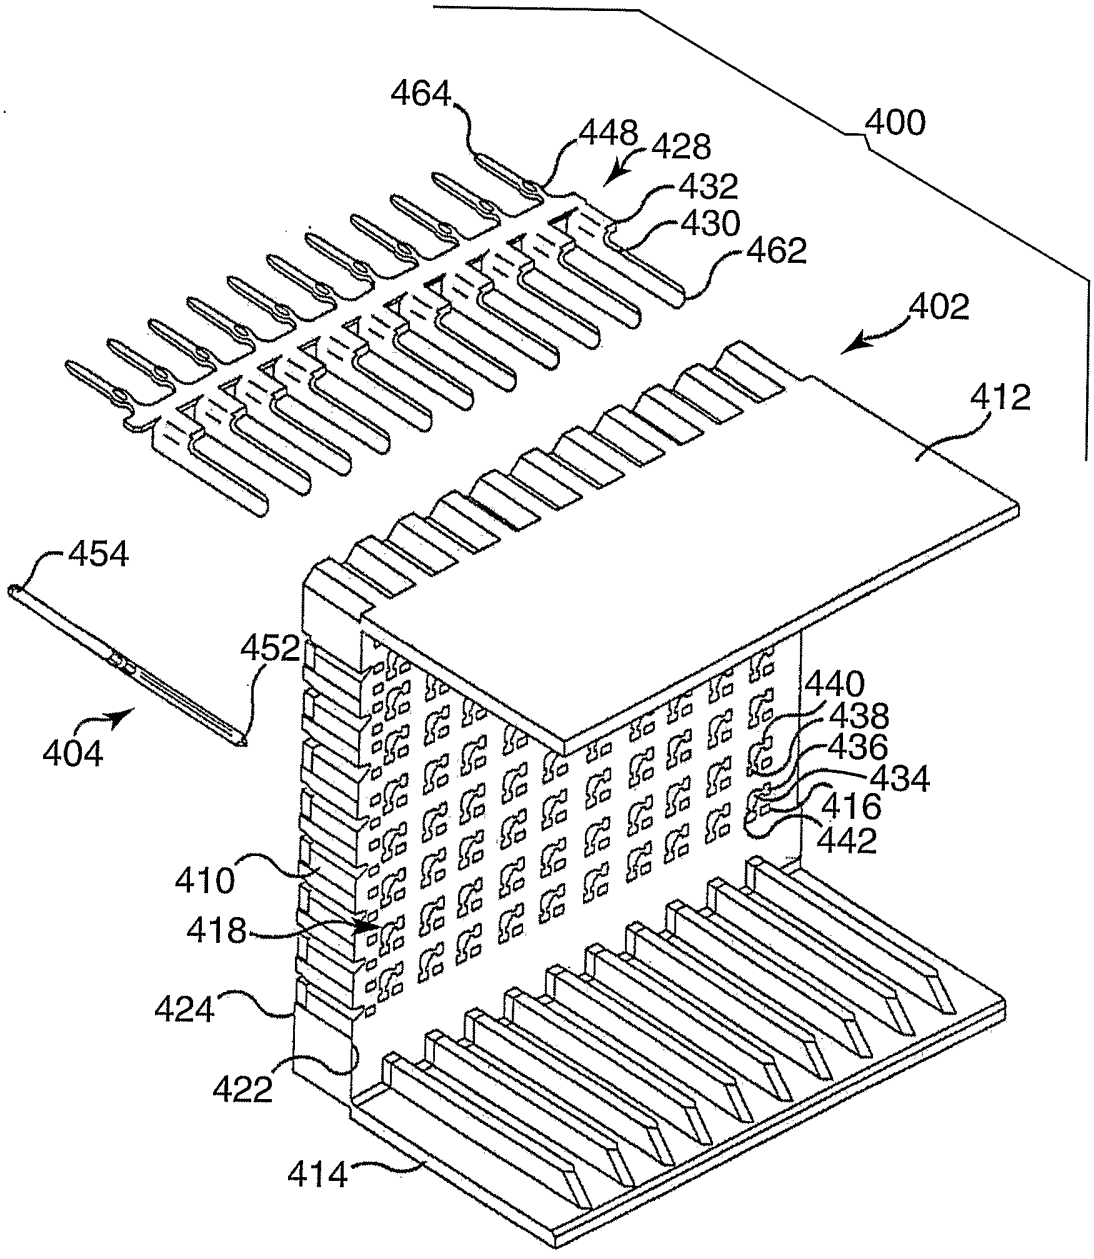

464
448
428
400
432
430
462
402
412
454
452
404
440
438
436
434
416
442
410
418
424
422
414

Fig. 1

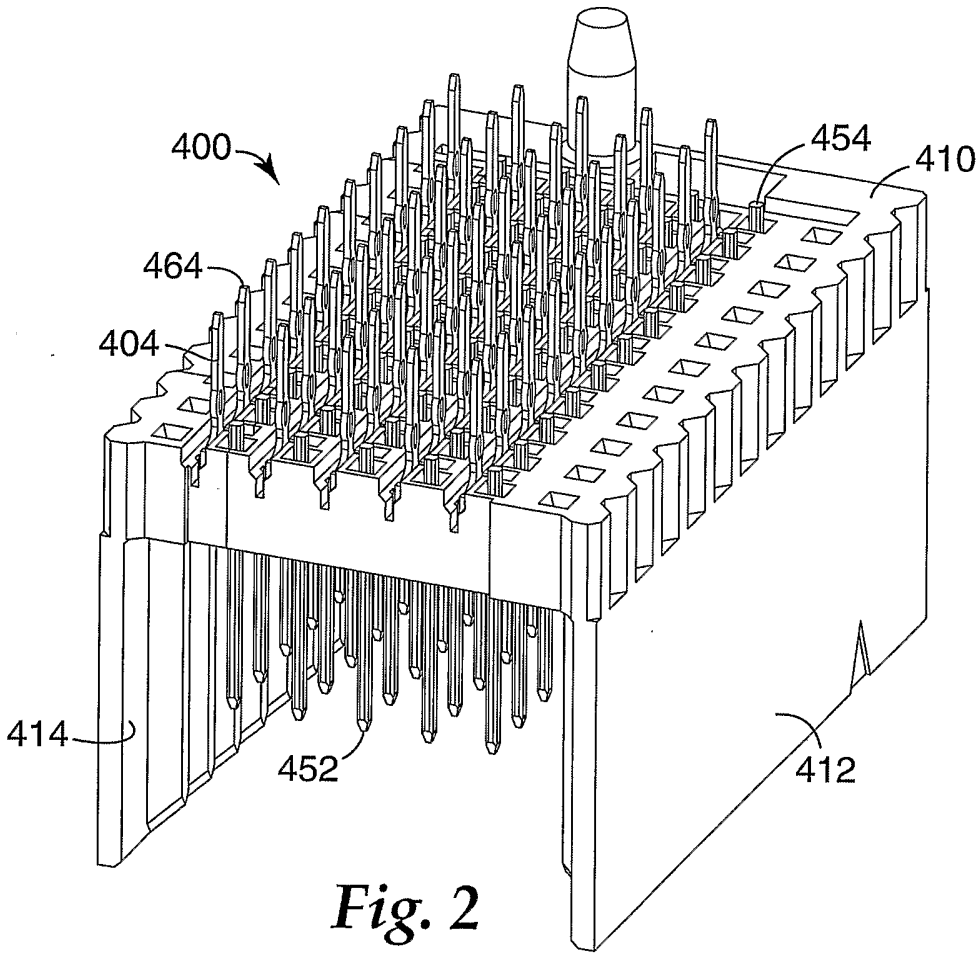

400
454
410
464
404
414
452
412

Fig. 2

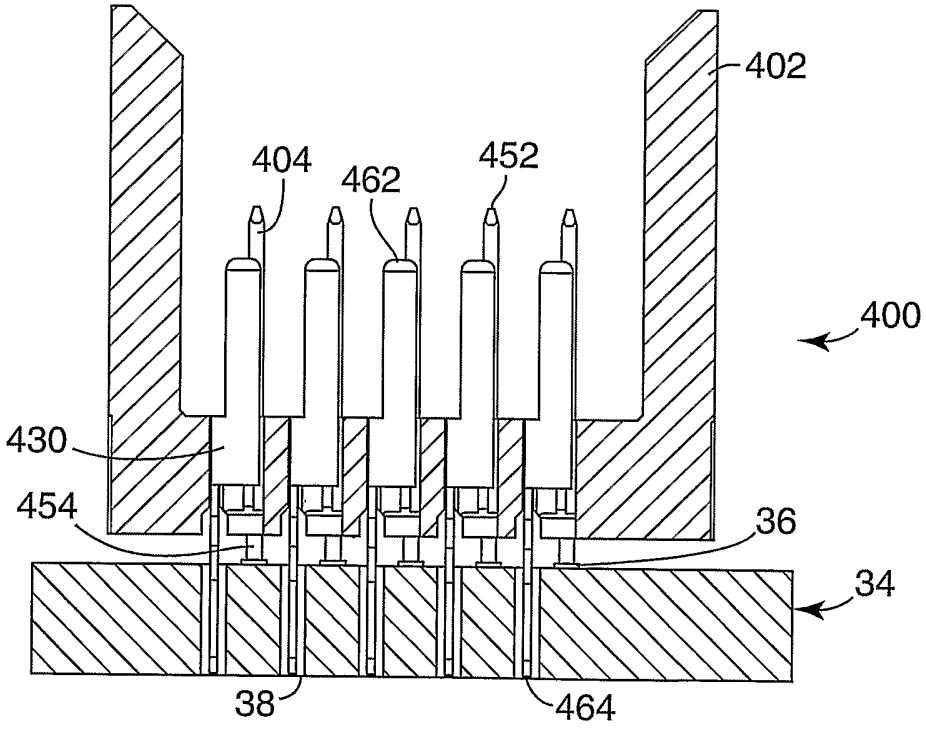

402
404
462
452
400
430
454
36
34
38
464

Fig. 3

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/024412

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01R12/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2001/012730 A1 (KUSTERS JOHANNES PETRUS MARIA ET AL) 9 August 2001 (2001-08-09) figure 15	1-16
Y	US 4 927 372 A (COLLIER JOHN C) 22 May 1990 (1990-05-22) column 2, line 52 - line 64; figures 1,2	1-16

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
19 November 2004	30/11/2004

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Garcia Congosto, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/US2004/024412

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2001012730 A1	09-08-2001	US 6231391 B1	15-05-2001
		US 6146202 A	14-11-2000
		US 2002123266 A1	05-09-2002
		AU 5481599 A	06-03-2000
		CA 2339650 A1	24-02-2000
		EP 1450442 A2	25-08-2004
		EP 1105940 A2	13-06-2001
		NO 20010656 A	09-04-2001
		WO 0010233 A2	24-02-2000
US 4927372 A	22-05-1990	DE 3904827 A1	14-09-1989
		GB 2217528 A	25-10-1989