



(51) International Patent Classification:

C08F 4/02 (2006.01) *C08G 77/60* (2006.01)
C08F 4/64 (2006.01) *C08F 4/659* (2006.01)
C08F 210/02 (2006.01)

(21) International Application Number:

PCT/US2015/065384

(22) International Filing Date:

11 December 2015 (11.12.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/091,071 12 December 2014 (12.12.2014) US
62/091,077 12 December 2014 (12.12.2014) US

(71) Applicant: **EXXONMOBIL CHEMICAL PATENTS INC.** [US/US]; 5200 Bayway Drive, Baytown, Texas 77520 (US).

(72) Inventors: **HOLT CAMP, Matthew W.**; 26935 Carol Drive, Mailing Address: P.O. Box 497, Huffman, Texas 77336 (US). **BEDOYA, Matthew S.**; 5719 Timbers Trail Drive, Humble, Texas 77346 (US). **HARLAN, Charles J.**; 15810 Dunmoor Drive, Houston, TX 77059 (US).

(74) Agents: **BELL, Catherine L.** et al.; Exxonmobil Chemical Company, Law Department, P.O. Box 2149, Baytown, Texas 77522-2149 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: OLEFIN POLYMERIZATION CATALYST SYSTEM COMPRISING MESOPOROUS ORGANOSILICA SUPPORT

(57) Abstract: A catalyst system comprising a combination of: 1) one or more catalyst compounds having at least one nitrogen linkage and at least one oxygen linkage to a transition metal; 2) a support comprising an organosilica material, which is a mesoporous organosilica material; and 3) an optional activator. Useful catalysts include ONNO-type transition metal catalysts, ONYO-Type transition metal catalysts, and/ or oxadiazole transition metal catalysts. The organosilica material is a polymer of at least one monomer of Formula [Z⁰Z² SiCH₂]₃(1), where Z¹ represents a hydrogen atom, a C₁-C₄alkyl group, or a bond to a silicon atom of another monomer and Z² represents a hydroxyl group, a C₁-C₄alkoxy group, a C₁-C₆alkyl group, or an oxygen atom bonded to a silicon atom of another monomer. This invention further relates to processes to polymerize olefins comprising contacting one or more olefins with the above catalyst system.



OLEFIN POLYMERIZATION CATALYST SYSTEM COMPRISING MESOPOROUS ORGANOSILICA SUPPORT

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of and priority to U.S. Provisional Application No. 62/091,071 filed on December 12, 2014 and U.S. Provisional Application No. 62/091,077 filed on December 12, 2014.

FIELD

The present disclosure relates to novel olefin polymerization catalyst compositions comprising olefin polymerization catalyst compound, optional activator, and organosilica material support, and uses thereof.

BACKGROUND

This section provides background information related to the present disclosure which is not necessarily prior art.

Supported olefin polymerization catalysts are of great use in industry. Hence, there is interest in finding new supported catalyst systems that increase the commercial usefulness of the catalyst and allow the production of polymers having improved properties.

Catalysts for olefin polymerization are often based on cyclopentadienyl based transition metal compounds as catalyst precursors, which are activated either with alumoxane or with an activator containing a non-coordinating anion.

Porous inorganic solids have found great utility as catalysts and separation media for industrial application. In particular, mesoporous materials, such as silicas and aluminas, having a periodic arrangement of mesopores are attractive materials for use in adsorption, separation and catalytic processes due to their uniform and tunable pores, high surface areas and large pore volumes. The pore structure of such mesoporous materials is large enough to adsorb large molecules and the pore wall structure can be as thin as about 1 nm. Further, such mesoporous materials are known to have large specific surface areas (*e.g.*, 1000 m²/g) and large pore volumes (*e.g.*, 1 cc/g). For these reasons, such mesoporous materials enable reactive catalysts, adsorbents composed of a functional organic compound, and other molecules to rapidly diffuse into the pores and therefore, can be advantageous over zeolites, which have smaller pore sizes. Consequently, such mesoporous materials can be useful not only for catalysis of high-speed catalytic reactions, but also as large capacity adsorbents.

Mesoporous organosilica (MOS) supports are conventionally formed by the self-assembly of a silsequioxane precursor in the presence of a structure directing agent, porogen and/or framework element. The precursor is hydrolysable and condenses around the structure directing agent. For example, Landskron, K., et al. report the self-assembly of 1,3,5-tris[diethoxysila]cyclohexane $[(\text{EtO})_2\text{SiCH}_2]_3$ in the presence of a base and the structure directing agent, cetyltrimethylammonium bromide. Landskron, K., et al., Science, 302:266-269 (2003). The citation of references herein does not constitute an admission that those references are prior art or have any relevance to the patentability of this description disclosed herein. All references cited in the Background and Description sections of this specification are hereby incorporated by reference in their entirety.

However, the use of a structure directing agent, such as a surfactant, in the preparation of an organosilica material, such as a MOS, requires a more complicated, energy intensive process that limits the ability to scale-up the process for industrial applications. Additionally, structure directing agents present during formation impact the morphology of the organosilica material product. Furthermore, introduction of additional agents or processing steps to remove structure directing agents from MOS can introduce additional reactive and undesirable compositions into the system, potentially leading to additional species that could cause catalyst poisoning.

There remains a need in the art for new and improved supported catalysts and catalyst systems for the polymerization of olefins to obtain new and improved polyolefins, polymerization processes, and the like. Such new and improved catalyst systems can desirably achieve specific polymer properties, such as high melting point, high molecular weights, increasing conversion or comonomer incorporation, or altering comonomer distribution without deteriorating the resulting polymer's properties. Thus, there is a need to provide organosilica materials having desirable pore size, pore volume and surface area, which can be prepared in the absence of a structure directing agent, a porogen and/or a framework element (aside from C, O, Si and hydrogen). Such materials will be described further herein. For more information, see also, U.S. Provisional Application No. 62/091,071 filed on December 12, 2014 and U.S. Provisional Application No. 62/091,077 filed on December 12, 2014, the disclosures of which were fully incorporated herein by reference above. Accordingly, new and improved supported catalyst systems for the polymerization of olefins are contemplated by the present disclosure, in order to achieve enhanced properties, such as molecular weight, and/or comonomer

incorporation, typically along with improvements in catalyst function, such as activity, by way of non-limiting example.


SUMMARY

This section provides a general summary of the disclosure, and is not a comprehensive disclosure of its full scope or all of its features.

This invention relates to a catalyst system comprising the combination of: (1) one or more olefin polymerization catalyst compounds; (2) a support comprising an organosilica material; and (iii) an optional activator. The organosilica material may be a polymer of at least one monomer of Formula $[Z^1OZ^2SiCH_2]_3$, wherein Z^1 represents a hydrogen atom, a C_1 - C_4 alkyl group, or a bond to a silicon atom of another monomer and Z^2 represents a hydroxyl group, a C_1 - C_4 alkoxy group, a C_1 - C_6 alkyl group or an oxygen atom bonded to a silicon atom of another monomer.

This invention also relates to a catalyst system comprising the combination of: (1) one or more olefin polymerization catalyst compounds having at least one nitrogen linkage and at least one oxygen linkage to a transition metal; (2) a support comprising an organosilica material; and (iii) an optional activator. The organosilica material may be a polymer of at least one monomer of Formula $[Z^1OZ^2SiCH_2]_3$, wherein Z^1 represents a hydrogen atom, a C_1 - C_4 alkyl group, or a bond to a silicon atom of another monomer and Z^2 represents a hydroxyl group, a C_1 - C_4 alkoxy group, a C_1 - C_6 alkyl group or an oxygen atom bonded to a silicon atom of another monomer.

In certain aspects, this invention relates to a catalyst system comprising:
at least one catalyst compound selected from the group consisting of:
a compound represented by Formula (VII):

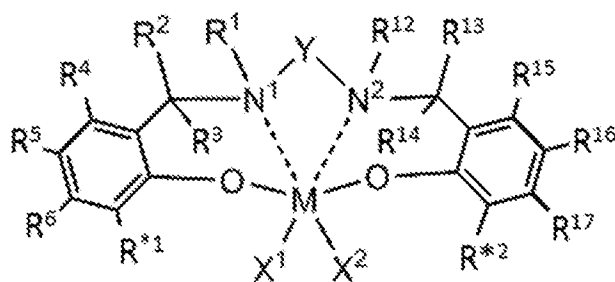


(VII)

where: each solid line represents a covalent bond and each dashed line represents a coordinative link; wherein M is a Group 3, 4, 5, or 6 transition metal; N^1 and N^2 are nitrogen; O is oxygen; each of X^1 and X^2 is, independently, a univalent C_1 to C_{20} hydrocarbyl radical, a functional group

comprising elements from Groups 13 to 17, or X^1 and X^2 join together to form a C_4 to C_{62} cyclic or polycyclic ring structure, provided however when M is trivalent X^2 is not present; each R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , and R^{17} is, independently, hydrogen, a C_1 to C_{40} hydrocarbyl radical, a C_1 to C_{40} substituted hydrocarbyl radical (such as a functional group comprising elements from Groups 13 to 17 of the IUPAC periodic table of the elements), two or more of R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , and R^{17} independently join together to form a C_4 to C_{62} cyclic or polycyclic ring structure, or a combination thereof; wherein R^{*1} and R^{*2} independently comprise a bulky functional group, an electron withdrawing group, or a combination thereof; and Y is a divalent C_1 to C_{20} hydrocarbyl radical;


(A) a compound represented by Formula (VIII):

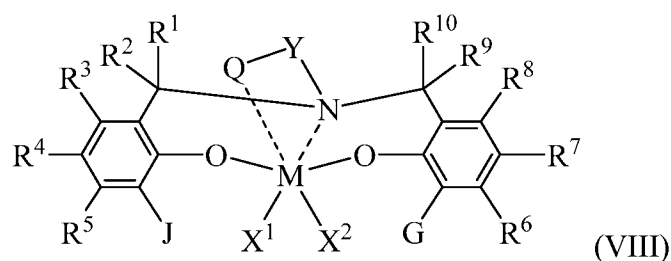

wherein:


M is a Group 4 transition metal; each of X^1 and X^2 is, independently, a univalent C_1 to C_{20} hydrocarbyl radical, a C_1 to C_{20} substituted hydrocarbyl radical, a heteroatom or a heteroatom-containing group, or X^1 and X^2 join together to form a C_4 to C_{62} cyclic or polycyclic ring structure; each R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 , R^8 , R^9 , and R^{10} is, independently, a hydrogen, a C_1 to C_{40} hydrocarbyl radical, a C_1 to C_{40} substituted hydrocarbyl radical, a heteroatom or a heteroatom-containing group, or two or more of R^1 to R^{10} may independently join together to form a C_4 to C_{62} cyclic or polycyclic ring structure, or a combination thereof; and Q is a neutral donor group; J is a C_7 to C_{60} fused polycyclic group, which optionally comprises up to 20 atoms from Groups 15 and 16, where at least one ring is aromatic and where at least one ring, which may or may not be aromatic, has at least five members; G is as defined for J or may be hydrogen, a C_1 to C_{60} hydrocarbyl radical, a C_1 to C_{60} substituted hydrocarbyl radical, a heteroatom or a heteroatom-containing group, or may independently form a C_4 to C_{60} cyclic or polycyclic ring structure with R^6 , R^7 , or R^8 or a combination thereof; and Y is a divalent C_1 to C_{20} hydrocarbyl or divalent C_1 to C_{20} substituted hydrocarbyl;

(B) a compound represented by Formula (IX):

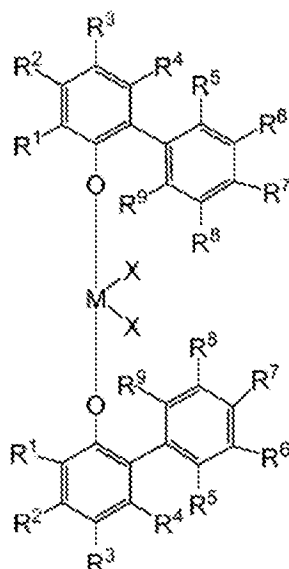

wherein:

M is selected from the group consisting of Ti, Zr, and Hf; at least one of R¹ through R⁹ is substituted with a moiety having the following structure (X):



(X)

where structure X is attached at any one of R¹ through R⁹ at the R¹⁰ or R¹¹ position; at least one of nitrogen N¹ or N² of Structure X forms a dative bond with metal M; and each of R¹ through R¹¹ are independently selected from the group consisting of hydride, hydrocarbyl, lower hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, alkyl, lower alkyl, substituted alkyl, heteroalkyl, alkenyl, lower alkenyl, substituted alkenyl, heteroalkenyl, alkynyl, lower alkynyl, substituted alkynyl, heteroalkynyl, alkoxy, lower alkoxy, aryloxy, hydroxyl, alkylthio, lower alkyl thio, arylthio, thioxy, aryl, substituted aryl, heteroaryl, aralkyl, aralkylene, alkaryl, alkaryl, alkylene, halide, haloalkyl, haloalkenyl, haloalkynyl, heteroalkyl, heterocycle, heteroaryl, heteroatom-containing group, silyl, boryl, phosphino, phosphine, amino, and amine; and X is a leaving group; and combinations thereof.

The catalyst system further comprises: (ii) a catalyst support comprising an organosilica material that is a polymer of at least one monomer of Formula $[Z^1OZ^2SiCH_2]_3$ (I), wherein Z^1 represents a hydrogen atom, a C₁-C₄ alkyl group, or a bond to a silicon atom of another monomer and Z^2 represents a hydroxyl group, a C₁-C₄ alkoxy group, a C₁-C₆ alkyl group, or an oxygen atom bonded to a silicon atom of another monomer; and (iii) an optional activator.

In other aspects, the invention relates to a process to produce a polymer comprising: i) contacting, in the gas phase or slurry phase, one or more olefin monomers, with a catalyst system. The catalyst system comprises: 1) one or more olefin polymerization catalyst having at least one nitrogen linkage and at least one oxygen linkage to a transition metal; 2) a catalyst support comprising an organosilica material that is a polymer of at least one monomer of Formula $[Z^1OZ^2SiCH_2]_3$ (I), wherein Z^1 represents a hydrogen atom, a C₁-C₄ alkyl group, or a bond to a silicon atom of another monomer and Z^2 represents a hydroxyl group, a C₁-C₄ alkoxy group, a C₁-C₆ alkyl group, or an oxygen atom bonded to a silicon atom of another monomer; and 3) an optional activator. The process further comprises ii) obtaining a polymer.

DETAILED DESCRIPTION

In certain aspects, the present disclosure is directed to catalyst systems. The catalyst systems according to certain aspects of the present invention(s) are suitable for use in a polyolefin polymerization reaction process.

The catalyst system may comprise (i) a support comprising an organosilica material; (ii) one or more catalyst metals or compounds; and (iii) an activator, for example, comprising alumoxane or a non-coordinating anion. The organosilica material may be a polymer of at least one monomer of Formula $[Z^1OZ^2SiCH_2]_3$, where Z^1 represents a hydrogen atom, a C₁-C₄ alkyl group, or a bond to a silicon atom of another monomer and Z^2 represents a hydroxyl group, a C₁-C₄ alkoxy group, a C₁-C₆ alkyl group or an oxygen atom bonded to a silicon atom of another monomer.

The one or more catalyst compounds may be one or more catalyst compounds having one or more oxygen and nitrogen linkages in a transition metal complex, as will be discussed further herein.

Definitions

For purposes of this invention and the claims hereto, the numbering scheme for the Periodic Table Groups is according to the IUPAC Periodic Table of Elements.

The terms “substituent,” “radical,” “group,” and “moiety” may be used interchangeably.

As used herein, and unless otherwise specified, the term “C_n” means hydrocarbon(s) having n carbon atom(s) per molecule, wherein n is a positive integer.

As used herein, and unless otherwise specified, the term “hydrocarbon” means a class of compounds containing hydrogen bound to carbon, and encompasses (i) saturated hydrocarbon compounds, (ii) unsaturated hydrocarbon compounds, and (iii) mixtures of hydrocarbon compounds (saturated and/or unsaturated), including mixtures of hydrocarbon compounds having different values of n.


The terms “hydrocarbyl radical,” “hydrocarbyl,” “hydrocarbyl group,” “alkyl radical,” and “alkyl” are used interchangeably throughout this document. Likewise, the terms “group,” “radical,” and “substituent,” are also used interchangeably in this document. For purposes of this disclosure, “hydrocarbyl radical” is defined to be C₁-C₁₀₀ radicals, that may be linear, branched, or cyclic, and when cyclic, aromatic or non-aromatic. Examples of such radicals include, but are not limited to, methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, sec-butyl, tert-butyl, pentyl, iso-amyl, hexyl, octyl, cyclopropyl, cyclobutyl, cyclopentyl, cyclohexyl, cyclooctyl, and the like including their substituted analogues. Substituted hydrocarbyl radicals are radicals in which at least one hydrogen atom of the hydrocarbyl radical has been substituted with at least one heteroatom or heteroatom containing group, such as halogen (such as Br, Cl, F or I) or at least one functional group such as NR₂^{*}, OR^{*}, SeR^{*}, TeR^{*}, PR₂^{*}, AsR₂^{*}, SbR₂^{*}, SR^{*}, BR₂^{*}, SiR₃^{*}, GeR₃^{*}, SnR₃^{*}, PbR₃^{*}, and the like, or where at least one heteroatom has been inserted within a hydrocarbyl ring.

As used herein, and unless otherwise specified, the term “alkyl” refers to a saturated hydrocarbon radical having from 1 to 12 carbon atoms (*i.e.*, C₁-C₁₂ alkyl), particularly from 1 to 8 carbon atoms (*i.e.*, C₁-C₈ alkyl), particularly from 1 to 6 carbon atoms (*i.e.*, C₁-C₆ alkyl), and particularly from 1 to 4 carbon atoms (*i.e.*, C₁-C₄ alkyl). Examples of alkyl groups include, but are not limited to, methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, octyl, decyl, and so forth. The alkyl group may be linear, branched or cyclic. “Alkyl” is intended to embrace all structural isomeric forms of an alkyl group. For example, as used herein, propyl encompasses both n-propyl and isopropyl; butyl encompasses n-butyl, sec-butyl, isobutyl and tert-butyl and so forth. As used herein, “C₁ alkyl” refers to methyl (–CH₃), “C₂ alkyl” refers to ethyl (–CH₂CH₃), “C₃ alkyl” refers to propyl (–CH₂CH₂CH₃) and “C₄ alkyl” refers to butyl (*e.g.*, –CH₂CH₂CH₂CH₃, –

(CH₃)CHCH₂CH₃, -CH₂CH(CH₃)₂, etc.). Further, as used herein, "Me" refers to methyl, and "Et" refers to ethyl, "i-Pr" refers to isopropyl, "t-Bu" refers to tert-butyl, and "Np" refers to neopentyl.


As used herein, and unless otherwise specified, the term "alkylene" refers to a divalent alkyl moiety containing 1 to 12 carbon atoms (*i.e.*, C₁-C₁₂ alkylene) in length and meaning the alkylene moiety is attached to the rest of the molecule at both ends of the alkyl unit. For example, alkylenes include, but are not limited to, -CH₂-, -CH₂CH₂-, -CH(CH₃)CH₂-, -CH₂CH₂CH₂-, etc. The alkylene group may be linear or branched.

As used herein, and unless otherwise specified, the term "nitrogen-containing alkyl" refers to an alkyl group as defined herein wherein one or more carbon atoms in the alkyl group is substituted with a nitrogen atom or a nitrogen-containing cyclic hydrocarbon having from 2 to 10 carbon atoms (*i.e.*, a nitrogen-containing cyclic C₂-C₁₀ hydrocarbon), particularly having from 2 to 5 carbon atoms (*i.e.*, a nitrogen-containing cyclic C₂-C₅ hydrocarbon), and particularly having from 2 to 5 carbon atoms (*i.e.*, a nitrogen-containing cyclic C₂-C₅ hydrocarbon). The nitrogen-containing cyclic hydrocarbon may have one or more nitrogen atoms. The nitrogen atom(s) may optionally be substituted with one or two C₁-C₆ alkyl groups. The nitrogen-containing alkyl can have from 1 to 12 carbon atoms (*i.e.*, C₁-C₁₂ nitrogen-containing alkyl), particularly from 1 to 10 carbon atoms (*i.e.*, C₁-C₁₀ nitrogen-containing alkyl), particularly from 2 to 10 carbon atoms (*i.e.*, C₂-C₁₀ nitrogen-containing alkyl), particularly from 3 to 10 carbon atoms (*i.e.*, C₃-C₁₀ nitrogen-containing alkyl), and particularly from 3 to 8 carbon atoms (*i.e.*, C₁-C₁₀ nitrogen-containing alkyl). Examples of nitrogen-containing alkyls include, but are not limited to,



As used herein, and unless otherwise specified, the term "nitrogen-containing alkylene" refers to an alkylene group as defined herein wherein one or more carbon atoms in the alkyl group is substituted with a nitrogen atom. The nitrogen atom(s) may optionally be substituted with one or two C₁-C₆ alkyl groups. The nitrogen-containing alkylene can have from 1 to 12 carbon atoms (*i.e.*, C₁-C₁₂ nitrogen-containing alkylene), particularly from 2 to 10 carbon atoms (*i.e.*, C₂-C₁₀ nitrogen-containing alkylene), particularly from 3 to 10 carbon atoms (*i.e.*, C₃-C₁₀ nitrogen-containing alkylene), particularly from 4 to 10 carbon atoms (*i.e.*, C₄-C₁₀ nitrogen-containing alkylene), and particularly from 3 to 8 carbon atoms (*i.e.*, C₃-C₈ nitrogen-containing

alkyl). Examples of nitrogen-containing alkylenes include, but are not limited to,

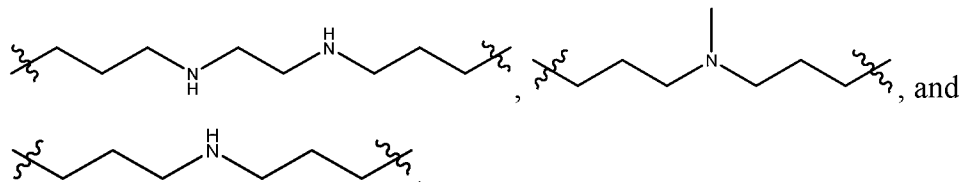

As used herein, and unless otherwise specified, the term "alkenyl" refers to an
 5 unsaturated hydrocarbon radical having from 2 to 12 carbon atoms (*i.e.*, C₂–C₁₂ alkenyl),
 particularly from 2 to 8 carbon atoms (*i.e.*, C₂–C₈ alkenyl), particularly from 2 to 6 carbon atoms
 (*i.e.*, C₂–C₆ alkenyl), and having one or more (*e.g.*, 2, 3, etc.) carbon-carbon double bonds. The
 alkenyl group may be linear, branched or cyclic. Examples of alkenyls include, but are not
 limited to ethenyl (vinyl), 2-propenyl, 3-propenyl, 1,4-pentadienyl, 1,4-butadienyl, 1-butenyl, 2-
 10 butenyl and 3-butenyl. "Alkenyl" is intended to embrace all structural isomeric forms of an
 alkenyl. For example, butenyl encompasses 1,4-butadienyl, 1-butenyl, 2-butenyl and 3-butenyl,
 etc.

As used herein, and unless otherwise specified, the term "alkenylene" refers to a divalent
 alkenyl moiety containing 2 to about 12 carbon atoms (*i.e.*, C₂–C₁₂ alkenylene) in length and
 15 meaning that the alkylene moiety is attached to the rest of the molecule at both ends of the alkyl
 unit. For example, alkenylenes include, but are not limited to, –CH=CH–, –CH=CHCH₂–, –
 CH=CH=CH–, –CH₂CH₂CH=CHCH₂–, etc. The alkenylene group may be linear or branched.

As used herein, and unless otherwise specified, the term "alkynyl" refers to an
 unsaturated hydrocarbon radical having from 2 to 12 carbon atoms (*i.e.*, C₂–C₁₂ alkynyl),
 20 particularly from 2 to 8 carbon atoms (*i.e.*, C₂–C₈ alkynyl), particularly from 2 to 6 carbon atoms
 (*i.e.*, C₂–C₆ alkynyl), and having one or more (*e.g.*, 2, 3, etc.) carbon-carbon triple bonds. The
 alkynyl group may be linear, branched or cyclic. Examples of alkynyls include, but are not
 limited to ethynyl, 1-propynyl, 2-butylnyl, and 1,3-butadiynyl. "Alkynyl" is intended to embrace
 all structural isomeric forms of an alkynyl. For example, butynyl encompasses 2-butylnyl, and
 25 1,3-butadiynyl and propynyl encompasses 1-propynyl and 2-propynyl (propargyl).

As used herein, and unless otherwise specified, the term "alkynylene" refers to a divalent
 alkynyl moiety containing 2 to about 12 carbon atoms (*i.e.*, C₂–C₁₂ alkenylene) in length and
 meaning that the alkylene moiety is attached to the rest of the molecule at both ends of the alkyl
 unit. For example, alkenylenes include, but are not limited to, –C≡C–, –C≡CCH₂–, –

$C\equiv CCH_2C\equiv C-$, $-CH_2CH_2C\equiv CCH_2-$. The alkynylene group may be linear or branched.

As used herein, and unless otherwise specified, the term "alkoxy" refers to --O--alkyl containing from 1 to about 10 carbon atoms. The alkoxy may be straight-chain or branched-chain. Non-limiting examples include methoxy, ethoxy, propoxy, butoxy, isobutoxy, tert-butoxy, pentoxy, and hexoxy. "C₁ alkoxy" refers to methoxy, "C₂ alkoxy" refers to ethoxy, "C₃ alkoxy" refers to propoxy and "C₄ alkoxy" refers to butoxy. Further, as used herein, "OMe" refers to methoxy and "OEt" refers to ethoxy.

As used herein, and unless otherwise specified, the term "aromatic" refers to unsaturated cyclic hydrocarbons having a delocalized conjugated π system and having from 5 to 20 carbon atoms (aromatic C₅-C₂₀ hydrocarbon), particularly from 5 to 12 carbon atoms (aromatic C₅-C₁₂ hydrocarbon), and particularly from 5 to 10 carbon atoms (aromatic C₅-C₁₂ hydrocarbon). Exemplary aromatics include, but are not limited to benzene, toluene, xylenes, mesitylene, ethylbenzenes, cumene, naphthalene, methylnaphthalene, dimethylnaphthalenes, ethylnaphthalenes, acenaphthalene, anthracene, phenanthrene, tetraphene, naphthacene, benzanthracenes, fluoranthrene, pyrene, chrysene, triphenylene, and the like, and combinations thereof. Additionally, the aromatic may comprise one or more heteroatoms. Examples of heteroatoms include, but are not limited to, nitrogen, oxygen, and/or sulfur. Aromatics with one or more heteroatom include, but are not limited to furan, benzofuran, thiophene, benzothiophene, oxazole, thiazole and the like, and combinations thereof. The aromatic may comprise monocyclic, bicyclic, tricyclic, and/or polycyclic rings (in some embodiments, at least monocyclic rings, only monocyclic and bicyclic rings, or only monocyclic rings) and may be fused rings.

As used herein, and unless otherwise specified, the term "aryl" refers to any monocyclic or polycyclic cyclized carbon radical containing 6 to 14 carbon ring atoms, wherein at least one ring is an aromatic hydrocarbon. Likewise heteroaryl means an aryl group where a ring carbon atom (or two or three ring carbon atoms) has been replaced with a heteroatom, preferably N, O, or S. As used herein, the term "aromatic" also refers to pseudoaromatic heterocycles which are heterocyclic substituents that have similar properties and structures (nearly planar) to aromatic heterocyclic ligands, but are not by definition aromatic; likewise the term aromatic also refers to substituted aromatics. Examples of aryls include, but are not limited to phenyl, naphthyl, pyridinyl, indolyl, 2-methyl-phenyl, xylyl, and 4-bromo-xylyl.

As used herein, and unless otherwise specified, the term "aralkyl" refers to an alkyl group substituted with an aryl group. The alkyl group may be a C₁-C₁₀ alkyl group, particularly a C₁-C₆, particularly a C₁-C₄ alkyl group, and particularly a C₁-C₃ alkyl group. Examples of aralkyl groups include, but are not limited to phenylmethyl, phenylethyl, and naphthylmethyl. The aralkyl may comprise one or more heteroatoms and be referred to as a "heteroaralkyl." Examples of heteroatoms include, but are not limited to, nitrogen (*i.e.*, nitrogen-containing heteroaralkyl), oxygen (*i.e.*, oxygen-containing heteroaralkyl), and/or sulfur (*i.e.*, sulfur-containing heteroaralkyl). Examples of heteroaralkyl groups include, but are not limited to, pyridinylethyl, indolylmethyl, furylethyl, and quinolinylpropyl.

As used herein, and unless otherwise specified, the term "heterocyclo" refers to fully saturated, partially saturated or unsaturated or polycyclic cyclized carbon radical containing from 4 to 20 carbon ring atoms and containing one or more heteroatoms atoms. Examples of heteroatoms include, but are not limited to, nitrogen (*i.e.*, nitrogen-containing heterocyclo), oxygen (*i.e.*, oxygen-containing heterocyclo), and/or sulfur (*i.e.*, sulfur-containing heterocyclo). Examples of heterocyclo groups include, but are not limited to, thienyl, furyl, pyrrolyl, piperazinyl, pyridyl, benzoxazolyl, quinolinyl, imidazolyl, pyrrolidinyl, and piperidinyl.

As used herein, and unless otherwise specified, the term "heterocycloalkyl" refers to an alkyl group substituted with heterocyclo group. The alkyl group may be a C₁-C₁₀ alkyl group, particularly a C₁-C₆, particularly a C₁-C₄ alkyl group, and particularly a C₁-C₃ alkyl group. Examples of heterocycloalkyl groups include, but are not limited to thienylmethyl, furylethyl, pyrrolylmethyl, piperazinylethyl, pyridylmethyl, benzoxazolylethyl, quinolinylpropyl, and imidazolylpropyl.

The term "ring atom" means an atom that is part of a cyclic ring structure. By this definition, a benzyl group has six ring atoms and tetrahydrofuran has 5 ring atoms.

For purposes of this invention and claims thereto, unless otherwise indicated, the term "substituted" means that a hydrogen group has been replaced with a heteroatom, or a heteroatom containing group. For example, a "substituted hydrocarbyl" is a radical made of carbon and hydrogen where at least one hydrogen is replaced by a heteroatom or heteroatom containing group.

A heterocyclic ring is a ring having a heteroatom in the ring structure as opposed to a heteroatom substituted ring where a hydrogen on a ring atom is replaced with a heteroatom. For

example, tetrahydrofuran is a heterocyclic ring and 4-N,N-dimethylamino-phenyl is a heteroatom substituted ring.

Unless otherwise indicated, where isomers of a named alkyl, alkenyl, alkoxy, or aryl group exist (*e.g.*, n-butyl, iso-butyl, sec-butyl, and tert-butyl) reference to one member of the group (*e.g.*, n-butyl) shall expressly disclose the remaining isomers (*e.g.*, iso-butyl, sec-butyl, and tert-butyl) in the family. Likewise, reference to an alkyl, alkenyl, alkoxide, or aryl group without specifying a particular isomer (*e.g.*, butyl) expressly discloses all isomers (*e.g.*, n-butyl, iso-butyl, sec-butyl, and tert-butyl).

As used herein, the term “hydroxyl” refers to an –OH group.

As used herein, “oxygenate” refers to a saturated, unsaturated, or polycyclic cyclized hydrocarbon radical containing from 1 to 40 carbon atoms and further containing one or more oxygen heteroatoms.

As used herein, “aluminum alkyl adducts” refers to the reaction product of aluminum alkyls and/or alumoxanes with quenching agents, such as water and/or methanol.

As used herein, the term “mesoporous” refers to solid materials having pores that have a diameter within the range of from about 2 nm to about 50 nm.

As used herein, the term “organosilica” refers to an organosiloxane compound that comprises one or more organic groups bound to two or more Si atoms.

As used herein, the term “silanol” refers to a Si–OH group, and the term “silanol content” refers to the percent of the Si–OH groups in a compound and can be calculated by standard methods, such as NMR.

As used herein, the terms “structure directing agent,” “SDA,” and/or “porogen” refer to one or more compounds added to the synthesis media to aid in and/or guide the polymerization and/or polycondensing and/or organization of the building blocks that form the organosilica material framework. Further, a “porogen” is understood to be a compound capable of forming voids or pores in the resultant organosilica material framework. As used herein, the term “structure directing agent” encompasses and is synonymous and interchangeable with the terms “templating agent” and “template.”

An “olefin,” alternatively referred to as “alkene,” is a linear, branched, or cyclic compound of carbon and hydrogen having at least one double bond. For purposes of this specification and the claims appended thereto, when a polymer or copolymer is referred to as

comprising an olefin, the olefin present in such polymer or copolymer is the polymerized form of the olefin. For example, when a copolymer is said to have an "ethylene" content of 35 wt% to 55 wt%, it is understood that the mer unit in the copolymer is derived from ethylene in the polymerization reaction and said derived units are present at 35 wt% to 55 wt%, based upon the weight of the copolymer.

A "polymer" has two or more of the same or different mer units. A "homopolymer" is a polymer having mer units that are the same. A "copolymer" is a polymer having two or more mer units that are distinct or different from each other. A "terpolymer" is a polymer having three mer units that are distinct or different from each other. "Distinct" or "different" as used to refer to mer units indicates that the mer units differ from each other by at least one atom or are different isomerically. Accordingly, the definition of copolymer, as used herein, includes terpolymers and the like. An "ethylene polymer" or "ethylene copolymer" is a polymer or copolymer comprising at least 50 mole% ethylene derived units, a "propylene polymer" or "propylene copolymer" is a polymer or copolymer comprising at least 50 mole% propylene derived units, and so on.

As used herein, M_n is number average molecular weight, M_w is weight average molecular weight, and M_z is z average molecular weight, wt% is weight percent, and mol% is mole percent. Molecular weight distribution (MWD), also referred to as polydispersity (PDI), is defined to be M_w divided by M_n . Unless otherwise noted, all molecular weight units (*e.g.*, M_w , M_n , M_z) are g/mol. The following abbreviations may be used herein: Me is methyl, Et is ethyl, Pr is propyl, cPr is cyclopropyl, nPr is n-propyl, iPr is isopropyl, Bu is butyl, nBu is normal butyl, iBu is isobutyl, sBu is sec-butyl, tBu is tert-butyl, Oct is octyl, Ph is phenyl, Bn is benzyl, MAO is methylalumoxane, dme is 1,2-dimethoxyethane, TMS is trimethylsilyl, TIBAL is triisobutylaluminum, TNOAL is tri(n-octyl)aluminum, THF (also referred to as thf) is tetrahydrofuran, RT is room temperature (and is 25°C unless otherwise indicated), tol is toluene, EtOAc is ethyl acetate, Np is neopentyl, and Cy is cyclohexyl.

Ethylene is considered an α -olefin for purposes of certain aspects of the present disclosure. An oligomer is a polymer having a low molecular weight, such as M_n of less than 25,000 g/mol, or less than 2,500 g/mol, or a low number of mer units, such as 75 mer units or less or 50 mer units or less.

The term "continuous" means a system that operates without interruption or cessation.

For example a continuous process to produce a polymer would be one where the reactants are continually introduced into one or more reactors and polymer product is continually withdrawn.

A “solution polymerization” means a polymerization process in which the polymer is dissolved in a liquid polymerization medium, such as an inert solvent or monomer(s) or their blends. A solution polymerization is typically homogeneous. A homogeneous polymerization is one where the polymer product is dissolved in the polymerization medium. Such systems are preferably not turbid as described in J. Vladimir Oliveira, C. Dariva and J. C. Pinto, Ind. Eng. Chem. Res. 29, 2000, 4627.

A “bulk polymerization” means a polymerization process in which the monomers and/or comonomers being polymerized are used as a solvent or diluent using little or no inert solvent as a solvent or diluent. A small fraction of inert solvent might be used as a carrier for catalyst and scavenger. A bulk polymerization system contains less than 25 wt% of inert solvent or diluent, preferably less than 10 wt%, preferably less than 1 wt%, preferably 0 wt%.

A “catalyst system” is the combination of at least one catalyst compound, an organosilica support material, an optional activator, and an optional co-activator. For the purposes of this invention and the claims thereto, when catalyst systems are described as comprising neutral stable forms of the components, it is well understood by one of ordinary skill in the art, that the ionic form of the component is the form that reacts with the monomers to produce polymers. For example, when “catalyst system” is used to describe a catalyst/activator/support combination before activation, it means the unactivated catalyst complex (precatalyst) together with an activator, support and, optionally, a co-activator. When it is used to describe such after activation, it means the support, the activated complex, and the activator or other charge-balancing moiety. The transition metal compound may be neutral as in a precatalyst, or a charged species with a counter ion as in an activated catalyst system.

Coordination polymerization is an addition polymerization in which successive monomers are added to the organometallic active center.

The terms “cocatalyst” and “activator” are used herein interchangeably and are defined to be any compound which can activate any one of the catalyst compounds herein by converting the neutral catalyst compound to a catalytically active catalyst compound cation.

Organosilica Materials

In certain aspects, the invention relates to organosilica materials used as catalyst support

materials. The organosilica material supports may be a polymer formed of at least one monomer, as will be described further below. In certain variations, the organosilica material may be a polymer formed of multiple distinct monomers.

Monomers of Formula (I)

5 In a first embodiment, the organosilica material supports may be a polymer of at least one monomer of Formula $[Z^1OZ^2SiCH_2]_3$ (I), where Z^1 represents a hydrogen atom, a C₁-C₄ alkyl group, or a bond to a silicon atom of another monomer and Z^2 represents a hydroxyl group, a C₁-C₄ alkoxy group, a C₁-C₆ alkyl group, or an oxygen atom bonded to a silicon atom of another monomer.

10 As used herein, and unless otherwise specified, “a bond to a silicon atom of another monomer” means the bond can advantageously displace a moiety (particularly an oxygen-containing moiety such as a hydroxyl, an alkoxy or the like), if present, on a silicon atom of another monomer so there may be a bond directly to the silicon atom of the another monomer thereby connecting the two monomers, *e.g.*, via a Si–O–Si linkage. As used herein, and unless
15 otherwise specified, “an oxygen atom bonded to a silicon atom of another monomer” means that the oxygen atom can advantageously displace a moiety (particularly an oxygen-containing moiety such as a hydroxyl), if present, on a silicon atom of the another monomer so the oxygen atom may be bonded directly to the silicon atom of the another monomer thereby connecting the two monomers, *e.g.*, via a Si–O–Si linkage. For clarity, in the aforementioned bonding
20 scenarios, the “another monomer” can be a monomer of the same type or a monomer of a different type.

In various embodiments, each Z^1 can be a hydrogen atom. Each Z^1 can be a C₁-C₄ alkyl group, a C₁-C₃ alkyl group, a C₁-C₂ alkyl group, or methyl. Each Z^1 can be bonded to a silicon atom of another monomer. Each Z^1 can be a hydrogen atom, a C₁-C₂ alkyl group, or a bond to a
25 silicon atom of another monomer. Each Z^2 can be a hydroxyl group. Each Z^2 can be a C₁-C₆ alkyl group, a C₁-C₅ alkyl group, a C₁-C₄ alkyl group, a C₁-C₃ alkyl group, a C₁-C₂ alkyl group, or methyl. Each Z^2 can be a C₁-C₄ alkoxy group, a C₁-C₃ alkoxy group, a C₁-C₂ alkoxy group, or methoxy. Each Z^2 can be an oxygen atom bonded to a silicon atom of another monomer. Each
30 Z^2 can be a hydroxyl group, a C₁-C₄ alkoxy group, or an oxygen atom bonded to a silicon atom of another monomer. Each Z^2 can be a hydroxyl group, a C₁-C₂ alkyl group (methyl or ethyl), a C₁-C₂ alkoxy group (methoxy or ethoxy), or an oxygen atom bonded to a silicon atom of another

monomer. Each Z^1 can be a hydrogen atom, a C_1 - C_2 alkyl group, or a bond to a silicon atom of another monomer and Z^2 can be a hydroxyl group, a C_1 - C_2 alkyl group, a C_1 - C_2 alkoxy group, or an oxygen atom bonded to a silicon atom of another monomer. In another embodiment, each Z^1 can be a hydrogen atom, ethyl or a bond to a silicon atom of another monomer and each Z^2 can be a hydroxyl group, ethoxy, or an oxygen atom bonded to a silicon atom of another monomer. In another embodiment, each Z^1 can be a hydrogen atom, ethyl or a bond to a silicon atom of another monomer and each Z^2 can be methyl.

In certain variations, the organosilica material may be a polymer of at least one monomer of Formula (I) and also further comprises at least one additional monomer of Formula (I). For example, the polymer may comprise a first monomer of Formula (I), as well as a second distinct monomer of Formula (I).

In a particular embodiment, the polymer may comprise a first monomer of Formula (I), wherein each Z^1 can be a hydrogen atom, ethyl or a bond to a silicon atom of another monomer and each Z^2 can be a hydroxyl group, ethoxy, or an oxygen atom bonded to a silicon atom of another monomer; and second distinct monomer of Formula (I), wherein each Z^1 can be a hydrogen atom, ethyl or a bond to a silicon atom of another monomer and each Z^2 can be methyl.

Monomers of Formula (II)

In certain other aspects, the organosilica material support may be a polymer formed of multiple distinct monomers, including a monomer of Formula I in combination with one or more additional monomers.

In a second embodiment, the organosilica material support may be a polymer of at least one monomer of Formula (I) and a monomer of Formula $Z^3OZ^4Z^5Z^6Si$ (II), where Z^3 independently represents a hydrogen atom or a C_1 - C_4 alkyl group, or a bond to a silicon atom of another monomer; and each of Z^4 , Z^5 and Z^6 are independently selected from the group consisting of a hydroxyl group, a C_1 - C_4 alkyl group (preferably methyl, ethyl, propyl, or butyl), a C_1 - C_4 alkoxy group (preferably methoxy, ethoxy, propoxy or butoxy), a nitrogen-containing C_1 - C_{10} alkyl group, a nitrogen-containing heteroalkyl group, and a nitrogen-containing optionally substituted heterocycloalkyl group, and an oxygen atom bonded to a silicon atom of another monomer.


In various aspects, each Z^3 can be a C_1 - C_3 alkyl group, a C_1 - C_2 alkyl group (preferably ethyl, methyl, propyl, butyl) or a bond to a silicon atom of another monomer, and/or each Z^4 , Z^5

and Z^6 each independently can be a hydroxyl group. Alternately each Z^3 can be a hydrogen atom, a C_1 - C_2 alkyl group, or a bond to a silicon atom of another monomer and Z^4 , Z^5 and Z^6 each independently can be a hydroxyl group or a C_1 - C_2 alkyl group.

Each Z^4 , Z^5 and Z^6 independently can be a C_1 - C_4 alkyl group, a C_1 - C_3 alkyl group, a C_1 - C_2 alkyl group, or methyl, preferably a hydroxyl group, or a C_1 - C_2 alkyl group, alternately each Z^4 , Z^5 and Z^6 independently can be a C_1 - C_4 alkoxy group, a C_1 - C_3 alkoxy group, a C_1 - C_2 alkoxy group, or methoxy, preferably each Z^4 , Z^5 and Z^6 is independently can be selected from the group consisting of a hydroxyl group, a C_1 - C_2 alkyl group and a C_1 - C_2 alkoxy group.

Alternately, each Z^3 can be a hydrogen atom, a C_1 - C_2 alkyl group, or a bond to a silicon atom of another monomer; and Z^4 , Z^5 and Z^6 each independently can be selected from the group consisting of a hydroxyl group, a C_1 - C_2 alkyl group and a C_1 - C_2 alkoxy group.

Each Z^4 , Z^5 and Z^6 each independently can be a nitrogen-containing C_1 - C_{10} alkyl group, a nitrogen-containing C_1 - C_9 alkyl group, a nitrogen-containing C_1 - C_8 alkyl group, a nitrogen-containing C_1 - C_7 alkyl group, a nitrogen-containing C_1 - C_6 alkyl group, a nitrogen-containing C_1 - C_5 alkyl group, a nitrogen-containing C_1 - C_4 alkyl group, a nitrogen-containing C_1 - C_3 alkyl group, a nitrogen-containing C_1 - C_2 alkyl group, or a methylamine. In particular, Z^4 , Z^5 and Z^6 each independently can be a nitrogen-containing C_2 - C_{10} alkyl group, a nitrogen-containing C_3 - C_{10} alkyl group, a nitrogen-containing C_3 - C_9 alkyl group, or a nitrogen-containing C_3 - C_8 alkyl group. The aforementioned nitrogen-containing alkyl groups may have one or more nitrogen atoms (*e.g.*, 2, 3, etc.). Examples of nitrogen-containing C_1 - C_{10} alkyl groups include, but are not limited to,



Each Z^4 , Z^5 and Z^6 each independently can be selected from the group consisting of a hydroxyl group, a C_1 - C_2 alkyl group, a C_1 - C_2 alkoxy group and a nitrogen-containing C_3 - C_{10} alkyl group, a nitrogen-containing heteroaralkyl group. The nitrogen-containing heteroaralkyl group can be a nitrogen-containing C_4 - C_{12} heteroaralkyl group, a nitrogen-containing C_4 - C_{10} heteroaralkyl group, or a nitrogen-containing C_4 - C_8 heteroaralkyl group. Examples of nitrogen-containing heteroaralkyl groups include but are not limited to pyridinylethyl, pyridinylpropyl, pyridinylmethyl, indolylmethyl, pyrazinylethyl, and pyrazinylpropyl. The aforementioned nitrogen-containing heteroaralkyl groups may have one or more nitrogen atoms (*e.g.*, 2, 3, etc.),


preferably Z^4 , Z^5 and Z^6 each independently can be selected from the group consisting of a hydroxyl group, a C_1 - C_2 alkyl group, a C_1 - C_2 alkoxy group, nitrogen-containing C_3 - C_{10} alkyl group and a nitrogen-containing heteroaralkyl group.

Each Z^4 , Z^5 and Z^6 each independently can be a nitrogen-containing heterocycloalkyl group, wherein the heterocycloalkyl group may be optionally substituted with a C_1 - C_6 alkyl group, particularly a C_1 - C_4 alkyl group. The nitrogen-containing heterocycloalkyl group can be a nitrogen-containing C_4 - C_{12} heterocycloalkyl group, a nitrogen-containing C_4 - C_{10} heterocycloalkyl group, or a nitrogen-containing C_4 - C_8 heterocycloalkyl group. Examples of nitrogen-containing heterocycloalkyl groups include but are not limited to piperazinylethyl, piperazinylpropyl, piperidinylethyl, piperidinylpropyl. The aforementioned nitrogen-containing heterocycloalkyl groups may have one or more nitrogen atoms (*e.g.*, 2, 3, etc.).


In a particular embodiment, each Z^3 can be a hydrogen atom, ethyl or a bond to a silicon atom of another monomer; and Z^4 , Z^5 and Z^6 each independently can be selected from the group consisting of a hydroxyl group, ethoxy, and an oxygen atom bonded to a silicon atom of another monomer.

In another particular embodiment, each Z^3 can be a hydrogen atom, ethyl or a bond to a silicon atom of another comonomer; Z^4 and Z^5 each independently can be selected from the group consisting of a hydroxyl group, ethoxy, and an oxygen atom bonded to a silicon atom of another monomer; and Z^6 can be methyl.

In another particular embodiment, each Z^3 can be a hydrogen atom, methyl or a bond to a silicon atom of another comonomer; Z^4 and Z^5 each independently can be selected from the group consisting of a hydroxyl group, methoxy, and an oxygen atom bonded to a silicon atom of


another monomer; and Z^6 can be .

In another particular embodiment, each Z^3 can be a hydrogen atom, ethyl or a bond to a silicon atom of another comonomer; Z^4 and Z^5 each independently can be selected from the group consisting of a hydroxyl group, ethoxy, and an oxygen atom bonded to a silicon atom of


another monomer; and Z^6 can be .

In another particular embodiment, each Z^3 can be a hydrogen atom, ethyl or a bond to a silicon atom of another comonomer; Z^4 and Z^5 each independently can be selected from the


group consisting of a hydroxyl group, ethoxy, and an oxygen atom bonded to a silicon atom of




In another particular embodiment, each Z^3 can be a hydrogen atom, ethyl or a bond to a silicon atom of another comonomer; Z^4 and Z^5 each independently can be selected from the group consisting of a hydroxyl group, ethoxy, and an oxygen atom bonded to a silicon atom of



In another particular embodiment, each Z^3 can be a hydrogen atom, ethyl or a bond to a silicon atom of another comonomer; Z^4 and Z^5 each independently can be selected from the group consisting of a hydroxyl group, ethoxy, and an oxygen atom bonded to a silicon atom of



In another particular embodiment, each Z^3 can be a hydrogen atom, ethyl or a bond to a silicon atom of another comonomer; Z^4 and Z^5 each independently can be selected from the group consisting of a hydroxyl group, ethoxy, and an oxygen atom bonded to a silicon atom of



Monomers of Formula (III)

In a third embodiment, the organosilica material support may be a polymer of at least one monomer of Formula (I) and a monomer having at least one unit of Formula:


$Z^7Z^8Z^9Si-R^1-SiZ^7Z^8Z^9$ (III), where each Z^7 independently represents a hydroxyl group, a C_1 - C_4 alkoxy group, or an oxygen atom bonded to a silicon atom of another comonomer; each of Z^8 and Z^9 independently represent a hydroxyl group, a C_1 - C_4 alkoxy group, a C_1 - C_4 alkyl group, or an oxygen bonded to a silicon atom of another monomer; and R^1 is selected from the group consisting of a C_1 - C_8 alkylene group, a C_2 - C_8 alkenylene group, a C_2 - C_8 alkynylene group, a nitrogen-containing C_2 - C_{10} alkylene group, an optionally substituted C_6 - C_{20} aralkyl and an optionally substituted C_4 - C_{20} heterocycloalkyl group.

In various aspects, each Z^7 can be a hydroxyl group or a C_1 - C_4 alkoxy group, a C_1 - C_3 alkoxy group, a C_1 - C_2 alkoxy group, or methoxy, preferably a hydroxyl group, or a C_1 - C_2 alkoxy

group or oxygen atom bonded to a silicon atom of another comonomer. Each Z^8 and Z^9 can independently be a hydroxyl group, a C_1 - C_4 alkoxy group, a C_1 - C_3 alkoxy group, a C_1 - C_2 alkoxy group, or methoxy, a C_1 - C_4 alkyl group, a C_1 - C_3 alkyl group, a C_1 - C_2 alkyl group, or methyl. Alternately, each Z^8 and Z^9 independently can be an oxygen atom bonded to a silicon atom of another comonomer. Each Z^7 can be a hydroxyl group, a C_1 - C_2 alkoxy group, or an oxygen atom bonded to a silicon atom of another comonomer; and Z^8 and Z^9 each independently can be a hydroxyl group, a C_1 - C_2 alkoxy group, a C_1 - C_2 alkyl group, or an oxygen atom bonded to a silicon atom of another comonomer. When present with Formula (I), each Z^7 can be a hydroxyl group, ethoxy, methoxy or an oxygen atom bonded to a silicon atom of another comonomer; and each Z^8 and Z^9 independently can be a hydroxyl group, ethoxy, methyl, or an oxygen atom bonded to a silicon atom of another comonomer.

Each R^1 can be a C_1 - C_8 alkylene group, a C_1 - C_7 alkylene group, a C_1 - C_6 alkylene group, a C_1 - C_5 alkylene group, a C_1 - C_4 alkylene group, a C_1 - C_3 alkylene group, a C_1 - C_2 alkylene group, or $-CH_2-$.

Each R^1 can be a nitrogen-containing C_2 - C_{10} alkylene group, a nitrogen-containing C_3 - C_{10} alkylene group, a nitrogen-containing C_4 - C_{10} alkylene group, a nitrogen-containing C_4 - C_9 alkylene group, a nitrogen-containing C_4 - C_8 alkylene group, or nitrogen containing C_3 - C_8 alkylene group. The aforementioned nitrogen-containing alkylene groups may have one or more nitrogen atoms (*e.g.*, 2, 3, etc.). Examples of nitrogen-containing alkylene groups include, but

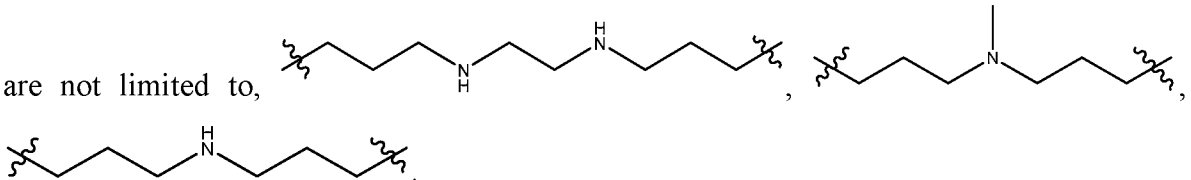are not limited to,  and


Each Z^7 can be a hydroxyl group, a C_1 - C_2 alkoxy group, or an oxygen atom bonded to a silicon atom of another comonomer; each Z^8 and Z^9 independently can be a hydroxyl group, a C_1 - C_2 alkoxy group, a C_1 - C_2 alkyl group, or an oxygen atom bonded to a silicon atom of another comonomer; and R^1 can be selected from the group consisting of a C_1 - C_4 alkylene group, a C_2 - C_4 alkenylene group, a C_2 - C_4 alkynylene group and a nitrogen-containing C_4 - C_{10} alkylene group.

Each R^1 can be an optionally substituted C_6 - C_{20} aralkyl, an optionally substituted C_6 - C_{14} aralkyl, or an optionally substituted C_6 - C_{10} aralkyl. Examples of C_6 - C_{20} aralkyls include, but are not limited to, phenylmethyl, phenylethyl, and naphthylmethyl. The aralkyl may be optionally


substituted with a C₁-C₆ alkyl group, particularly a C₁-C₄ alkyl group.

Each R¹ can be an optionally substituted C₄-C₂₀ heterocycloalkyl group, an optionally substituted C₄-C₁₆ heterocycloalkyl group, an optionally substituted C₄-C₁₂ heterocycloalkyl group, or an optionally substituted C₄-C₁₀ heterocycloalkyl group. Examples of C₄-C₂₀ heterocycloalkyl groups include, but are not limited to, thienylmethyl, furylethyl, pyrrolylmethyl, piperazinylethyl, pyridylmethyl, benzoxazolethyl, quinolinylpropyl, and imidazolylpropyl. The heterocycloalkyl may be optionally substituted with a C₁-C₆ alkyl group, particularly a C₁-C₄ alkyl group.

Each Z⁷ can be a hydroxyl group, ethoxy, methoxy or an oxygen atom bonded to a silicon atom of another comonomer; each Z⁸ and Z⁹ independently can be a hydroxyl group, ethoxy, methoxy, methyl, or an oxygen atom bonded to a silicon atom of another comonomer; and R¹ can be selected from the group consisting of -CH₂-, -CH₂CH₂-, -HC=CH-,

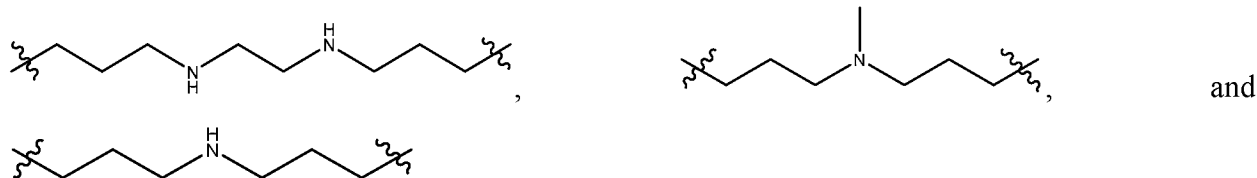


Each Z⁷ can be a hydroxyl group, or an oxygen atom bonded to a silicon atom of another comonomer; each Z⁸ and Z⁹ independently can be a hydroxyl group, methyl, or an oxygen atom bonded to a silicon atom of another comonomer; and R¹ can be selected from the group consisting of -CH₂-, -CH₂CH₂-, -HC=CH-,

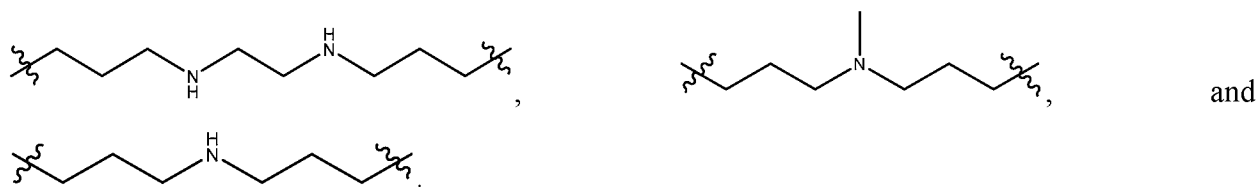

In a particular embodiment, each Z⁷ can be a hydroxyl group, ethoxy or an oxygen atom bonded to a silicon atom of another comonomer; each Z⁸ can be a hydroxyl group, ethoxy, and an oxygen atom bonded to a silicon atom of another monomer; each Z⁹ can be methyl; and R¹ can be -CH₂CH₂-.

In another particular embodiment, each Z⁷ can be a hydroxyl group, ethoxy or an oxygen atom bonded to a silicon atom of another comonomer; each Z⁸ and Z⁹ independently can be selected from the group consisting of a hydroxyl group, ethoxy, and an oxygen atom bonded to a silicon atom of another monomer; and R¹ can be -CH₂- or -HC=CH-.

In another particular embodiment, each Z^7 can be a hydroxyl group, ethoxy or an oxygen atom bonded to a silicon atom of another comonomer; each Z^8 can be a hydroxyl group, ethoxy, and an oxygen atom bonded to a silicon atom of another monomer; each Z^9 can be methyl; and



5

Monomers of Formula (IV)

In a fourth embodiment, the organosilica material support may be a polymer of at least one monomer of Formula (I) and a monomer having at least one trivalent metal oxide monomer of Formula $M^1(OZ^{10})_3$ (IV), where M^1 represents a Group 13 metal (preferably B, Al, Ga, In, or Tl, preferably B, Al or Ga, preferably Al) and Z^{10} represents a hydrogen atom, a C_1 - C_6 alkyl (preferably methyl, ethyl, propyl, butyl, pentyl or hexyl) or a bond to a silicon atom of another monomer.

Each M^1 can be B, Al, Ga, In Tl, or Uut. In particular, M^1 can be Al or B. Preferably M^1 can be Al or B and Z^{10} can be a hydrogen atom, methyl, ethyl, propyl or butyl.

Each Z^{10} can be a C_1 - C_6 alkyl group, a C_1 - C_5 alkyl group, a C_1 - C_4 alkyl group, a C_1 - C_3 alkyl group, a C_1 - C_2 alkyl group, or methyl. In particular, Z^{10} can be methyl, ethyl, propyl or butyl.

When present with Formula (I), each Z^1 and Z^2 each independently can be a hydrogen atom, a C_1 - C_2 alkyl group (methyl or ethyl), or a bond to a silicon atom of another monomer; each M^1 can be Al or B; and each Z^{10} can be a hydrogen atom, methyl, ethyl, propyl, butyl or a bond to a silicon atom of another monomer.

Monomers of Formula (V)

In a fifth embodiment, the organosilica material support may be a polymer of at least one monomer of Formula (I) and a monomer having at least one trivalent metal oxide monomer of Formula $(Z^{11}O)_2M^2-O-Si(OZ^{12})_3$ (V), wherein M^2 represents a Group 13 metal (preferably B, Al, Ga, In, or Tl, preferably B, Al or Ga, preferably Al) and Z^{11} and Z^{12} each independently represent a hydrogen atom, a C_1 - C_6 alkyl group (such as methyl, ethyl, propyl, butyl, pentyl or hexyl) or a bond to a silicon atom of another monomer.


Each M^2 can be B, Al, Ga, In Tl, or Uut. In particular, each M^2 can be Al or B. Preferably each M^2 can be Al or B and each Z^{11} and Z^{12} are a hydrogen atom.

Each Z^{11} and/or Z^{12} can be a C_1 - C_6 alkyl group, a C_1 - C_5 alkyl group, a C_1 - C_4 alkyl group, a C_1 - C_3 alkyl group, a C_1 - C_2 alkyl group, or methyl. In particular, each Z^{11} and/or Z^{12} can be methyl, ethyl, propyl or butyl.

In a particular embodiment, each M^2 can be Al; and Z^{11} and/or Z^{12} each independently can be a hydrogen atom, methyl, ethyl, propyl, butyl, or a bond to a silicon atom of another monomer.

Monomers of Formula (VI)

In a sixth embodiment, the organosilica material support may be a polymer of at least one cyclic polyurea monomer. The organosilica material may be a polymer formed of multiple distinct monomers, including a monomer of Formula I in combination with one or more cyclic polyurea monomers. A suitable cyclic polyurea monomer of Formula

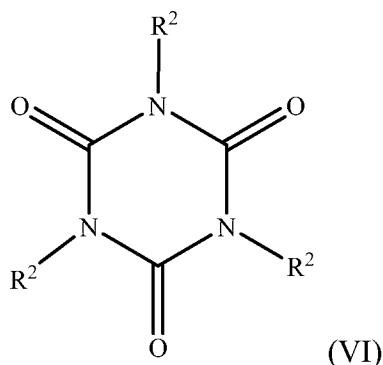

where R^2 is a $Z^{13}OZ^{14}Z^{15}SiZ^{16}$ group, wherein each Z^{13} represents a hydrogen atom, a C_1 - C_4 alkyl group, or a bond to a silicon atom of another monomer unit; each Z^{14} and Z^{15} independently represents a hydroxyl group, a C_1 - C_4 alkyl group, a C_1 - C_4 alkoxy group or an oxygen atom bonded to a silicon atom of another monomer unit; and each Z^{16} represents a C_1 - C_8 alkylene group bonded to a nitrogen atom of the cyclic polyurea.

In certain other aspects, the organosilica material support may be a polymer formed of monomers of Formula VI, with or without any other monomers, including those of Formula I.

In various embodiments, each Z^{13} can be methyl, ethyl, propyl, or butyl, preferably methyl or ethyl. Alternately, each Z^{14} and Z^{15} independently can be a hydroxyl group. Each Z^{14} and Z^{15} independently can be methyl, ethyl, propyl, or butyl, preferably methyl or ethyl. Each Z^{14} and Z^{15} independently can be a C_1 - C_4 alkoxy group, a C_1 - C_3 alkoxy group, a C_1 - C_2 alkoxy group or methoxy.

Each Z^{16} can be a C_1 - C_7 alkylene group bonded to a nitrogen atom of the cyclic polyurea,

a C₁-C₇ alkylene group bonded to a nitrogen atom of the cyclic polyurea, a C₁-C₆ alkylene group bonded to a nitrogen atom of the cyclic polyurea, a C₁-C₄ alkylene group bonded to a nitrogen atom of the cyclic polyurea, a C₁-C₃ alkylene group bonded to a nitrogen atom of the cyclic polyurea, a C₁-C₂ alkylene group bonded to a nitrogen atom of the cyclic polyurea, or -CH₂-
5 bonded to a nitrogen atom of the cyclic polyurea.

Each Z¹³ can be a hydrogen atom, a C₁-C₂ alkyl group or a bond to a silicon atom of another monomer; each Z¹⁴ and Z¹⁵ independently can be a hydroxyl group, a C₁-C₂ alkyl group, a C₁-C₂ alkoxy group, or an oxygen atom bonded to a silicon atom of another monomer unit; and Z¹⁶ can be a C₁-C₄ alkylene group bonded to a nitrogen atom of the cyclic polyurea. Each Z¹³
10 can be a hydrogen atom, methyl, or a bond to a silicon atom of another monomer; each Z¹⁴ and Z¹⁵ independently can be a hydroxyl group, methoxy or an oxygen atom bonded to a silicon atom of another monomer unit; and each Z¹⁶ can be -CH₂CH₂CH₂- bonded to a nitrogen atom of the cyclic polyurea.

Organosilica Material Characterization

15 In certain aspects, the invention relates to organosilica material supports that may be a polymer formed from a reaction of any of the monomers of Formulas (I)-(VI), although in certain alternative variations, the organosilica materials are not limited to only these monomers. Furthermore, in certain embodiments, the organosilica material support may be a polymer formed of multiple distinct monomers, including any combinations of monomers of Formula (I)
20 with one or more monomers of Formulas (II)-(VI). As noted above, in certain alternative embodiments, the organosilica material support may be a polymer formed of one or more monomers of Formula (VI), with or without other monomers of Formulas (I)-(V).

The inventive technology thus uses the monomer building blocks described above to form an organosilane having a high surface area and high porosity without use of any structure
25 directing agent (SDA), porogen. However, in certain aspects, the pores in the organosilane materials of the invention are not arranged in an ordered structure as they would be if formed with a structure directing agent (SDA). Conventional periodic mesoporous organosilicas (PMO) materials have highly ordered pore structures that occur by use of SDAs (typically surfactants) during reaction formations. In contrast, in certain aspects, the organosilica material support of the
30 present disclosure may be formed without use of any SDAs or porogens as a template, while still exhibiting relatively ordered pore structures and desirably high surface area and porosity levels.

In various aspects, the organosilica materials described herein can be characterized as described in the following sections. Further description and characterization of suitable organosilica materials for use as catalyst supports can be found in "CO-FILED CASES" which are defined to be: 1) USSN 14/966,001; filed December 11, 2015; 2) USSN 14/965,992; filed
5 December 11, 2015; 3) USSN 14/965,984; filed December 11, 2015; 4) USSN 14/966,383; filed December 11, 2015; 5) USSN 14/966,015; filed December 11, 2015; 6) USSN 14/966,284; filed December 11, 2015, which are incorporated herein by reference in their entireties.

X-Ray Diffraction Peaks

The organosilica material supports described herein can exhibit powder X-ray diffraction
10 patterns with one broad peak between about 1 and about 4 degrees 2θ , particularly one peak between about 1 and about 3 degrees 2θ , or particularly one peak between about 1 and about 2 degrees 2θ . The organosilica materials can exhibit substantially no peaks in the range of about 0.5 to about 10 degrees 2θ , or about 0.5 to about 70 degrees 2θ , or about 2 to about 10 degrees
15 2θ , or about 2 to about 70 degrees 2θ , or about 3 to about 10 degrees 2θ , or about 3 to about 70 degrees 2θ .

Silanol Content

The organosilica material supports can have a silanol content that varies within wide limits, depending on the composition of the synthesis solution. The silanol content can conveniently be determined by solid state silicon NMR, more specifically by using solid state
20 ^{29}Si or ^1H NMR.

In various aspects, the organosilica material supports can have a silanol content of greater than about 5%. In certain embodiments, the silanol content can be greater than about 30% or greater than about 41%. The organosilica material supports may have a silanol content of about 5% to about 80%, or about 5% to about 50%, or about 5% to about 25%, or about 5% to about
25 10%, or about 10% to about 50%, or about 10% to about 20%, or about 20% to about 30%, or about 30% to about 50%.

Pore Size

The organosilica material supports described herein are advantageously in a mesoporous form. As indicated previously, the term mesoporous refers to solid materials having pores with a
30 diameter within the range of from greater than or equal to about 2 nm to less than or equal to about 50 nm. The average pore diameter of the organosilica material can be determined, for

example, using nitrogen adsorption-desorption isotherm techniques within the expertise of one of skill in the art, such as the BET (Brunauer Emmet Teller) method. Pore size can be measured by the Brunauer-Emmett-Teller (BET) method using adsorption-desorption of nitrogen (temperature of liquid nitrogen, 77 K) with a Micromeritics Tristar II 3020 instrument after degassing of the powders for 4 hrs. at 350°C. Typically, the samples are pre-treated with 120°C/vacuum/4hours before the BET analysis is conducted. More information regarding the method can be found, for example, in S. Lowell et al., "Characterization of Porous Solids and Powders: Surface Area, Pore Size and Density," Springer (2004).

The organosilica material supports can have an average pore diameter of about 0.2 nm to less than about 2.0 nm in certain variations. The organosilica material supports can advantageously have an average pore diameter within the mesopore range of about 2.0 nm to about 50 nm. The organosilica material supports can have an average pore diameter of 0.2 nm to about 50 nm, or about 1.0 nm to about 50 nm, or in the mesopore range of about 2.0 nm to about 50 nm, about 2.0 nm to about 40 nm, about 2.0 nm to about 30 nm, about 2.0 nm to about 20 nm, about 2.0 nm to about 10 nm, about 2.0 nm to about 5.0 nm, and about 2.0 nm to about 4.0 nm.

Using surfactant as a template to synthesize mesoporous materials can create highly ordered structure, *e.g.* well-defined cylindrical-like pore channels. In some circumstances, there may be no hysteresis loop observed from N₂ adsorption isotherm. In other circumstances, for instance where mesoporous materials can have less ordered pore structures, a hysteresis loop may be observed from N₂ adsorption isotherm experiments. In such circumstances, without being bound by theory, the hysteresis can result from the lack of regularity in the pore shapes/sizes and/or from bottleneck constrictions in such irregular pores.

Surface Area

The surface area of the organosilica material supports can be determined, for example, using nitrogen adsorption-desorption isotherm techniques within the expertise of one of skill in the art, such as the BET (Brunauer Emmet Teller) method. This method may determine a total surface area, an external surface area, and a microporous surface area. As used herein, and unless otherwise specified, "total surface area" refers to the total surface area as determined by the BET method. As used herein, and unless otherwise specified, "microporous surface area" refers to microporous surface area as determined by the BET method. Surface area determined by the BET method uses adsorption-desorption of nitrogen (temperature of liquid nitrogen, 77 K)

with a Micromeritics Tristar II 3020 instrument after degassing of the powders for 4 hrs. at 350°C. Typically, the samples are pre-treated with 120°C/vacuum/4hours before the BET analysis is conducted. More information regarding the method can be found, for example, in S. Lowell et al., "Characterization of Porous Solids and Powders: Surface Area, Pore Size and Density," Springer (2004).

In various embodiments, the organosilica material supports can have a total (*e.g.*, BET) surface area greater than or equal to 2 m²/g to less than or equal to about 2,500 m²/g, about 50 m²/g to about 2,500 m²/g, about 100 m²/g to about 2,500 m²/g, about 200 m²/g to about 2,500 m²/g, about 300 m²/g to about 2,500 m²/g, or about 400 m²/g to about 2,500 m²/g.

Pore Volume

The pore volume of the organosilica material supports described herein can be determined, for example, using nitrogen adsorption-desorption isotherm techniques within the expertise of one of skill in the art, such as the total (Brunauer Emmet Teller) method described above. The organosilica material supports can have a pore volume of about 0.1 cm³/g to about 10.0 cm³/g, about 0.1 cm³/g to about 5.0 cm³/g, about 0.1 cm³/g to about 2.0 cm³/g, about 0.1 cm³/g to about 1.0 cm³/g, or about 0.1 cm³/g to about 0.5 cm³/g.

In a particular embodiment, the organosilica material supports can have a pore volume of about 0.1 cm³/g to about 5.0 cm³/g, particularly about 0.1 cm³/g to about 3.0 cm³/g, particularly about 0.2 cm³/g to about 2.5 cm³/g, or particularly about 0.2 cm³/g to about 1.5 cm³/g.

Particle Size

The organosilica material supports can have an average particle size in the range of from greater than or equal to about 5 µm to about 500 µm. Average particle size, also referred to as "particle size," or "particle diameter" is determined using a Mastersizer™ 3000 (range of 1 to 3500 µm) available from Malvern Instruments, Ltd. Worcestershire, England. Particle size distribution via laser sizing can also be a method of measuring ranges of average particles sizes and particle dispersion.

Dried Particles

The organosilica material support material may be dry, that is, free of absorbed water. Drying of the organosilica material can be effected by heating or calcining at a range of greater than or equal to about 100°C to less than or equal to about 1000°C for a time of about 1 minute to about 100 hours. The calcined material preferably has at least some reactive oxygen

containing groups, such as hydroxyl (OH) groups.

In another particular embodiment, an organosilica material as described herein i) has an X Ray Diffraction Spectrum exhibiting substantially no peaks above 4 degrees 2θ ; and/or ii) is made using substantially no added structure directing agent or porogen.

5 Methods of Making Organosilica Material Supports

In another embodiment, methods of producing the organosilica material supports described herein are provided. The method comprises:

providing an aqueous mixture that contains essentially no structure directing agent and/or porogen;

10 adding at least one compound of Formula $[R^3R^4SiCH_2]_3$ (Ia) into the aqueous mixture to form a solution, wherein R^3 can be a C_1 - C_4 alkoxy group and R^4 can be a C_1 - C_4 alkoxy group or a C_1 - C_4 alkyl group;

aging the solution to produce a pre-product (for example, a gel); and

drying the pre-product to obtain an organosilica material which is a polymer comprising
15 at least one monomer of Formula (I) as described herein.

Aqueous Mixture

The organosilica material supports described herein may be made using essentially no structure directing agent or porogen. Thus, the aqueous mixture contains essentially no added structure directing agent and/or no added porogen.

20 As used herein, “no added structure directing agent,” and “no added porogen” means either (i) there is no component present in the synthesis of the organosilica material that aids in and/or guides the polymerization and/or polycondensing and/or organization of the building blocks that form the framework of the organosilica material; or (ii) such component is present in the synthesis of the organosilica material in a minor, or a non-substantial, or a negligible amount
25 such that the component cannot be said to aid in and/or guide the polymerization and/or polycondensing and/or organization of the building blocks that form the framework of the organosilica material. Further, “no added structure directing agent” is synonymous with “no added template” and “no added templating agent.”

Structure Directing Agent

30 Examples of a structure directing agent can include, but are not limited to, non-ionic surfactants (*e.g.*, nonionic polyoxyethylene alkyl ethers), ionic surfactants, cationic surfactants,

silicon surfactants, amphoteric surfactants, polyalkylene oxide surfactants, fluorosurfactants, colloidal crystals, polymers, hyper branched molecules, star-shaped molecules, macromolecules, dendrimers, and combinations thereof. The surface directing agent can comprise or be a poloxamer (*e.g.*, block copolymers of ethylene oxide and propylene oxide), a triblock polymer, a tetraalkylammonium salt, a nonionic polyoxyethylene alkyl, a Gemini surfactant, or a mixture thereof. Examples of a tetraalkylammonium salt can include, but are not limited to, cetyltrimethylammonium halides, such as cetyltrimethylammonium chloride (CTAC), cetyltrimethylammonium bromide (CTAB), and octadecyltrimethylammonium chloride. Other exemplary surface directing agents can additionally or alternatively include hexadecyltrimethylammonium chloride and/or cetylpyridinium bromide.

Porogen

A porogen material is capable of forming domains, discrete regions, voids and/or pores in the organosilica material. An example of a porogen is a block copolymer (*e.g.*, a di-block polymer). As used herein, porogen does not include water. Examples of polymer porogens can include, but are not limited to, polyvinyl aromatics, such as polystyrenes, polyvinylpyridines, hydrogenated polyvinyl aromatics, polyacrylonitriles, polyalkylene oxides, such as polyethylene oxides and polypropylene oxides, polyethylenes, polylactic acids, polysiloxanes, polycaprolactones, polycaprolactams, polyurethanes, polymethacrylates, such as polymethylmethacrylate or polymethacrylic acid, polyacrylates, such as polymethylacrylate and polyacrylic acid, polydienes such as polybutadienes and polyisoprenes, polyvinyl chlorides, polyacetals, and amine-capped alkylene oxides, as well as combinations thereof.

Each porogens can be thermoplastic homopolymers and random (as opposed to block) copolymers. The porogen can be a solvent. As noted above, further examples of various surface directing agents and porogens are included in CO-FILED CASES, as defined above.

Base/Acid

In various embodiments, the aqueous mixture used in methods provided herein can comprise a base and/or an acid. In certain embodiments where the aqueous mixture comprises a base, the aqueous mixture can have a pH from about 8 to about 15, from about 8 to about 14, from about 9 to about 14, from about 10 to about 14, from about 10 to about 13, or from about 11 to about 13.

In a particular embodiment comprising a base, the pH can be from about 9 to about 15 or

from about 9 to about 14. Exemplary bases can include, but are not limited to, sodium hydroxide, potassium hydroxide, lithium hydroxide, pyridine, pyrrole, piperazine, pyrrolidine, piperidine, picoline, monoethanolamine, diethanolamine, dimethylmonoethanolamine, monomethyldiethanolamine, triethanolamine, diazabicyclooctane, diazabicyclononane, diazabicycloundecene, tetramethylammonium hydroxide, tetraethylammonium hydroxide, tetrapropylammonium hydroxide, tetrabutylammonium hydroxide, ammonia, ammonium hydroxide, methylamine, ethylamine, propylamine, butylamine, pentylamine, hexylamine, octylamine, nonylamine, decylamine, N,N-dimethylamine, N,N-diethylamine, N,N-dipropylamine, N,N-dibutylamine, trimethylamine, triethylamine, tripropylamine, tributylamine, cyclohexylamine, trimethylimidine, 1-amino-3-methylbutane, dimethylglycine, 3-amino-3-methylamine, and the like. These bases may be used either singly or in combination. In a particular embodiment, the base can comprise or be sodium hydroxide and/or ammonium hydroxide.

In certain embodiments where the aqueous mixture comprises an acid, the aqueous mixture can have a pH from about 0.01 to about 6.0, about 0.2 to about 5.0, from about 0.5 to about 4.0, from about 1.0 to about 4, or from about 2 to about 4. In a particular embodiment comprising an acid, the pH can be from about 0.01 to about 6.0, about 0.2 to about 6.0, about 0.2 to about 5.0 or about 0.2 to about 4.5.

Exemplary acids can include, but are not limited to, inorganic acids such as hydrochloric acid, nitric acid, sulfuric acid, hydrofluoric acid, phosphoric acid, boric acid and oxalic acid; and organic acids such as acetic acid, propionic acid, butanoic acid, pentanoic acid, hexanoic acid, heptanoic acid, octanoic acid, nonanoic acid, decanoic acid, oxalic acid, maleic acid, methylmalonic acid, adipic acid, sebacic acid, gallic acid, butyric acid, mellitic acid, arachidonic acid, shikimic acid, 2-ethylhexanoic acid, oleic acid, stearic acid, linoleic acid, linolenic acid, salicylic acid, benzoic acid, p-amino-benzoic acid, p-toluenesulfonic acid, benzenesulfonic acid, monochloroacetic acid, dichloroacetic acid, trichloroacetic acid, trifluoroacetic acid, formic acid, malonic acid, sulfonic acid, phthalic acid, fumaric acid, citric acid, tartaric acid, succinic acid, itaconic acid, mesaconic acid, citraconic acid, malic acid, a hydrolysate of glutaric acid, a hydrolysate of maleic anhydride, a hydrolysate of phthalic anhydride, and the like. These acids may be used either singly or in combination. In a particular embodiment, the acid can comprise or be hydrochloric acid.

In various aspects, adjusting the pH of the aqueous mixture can affect the total surface area, microporous surface area and pore volume of the organosilica material support made. Thus, the porosity of the organosilica material may be adjusted by adjusting the pH of the aqueous mixture.

For example, when the aqueous mixture is basic and has a pH between about 8 to about 14, in particular about 9 to about 14, the organosilica material support made may have one or more of the following characteristics: a) a total surface area of about 200 m²/g to about 1800 m²/g, particularly about 300 m²/g to about 1700 m²/g, and particularly about 400 m²/g to about 1700 m²/g; b) a microporous surface area of about 0 m²/g to about 700 m²/g, and particularly about 0 m²/g to about 700 m²/g; and c) a pore volume of about 0.2 cm³/g to about 3 cm³/g, and particularly of about 0.8 cm³/g to about 1.4 cm³/g.

When the aqueous mixture is acidic and has a pH between about 0.1 to about 7, particularly about 0.1 to about 5, particularly about 0.1 to about 4.5, the organosilica material made may have one or more of the following characteristics: a) a total surface area of about 100 m²/g to about 1500 m²/g, particularly about 100 m²/g to about 900 m²/g, and particularly about 200 m²/g to about 900 m²/g; b) a microporous surface area of about 100 m²/g to about 600 m²/g, and particularly about 0 m²/g to about 500 m²/g; and c) a pore volume of about 0.1 cm³/g to about 1.2 cm³/g, and particularly of about 0.1 cm³/g to about 0.6 cm³/g.

Thus, the total surface area of an organosilica material support made with a basic aqueous mixture may increase when compared to an organosilica material made with an acidic aqueous mixture. Further, the pore volume of an organosilica material support made with a basic aqueous mixture may increase when compared to an organosilica material made with an acidic aqueous mixture. However, the microporous surface area of an organosilica material support made with a basic aqueous mixture may decrease when compared to an organosilica material made with an acidic aqueous mixture.

Compounds of Formula Ia

The methods provided herein comprise the step of adding at least one compound of Formula [R³R⁴SiCH₂]₃ (Ia) into the aqueous mixture to form a solution to obtain an organosilica material support which is a homopolymer or copolymer comprising at least one unit of Formula (I), wherein R³ can be a C₁-C₄ alkoxy group and R⁴ can be a C₁-C₄ alkoxy group or a C₁-C₄ alkyl group.

In one embodiment, R^3 can comprise a C_1 - C_3 alkoxy or methoxy or ethoxy. Each R^3 can be a C_1 - C_2 alkoxy group and R^4 can be a C_1 - C_2 alkoxy group or a C_1 - C_2 alkyl group. Each R^3 can be methoxy or ethoxy and R^4 can be methyl or ethyl.

Each R^4 can comprise a C_1 - C_4 alkoxy, a C_1 - C_3 alkoxy or methoxy or ethoxy. Each R^4 can comprise methyl, ethyl or propyl, such as a methyl or ethyl.

In a particular embodiment, R^3 and R^4 can be ethoxy, such that the compound corresponding to Formula (Ia) can be 1,1,3,3,5,5-hexaethoxy-1,3,5-trisilacyclohexane, $[(EtO)_2SiCH_2]_3$. In a particular embodiment, R^3 can be ethoxy and R^4 can be methyl, such that compound corresponding to Formula (Ia) can be 1,3,5-trimethyl-1,3,5-triethoxy-1,3,5-trisilacyclohexane, $[EtOCH_3SiCH_2]_3$.

Compounds of Formula IIa

In additional embodiments, the methods provided herein can further comprise adding to the aqueous solution a compound of Formula $R^5OR^6R^7R^8Si$ (IIa) to obtain an organosilica material support which is a copolymer comprising at least one unit of Formula (I), at least one unit of Formula (II) and optionally at least one unit of Formulas (III)-(VI) as described herein. R^5 of Formula (IIa) can be a C_1 - C_6 alkyl group, and R^6 , R^7 and R^8 each independently can be selected from the group consisting of a C_1 - C_6 alkyl group, a C_1 - C_6 alkoxy group, a nitrogen-containing C_1 - C_{10} alkyl group, a nitrogen-containing heteroaralkyl group, and a nitrogen-containing optionally substituted heterocycloalkyl group.

In other particular embodiments, compounds corresponding to Formula (IIa) can be tetraethyl orthosilicate (TEOS) $((EtO)_4Si)$, methyltriethoxysilane (MTES) $((EtO)_3CH_3Si)$, (3-aminopropyl)triethoxysilane $(H_2N(CH_2)_3(EtO)_3Si)$, (N,N-dimethylaminopropyl)trimethoxysilane $(((CH_3)_2N(CH_2)_3)(MeO)_3Si)$, (N-(2-aminoethyl)-3-aminopropyltriethoxysilane $((H_2N(CH_2)_2NH(CH_2)_3)(EtO)_2Si)$, 4-methyl-1-(3-triethoxysilylpropyl)-piperazine, 4-(2-(triethoxysilyl)ethyl)pyridine, and/or 1-(3-(triethoxysilyl)propyl)-4,5-dihydro-1H-imidazole.

In another particular embodiment, a compound of Formula (Ia) can be 1,1,3,3,5,5-hexaethoxy-1,3,5-trisilacyclohexane $[(EtO)_2SiCH_2]_3$ can be combined with any of the compounds of Formula (IIa) described above. In certain other embodiments, these compounds can be further combined with a trivalent metal oxide source, such as aluminum tri-sec-butoxide.

Compounds of Formula IIIa

In additional embodiments, the methods provided herein can further comprise adding to

the aqueous solution a compound of Formula $Z^{17}Z^{18}Z^{19}\text{Si-R}^9\text{-Si } Z^{17}Z^{18}Z^{19}$ (IIIa) to obtain an organosilica material support which is a copolymer comprising at least one unit Formula (I) as described herein, at least one unit Formula (III) as described herein, and optionally at least one unit of Formulas (II) or (IV)-(VI) as described herein. In Formula (IIIa), each Z^{17} can independently be a $\text{C}_1\text{-C}_4$ alkoxy group; each Z^{18} and Z^{19} independently can be a $\text{C}_1\text{-C}_4$ alkoxy group or a $\text{C}_1\text{-C}_4$ alkyl group; and R^9 can be selected from the group consisting a $\text{C}_1\text{-C}_8$ alkylene group, a $\text{C}_2\text{-C}_8$ alkenylene group, a $\text{C}_2\text{-C}_8$ alkynylene group, a nitrogen-containing $\text{C}_2\text{-C}_{10}$ alkylene group, an optionally substituted $\text{C}_6\text{-C}_{20}$ aralkyl group, and an optionally substituted $\text{C}_4\text{-C}_{20}$ heterocycloalkyl group.

In other particular embodiments, compounds corresponding to Formula (IIIa) can be 1,2-bis(methyldiethoxysilyl)ethane $(\text{CH}_3(\text{EtO})_2\text{Si-CH}_2\text{CH}_2\text{-Si}(\text{EtO})_2\text{CH}_3)$, 1,2-bis(triethoxysilyl)ethylene $((\text{EtO})_3\text{Si-HC=CH-Si}(\text{EtO})_3)$, N,N'-bis[(3-trimethoxysilyl)propyl]ethylenediamine, and/or bis[(methyldiethoxysilyl)propyl]amine, bis[(methyldimethoxysilyl)propyl]-N-methylamine.

In a particular embodiment, compounds corresponding to Formula In another particular embodiment, a compound of Formula (Ia) can be 1,1,3,3,5,5-hexaethoxy-1,3,5-trisilacyclohexane $[(\text{EtO})_2\text{SiCH}_2]_3$ can be combined with any of the compounds of Formula (IIIa) described above. In certain other embodiments, these compounds can be further combined with a trivalent metal oxide source, such as aluminum tri-sec-butoxide.

Compounds of Formula IVa

In additional embodiments, the methods provided herein can comprise adding to the aqueous solution a source of a trivalent metal oxide to obtain an organosilica material support which is a copolymer comprising at least one unit Formula (I) as described herein, at least one unit Formula (IV) as described herein, and optionally at least one unit of Formulas (II), (III), (V) or (VI) as described herein.

In various aspects, the source of trivalent metal oxide may be a compound of formula $\text{M}^3(\text{OZ}^{20})_3$ (IVa), wherein M^3 can be a Group 13 metal and Z^{20} can be a $\text{C}_1\text{-C}_6$ alkyl group. In one embodiment, M^3 can be B, Al, Ga, In, Il, or Uut. In particular, M^3 can be Al or B. Each Z^{20} can be a $\text{C}_1\text{-C}_6$ alkyl group, a $\text{C}_1\text{-C}_5$ alkyl group, a $\text{C}_1\text{-C}_4$ alkyl group, a $\text{C}_1\text{-C}_3$ alkyl group, a $\text{C}_1\text{-C}_2$ alkyl group or methyl. In particular, Z^{15} can be methyl, ethyl, propyl or butyl.

In other particular embodiments, compounds corresponding to Formula (IVa) can be

aluminum trimethoxide, aluminum triethoxide, aluminum isopropoxide and/or aluminum tri-sec-butoxide.

Each sources of trivalent metal oxides can include, but are not limited to, corresponding salts, alkoxides, oxides, and/or hydroxides of the trivalent metal, *e.g.*, aluminum sulphate, aluminum nitrate, colloidal alumina, aluminum trihydroxide, hydroxylated alumina, Al_2O_3 , aluminum halides (*e.g.*, AlCl_3), NaAlO_2 , boron nitride, B_2O_3 and/or H_3BO_3 . The source of a trivalent metal oxide may be a source of a compound of Formula (IV).

Compounds of Formula Va


In yet other additional embodiments, the methods provided herein can comprise adding to the aqueous solution another source of a trivalent metal oxide to obtain an organosilica material support which is a copolymer comprising at least one unit Formula (I) as described herein, at least one unit Formula (V) as described herein, and optionally at least one unit of Formulas (II), (III), (IV) or (VI) as described herein.

The source of trivalent metal oxide may be a compound of Formula $(\text{Z}^{21}\text{O})_2\text{M}^5\text{-O-Si}(\text{OZ}^{22})_3$ (Va), wherein M^5 can be a Group 13 metal and Z^{21} and Z^{22} each independently can be a $\text{C}_1\text{-C}_6$ alkyl group. In one embodiment, M^2 can be B, Al, Ga, In, Il, or Uut. In particular, M^5 can be Al or B. Each Z^{21} and Z^{22} each independently can be a $\text{C}_1\text{-C}_6$ alkyl group, a $\text{C}_1\text{-C}_5$ alkyl group, a $\text{C}_1\text{-C}_4$ alkyl group, a $\text{C}_1\text{-C}_3$ alkyl group, a $\text{C}_1\text{-C}_2$ alkyl group or methyl. In particular, Z^{21} and Z^{22} each independently can be methyl, ethyl, propyl or butyl.

As noted above, sources of trivalent metal oxides can include, but are not limited to, corresponding salts, alkoxides, oxides, and/or hydroxides of the trivalent metal, *e.g.*, aluminum sulphate, aluminum nitrate, colloidal alumina, aluminum trihydroxide, hydroxylated alumina, Al_2O_3 , aluminum halides (*e.g.*, AlCl_3), NaAlO_2 , boron nitride, B_2O_3 and/or H_3BO_3 . The source of a trivalent metal oxide may be a source of a compound of Formula (Va).

Compounds of Formula VIa

The methods provided herein comprise the step of adding at least one cyclic compound of Formula

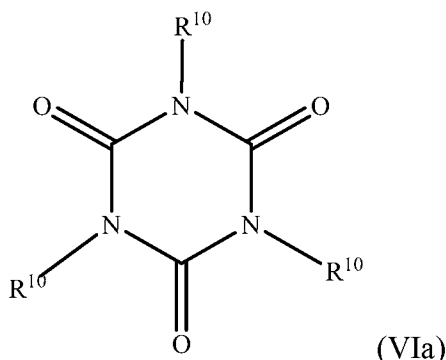

into the aqueous mixture to form a solution to obtain an organosilica material support which is a copolymer comprising at least one unit Formula (I) as described herein, at least one unit Formula (VI) as described herein, and optionally at least one unit of Formulas (II)–(V) as described
 5 herein, wherein each R^{10} independently can be a $X^1OX^2X^3SiX^4$ group, wherein each X^1 can independently be a C_1 – C_4 alkyl group; each X^2 and X^3 independently can be a C_1 – C_4 alkyl group or a C_1 – C_4 alkoxy group; and each X^4 can be a C_1 – C_8 alkylene group bonded to a nitrogen atom of the cyclic compound.

In another particular embodiment, a compound of Formula (IIa) can be tetraethyl
 10 orthosilicate (TEOS) $((EtO)_4Si)$ and a compound of Formula (VIa) can be tris(3-trimethoxysilylpropyl)isocyanurate.

In another particular embodiment, a compound of Formula (Ia) can be 1,1,3,3,5,5-hexaethoxy-1,3,5-trisilacyclohexane, $([(EtO)_2SiCH_2]_3)$ and a compound of Formula (VIa) can be tris(3-trimethoxysilylpropyl)isocyanurate.

15 Metal Chelate Sources

In additional embodiments, the methods provided herein can further comprise adding to the aqueous solution a source of metal chelate compounds. Examples of metal chelate compounds, are disclosed in USSN 14/966,001; filed December 11, 2015. Of these, the chelate compounds of titanium or aluminum can be of note, of which the chelate compounds of titanium
 20 can be particularly of note. These metal chelate compounds may be used either singly or in combination.

Molar Ratio

In the methods described herein, in certain variations, where a plurality of monomers is selected to form the organosilica support polymer, molar ratios of Formula (Ia): Formula (Ia),
 25 Formula (Ia): Formula (IIa), Formula (Ia): Formula (IIIa) Formula (Ia): Formula (IVa), Formula

(Ia): Formula (Va), or Formula (Ia): Formula (VIa) may optionally be about 99:1 to about 1:99, about 75:1 to about 1:75, about 50:1 to about 1:50, about 25:1 to about 1:25, about 15:1 to about 1:15, or about 10:1 to about 1:10. For example, a molar ratio of Formula (Ia): Formula (Ia) can be about 3:2. A molar ratio of Formula (Ia): Formula (II) can be about 2:3, about 4:3, about 4:1 or about 3:2. A molar ratio of Formula (Ia): Formula (III) can be about 2:3, and about 4:1. A molar ratio of Formula (III): Formula (II) can be about 5:2, about 1:1, about 1:2 or about 2:3. A molar ratio of Formula (Ia): Formula (IV), Formula (Ia): Formula (V), or Formula (Ia): Formula (VI) can be about 15:1 or about 5:1.

Aging the Solution

The solution formed in the methods described herein can be aged for at least about 4 hours. The solution formed in the methods described herein can be aged for about 4 hours to about 144 hours (6 days), or about 96 hours (4 days) to about 120 hours (5 days), or about 120 hours (5 days) to about 144 hours (6 days). The solution formed in the method can be aged at temperature of about 10°C to about 300°C, about 50°C to about 300°C, about 100°C to about 300°C, 130°C to about 250°C, about 130°C to about 200°C, about 130°C to about 150°C, or about 130°C to about 140°C. In various aspects, adjusting the aging time and/or aging temperature of the solution formed in the methods described herein can affect the total surface area, microporous surface area, pore volume, pore radius and pore diameter of the organosilica material made. Thus, the porosity of the organosilica material may be adjusted by adjusting aging time and/or temperature.

For example, when the solution is aged for about 1 hour to about 7 hours (*e.g.*, 1, 2, 3, 4, 5, 6 hours) at a temperature of about 80°C to about 100°C (*e.g.*, 80°C, 85°C, 90°C, 95°C, etc.), the organosilica material support may have one or more of the following: a) a total surface area of about 200 m²/g to about 1400 m²/g, particularly about 400 m²/g to about 1300 m²/g, and particularly about 400 m²/g to about 1200 m²/g; b) a microporous surface area of about 200 m²/g to about 600 m²/g, particularly about 200 m²/g to about 500 m²/g; c) a pore volume of about 0.2 cm³/g to about 1.0 cm³/g, particularly about 0.2 cm³/g to about 0.8 cm³/g; and d) an average pore radius of about 0.5 nm to about 2.0 nm, particularly about 0.5 nm to about 2.0 nm, and particularly about 1.0 nm to about 1.5 nm.

When the solution is aged for greater than about 7 hours to about 150 hours (*e.g.*, 23, 48, 72, 144 hours) at a temperature of about 80°C to about 100°C (*e.g.*, 80°C, 85°C, 90°C, 95°C,

etc.), the organosilica material support may have one or more of the following: a) a total surface area of about 600 m²/g to about 1400 m²/g, particularly about 800 m²/g to about 1400 m²/g, and particularly about 800 m²/g to about 1200 m²/g; b) substantially no microporous surface area; c) a pore volume of about 0.8 cm³/g to about 1.4 cm³/g, particularly about 0.9 cm³/g to about 1.4 cm³/g; and d) an average pore radius of about 1.0 nm to about 4.0 nm, particularly about 1.0 nm to about 4.0 nm.

When the solution is aged for about 1 hour to about 7 hours (*e.g.*, 1, 2, 3, 4, 5, 6 hours) at a temperature of about 110°C to about 130°C (*e.g.*, 110°C, 115°C, 120°C, 125°C, etc.), the organosilica material support may have one or more of the following: a) a pore volume of about 1.0 cm³/g to about 1.8 cm³/g, particularly about 1.2 cm³/g to about 1.8 cm³/g, particularly about 1.4 cm³/g to about 1.7 cm³/g; and b) an average pore diameter of about 2.0 nm to about 8.0 nm, particularly 4.0 nm to about 6.0 nm.

When the solution is aged for greater than about 7 hours to about 150 hours (*e.g.*, 23, 48, 72, 144 hours) at a temperature of about 110°C to about 130°C (*e.g.*, 110°C, 115°C, 120°C, 125°C, etc.), the organosilica material support may have one or more of the following: a) a pore volume of about 1.0 cm³/g to about 1.8 cm³/g, particularly about 1.2 cm³/g to about 1.8 cm³/g; and b) an average pore diameter of about 8.0 nm to about 16.0 nm, particularly about 10.0 nm to about 16.0 nm, particularly about 10.0 nm to about 14.0 nm.

Thus, at shorter aging times (*e.g.*, 7, 6, 5, 4 hours, etc.) the surface area of an organosilica material made is microporous and mesoporous, but as aging time increase, the surface area transitions to primarily mesoporous. Further, as aging time increases, pore volume, average pore radius and average pore diameter increases. Increasing aging temperature along with aging time, accelerates the above-described surface area transition and increase in pore volume, average pore radius and average pore diameter.

Drying the Pre-Product

The methods described herein comprise drying the pre-product to produce an organosilica material support. In certain variations, the pre-product may be a gel.

In some embodiments, the pre-product (*e.g.*, gel) formed in the method can be dried at a temperature of about 50°C to about 600°C. In a particular embodiment, the pre-product (*e.g.*, gel) formed in the method can be dried at temperature from about 70°C to about 200°C.

The pre-product (*e.g.*, gel) formed in the method can be dried in a N₂ and/or air

atmosphere.

Additional Organosilica Support Processing Steps

The organosilica material support material is dry, that is, free of absorbed water. Drying of the support material can be effected by heating or calcining at about 100°C to about 1000°C, preferably at least about 600°C. When the support material is an organosilica, it is typically heated to about 200°C to about 850°C; and for a time of about 1 minute to about 100 hours, from about 12 hours to about 72 hours, or from about 24 hours to about 60 hours.

In some embodiments, as noted above, the method can further comprise calcining the organosilica material to obtain a silica material. The calcining can be performed in air or an inert gas, such as nitrogen or air enriched in nitrogen. Calcining can take place at a temperature of at least about 175°C, for example, calcining can be performed at a temperature of about 175°C to about 650°C.

The calcined support material comprising the organosilica material support may then be contacted with at least one polymerization catalyst comprising at least one metallocene compound and an activator.

Introducing Additional Catalyst Metals And Activators

In various embodiments, the organosilica material support can further comprise at least one catalyst metal incorporated within the pores of the organosilica material support, as will be described below. Exemplary catalyst metals can include, but are not limited to, a Group 6 element, a Group 8 element, a Group 9 element, a Group 10 element or a combination thereof. Exemplary Group 6 elements can include, but are not limited to, chromium, molybdenum, and/or tungsten, particularly including molybdenum and/or tungsten. Exemplary Group 8 elements can include, but are not limited to, iron, ruthenium, and/or osmium. Exemplary Group 9 elements can include, but are not limited to, cobalt, rhodium, and/or iridium, particularly including cobalt. Exemplary Group 10 elements can include, but are not limited to, nickel, palladium and/or platinum.

The catalyst metal can be incorporated into the organosilica material by any convenient method, such as by impregnation, by ion exchange, or by complexation to surface sites. The catalyst metal so incorporated may be employed to promote any one of a number of catalytic transformations commonly conducted in petroleum refining or petrochemicals production. Examples of such catalytic processes can include, but are not limited to, hydrogenation,

dehydrogenation, aromatization, aromatic saturation, hydrodesulfurization, olefin oligomerization, polymerization, hydrodenitrogenation, hydrocracking, naphtha reforming, paraffin isomerization, aromatic transalkylation, saturation of double/triple bonds, and the like, as well as combinations thereof.

Thus, in another embodiment, a catalyst material comprising the organosilica material described herein is provided. The catalyst material may optionally comprise a binder. Suitable binders, include but are not limited to silica, alumina, zirconia, titania, silica-alumina, cerium oxide, magnesium oxide, or combinations thereof. Thus, in another embodiment, a catalyst material comprising the organosilica material described herein is provided.

In some embodiments, the organosilica material can further comprise cationic metal sites incorporated into the network structure. Such cationic metal sites may be incorporated by any convenient method, such as impregnation or complexation to the surface, through an organic precursor, or by some other method. This organometallic material may be employed in a number of hydrocarbon separations conducted in petroleum refining or petrochemicals production. Examples of such compounds to be desirably separated from petrochemicals/fuels can include olefins, paraffins, aromatics, and the like.

The organosilica material can further comprise a surface metal incorporated within the pores of the organosilica material. The surface metal can be selected from a Group 1 element, a Group 2 element, a Group 13 element, and a combination thereof. When a Group 1 element is present, it can preferably comprise or be sodium and/or potassium. When a Group 2 element is present, it can include, but may not be limited to, magnesium and/or calcium. When a Group 13 element is present, it can include, but may not be limited to, boron and/or aluminum.

One or more of the Groups 1, 2, 6, 8-10 and/or 13 elements may be present on an exterior and/or interior surface of the organosilica material. For example, one or more of the Groups 1, 2 and/or 13 elements may be present in a first layer on the organosilica material and one or more of the Groups 6, 8, 9 and/or 10 elements may be present in a second layer, *e.g.*, at least partially atop the Group 1, 2 and/or 13 elements. Each only one or more Groups 6, 8, 9 and/or 10 elements may present on an exterior and/or interior surface of the organosilica material. The surface metal(s) can be incorporated into/onto the organosilica material by any convenient method, such as by impregnation, deposition, grafting, co-condensation, by ion exchange, and/or the like.

In certain embodiments, the support material, having reactive surface groups, typically hydroxyl groups, may be slurried in a non-polar solvent and the resulting slurry is contacted with a solution of a catalyst compound and optionally an activator. In certain variations, the catalyst compound comprises a metallocene compound, so that the solution comprises a metallocene compound. In some embodiments, the slurry of the support material is first contacted with the activator for a period of time in the range of from about 0.5 hours to about 24 hours, from about 2 hours to about 16 hours, or from about 4 hours to about 8 hours. The solution of the catalyst compound, *e.g.*, metallocene compound, is then contacted with the isolated support/activator. In some embodiments, the supported catalyst system is generated *in situ*. In alternate embodiments, the slurry of the support material is first contacted with the catalyst compound for a period of time in the range of from about 0.5 hours to about 24 hours, from about 2 hours to about 16 hours, or from about 4 hours to about 8 hours. The slurry of the supported metallocene compound is then contacted with the activator solution.

The mixture of the metallocene, activator and support is heated from greater than or equal to about 0°C to less than or equal to about 70°C, preferably to about 23°C to about 60°C, preferably at room temperature. Contact times typically range from about 0.5 hours to about 24 hours, from about 2 hours to about 16 hours, or from about 4 hours to about 8 hours.

Suitable non-polar solvents are materials in which the activator and the catalyst compound, *e.g.*, metallocene compound, are at least partially soluble and which are liquid at reaction temperatures. Useful non-polar solvents are alkanes, such as isopentane, hexane, n-heptane, octane, nonane, and decane, although a variety of other materials including cycloalkanes, such as cyclohexane, aromatics, such as benzene, toluene, and ethylbenzene, may also be employed.

Organosilica Material Product-By-Process

Organosilica materials can be made from the methods described herein. In another particular embodiment, organosilica materials made from an aqueous mixture as described herein that contains essentially no structure directing agent or porogen as described herein, wherein the organosilica material may be a polymer comprising at least one unit of Formula (I) as described herein. In other aspects, organosilica materials made from an aqueous mixture as described herein that contains essentially no structure directing agent or porogen as described herein, wherein the organosilica material may be a polymer comprising at least Formula (VI) as

described herein.

In yet another particular embodiment, organosilica materials made from an aqueous mixture as described herein that contains essentially no structure directing agent or porogen as described herein, wherein the organosilica material may be a copolymer of: a) at least one unit of
5 Formula (I) as described herein; b) at least one unit of Formula (II) as described herein; c) at least one unit of Formula (III) as described herein; d) at least one unit of Formula (IV) as described herein; e) at least one unit of Formula (V) as described herein; and/or f) at least Formula (VI) as described herein.

The organosilica materials made from the methods described herein may exhibit an X
10 Ray Diffraction (XRD) pattern as described herein, particularly with only one peak between about 1 and about 4 degrees 2θ . The organosilica materials may have an average pore diameter as described herein, particularly, between about 1.5 nm and about 20.0 nm.

In another particular embodiment, an organosilica material made from aqueous mixture as described herein that contains essentially no structure directing agent or porogen as described
15 herein i) has an X Ray Diffraction Spectrum exhibiting substantially no peaks above 4 degrees 2θ ; and/or ii) is made using substantially no added structure directing agent or porogen.

The organosilica materials can exhibit substantially no peaks in the range of about 0.5 to about 10 degrees 2θ , about 0.5 to about 12 degrees 2θ range, about 0.5 to about 15 degrees 2θ , about 0.5 to about 70 degrees 2θ , about 2 to about 10 degrees 2θ , about 2 to about 12 degrees 2θ
20 range, about 2 to about 15 degrees 2θ , about 2 to about 20 degrees 2θ , about 2 to about 70 degrees 2θ , about 3 to about 10 degrees 2θ , or about 3 to about 70 degrees 2θ .

In yet another variation, the organosilica material made from aqueous mixture as described herein that contains essentially no structure directing agent or porogen as described herein may have (i) an average pore diameter between about 1.5 nm and about 25.0 nm; (ii) a
25 pore volume about 0.1 cm³/g to about 10.0 cm³/g; and/or (ii) a surface area of about 200 m²/g to about 2,500 m²/g.

V. Catalyst Metals


In addition to the organosilica support described above, the catalyst system according to the present disclosure includes one or more catalyst metals or compounds. In preferred aspects,
30 the present disclosure pertains to one or more catalyst compounds for polyolefin polymerization.

A. Catalyst Compounds Having Nitrogen and Oxygen Linkages

In certain aspects, the one or more catalyst compounds may be one or more olefin polymerization catalyst compounds. The one or more catalyst compounds may be one or more catalyst compounds having one or more oxygen and nitrogen linkages to a transition metal. Thus, useful catalysts include transition metal catalyst compounds. Such catalyst compounds may be combined together or mixed with other catalyst compounds.

ONNO-Type Catalyst


Chelating dianionic [ONNO]-type amine bis(phenolate) ligands associated with transition metal complexes are suitable for use herein as catalysts. Such a catalyst may be represented by Formula (VII):

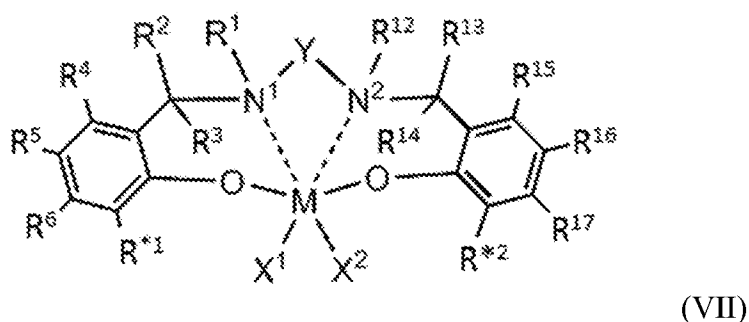

where:

- each solid line represents a covalent bond and each dashed line represents a coordinative link; wherein M is a Group 3, 4, 5, or 6 (referring to the IUPAC Periodic Table) transition metal;
- N¹ and N² are nitrogen; O is oxygen; each of X¹ and X² is, independently, a univalent C₁ to C₂₀ hydrocarbyl radical, a functional group comprising elements from Groups 13 to 17, or X¹ and X² join together to form a C₄ to C₆₂ cyclic or polycyclic ring structure, provided however when M is trivalent X² is not present; each R¹, R², R³, R⁴, R⁵, R⁶, R¹², R¹³, R¹⁴, R¹⁵, R¹⁶, and R¹⁷ is, independently, hydrogen, a C₁ to C₄₀ hydrocarbyl radical, a C₁ to C₄₀ substituted hydrocarbyl radical (such as a functional group comprising elements from Groups 13 to 17), two or more of R¹, R², R³, R⁴, R⁵, R⁶, R¹², R¹³, R¹⁴, R¹⁵, R¹⁶, and R¹⁷ independently join together to form a C₄ to C₆₂ cyclic or polycyclic ring structure, or a combination thereof; wherein R^{*1} and R^{*2} independently comprise a bulky functional group, an electron withdrawing group, or a combination thereof; and Y is a divalent C₁ to C₂₀ hydrocarbyl radical; and each solid line represents a covalent bond and each dashed line represents a coordinative link.


In an embodiment, at least one of R^{*1} and R^{*2} independently comprises a cyclopentadienyl radical having a structure according to Formula XI:


















wherein:

- 5 C^* indicates an attachment carbon of the radical; R^7 is a C_1 to C_{40} hydrocarbyl radical, a C_1 to C_{40} substituted hydrocarbyl radical (such as or a functional group comprising elements from Groups 13 to 17); and each of R^8 , R^9 , R^{10} , R^{11} is, independently, hydrogen, a C_1 to C_{40} hydrocarbyl radical, a functional group comprising elements from Groups 13 to 17, two or more of R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 , R^8 , R^9 , R^{10} , R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , and R^{17} independently join
- 10 together to form a C_4 to C_{62} cyclic or polycyclic ring structure, or a combination thereof.

In an embodiment according to the invention, each of R^{*1} and R^{*2} is selected from the group consisting of substituted or unsubstituted radicals comprising any one of the following formulae:

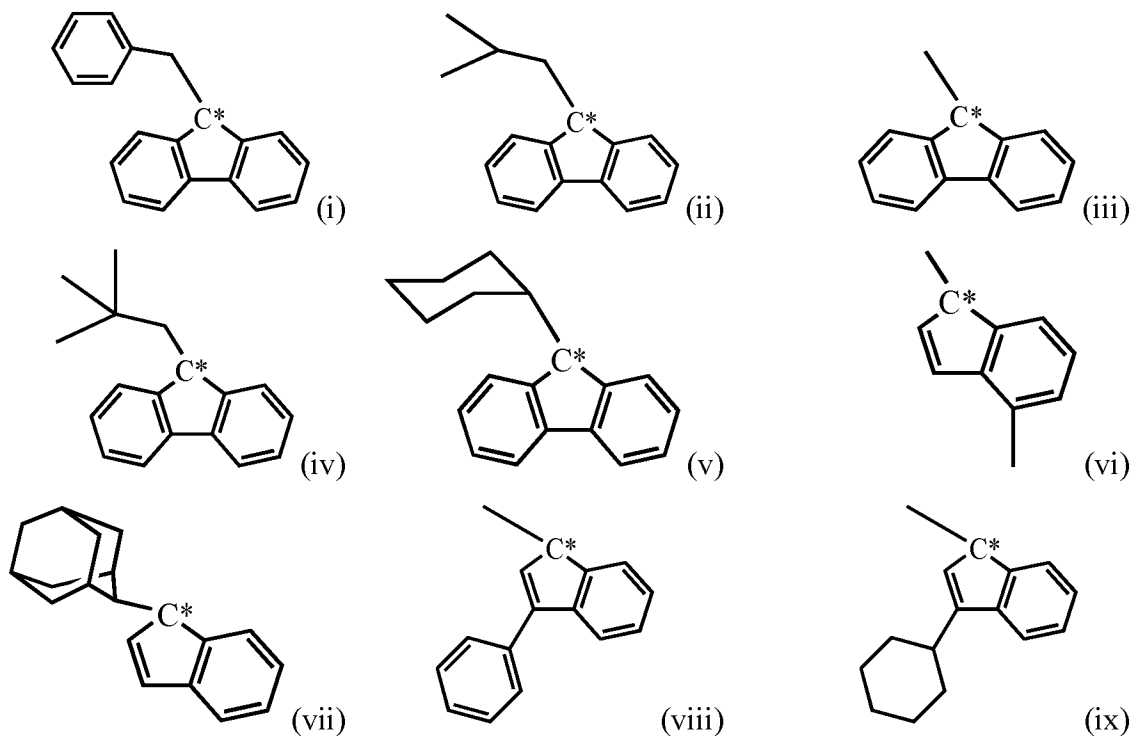




wherein:

C* is the attachment carbon of the radical and each of the possible substituents of the formulae are independently, hydrogen, a C₁ to C₄₀ hydrocarbyl radical, a functional group comprising elements from Group 13 to 17, or a combination thereof. In some embodiments according to the invention, each of R^{*1} and R^{*2} independently comprises identical radicals. In some 5 embodiments, where R^{*1} is a substituted or unsubstituted fluorenyl group, R^{*2} is also a substituted or unsubstituted fluorenyl group.

In an embodiment, the catalyst compound has a structure according to Formula:

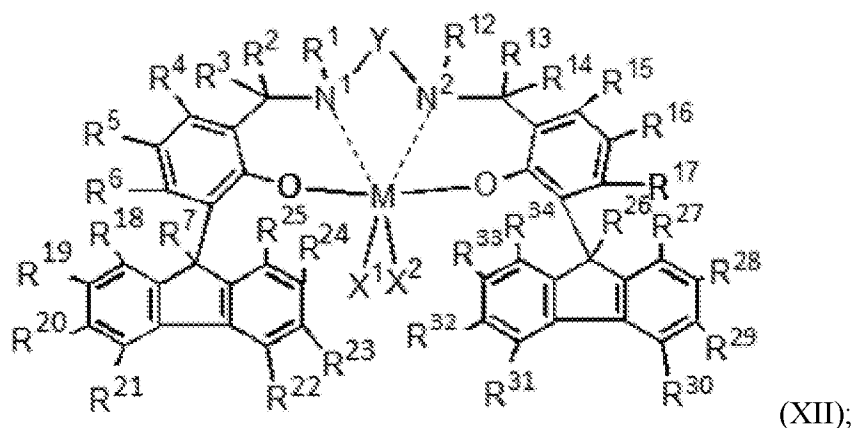

wherein:

each of R^7 and R^{26} is, independently, a C_1 to C_{40} hydrocarbyl radical, a C_1 to C_{40} substituted hydrocarbyl radical (such as or a functional group comprising elements from Groups 13 to 17). R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , R^{25} , R^{27} , R^{28} , R^{29} , R^{30} , R^{31} , R^{32} , R^{33} , and R^{34} may, independently be, hydrogen, a C_1 to C_{40} hydrocarbyl radical, a C_1 to C_{40} substituted hydrocarbyl radical (such as a functional group comprising elements from Groups 13 to 17). Two or more of R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , and R^{25} may independently join together to form a C_4 to C_{62} cyclic or polycyclic ring structure, or a combination thereof, and M , O , N^1 , N^2 , Y , X^1 , X^2 , R^1 - R^6 , and R^{12} - R^{17} are as defined in Formula (VII).

In some embodiments, at least one of R^5 and/or R^{16} of any of the compounds according to Formulas (VII)-(XII) is selected from the group consisting of C_1 to C_{10} alkyl, C_1 to C_{10} alkoxy, and C_6 to C_{15} aryl.


In some embodiments, R^7 of the catalyst compound is selected from the group consisting of C_1 to C_{10} alkyl groups, C_1 to C_{10} alkoxy groups, C_6 to C_{15} aryl groups, and combinations thereof. In some embodiments, each of R^7 and/or R^{26} of catalysts, according to Formula (XII), is selected from the group consisting of C_1 to C_{10} alkyl groups, C_1 to C_{10} alkoxy groups, C_6 to C_{15} aryl groups, and combinations thereof.

In some embodiments, each of R^5 and R^{16} is independently selected from the group consisting of methyl, ethyl, n-propyl, i-propyl, n-butyl, sec-butyl, i-butyl, t-butyl, methoxy, ethoxy, n-propoxy, i-propoxy, n-butoxy, sec-butoxy, i-butoxy, t-butoxy, phenyl, and C_1 to C_5 substituted phenyl groups. In some such embodiments, R^7 , according to Formula (XI), is independently selected from the group consisting of ethyl, n-propyl, i-propyl, n-butyl, sec-butyl,

5 i-butyl, t-butyl, phenyl and C₁ to C₅ substituted phenyl groups. In more particular such embodiments, each of R⁷ and R²⁶, according to Formula (XV), is independently selected from the group consisting of ethyl, n-propyl, i-propyl, n-butyl, sec-butyl, i-butyl, t-butyl, phenyl, and C₁ to C₅ substituted phenyl groups.

In any embodiment, the catalyst of Formulas (VII) or (XII) may have a formula where
 15 each of R¹, R², R³, R⁴, R⁶, R¹², R¹³, R¹⁴, R¹⁵, R¹⁷, is independently selected from H and C₁ to C₅ alkyl groups. In particular such embodiments, the catalyst may follow Formula (XII) wherein R¹⁸, R¹⁹, R²⁰, R²¹, R²², R²³, R²⁴, and R²⁵ are each independently selected from H and C₁ to C₅ alkyl groups. In more particular embodiments, the catalyst compounds, according to Formula (XII), R²⁷, R²⁸, R²⁹, R³⁰, R³¹, R³², R³³, and R³⁴, are each independently selected from H and C₁ to
 20 C₅ alkyl groups; particularly, wherein Y is a divalent C₁ to C₅ hydrocarbyl radical, particularly, - (CH₂CH₂)-; and, optionally, wherein at least one of X¹ and/or X² is selected from C₆ to C₁₅ aryl groups, particularly benzyl.


In some embodiments, at least one of R^{*1} and R^{*2} independently comprises a pyrrole radical having the structure according to Formula:

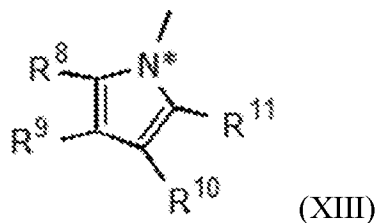

wherein:

25 N* indicates an attachment carbon of the radical; and each of R⁸, R⁹, R¹⁰, R¹¹ is, independently, a hydrogen, a C₁ to C₄₀ hydrocarbyl radical, a C₁ to C₄₀ substituted hydrocarbyl radical (such as a functional group comprising elements from Groups 13 to 17), optionally two or more of R¹, R², R³, R⁴, R⁵, R⁶, R⁸, R⁹, R¹⁰, R¹¹, R¹², R¹³, R¹⁴, R¹⁵, R¹⁶, and R¹⁷ independently join together to form a C₄ to C₆₂ cyclic or polycyclic ring structure, or a combination thereof. In particular
 30 embodiments, each of R^{*1} and R^{*2} independently comprises a pyrrole radical according to Formula (XIII).

Some catalyst compounds having features according to Formula (VII) have a structure according to Formula (XIV):

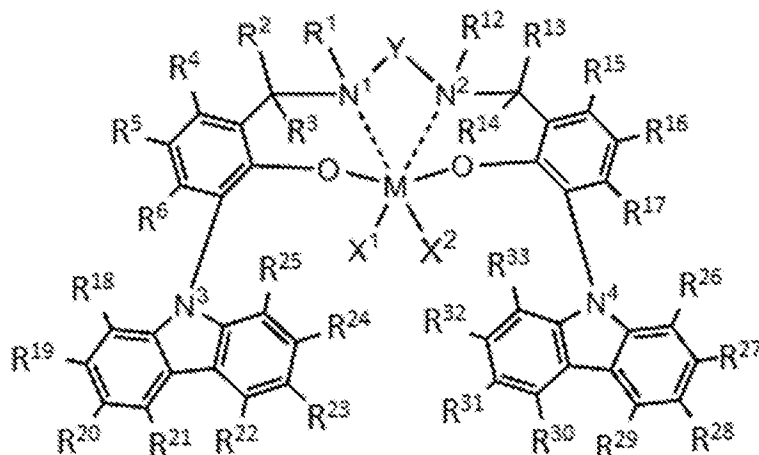

(XIV)


In particular embodiments according to Formula (XIV), N³ and N⁴ are nitrogen, each R¹⁸, R¹⁹, R²⁰, R²¹, R²², R²³, R²⁴, R²⁵, R²⁶, R²⁷, R²⁸, R²⁹, R³⁰, R³¹, R³², and R³³ is, independently, a hydrogen, a C₁ to C₄₀ hydrocarbyl radical, a C₁ to C₄₀ substituted hydrocarbyl radical (such as a functional group comprising elements from Groups 13 to 17), or two or more of R¹ to R³³ may independently join together to form a C₄ to C₆₂ cyclic or polycyclic ring structure, or a combination thereof, and M, O, N¹, N², Y, X¹, X², R¹-R⁶, and R¹²-R¹⁷ are as defined in Formula (VII). Optionally, at least one of R⁵ and/or R¹⁶ is selected from the group consisting of C₁ to C₁₀ alkyl, C₁ to C₁₀ alkoxy, and C₆ to C₁₅ aryl. In some embodiments, each of R⁵ and R¹⁶ is independently selected from the group consisting of methyl, ethyl, n-propyl, i-propyl, n-butyl, sec-butyl, i-butyl, t-butyl, methoxy, ethoxy, n-propoxy, i-propoxy, n-butoxy, sec-butoxy, i-butoxy, t-butoxy, phenyl, and C₁ to C₅ substituted phenyl groups. In some embodiments, the catalyst compounds according to Formula V may have a structure wherein each of R¹, R², R³, R⁴, R⁶, R¹², R¹³, R¹⁴, R¹⁵, R¹⁷, R¹⁸, R¹⁹, R²⁰, R²¹, R²², R²³, R²⁴, R²⁵, R²⁶, R²⁷, R²⁸, R²⁹, R³⁰, R³¹, R³², and R³³, are each independently selected from H and C₁ to C₅ alkyl groups. In some embodiments according to Formula (XIV), Y is a divalent C₁ to C₅ hydrocarbyl radical, particularly -(CH₂CH₂)-.

In other embodiments, Y is a C₁-C₄₀ divalent hydrocarbyl radical comprising O, S, S(O), S(O)₂, Si(R')₂, P(R'), N, N(R'), or a combination thereof, wherein each R' is independently a C₁ to C₁₈ hydrocarbyl radical. Additionally or alternatively, some catalysts according to Formula (XIV) have a structure wherein at least one of X¹ and/or X² is selected from the group consisting of a halogen or a C₁ to C₇ hydrocarbyl radical, and a C₆ to C₁₅ aryl group, particularly benzyl.

In particular embodiments, the catalyst, according to Formula (XIV), has a structure wherein M is Zr; X^1 and X^2 are benzyl radicals; R^1 and R^{12} are methyl radicals; R^2 , R^3 , R^4 , R^5 , R^6 , R^{13} , R^{14} , R^{15} , R^{17} , R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , and R^{25} are hydrogen; R^{16} is bromine; and Y is $-\text{CH}_2\text{CH}_2-$.

In other embodiments, the catalyst, according to Formula (XIV), has a structure wherein M is Zr; X^1 and X^2 are benzyl radicals; R^1 , R^{12} and R^{16} are methyl radicals; R^2 , R^3 , R^4 , R^5 , R^6 , R^{13} , R^{14} , R^{15} , R^{17} , R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , R^{25} , R^{26} , R^{27} , R^{28} , R^{29} , R^{30} , R^{31} , R^{32} , and R^{33} are hydrogen; and Y is $-\text{CH}_2\text{CH}_2-$.

In particular embodiments, the catalyst composition has a structure according to Formula:

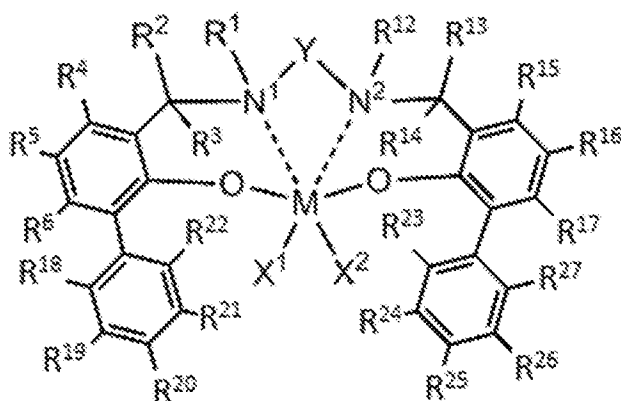

(XV).

In Formula (XV), with reference to Formula (VII), each R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , R^{25} , R^{26} , and R^{27} is, independently, a hydrogen, a C_1 to C_{40} hydrocarbyl radical, a C_1 to C_{40} substituted hydrocarbyl radical (such as a functional group comprising elements from Groups 13 to 17), or two or more of R^1 to R^{33} may independently join together to form a C_4 to C_{62} cyclic or polycyclic ring structure, or a combination thereof, and M, O, N^1 , N^2 , Y, X^1 , X^2 , R^1 - R^6 , and R^{12} - R^{17} are as defined in Formula (VII). In particular embodiments, Y is a divalent C_1 to C_5 hydrocarbyl radical, particularly $-(\text{CH}_2\text{CH}_2)-$; and wherein at least one of X^1 and/or X^2 is selected from the group consisting of a halogen or a C_1 to C_7 hydrocarbyl radical, and a C_6 to C_{15} aryl group, particularly benzyl.

Preferably, M is Hf, Ti, Zr, or mixtures thereof. In some embodiments, Hf is particularly useful. In other embodiments, Zr is particularly useful. In still other embodiments, Ti may be particularly useful.

In some embodiments, the catalyst, according to Formula (XV), has a structure wherein each of X^1 and X^2 is, independently, a halogen or a C_1 to C_7 hydrocarbyl radical. In particular embodiments, each of X^1 and X^2 is a benzyl radical.

In particular embodiments, catalysts, according to Formula (XV), have a structure wherein each of $R^1, R^2, R^3, R^4, R^5, R^6, R^7, R^8, R^9, R^{10}, R^{11}, R^{12}, R^{13}, R^{14}, R^{15}, R^{16}, R^{17}, R^{18}, R^{19}, R^{20}, R^{21}, R^{22}, R^{23}, R^{24}, R^{25}, R^{26}$, and R^{27} is, independently, hydrogen, a halogen, or a C_1 to C_{30} hydrocarbyl radical, particularly a C_1 to C_{10} hydrocarbyl radical. In some such embodiments, one or more of $R^1, R^2, R^3, R^4, R^5, R^6, R^7, R^8, R^9, R^{10}, R^{11}, R^{12}, R^{13}, R^{14}, R^{15}, R^{16}, R^{17}, R^{18}, R^{19}, R^{20}, R^{21}, R^{22}, R^{23}, R^{24}, R^{25}, R^{26}$, and R^{27} is a methyl radical, a fluoride, or a combination thereof.

Additionally or alternatively, in some embodiments, Y may be $-CH_2CH_2-$ or 1,2-cyclohexylene. In other embodiments, Y may be $-CH_2CH_2CH_2-$. In other embodiments, catalysts, according to Formula (XV), have a structure wherein Y is a C_1 to C_{40} divalent hydrocarbyl radical comprising a linker backbone comprising from 1 to 18 carbon atoms bridging between nitrogen atoms N^1 and N^2 . In some particular embodiments, Y may be a C_1 to C_{40} divalent hydrocarbyl radical comprising O, S, $S(O)$, $S(O)_2$, $Si(R')$, $P(R')$, N, $N(R')$, or a combination thereof, wherein each R' is independently a C_1 to C_{18} hydrocarbyl radical.

In some certain catalyst compounds according to Formula (XV), M is Ti; X^1 and X^2 are benzyl radicals; R^1 and R^{12} are methyl radicals; $R^2, R^3, R^4, R^6, R^{13}, R^{14}, R^{15}, R^{16}$ and R^{17} are hydrogen; $R^5, R^{16}, R^{18}, R^{19}, R^{20}, R^{21}, R^{22}, R^{23}, R^{24}, R^{25}, R^{26}$, and R^{27} are fluorine; and Y is $-CH_2CH_2-$.


In some embodiments, certain catalyst compounds according to Formula (XV) have a structure wherein M is Ti; X^1 and X^2 are benzyl radicals; R^1, R^5, R^{12} and R^{16} are methyl radicals; $R^2, R^3, R^4, R^6, R^{13}, R^{14}, R^{15}$, and R^{17} are hydrogen; $R^{18}, R^{19}, R^{20}, R^{21}, R^{22}, R^{23}, R^{24}, R^{25}, R^{26}$, and R^{27} are fluorine; and Y is $-CH_2CH_2-$.

In still other embodiments, certain catalyst compounds, according to Formula (XV), have a structure wherein M is Zr; X^1 and X^2 are benzyl radicals; R^1 and R^{12} are methyl radicals; $R^2, R^3, R^4, R^6, R^{13}, R^{14}, R^{15}$, and R^{17} are hydrogen; $R^5, R^{16}, R^{18}, R^{19}, R^{20}, R^{21}, R^{22}, R^{23}, R^{24}, R^{25}, R^{26}$, and R^{27} are fluorine; and Y is $-CH_2CH_2-$.

In still other embodiments, certain catalyst compounds, according to Formula (XV), have a structure wherein M is Zr; X^1 and X^2 are benzyl radicals; R^1, R^5, R^{16} and R^{16} are methyl

radicals; R^2 , R^3 , R^4 , R^6 , R^{12} , R^{14} , R^{15} , and R^{17} are hydrogen; R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , R^{25} , R^{26} , and R^{27} are fluorine; and Y is $-\text{CH}_2\text{CH}_2-$.

In still other embodiments, the invention relates to catalysts systems wherein the catalyst, according to Formula (VII), has a structure according to Formula:

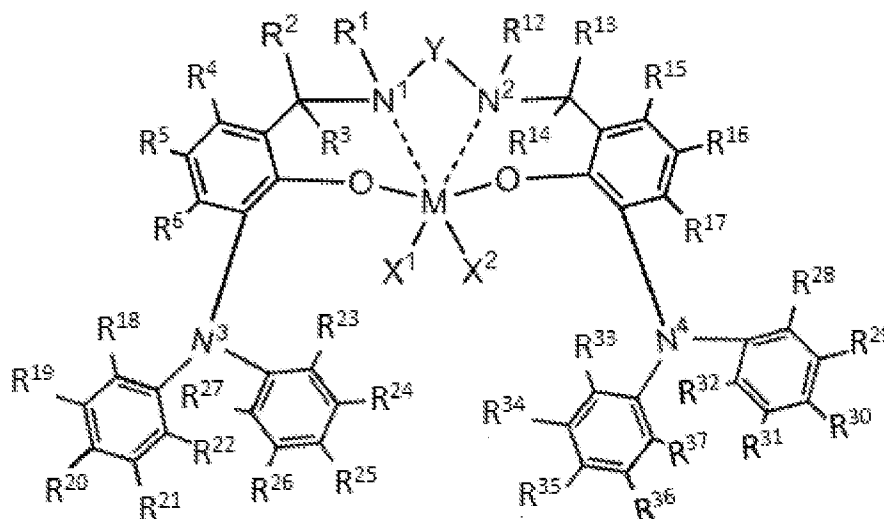

(XVI).

In Formula (XVI), M may be a Group 3, 4, 5, or 6 transition metal; N^1 , N^2 , N^3 , and N^4 are nitrogen; O is oxygen; each of X^1 and X^2 may be, independently, a univalent C_1 to C_{20} hydrocarbyl radical, a functional group comprising elements from Groups 13 to 17, or X^1 and X^2 join together to form a C_4 to C_{62} cyclic or polycyclic ring structure, provided however when M is trivalent X^2 is not present; Y is a divalent hydrocarbyl radical covalently bonded to and bridging between both of the nitrogen atoms N^1 and N^2 ; and each R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , R^{25} , R^{26} , R^{27} , R^{28} , R^{29} , R^{30} , R^{31} , R^{32} , R^{33} , R^{34} , R^{35} , R^{36} , and R^{37} , is, independently, a hydrogen, a C_1 to C_{40} hydrocarbyl radical, a C_1 to C_{40} substituted hydrocarbyl radical (such as, a functional group comprising elements from Group 13 to 17), or two or more of R^1 to R^{32} may independently join together to form a C_4 to C_{62} cyclic or polycyclic ring structure wherein neither R^{18} and R^{22} join together with R^{23} or R^{27} to form direct covalent bonds between the respective aromatic rings, and wherein neither R^{33} and R^{37} join together with R^{28} or R^{32} to form direct covalent bonds between the respective aromatic rings, or a combination thereof.

Particular embodiments may have one or more of the following features:

In particular embodiments, M may be Hf, Ti, Zr, or mixtures thereof. In particular embodiments, M is Hf. In other embodiments, M may be Zr. In still other useful embodiments, M may be Ti.

5 Additionally or alternatively, in some embodiments, each of X^1 and X^2 is, independently, a halogen or a C_1 to C_7 hydrocarbyl radical. In particular such embodiments, each of X^1 and X^2 is a benzyl radical.

10 Additionally or alternatively, in some embodiments Y may have a certain structure. Thus, in some embodiments, Y may be $-CH_2CH_2-$ or 1,2-cyclohexylene. In other embodiments, Y is $-CH_2CH_2CH_2-$. In certain embodiments, Y is a C_1 to C_{40} divalent hydrocarbyl radical comprising a linker backbone comprising from 1 to 18 carbon atoms bridging between nitrogen atoms N^1 and N^2 . In particular embodiments, Y is a C_1 to C_{40} divalent hydrocarbyl radical comprising O, S, S(O), S(O)₂, Si(R'), P(R'), N, N(R'), or a combination thereof, wherein each R' is independently a C_1 to C_{18} hydrocarbyl radical.

15 Certain catalysts, according to Formula (XVI), have a structure wherein each R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{19} , R^{20} , R^{21} , R^{24} , R^{25} , R^{26} , R^{29} , R^{30} , R^{31} , R^{34} , R^{35} , and R^{36} is, independently, a hydrogen, a C_1 to C_{40} hydrocarbyl radical, a functional group comprising elements from Groups 13 to 17, or two or more of R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{19} , R^{20} , R^{21} , R^{24} , R^{25} , R^{26} , R^{29} , R^{30} , R^{31} , R^{34} , R^{35} , and R^{36} may independently join together to form a C_4 to C_{62} cyclic or polycyclic ring structure, or a combination thereof; and each R^{18} , R^{22} , R^{23} , R^{27} , R^{28} , R^{32} , R^{33} , and R^{37} is, independently, a hydrogen, a C_1 to C_{40} hydrocarbyl radical, a functional group comprising elements from Groups 13 to 17, or a combination thereof.

25 In some embodiments, catalyst compounds, according to Formula (XV), have a structure wherein each R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , R^{25} , R^{26} , R^{27} , R^{28} , R^{29} , R^{30} , R^{31} , R^{32} , R^{33} , R^{34} , R^{35} , R^{36} , and R^{37} is, independently, hydrogen, a halogen, or a C_1 to C_{30} hydrocarbyl radical, more particularly a C_1 to C_{10} hydrocarbyl radical. In particular embodiments, the catalysts according to Formula (XVI) have a structure wherein one or more of R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , R^{25} , R^{26} , R^{27} , R^{28} , R^{29} , R^{30} , R^{31} , R^{32} , R^{33} , R^{34} , R^{35} , R^{36} , and R^{37} is a methyl radical, a fluoride, or a combination thereof.

30 In certain embodiments, catalyst compounds, according to Formula (XVI), have a structure wherein R^{22} and R^{27} join together to form a divalent C_1 to C_{20} hydrocarbyl radical, a


divalent functional group comprising elements from Groups 13 to 16, or a combination thereof, and wherein R^{32} and R^{37} join together to form a divalent C_1 to C_{20} hydrocarbyl radical, a divalent functional group comprising elements from Groups 13 to 16, or a combination thereof.

In particular embodiments, catalyst compounds, according to Formula (XVI), may have a structure wherein: M is Zr; X^1 and X^2 are benzyl radicals; R^1 and R^{12} are methyl radicals;

$R^2, R^3, R^4, R^5, R^6, R^{13}, R^{14}, R^{15}, R^{16}, R^{17}, R^{18}, R^{19}, R^{20}, R^{21}, R^{22}, R^{23}, R^{24}, R^{25}, R^{26}, R^{27}, R^{28}, R^{29}, R^{30}, R^{31}, R^{32}, R^{33}, R^{34}, R^{35}, R^{36}$, and R^{37} are hydrogen; and Y is $-CH_2CH_2-$.

In other embodiments, catalyst compounds, according to Formula VII, may have a structure wherein: M is Zr; X^1 and X^2 are benzyl radicals; R^1, R^5, R^{12} , and R^{16} are methyl radicals; $R^2, R^3, R^4, R^6, R^{13}, R^{14}, R^{15}, R^{17}$ to R^{37} are hydrogen; and Y is $-CH_2CH_2-$.

In still other embodiments, catalyst compounds, according to Formula (XVI), have a structure according to Formula:

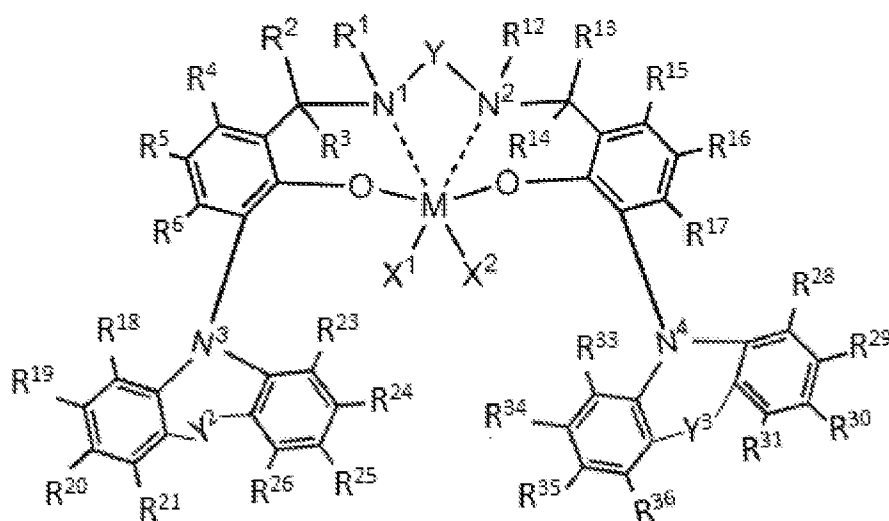

(XVII)

As described or Formula (XVI), in Formula (XVII),


O is oxygen; M may be a Group 3, 4, 5, or 6 transition metal; N^1, N^2, N^3 , and N^4 are nitrogen; each of X^1 and X^2 is, independently, a univalent C_1 to C_{20} hydrocarbyl radical, a C_1 to C_{40} substituted hydrocarbyl radical (such as, a functional group comprising elements from Groups 13 to 17), or X^1 and X^2 join together to form a C_4 to C_{62} cyclic or polycyclic ring structure, provided, however, when M is trivalent X^2 is not present; and Y is a divalent C_1 to C_{20} hydrocarbyl radical; Y^2 and Y^3 are independently a divalent C_1 to C_{20} hydrocarbyl radical, a C_1 to C_{20} substituted hydrocarbyl radical (such as a divalent functional group comprising elements

from Groups 13 to 16), or a combination thereof; and each R^1 to R^6 , R^{12} to R^{21} , R^{23} to R^{26} , R^{28} to R^{31} , and R^{33} to R^{36} is, independently, a hydrogen, a C_1 to C_{40} hydrocarbyl radical is, a C_1 to C_{40} substituted hydrocarbyl radical (such as a functional group comprising elements from Groups 13 to 17), or two or more of R^1 to R^6 , R^{12} to R^{21} , R^{23} to R^{26} , R^{28} to R^{31} , and R^{33} to R^{36} may independently join together to form a C_4 to C_{62} cyclic or polycyclic ring structure.

Such ONNO-catalyst materials are known in the art and include, but are not limited to, those disclosed in U.S. Pat. App. No. 62/236691, filed on October 20, 2015; U.S. Patent Application Nos. 61/679,488, filed August 3, 2012; 13/921,532, filed June 19, 2013; 61/679,505, filed August 3, 2012; 13/921,709, filed June 19, 2013; 61/679,527, filed August 3, 2012; 13/921,761, filed June 19, 2013; 61/722,110, filed November 2, 2012; 14/059,081, filed October 21, 2013; 61/779,435, filed March 13, 2013; 61/837,593, filed June 20, 2013; 14/076,750, filed November 11, 2013; 61/837,554, filed June 20, 2013; 14/289,075, filed May 28, 2014; 61/837,569, filed June 20, 2013; 14/298,575, filed June 6, 2014; 61/837,588, filed June 20, 2013; 14/289,186, filed May 28, 2014; 61/982,823, filed April 22, 2014; and 14/557,813 filed December 2, 2014, all incorporated herein by reference.

ONYO-Type Catalyst

Chelating dianionic [ONYO]-type amine bis(phenolate) ligands associated with transition metal complexes are suitable for use herein as catalysts. Such a catalyst compound may be represented by Formula (VIII):

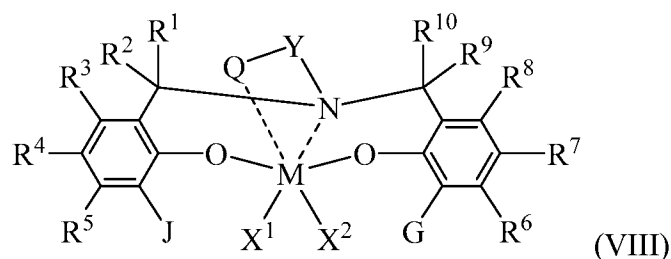


wherein:


M is a Group 4 transition metal; X^1 and X^2 are, independently, a univalent C_1 to C_{20} hydrocarbyl radical, a C_1 to C_{20} substituted hydrocarbyl radical, a heteroatom or a heteroatom-containing group, or X^1 and X^2 join together to form a C_4 to C_{62} cyclic or polycyclic ring structure; each R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 , R^8 , R^9 , and R^{10} is, independently, a hydrogen, a C_1 to C_{40} hydrocarbyl radical, a C_1 to C_{40} substituted hydrocarbyl radical, a heteroatom or a heteroatom-containing group, or two or more of R^1 to R^{10} may independently join together to

form a C₄ to C₆₂ cyclic or polycyclic ring structure, or a combination thereof; and Q is a neutral donor group; J is a C₇ to C₆₀ fused polycyclic group, which optionally comprises up to 20 atoms from Groups 15 and 16, where at least one ring is aromatic and where at least one ring, which may or may not be aromatic, has at least five members; G is as defined for J or may be hydrogen,
 5 a C₁ to C₆₀ hydrocarbyl radical, a C₁ to C₆₀ substituted hydrocarbyl radical, a heteroatom or a heteroatom-containing group, or may independently form a C₄ to C₆₀ cyclic or polycyclic ring structure with R⁶, R⁷, or R⁸ or a combination thereof; and Y is a divalent C₁ to C₂₀ hydrocarbyl or divalent C₁ to C₂₀ substituted hydrocarbyl.

In particular embodiments, the catalyst system comprises a catalyst compound
 10 represented by Formulas (XVIII) or (XIX):

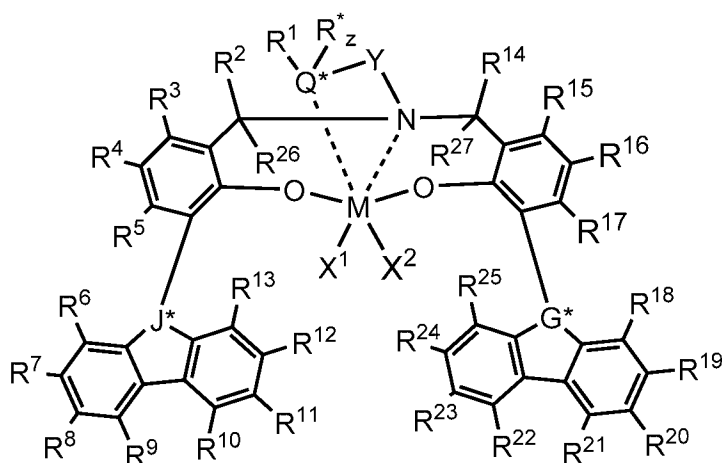

(XVIII)

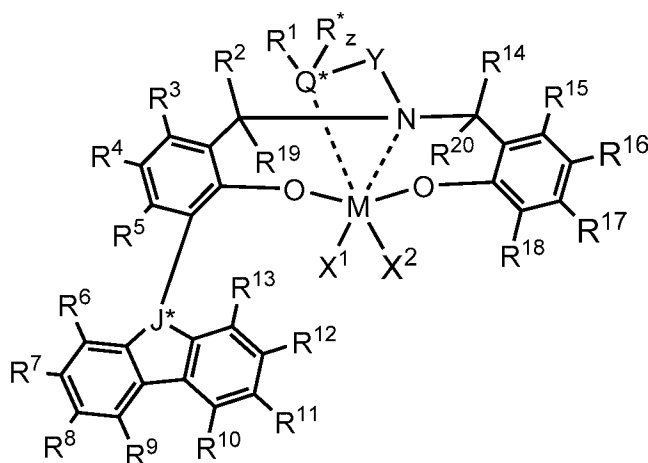

(XIX)

wherein:

M, X¹, X², R¹, R², R³, R⁴, R⁵, R⁶, R⁷, R⁸, R⁹, R¹⁰, and Y are as defined above; Q* is a
 15 group 15 or 16 atom (preferably N, O, S, or P); z is 0 or 1; J* is CRⁿ or N; and

G^* is CR'' or N ; each R'' , R^* , R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , R^{25} , R^{26} , and R^{27} is, independently, as defined for R^1 above.

In any embodiment of the transition metal complexes described herein M may be Hf , Ti , or Zr .

5 In any embodiment of the transition metal complexes described herein, each of X^1 and X^2 is independently selected from the group consisting of hydrocarbyl radicals having from 1 to 20 carbon atoms (such as methyl, ethyl, ethenyl, and isomers of propyl, butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, octadecyl, nonadecyl, and eicosyl), hydrides, amides, alkoxides having from 1 to 20 carbon
10 atoms, sulfides, phosphides, halides, sulfoxides, sulfonates, phosphonates, nitrates, carboxylates, carbonates, and combinations thereof, preferably each of X^1 and X^2 is independently selected from the group consisting of halides (F , Cl , Br , I), alkyl radicals having from 1 to 7 carbon atoms (methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, and isomers thereof), benzyl radicals, or a combination thereof.

15 In any embodiment of the transition metal complexes described herein, Y is a divalent C_1 to C_{40} hydrocarbyl radical or divalent substituted hydrocarbyl radical comprising a portion that comprises a linker backbone comprising from 1 to 18 carbon atoms linking or bridging between Q and N . In an embodiment, Y is a divalent C_1 to C_{40} hydrocarbyl or substituted hydrocarbyl radical comprising a portion that comprises a linker backbone comprising from 1 to 18 carbon
20 atoms linking Q and N wherein the hydrocarbyl comprises O , S , $S(O)$, $S(O)_2$, $Si(R')$, $P(R')$, N , or $N(R')$, wherein each R' is independently a C_1 to C_{18} hydrocarbyl.

In an embodiment, Y is selected from the group consisting of ethylene ($-CH_2CH_2-$) and 1,2-cyclohexylene.

In an embodiment, Y is $-CH_2CH_2CH_2-$ derived from propylene.

25 In an embodiment, Y is selected from the group consisting of C_1 to C_{20} alkyl groups, such as divalent methyl, ethyl, ethenyl and isomers of propyl, butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, octadecyl, nonadecyl, and eicosyl.

30 In a particular embodiment, each R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 , R^8 , R^9 , and R^{10} is, independently, a hydrogen, a C_1 to C_{20} hydrocarbyl radical, a substituted C_1 to C_{20} hydrocarbyl

radical, or two or more of R^1 to R^{10} may independently join together to form a C_4 to C_{62} cyclic or polycyclic ring structure, or a combination thereof.

In any embodiment of the transition metal complexes described herein, each R^* , R'' , R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 , R^8 , R^9 , R^{10} , R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , R^{25} , R^{26} , and R^{27} is, independently, hydrogen, a halogen, a C_1 to C_{30} hydrocarbyl radical, a C_1 to C_{20} hydrocarbyl radical, or a C_1 to C_{10} hydrocarbyl radical (such as methyl, ethyl, ethenyl and isomers of propyl, butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, octadecyl, nonadecyl, and eicosyl).

In any embodiment of the transition metal complexes described herein each R^* , R'' , R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 , R^8 , R^9 , R^{10} , R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , R^{25} , R^{26} , and R^{27} is, independently, a substituted C_1 to C_{30} hydrocarbyl radical, a substituted C_1 to C_{20} hydrocarbyl radical, or a substituted C_1 to C_{10} hydrocarbyl radical (such as 4-fluorophenyl, 4-chlorophenyl, 4-bromophenyl, 4-methoxyphenyl, 4-trifluoromethylphenyl, 4-dimethylaminophenyl, 4-trimethylsilylphenyl, 4-triethylsilylphenyl, trifluoromethyl, fluoromethyl, trichloromethyl, chloromethyl, mesityl, methylthio, phenylthio, (trimethylsilyl)methyl, and (triphenylsilyl)methyl).

In an embodiment, one or more of R^* , R'' , R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 , R^8 , R^9 , R^{10} , R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , R^{25} , R^{26} , and R^{27} is a methyl radical, a fluoride, chloride, bromide, iodide, methoxy, ethoxy, isopropoxy, trifluoromethyl, dimethylamino, diphenylamino, adamantyl, phenyl, pentafluorophenyl, naphthyl, anthracenyl, dimethylphosphanyl, diisopropylphosphanyl, diphenylphosphanyl, methylthio, and phenylthio, or a combination thereof.

In any embodiment of the transition metal complexes described herein, Q^* is N, O, S, or P, preferably N, O, or S, preferably N or O, preferably N. In any embodiment of the transition metal complexes described herein, when Q^* is a Group 15 atom, z is 1, and when Q^* is a group 16 atom, z is 0.

In any embodiment of the transition metal complexes described herein, Q is preferably a neutral donor group comprising at least one atom from Group 15 or Group 16, preferably Q is NR'_2 , OR' , SR' , PR'_2 , where R' is as defined for R^1 (preferably R' is methyl, ethyl, propyl, isopropyl, phenyl, cyclohexyl or linked together to form a five-membered ring such as pyrrolidinyl or a six-membered ring such as piperidinyl), preferably the $-(Q-Y)-$ fragment can

form a substituted or unsubstituted heterocycle which may or may not be aromatic and may have multiple fused rings (for example, see compound 7-Zr, 7-Hf in the examples below). In any embodiment of the transition metal complexes described herein, Q is preferably an amine, ether, or pyridine.


5 In a particular embodiment of the transition metal complexes described herein, G* and J* are the same, preferably G* and J* are N, alternately G* and J* are CR^{'''}, where each R^{'''} is H or a C₁ to C₁₂ hydrocarbyl or substituted hydrocarbyl (such as methyl, ethyl, ethenyl and isomers of propyl, butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, trifluoromethylphenyl, tolyl, phenyl, methoxyphenyl, tertbutylphenyl, fluorophenyl, diphenyl, dimethylaminophenyl, 10 chlorophenyl, bromophenyl, iodophenyl, (trimethylsilyl)phenyl, (triethylsilyl)phenyl, (triethylsilyl)methyl, and (triethylsilyl)methyl). In a useful embodiment of the transition metal complexes described herein G* and J* are different.

In a particular embodiment of the transition metal complexes described herein G and J are the same, preferably G and J are carbazolyl, substituted carbazolyl, indolyl, substituted 15 indolyl, indolinyl, substituted indolinyl, imidazolyl, substituted imidazolyl, indenyl, substituted indenyl, indanyl, substituted indanyl, fluorenyl, or substituted fluorenyl. In a useful embodiment of the transition metal complexes described herein G and J are different.

In an embodiment, M is Zr or Hf; X¹ and X² are benzyl radicals; R¹ is a methyl radical; R² through R²⁷ are hydrogen; Y is ethylene (–CH₂CH₂–), Q*, G* and J* are N, and R_Z* is a 20 methyl radical.

In an embodiment, M is Zr or Hf; X¹ and X² are benzyl radicals; R⁴ and R⁷ are methyl radicals; R¹ through R³, R⁵ through R⁶, and R⁸ through R¹⁰ are hydrogen; and Y is ethylene, (–CH₂CH₂–), Q is an N-containing group, G and J are carbazolyl or fluorenyl. In a preferred combination, G and J are carbazolyl and Q is an amine group; or, G and J are substituted 25 fluorenyl and Q is an amine, ether or pyridine.

In a particularly preferred embodiment of the invention, the catalyst complex is represented by Formula (XX) or (XXI):

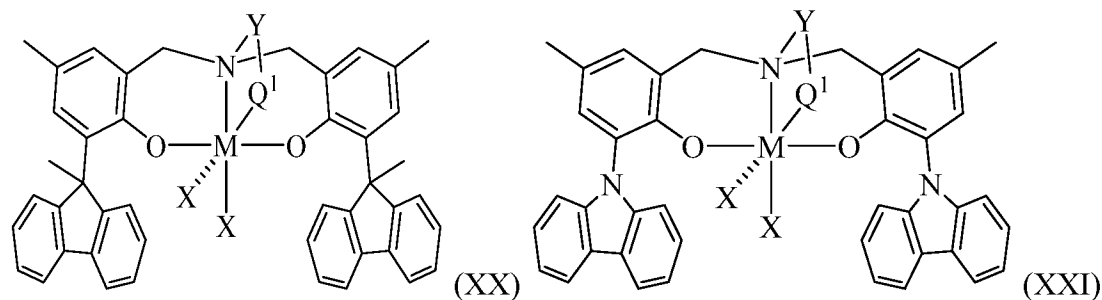


wherein: Y is a C₁-C₃ divalent hydrocarbyl, Q¹ is NR', OR', SR', PR'₂, where R' is as defined for R¹ (preferably R' is methyl, ethyl, propyl, isopropyl, phenyl, cyclohexyl or linked together to form a five-membered ring such as pyrrolidinyl or a six-membered ring such as piperidinyl), alternately the -(Q-Y)- fragment can form a substituted or unsubstituted heterocycle, which may or may not be aromatic, and may have multiple fused rings, M is Zr, Hf, or Ti and each X is, independently, as defined for X¹ above, preferably each X is benzyl, methyl, ethyl, chloride, bromide, or alkoxide.

Such ONYO-catalyst materials are known in the art and include, but are not limited to, those disclosed in U.S. Pat. App. No. 62/236697, filed on October 2, 2015, incorporated herein by reference.


Oxadiazole Catalyst

In one aspect of the invention, the catalyst system comprises an oxadiazole compound.

In certain aspects, the catalyst may be a compound represented by Formula (IX):

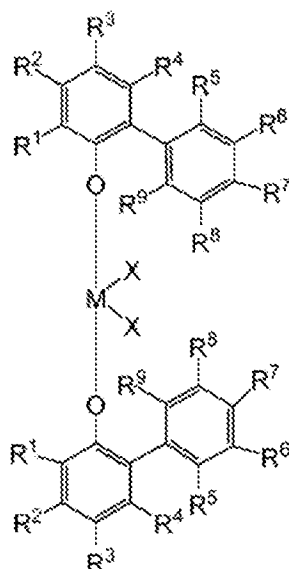

- 5 where M is selected from the group consisting of Ti, Zr, and Hf; at least one of R¹ through R⁹ is substituted with a moiety having the following structure (X):



- where structure X is attached at any one of R¹ through R⁹ at the R¹⁰ or R¹¹ position; at least one of nitrogen N¹ or N² of Structure X forms a dative bond with metal M; and each of R¹ through R¹¹ are independently selected from the group consisting of hydride, hydrocarbyl, lower hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, alkyl, lower alkyl, substituted alkyl, heteroalkyl, alkenyl, lower alkenyl, substituted alkenyl, heteroalkenyl, alkynyl, lower alkynyl, substituted alkynyl, heteroalkynyl, alkoxy, lower alkoxy, aryloxy, hydroxyl, alkylthio, lower alkyl thio, arylthio, thioxy, aryl, substituted aryl, heteroaryl, aralkyl, aralkylene, alkaryl, alkaryl, alkylene, halide, haloalkyl, haloalkenyl, haloalkynyl, heteroalkyl, heterocycle, heteroaryl, heteroatom-containing group, silyl, boryl, phosphino, phosphine, amino, and amine; and X is a
- 20
- 25 leaving group.


Catalyst compounds for producing an intermediate molecular weight polymer fraction and/or having essentially no hydrogen response useful in embodiments disclosed herein include

various catalyst compounds comprising an oxadiazole compound, either as a ligand or as an electron donor compound to control hydrogen response.

Each X in structure (IX) is independently selected from the group consisting of: any leaving group in one embodiment; halogen ions, hydrides, C₁ to C₁₂ alkyls, C₂ to C₁₂ alkenyls, C₆ to C₁₂ aryls, C₇ to C₂₀ alkylaryls, C₁ to C₁₂ alkoxys, C₆ to C₁₆ aryloxys, C₇ to C₁₈ alkylaryloxys, C₁ to C₁₂ fluoroalkyls, C₆ to C₁₂ fluoroaryls, and C₁ to C₁₂ heteroatom-containing hydrocarbons and substituted derivatives thereof in a more particular embodiment; hydride, halogen ions, C₁ to C₆ alkyls, C₂ to C₆ alkenyls, C₇ to C₁₈ alkylaryls, C₁ to C₆ alkoxys, C₆ to C₁₄ aryloxys, C₇ to C₁₆ alkylaryloxys, C₁ to C₆ alkylcarboxylates, C₁ to C₆ fluorinated alkylcarboxylates, C₆ to C₁₂ arylcarboxylates, C₇ to C₁₈ alkylarylcarboxylates, C₁ to C₆ fluoroalkyls, C₂ to C₆ fluoroalkenyls, and C₇ to C₁₈ fluoroalkylaryls in yet a more particular embodiment; hydride, chloride, fluoride, methyl, phenyl, phenoxy, benzoxy, tosyl, fluoromethyls and fluorophenyls in yet a more particular embodiment; C₁ to C₁₂ alkyls, C₂ to C₁₂ alkenyls, C₆ to C₁₂ aryls, C₇ to C₂₀ alkylaryls, substituted C₁ to C₁₂ alkyls, substituted C₆ to C₁₂ aryls, substituted C₇ to C₂₀ alkylaryls and C₁ to C₁₂ heteroatom-containing alkyls, C₁ to C₁₂ heteroatom-containing aryls and C₁ to C₁₂ heteroatom-containing alkylaryls in yet a more particular embodiment; chloride, fluoride, C₁ to C₆ alkyls, C₂ to C₆ alkenyls, C₇ to C₁₈ alkylaryls, halogenated C₁ to C₆ alkyls, halogenated C₂ to C₆ alkenyls, and halogenated C₇ to C₁₈ alkylaryls in yet a more particular embodiment; fluoride, methyl, ethyl, propyl, phenyl, methylphenyl, dimethylphenyl, trimethylphenyl, fluoromethyls (mono-, di- and trifluoromethyls) and fluorophenyls (mono-, di-, tri-, tetra- and pentafluorophenyls) in yet a more particular embodiment.


Other non-limiting examples of X groups in structure (I) include amines, phosphines, ethers, carboxylates, dienes, hydrocarbon radicals having from 1 to 20 carbon atoms, fluorinated hydrocarbon radicals (e.g., -COF₅ (pentafluorophenyl)), fluorinated alkylcarboxylates (e.g., CF₃C(O)O"), hydrides and halogen ions and combinations thereof. Other examples of X ligands include alkyl groups such as cyclobutyl, cyclohexyl, methyl, heptyl, tolyl, trifluoromethyl, tetramethylene, pentamethylene, methylenedichloride, methoxy, ethoxy, propoxy, phenoxy, bis(N-methylanilide), dimethylamide, dimethylphosphide radicals and the like. In one embodiment, two or more X's form a part of a fused ring or ring system.

In some embodiments, catalyst compounds comprising an oxadiazole compound may be represented by the following structure:

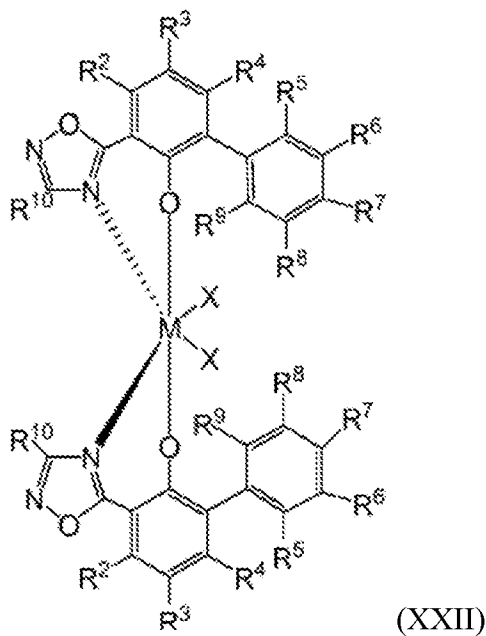

where M, X, and R² through R¹⁰ are defined as above.

In other non-limiting embodiments, the catalyst compounds comprising an oxadiazole compound may be represented by the following structure (XXIII):

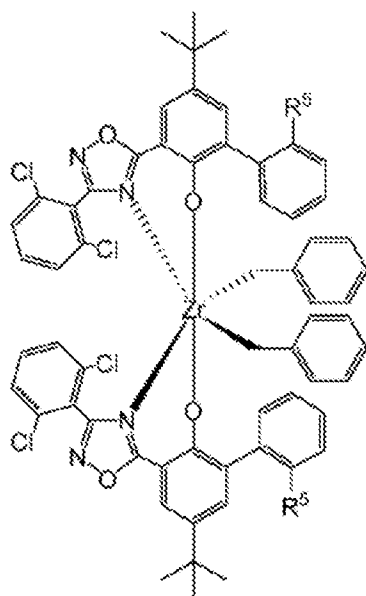


where each R⁵ is independently selected from the group consisting of hydride and C₁ to C₄ alkyl.


In some embodiments, at least one R₅ is hydrogen, or in some embodiments both R₅'s are

hydrogen. In some embodiments, at least one R_5 is a methyl, or in some embodiments both each R_5 are methyl.

- 5 In some embodiments, the catalyst compounds comprising an oxadiazole compound may include a phenoloxadiazole complex having structures (XXIV) and/or (XXV):

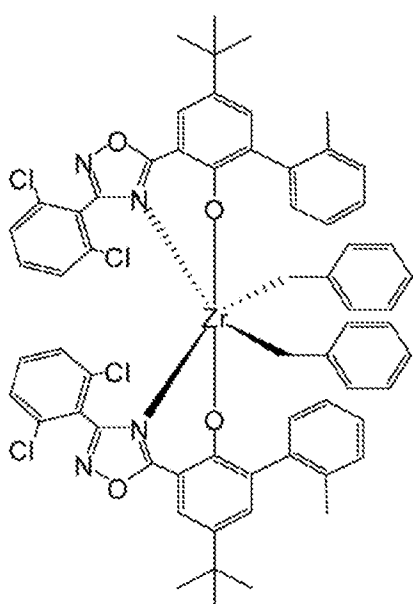

(XXIV)

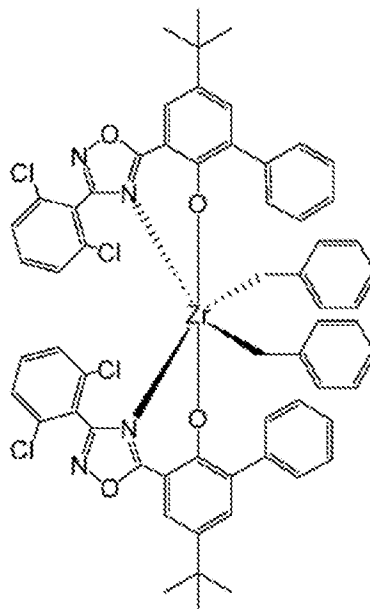

(XXV).

In some embodiments, two or more different catalyst compounds are present in the reaction zone where the process(es) described herein occur. When two metal compound based catalysts are used in one reactor as a mixed catalyst system, the two metal compounds are preferably chosen such that the two are compatible. A simple screening method such as by ^1H or ^{13}C NMR, known to those of ordinary skill in the art, can be used to determine which transition metal compounds are compatible. It is preferable to use the same activator for the transition metal compounds, however, two different activators, such as a non-coordinating anion activator and an alumoxane, can be used in combination, as described further below. If one or more transition metal compounds contain an X^6 ligand which is not a hydride, hydrocarbyl, or substituted hydrocarbyl, then the alumoxane should be contacted with the transition metal compounds prior to addition of the non-coordinating anion activator.

20 Such oxadiazole catalyst compounds as described above are known in the art and any are suitable for use herein. Such catalysts are described in, but not limited to, PCT Publication WO 2010/132811, incorporated herein by reference.

Where two catalyst compounds are used, the two metal compounds (pre-catalysts) may be used in any ratio. Preferred molar ratios of (A) metal compound to (B) metal compound fall within the range of (A:B) 1:1000 to 1000:1, alternatively 1:100 to 500:1, alternatively 1:10 to 200:1, alternatively 1:1 to 100:1, and alternatively 1:1 to 75:1, and alternatively 5:1 to 50:1. The particular ratio chosen will depend on the exact pre-catalysts chosen, the method of activation, and the end product desired. In a particular embodiment, when using the two pre-catalysts, where both are activated with the same activator, useful mole percentages, based upon the molecular weight of the pre-catalysts, are about 10 to about 99.9% A to about 0.1 to about 90% B, alternatively about 25 to about 99% A to about 0.5 to about 50% B, alternatively about 50 to about 99% A to about 1 to about 25% B, and alternatively about 75 to about 99% A to about 1 to about 10% B.

Typically, the catalyst compound is present on the catalyst support at from 0.01 micromols of catalyst per gram of support to 100 micromols of catalyst per gram of support (preferably from 0.1 micromols of catalyst per gram of support to 10 micromols of catalyst per gram of support, preferably from 1 micromols of catalyst per gram of support to 5 micromols of catalyst per gram of support, preferably from 3 micromols of catalyst per gram of support to 5 micromols of catalyst per gram of support.

B. Catalyst Binder

The catalyst material may optionally comprise a binder. Suitable binders, include but are not limited to silica, alumina, zirconia, titania, silica-alumina, cerium oxide, magnesium oxide, or combinations thereof. Thus, in another embodiment, an organosilica material comprising a catalyst material described herein is provided.

VI. Activators

In addition to the organosilica support and catalyst(s) described above, the catalyst system according to the present disclosure includes one or more activator compounds.

After the catalyst complexes described above are synthesized, catalyst compounds may be activated by combining them with activators in any manner known in the art by supporting them for use in slurry or gas phase polymerization. Non-limiting activators, for example, include alumoxanes, aluminum alkyls, ionizing activators, which may be neutral or ionic, and conventional-type cocatalysts. Preferred activators typically include alumoxane compounds, modified alumoxane compounds, and ionizing anion precursor compounds that abstract a

reactive, σ -bound, metal ligand making the metal complex cationic and providing a charge-balancing noncoordinating or weakly coordinating anion.

After the catalyst complexes described above are synthesized, catalyst compounds may be activated by combining them with activators in any manner known in the art by supporting them for use in slurry or gas phase polymerization. Non-limiting activators, for example, include alumoxanes, aluminum alkyls, ionizing activators, which may be neutral or ionic, and conventional-type cocatalysts. Preferred activators typically include alumoxane compounds, modified alumoxane compounds, and ionizing anion precursor compounds that abstract a reactive, σ -bound, metal ligand making the metal complex cationic and providing a charge-balancing noncoordinating or weakly coordinating anion.

A. Alumoxane Activators

In one embodiment, alumoxane activators are utilized as an activator in the catalyst system. Alumoxanes are generally oligomeric compounds containing $-\text{Al}(\text{R}^1)\text{-O-}$ sub-units, where R^1 is an alkyl group. Examples of alumoxanes include methylalumoxane (MAO), modified methylalumoxane (MMAO), ethylalumoxane and isobutylalumoxane. Alkylalumoxanes and modified alkylalumoxanes are suitable as catalyst activators, particularly when the abstractable ligand is an alkyl, halide, alkoxide or amide. Mixtures of different alumoxanes and modified alumoxanes may also be used. It may be preferable to use a visually clear methylalumoxane. A cloudy or gelled alumoxane can be filtered to produce a clear solution or clear alumoxane can be decanted from the cloudy solution. A useful alumoxane is a modified methyl alumoxane (MMAO) cocatalyst type 3A (commercially available from Akzo Chemicals, Inc. under the trade name Modified Methylalumoxane type 3A and described in U.S. Patent No. 5,041,584).

When the activator is an alumoxane (modified or unmodified), some embodiments select the maximum amount of activator typically at up to a 5000-fold molar excess Al/M over the catalyst compound (per metal catalytic site). The minimum activator-to-catalyst-compound is a 1:1 molar ratio. Alternate preferred ranges include from 1:1 to 500:1, alternately from 1:1 to 200:1, alternately from 1:1 to 100:1, or alternately from 1:1 to 50:1.

In an alternate embodiment, little or no alumoxane is used in the polymerization processes described herein. Preferably, alumoxane is present at zero mole %, alternately the

alumoxane is present at a molar ratio of aluminum to catalyst compound transition metal less than 500:1, preferably less than 300:1, preferably less than 100:1, preferably less than 1:1.

B. Non-Coordinating Anion Activators

A non-coordinating anion (NCA) is defined to mean an anion either that does not coordinate to the catalyst metal cation or that does coordinate to the metal cation, but only weakly. The term NCA is also defined to include multicomponent NCA-containing activators, such as N,N-dimethylanilinium tetrakis(pentafluorophenyl)borate, that contain an acidic cationic group and the non-coordinating anion. The term NCA is also defined to include neutral Lewis acids, such as tris(pentafluorophenyl)boron, that can react with a catalyst to form an activated species by abstraction of an anionic group. An NCA coordinates weakly enough that a neutral Lewis base, such as an olefinically or acetylenically unsaturated monomer can displace it from the catalyst center. Any metal or metalloid that can form a compatible, weakly coordinating complex may be used or contained in the noncoordinating anion. Suitable metals include, but are not limited to, aluminum, gold, and platinum. Suitable metalloids include, but are not limited to, boron, aluminum, phosphorus, and silicon. A stoichiometric activator can be either neutral or ionic. The terms ionic activator, and stoichiometric ionic activator can be used interchangeably. Likewise, the terms neutral stoichiometric activator, and Lewis acid activator can be used interchangeably. The term non-coordinating anion includes neutral stoichiometric activators, ionic stoichiometric activators, ionic activators, and Lewis acid activators.


"Compatible" non-coordinating anions are those which are not degraded to neutrality when the initially formed complex decomposes. Further, the anion will not transfer an anionic substituent or fragment to the cation so as to cause it to form a neutral transition metal compound and a neutral by-product from the anion. Non-coordinating anions useful in accordance with this invention are those that are compatible, stabilize the transition metal cation in the sense of balancing its ionic charge at +1, and yet retain sufficient ability to permit displacement during polymerization.

In certain aspects, an ionizing or stoichiometric activator, neutral or ionic, such as tri (n-butyl) ammonium tetrakis (pentafluorophenyl) borate, a tris perfluorophenyl boron metalloid precursor or a tris perfluoronaphthyl boron metalloid precursor, polyhalogenated heteroborane anions (PCT International Publication No. WO 98/43983), boric acid (U.S. Patent No.

5,942,459), or combination thereof can be used. Neutral or ionic activators alone or in combination with alumoxane or modified alumoxane activators can also be used.

The catalyst systems of this invention can include at least one non-coordinating anion (NCA) activator.

5 In a preferred embodiment, boron containing NCA activators represented by the formula:



where: Z^{24} is (L-H) or a reducible Lewis acid; L is a neutral Lewis base; H is hydrogen; (L-H) is a Bronsted acid; A^{d-} is a boron containing non-coordinating anion having the charge d-; d is 1, 2, or 3.

10 The cation component, $Z^{24}_d{}^+$ may include Bronsted acids such as protons or protonated Lewis bases or reducible Lewis acids capable of protonating or abstracting a moiety, such as an alkyl or aryl, from portions of the catalyst precursor, resulting in a cationic transition metal species.

The activating cation $Z^{24}_d{}^+$ may also be a moiety such as silver, tropylium, carboniums, 15 ferroceniums and mixtures, preferably carboniums and ferroceniums. Most preferably $Z^{24}_d{}^+$ is triphenyl carbonium. Preferred reducible Lewis acids can be any triaryl carbonium (where the aryl can be substituted or unsubstituted, such as those represented by the formula: (Ar_3C^+) , where Ar is aryl or aryl substituted with a heteroatom, a C_1 to C_{40} hydrocarbyl, or a substituted C_1 to C_{40} hydrocarbyl), preferably the reducible Lewis acids in formula above as " Z^{24} ," include those 20 represented by the formula: (Ph_3C) , where Ph is a substituted or unsubstituted phenyl, preferably substituted with C_1 to C_{40} hydrocarbyls or substituted a C_1 to C_{40} hydrocarbyls, preferably C_1 to C_{20} alkyls or aromatics or substituted C_1 to C_{20} alkyls or aromatics, preferably V is a triphenylcarbonium.

When $Z^{24}_d{}^+$ is the activating cation $(L-H)_d^+$, it is preferably a Bronsted acid, capable of 25 donating a proton to the transition metal catalytic precursor resulting in a transition metal cation, including ammoniums, oxoniums, and/or phosphoniums.

The anion component A^{d-} includes those having the formula $[M^{8k+}Q_n]^{d-}$ wherein k is 1, 2, or 3; n is 1, 2, 3, 4, 5, or 6 (preferably 1, 2, 3, or 4); $n - k = d$; M^8 is an element selected from Group 13 elements, preferably boron or aluminum, and Q is independently a hydride, bridged or 30 unbridged dialkylamido, halide, alkoxide, aryloxy, hydrocarbyl, substituted hydrocarbyl,

halocarbyl, substituted halocarbyl, and halosubstituted-hydrocarbyl radicals, said Q having up to 20 carbon atoms with the proviso that in not more than 1 occurrence is Q a halide.

Illustrative, but not limiting examples of boron compounds which may be used as an activating cocatalyst are the compounds described as (and particularly those specifically listed as) activators in U.S. Patent No. 8,658,556, which is incorporated by reference herein.

Most preferably, the ionic stoichiometric activator $Z_d^{2+}(A^{d-})$ is one or more of N,N-dimethylanilinium tetra(perfluorophenyl)borate, N,N-dimethylanilinium tetrakis(perfluoronaphthyl)borate, N,N-dimethylanilinium tetrakis(perfluorobiphenyl)borate, N,N-dimethylanilinium tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, triphenylcarbenium tetrakis(perfluoronaphthyl)borate, triphenylcarbenium tetrakis(perfluorobiphenyl)borate, triphenylcarbenium tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, or triphenylcarbenium tetra(perfluorophenyl)borate.

A list of particularly useful Bulky Activators is described in U.S. Patent No. 8,658,556, which is incorporated by reference herein.

In another embodiment, one or more of the NCA activators is chosen from the activators described in U.S. Patent No. 6,211,105.

The typical activator-to-catalyst ratio, *e.g.*, all NCA activators-to-catalyst ratio is about a 1:1 molar ratio. Alternate preferred ranges include from 0.1:1 to 100:1, alternately from 0.5:1 to 200:1, alternately from 1:1 to 500:1 alternately from 1:1 to 1000:1. A particularly useful range is from 0.5:1 to 10:1, preferably 1:1 to 5:1.

It is also within the scope of this invention that the catalyst compounds can be combined with combinations of alumoxanes and NCA's (see for example, U.S. Patent Nos. 5,153,157 and 5,453,410, European Patent Publication No. 0573120 B1, and International PCT Publications WO 94/07928, and WO 95/14044 which discuss the use of an alumoxane in combination with an ionizing activator).

VII. Optional Scavengers, Chain Transfer Agents and/or Co-Activators

In addition to the activator compounds, scavengers, chain transfer agents or co-activators may be used. Aluminum alkyl compounds which may be utilized as scavengers or co-activators include, for example, one or more of those represented by the formula AlR_3^{19} , where each R^{19} is, independently, a C_1 - C_8 aliphatic radical, preferably methyl, ethyl, propyl, butyl, pentyl, hexyl

octyl or an isomer thereof), especially trimethylaluminum, triethylaluminum, triisobutylaluminum, tri-n-hexylaluminum, tri-n-octylaluminum or mixtures thereof.

Useful chain transfer agents that may also be used herein are typically a compound represented by the formula AlR^{20}_3 , ZnR^{20}_2 (where each R^{20} is, independently, a C_1 - C_8 aliphatic radical, preferably methyl, ethyl, propyl, butyl, pentyl, hexyl octyl or an isomer thereof) or a combination thereof, such as diethyl zinc, trimethylaluminum, triisobutylaluminum, trioctylaluminum, or a combination thereof.

VIII. Polymerization Processes

In certain embodiments, the catalytic systems of the present disclosure include organosilica materials as described herein as support matrices for separation and/or catalysis processes. For example, the organosilica materials may be supports in used for a polymerization process.

In embodiments herein, the invention relates to polymerization processes where monomer (such as propylene and or ethylene), and optionally comonomer, are contacted with a catalyst system comprising an activator, an organosilica material support and at least one catalyst, such as a catalyst compound having oxygen and nitrogen linkages in transition metal complexes described above. The support, catalyst compound, and activator may be combined in any order, and are combined typically prior to contacting with the monomers.

Monomers useful herein include substituted or unsubstituted C_2 to C_{40} alpha olefins, preferably C_2 to C_{20} alpha olefins, preferably C_2 to C_{12} alpha olefins, preferably ethylene, propylene, butene, pentene, hexene, heptene, octene, nonene, decene, undecene, dodecene and isomers thereof.

In an embodiment of the invention, the monomer comprises propylene and an optional comonomers comprising one or more ethylene or C_4 to C_{40} olefins, preferably C_4 to C_{20} olefins, or preferably C_6 to C_{12} olefins. The C_4 to C_{40} olefin monomers may be linear, branched, or cyclic. The C_4 to C_{40} cyclic olefins may be strained or unstrained, monocyclic or polycyclic, and may optionally include heteroatoms and/or one or more functional groups.

In another embodiment of the invention, the monomer comprises ethylene and optional comonomers comprising one or more C_3 to C_{40} olefins, preferably C_4 to C_{20} olefins, or preferably C_6 to C_{12} olefins. The C_3 to C_{40} olefin monomers may be linear, branched, or cyclic.

The C₃ to C₄₀ cyclic olefins may be strained or unstrained, monocyclic or polycyclic, and may optionally include heteroatoms and/or one or more functional groups.

Exemplary C₂ to C₄₀ olefin monomers and optional comonomers include ethylene, propylene, butene, pentene, hexene, heptene, octene, nonene, decene, undecene, dodecene, norbornene, norbornadiene, dicyclopentadiene, cyclopentene, cycloheptene, cyclooctene, cyclooctadiene, cyclododecene, 7-oxanorbornene, 7-oxanorbornadiene, substituted derivatives thereof, and isomers thereof, preferably hexene, heptene, octene, nonene, decene, dodecene, cyclooctene, 1,5-cyclooctadiene, 1-hydroxy-4-cyclooctene, 1-acetoxy-4-cyclooctene, 5-methylcyclopentene, cyclopentene, dicyclopentadiene, norbornene, norbornadiene, and their respective homologs and derivatives, preferably norbornene, norbornadiene, and dicyclopentadiene.

In a preferred embodiment one or more dienes are present in the polymer produced herein at up to 10 weight %, preferably at 0.00001 to 1.0 weight %, preferably 0.002 to 0.5 weight %, even more preferably 0.003 to 0.2 weight %, based upon the total weight of the composition. In some embodiments 500 ppm or less of diene is added to the polymerization, preferably 400 ppm or less, preferably or 300 ppm or less. In other embodiments at least 50 ppm of diene is added to the polymerization, or 100 ppm or more, or 150 ppm or more.

Diolefin monomers useful in this invention include any hydrocarbon structure, preferably C₄ to C₃₀, having at least two unsaturated bonds, wherein at least two of the unsaturated bonds are readily incorporated into a polymer by either a stereospecific or a non-stereospecific catalyst(s). It is further preferred that the diolefin monomers be selected from alpha, omega-diene monomers (*i.e.*, di-vinyl monomers). More preferably, the diolefin monomers are linear di-vinyl monomers, most preferably those containing from 4 to 30 carbon atoms. Examples of preferred dienes include butadiene, pentadiene, hexadiene, heptadiene, octadiene, nonadiene, decadiene, undecadiene, dodecadiene, tridecadiene, tetradecadiene, pentadecadiene, hexadecadiene, heptadecadiene, octadecadiene, nonadecadiene, icosadiene, heneicosadiene, docosadiene, tricosadiene, tetracosadiene, pentacosadiene, hexacosadiene, heptacosadiene, octacosadiene, nonacosadiene, triacontadiene, particularly preferred dienes include 1,6-heptadiene, 1,7-octadiene, 1,8-nonadiene, 1,9-decadiene, 1,10-undecadiene, 1,11-dodecadiene, 1,12-tridecadiene, 1,13-tetradecadiene, and low molecular weight polybutadienes (M_w less than 1000 g/mol). Preferred cyclic dienes include cyclopentadiene, vinylnorbornene, norbornadiene,

ethylidene norbornene, divinylbenzene, dicyclopentadiene or higher ring containing diolefins with or without substituents at various ring positions.

Polymerization processes according to the present disclosure can be carried out in any manner known in the art. Any suspension, slurry, or gas phase polymerization process known in the art can be used. Such processes can be run in a batch, semi-batch, or continuous mode. Heterogeneous polymerization processes (such as gas phase and slurry phase processes) are preferred. A heterogeneous process is defined to be a process where the catalyst system is not soluble in the reaction media. Alternately the polymerization process is not homogeneous. A homogeneous polymerization process is defined to be a process where at least 90 wt% of the product is soluble in the reaction media. Alternately the polymerization process is not a bulk process is particularly preferred. A bulk process is defined to be a process where monomer concentration in all feeds to the reactor is 70 volume % or more). Alternately, no solvent or diluent is present or added in the reaction medium, (except for the small amounts used as the carrier for the catalyst system or other additives, or amounts typically found with the monomer; *e.g.*, propane in propylene). In another embodiment, the process is a slurry process. As used herein the term "slurry polymerization process" means a polymerization process where a supported catalyst is employed and monomers are polymerized on the supported catalyst particles. At least 95 wt% of polymer products derived from the supported catalyst are in granular form as solid particles (not dissolved in the diluent).

Suitable diluents/solvents for polymerization include non-coordinating, inert liquids. Examples include straight and branched-chain hydrocarbons, such as isobutane, butane, pentane, isopentane, hexanes, isohexane, heptane, octane, dodecane, and mixtures thereof; cyclic and alicyclic hydrocarbons, such as cyclohexane, cycloheptane, methylcyclohexane, methylcycloheptane, and mixtures thereof, such as can be found commercially (Isopar™); perhalogenated hydrocarbons, such as perfluorinated C₄₋₁₀ alkanes, chlorobenzene, and aromatic and alkylsubstituted aromatic compounds, such as benzene, toluene, mesitylene, and xylene. Suitable solvents also include liquid olefins which may act as monomers or comonomers including ethylene, propylene, 1-butene, 1-hexene, 1-pentene, 3-methyl-1-pentene, 4-methyl-1-pentene, 1-octene, 1-decene, and mixtures thereof. In a preferred embodiment, aliphatic hydrocarbon solvents are used as the solvent, such as isobutane, butane, pentane, isopentane, hexanes, isohexane, heptane, octane, dodecane, and mixtures thereof; cyclic and alicyclic

hydrocarbons, such as cyclohexane, cycloheptane, methylcyclohexane, methylcycloheptane, and mixtures thereof. In another embodiment, the solvent is not aromatic, preferably aromatics are present in the solvent at less than 1 wt%, preferably less than 0.5 wt%, preferably less than 0 wt% based upon the weight of the solvents.

5 In a preferred embodiment, the feed concentration of the monomers and comonomers for the polymerization is 60 vol% solvent or less, preferably 40 vol% or less, or preferably 20 vol% or less, based on the total volume of the feedstream. Preferably the polymerization is run in a bulk process.

Preferred polymerizations can be run at any temperature and/or pressure suitable to
10 obtain the desired ethylene polymers. Typical temperatures and/or pressures include a temperature in the range of from about 0°C to about 300°C, preferably about 20°C to about 200°C, preferably about 35°C to about 150°C, preferably from about 40°C to about 120°C, preferably from about 45°C to about 80°C; and at a pressure in the range of from about 0.35 MPa to about 10 MPa, preferably from about 0.45 MPa to about 6 MPa, or preferably from about 0.5
15 MPa to about 4 MPa.

In a typical polymerization, the run time of the reaction is up to 300 minutes, preferably in the range of from about 5 to 250 minutes, or preferably from about 10 to 120 minutes.

In some embodiments, hydrogen is present in the polymerization reactor at a partial pressure of 0.001 to 50 psig (0.007 to 345 kPa), preferably from 0.01 to 25 psig (0.07 to 172
20 kPa), more preferably 0.1 to 10 psig (0.7 to 70 kPa).

In one embodiment of the invention, the polymerization is performed in the gas phase, preferably in a fluidized gas bed process. Generally, in a fluidized gas bed process used for producing polymers, a gaseous stream containing one or more monomers is continuously cycled through a fluidized bed in the presence of a catalyst under reactive conditions. The gaseous
25 stream is withdrawn from the fluidized bed and recycled back into the reactor. Simultaneously, polymer product is withdrawn from the reactor and fresh monomer is added to replace the polymerized monomer. (See for example U.S. Patent Nos 4,543,399; 4,588,790; 5,028,670; 5,317,036; 5,352,749; 5,405,922; 5,436,304; 5,453,471; 5,462,999; 5,616,661; and 5,668,228; all of which are fully incorporated herein by reference.

30 In another embodiment of the invention, the polymerization is performed in the slurry phase. A slurry polymerization process generally operates between 1 to about 50 atmosphere

pressure range (15 psi to 735 psi, 103 kPa to 5068 kPa) or even greater and temperatures in the range of 0°C to about 120°C. In a slurry polymerization, a suspension of solid, particulate polymer is formed in a liquid polymerization diluent medium to which monomer and comonomers, along with catalysts, are added. The suspension including diluent is intermittently or continuously removed from the reactor where the volatile components are separated from the polymer and recycled, optionally after a distillation, to the reactor. The liquid diluent employed in the polymerization medium is typically an alkane having from 3 to 7 carbon atoms, preferably a branched alkane. The medium employed should be liquid under the conditions of polymerization and relatively inert. When a propane medium is used, the process is typically operated above the reaction diluent critical temperature and pressure. Often, a hexane or an isobutane medium is employed.

In an embodiment, a preferred polymerization technique useful in the invention is referred to as a particle form polymerization, or a slurry process where the temperature is kept below the temperature at which the polymer goes into solution. Such technique is known in the art, and described in for instance U.S. Patent No. 3,248,179, which is fully incorporated herein by reference. A preferred temperature in the particle form process is within the range of about 85°C to about 110°C. Two preferred polymerization methods for the slurry process are those employing a loop reactor and those utilizing a plurality of stirred reactors in series, parallel, or combinations thereof. Non-limiting examples of slurry processes include continuous loop or stirred tank processes. Also, other examples of slurry processes are described in U.S. Patent No. 4,613,484, which is herein fully incorporated by reference.

In another embodiment, the slurry process is carried out continuously in a loop reactor. The catalyst, as a slurry in isobutane or as a dry free flowing powder, is injected regularly to the reactor loop, which is itself filled with circulating slurry of growing polymer particles in a diluent of isobutane containing monomer and comonomer. Hydrogen, optionally, may be added as a molecular weight control. In one embodiment 500 ppm or less of hydrogen is added, or 400 ppm or less or 300 ppm or less. In other embodiments at least 50 ppm of hydrogen is added, or 100 ppm or more, or 150 ppm or more.

The slurry reactor may be maintained at a pressure of 3620 kPa to 4309 kPa and at a temperature in the range of about 60°C to about 104°C depending on the desired polymer melting characteristics. Reaction heat is removed through the loop wall since much of the

reactor is in the form of a double-jacketed pipe. The slurry is allowed to exit the reactor at regular intervals or continuously to a heated low pressure flash vessel, rotary dryer and a nitrogen purge column in sequence for removal of the isobutane diluent and all unreacted monomer and comonomers. The resulting hydrocarbon free powder is then compounded for use in various applications.

In certain embodiments, little or no alumoxane is used in the process to produce the polymers. Alumoxane is optionally present at zero mol%, alternately the alumoxane is present at a molar ratio of aluminum to transition metal less than 500:1, preferably less than 300:1, preferably less than 100:1, preferably less than 1:1.

In a preferred embodiment, little or no scavenger is used in the process to produce the polymer, such as ethylene polymer. Preferably, scavenger (such as trialkyl aluminum, $\text{Al}^1\text{R}^{19}_3$ as defined above) is present at zero mol%, alternately the scavenger is present at a molar ratio of scavenger metal to transition metal of less than 100:1, preferably less than 50:1, preferably less than 15:1, preferably less than 10:1.

In a preferred embodiment, the catalyst system used in the polymerization comprises no more than one catalyst compound. A "reaction zone" also referred to as a "polymerization zone" is a vessel where polymerization takes place, for example a batch reactor. When multiple reactors are used in either series or parallel configuration, each reactor is considered as a separate polymerization zone. For a multi-stage polymerization in both a batch reactor and a continuous reactor, each polymerization stage is considered as a separate polymerization zone. In a preferred embodiment, the polymerization occurs in one reaction zone.

Other additives may also be used in the polymerization, as desired, such as one or more scavengers, promoters, modifiers, chain transfer agents (such as diethyl zinc), reducing agents, oxidizing agents, hydrogen, aluminum alkyls, or silanes.

In a preferred embodiment of the invention, the polymerization occurs within the mesopores of the organosilica material support and preferably the mesopores have an average diameter as discussed above, for example, from about 2 nm to about 50 nm, alternately about 3 nm to about 20 nm.

A. Polyolefin Products

This invention also relates to polymer compositions of matter produced by the methods described herein.

In a preferred embodiment of the invention, the process described herein produces homopolymers copolymers of one, two, three, four or more C₂ to C₄₀ olefin monomers, preferably C₂ to C₂₀ alpha olefin monomers. Particularly useful monomers include ethylene, propylene, butene, pentene, hexene, heptene, octene, nonene, decene, undecene, dodecene, isomers thereof and mixtures thereof.

Likewise, the process of this invention produces olefin polymers, preferably polyethylene and polypropylene homopolymers and copolymers. In a preferred embodiment, the polymers produced herein are homopolymers of ethylene or homopolymers of propylene.

Alternately, the polymers produced herein are copolymers of a C₂ to C₄₀ olefin and one, two or three or more different C₂ to C₄₀ olefins, (where the C₂ to C₄₀ olefins are preferably C₃ to C₂₀ olefins, preferably are C₃ to C₁₂ alpha-olefin, preferably are propylene, butene, hexene, octene, decene, dodecene, preferably propylene, butene, hexene, octene or a mixture thereof).

Alternately, the polymers produced herein are copolymers of ethylene preferably having from 0 to 25 mole% (alternately from 0.5 to 20 mole%, alternately from 1 to 15 mole%, preferably from 3 to 10 mole%) of one or more C₃ to C₂₀ olefin comonomer (preferably C₃ to C₁₂ alpha-olefin, preferably propylene, butene, hexene, octene, decene, dodecene, preferably propylene, butene, hexene, octene).

Alternately, the polymers produced herein are copolymers of are copolymers of propylene preferably having from 0 to 25 mole% (alternately from 0.5 to 20 mole%, alternately from 1 to 15 mole%, preferably from 3 to 10 mole%) of one or more of C₂ or C₄ to C₂₀ olefin comonomers (preferably ethylene or C₄ to C₁₂ alpha-olefin, preferably ethylene, butene, hexene, octene, decene, dodecene, preferably ethylene, butene, hexene, octene).

Typically, the polymers produced herein have an M_w of 5,000 to 1,000,000 g/mol (preferably 25,000 to 750,000 g/mol, preferably 50,000 to 500,000 g/mol), and/or an M_w/M_n of greater than 1 to 40 (alternately 1.2 to 20, alternately 1.3 to 10, alternately 1.4 to 5, 1.5 to 4, alternately 1.5 to 3).

In a preferred embodiment the polymer produced herein has a unimodal or multimodal molecular weight distribution as determined by Gel Permeation Chromatography (GPC). By "unimodal" is meant that the GPC trace has one peak or inflection point. By "multimodal" is meant that the GPC trace has at least two peaks or inflection points. An inflection point is that

point where the second derivative of the curve changes in sign (e.g., from negative to positive or vice versus).

Unless otherwise indicated M_w , M_n , MWD are determined by GPC as described in U.S. Publication No. 2006/0173123, at pages 24-25, paragraphs [0334] to [0341].

5 In a preferred embodiment the polymer produced herein has a composition distribution breadth index (CDBI) of 50% or more, preferably 60% or more, preferably 70 % or more. CDBI is a measure of the composition distribution of monomer within the polymer chains and is measured by the procedure described in PCT International Publication No. WO 93/03093, specifically at columns 7 and 8 as well as in Wild et al, J. Poly. Sci., Poly. Phys. Ed., Vol. 20, p.
10 441 (1982) and U.S. Patent No. 5,008,204, including fractions having a weight average molecular weight (M_w) below 15,000 are ignored when determining CDBI.

B. Blends

In another embodiment, the polymer (preferably the polyethylene or polypropylene) produced herein is combined with one or more additional polymers prior to being formed into a
15 film, molded part or other article. Other useful polymers include polyethylene, isotactic polypropylene, highly isotactic polypropylene, syndiotactic polypropylene, random copolymer of propylene and ethylene, and/or butene, and/or hexene, polybutene, ethylene vinyl acetate, LDPE, LLDPE, HDPE, ethylene vinyl acetate, ethylene methyl acrylate, copolymers of acrylic acid, polymethylmethacrylate or any other polymers polymerizable by a high-pressure free radical
20 process, polyvinylchloride, polybutene-1, isotactic polybutene, ABS resins, ethylene-propylene rubber (EPR), vulcanized EPR, EPDM, block copolymer, styrenic block copolymers, polyamides, polycarbonates, PET resins, cross linked polyethylene, copolymers of ethylene and vinyl alcohol (EVOH), polymers of aromatic monomers such as polystyrene, poly-1 esters, polyacetal, polyvinylidene fluoride, polyethylene glycols, and/or polyisobutylene.

25 In a preferred embodiment, the polymer (preferably the polyethylene or polypropylene) is present in the above blends, at from 10 to 99 wt%, based upon the weight of the polymers in the blend, preferably 20 to 95 wt%, even more preferably at least 30 to 90 wt%, even more preferably at least 40 to 90 wt%, even more preferably at least 50 to 90 wt%, even more preferably at least 60 to 90 wt%, even more preferably at least 70 to 90 wt%.

C. Films

Specifically, any of the foregoing polymers, such as the foregoing polypropylenes or blends thereof, may be used in a variety of end-use applications. Such applications include, for example, mono- or multi-layer blown, extruded, and/or shrink films. These films may be formed by any number of well known extrusion or coextrusion techniques, such as a blown bubble film processing technique, wherein the composition can be extruded in a molten state through an annular die and then expanded to form a uni-axial or biaxial orientation melt prior to being cooled to form a tubular, blown film, which can then be axially slit and unfolded to form a flat film. Films may be subsequently unoriented, uniaxially oriented, or biaxially oriented to the same or different extents. One or more of the layers of the film may be oriented in the transverse and/or longitudinal directions to the same or different extents.

VI. EXPERIMENTAL

Examples

The following examples are merely illustrative, and do not limit this disclosure in any way.

General Methods

Small Angle X-ray Diffraction Analysis

X-ray powder diffraction (XRD) patterns were collected on a PANalytical X'pert diffractometer equipped with an accessory for low angle measurements. XRD analyses were recorded using the Cu Ka ($=1.5405980\text{\AA}$) line in the 2Θ range from 0.5 to 10° with a step size of 0.0167° and a counting time of 1.2 s.

^{29}Si MAS NMR, ^{13}C CPMAS NMR and ^{27}Al MAS NMR spectra

The ^{29}Si MAS NMR spectra were recorded on a Varian InfinityPlus-400 spectrometer (operating at 9.4T) and Varian InfinityPlus-500 (operating at 11.74T), corresponding to ^{29}Si Larmor frequencies of 79.4 MHz and 99.2 MHz, respectively, with a 7.5 mm MAS probe heads using 5 kHz spinning, $4.0\mu\text{s}$ 90° pulses, and at least 60 s recycle delay, with proton decoupling during data acquisition. The ^{29}Si chemical shifts are referenced with respect to an external tetramethyl silane ($\delta_{\text{Si}} = 0.0$ ppm). The ^{13}C CPMAS NMR spectra were recorded on a Varian InfinityPlus-500 spectrometer corresponding to ^{13}C Larmor frequency of 125 MHz, with 1.6 mm MAS probe head using 40 kHz spinning, ^1H - ^{13}C cross-polarization (CP) contact time of 1 ms, a recycle delay of 1 s, with proton decoupling during data acquisition. The ^{13}C chemical shifts are

referenced with respect to an external tetramethyl silane ($\delta_C = 0.0$ ppm). The ^{27}Al MAS NMR spectra were recorded on a Varian InfinityPlus-500 corresponding to ^{27}Al Larmor frequency of 130.1 MHz using a 4 mm MAS probe head using 12 kHz spinning, with a $\pi/12$ radian pulse length, with proton decoupling during data acquisition, and a recycle delay of 0.3 s. The chemical shifts are referenced with respect to an external solution of $\text{Al}(\text{H}_2\text{O})_6^{3+}$ ($\delta_{\text{Al}} = 0.0$ ppm). All NMR spectra were recorded at room temperature using air for spinning.

^1H NMR

Products were characterized by ^1H NMR as follows: A Bruker 400 MHz Advance III Spectrometer was used.

In certain experiments, ^1H NMR data are collected at 22°C in a 5 mm probe using the 400 MHz Bruker spectrometer with deuterated solvent in which the sample is completely soluble. Data is recorded using a maximum pulse width of 45°, 8 seconds between pulses and signal averaging 16 transients.


Thermal Gravimetric Analysis (TGA)

Thermal stability results were recorded on Q5000 TGA. Ramp rate was 5°C/min, temperature range was from 25°C to 800°C. All the samples were tested in both air and nitrogen.

Example 1: Organosilica Material Syntheses using Formula $[\text{R}^3\text{R}^4\text{SiCH}_2]_3$ (IA) in Basic or Acidic Media


1A. Synthesis Using $[(\text{EtO})_2\text{SiCH}_2]_3$ in Basic Aqueous Medium – Without Surfactant.

A solution with 18.6 g of 30% NH_4OH and 23.76 g deionized water (DI) water was made. The pH of the solution was 12.55. To the solution, 3.0 g of 1,1,3,3,5,5-hexaethoxy-1,3,5-trisilacyclohexane ($[(\text{EtO})_2\text{SiCH}_2]_3$) was added, producing a mixture having the molar composition:



and stirred for 1 day at room temperature (20-25°C). The solution was transferred to an autoclave and aged at 80°C-90°C for 1 day to produce a gel. The gel was dried at 80°C in a vacuum to remove most of the water and then fully dried at 110°C for three hours. This produced **Sample 1A** as a clear solid, which was converted to white powder after grinding. No surface directing agent or porogen were used in this preparation.

The procedure was repeated with the following molar composition:



to produce **Sample 1B**. XRD, TGA weight loss studies, nitrogen adsorption/desorption analysis and ^{29}Si MAS NMR were performed on Sample 1A. Those data are reported in U.S. Pat. App. No. 14/965,992 filed on December 11, 2015.

1B. Comparative - Synthesis Using $[(\text{EtO})_2\text{SiCH}_2]_3$ in Basic Aqueous Medium—With Surfactant.

In this example, an organosilica material was prepared according to Landskron, K., et al., Science 302:266-269 (2003). Cetyltrimethylammonium bromide (CTMABr, 0.9 mmol, 0.32 g, Aldrich) was dissolved in a mixture of 2.16 g NH_4OH (35 wt%) and 3.96 g de-ionized water at 20°C to form a solution. $[(\text{EtO})_2\text{SiCH}_2]_3$ (1.26 mmol, 0.5 g) was added to the solution, producing a solution having the molar composition:

$$1.0 [(\text{EtO})_2\text{SiCH}_2]_3 : 17 \text{ OH} : 236 \text{ H}_2\text{O} : 0.7 \text{ CTMABr}$$

which was stirred for 1 day at 20°C and a white precipitate formed. Afterwards, the solution was aged for 1 day at 80°C . Then the precipitate was filtered off and washed with water. The sample was then stirred for 48 hours in a solution of 12 g HCl (36 wt%) and 80 g of methanol. The sample was then filtered off again and washed with MeOH , resulting in **Comparative Sample 2**.

XRD, TGA weight loss studies, and Nitrogen adsorption/desorption analysis were performed Comparative Sample 2. Those data are reported in U.S. Pat. App. No. 14/965,992 filed on December 11, 2015. Compared to the XRD pattern of Sample 1A, the XRD pattern of Comparative Sample 2 exhibits a shoulder at about 3 degrees 2θ . The surface area, average pore diameter, and pore volume obtained by the nitrogen adsorption/desorption analysis for Sample 1A and Comparative Sample 2 are shown below in Table 1.

Table 1

Material	BET (m^2/g)	Pore Diameter (nm)	Pore Volume (cc/g)
Comparative Sample 2	1520	3.02	1.07
Sample 1A	1410	3.18	0.92


Comparative Sample 2 was characterized with ^{29}Si MAS NMR as shown and those data are reported in U.S. Pat. App. No. 14/965,992 filed on December 11, 2015. As shown below in Table 2, Sample 1A had a higher silanol content (*i.e.*, 47%) compared to Comparative Sample 2 (*i.e.*, 41%).

Table 2

	D ₁	D ₂	T sites	Si(OH)/Si
Sample 1A (%)	96		4	47
	45.6	50.4		
Comparative Sample 2(%)	89		11	41
	34.7	54.3		

1C. Synthesis using [(EtO)₂SiCH₂]₃ in Acidic Aqueous Medium – Without Surfactant.

A 14 g HCl solution with a pH of 2 was made by adding 0.778 mol water and 0.14 mmol HCl. To the solution, 1.0 g (2.52 mmol) of [(EtO)₂SiCH₂]₃ was added producing a solution having the molar composition:



which was stirred for 1 day at room temperature (20-25°C). The solution was transferred to an autoclave and aged at 94°C for 1 day to produce a gel. The gel was dried in a vacuum at 120°C overnight (16-24 hours) to produce **Sample 3**. No surface directing agent or porogen were used.

XRD, Nitrogen adsorption/desorption were performed on Sample 3. Those data are reported in U.S. Pat. App. No. 14/965,992 filed on December 11, 2015.

1D. Synthesis using [(EtO)₂SiCH₂]₃ and [CH₃EtOSiCH₂]₃

A solution with 6.21 g of 30% NH₄OH and 7.92 g DI water was made. To the solution, 0.6 g of [(EtO)₂SiCH₂]₃ and 0.306 g of 1,3,5-trimethyl-1,3,5-triethoxy-1,3,5-trisilacyclohexane ([CH₃EtO₂SiCH₂]₃) was added producing a solution having the molar composition:



which was stirred for 1 day at room temperature (20-25°C). The solution was transferred to an autoclave and aged at 90°C for 1 day to produce a gel. The gel was dried in a vacuum at 120°C overnight (16-24 hours) and **Sample 4A** was obtained. No structure directing agent or porogen were used.

Nitrogen Adsorption/Desorption Analysis

This above preparation method was repeated, except the relative ratio of [(EtO)₂SiCH₂]₃ (Reagent 1) to [CH₃EtO₂SiCH₂]₃ (Reagent 2) was varied. Nitrogen adsorption/desorption analysis was performed on each material and the results for each material is given below in Table

3.

Table 3

Material	Reagent 1:Reagent 2	BET (m ² /g)	V (cc/g)	Pore Diameter (nm)
Sample 1A	5:0	1410	0.915	3.18
Sample 4A	3:2	819	1.52	7.39
Sample 4B	4:1	1100	1.14	4.17
Sample 4C	2:3	460	1.09	13.9
Sample 4D	0:5	1.81	7.73E-03	68.8

As Reagent 2 increased, the average pore diameter was observed to increase, which without being bound by theory may be due to Reagent 2 containing less reactive –OR groups compared to Reagent 1. The porosity of the material decreased as Reagent 2 was greater than 60% (mol ratio). The materials in Table 3 were characterized with ²⁹Si MAS NMR, and those data are reported in U.S. Pat. App. No. 14/965,992 filed on December 11, 2015.

Example 2: Calcining Study

Sample 1A was calcined at temperatures of 300°C, 400°C, 500°C, and 600°C in air to obtain Samples 1A(i), 1A(ii), 1A(iii) and 1A(iv), respectively. After calcining at 500°C Sample 1A(iii) still exhibited good mesoporosity (*e.g.*, 3 nm pore diameter and over 600 m²/g surface area).

Example 3: Synthesis of Catalyst System Including Organosilica Support Reacted with Alumoxane Activator and Catalyst

Three mesoporous organosilica materials, Samples 1A, 3, and 4A are formed as described in Example 1. All materials to be tested as catalyst supports (**Samples 1A, 3, and 4A**) were dried at 250°C overnight in a muffle furnace equipped with nitrogen purge. The dried organosilica supports were removed from the furnace while hot and allowed to cool under vacuum and then stored inside a nitrogen filled box.

In an initial experiment, **Sample 1A** was reacted with methyl alumoxane (MAO) to obtain an initial understanding of MAO reactivity with the organosilica support material and the level of reactivity –OH groups. MAO is methyl alumoxane (30 wt% in toluene) obtained from Albemarle. A first portion of the **Sample 1A** was used as received and reacted with MAO. High levels of MAO were found to react with **Sample 1A** organosilica support material. A second portion of the **Sample 1A** material was calcined at 200°C prior to reaction with the MAO. These activated supports can then be reacted with catalyst.

3A. Organosilica Material Reacted with Alumoxane Activator (Support 5)

1.0250 g of **Sample 1A** was slurried in 20 mL of toluene. 4.680 g of MAO (30% wt solution in toluene) was added to the slurry. The slurry was heated to 70°C for 1hr. ¹H NMR analysis did not show any excess MAO. An additional batch of MAO (2.4965 g, 30 wt % solution in toluene) was then added to the slurry. The slurry was stirred for another 20 minutes. A second ¹H NMR showed a slight excess of MAO. The slurry was filtered, washed three times with 15 mL of toluene each, washed twice with pentane, and dried under vacuum to give 2.87 g of white solid. The resultant **Sample 5** is an organosilica support material reacted with MAO activator.

3B. Calcined Organosilica Activation with Alumoxane (Support 4)

0.5992 g **Sample 1A** was calcined at 200°C overnight under vacuum and was then slurried in 17 mL of toluene in a 50 ml Celstir™ flask. 1.363 g of MAO (a 30%wt solution in toluene) was added to the slurry. The slurry was heated to 70°C for 1 hr. ¹H NMR analysis showed no MAO in solution. A second batch of MAO (1.0135g) was added to the slurry. The slurry was stirred for another 30 minutes. A second ¹H NMR analysis revealed excess MAO. The slurry was filtered, washed three times with 15mL of toluene each, washed twice with pentane, and dried under vacuum to give 1.07 g of white solid. The resultant **Sample 6** is a calcined organosilica support material reacted with MAO activator.

Example 4: Organosilica Support Material Reacted with Alumoxane Activator

1.0 g of **Sample 3** was slurried in 20 mL of toluene in a 50 mL Celstir™ flask. 2.5 g of a 30 wt % MAO solution in toluene was slowly added to the slurry. The slurry was stirred for 1 hr at 70°C. The slurry was filtered, rinsed with toluene, 10 mL, and dried under vacuum to give 1.15 g of white solid (**Sample 7**).

Example 5: Synthesis of Catalyst System Including Organosilica Support Reacted with

Alumoxane Activator and Catalyst

Example 5A. Activation with Alumoxane

2.55 g of **Sample 4A** was slurried in about 20 mL of toluene in a 50 mL round bottom flask with a stir bar. While stirring, 9.9 mls of a 30 wt % MAO solution in toluene was added in four portions over several minutes. The slurry was heated to 70°C for 1.5 hours. The solid was isolated by filtration, washed 2 x 20 mL with toluene and 2 x 20 mL pentane, then dried under

vacuum at room temperature. The yield was 3.51 grams. The resultant **Sample 8** is an organosilica support material reacted with MAO activator.

Example 5B. Activation with Alumoxane

1.0 g of **Sample 4A** was slurried in about 20 mL of toluene in a 50 mL Celstir™ flask.



- 5 While stirring, 9.9 mls of a 30 wt % MAO solution in toluene was added in four portions over several minutes. The slurry was heated to 70°C for 1 hour. The solid was isolated by filtration, washed 2 x 20 mL with toluene and 2 x 20 mL pentane, then dried under vacuum at room temperature. The yield was 1.86 grams. The resultant **Sample 9** is an organosilica support material reacted with MAO activator.

10 Example 5C. Reaction with Catalyst

Solid catalyst was weighed out into a 20 mL scintillation vial; approximately 5 mL toluene was added. With rapid stirring, the catalyst support of **Sample 8** was added. The slurry was stirred for 15 – 30 minutes; the solid was isolated by filtration, washed with about 5 mL of toluene and dried under vacuum at room temperature for about 30 minutes. The amount and type


- 15 of catalyst is indicated in Table 4.

Table 4

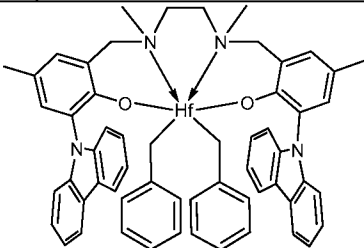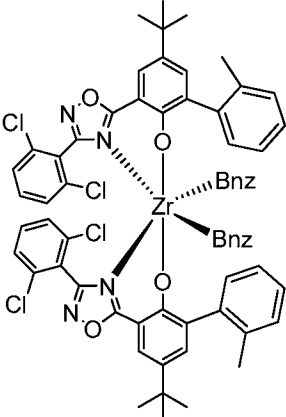Samples	Catalyst	Catalyst (mg)	Catalyst (μmol)	Catalyst Support (mg)
Sample 10	 D	8.3	8.2	0.20
Sample 11	 F	12.0	10.2	0.25

Example 6: Synthesis of Catalyst System Including Organosilica Support Reacted with Alumoxane Activator and Catalyst

- 5 138 mg of **Sample 9** was slurried in approximately 10 mL of toluene using a CelstirTM flask. Next, 5.3 mg (5.5 μmol) of Catalyst G:

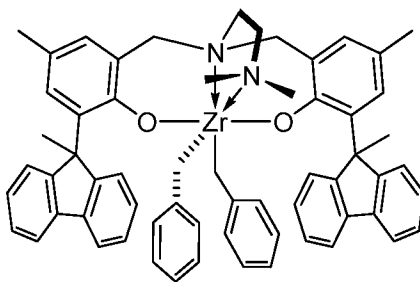


G

was added to the CelstirTM vessel from a stock solution (1 mg/g toluene). This mixture was stirred for three hours, after which the mixture was filtered using a glass frit. It was washed with

two 10 mL portions of hexane and then dried under vacuum for 2 hrs. The yield was 62 mg of off-white powder (**Sample 12**).

Example 7: Synthesis of Catalyst System Including Organosilica Support Reacted with Alumoxane Activator and Catalyst

213 mg of **Sample 9** was slurried in approximately 10 mL of toluene using a Celstir™ vessel. Next, 9.6 mg (8.5 μmol) of Catalyst I:

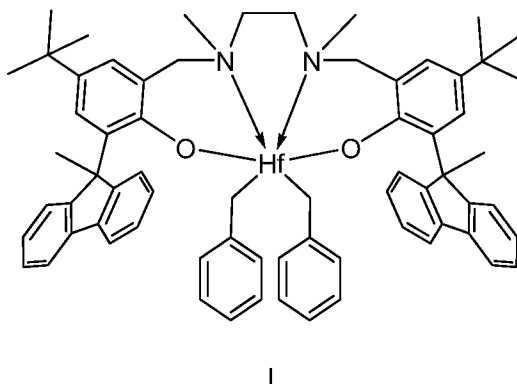

was added to the Celstir™ vessel. This mixture was stirred for three hours, after which the mixture was filtered using a glass frit. It was washed with two 10 mL portions of hexane and then dried under vacuum overnight. The yield was 141 mg of off-white powder (**Sample 13**).

In certain aspects, the organosilica material catalyst supports prepared in accordance with certain aspects of the present disclosure increase a catalyst activity by greater than or equal to about 100% as compared to a convention support, or greater than about 150%, or greater than about 200%, or greater than about 250%, or greater than about 300%, and in certain variations, catalyst activity is increased by greater than about 350% as compared to activity of the same catalyst on a conventional catalyst support (e.g., SMAO support).

VII. Various Embodiments

The invention can additionally or alternately include one or more of the following lettered embodiments:


Embodiment A: A catalyst system comprising (1) one or more olefin polymerization catalyst compounds; (2) a catalyst support comprising an organosilica material that is a polymer of at least one monomer of Formula $[Z^1OZ^2SiCH_2]_3$ (I), wherein Z^1 represents a hydrogen atom, a C_1 - C_4 alkyl group, or a bond to a silicon atom of another monomer and Z^2 represents a hydroxyl group, a C_1 - C_4 alkoxy group, a C_1 - C_6 alkyl group, or an oxygen atom bonded to a silicon atom of another monomer; and (3) an activator.

Embodiment B: A catalyst system comprising (1) one or more olefin polymerization catalyst compounds comprising a compound having at least one nitrogen linkage and at least one oxygen linkage to a transition metal; (2) a catalyst support comprising an organosilica material that is a polymer of at least one monomer of Formula $[Z^1OZ^2SiCH_2]_3$ (I), wherein Z^1 represents a hydrogen atom, a C₁-C₄ alkyl group, or a bond to a silicon atom of another monomer and Z^2 represents a hydroxyl group, a C₁-C₄ alkoxy group, a C₁-C₆ alkyl group, or an oxygen atom bonded to a silicon atom of another monomer; and (3) an activator.

Embodiment C: The catalyst system of Embodiment B, where (1) the one or more olefin polymerization catalyst compounds comprise ONNO-type transition metal catalysts, ONYO-Type transition metal catalysts, oxadiazole transition metal catalysts, and combinations thereof.

Embodiment D: A process to produce polymer comprising: i) contacting, in the gas phase or slurry phase, one or more olefin monomers, with a catalyst system comprising: 1) one or more olefin polymerization catalyst compounds; 2) a catalyst support comprising an organosilica material that is a polymer of at least one monomer of Formula $[Z^1OZ^2SiCH_2]_3$ (I), wherein Z^1 represents a hydrogen atom, a C₁-C₄ alkyl group, or a bond to a silicon atom of another monomer and Z^2 represents a hydroxyl group, a C₁-C₄ alkoxy group, a C₁-C₆ alkyl group, or an oxygen atom bonded to a silicon atom of another monomer; and 3) an optional activator. The method further comprises ii) obtaining a polymer.

Embodiment E: A catalyst system comprising (1) one or more olefin polymerization catalyst compounds comprising a compound having at least one nitrogen linkage and at least one oxygen linkage to a transition metal; (2) a catalyst support comprising an organosilica material that is a polymer of at least one monomer of Formula:

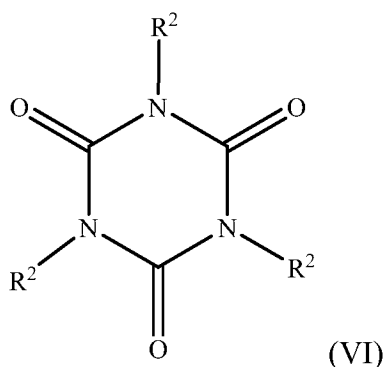

where each R^2 is a $Z^{13}OZ^{14}Z^{15}SiZ^{16}$ group, and Z^{13} represents a hydrogen atom, a C₁-C₄ alkyl group, or a bond to a silicon atom of another monomer unit; Z^{14} and Z^{15} each independently

represent a hydroxyl group, a C₁-C₄ alkyl group, a C₁-C₄ alkoxy group, or an oxygen atom bonded to a silicon atom of another monomer unit; and Z¹⁶ represents a C₁-C₈ alkylene group bonded to a nitrogen atom of the cyclic polyurea; and (3) an optional activator.

Embodiment F: The process of Embodiment E, where the organosilica material further comprises at least one monomer selected from the group consisting of:

a monomer of Formula $[Z^1OZ^2SiCH_2]_3$ (I), wherein Z¹ represents a hydrogen atom, a C₁-C₄ alkyl group, or a bond to a silicon atom of another monomer and Z² represents a hydroxyl group, a C₁-C₄ alkoxy group, a C₁-C₆ alkyl group, or an oxygen atom bonded to a silicon atom of another monomer;

a monomer of Formula $Z^3OZ^4Z^5Z^6Si$ (II), wherein Z³ represents a hydrogen atom or a C₁-C₄ alkyl group, or a bond to a silicon atom of another monomer; and Z⁴, Z⁵ and Z⁶ are each independently selected from the group consisting of a hydroxyl group, a C₁-C₄ alkyl group, a C₁-C₄ alkoxy group, a nitrogen-containing C₁-C₁₀ alkyl group, a nitrogen-containing heteroaralkyl group, and a nitrogen-containing optionally substituted heterocycloalkyl group, and an oxygen atom bonded to a silicon atom of another monomer;

a monomer of Formula $Z^7Z^8Z^9Si-R^1-SiZ^7Z^8Z^9$ (III), wherein Z⁷ represents a hydroxyl group, a C₁-C₄ alkoxy group, or an oxygen atom bonded to a silicon atom of another comonomer; Z⁸ and Z⁹ each independently represent a hydroxyl group, a C₁-C₄ alkoxy group, a C₁-C₄ alkyl group, or an oxygen bonded to a silicon atom of another monomer; and R¹ is selected from the group consisting of a C₁-C₈ alkylene group, a C₂-C₈ alkenylene group, a C₂-C₈ alkynylene group, a nitrogen-containing C₂-C₁₀ alkylene group, an optionally substituted C₆-C₂₀ aralkyl and an optionally substituted C₄-C₂₀ heterocycloalkyl group;

a trivalent metal oxide monomer of Formula $M^1(OZ^{10})_3$ (IV), wherein M¹ represents a Group 13 metal and Z¹⁰ represents a hydrogen atom, a C₁-C₆ alkyl or a bond to a silicon atom of another monomer;

a trivalent metal oxide monomer of Formula $(Z^{11}O)_2M^2-O-Si(OZ^{12})_3$ (V), wherein M² represents a Group 13 metal and Z¹¹ and Z¹² each independently represent a hydrogen atom, a C₁-C₆ alkyl group, or a bond to a silicon atom of another monomer; and any combinations thereof.

Embodiment G: A process to produce a polymer comprising i) contacting, in the gas phase or slurry phase, one or more olefin monomers, with the catalyst system of any of Embodiments E-F; and ii) obtaining a polymer.

5 All documents described herein are incorporated by reference herein, including any priority documents and/or testing procedures to the extent they are not inconsistent with this text.

CLAIMS

What is claimed is:

1. A catalyst system comprising:

(1) one or more olefin polymerization catalyst compounds comprising a compound having at least one nitrogen linkage and at least one oxygen linkage to a transition metal;

(2) a catalyst support comprising an organosilica material that is a polymer of at least one monomer of Formula $[Z^1OZ^2SiCH_2]_3$ (I), wherein Z^1 represents a hydrogen atom, a C₁-C₄ alkyl group, or a bond to a silicon atom of another monomer and Z^2 represents a hydroxyl group, a C₁-C₄ alkoxy group, a C₁-C₆ alkyl group, or an oxygen atom bonded to a silicon atom of another monomer; and (3) an optional activator.


2. The catalyst system of claim 1, wherein Z^2 represents a hydroxyl group, a C₁-C₄ alkoxy group, or an oxygen atom bonded to a silicon atom of another monomer.

3. The catalyst system of claim 1 or 2, wherein Z^1 represents a hydrogen atom, methyl, ethyl or a bond to a silicon atom of another monomer and Z^2 represents a hydroxyl group, methyl, ethyl, ethoxy, methoxy, or an oxygen bonded to a silicon atom of another monomer.

4. The catalyst system of claim 1, 2 or 3, wherein the polymer further comprises a second distinct monomer of Formula $[Z^1OZ^2SiCH_2]_3$ (I).

5. The catalyst system of claim 1, 2, 3, or 4, wherein the organosilica material further comprises at least one monomer selected from the group consisting of: i) a monomer of Formula $Z^3OZ^4Z^5Z^6Si$ (II), wherein Z^3 represents a hydrogen atom or a C₁-C₄ alkyl group, or a bond to a silicon atom of another monomer; and Z^4 , Z^5 and Z^6 are each independently selected from the group consisting of a hydroxyl group, a C₁-C₄ alkyl group, a C₁-C₄ alkoxy group, a nitrogen-containing C₁-C₁₀ alkyl group, a nitrogen-containing heteroaralkyl group, and a nitrogen-containing optionally substituted heterocycloalkyl group, and an oxygen atom bonded to a silicon atom of another monomer; ii) a monomer of Formula $Z^7Z^8Z^9Si-R^1-SiZ^7Z^8Z^9$ (III), wherein Z^7 represents a hydroxyl group, a C₁-C₄ alkoxy group, or an oxygen atom bonded to a silicon atom of another comonomer; Z^8 and Z^9 each independently represent a hydroxyl group, a

- C₁-C₄ alkoxy group, a C₁-C₄ alkyl group, or an oxygen bonded to a silicon atom of another monomer; and R¹ is selected from the group consisting of a C₁-C₈ alkylene group, a C₂-C₈ alkenylene group, a C₂-C₈ alkynylene group, a nitrogen-containing C₂-C₁₀ alkylene group, an optionally substituted C₆-C₂₀ aralkyl and an optionally substituted C₄-C₂₀ heterocycloalkyl group; iii) a trivalent metal oxide monomer of Formula M¹(OZ¹⁰)₃ (IV), wherein M¹ represents a Group 13 metal and Z¹⁰ represents a hydrogen atom, a C₁-C₆ alkyl or a bond to a silicon atom of another monomer; iv) a trivalent metal oxide monomer of Formula (Z¹¹O)₂M²-O-Si(OZ¹²)₃ (V), wherein M² represents a Group 13 metal and Z¹¹ and Z¹² each independently represent a hydrogen atom, a C₁-C₆ alkyl group, or a bond to a silicon atom of another monomer; v) a cyclic polyurea monomer of Formula

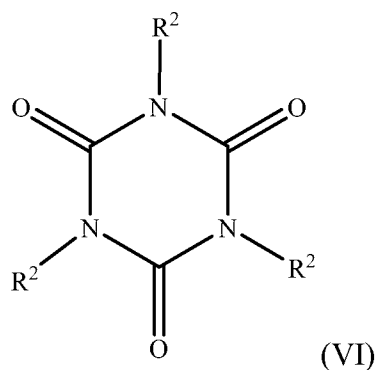


- wherein each R² is a Z¹³OZ¹⁴Z¹⁵SiZ¹⁶ group, wherein Z¹³ represents a hydrogen atom, a C₁-C₄ alkyl group, or a bond to a silicon atom of another monomer unit; Z¹⁴ and Z¹⁵ each independently represent a hydroxyl group, a C₁-C₄ alkyl group, a C₁-C₄ alkoxy group, or an oxygen atom bonded to a silicon atom of another monomer unit; and Z¹⁶ represents a C₁-C₈ alkylene group bonded to a nitrogen atom of the cyclic polyurea; and any combinations thereof.

6. The catalyst system of any of claims 1 to 5, wherein the catalyst support comprising the organosilica material has: i) an average pore diameter between about 2 nm and about 50 nm; ii) a pore volume about 0.1 cm³/g to about 10 cm³/g; and/or iii) a surface area of about 100 m²/g to about 2,500 m²/g.

7. The catalyst system of any of claims 1 to 6, wherein the catalyst support comprising the
 5 organosilica material has an X-Ray Diffraction Spectrum exhibiting substantially no peaks above
 4 degrees 2θ , and/or is made using substantially no added structure directing agent or porogen.

8. The catalyst system of any of claims 1 to 7, wherein the one or more olefin
 polymerization catalyst compounds comprise at least one catalyst compound selected from the
 10 group consisting of:

(A) a compound represented by Formula (VII):

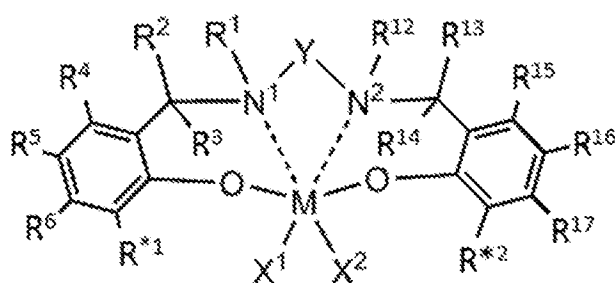


(VII)

wherein: each solid line represents a covalent bond and each dashed line represents a
 coordinative link; wherein M is a Group 3, 4, 5, or 6 transition metal; N^1 and N^2 are nitrogen;

O is oxygen; each of X^1 and X^2 is, independently, a univalent C_1 to C_{20} hydrocarbyl
 radical, a functional group comprising elements from Groups 13 to 17, or X^1 and X^2 join together
 to form a C_4 to C_{62} cyclic or polycyclic ring structure, provided however when M is trivalent X^2
 is not present; each R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , and R^{17} is, independently,
 25 hydrogen, a C_1 to C_{40} hydrocarbyl radical, a C_1 to C_{40} substituted hydrocarbyl radical, two or
 more of R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , and R^{17} independently join together to form
 a C_4 to C_{62} cyclic or polycyclic ring structure, or a combination thereof; wherein R^{*1} and R^{*2}
 independently comprise a bulky functional group, an electron withdrawing group, or a
 combination thereof; and Y is a divalent C_1 to C_{20} hydrocarbyl radical;

(B) a compound represented by Formula (VIII):

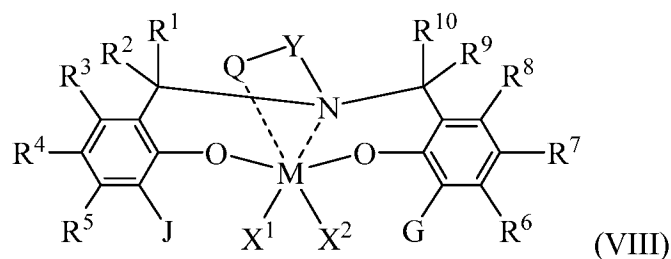


wherein:

M is a Group 4 transition metal; X^1 and X^2 are, independently, a univalent C_1 to C_{20} hydrocarbyl radical, a C_1 to C_{20} substituted hydrocarbyl radical, a heteroatom or a heteroatom-containing group, or X^1 and X^2 join together to form a C_4 to C_{62} cyclic or polycyclic ring structure; each $R^1, R^2, R^3, R^4, R^5, R^6, R^7, R^8, R^9$, and R^{10} is independently a hydrogen, a C_1 to C_{40} hydrocarbyl radical, a C_1 to C_{40} substituted hydrocarbyl radical, a heteroatom or a heteroatom-containing group, or two or more of R^1 to R^{10} may independently join together to form a C_4 to C_{62} cyclic or polycyclic ring structure, or a combination thereof; and Q is a neutral donor group;


J is a C_7 to C_{60} fused polycyclic group, which optionally comprises up to 20 atoms from Groups 15 and 16, where at least one ring is aromatic and where at least one ring, which may or may not be aromatic, has at least five members; G is as defined for J or may be hydrogen, a C_1 to C_{60} hydrocarbyl radical, a C_1 to C_{60} substituted hydrocarbyl radical, a heteroatom or a heteroatom-containing group, or may independently form a C_4 to C_{60} cyclic or polycyclic ring structure with R^6, R^7 , or R^8 or a combination thereof;

(C) a compound represented by Formula (IX).

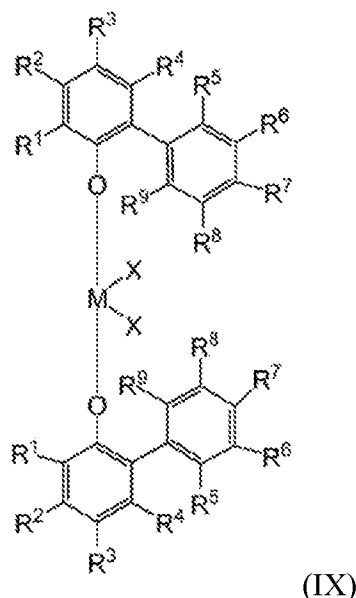

wherein:

- 5 M is selected from the group consisting of Ti, Zr, and Hf; at least one of R¹ through R⁹ is substituted with a moiety having the following structure (X):




- where structure (X) is attached at any one of R¹ through R⁹ at the R¹⁰ or R¹¹ position; at least one of nitrogen N¹ or N² of Structure (X) forms a dative bond with metal M; and each of R¹ through R¹¹ are independently selected from the group consisting of hydride, hydrocarbyl, lower hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, alkyl, lower alkyl, substituted alkyl, heteroalkyl, alkenyl, lower alkenyl, substituted alkenyl, heteroalkenyl, alkynyl, lower alkynyl, substituted alkynyl, heteroalkynyl, alkoxy, lower alkoxy, aryloxy, hydroxyl, alkylthio, lower alkyl thio, arylthio, thioxy, aryl, substituted aryl, heteroaryl, aralkyl, aralkylene, alkaryl, alkaryl, alkylene, halide, haloalkyl, haloalkenyl, haloalkynyl, heteroalkyl, heterocycle, heteroaryl, heteroatom-containing group, silyl, boryl, phosphino, phosphine, amino, and amine; X is a
- 20
- 25 leaving group; and combinations thereof.

9. The catalyst system of claim 8, wherein the one or more olefin polymerization catalyst compounds comprise a catalyst compound of Formula (VII), wherein X^1 and X^2 are benzyl radicals and Y is selected from the group consisting of $-\text{CH}_2\text{CH}_2-$, 1,2-cyclohexylene, and $-\text{CH}_2\text{CH}_2\text{CH}_2-$.

5

10. The catalyst system of claim 8 or 9, wherein the one or more olefin polymerization catalyst compounds comprise a catalyst compound of Formula (VII), wherein R^{*1} and R^{*2} each comprises a cyclopentadienyl radical having a structure according to Formula:

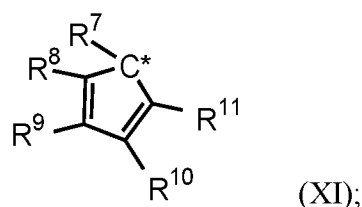


10 wherein:


C^* indicates an attachment carbon of the radical;

R^7 is a C_1 to C_{40} hydrocarbyl radical or a substituted C_1 to C_{40} hydrocarbyl radical; and

each of R^8 , R^9 , R^{10} , and R^{11} is, independently, a hydrogen, a C_1 to C_{40} hydrocarbyl radical, a substituted C_1 to C_{40} hydrocarbyl radical, two or more of R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 , R^8 , R^9 , R^{10} , R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , and R^{17} from Formula (VII) independently join together to form a C_4 to C_{62} cyclic or polycyclic ring structure, or a combination thereof.

11. The catalyst system of claim 8, wherein the one or more olefin polymerization catalyst compounds comprise a catalyst compound of Formula (VIII), wherein the complex is represented by the Formulas (XVIII) or (XIX):

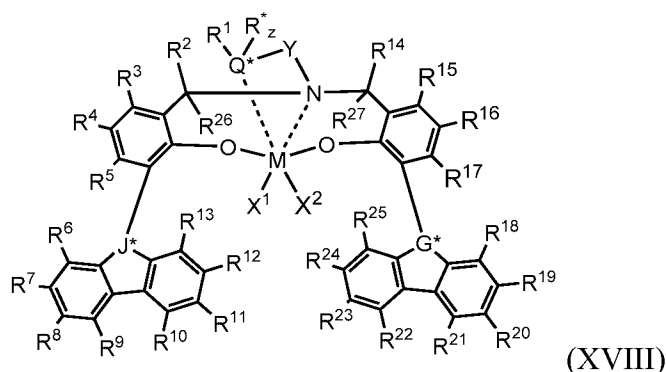


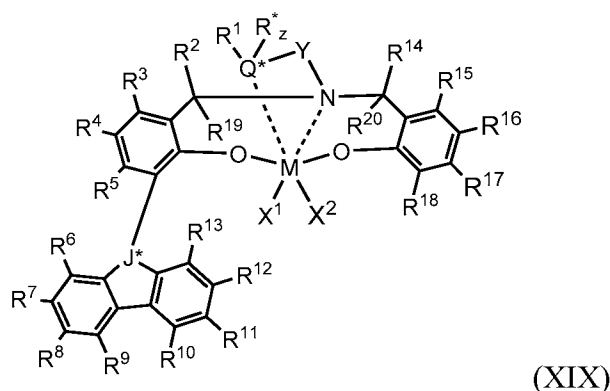

wherein:


- M is Hf, Zr, or Ti; X^1 , X^2 , R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 , R^8 , R^9 , R^{10} , and Y are as defined in claim 1; each R^* , R'' , R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} , R^{20} , R^{21} , R^{22} , R^{23} , R^{24} , R^{25} , R^{26} , and R^{27} is, independently, a hydrogen, a C_1 to C_{40} hydrocarbyl radical, a C_1 to C_{40} substituted hydrocarbyl radical, a functional group comprising elements from Groups 13 to 17, or two or more of R^1 to R^{28} may independently join together to form a C_4 to C_{62} cyclic or polycyclic ring structure, or a combination thereof, or R^1 and R^* may independently join together to form a five- to eight-membered heterocycle; Q^* is a group 15 or 16 atom; z is 0 or 1; J^* is CR'' or N; and G^* is CR'' or N.

12. The catalyst system of claim 8, wherein the one or more olefin polymerization catalyst compounds comprise a catalyst compound of Formula (VIII), wherein the catalyst complex is represented by Formulas (IV) or (V):

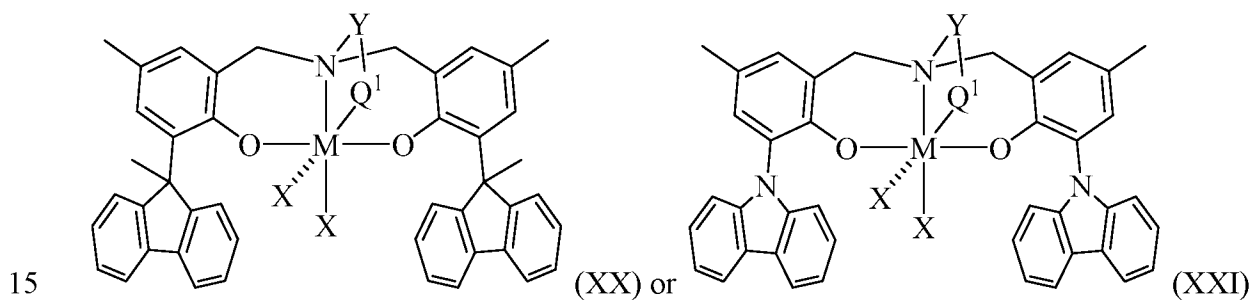

where Y is a divalent C_1 to C_3 hydrocarbyl, Q^1 is NR'^2 , OR' , SR' , PR'_2 , where R' is as defined for R^1 in claim 1, M is Zr, Hf, or Ti and each X is, independently, as defined for X^1 in claim 1.

13. The catalyst system of claim 8, wherein the one or more olefin polymerization catalyst compounds comprise a catalyst compound of Formula (IX), wherein the catalyst complex is represented by Formula (XXII):

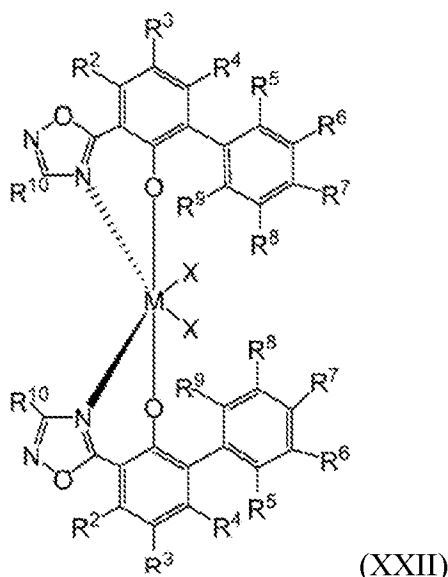

where M is selected from the group consisting of Ti, Zr, and Hf;

each of R² through R¹⁰ are independently selected from the group consisting of hydride, hydrocarbyl, lower hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, alkyl, lower alkyl, substituted alkyl, heteroalkyl, alkenyl, lower alkenyl, substituted alkenyl, heteroalkenyl, alkynyl, lower alkynyl, substituted alkynyl, heteroalkynyl, alkoxy, lower alkoxy, aryloxy, hydroxyl, alkylthio, lower alkyl thio, arylthio, thioxy, aryl, substituted aryl, heteroaryl, aralkyl, aralkylene, alkaryl, alkaryl, halide, haloalkyl, haloalkenyl, haloalkynyl, heteroalkyl, heterocycle, heteroaryl, heteroatom-containing group, silyl, boryl, phosphino, phosphine, amino, and amine; and X is least one leaving group.

14. A process to produce polymer comprising:

i) contacting, in the gas phase or slurry phase, one or more olefin monomers, with the catalyst system of any of claims 1 to 13.

15. The process of claim 14, wherein the polymer is an ethylene polymer or a propylene polymer.

16. The process of claim 14 or 15, wherein the process occurs at a temperature of from about 0°C to about 300°C, at a pressure in the range of from about 0.35 MPa to about 10 MPa, and at a time up to 300 minutes.

5 17. The process of claim 14, 15, or 16, wherein the one or more olefin monomers comprise ethylene and one or more comonomer selected from propylene, butene, pentene, hexene, heptene, octene, nonene, decene, undecene, dodecene or a mixtures thereof.

10 18. The process of claim 14, 15, 16 or 17 wherein the 2) catalyst support comprising an organosilica material comprises a plurality of mesopores having an average an average pore diameter between about 2 nm and about 50 nm and the polymerization occurs within the mesopores.

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/065384

A. CLASSIFICATION OF SUBJECT MATTER

INV. C08F4/02 C08F4/64 C08F210/02 C08G77/60
ADD. C08F4/659

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C08F C08G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, CHEM ABS Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	BIJAL KOTTUKKAL BAHULEYAN ET AL: "One-pot synthesis of spherical periodic mesoporous organosilica supported catalyst bearing Ni(II) [alpha]-diimine complexes for ethylene polymerization", CATALYSIS COMMUNICATIONS, vol. 11, no. 4, 15 December 2009 (2009-12-15), pages 252-256, XP055253873, NL ISSN: 1566-7367, DOI: 10.1016/j.catcom.2009.10.005 the whole document ----- -/--	1-18



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

7 March 2016

Date of mailing of the international search report

17/03/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Gamb, Véronique

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/065384

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2007/173401 A1 (LANDSKRON KAI M M [CA] ET AL) 26 July 2007 (2007-07-26) figure 1B paragraph [0002] examples 1-2, 4-6 claims 1,22,23,26,40 -----	1-18
A	US 2014/256893 A1 (HAGADORN JOHN R [US] ET AL) 11 September 2014 (2014-09-11) paragraph [0035] page 5, table 1, complex 2 example 2, table 3, runs 13-18 -----	1-18
A	US 2002/019503 A1 (KOL MOSHE [IL] ET AL) 14 February 2002 (2002-02-14) examples 4-10 claims 1-3, 23-25 -----	1-18
A	LIU Q ET AL: "SYNTHESIS OF POLYCARBOSILANE/SILOXANE HYBRID POLYMERS AND THEIR PYROLYTIC CONVERSION TO SILICON OXYCARBIDE CERAMICS", CHEMISTRY OF MATERIALS, AMERICAN CHEMICAL SOCIETY, US, vol. 9, no. 11, 1 November 1997 (1997-11-01), pages 2434-2441, XP000729285, ISSN: 0897-4756, DOI: 10.1021/CM970316E page 2435, right-hand column, fourth paragraph page 2436, right-hand column, scheme 2 -----	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/065384

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007173401	A1	26-07-2007	NONE

US 2014256893	A1	11-09-2014	CN 105008416 A 28-10-2015
			EP 2964682 A1 13-01-2016
			SG 11201506133V A 29-09-2015
			US 2014256893 A1 11-09-2014
			WO 2014137927 A1 12-09-2014

US 2002019503	A1	14-02-2002	US 2002019503 A1 14-02-2002
			WO 03006512 A1 23-01-2003
