



- (51) **International Patent Classification:**
G05D 1/00 (2006.01) *B64C 13/16* (2006.01)
- (21) **International Application Number:**
PCT/CN2015/082524
- (22) **International Filing Date:**
26 June 2015 (26.06.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** SZ DJI TECHNOLOGY CO., LTD.
[CN/CN]; 6F, HKUST SZ IER BLdg., No.9 Yuexing 1st Rd., Hi-Tech Park (South), Nanshan District, Shenzhen, Guangdong 518057 (CN).
- (72) **Inventors:** YAN, Jiaqi; 6F, HKUST SZ IER BLdg., No.9 Yuexing 1st Rd. Hi-Tech Park(South), Nanshan District, Shenzhen, Guangdong 518057 (CN). ZHOU, You; 6F, HKUST SZ IER BLdg., No.9 Yuexing 1st Rd. Hi-Tech Park(South), Nanshan District, Shenzhen, Guangdong 518057 (CN).
- (74) **Agent:** SHENZHEN SCIENBIZIP INTELLECTUAL PROPERTY AGENCY CO., LTD.; 9F, Rongqun Building, No.83 Longguan East Rd., Longhua New Dist., Shenzhen, Guangdong 518109 (CN).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** SYSTEM AND METHOD FOR SELECTING AN OPERATION MODE OF A MOBILE PLATFORM

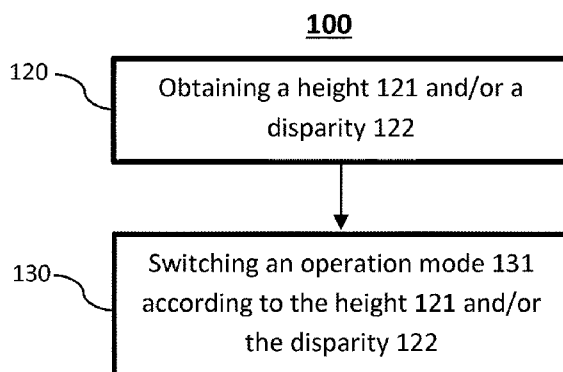


Fig.1

(57) **Abstract:** A system for selecting an operation mode of a mobile platform and methods for making and using same. The system can determine a height of the mobile platform and a disparity between first and second images from the perspective of the mobile platform. Based upon the determined height and image disparity, an appropriate operation mode of the mobile platform can be selected from among multiple operation modes of the mobile platform. These operation modes can be categorized, for example, based on the height and/or image disparity. Thereby, the system advantageously can utilize the different operation modes of the mobile platform and can meet precision requirements for selecting an operation mode of the mobile platform within a wide range of heights. The system, in another aspect, can operate the mobile platform based upon images acquired at different times and with data acquired via an Inertial Measurement Unit.

Description

Title of Invention: SYSTEM AND METHOD FOR SELECTING AN OPERATION MODE OF A MOBILE PLATFORM FIELD

[0001] The disclosed embodiments relate generally to mobile platform operations and more particularly, but not exclusively, to systems and methods for operating a mobile platform within a wide range of heights.

BACKGROUND

[0002] Unmanned Aerial Vehicles (“UAVs”) are commonly navigated and otherwise operated via vision technology. However, performance and precision of the vision technology are limited and can vary in accordance with height of the UAV.

[0003] Currently-available vision technology can only ensure its performance and precision within a certain height range. At lower or higher heights, the precision for operating the mobile platform is limited and cannot be ensured because of inherent shortcomings of the vision technology.

[0004] In view of the foregoing reasons, there is a need for a system and method for effectively operating the mobile platform in a wide range of heights.

SUMMARY

[0006] In accordance with a first aspect disclosed herein, there is set forth a method for selecting an operation mode of a mobile platform, comprising:

[0007] detecting a height grade of the mobile platform; and

[0008] selecting an operation mode of the mobile platform according to a result of the detecting.

[0009] In an exemplary embodiment of the disclosed methods, detecting the height grade comprises determining a height of the mobile platform and/or a disparity between first and second images of a remote object from the perspective of the mobile platform.

[0010] In another exemplary embodiment of the disclosed methods, determining comprises obtaining the height via a barometer, an ultrasonic detector and/or a Global Positioning System (“GPS”).

[0011] In another exemplary embodiment of the disclosed methods, determining comprises acquiring the disparity between the first and second images of the object as captured by a binocular imaging system associated with the mobile platform.

[0012] Exemplary embodiments of the disclosed methods further comprise categorizing the operation modes based on values of the height and/or disparity.

[0013] Exemplary embodiments of the disclosed methods further comprise initiating the mobile platform to operate at a first height mode.

- [0014] In an exemplary embodiment of the disclosed methods, the first height mode comprises a very low altitude monocular mode.
- [0015] Exemplary embodiments of the disclosed methods further comprise providing a distance sensor of the moving platform to assist the very low altitude monocular mode.
- [0016] In an exemplary embodiment of the disclosed methods, selecting the operation mode comprises switching the operation mode based on the height grade, and wherein the height grade is determined based on at least one of the determined height and the determined disparity.
- [0017] In another exemplary embodiment of the disclosed methods, selecting the operation mode comprises switching the mobile platform to a second height mode when the height is greater than a first height threshold.
- [0018] In another exemplary embodiment of the disclosed methods, selecting the operation mode comprises switching the mobile platform to a second height mode when the disparity is less than a first disparity threshold.
- [0019] In another exemplary embodiment of the disclosed methods, selecting the operation mode comprises switching the mobile platform to a second height mode when the height is greater than a first height threshold and the disparity is less than the first disparity threshold.
- [0020] In another exemplary embodiment of the disclosed methods, switching the mobile platform to a second height mode comprises selecting a stereo vision mode with a first resolution.
- [0021] In another exemplary embodiment of the disclosed methods, selecting the operation mode comprises switching the mobile platform to a third height mode when the disparity is less than or equal to a third disparity threshold.
- [0022] In another exemplary embodiment of the disclosed methods, switching the mobile platform to a third height mode comprises switching a binocular imaging device to a stereo vision mode with an enhanced resolution.
- [0023] In another exemplary embodiment of the disclosed methods, selecting the operation mode comprises switching the mobile platform to a fourth height mode when the height is greater than a third height threshold.
- [0024] In another exemplary embodiment of the disclosed methods, selecting the operation mode comprises switching the mobile platform to a fourth height mode when the height is greater than a third height threshold and the disparity is less than the fifth disparity threshold.
- [0025] In another exemplary embodiment of the disclosed methods, switching the mobile platform to a fourth height mode comprises switching the binocular imaging device to a high altitude monocular mode in combination with a barometer, a GPS and/or a visual measurement of a vertical distance between the mobile platform and a ground

level.

- [0026] In another exemplary embodiment of the disclosed methods, selecting the operation mode comprises switching the mobile platform to the third height mode when the height is less than a fourth height threshold.
- [0027] In another exemplary embodiment of the disclosed methods, selecting the operation mode comprises switching the mobile platform to the third height mode when the height is less than a fourth height threshold and the disparity is greater than a sixth disparity threshold.
- [0028] In another exemplary embodiment of the disclosed methods, selecting the operation mode comprises switching the mobile platform to the second height mode when the disparity is greater than a fourth disparity threshold.
- [0029] In another exemplary embodiment of the disclosed methods, selecting the operation mode comprises switching the mobile platform to the first height mode when the height is less than a second height threshold.
- [0030] In another exemplary embodiment of the disclosed methods, selecting the operation mode comprises switching the mobile platform to the first height mode when the height is less than a second height threshold and the disparity is greater than a second disparity threshold.
- [0031] In another exemplary embodiment of the disclosed methods, the second disparity threshold is greater than the first disparity threshold;
- [0032] at least one of the first and second disparity thresholds is greater than at least one of the third and fourth disparity thresholds;
- [0033] the third disparity threshold is greater than the fourth disparity threshold;
- [0034] at least one of the third and fourth disparity thresholds is greater than at least one of the fifth and sixth disparity thresholds; and
- [0035] the sixth disparity threshold is greater than the fifth threshold.
- [0036] In another exemplary embodiment of the disclosed methods,
- [0037] the first height threshold is greater than the second height threshold;
- [0038] at least one of the third and fourth height thresholds is greater than at least one of the first and second height thresholds; and
- [0039] the third height threshold is greater than the fourth threshold.
- [0040] In another exemplary embodiment of the disclosed methods, determining the disparity of the first and second images comprises:
- [0041] selecting a plurality of feature points from the first image; and
- [0042] matching the feature points of the first image with points of the second image.
- [0043] In another exemplary embodiment of the disclosed methods, the feature points comprise pixels of either the first image or the second image.
- [0044] In another exemplary embodiment of the disclosed methods, matching the plurality

of feature points comprises:

- [0045] scanning the second image to identify a point of the second image that matches a selected feature point of the first image; and
- [0046] calculating a similarity between the selected feature point of the first image and the point of the second image.
- [0047] In another exemplary embodiment of the disclosed methods, calculating the similarity comprises:
- [0048] building a first binary string representing a first region around the selected feature point by comparing intensities of each point pairs of the region to generate a first Binary Robust Independent Elementary Features (“BRIEF”) descriptor;
- [0049] building a second binary string representing a second region around the point of the second image by comparing intensities of each point pairs of the second region to generate a second BRIEF descriptor; and
- [0050] determining the point of the second image matches the selected feature point when a hamming distance between the first BRIEF descriptor and the second BRIEF descriptor is less than a first hamming threshold.
- [0051] In another exemplary embodiment of the disclosed methods, calculating the similarity comprises comparing the selected feature point of the first image with a three-by-three pixel area centered around the point on the second image.
- [0052] In another exemplary embodiment of the disclosed methods, comparing comprises comparing a sum of differences for each color component of each pixel of color images or a sum of differences of grayscale values of each pixel of black and white images.
- [0053] In another exemplary embodiment of the disclosed methods, determining the disparity comprises acquiring the disparity based on an average of the disparities of the feature points.
- [0054] In another exemplary embodiment of the disclosed methods, determining the disparity comprises selecting one or more feature points and acquiring the disparity based on the disparities of the selected feature points.
- [0055] In accordance with another aspect disclosed herein, there is set forth a system for selecting an operation mode of a mobile platform configured to perform the detection process in accordance with any one of previous embodiments of the disclosed methods.
- [0056] In accordance with another aspect disclosed herein, there is set forth a computer program product comprising instructions for selecting an operation mode of a mobile platform configured to perform the detection process in accordance with any one of previous embodiments of the disclosed methods.
- [0057] In accordance with another aspect disclosed herein, there is set forth an apparatus for

selecting an operation mode of a mobile platform, comprising:

- [0058] a binocular imaging device associated with the mobile platform; and
- [0059] a processor configured for:
 - [0060] detecting a height grade of the mobile platform; and
 - [0061] selecting an operation mode of the mobile platform according to a result of the detecting.
- [0062] In an exemplary embodiment of the disclosed apparatuses, the processor is configured to determine a height of the mobile platform and/or a disparity between first and second images of a remote object from the perspective of the mobile platform.
- [0063] Exemplary embodiments of the disclosed apparatuses further comprise a barometer associated with the mobile platform for obtaining the height of the mobile platform.
- [0064] Exemplary embodiments of the disclosed apparatuses further comprise an ultrasonic detector associated with the mobile platform for obtaining the height of the mobile platform.
- [0065] Exemplary embodiments of the disclosed apparatuses further comprise a GPS associated with the mobile platform for obtaining the height and/or location of the mobile platform.
- [0066] In an exemplary embodiment of the disclosed apparatuses, the processor is configured to acquire the disparity between the first and second images of the object as captured by a binocular imaging system associated with the mobile platform.
- [0067] In an exemplary embodiment of the disclosed apparatuses, the operation modes of the mobile platform are categorized based on height values and/or the disparity values.
- [0068] In an exemplary embodiment of the disclosed apparatuses, the processor is configured to initialize the mobile platform to operate at a first height mode.
- [0069] In an exemplary embodiment of the disclosed apparatuses, the first height mode comprises a very low altitude monocular mode.
- [0070] In an exemplary embodiment of the disclosed apparatuses, a distance sensor of the moving platform is provided to assist the very low altitude monocular mode.
- [0071] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to switch the operation mode based on the height grade, and wherein the height grade is determined based on at least one of the determined height and the determined disparity.
- [0072] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to switch to a second height mode when the height is greater than a first height threshold.
- [0073] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to switch to a second height mode when the disparity is less than a first disparity threshold.

- [0074] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to switch to a second height mode when the height is greater than a first height threshold and the disparity is less than the first disparity threshold.
- [0075] In another exemplary embodiment of the disclosed apparatuses, the second height mode comprises a stereo vision mode with a first resolution.
- [0076] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to switch to a third height mode when the disparity is less than or equal to a third disparity threshold.
- [0077] In another exemplary embodiment of the disclosed apparatuses, the third height mode is a stereo vision mode with an enhanced resolution.
- [0078] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to switch to a fourth height mode when the height is greater than a third height threshold.
- [0079] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to switch to a fourth height mode when the height is greater than a third height threshold and the disparity is less than the fifth disparity threshold.
- [0080] In another exemplary embodiment of the disclosed apparatuses, the fourth height mode comprises is a high altitude monocular mode in combination with a barometer, a GPS and/or a visual measurement of a vertical distance between the mobile platform and a ground level.
- [0081] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to switch to the third height mode when the height is less than a fourth height threshold.
- [0082] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to switch to the third height mode when the height is less than a fourth height threshold and the disparity is greater than a sixth disparity threshold.
- [0083] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to switch to the second height mode when the disparity is greater than a fourth disparity threshold.
- [0084] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to switch the first height mode when the height is less than a second height threshold.
- [0085] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to switch the first height mode when the height is less than a second height threshold and the disparity is greater than a second disparity threshold.
- [0086] In another exemplary embodiment of the disclosed apparatuses, the second disparity threshold is greater than the first disparity threshold;
- [0087] one or both of the first and second disparity thresholds are greater than one or both of

- the third and fourth disparity thresholds;
- [0088] the third disparity threshold is greater than the fourth disparity threshold;
- [0089] one or both of the third and fourth disparity thresholds are greater than one or both of the fifth and sixth disparity thresholds; and
- [0090] the sixth disparity threshold is greater than the fifth threshold.
- [0091] In another exemplary embodiment of the disclosed apparatuses, the first height threshold is greater than the second height threshold;
- [0092] any one of the third and fourth height thresholds is greater than the first and second height thresholds; and
- [0093] the third height threshold is greater than the fourth threshold.
- [0094] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to determine the height of an Unmanned Aerial Vehicle (“UAV”) and the disparity from the perspective of the UAV, and
- [0095] wherein the processor is configured to select an operation mode of the UAV according to the determining.
- [0096] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to select a plurality of feature points on the first image and to match the plurality of feature points of the first image with points of the second image.
- [0097] In another exemplary embodiment of the disclosed apparatuses, the feature points comprise pixels of either the first image or the second image.
- [0098] In another exemplary embodiment of the disclosed apparatuses, the disparity is at least five pixels and no more than one fifth of a width of the first image or the second image.
- [0099] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to scan the second image to identify a point of the second image that matches a selected feature point of the first image and to calculate a similarity between the selected feature point of the first image and the point.
- [0100] In another exemplary embodiment of the disclosed apparatuses, the processor is configured for:
- [0101] building a first binary string representing a first region around the selected feature point by comparing intensities of each point pairs of the region to generate a first Binary Robust Independent Elementary Features (“BRIEF”) descriptor;
- [0102] building a second binary string representing a second region around the point of the second image by comparing intensities of each point pairs of the second region to generate a second BRIEF descriptor; and
- [0103] determining the point of the second image matches the selected feature point when a hamming distance between the first BRIEF descriptor and the second BRIEF descriptor is less than a first hamming threshold.

- [0104] In another exemplary embodiment of the disclosed apparatuses, the similarity is calculated by comparing the selected feature point of the first image with a three-by-three pixel area centered around the point on the second image.
- [0105] In another exemplary embodiment of the disclosed apparatuses, the three-by-three pixel area is compared by a sum of differences for each color component of each pixel of color images or a sum of differences of grayscale values of each pixel of black and white images.
- [0106] In another exemplary embodiment of the disclosed apparatuses, the disparity is determined based on an average of the feature disparities.
- [0107] In another exemplary embodiment of the disclosed apparatuses, the processor is configured to select one or more feature points and to acquire the disparity based on the features disparities of the selected feature points.
- [0108] In accordance with another aspect disclosed herein, there is set forth a method for determining an operation mode of a mobile platform, comprising:
- [0109] detecting a height grade of the mobile platform;
- [0110] selecting one or more sensors based on a result of the detecting; and
- [0111] obtaining measurements from the selected sensors,
- [0112] wherein the height grade is selected from a group of four height grades.
- [0113] In another exemplary embodiment of the disclosed methods, selecting the one or more sensors comprises selecting one image sensor at a first height grade.
- [0114] In another exemplary embodiment of the disclosed methods, selecting the one or more sensors comprises selecting one image sensor and a distance sensor at a first height grade.
- [0115] In another exemplary embodiment of the disclosed methods, the distance sensor comprises an ultrasonic detector and/or a laser detection device.
- [0116] In another exemplary embodiment of the disclosed methods, selecting the one or more sensors further comprises selecting at least two image sensors at a second height grade,
- [0117] wherein the at least two image sensors have a first resolution.
- [0118] In another exemplary embodiment of the disclosed methods, selecting the one or more sensors further comprises selecting at least two image sensors with a second resolution at a third height grade, the second resolution being an enhanced resolution.
- [0119] In another exemplary embodiment of the disclosed methods, the second resolution is greater than the first resolution.
- [0120] In another exemplary embodiment of the disclosed methods, selecting the one or more sensors further comprises selecting one image sensor and one height sensor at a fourth height grade.
- [0121] In another exemplary embodiment of the disclosed methods, the height sensor

comprises a barometer and/or a Global Positioning System (“GPS”).

[0122] In accordance with another aspect disclosed herein, there is set forth a flying operation system of a mobile platform, comprising:

[0123] a height sensor for detecting a height grade of the mobile platform;

[0124] a processor configured to select one or more sensors based on the detected height grade and to obtain measurements from the selected sensors,

[0125] wherein the height grade is selected from a group of four height grades.

[0126] In another exemplary embodiment of the disclosed systems, the processor is configured to select one image sensor at a first height grade.

[0127] In another exemplary embodiment of the disclosed systems, the processor is configured to select one image sensor and a distance sensor at a first height grade.

[0128] In another exemplary embodiment of the disclosed systems, the height sensor comprises a distance sensor, and wherein the distance sensor comprises an ultrasonic detector and/or a laser detection device.

[0129] In another exemplary embodiment of the disclosed systems, the processor is configured to select at least two image sensors at a second height grade,

[0130] wherein the at least two image sensors have a first resolution.

[0131] In another exemplary embodiment of the disclosed systems, the processor is configured to select at least two image sensors with a second resolution at a third height grade, the second resolution being an enhanced resolution.

[0132] In another exemplary embodiment of the disclosed systems, the second resolution is greater than the first resolution.

[0133] In another exemplary embodiment of the disclosed systems, the processor is configured to select one image sensor and one height sensor at a fourth height grade.

[0134] In another exemplary embodiment of the disclosed systems, the height sensor comprises a barometer and/or a Global Positioning System (“GPS”).

BRIEF DESCRIPTION OF THE DRAWINGS

[0135] Fig. 1 an exemplary top-level flowchart, illustrating an embodiment of a method for selecting an operation mode in a wide range of heights.

[0136] Fig. 2 is an exemplary schematic diagram, illustrating a mobile platform equipped with devices to realize the method of Fig. 1, wherein such devices include a barometer, a GPS, an ultrasonic detector and a stereo vision system.

[0137] Fig. 3 is an exemplary flowchart of an alternative embodiment of the method of Fig. 1, wherein the method includes categorizing operation modes for different heights.

[0138] Fig. 4 is an exemplary block diagram of an alternative embodiment of the method of Fig. 3, wherein the method categorizes four operation modes based on heights.

[0139] Fig. 5 is an exemplary block diagram of another alternative embodiment of the method of Fig. 1, wherein the height and the disparity information is used to decide a

working operation mode.

- [0140] Fig. 6 is an exemplary block diagram of an alternative embodiment of the mobile platform of Fig. 2, wherein the mobile platform uses the barometer, the ultrasonic detector and/or the GPS for obtaining the height information.
- [0141] Fig. 7 is an exemplary top-level diagram, illustrating another alternative embodiment of the mobile platform of Fig. 2, wherein a processor collects condition data and controls the operation modes.
- [0142] Fig. 8 is an exemplary flowchart of another alternative embodiment of the method of Fig. 1, illustrating switching conditions among four different operation modes.
- [0143] Fig. 9 is an exemplary detail drawing illustrating an embodiment of a stereoscopic imaging method, wherein the disparity of the method of Fig. 1 is decided.
- [0144] Fig. 10 is an exemplary diagram of an alternative embodiment of the method of Fig. 9, illustrating an exemplary method for matching two images with an overlapping area.
- [0145] Fig. 11 is an exemplary diagram illustrating an alternative embodiment of the method of Fig. 9, wherein a first image is matched with a second image with a plurality of feature points.
- [0146] Fig. 12 is an exemplary diagram illustrating an alternative embodiment of the method of Fig. 11, wherein each feature point is matched by calculating a similarity.
- [0147] Fig. 13 is an exemplary top-level flowchart of an alternative embodiment of the method for determining an operation mode, wherein sensors of the mobile platform are selected for each of the four operation modes of Fig. 4.
- [0148] Fig. 14 is an exemplary flowchart of an alternative embodiment of the method of Fig. 13, illustrating a manner for selecting the sensor based upon each of the operation modes.
- [0149] Fig. 15 is an exemplary top-level diagram illustrating still another alternative embodiment of a flying operation system of the mobile platform of Fig. 2, wherein a processor selects sensors of the mobile platform for each of four operation modes.
- [0150] It should be noted that the figures are not drawn to scale and that elements of similar structures or functions are generally represented by like reference numerals for illustrative purposes throughout the figures. It also should be noted that the figures are only intended to facilitate the description of the preferred embodiments. The figures do not illustrate every aspect of the described embodiments and do not limit the scope of the present disclosure.
- [0151] DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS
- [0152] Navigation of Unmanned Aerial Vehicles (“UAVs”) commonly is performed by using stereo vision technology for operating the UAVs. However, the precision of stereo vision technology is limited and can vary in accordance with height.
- [0153] Stereo vision systems typically perform navigation by considering an overlapping

area of a scene as viewed by each of two lenses of the stereo vision system. A baseline length between the lenses of conventional stereo vision systems typically is between four centimeters and twenty centimeters. The applicable height range of the stereo vision technology, however, is restricted by the baseline length. In other words, the range of measurable height is limited by the baseline length.

- [0154] The overlapping area of the scene is relied on to operate the UAV. At low altitude, for example, a distance between the lenses of the binocular imaging system and the ground is too short to form a usable overlapping area between each scene viewed by the lenses of the binocular imaging device. Whereas, at very high altitude, a distance between the lenses of the stereo vision system and the ground is too long. In such case, the long distance generates a short baseline between the two lenses of the stereo vision system, resulting inaccurate calculation results.
- [0155] Since currently-available stereo vision navigation systems are restricted by baseline lengths, a mobile system and method that can meet the requirements of operating the UAV at various heights by switching among operation modes based on a height of the mobile system and a disparity can prove desirable and provide a basis for accurate measurement of depth, for systems such as UAV systems and other mobile systems. This result can be achieved, according to one embodiment disclosed in Fig. 1.
- [0156] Referring now to Fig. 1, an exemplary embodiment of a method 100 for selecting an operation mode of a mobile platform 200 (shown in Fig. 2) in a wide range of heights. In Fig. 1, at 120, a height 121 and/or a disparity 122 can be detected as bases for determining an operation mode for the mobile platform 200. The height 121 and/or the disparity 122 can represent a height grade. In a preferred embodiment, such detection can be conducted in real-time and/or in a time-delayed manner. The height 121 is associated with an elevation information, such as flying height, or altitude, of the mobile platform 200. The disparity 122 represents a difference in image location of an object depicted in two images or frames. The disparity 122 can be decided statically and/or dynamically in the manner shown and described below with reference to Figs. 9-12. The mobile platform 200 can comprise any form of aerial vehicle that can have an elevation while such mobile platform 200 is in operation. The height 121 can be determined in the manner shown and described below with reference to Fig. 6.
- [0157] At 130, the mobile platform 200 can use the acquired height grade, i.e. the height 121 and/or the disparity 122, to select or switch among several predetermined operation modes 131. The operation modes 131 can comprise operations involving various devices associated with the mobile platform 200, which can be included at any time. Such devices are shown and described below with reference to Figs. 6 and 7. The selection or switching of operation modes 131 will be shown and described in detail with reference to Fig. 8.

- [0158] Although shown and described as using the height 121 and/or the disparity 122 as the criteria for selecting or switching operation modes for illustrative purposes only, other suitable condition data can be used for the criteria of selecting or switching among operation modes.
- [0159] Fig. 2 shows a mobile platform 200 with devices 251-254 for detecting conditions that can be bases to realize the method 100 by switching operation modes 131. In Fig. 2, the devices 251-254 can include at least a barometer 251, one or more ultrasonic detectors 252, a GPS 253 and a binocular imaging device 254. Among the devices 251-254, the barometer 251, the ultrasonic detector 252 and/or the GPS 253 can be used to detect the height 121 (or altitude) of the mobile platform 200, and the binocular imaging device 254 can be an information source of the disparity 122. In Fig. 2, the ultrasonic detector 252 can be used to detect a distance to an object 288 that can be the ground. Therefore, the distance between the ultrasonic detector 252 and the object 288 can represent a vertical height 121 of the mobile platform 200 relative to the ground level.
- [0160] In Fig. 2, the barometer 251 can be installed on top of a body 260 of the mobile platform 200. The ultrasonic detectors 252 can be arranged around a lower part of the body 260. The GPS 253 can be installed in the body 260 of the mobile platform 200. The binocular imaging device 254 can be arranged under the body 260. However, under this disclosure, the barometer 251 and the GPS 253 can be disposed on any part of the mobile platform 200, such as inside the body 260, under the body 260 or any side of the body 260 etc. The ultrasonic detectors 252 can be disposed anywhere around the body 260. The binocular imaging device 254 can be disposed at any suitable position of the lower part of the body 260.
- [0161] Although shown and described as using the devices 251-254 for purposes of illustrations only, any other suitable devices can also be used for detecting the conditions for determining the switching among the operation modes 131. The mobile platform 200 can comprise any conventional type of mobile platform that can have an elevation and is illustrated in Fig. 2 as comprising an unmanned aerial vehicle UAV 250 for purposes of illustration only and not for purposes of limitation.
- [0162] Fig. 3 shows another exemplary alternative embodiment of the method 100 for selecting an operation mode in a wide range of heights. In Fig. 3, the method 100 can comprise a procedure of categorizing operation modes, at 310. The operation modes can be categorized, for example, based upon different height grades, i.e. height range and/or disparity values. As discussed above, currently-available single mode operations cannot meet requirements of different heights, for example, a binocular system using stereo vision technology cannot satisfy requirements for a high altitude/height and a very low altitude/height. On the other hand, other available operation modes of a

mobile platform 200 can be more suitable for the high altitude/height or the low altitude/height.

- [0163] At different heights or altitudes, a variation of operation modes can be used to operate the mobile platform 200. For the purposes of operating the mobile platform 200 at all heights, the operation modes can be categorized according to several height grades. Additional detail of the categorization will be shown and described below with reference to Fig. 4.
- [0164] Although described as categorizing the operation modes according to different height grades for purposes of illustrations only, the categorization under this disclosure can be based on any other suitable information, such as based on a combination of the height 121 and the disparity 122.
- [0165] Fig. 4 shows an embodiment of the categorizing operation modes into four modes for the method 100. In Fig. 4, a first height mode 411, a second height mode 412, a third height mode 413, and a fourth height mode 414 can be provided in accordance with different height grades. The fourth height mode 414 is designed to be used with, for example, a fourth height range of twenty meters (20 m) and above. Under the fourth height mode 414, the mobile platform 200 (shown in Fig. 2) can work with a high-altitude monocular mode. Under the high-altitude monocular mode, in order to determine the height 121, a depth of an object can be determined, for example, with a combination of a barometer 251, a GPS 253 and/or vision detection. An operation mode of the mobile platform 200 can be determined based on the height information.
- [0166] The third height mode 413 is designed to be used with, for example, a third height range of three and half meters (3.5 m) to twenty meters (20 m). Within the third height range, a binocular device with a normal resolution of three hundred and twenty by two hundred and forty (320x240) cannot meet the requirements of detecting the depth and selecting an operation mode of the mobile platform 200. To deal with the issue, under the third height mode 413, an enhanced resolution binocular mode can be utilized to determine the height 121 and selecting an operation mode of the mobile platform 200. Under the enhanced resolution binocular mode, the resolution can be at least six hundred and fourth by four hundred and eighty (640x480).
- [0167] The second height mode 412 is designed to be used with, for example, a second height range of fifty centimeters (50 cm) to three and a half meters (3.5 m). Within the second height range, the second height mode 412 can use a normal-resolution binocular mode, which can use a resolution of three hundred and twenty by two hundred and forty (320x240).
- [0168] The first height mode 411 is designed to be used with, for example, a first height range of ten centimeters (10 cm) to fifty centimeters (50 cm). Within the first height range, there may not be enough overlapping between images acquired with two lenses

for a binocular system because of a short distance between the lenses and an object of interest. Therefore, under the first height mode 411, a very low altitude monocular mode can be used; wherein, other distance sensors can be employed to detect a distance between an optical center of a lens and the ground level, i.e. the object depth, for selecting an operation mode of the mobile platform 200.

[0169] Although shown and described as categorizing operation modes into four categories for purposes of illustration only, any suitable number of categories can be utilized under the present disclosure. In addition to the height 121 to the ground, the present disclosure can use other conditions in categorizing and/or switching among the operation modes. Such conditions can comprise the disparity 122.

[0170] Fig. 5 shows another exemplary embodiment of the method 100, wherein a height 121 and/or a disparity 122 can be used for deciding an operation mode 131. The height 121 represents a vertical distance between the mobile platform 200 (shown in Fig. 2) and the ground level. The height 121 can be acquired via a barometer 251, an ultrasonic detector 252 and/or a GPS 253, in a manner shown and described below with reference to Fig. 6. As shown and described with reference to Fig. 1, the disparity 122 represents a difference in image location of an object in two images or frames. The disparity 122 can be determined in a manner shown and described below with reference to Figs. 9-12.

[0171] At 230, the height 121 and the disparity 122 information can be combined. The combined information can be used in deciding the operation mode 131, at 240. Although shown and described as using the combined information to decide the operation mode 131, either the height 121 or and disparity 122 can be used separately in deciding the operation mode 131.

[0172] Fig. 6 shows an exemplary embodiment of the mobile platform 200 showing obtaining the height 121, at 120, in the method 100. In Fig. 6, a barometer 251, an ultrasonic detector 252 and/or a GPS 253 can be used to obtain the height 121 of the mobile platform 200 (collectively shown in Fig. 2). The barometer 251 can be any type of barometer or pressure altimeter, which is commercially available from the market, for determining the height 121 based on a measurement of atmospheric pressure. Such a barometer 251 can comprise a water-based barometer, a mercury barometer, a vacuum pump oil barometer, an aneroid barometer, a barograph or a MEMS barometer. The barometer 251 can also include other types of barometers, such as a storm barometer.

[0173] Additionally and/or alternatively, the ultrasonic detector 252 can be used to detect a distance 121 of an object 288 (shown in Fig. 2) in the surroundings by emitting ultrasonic waves and receiving ultrasonic waves reflected from the object 288. The distance 121 can be a distance to the ground level, where the object 288 is the ground.

The ground level 880 can be the actual ground, a water level or the ground with any structure. Such ultrasonic detector 252 can comprise any commercially-available ultrasonic sensors. Although shown and described as using a single ultrasonic detector 252 for detecting the object 288 in one direction for purposes of illustration only, multiple ultrasonic detectors 252 can be provided for detecting an object 288 in multiple directions.

[0174] The GPS 253 is a space-based satellite navigation system that can provide a location, a height and/or time information anywhere on or near the earth where there is an unobstructed line of sight to four or more GPS satellites. The GPS 252 can comprise any GPS devices commercially available from the market. The location can be provided by the GPS 253 as longitude and latitude. The height can be a height in meters or feet to the ground level.

[0175] The height 121, applicable under this disclosure, can be any vertical distance in a range of twenty-five centimeters (25 cm) to over one hundred meters (100 m) to the ground level. As shown and described with reference to Fig. 4, the height 121 can be categorized into a first height, a second height, a third height, and a fourth height under this disclosure. Although shown and described as using a barometer 251, an ultrasonic detector 252 or a GPS 253 for detecting the height 121 for purposes of illustration only, other suitable detecting devices can be used for detecting the height 121 of the mobile platform 200.

[0176] Fig. 7 illustrates another exemplary embodiment of the mobile platform 200 of Fig. 2. In Fig. 7, a processor 910 can be connected with the barometer 251, the ultrasonic detector 252, the GPS 253 and the binocular imaging device 254 to collect condition data and controls the operation modes for implementing the method 100. The processor 910 can be a processor associated with the mobile platform for controlling the mobile platform 300. The binocular imaging device 254 can be an imaging device with binocular lenses that can be used to capture two images of an object simultaneously.

[0177] In a preferred embodiment of the mobile platform 200, the processor 910 can be provided for obtaining and processing the information obtained from the barometer 251, the ultrasonic detector 252, the GPS 253 and/or the binocular device 254. Such information includes the height 121 and the disparity 122 (collectively shown in Fig. 1). The processor 910 can determine which operation mode 131 can be selected based on the information. Additional detail of determining the operation mode 131 will be shown and described below with reference to Fig. 8.

[0178] The processor 910 can comprise any commercially available processing chip or be any custom-designed processing chips specially produced for the apparatus 900 for selecting an operation mode of the mobile platform 200. Additionally and/or alter-

natively, the processor 910 can include one or more general purpose microprocessors (for example, single or multi-core processors), application-specific integrated circuits, application-specific instruction-set processors, data processing units, physics processing units, digital signal processing units, coprocessors, network processing units, audio processing units, encryption processing units, and the like. The processor 910 can be configured to perform any of the methods described herein, including but not limited to, a variety of operations relating to operation mode selection. In some embodiments, the processor 910 can include specialized hardware for processing specific operations relating to operation mode selection.

- [0179] Fig. 8 shows another exemplary embodiment for the method 100, where four operation modes can be selected (or switched) based on the height 121 and/or the disparity 122. Upon lifting off, the mobile platform 200 (shown in Fig. 2) can operate at a first height. An apparatus for selecting an operation mode of the mobile platform 200 can work with a corresponding operation mode, i.e. a first height mode 411. As shown and described with reference to Fig. 4, the first height mode 411 is a very low altitude monocular mode combining with a distance sensor (not shown) for selecting an operation mode of the mobile platform 200.
- [0180] When operating under the first height mode 411 and two conditions are met, at 930, the mobile platform 200 can switch to a second height mode 412. The two conditions can include that the disparity 122 of the binocular imaging device 254 is less than or equal to a first disparity threshold $Td1$ and the height 121 of the mobile platform 200 elevates above a first height threshold $Th1$. In an alternative embodiment, the operation mode can be switched from the first height mode 411 to the second height mode 412 when only the height 121 of the mobile platform 200 elevates above a first height threshold $Th1$.
- [0181] The first disparity threshold $Td1$ can be selected from a first disparity range of sixty-two centimeters (62 cm) to eighty-two centimeters (82 cm), and preferably to be seventy-two centimeters (72 cm). The first height threshold $Th1$ can be selected from a value in a first height range of twenty centimeters (20 cm) to eighty centimeters (80 cm) and preferably to be fifty centimeters (50 cm).
- [0182] When the disparity 122 of the binocular imaging device of the stereo vision system is less than or equal to a third disparity threshold $Td3$ the mobile platform 200 can switch to a third height mode 413. As shown and described with reference to Fig. 4, the third height mode 413 can comprise a high resolution binocular mode.
- [0183] The third disparity threshold $Td3$ can be selected from a third disparity range of five centimeters (5 cm) to fifteen centimeters (15 cm) and preferably to be ten centimeters (10 cm).
- [0184] When two conditions are met, at 934, the operation mode can be switched to a fourth

height mode 414. The two conditions can comprise that the disparity 122 of the binocular imaging device of the stereo vision system being less than or equal to a fifth disparity threshold Td5 and the height of the mobile platform 200 elevating above a third height threshold Th3. The fourth height mode 414 can comprise a high altitude monocular operation mode, which can utilize a barometer, a GPS and/or vision detector as shown and described above with reference to Fig. 4. In an alternative embodiment, the operation mode can be switched from the third height mode 413 to the fourth height mode 414 when only the height 121 of the mobile platform 200 elevates above a third height threshold Th3.

- [0185] The fifth disparity threshold Td5 can be selected from a value in a fifth disparity range of one centimeter (1 cm) to three centimeters (3 cm), and preferably to be two centimeters (2 cm). The third height threshold Th3 can be selected from a value in a third height range of fifteen meters (15 m) to twenty-five meters (25 m) and preferably to be twenty meters (20 m).
- [0186] When operating with the fourth height mode 414, the mobile platform 200 can switch to other operation modes when any of certain conditions 931, 933 is satisfied. At 931, when the disparity 122 is greater than equal to a sixth disparity threshold Td6 and the height 121 of the mobile platform 200 is less than or equal to a fourth threshold Th4, for example, the mobile platform 200 can switch to the third height mode 413. In an alternative embodiment, the mobile platform 200 can switch to the third height mode 413 when only the height 121 of the mobile platform 200 becomes less than or equal to the fourth threshold Th4.
- [0187] At 933, when the disparity 122 is greater than or equal to a fourth disparity threshold Td4, the mobile platform 200 can switch to the second height mode 412.
- [0188] The sixth disparity threshold Td6 can be selected from a value in a sixth disparity range of one and a half centimeters (1.5 cm) to four centimeters (4 cm), and preferably to be two and a half centimeters (2.5 cm). The fourth height threshold, Th4, can be selected from a value in a fourth height range of fifteen meters (15 m) to twenty-two meters (22 m) and preferably to be eighteen meters (18 m). The fourth disparity threshold Td4 can be selected from a value in a fourth disparity range of nine centimeters (9 cm) to fifteen centimeters (15 cm) and preferably to be twelve centimeters (12 cm).
- [0189] When operating at the third height mode 413, if the disparity 122 gets greater than or equal to the fourth disparity threshold Td4, the mobile platform 200 can switch to the second height mode 412.
- [0190] When operating with the second height mode 412, the mobile platform 200 can switch to the first height mode 411 when conditions at 935 are satisfied. At 935, when the disparity 122 is greater than or equal to a second disparity threshold Td2 and the

height 121 of the mobile platform 200 is less than or equal to a second height threshold Th2, the mobile platform 200 can switch to the first height mode 411. In an alternative embodiment, the mobile platform 200 can switch to the first height mode 411 when only the height 121 of the mobile platform 200 becomes less than or equal to the second threshold Th2.

[0191] The second disparity threshold Td2 can be selected from a value in a second disparity range of sixty centimeters (60 cm) to eighty centimeters (80 cm), and preferably to be seventy centimeters (70 cm). The second height threshold, Th2, can be selected from a value in a second height range of twenty-five centimeters (25 cm) to sixty-five centimeters (65 cm), and preferably to be forty-five centimeters (45 cm).

[0192] The second disparity threshold Td2 can be greater than the first disparity threshold Td1. One or both of the first and second disparity thresholds Td1, Td2 can be greater than one or both of the third and fourth disparity thresholds Td3, Td4. The first height threshold Th1 can be greater than the second height threshold Th2. One or both of the first and second height thresholds Th1, Th2 can be greater than one or both of third and fourth height thresholds Th3, Th4. The third disparity threshold Td3 can be greater than the fourth disparity threshold Td4. One or both of the third and fourth disparity thresholds Td3, Td4 can be greater than one or both of the fifth and sixth disparity thresholds Td5, Td6. The sixth disparity threshold Td6 can be greater than the fifth disparity threshold Td5.

[0193] Fig. 9 shows an exemplary method 700 for ascertaining a binocular disparity between two stereoscopic images 520a, 520b, acquired by two lenses 510a, 510b, of an object 598 of interest. A method of triangulation can be used to ascertain the disparity d between the images 520a and 520b. Specifically, the position of the object 598 of interest having an index i, represented by its coordinates (X_i, Y_i, Z_i), can be given as follows:

$$[0194] \quad X_i = \frac{T}{d} (x_i^l - c_x)$$

, Equation (1)

$$[0195] \quad Y_i = \frac{T}{d} (y_i^l - c_y)$$

, Equation (2)

$$[0196] \quad Z_i = \frac{T}{d} f$$

, Equation (3)

[0197] where c_x and c_y represent respective center O_l, O_r coordinates of the lenses 510a and 510b, x_i and y_i represent the coordinates of the object 598 of interest in each of the

images 520a and 520b respectively, T is the baseline (in other words, the distance between the center coordinates of the lenses 510a and 510b), f is a rectified focal length of the lenses 510a and 510b, i is an index over multiple objects of interest 598 and/or over multiple feature points 355 (shown in Fig. 10) of the object 598 of interest, and d is the binocular disparity between the images 520a and 520b, represented here as:

$$[0198] \quad d_i = x_i^l - x_i^r$$

Equation (4)

[0199] Based on the discussion for Fig. 9, the disparity d can be calculated by matching the point X_r on the second image 520b with X_l of the first image 520a, wherein X_l is a known element. In Fig. 9, an exemplary embodiment of locating the matching point X_r on the second image 520b is set forth for illustrative purposes only. In Fig. 9, I^L represents the first image 520a, and I^R represents the second image 520b of the same object 598 of interest. A point x_l^l on the first image 520a can be known, and a matching point x_l^r on the second image 520b can be defined as a point that is “most similar” to the point x_l^l of the first image 520a, which can be represented with the following equation:

$$[0200] \quad d = \operatorname{argmin}_d |I^L(x_l) - I^R(x_l + d)|$$

, Equation (5)

[0201] where d represents the disparity of the two lenses 510a, 510b, I^L refers to the first image 520a, I^R refers to the second image 520b of the same object 598 of interest, x_l is the point x_l^l of the first image 520a.

[0202] Because of possible matching errors to ascertain matching accuracy and vision range, the disparity d cannot be less or greater than certain predetermined values. In a preferred embodiment, the disparity d is greater than 5 pixels and less than one fifth of a width of the second image 520b, which can be the same size with the first image 520a. As an illustrative example, suppose $f = 480$, $T = 0.15$ m, and image resolution is 320x240 pixels, an effective vision range of 1.5 m to 15.4 m can be deducted.

[0203] Fig. 10 illustrates an exemplary embodiment of the method 700 for matching a point of the second image 520b with a corresponding point 355 of the first image 520a. In Fig. 10, a three-by-three pixel block is taken with the compared point in the center from each of the images 520a, 520b. When the first and second images 520a and 520b are color images, values of color components can be compared for each pixel of the three-by-three pixel block. Conversely, when the images 520a and 520b are black and white images, grayscale values for each pixel can be compared. Based on Equation 5, the point with smallest sum of value differences for all nine pixels can be selected as

the matching point. This process can be repeated for all selected feature points on the first image 520a.

- [0204] Alternatively, a method of using Binary Robust Independent Elementary Features (“BRIEF”) descriptors can be used for matching the point of the second image 520b with the corresponding point 355 of the first image 520a. In an exemplary embodiment, a first binary string, representing a first region around the selected feature point of the first image 520a, can be built by comparing intensities of each point pairs of the region. The first binary string can be the first BRIEF descriptor of the selected feature point of the first image 520a.
- [0205] Similarly, a second binary string representing a second region around the point 355 of the second image 520b can be built by comparing intensities of each point pairs of the second region. The second binary string can be a second BRIEF descriptor.
- [0206] A similarity between the selected feature point of the first image 520a and the point 355 of the second image 520b can be calculated by comparing a hamming distance between the first BRIEF descriptor and the second BRIEF descriptor. The point 355 of the second image 520b can be determined as matching the selected feature point of the first image 520a when a hamming distance between the first BRIEF descriptor and the second BRIEF descriptor is less than a first hamming threshold.
- [0207] Turning now to Fig. 11, an exemplary embodiment of the method 700 for acquiring the disparity d via feature points 355 of the object 598 of interest is illustrated. At 922, a plurality of feature points 355 on the object 598 of interest can be selected. The feature points 355 can be selected using one or more of a variety of different methods. In one exemplary embodiment, the feature points 355 can be identified as pre-defined shapes of the object 598 of interest. In another embodiment, the feature points 355 can be recognized as one or more portions of the object 598 of interest having a particular color or intensity. In another embodiment, the feature points 355 can be selected as random portions of the object 598 of interest. In another embodiment, the feature points 355 can be selected at regularly spaced intervals on the object 598 of interest, for example, every pixel, every other pixel, every third pixel, every fourth pixel, and so forth. The feature points 355 can take varying shapes and sizes, as desired. In some embodiments, a combination of methods described above can be used to select the feature points 355.
- [0208] At 924, the selected feature points 355 can be matched from the first image 520a onto the second image 520b. In a preferred embodiment, matching of the feature points 355 consists of two procedures as shown in Fig. 12. In Fig. 12, at 924A, a feature point 355 of the first image can be selected. A matching point can be scanned starting from a calculated point and along a line parallel to the centered line of the lenses 510a, 510b. The matching starting point can be calculated based on the coordinates of the point on

the first image 520a, the direction and/or the length of the baseline. Although preferably limited to only one direction along the selected line, the scanning can be performed in any of one or more predetermined directions.

[0209] At 924B, while scanning for each point, a similarity is calculated between two points in the manner shown and described above in detail herein with reference to Fig. 10, and the point 355 of the second image 520b with the minimum sum of differences with the feature point 355 of the first image 520a can be selected as a matching point corresponding to the selected feature point 355.

[0210] Returning to Fig. 11, a feature disparity d between each feature points 355 of the two images 520a and 520b can be found, at 926. Any of a variety of methods can be used to determine the disparity d . In one embodiment, the disparity d can be found based on an average of the disparities d for each of the feature points 355. Exemplary types of averages can include an arithmetic mean, a geometric mean, a median, and/or a mode without limitation. In another embodiment, the disparity d can be found by selecting one or more of the feature points 355 and acquiring the disparity d based on the selected feature points 355.

[0211] Fig. 13 illustrates an embodiment of a method 300 for determining an operation mode of the mobile platform 200 (shown in Fig. 15), wherein certain sensors 360 (shown in Fig. 15) can be selected for each of the four height modes 411-414 (shown in Fig. 4) based on a height grade. In Fig. 13, at 320, the height grade of the mobile platform 200 can be detected. The height grade of the mobile platform 200 can be detected, for example, in a manner shown and described above with reference to Figs. 1, 5 and 6. One or more sensors 360 can be selected, at 330, according to the detected height grade, which sensors 360 can be predetermined for the detected height grade. The selection of the sensors 360 is shown and described below in additional detail with reference to Fig. 14. At 340, certain information for operating the mobile platform can be obtained. The information can include, for example, a height of the mobile platform, a distance to an object 288 (shown in Fig. 2), a displacement, a velocity and the like.

[0212] Fig. 14 shows an alternative embodiment of the method 300 and illustrates the sensor selections for each of the four height modes of Fig. 4. In Fig. 14, when a mobile platform 200 (shown in Fig. 15) detects a height to be within a first height grade, a first height mode 411 (shown in Fig. 4) can be selected, at 321. When the mobile platform 200 selects the first height mode 411, at 321, one image sensor 363 can be selected, at 322. In an alternative embodiment, when the first height mode 411 is selected, at 321, one image sensor 363 and a distance sensor 361 can be selected. The distance sensor 361 can be employed, for example, for determining a distance between the mobile platform 200 and an object 288 (shown in Fig. 2) of interest. Although shown and

described as selecting one distance sensor 361 and one image sensor 363 for purposes of illustration only, other suitable types of sensors 360 alternatively can be selected for the first height mode 411.

- [0213] The distance sensor 361 described herein can include, but is not limited to, an ultrasonic detector and/or a laser detection device for detecting a distance.
- [0214] In Fig. 14, the mobile platform 200 can detect an operating height of a second height grade. Upon detecting the second height grade, the mobile platform 200 can select a second height mode 412 (shown in Fig. 4), at 323. When the mobile platform 200 selects the second height mode 412, at 323, at least two image sensors 363 (shown in Fig. 15) can be selected, at 324. Each of the image sensors 363, selected for the second height mode 412, can have a first resolution.
- [0215] The mobile platform 200 can detect an operating height of a third height grade. Upon detecting the second height grade, the mobile platform 200 can select a third height mode 413 (shown in Fig. 4), at 325. When the mobile platform 200 selects the third height mode 413, at 325, at least two image sensors 363 can be selected, at 326. Each of the image sensors 363, selected for the third height mode 413, can have a second resolution. The second resolution can be an enhanced resolution that can be greater than the first resolution that is used under the second height mode 412.
- [0216] The mobile platform 200 can detect an operating height of a fourth height grade. Upon detecting the fourth height grade, the mobile platform 200 can select a fourth height mode 414 (shown in Fig. 4), at 327. When the mobile platform 200 selects the fourth height mode 414, at 327, one image sensor 363 and one height sensor 362 can be selected, at 328. The height sensor 362 can comprise, but is not limited to, a barometer 251 and/or a Global Positioning System (“GPS”) 253 (collectively shown in Fig. 6).
- [0217] Fig. 15 shows another alternative embodiment of a flying operation system 400 of the mobile platform of Fig. 2, wherein the processor 910 (shown in Fig. 7) can be configured for selecting one or more sensors 360 in accordance with the method 300 (shown in Figs. 13 and 14). Turning to Fig. 15, a distance sensor 361, a height sensor 362 and one or more image sensors 363 can be associated with, and communicate with, the processor 910. As described above with reference to Fig. 14, the distance sensor 361 can include, but is not limited to an ultrasonic detector 252 (shown in Fig. 7) and/or a laser detection device. The height sensor 362 can include, but is not limited to a barometer 251 and/or a Global Positioning System (“GPS”) 253 (collectively shown in Fig. 7). The image sensors 363 can include, but are not limited to, a binocular imaging device 254 (shown in Fig. 2).
- [0218] In a preferred embodiment of the flying operation system 400, the processor 910 can be provided for obtaining and processing the measurements obtained from the sensors

360. Such measurements can include, but are not limited to, a distance to an object 288 (shown in Fig. 2), the height 121 and/or the disparity 122 (collectively shown in Fig. 1). Based on the measurements, the processor 910 can determine which operation mode can be selected and which one or more predetermined sensors 360 can be included for the selected operation mode.

[0219] The described embodiments are susceptible to various modifications and alternative forms, and specific examples thereof have been shown by way of example in the drawings and are herein described in detail. It should be understood, however, that the described embodiments are not to be limited to the particular forms or methods disclosed, but to the contrary, the present disclosure is to cover all modifications, equivalents, and alternatives.

Claims

- [Claim 1] A method for selecting an operation mode of a mobile platform, comprising:
detecting a height grade of the mobile platform; and
selecting an operation mode of the mobile platform according to a result of said detecting.
- [Claim 2] The method of claim 1, wherein said detecting the height grade comprises determining a height of the mobile platform and/or a disparity between first and second images of a remote object from the perspective of the mobile platform.
- [Claim 3] The method of claim 2, wherein said determining comprises obtaining the height via a barometer, an ultrasonic detector and/or a Global Positioning System (“GPS”).
- [Claim 4] The method of claim 2 or claim 3, wherein said determining comprises acquiring the disparity between the first and second images of the object as captured by a binocular imaging system associated with the mobile platform.
- [Claim 5] The method of claim 4, further comprising categorizing the operation modes based on values of the height and/or disparity.
- [Claim 6] The method of claim 5, further comprising initiating the mobile platform to operate at a first height mode.
- [Claim 7] The method of claim 6, wherein the first height mode comprises a very low altitude monocular mode.
- [Claim 8] The method of claim 7, further comprising providing a distance sensor of the moving platform to assist the very low altitude monocular mode.
- [Claim 9] The method of claim 7 or claim 8, wherein said selecting the operation mode comprises switching the operation mode based on the height grade, and wherein the height grade is determined based on at least one of the determined height and the determined disparity.
- [Claim 10] The method of claim 6, wherein said selecting the operation mode comprises switching the mobile platform to a second height mode when the height is greater than a first height threshold.
- [Claim 11] The method of claim 6, wherein said selecting the operation mode comprises switching the mobile platform to a second height mode when the disparity is less than a first disparity threshold.
- [Claim 12] The method of claim 6, wherein said selecting the operation mode comprises switching the mobile platform to a second height mode when

the height is greater than a first height threshold and the disparity is less than the first disparity threshold.

[Claim 13] The method of any one of claims 9-12, wherein said switching the mobile platform to a second height mode comprises selecting a stereo vision mode with a first resolution.

[Claim 14] The method of any one of claims 6-13, wherein said selecting the operation mode comprises switching the mobile platform to a third height mode when the disparity is less than or equal to a third disparity threshold.

[Claim 15] The method of claim 14, wherein the switching the mobile platform to a third height mode comprises switching a binocular imaging device to a stereo vision mode with an enhanced resolution.

[Claim 16] The method of claim 14 or claim 15, wherein the selecting the operation mode comprises switching the mobile platform to a fourth height mode when the height is greater than a third height threshold.

[Claim 17] The method of claim 14 or claim 15, wherein the selecting the operation mode comprises switching the mobile platform to a fourth height mode when the height is greater than a third height threshold and the disparity is less than the fifth disparity threshold.

[Claim 18] The method of claim 17, wherein the switching the mobile platform to a fourth height mode comprises switching the binocular imaging device to a high altitude monocular mode in combination with a barometer, a GPS and/or a visual measurement of a vertical distance between the mobile platform and a ground level.

[Claim 19] The method of any one of claims 16-18, wherein the selecting the operation mode comprises switching the mobile platform to the third height mode when the height is less than a fourth height threshold.

[Claim 20] The method of any one of claims 16-18, wherein the selecting the operation mode comprises switching the mobile platform to the third height mode when the height is less than a fourth height threshold and the disparity is greater than a sixth disparity threshold.

[Claim 21] The method of any one of claims 16-20, wherein the selecting the operation mode comprises switching the mobile platform to the second height mode when the disparity is greater than a fourth disparity threshold.

[Claim 22] The method of claim 21, wherein the selecting the operation mode comprises switching the mobile platform to the first height mode when the height is less than a second height threshold.

- [Claim 23] The method of claim 21, wherein the selecting the operation mode comprises switching the mobile platform to the first height mode when the height is less than a second height threshold and the disparity is greater than a second disparity threshold.
- [Claim 24] The method of claim 23, wherein,
the second disparity threshold is greater than the first disparity threshold;
at least one of the first and second disparity thresholds is greater than at least one of the third and fourth disparity thresholds;
the third disparity threshold is greater than the fourth disparity threshold;
at least one of the third and fourth disparity thresholds is greater than at least one of the fifth and sixth disparity thresholds; and
the sixth disparity threshold is greater than the fifth threshold.
- [Claim 25] The method of claim 23 or claim 24, wherein,
the first height threshold is greater than the second height threshold;
at least one of the third and fourth height thresholds is greater than at least one of the first and second height thresholds; and
the third height threshold is greater than the fourth threshold.
- [Claim 26] The method of claim 25, wherein said determining the disparity of the first and second images comprises:
selecting a plurality of feature points from the first image; and
matching the feature points of the first image with points of the second image.
- [Claim 27] The method of claim 26, wherein the feature points comprise pixels of either the first image or the second image.
- [Claim 28] The method of claim 26 or claim 27, wherein said matching the plurality of feature points comprises:
scanning the second image to identify a point of the second image that matches a selected feature point of the first image; and
calculating a similarity between the selected feature point of the first image and the point of the second image.
- [Claim 29] The method of claim 28, wherein said calculating the similarity comprises:
building a first binary string representing a first region around the selected feature point by comparing intensities of each point pairs of the region to generate a first Binary Robust Independent Elementary Features (“BRIEF”) descriptor;

- building a second binary string representing a second region around the point of the second image by comparing intensities of each point pairs of the second region to generate a second BRIEF descriptor; and determining the point of the second image matches the selected feature point when a hamming distance between the first BRIEF descriptor and the second BRIEF descriptor is less than a first hamming threshold.
- [Claim 30] The method of claim 28, wherein said calculating the similarity comprises comparing the selected feature point of the first image with a three-by-three pixel area centered around the point on the second image.
- [Claim 31] The method of claim 30, wherein said comparing comprises comparing a sum of differences for each color component of each pixel of color images or a sum of differences of grayscale values of each pixel of black and white images.
- [Claim 32] The method of claim 31, wherein said determining the disparity comprises acquiring the disparity based on an average of the disparities of the feature points.
- [Claim 33] The method of any one of claims 30-32, wherein said determining the disparity comprises selecting one or more feature points and acquiring the disparity based on the disparities of the selected feature points.
- [Claim 34] A system for selecting an operation mode of a mobile platform configured to perform the detection process in accordance with any one of the claims 1-33.
- [Claim 35] A computer program product comprising instructions for selecting an operation mode of a mobile platform configured to perform the detection process in accordance with any one of the claims 1-33.
- [Claim 36] An apparatus for selecting an operation mode of a mobile platform, comprising:
a binocular imaging device associated with the mobile platform; and
a processor configured for:
detecting a height grade of the mobile platform; and
selecting an operation mode of the mobile platform according to a result of said detecting.
- [Claim 37] The apparatus of claim 36, wherein said processor is configured to determine a height of the mobile platform and/or a disparity between first and second images of a remote object from the perspective of the mobile platform.
- [Claim 38] The apparatus of claim 37, further comprising a barometer associated

- with the mobile platform for obtaining the height of the mobile platform.
- [Claim 39] The apparatus of claim 37 or claim 38, further comprising an ultrasonic detector associated with the mobile platform for obtaining the height of the mobile platform.
- [Claim 40] The apparatus of claim 39, further comprising a GPS associated with the mobile platform for obtaining the height and/or location of the mobile platform.
- [Claim 41] The apparatus of claim 39 or claim 40, wherein the processor is configured to acquire the disparity between the first and second images of the object as captured by a binocular imaging system associated with the mobile platform.
- [Claim 42] The apparatus of claim 41, wherein the operation modes of the mobile platform are categorized based on height values and/or the disparity values.
- [Claim 43] The apparatus of claim 42, wherein the processor is configured to initialize the mobile platform to operate at a first height mode.
- [Claim 44] The apparatus of claim 43, wherein the first height mode comprises a very low altitude monocular mode.
- [Claim 45] The apparatus of claim 44, wherein a distance sensor of the moving platform is provided to assist the very low altitude monocular mode.
- [Claim 46] The apparatus of claim 44 or claim 45, the processor is configured to switch the operation mode based on the height grade, and wherein the height grade is determined based on at least one of the determined height and the determined disparity.
- [Claim 47] The apparatus of claim 46, wherein the processor is configured to switch to a second height mode when the height is greater than a first height threshold.
- [Claim 48] The apparatus of claim 47, wherein the processor is configured to switch to a second height mode when the disparity is less than a first disparity threshold.
- [Claim 49] The apparatus of claim 47, wherein the processor is configured to switch to a second height mode when the height is greater than a first height threshold and the disparity is less than the first disparity threshold.
- [Claim 50] The apparatus of claim 49, wherein the second height mode comprises a stereo vision mode with a first resolution.
- [Claim 51] The apparatus of any one of claims 46-50, wherein the processor is

- configured to switch to a third height mode when the disparity is less than or equal to a third disparity threshold.
- [Claim 52] The apparatus of claim 50 or claim 51, wherein the third height mode is a stereo vision mode with an enhanced resolution.
- [Claim 53] The apparatus of any one of claims 46-52, wherein the processor is configured to switch to a fourth height mode when the height is greater than a third height threshold.
- [Claim 54] The apparatus of any one of claims 46-52, wherein the processor is configured to switch to a fourth height mode when the height is greater than a third height threshold and the disparity is less than the fifth disparity threshold.
- [Claim 55] The apparatus of claim 54, wherein the fourth height mode comprises a high altitude monocular mode in combination with a barometer, a GPS and/or a visual measurement of a vertical distance between the mobile platform and a ground level.
- [Claim 56] The apparatus of any one of claims 53-55, wherein the processor is configured to switch to the third height mode when the height is less than a fourth height threshold.
- [Claim 57] The apparatus of any one of claims 53-55, wherein the processor is configured to switch to the third height mode when the height is less than a fourth height threshold and the disparity is greater than a sixth disparity threshold.
- [Claim 58] The apparatus of claim 56 or claim 57, wherein the processor is configured to switch to the second height mode when the disparity is greater than a fourth disparity threshold.
- [Claim 59] The apparatus of claim 58, wherein the processor is configured to switch the first height mode when the height is less than a second height threshold.
- [Claim 60] The apparatus of claim 59, wherein the processor is configured to switch the first height mode when the height is less than a second height threshold and the disparity is greater than a second disparity threshold.
- [Claim 61] The apparatus of claim 60, wherein,
the second disparity threshold is greater than the first disparity threshold;
one or both of the first and second disparity thresholds are greater than one or both of the third and fourth disparity thresholds;
the third disparity threshold is greater than the fourth disparity

threshold;

one or both of the third and fourth disparity thresholds are greater than one or both of the fifth and sixth disparity thresholds; and
the sixth disparity threshold is greater than the fifth threshold.

[Claim 62]

The apparatus of claim 60 or claim 61, wherein,
the first height threshold is greater than the second height threshold;
any one of the third and fourth height thresholds is greater than the first and second height thresholds; and
the third height threshold is greater than the fourth threshold.

[Claim 63]

The apparatus of any one of claims 36-62, wherein the processor is configured to determine the height of an Unmanned Aerial Vehicle (“UAV”) and the disparity from the perspective of the UAV, and wherein the processor is configured to select an operation mode of the UAV according to said determining.

[Claim 64]

The apparatus of claim 63, wherein said processor is configured to select a plurality of feature points on the first image and to match the plurality of feature points of the first image with points of the second image.

[Claim 65]

The apparatus of claim 64, wherein the feature points comprise pixels of either the first image or the second image.

[Claim 66]

The apparatus of claim 64 or claim 65, wherein the disparity is at least five pixels and no more than one fifth of a width of the first image or the second image.

[Claim 67]

The apparatus of any one of claims 64-66, wherein the processor is configured to scan the second image to identify a point of the second image that matches a selected feature point of the first image and to calculate a similarity between the selected feature point of the first image and the point.

[Claim 68]


The apparatus of claim 67, wherein the processor is configured for:
building a first binary string representing a first region around the selected feature point by comparing intensities of each point pairs of the region to generate a first Binary Robust Independent Elementary Features (“BRIEF”) descriptor;
building a second binary string representing a second region around the point of the second image by comparing intensities of each point pairs of the second region to generate a second BRIEF descriptor; and
determining the point of the second image matches the selected feature point when a hamming distance between the first BRIEF descriptor and

- the second BRIEF descriptor is less than a first hamming threshold.
- [Claim 69] The apparatus of claim 68, wherein the similarity is calculated by comparing the selected feature point of the first image with a three-by-three pixel area centered around the point on the second image.
- [Claim 70] The apparatus of claim 69, wherein said three-by-three pixel area is compared by a sum of differences for each color component of each pixel of color images or a sum of differences of grayscale values of each pixel of black and white images.
- [Claim 71] The apparatus of claim 70, wherein the disparity is determined based on an average of the feature disparities.
- [Claim 72] The apparatus of claim 70 or claim 71, wherein said processor is configured to select one or more feature points and to acquire the disparity based on the features disparities of the selected feature points.
- [Claim 73] A method for determining an operation mode of a mobile platform, comprising:
detecting a height grade of the mobile platform;
selecting one or more sensors based on a result of the detecting; and
obtaining measurements from the selected sensors,
wherein the height grade is selected from a group of four height grades.
- [Claim 74] The method of claim 73, wherein said selecting the one or more sensors comprises selecting one image sensor at a first height grade.
- [Claim 75] The method of claim 73, wherein said selecting the one or more sensors comprises selecting one image sensor and one distance sensor at a first height grade.
- [Claim 76] The method of claim 75, wherein said distance sensor comprises an ultrasonic detector and/or a laser detection device.
- [Claim 77] The method of claim 75 or claim 76, wherein said selecting the one or more sensors further comprises selecting at least two image sensors at a second height grade,
wherein the at least two image sensors have a first resolution.
- [Claim 78] The method of claim 77, wherein said selecting the one or more sensors further comprises selecting at least two image sensors with a second resolution at a third height grade, the second resolution being an enhanced resolution.
- [Claim 79] The method of claim 78, wherein the second resolution is greater than the first resolution.
- [Claim 80] The method of claim 79, wherein said selecting the one or more sensors further comprises selecting one image sensor and one height sensor at a


fourth height grade.

- [Claim 81] The method of claim 80, wherein the height sensor comprises a barometer and/or a Global Positioning System (“GPS”).
- [Claim 82] A flying operation system of a mobile platform, comprising:
a height sensor for detecting a height grade of the mobile platform;
a processor configured to select one or more sensors based on the detected height grade and to obtain measurements from the selected sensors,
wherein the height grade is selected from a group of four height grades.
- [Claim 83] The method of claim 82, wherein said processor is configured to select one image sensor at a first height grade.
- [Claim 84] The method of claim 82, wherein said processor is configured to select one image sensor and one distance sensor at a first height grade.
- [Claim 85] The method of claim 83 or claim 84, wherein said height sensor comprises a distance sensor, and wherein the distance sensor comprises an ultrasonic detector and/or a laser detection device.
- [Claim 86] The method of claim 84 or claim 85, wherein said processor is configured to select at least two image sensors at a second height grade, wherein the at least two image sensors have a first resolution.
- [Claim 87] The method of claim 86, wherein said processor is configured to select at least two image sensors with a second resolution at a third height grade, the second resolution being an enhanced resolution.
- [Claim 88] The method of claim 87, wherein the second resolution is greater than the first resolution.
- [Claim 89] The method of claim 88, wherein said processor is configured to select one image sensor and one height sensor at a fourth height grade.
- [Claim 90] The method of claim 89, wherein the height sensor comprises a barometer and/or a Global Positioning System (“GPS”).


[Fig. 1]

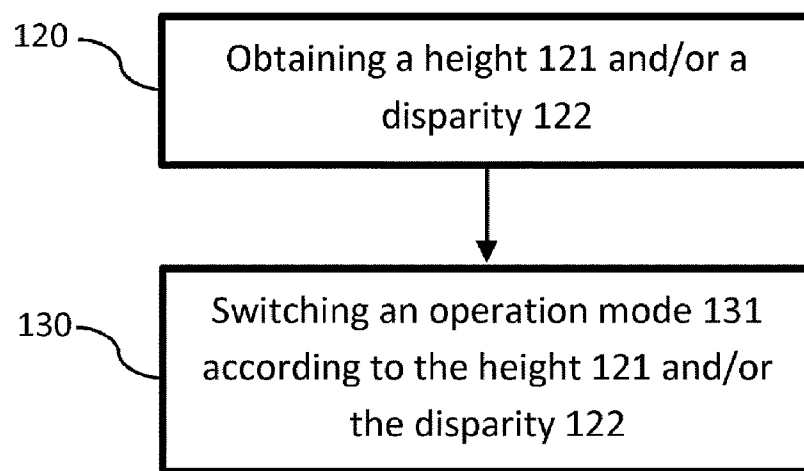100


[Fig. 2]

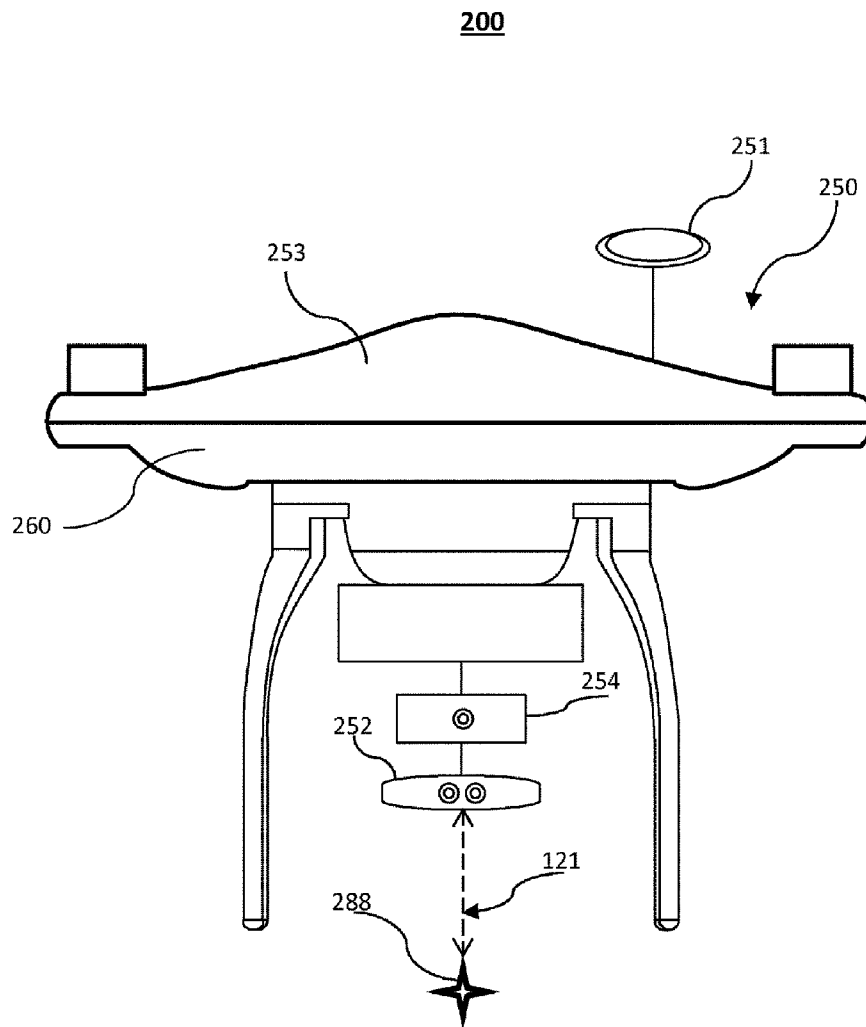


[Fig. 3]

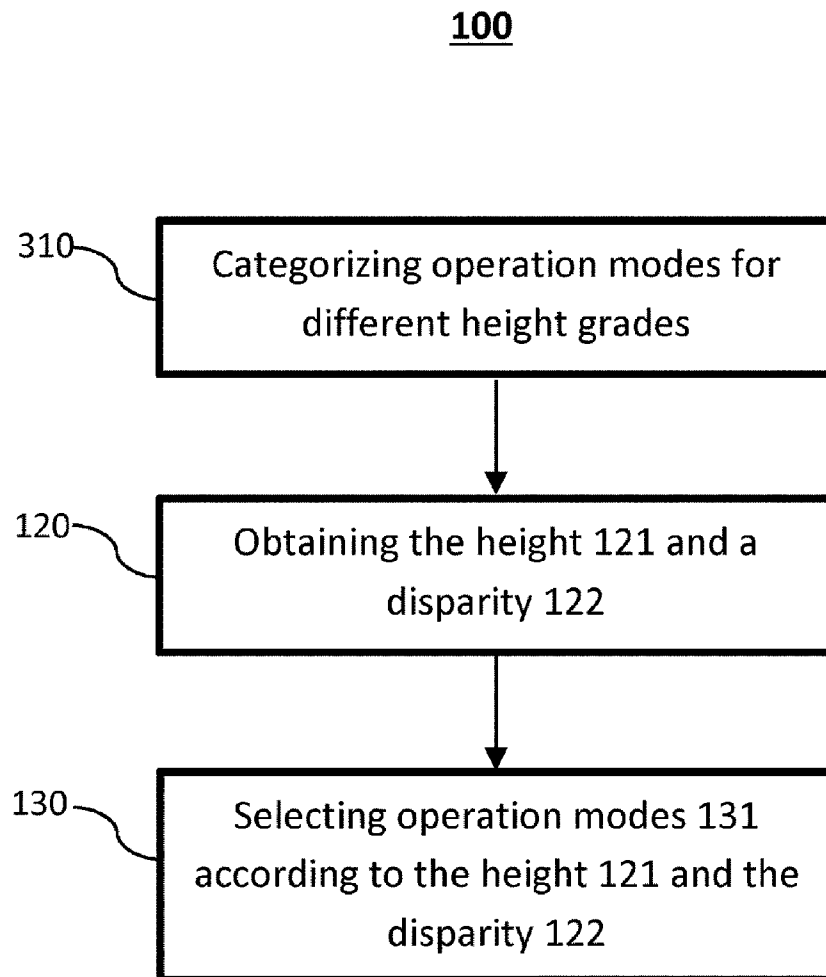


[Fig. 4]

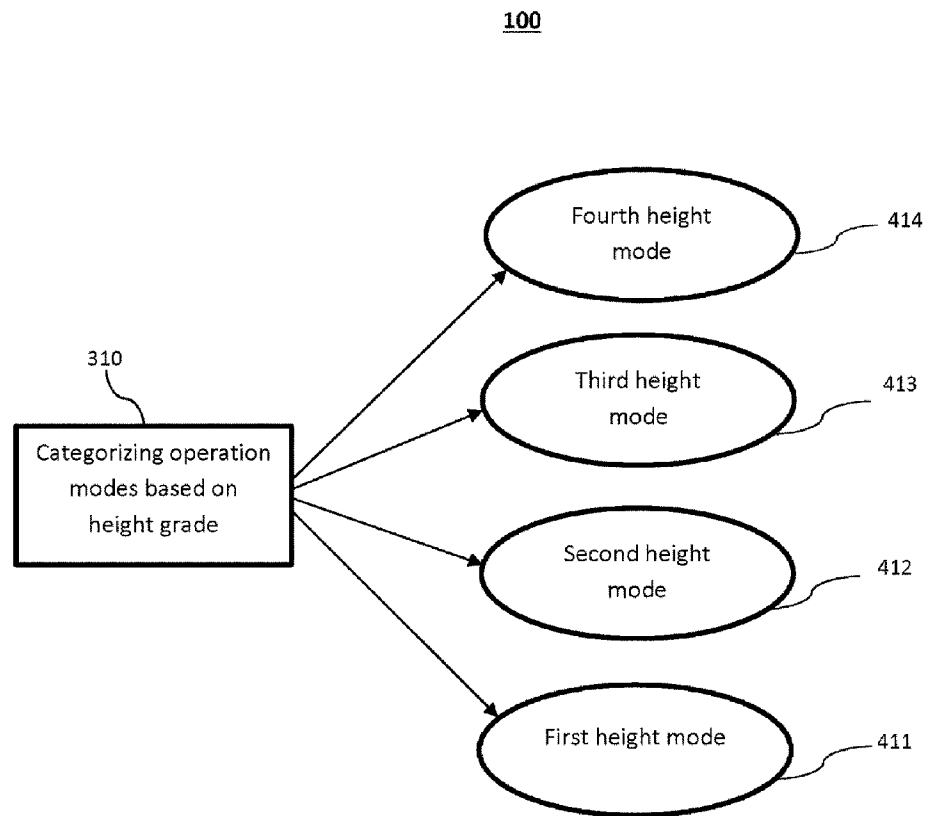


[Fig. 5]

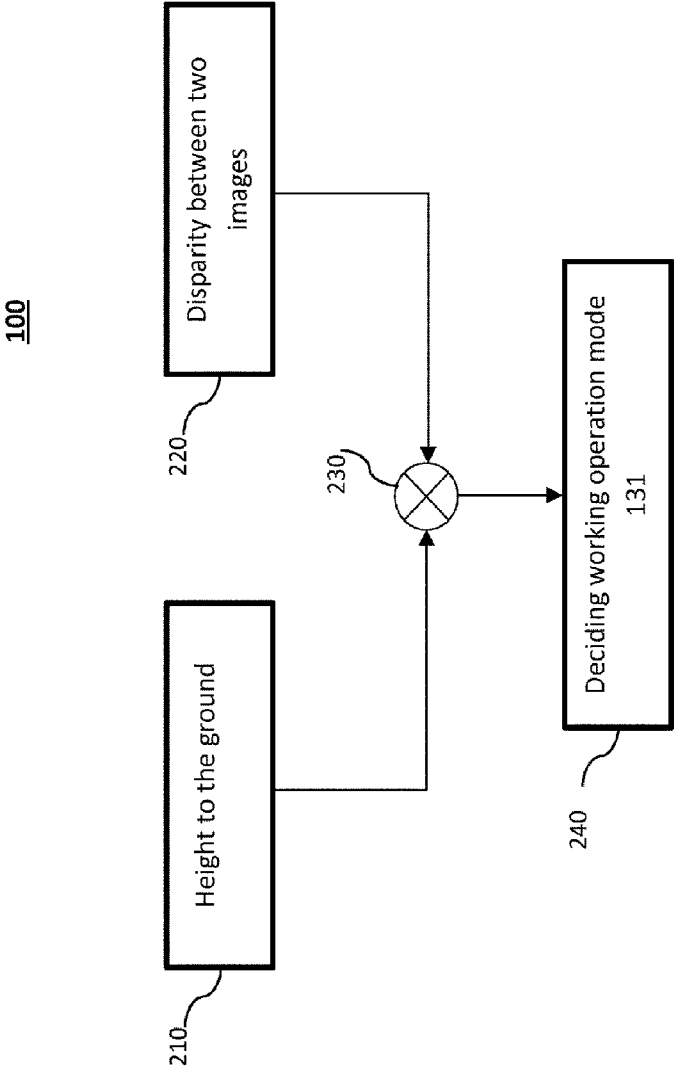


[Fig. 6]

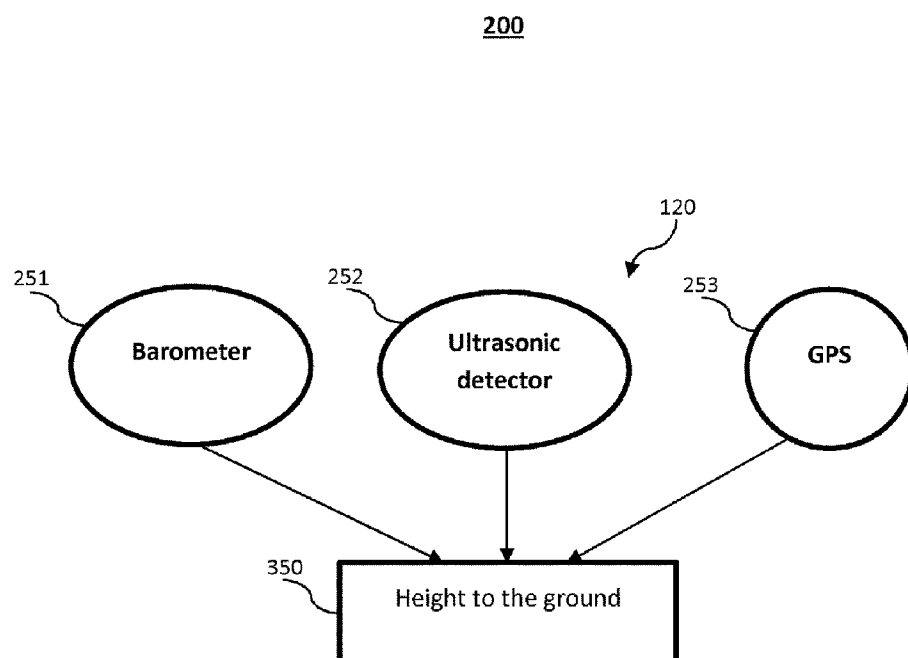

[Fig. 7]

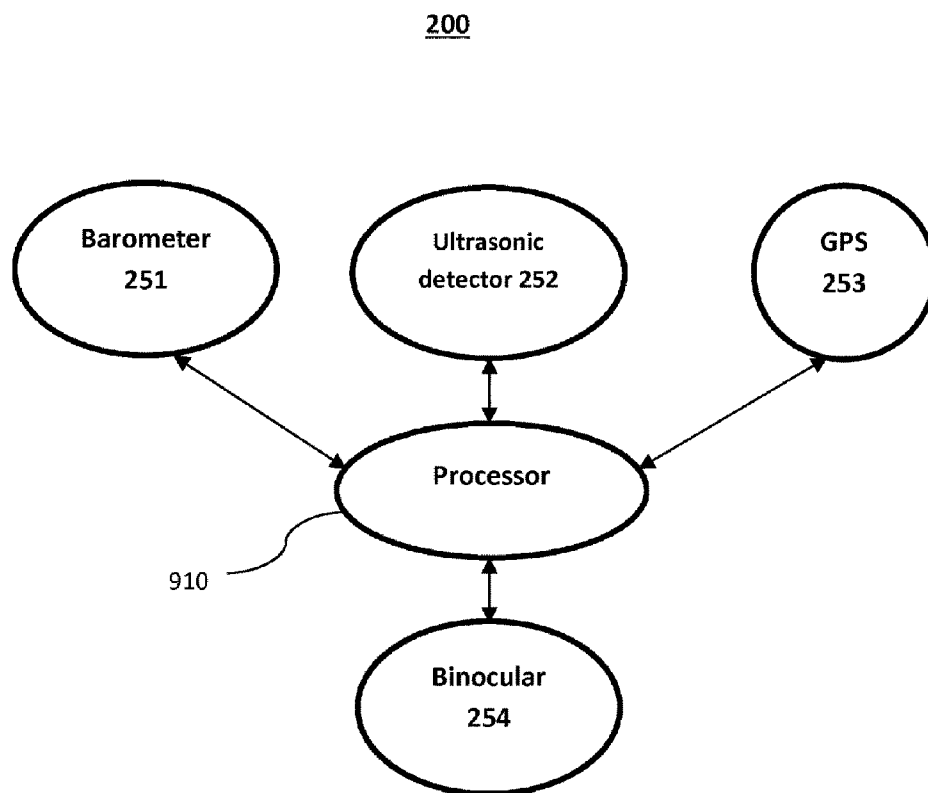


[Fig. 8]

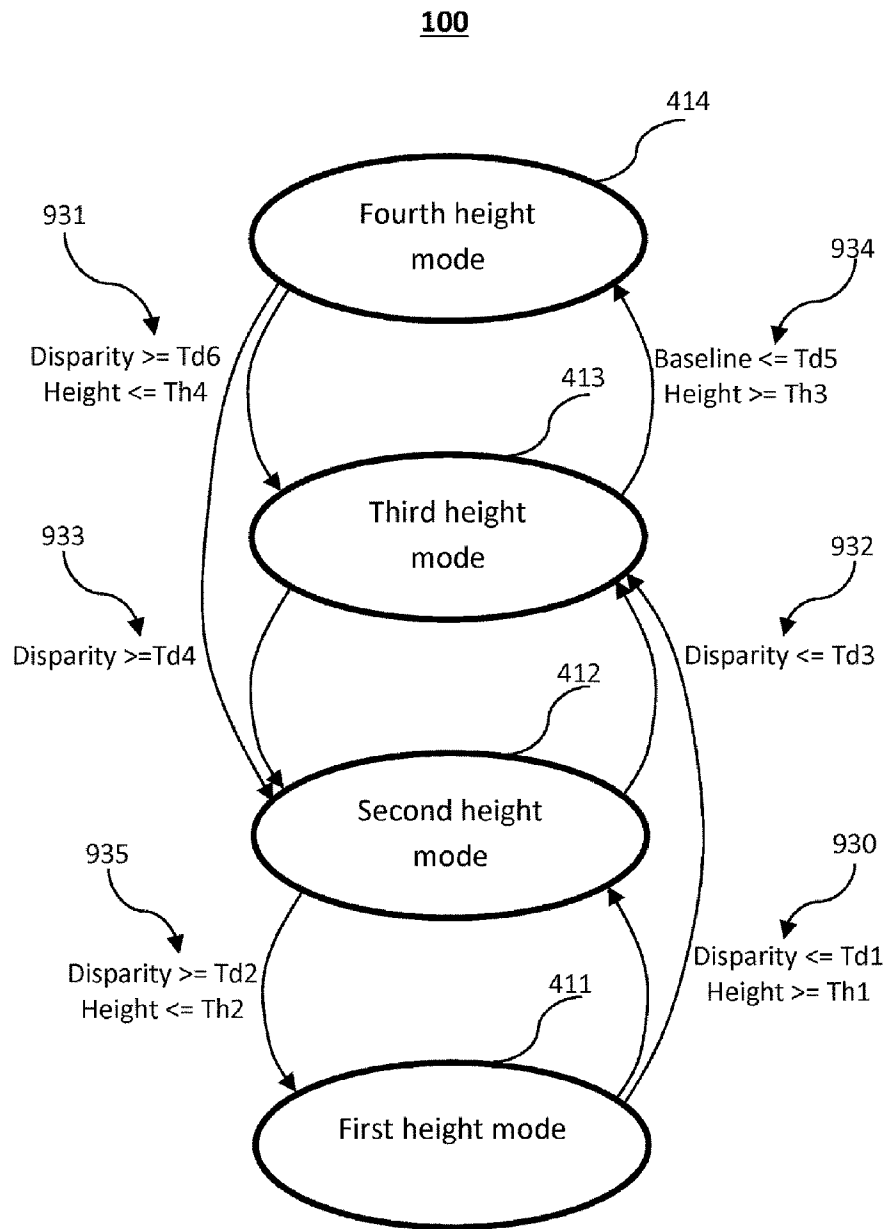


[Fig. 9]


700

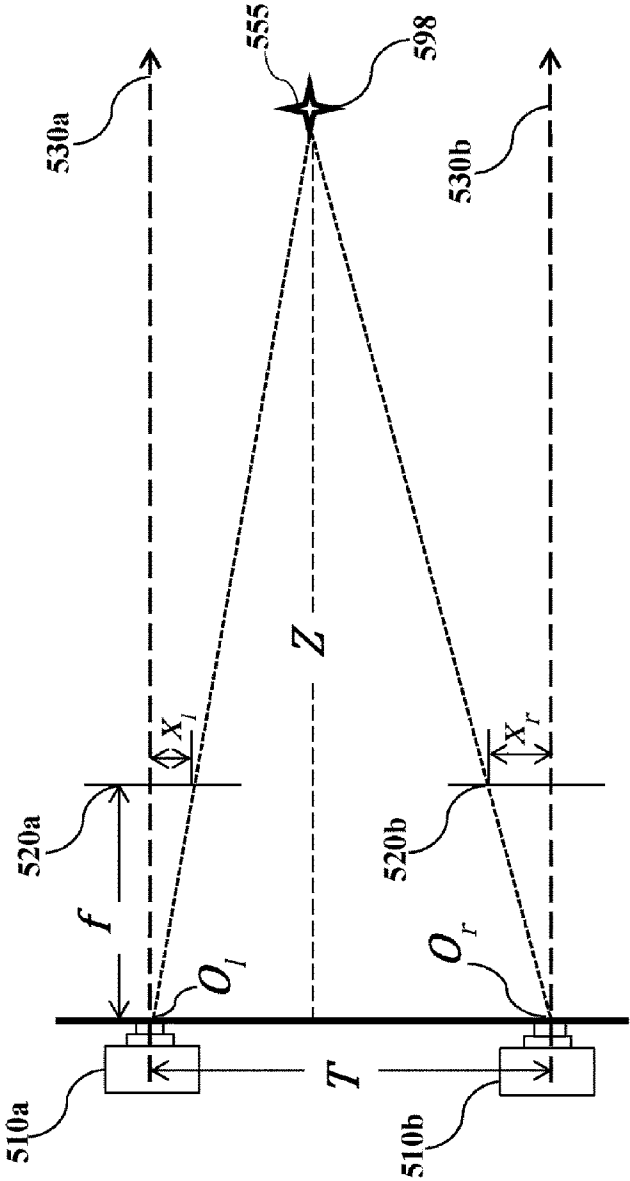


[Fig. 11]

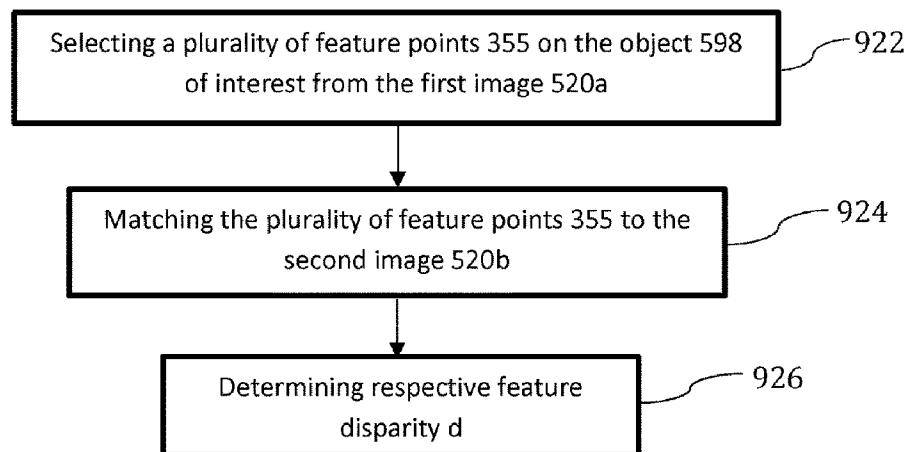700


[Fig. 12]

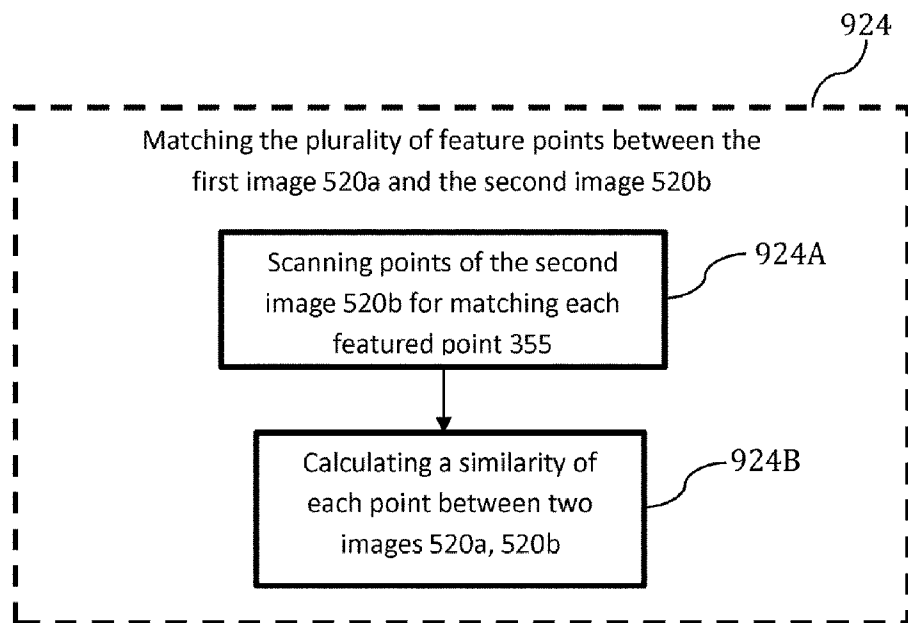700


[Fig. 13]

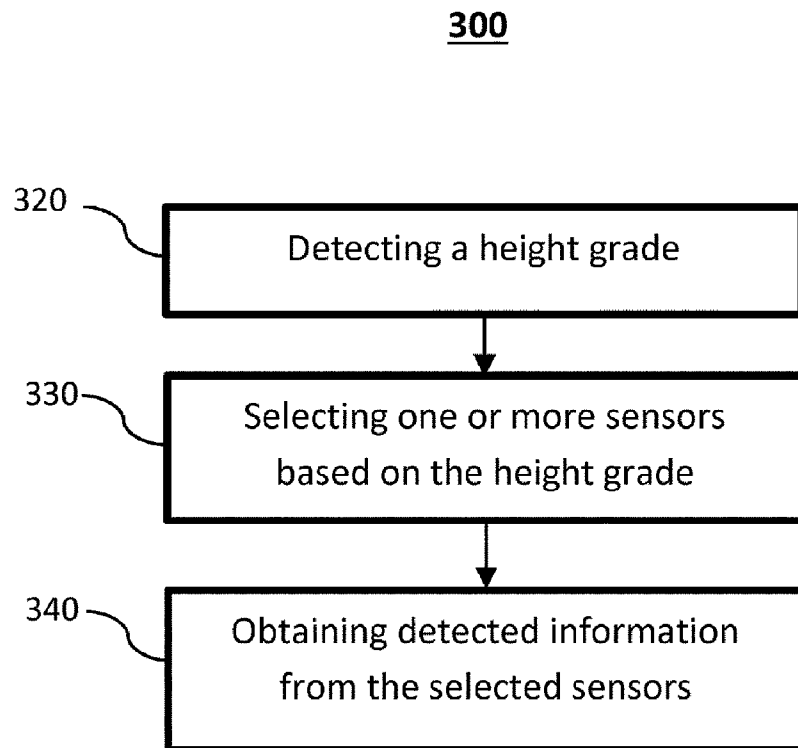

[Fig. 14]

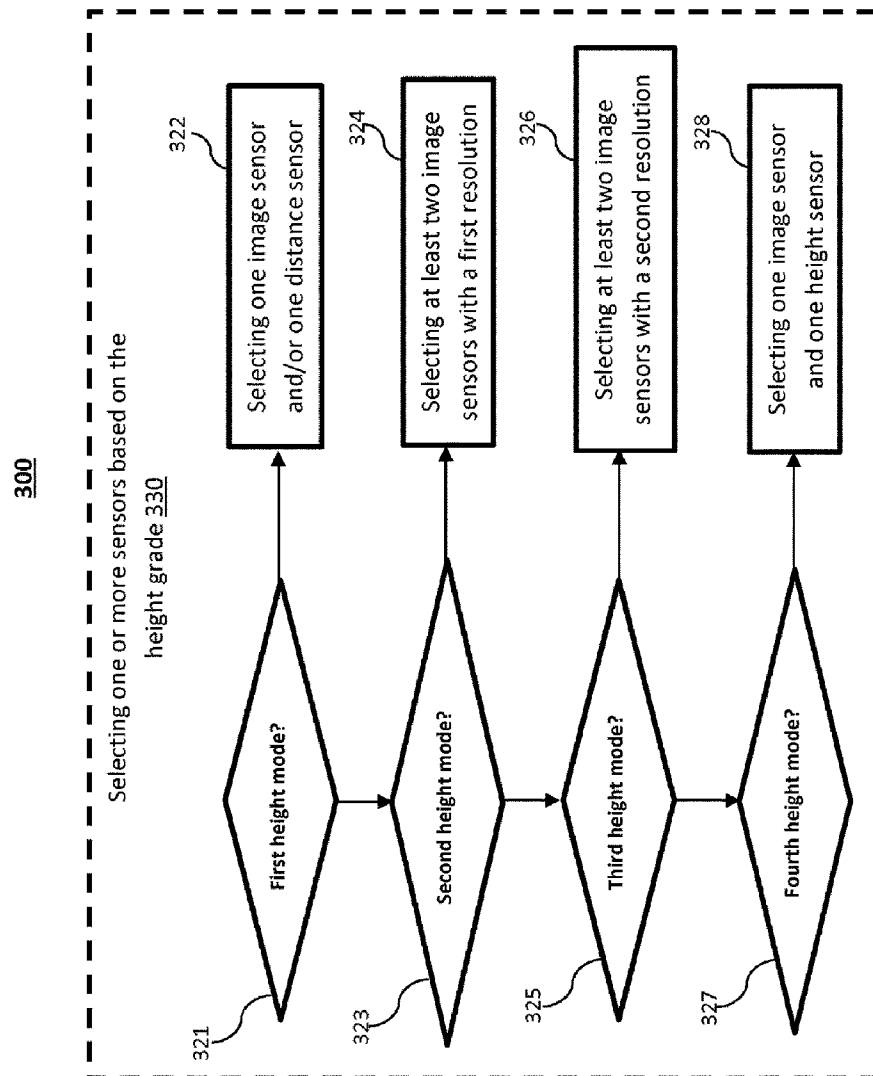

[Fig. 15]

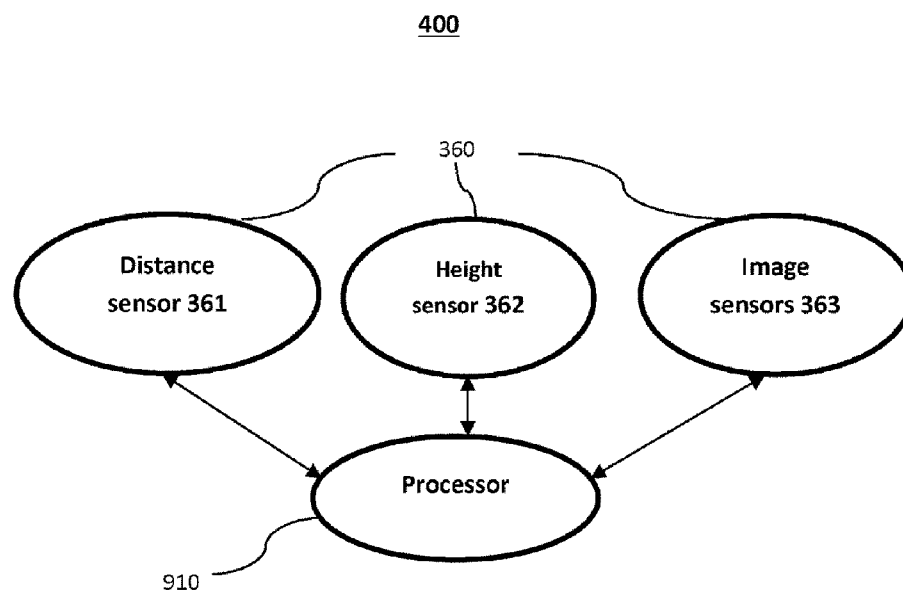

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/082524

A. CLASSIFICATION OF SUBJECT MATTER

G05D 1/00(2006.01)i; B64C 13/16(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G05D; B64C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT, CNKI, WPI, EPODOC: detect+, select+, ultrasonic, barometer, height, altitude, takeoff, GPS, flying, flight, aircraft, determin+, mobile, operation, mode, binocular, switch, change, vary, sensor, unmanned, aerial, vehicle+, UAV, airplane, image, plane, monocular, platform, disparity, precision, vision

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN 104635743 A (THE 27TH RESEARCH INSTITUTE OF CHINA ELECTRONICS TECHNOLOGY GROUP CORPORATION ET AL.) 20 May 2015 (2015-05-20) description, paragraphs [0022]-[0039] and figure 2	1, 34-35
Y	CN 104635743 A (THE 27TH RESEARCH INSTITUTE OF CHINA ELECTRONICS TECHNOLOGY GROUP CORPORATION ET AL.) 20 May 2015 (2015-05-20) description, paragraphs [0022]-[0039] and figure 2	2-6, 10, 36-43
Y	CN 101504287 A (ZHEJIANG UNIVERSITY) 12 August 2009 (2009-08-12) description, pages 2-4	2-6, 10, 36-43
X	CN 104238580 A (CHINA ACADEMY OF AEROSPACE AERODYNAMICS) 24 December 2014 (2014-12-24) discription, paragraphs [0005]-[0012]	1, 34-35
Y	CN 104238580 A (CHINA ACADEMY OF AEROSPACE AERODYNAMICS) 24 December 2014 (2014-12-24) discription, paragraphs [0005]-[0012]	2-6, 10, 36-43



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

14 March 2016

Date of mailing of the international search report

28 March 2016

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088, China

Facsimile No. (86-10)62019451

Authorized officer

BI,Yachao

Telephone No. (86-10)62413310

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/082524**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 101807080 A (ZHEJIANG UNIVERSITY) 18 August 2010 (2010-08-18) the whole document	1-90
A	US 8948935 B1 (GOOGLE INC.) 03 February 2015 (2015-02-03) the whole document	1-90
A	US 2015100182 A1 (ZHU, SHOUQIN) 09 April 2015 (2015-04-09) the whole document	1-90

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2015/082524

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
CN	104635743	A	20 May 2015	None	
CN	101504287	A	12 August 2009	None	
CN	104238580	A	24 December 2014	None	
CN	101807080	A	18 August 2010	None	
US	8948935	B1	03 February 2015	None	
US	2015100182	A1	09 April 2015	None	