

**(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE**

(11) Application No. AU 2014270389 B2

(54) Title
Fan holder for a fan, in particular of a switch cabinet

(51) International Patent Classification(s)
H02B 1/56 (2006.01) **F04D 29/70** (2006.01)
B01D 46/00 (2006.01) **H05K 7/20** (2006.01)
F04D 25/14 (2006.01) **H02B 1/28** (2006.01)

(21) Application No: **2014270389** (22) Date of Filing: **2014.05.22**

(87) WIPO No: **WO14/187903**

(30) Priority Data

(31) Number (32) Date (33) Country
10 2014 101 184.8 **2014.01.31** **DE**
10 2013 105 196.0 **2013.05.22** **DE**

(43) Publication Date: **2014.11.27**
(44) Accepted Journal Date: **2018.05.17**

(71) Applicant(s)
Stego-Holding GmbH

(72) Inventor(s)
Schanzenbach, Bernd Armin; Dent, Robert; Mangold, Elmar

(74) Agent / Attorney
Shelston IP Pty Ltd., Level 21, 60 Margaret Street, Sydney, NSW, 2000, AU

(56) Related Art
US 2002/0173265 A1
DE 20 2006 010 888 U1
US 2013/0023199 A1
US 2010/0003126 A1

ABSTRACT

A fan holder for a fan, comprising a frame, which has an opening, through which a gaseous medium flows during operation, wherein the opening forms an accommodating region, which is designed to accommodate various replaceable inserts, in particular a filter insert and a flap device, and has at least one retaining means for fastening the particular insert.

FAN HOLDER FOR A FAN, IN PARTICULAR OF A SWITCH CABINET

FIELD OF THE INVENTION

[0001] The invention relates to a fan holder for a fan, in particular of a switch cabinet, and to a ventilating device, in particular for a switch cabinet, and to a set comprising a fan holder, at least one flap device and at least one filter mat.

BACKGROUND TO THE INVENTION

[0002] Any discussion of the prior art throughout the specification should in no way be considered as an admission that such prior art is widely known or forms part of common general knowledge in the field.

[0003] The prior art discloses fan devices comprising a fan holder and a fan, which is retained by the fan holder. In the case of such fan devices, cold air is taken in via a filter mat comparatively far down in the switch cabinet and is forced out via a (coarse) exit filter mat comparatively high up. This is intended to avoid the introduction of dust and to generate a positive pressure in the cabinet. The fans known in the prior art are considered to be comparatively ineffective and, in particular, not to be particularly variable.

SUMMARY OF THE INVENTION

[0004] It is an object of the present invention to overcome or ameliorate at least one of the disadvantages of the prior art, or to provide a useful alternative.

[0005] More particularly, the present invention seeks to provide a fan holder, a fan device and a set comprising a fan holder, wherein effective cooling can take place, and wherein it is possible to cater in particular in a variable manner for the user's requirements.

[0005a] Accordingly, a first aspect of the present invention provides a ventilating device having:

a fan holder for a fan,

the fan holder having:

a frame which has an opening through which a gaseous medium flows during operation, the opening forming an accommodating region adapted to accommodate an interchangeable insert in the form of a flap device;

at least one retaining means for fixing the respective insert relative to the frame; and

a separable cover via which the accommodating region can be closed in the outward direction, the cover having a front lattice in the form of a diffuser and having a plurality of through-slots with an elliptical cross section,

wherein the flap device has one or more movable flaps within a flap frame, the flap frame being insertable into the accommodating region of the frame of the fan holder,

wherein a longitudinal axis (L) of the through-slots of the cover is oriented substantially parallel to the flaps in an open state.

[0005b] A second aspect of the invention provides a switch cabinet comprising: a ventilating device according to the first aspect of the invention, wherein the fan holder is arranged in the upper half of the switch cabinet.

[0006] A third aspect of the invention provides a fan holder for a fan, the fan holder including: a frame which has an opening through which a gaseous medium can flow during operation of the fan, wherein the opening forms an accommodating region which is adapted to accommodate different, interchangeable inserts; and at least one retaining means for fixing the respective insert relative to the frame, wherein the opening is delimited laterally by retaining surfaces which retain the respective insert in the frame; wherein the accommodating region has a retaining device which includes: at least one elastic element arranged in a respective corner of the accommodating region for connecting the retaining surfaces, or at least one latching nose, whereby the retaining device subjects the respective insert to a retaining force during operation.

[0007] A core idea of the invention is to provide a fan holder in which it is possible to introduce both a flap device and a filter insert. For this purpose, a corresponding retaining device is provided on the frame or in the accommodating region. This means that the user can insert a flap device into the fan holder. Overall, it is possible to cater in a variable manner for the user's particular requirements. It has been found here that the main task of a fan device for switch cabinets is that of cooling the switch cabinet by air circulation. The intention is to avoid the introduction of dust in the process. The latter, however, is not the main task. It has also been found that more effective cooling can be carried out if a filter device is installed in the upper third of a switch cabinet. It has therefore been considered that the air, rather than being expelled from a switch cabinet via a filter mat (which would result in reduced air throughput), should be expelled via a flap device, which results in improved air flow. Prior-art fan devices

have always provided a filter mat, in order to achieve corresponding protection against dust. By virtue of an outlet filter being installed in the upper region of the switch cabinet (for example in the upper half, in particular in the upper third, of the switch cabinet), an air stream is distributed uniformly onto the inlet filter, which may be arranged in particular in the lower half, in particular in a lower third, of the switch cabinet. This renders an inlet-filter mat comparatively durable and less polluting. Since the fan holder can accommodate both a flap device and a filter insert, the user of the fan holder can make a choice. The user can therefore choose between improved air circulation or improved dust avoidance.

[0008] It is particularly preferred to have a fan holder in which the opening is delimited laterally by retaining surfaces, which retain the respective insert in the frame. In particular, the accommodating region comprises a retaining device, in particular at least one elastic element or at least one latching nose, which subjects the respective insert to a retaining force during operation. This means that a user can readily change over the insert and adapt it to different applications. For example, in order to fix the inserts in the accommodating region, it is possible to arrange an elastic element in each of the corners of the accommodating region, said elastic elements connecting the retaining surfaces.

[0009] It is particularly advantageous, moreover, to provide a separable, in particular pivotably mounted, cover, via which the fan holder, in particular the accommodating region thereof, can be closed in the outward direction. The frame of the fan holder forms preferably an, in particular all-round, step, on which the cover can be positioned.

[0010] A fourth aspect of the present invention provides a set comprising a fan holder according to the third aspect of the invention, a flap device and a filter insert, wherein the flap device and filter insert can be accommodated in the same accommodating region of the fan holder.

[0011] A fifth aspect of the present invention provides a ventilating device comprising a fan holder according to the third aspect of the invention and also a fan. It is particularly advantageous if the fan is connected to the fan holder via a fan funnel. Preferably the ventilation device is adapted for use in or on a switch cabinet. The fan holder advantageously ensures homogenization of the air stream.

[0012] A sixth aspect of the present invention provides a flap device for a fan holder according to the third aspect of the invention having a flap frame which can be inserted into the accommodating region of the fan holder and holds at least one flap. Preferably, the flap holder holds more than one flap. Preferably, said flaps at least partially cover over the flap frame for the purpose of deflecting the flow. The flaps are advantageously connected in a releasable manner to the flap frame. Furthermore, the fan holder is arranged preferably in the upper half of the switch cabinet, in particular in an upper third of the switch cabinet.

[0012a] A seventh aspect of the present invention provides a ventilating device having a fan holder according to the third aspect of the invention and having a flap device according to the sixth aspect of the invention, wherein a longitudinal axis (L) of through-slots of the fan holder is oriented essentially parallel to the flaps in an open state.

[0012b] An eight aspect of the present invention provides a switch cabinet comprising a ventilating device according to the fifth aspect of the invention, wherein the fan holder is arranged in the upper half of the switch cabinet. Preferably the fan holder is arranged in an upper third of the switch cabinet.

[0012c] Unless the context clearly requires otherwise, throughout the description and the claims, the words "comprise", "comprising", and the like are to be construed in an inclusive sense as opposed to an exclusive or exhaustive sense; that is to say, in the sense of "including, but not limited to".

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] One or more preferred embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

[0014] Figure 1 shows a schematic exploded illustration of a ventilating device;

[0015] Figure 2 shows a schematic exploded illustration of a fan holder;

[0016] Figure 3 shows a schematic exploded illustration of the fan holder with a flap device according to the invention;

[0017] Figure 4 shows a cross section through an assembled set comprising a fan holder with flap insert, a fan and a cover; and

- 3b -

[0018] Figure 5 shows a schematic illustration of a switch cabinet having two ventilating devices.

DETAILED DESCRIPTION

[0019] The following description uses the same designations for like, and like acting, parts.

[0020] Figure 1 shows a ventilating device comprising a fan holder 10 having a cover 11, which is closed off in the direction of an outer side 12 by a front lattice 13. In the direction of an inner side 14, the fan holder 10 is followed by a fan funnel 15. The fan funnel 15, in turn, is followed by a fan 16. The fan 16 may be designed, in particular, in the form of an axial fan.

[0021] In one use example, the ventilating device is connected to a switch cabinet (not shown). The ventilating device here is inserted into an aperture in a switch-cabinet wall and fixed there by a suitable fastening means, which is located in particular on the fan holder 10. The ventilating device thus establishes a connection between the interior of the switch cabinet and the outer region thereof. Depending on the direction of rotation of the fan 16 located in the switch cabinet, air can be taken into the switch cabinet, or expelled therefrom, by the ventilating device.

[0022] The fan holder 10 has a frame 26 and an accommodating region 28, which is formed by an opening 27 in the fan holder 10. The fan holder 10 also has an all-round inner step 19, which is formed on the frame 26 and against which the cover 11 can butt in the closed state of the accommodating region 28.

[0023] Different inserts can be inserted into the accommodating region 28 of the fan holder 10 and fixed there by suitable retaining means. In particular, the opening 27 is delimited by retaining surfaces 29, which retain the respective insert in the frame. It is further possible to provide specific retaining devices, for example latching, clip-action, rubber or magnetic elements, in order to fix a respective insert in the accommodating region 28. In that embodiment of the invention which is shown in figure 1, an insert is retained by elastic elements 30, which subject the insert to a retaining force. The elastic elements 30 are arranged in corners 31 of the accommodating region 28 and, in this way, connect the retaining surfaces 29 to one another.

[0024] The accommodating region 28 can be closed by means of the cover 11. In an open state, the cover 11 allows access to the accommodating region 28. The cover 11 is fastened in a removable, preferably pivotable, manner on the fan holder 10, in particular on an edge of the frame 26 which, when the ventilating device is in the installed state, is directed toward the floor. The cover 11 can be arrested in a closed position on the fan holder 10 by suitable snap-

fit and/or latching means or the like. The maximum opening angle of the cover 11 in relation to the frame 26 is preferably predetermined by suitable delimiting elements. This makes it possible overall for the inserts to be changed over particularly straightforwardly if required.

[0025] As illustrated in figures 2 and 3, a flap device 21 may be installed, in the form of an interchangeable insert, in the accommodating region 28. The flap device 21 comprises a flap frame 32 and flap-retaining crosspieces 22 as well as a multiplicity of flaps (lamellae) 23 (of which, to give a better view, only five are illustrated). The flaps (lamellae) 23 are mounted, in particular clipped, in a pivotable manner on the retaining crosspieces 22 and can be pivoted by air flowing out from the direction of the arrow 33. It is conceivable also to provide an active pivoting device (for example an electromotive one). In the installed state, the flap frame 32 has an outer surface butting preferably against the retaining surfaces 29.

[0026] As an alternative to the flap device 21, the interchangeable insert used may also be a filter insert 24 (see figure 2), which is inserted into the accommodating region 28. The filter insert may be, for example, a filter mat or similar suitable filter element. Whereas, the main purpose of the filter insert is to filter out particles, such as dust or the like, the flap device 21 serves to realize an enhanced air throughput without any filtering of the air flowing through the flap device 21. An end user of the ventilating device, consequently, can decide himself whether to equip the fan holder with a flap device, for optimized air circulation/cooling in a switch cabinet, or with a filter insert, for optimized dust avoidance.

[0027] The front lattice 13 may also be in the form of a netting or similar air-permeable material. Furthermore, for cleaning or changeover purposes for example, it may be designed such that it can be released from the cover 11. Without the front lattice 13, the cover 11 forms a rectangular (all-round) frame (having two rectilinearly running edges and two curved edges, the rectilinearly running edges being located opposite one another, as are the curved edges). Similarly, a main body 25 of the fan holder 10 also forms an all-round (rectangular) frame. Two mutually opposite sides of the main body 25 are of rectilinear design; the other mutually opposite sides are curved. In the installed state of the cover 11, the curved sides are in alignment with the curved sides of the main body 25 of the fan holder 10. This achieves a homogeneous unit.

[0028] Figure 4, in addition, shows a cross section through an assembled set comprising a fan holder 10 with a flap insert 21, a fan 16 and a cover 11. It is clear from figure 4 that the cover 11, and the front lattice 13 accommodated therein, is arranged in front of the fan holder

10, as seen in the air-exit direction 39. This arrangement with the cover 11 and the front lattice 13 in front of the fan holder advantageously prevents foreign bodies, in particular water, entering into the ventilating device through one or more open flaps 23.

[0029] In particular the front lattice 13 in the embodiment shown in figure 4 is designed in the form of a diffuser, which prevents liquid, e.g. when it rains, from entering into the interior of the ventilating device and, in particular, into the fan. This is because, when the fan 16 is at a standstill, there is a risk of the flaps 23 opening as a result of a, for example, draft-induced negative pressure or of a mechanical blockage, wherein, consequently, the switch-cabinet interior is open, and dirt, water, etc., could penetrate, when the fan 16 is at a standstill. The diffuser is configured such that it conforms to relative standards, in particular in respect of the safety requirements, and has an ideal flow shape for the exit of air. As figure 4 shows, the front lattice 13, for this purpose, has a plurality of through-slots 40, of, in particular, oval or elliptical cross section. The longitudinal axis L of the through-slots 40 is oriented in relation to the flaps 23 such that it is oriented essentially parallel to the flaps 23 in the (fully) open state (see line L' in figure 4). This minimizes the flow resistance of the through-slots 40.

[0030] The front lattice 13 can be opened from the outside preferably only with the use of a screwdriver and can be closed from the inside by the catch being locked. This provides for straightforward protection against vandalism. Furthermore, the front lattice 13 is mounted preferably in a rotatable manner in the frame of the cover 11, in order to allow for servicing to be carried out.

[0031] Figure 5, in addition, shows, schematically, a case where the invention is used with a switch cabinet 34 and two ventilating devices 35 and 36. Whereas the lower ventilating device 35, in the vicinity of the floor, engages through the switch-cabinet wall 37 in a lower third of the latter, the second ventilating device 36 is arranged in an upper third of the switch-cabinet wall 37. Of course, the two ventilating devices need not be arranged in the same switch-cabinet wall.

[0032] Provision may advantageously be made for the first, lower ventilating device 35 to form an inlet ventilating device, which has a filter insert, e.g. a filter mat, in the accommodating region 28 and in the case of which a fan takes air into the switch cabinet 34 in order to generate a positive pressure. The positive pressure in the switch cabinet is intended to prevent particles, in particular dust or the like, from entering into the switch cabinet through doors, cable ducts or other openings.

[0033] Whereas the prior art, thus far, also equipped the upper ventilating device 36 with a filter insert, in order to reduce further the entrance of particles into the switch cabinet, the ventilating device 36 may advantageously comprise a flap device 21, which is shown in figures 2 and 3, in the accommodating region 28. The upper ventilating device 36 serves as an outlet ventilating device and, consequently, the fan has a direction of rotation which causes air to be expelled from the switch cabinet 34. The air stream which is established in the switch cabinet 34 by way of the lower and upper ventilating devices 35, 36 is indicated in figure 5 by the arrow 38. In contrast to a filter mat, the flap device 21 does not reduce the air throughput, and this makes it possible for the switch cabinet 34 to be cooled effectively in the upper region. The result is improved air flow in the switch cabinet, which also has a positive effect on the filter insert in the lower ventilating device 35, since the amount of air taken in is smaller and therefore the air is filtered not just by way of that surface area of the filter insert which corresponds to the impeller of the fan 16, but by way of the entire surface area of the filter. As a result, the air taken in is thus distributed more uniformly overall over the entry filter insert. The filter insert is thus more durable and contamination is reduced. Furthermore, the flap device 21 advantageously prevents undesired foreign bodies, in particular dust, water or the like, from penetrating into the switch cabinet when the fan is at a standstill. This advantageous effect is achieved in that, when the fan is at a standstill, the flaps 23 are closed and thus close off the fan, and the switch-cabinet interior, against foreign bodies. The pivotable mounting of the flaps means that the latter are thus retained in the closed state, preferably by the force of gravity or by an electric motor, when the fan 16 has been switched off. It is only when the fan is in the switched-on state that the flaps 23 are shifted into an open position by the resulting air stream.

[0034] The flexible insert options and the modular construction with the aid of the fan holder according to the invention means that both systems can be readily realized by the present invention: on the one hand, it is possible to achieve optimized dust avoidance by it also being possible for the upper fan holder 10 to be readily provided, if required, with a filter insert 24. Furthermore, for optimized air circulation, and thus for optimized cooling at the uppermost location, it is possible, as an alternative, to insert a flap insert 21 into the fan holder, in order to achieve the above described optimized-cooling function.

[0035] The modularity of the system according to the invention provides for a particularly high level of flexibility, allowing a user to adapt the fan holder individually to existing requirements and, if necessary, to change over the inserts in the accommodating region 28 in a particularly straightforward manner.

- 8 -

[0036] Although the invention has been described with reference to specific examples it will be appreciated by those skilled in the art that the invention may be embodied in many other forms.

List of designations

10	Fan holder
11	Cover
12	Outer side
13	Front lattice
14	Inner side
15	Fan funnel
16	Fan
19	Step
21	Flap device
22	Retaining crosspieces
23	Flaps
24	Filter insert
25	Main body
26	Frame
27	Opening
28	Accommodating region
29	Retaining surfaces
30	Elastic element
31	Corners
32	Flap frame
33	Arrow
34	Switch cabinet
35	Ventilating device
36	Ventilating device
37	Switch-cabinet wall
38	Arrow
39	Air-exit direction
40	Through-slots
L	Longitudinal axis

CLAIMS

1. A ventilating device having:

a fan holder for a fan,

the fan holder having:

a frame which has an opening through which a gaseous medium flows during operation, the opening forming an accommodating region adapted to accommodate an interchangeable insert in the form of a flap device;

at least one retaining means for fixing the respective insert relative to the frame; and

a separable cover via which the accommodating region can be closed in the outward direction, the cover having a front lattice in the form of a diffuser and having a plurality of through-slots with an elliptical cross section,

wherein the flap device has one or more movable flaps within a flap frame, the flap frame being insertable into the accommodating region of the frame of the fan holder,

wherein a longitudinal axis (L) of the through-slots of the cover is oriented substantially parallel to the flaps in an open state.

2. The device as claimed in claim 1, wherein the opening is delimited laterally by retaining surfaces, which retain the respective insert in the frame.

3. The device as claimed in claim 1 or claim 2, wherein the accommodating region has a retaining device comprising at least one elastic element or at least one latching nose, which subjects the respective insert to a retaining force during operation.

4. The device as claimed in claim 3, wherein an elastic element is arranged in each of the corners of the accommodating region, said elastic elements connecting the retaining surfaces.

5. The device as claimed in claim 1, wherein the frame forms an all-round step on which the cover can be positioned.

6. The device as claimed in any one of the preceding claims, and also a fan for a switch cabinet.

7. The device as claimed in claim 6, wherein the fan is connected to the fan holder via a fan funnel.

8. The device as claimed in claim 1, wherein the flaps of the flap device are closed when a fan is in a switched-off state.
9. The device as claimed in any one of the preceding claims, wherein the flaps of the flap device are connected in a releasable manner to the flap frame.
10. A switch cabinet comprising: a ventilating device as claimed in claim 6 or claim 7, wherein the fan holder is arranged in the upper half of the switch cabinet.

2014270389

18 Jan 2018

1/5

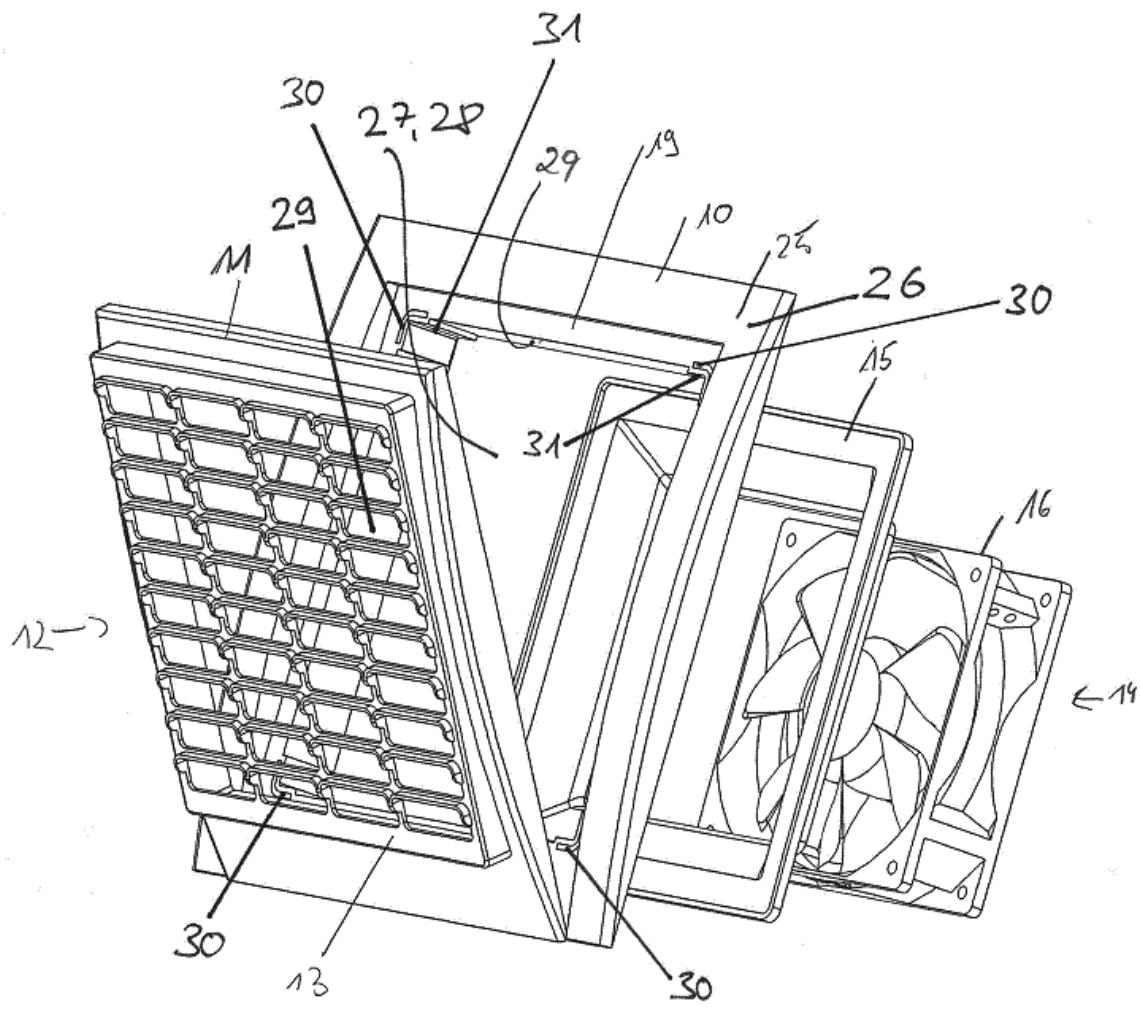


Fig. 1

2014270389

18 Jan 2018

2/5

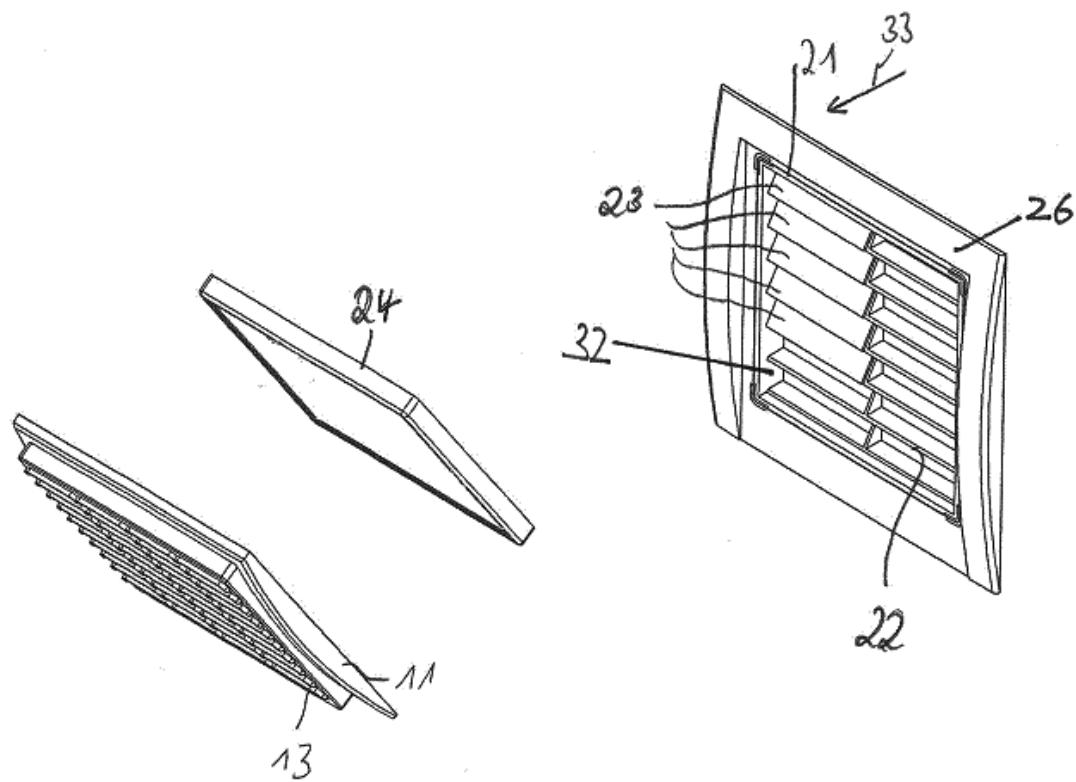


Fig. 2

2014270389 18 Jan 2018

3/5

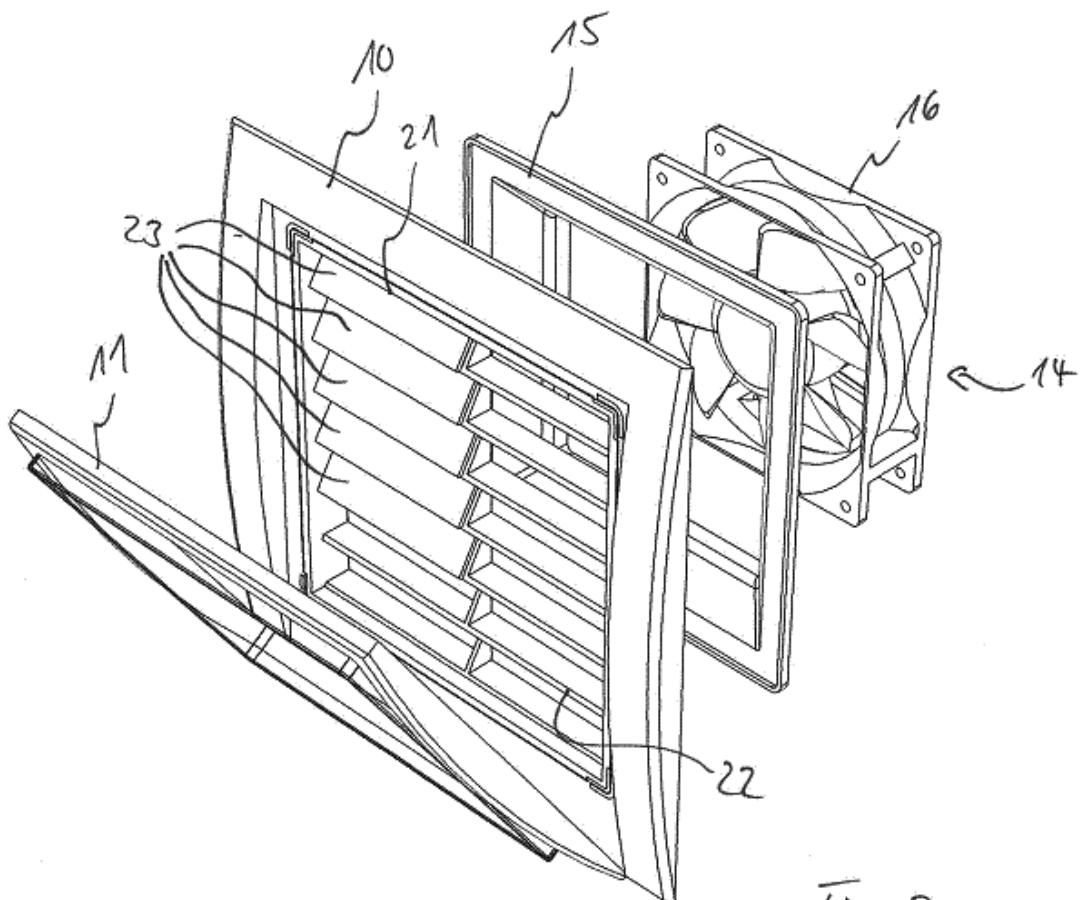


Fig. 3

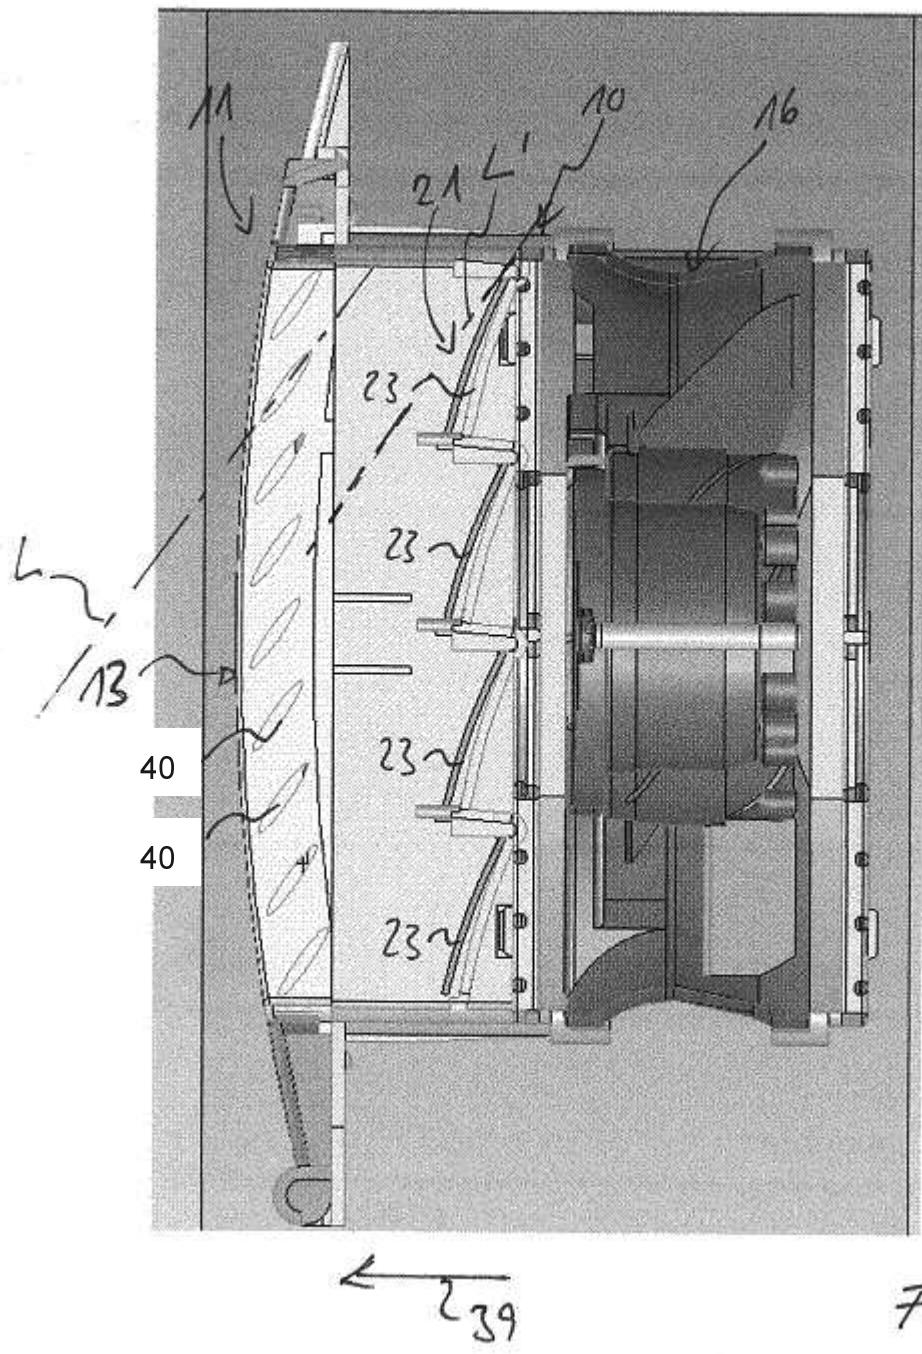


Fig. 4

