

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 July 2009 (02.07.2009)

PCT

(10) International Publication Number
WO 2009/079779 A1

- (51) **International Patent Classification:**
G08G 1/14 (2006.01) G08G 1/04 (2006.01)
- (21) **International Application Number:**
PCT/CA2008/002248
- (22) **International Filing Date:**
19 December 2008 (19.12.2008)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/015,738 21 December 2007 (21.12.2007) US
61/015,867 21 December 2007 (21.12.2007) US
- (71) **Applicant (for all designated States except US):** LED-DARTECH INC. [CA/CA]; 291, rue des Violettes, Saint-Nicolas, Quebec G7A 3M9 (CA).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** MIMEAULT, Yvan [CA/CA]; 742, rue Clairmont, Quebec, Quebec G1V 3C7 (CA).
- (74) **Agent:** OGILVY RENAULT, LLP / S.E.N.C.R.L., s.r.l.; 2nd Floor, 500 Grande Allee Est, Quebec, Quebec G1R 2J7 (CA).


- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(U))

[Continued on next page]

(54) Title: PARKING MANAGEMENT SYSTEM AND METHOD USING LIGHTING SYSTEM

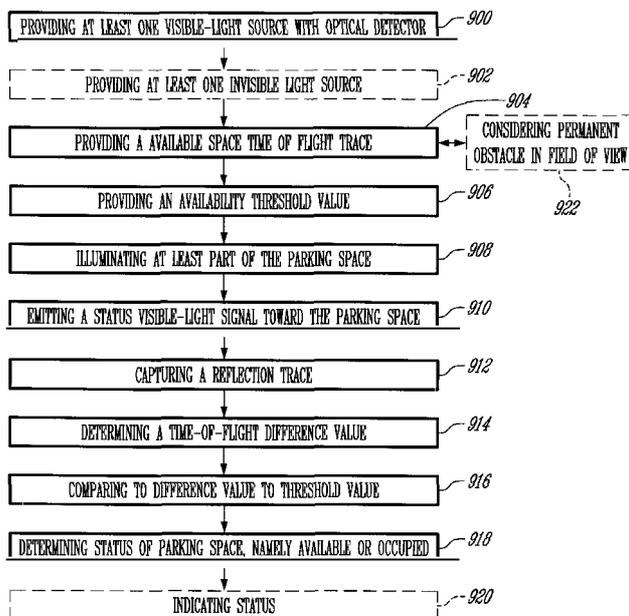

(57) Abstract: A system and a method for detecting availability of a parking space in a parking facility are provided. A first method has the steps of providing a lighting system having at least one visible-light source for illumination of at least part of the parking space. Providing an available space time-of-flight trace. Providing an availability threshold value. Illuminating the at least part of the parking space using the at least one visible-light source. Emitting a status visible-light signal from the visible-light source in the predetermined direction toward the predetermined target in the parking space. Capturing a status reflection trace at the visible-light source. Determining a time-of-flight difference value by comparing the status reflection trace to the available space time-of-flight trace. Comparing the time-of-flight difference value with the availability threshold value and determining a status of the parking space to be one of available and not available. Another method has the steps of providing a lighting system having at least one visible-light source for illumination of at least part of the parking space. Providing a camera. Providing an available space region value. Providing an availability threshold value. Illuminating the at least part of the parking space using the at least one visible-light source. Emitting visible light from the visible-light source in the predetermined direction to the predetermined target in the parking space. Capturing a

reflection of the emitted visible light at the camera and determining a status region value. Determining a region difference value by comparing the status region value to the available space region value. Comparing the region difference value with the availability threshold value and determining a status of the parking space to be one of available and not available.

WO 2009/079779 A1



Published:

— *with international search report*

PARKING MANAGEMENT SYSTEM AND METHOD
USING LIGHTING SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

- 5 **[0001]** This application claims priority of US provisional patent applications nos. 61/015,738 and 61/015,867, both filed on December 21, 2007 by Applicant.

-

TECHNICAL FIELD

- 10 **[0002]** The invention relates to the management of parking facilities, more particularly, to the detection of available parking spaces in a parking facility using a lighting system.

BACKGROUND OF THE ART

- 15 **[0003]** Growth of several metropolitan areas, urban revitalization and the mobility of our society using vehicles has increased the need for an efficient transport infrastructure. The demand for parking is increasing and represents a major concern. Advanced Parking Management Systems (APMS) are used to assist motorists in finding parking spaces quickly. APMS can provide real-time information of parking space occupancy for several facilities. This
- 20 information is used to generate parking availability messages that are displayed by message information boards through several different means.

- [0004]** System accuracy is a critical factor. The method used for vehicle counting is an important aspect of the APMS. Two types of systems are
- 25 generally used for counting. The first one is based on entry/exit counters. Usually, inductive loop counters, RF tags and video detection are used. The second method is based on space occupancy detectors and use ultrasonic, inductive loop, infrared or microwave sensors. In that case, each sensing unit is installed over individual lot spaces and detects if the lot is available or not.
- 30 Entry/exit counters are not as accurate as individual space sensors but are easier to implement. The installation of space sensors or the availability of mounting space for detectors in pre-existing parking facilities can be a problem. The ability to communicate data for each individual space is also an

important issue to consider. The degree of complexity of the installation of the sensors can have an important impact on costs for an APMS and is another issue for these systems.

5 [0005] Some systems used for detecting available parking spaces use an emitter and a receiver. A signal is transmitted from the emitter to the receiver to detect an available space. When the receiver is hidden behind a vehicle, the signal will not be able to reach the receiver and the system will conclude that a vehicle is present. Other systems use optical sensors which read barcodes written on the pavement. When the optical sensor is not able to read
10 the bar code, the system concludes that a vehicle is parked in the parking space.

[0006] In a vision-based system, each camera is able to survey more than one parking space. Some are able to identify features such as plate number, color, make and model of a vehicle. If such precision of detection is required,
15 the performance of the camera is critical, notably in terms of resolution. Also, vision-based systems need a high bandwidth to communicate the data. Some smart cameras have an embedded processing system but are expensive. Other vision-based systems use stereoscopic principles to determine the occupancy of a parking space.

20 [0007] For all of these prior art solutions, costly installation is necessary. Typically, sensors and cameras must be mounted on walls, on a pillar, on a rail or must be embedded in the parking space. Prior art parking management systems are stand-alone systems that do not integrate within the current lighting infrastructure, using their own power line and, own cable interfaces.
25 Some sensors are powered by batteries and require maintenance over time.

SUMMARY

[0008] It is therefore an aim of the present invention to address at least one of the above mentioned difficulties

30 [0009] It is an object of the present invention to provide a lighting system capable of detecting the presence of vehicles for advanced parking management.

[0010] It is a further object of the present invention to provide a method for detecting the presence of vehicles for advanced parking management.

[0011] By integrating detection of the availability of a parking space within a LED lighting fixture, the benefits for the parking operator are important: by the
5 return through low cost installation, low cost maintenance, lower energy cost and by improvement of parking efficiency.

[0012] A system and a method for detecting availability of a parking space in a parking facility are provided.

[0013] According to a first aspect of the present invention, there is provided
10 a method for determining an availability of a parking space comprising: providing a lighting system having at least one visible-light source for illumination of at least part of the parking space. Providing an available space time-of-flight trace. Providing an availability threshold value. Illuminating the at least part of the parking space using the at least one visible-light source.
15 Emitting a status visible-light signal from the visible-light source in the predetermined direction toward the predetermined target in the parking space. Capturing a status reflection trace at the visible-light source. Determining a time-of-flight difference value by comparing the status reflection trace to the available space time-of-flight trace. Comparing the time-of-flight difference
20 value with the availability threshold value and determining a status of the parking space to be one of available and not available.

[0014] According to a second aspect of the present invention, there is provided a method for determining an availability of a parking space comprising: providing a lighting system having at least one visible-light source
25 for illumination of at least part of the parking space. Providing a camera. Providing an available space region value. Providing an availability threshold value. Illuminating the at least part of the parking space using the at least one visible-light source. Emitting visible light from the visible-light source in the predetermined direction to the predetermined target in the parking space.
30 Capturing a reflection of the emitted visible light at the camera and determining a status region value. Determining a region difference value by comparing the status region value to the available space region value. Comparing the region difference value with the availability threshold value and

determining a status of the parking space to be one of available and not available.

[0015] According to a third aspect of the invention, there is provided a system for detecting availability of a parking space in a parking facility, comprising: a powered lighting module having at least one visible-light source driven by an illumination driver, an optical detector for capturing a status reflection trace at said lighting module, a lighting module processor for controlling said illumination driver and said optical detector and receiving said status reflection trace, a powered central unit having a memory, a central unit processor and a network for communicating information between said processor and said central unit.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] Having thus generally described the nature of the invention, reference will now be made to the accompanying drawings, showing by way of illustration a preferred embodiment thereof and in which:

[0017] Figure 1 shows an example of a parking facility equipped with the system of an embodiment of the invention in which lighting modules are provided above and in the middle of the vehicle passageway, each lighting 8 parking spaces;

[0018] Figure 2 shows a cross section of the example of Figure 1;

[0019] Figure 3 shows an example of a parking facility equipped with the system of an embodiment of the invention in which the lighting modules are provided above and on each side of the vehicle passageway, each lighting 25 two parking spaces;

[0020] Figure 4 shows a cross section of the example of Figure 3;

[0021] Figure 5 is a block diagram illustrating an embodiment of the lighting system;

[0022] Figure 6 shows an embodiment of a lighting module;

[0023] Figure 7 is a flowchart of an embodiment of the system which uses of time-of-flight technique;

[0024] Figure 8 illustrates an embodiment of the system which uses a triangulation technique;

[0025] Figure 9 is a flow chart of the main steps of an embodiment of the invention; and

[0026] Figure 10 is a flow chart of the main steps of another embodiment of the invention.

- 5 [0027] It will be noted that throughout the appended drawings, like features are identified by like reference numerals.

DETAILED DESCRIPTION

10 [0028] Typically, illumination for parking facilities is made by various lighting modules using metal halide, high pressure sodium or fluorescent lights. Recently, due an increase in performance needs and cost reductions, LEDs are now another source of illumination. LEDs have several advantages notably in terms of lifetime, efficiency, color rendering index (CRI) and robustness.

15 [0029] An example of a parking facility equipped with the system of an embodiment of the invention is shown in Fig. 1. The system is particularly useful for parking garages. Lighting devices 100 are used for illumination of an illuminated zone 101. The network of lighting devices 100 has the first purpose of illuminating all of the parking area and secondly has to meet
20 illumination requirements. Indeed, minimum horizontal illuminance, maximum illuminance, uniformity, vertical illuminance and minimum color rendering index are important factors to consider when designing a lighting system for a parking garage. In a parking garage, the mounting height is typically between 1.8 meter to 3 meters and the devices need to illuminate a target area of a
25 few tens of square meters.

[0030] Fig. 1 shows a configuration where lighting devices 100 are placed in the middle of the passageway 105 and illuminate several parking spots 102 on both sides. In this example, the parking spaces are numbered through S1 through S20. Figure 3 shows another configuration where lighting devices 100
30 are placed at the intersection of a passageway and two parking spaces. Several other configurations are possible.

[0031] Each device 100 provides an occupancy status for at least one individual parking space 102. This information is transmitted by the

communications network 103 to a central computer (not shown). The device has at least one field of view for the detection and, in the calibration process, will take into consideration permanent obstacles, such as structural pillars 104 which could be obstructing part of the field of view.

5 [0032] Fig. 2 and Fig. 4 show a cross section of the examples of Fig. 1 and 3 respectively. Part of the illumination light 201 is directed towards each parking space and towards the passageway and reaches the floor of the parking facility 202 or a vehicle 203. A part of the light 204 is backscattered to the lighting device 100 and will be received by the detector inside the lighting
10 device 100. In these examples, vehicle 206 is parked at space S4 which faces space S14 and is next to a pillar 104.

[0033] Fig. 5 is a block diagram illustrating an embodiment of the lighting system having the capability of detecting the occupancy of parking spaces and controlling the illumination to act as a feedback signal for users. The
15 system 510 has visible-light sources 512 and 513. The visible-light source 512 has, as a first purpose, the emission of visible light for illumination to assist human vision and the light indicators 513 have the purpose of indicating the status of a parking site by visual communication of information, like signaling. The primary purpose of emitting light is controlled according to specific criteria
20 like optical power, field of view and light color, to meet requirements defined through a number of regulations for parking applications. The illuminance requirement is determined by the layout of the parking facility, traffic safety issues and by the needs in terms of visibility and security of motorists and pedestrians. Illumination for parking garages is dependent on the low
25 mounting height for the lighting modules and the relatively low surface reflectance. The Illuminating Engineering Society of North America (IESNA) recommends a minimum horizontal illuminance of 10 Lux and a maximum/minimum horizontal uniformity ratio of 10:1 for parking garages. The level of illuminance is higher for the ramps (day: 20 Lux, Night: 10 lux)
30 and for entrance areas (day: 500 Lux, night: 10 Lux). The required level for vertical illuminance is typically half of the required level for horizontal illuminance. In the preferred embodiment, the visible-light source 512 has one or more solid-state lighting devices, LEDs or OLEDs for example.

[0034] The visible-light source 512 is connected to a source controller 514, so as to be driven in order to produce visible light. In addition to emitting light, the system 510 performs detection of objects and particles (vehicles, passengers, pedestrians, airborne particles, gases and liquids) when these objects are part of the environment/scene illuminated by the light source 512. Accordingly, the source controller 514 drives the visible-light source 512 in a predetermined mode, such that the emitted light takes the form of a light signal, for instance by way of amplitude-modulated or pulsed light emission.

[0035] These light signals are such that they can be used to provide the illumination level required by the application, through data/signal processor 518 and source controller 514, while producing a detectable signal. Accordingly, it is possible to obtain a light level equivalent to a continuous light source by modulating the light signal fast enough (e.g., frequency more than 100 Hz) to be generally imperceptible to the human eye and having an average light power equivalent to a continuous light source.

[0036] In an embodiment, the source controller 514 is designed to provide an illumination drive signal, such as a constant DC signal or a pulse-width modulated (PWM) signal, that is normally used in lighting systems to produce the required illumination and control the intensity. The illumination drive signal is produced by the illumination driver sub-module 514A of the controller 514.

[0037] The modulated/pulsed drive signal is produced by a modulation driver sub-module 514B of the controller 514. The amplitude of short-pulse (typ. <50 ns) can be several times the nominal value while the duty cycle is low (typ. <0.1%). The modulation can be up to several MHz.

[0038] The modulator driver 514B can also be used to send data for optical communication. Both driving signals can be produced independently or in combination. Sequencing of the drive signals is controlled by the data/signal processor 518. The light source 512 can be monitored by the optical detector and acquisition 516 and the resulting parameters sent to the data/signal processor 518 for optimization of data processing.

[0039] An alternative for sourcing the light signal for detection involves an auxiliary light source (ALS) 522, which can be a visible or non-visible source (e.g., UV or IR light, LEDs or laser) using the modulation driver 514B. The

auxiliary light source 522 provides additional capabilities for detecting objects and particles. IR light can be used to increase the performance and the range of the detection area. IR lights and other types of light can be used to detect several types of particles by selecting specific wavelengths. The auxiliary light source 522 can also be useful during the installation of the system by using it as a pointer and distance meter reference. It can also be used to determine the condition of the lens.

[0040] The visible-light source 512 is preferably made up of LEDs. More specifically, LEDs are well suited to be used in the lighting system 510 since LED intensity can be efficiently modulated/pulsed at suitable speeds. Using this feature, current lighting systems already installed and featuring LEDs for standard lighting applications can be used as the light source 512 for detection applications, such as presence detection for energy savings, distance measurements, smoke detection and spectroscopic measurements for gas emission.

[0041] The system 510 has at least one lens 530 through which light is emitted in an appropriate way for the parking applications. At least one input lens section 530a of at least one lens 530 is used for receiving the light signal, for instance reflected or diffused (i.e., backscattered) by the objects 534. This input lens section 530a can be at a single location or distributed (multiple zone elements) over the lens 530 and have at least one field of view. Several types of lens 530 can be used, such as Fresnel lenses and fisheye lenses for instance. A sub-section of the lens 530 can be used for infrared wavelength. A sub-section of the lens 530 can be used for optical data reception.

[0042] A detector and acquisition module 516 is associated with the visible-light source 512 and/or auxiliary light source 522 and the lens 530. The detector and acquisition module 516 is an optical detector (or detectors) provided so as to collect light emitted by the light source 512/ALS 522 and back-scattered (reflected) by the vehicle/pedestrian 534. Detector and acquisition module 16 can also monitor the visible-light source 512 or auxiliary light source 522. The light signal can also come from an object 534 being the direct source of this light (such as a remote control) in order to send information to the data/signal processor through the optical detector module

516. The optical detector and acquisition module 516 is, for example, composed of photodiodes, avalanche photodiodes (APD), photomultipliers (PMT), complementary metal oxide semiconductor (CMOS) or charge coupled device (CCD) array sensors, 3D camera sensors (time-of-flight depth sensor),
5 with appropriate acquisition circuits to digitalize the data.

[0043] Filters are typically provided with the detector module 516 to control background ambient light emitted from sources other than the lighting system 510. Filters can also be used for spectroscopic measurements and to enhance performance of the optical detector module 516.

10 **[0044]** The data/signal processor 518 is connected to the detector and acquisition module 516 and receives digitalized data. The data/signal processor 518 is also connected to the source controller 514, so as to receive driving data there from. The data/signal processor 518 has a processing unit (e.g., CPU) so as to interpret the data from the detector and acquisition
15 module 516, in comparison with the driving data of the source controller 514, which provides information about the predetermined mode of emission of the light signals emitted by the visible-light source 512.

[0045] Accordingly, information about the vehicle and pedestrian (e.g., presence, distance, etc.) is calculated by the data/signal processor 518 as a
20 function of the relation (e.g., phase difference, relative intensity, spectral content, time of flight, etc.) between the driving data and the detected light data. A database 520 may be provided in association with the data/signal processor 518 so as to provide historical data (serial number, date of installation, etc), calibration (data store during the calibration process,
25 threshold for instance), and tabulated data to accelerate the calculation of the object parameters (signal reference for instance).

[0046] In view of the calculation it performs, the data/signal processor 518 controls the source controller 514 and thus the light output of the visible-light source 512. For instance, the visible-light source 512 may be required to
30 increase or reduce its intensity, or change the parameters of its output. For example, changes in its output power can adapt the lighting level required in daytime conditions versus nighttime conditions. The system can also slightly increase the level of luminance when activities are detected. In the case of the

configuration of Fig. 3, light oriented towards the parking area can be increased when events are detected within the parking space without increasing light oriented towards the aisle (the system controls the dimming level for the aisle or passageway and parking area separately) Another
5 example is to control the lighting source to be used as an indicator of an available parking space for users of the parking facility by emitting short "flashes" to indicate the availability of a parking space in the vicinity of the lighting module. Light indicators 513 have also the function to indicate the availability of a parking space. Typically, light indicators 513 are made with
10 red and green LEDs to fulfill this function.

[0047] The system 510 has sensors 532 connected to the data/signal processor 518. Sensors 532 can be passive infrared sensors, temperature sensors, day/night sensors, etc. Sensors 532 are useful during the installation of the system and during operation of the system. For instance, data from a
15 passive infrared sensor can be useful to detect the presence of a pedestrian and adapt the level of light output or to transmit the information of a presence of pedestrian to the central computer. Information from sensors 532 and data/signal processor 518 and light from light source 512 and auxiliary light source 522 can be useful during installation, in particular for adjusting the field
20 of view of the optical receiver. The system 510 has a power supply and interface 528. The supply input receives a nominal voltage to operate the system, typically 120Vac or 240Vac. This input voltage is transformed to supply the lighting source and electronic circuits. The interface section is connected to a Data/signal processor and communicates information to an
25 external system 540 (via wireless, power line, Ethernet, etc.). This communicated information is related to the occupancy of each parking space. Data transmission from sensors or visual data from 2D sensors can also be used, notably for security purposes. Information from the lighting network is sent to central computer that controls the advanced parking management system. Central computer 540 can configure and control each lighting module
30 in the network. For instance, a parking space can be reserved for a specific function and the central computer can set the lighting module to indicate that this space is not available even if no vehicle is detected by the sensor of the

lighting module. Lighting modules can be configured as a mesh network. Information can be shared between each module in the network.

[0048] Fig 6 shows an embodiment of modular lighting system using LEDs as a lighting source. The lighting source 600 has LEDs 601 emitting light illumination 602. The lighting source 600 has green light indicators 603 and red light indicators 604 emitting green optical signal 605 and red optical signal 606 respectively and indicating the status of a parking spaces (availability/occupancy). The backscattered returned light signal from a parking space 607 is detected by the optical detector 608 and processed by the lighting module 600. The power supply and interface 609 of lighting module 600 receive power from the electrical network and communicate to a central computer. Several lighting modules are required to illuminate a parking garage. Each lighting module has to illuminate a target area. For example, a 7.5 meters x 7.5 meters (56 m²) area is a typical size for this application. In that case, with lighting modules installed at a 3-meter height, assuming the average illuminance is 30 Lux (3 times the minimum based on the IESNA recommendation) over the 56 m², the total luminous flux required is approximately 1700 lumens. Nowadays, performance for some LEDs has reached more than 100 lumens. Few LEDs are required in a lighting module for this lighting purpose. Obviously, effects of temperature (the output of LEDs drops when temperature increases), degradation of performance over the lifetime of the lighting system and the efficiency of the optical components need to be taken into account when designing the system. Optical design plays an important role in optimizing the illumination over the target area. Lens optics are required to distribute uniformly the light to meet recommended ratio of uniformity.

[0049] Detection based on the time of flight principle

[0050] The time of flight principle is especially well suited for a parking management system. The range for the detection is relatively short (typically less than 10m) and the reflected signal is relatively strong. The requirements for accuracy and refresh rate are relatively low. The power of the source does not need to be high. In fact, only a one bit resolution is needed to determine the occupancy of a parking spot using relative distance measurement namely

whether a vehicle is present or absent. However, the electronic circuits still need to detect small signals with a few nanosecond of resolution. Moreover, when a LED light source with pulse width modulation (PWM) is used as the source for detection and ranging, the rise time for the signal source could be
5 several tens and even hundreds of a nanosecond.

[0051] In order to detect occupancy of a parking space at a low cost, the following method can be used. A LED light source is used for illumination with a PWM circuit to control the intensity of illumination. The same PWM LED light source is also used as a source for detection and ranging measurement.
10 An optical detector and acquisition sub-system samples the reflected or backscattered returned light signal from a parking space. The distance is estimated and compared to the distance to the floor measured during the calibration. The status of the occupancy of the parking space is determined and sent to an external system.

15 [0052] During the calibration process, a threshold is set to discriminate the presence or the absence of a vehicle in the parking space. For example, the distance between the floor of a parking space and the lighting module can be 6 meters. The time-of-flight trace of the reflection of the optical signal between the lighting module and the floor is stored in the memory of the lighting
20 module. When a vehicle is displaced into the parking space, the distance for the optical reflection path of the light is shorter and the time-of-flight trace will shift a few nanoseconds earlier (ex.: 10 ns for a distance change of 1.5 meter). A threshold of 5 ns can be set to clearly define the status of the occupancy of the parking space.

25 [0053] At least one detector is used per parking space. Several detectors can be multiplexed and can use the same acquisition circuit. One detector can be used with different fields of view when sequential sources illuminate different sections of the scene. Time-of-flight depth sensors or 3D imaging sensors can also be used as detectors for the system. Mechanical adjustment
30 can be required to set the right position of the field-of-view (FOV) of the sensor, particularly when only one FOV per parking space is installed. When a plurality of FOVs are available per parking space, selection of at least one

FOV per parking space is determined during the installation typically using a computer communicating with the lighting module.

[0054] Figure 7 is a flowchart representing one of the methods used to obtain measurement and determine parking space occupancy. A source emitting visible wavelengths or non-visible wavelengths generates a signal containing pulses which can be very short (typically several nanoseconds up to few tens of nanoseconds) or generates a typical PWM signal. In this last case, one can use an AC coupler in the optical detector and acquisition unit which accentuates the transitions enabling recordal of the shift measurement.

5 One can also use a modulated source which incorporates a DC component.

[0055] The detection circuit detects the backscattered signal and the system acquisition and processing determines the delay between the signals sent and received. This delay is determined in part by the distance of the background or the object (ex: parking ground or a vehicle) which is present in the field of view. It is also determined by the delays generated by the electronic circuits. These circuits may introduce a significant drift in the delays. This drift is relatively slow, generally due to the thermal variation.

[0056] Starting from the measured delay, the Data/Signal Processor calculates the relative variation between the new measurement of the delay and the previous delay. A significant reduction in the shift indicates that an object closer to the detector was detected in the field of view (ex.: a new vehicle entering in the parking space), while a significant increase in the shift indicates that an object was removed from the field of view (ex.: a vehicle leaving the parking space).

20 [0057] During configuration, a Noise Level parameter (NL, typically in ns) is initialized in order to determine what is considered a significant variation with respect to the system noise. A Threshold parameter (Th, typically in ns) is also initialized during the configuration in order to determine what is considered a significant variation representing a change in the parking space occupancy (arrival or departure of vehicle). The reading is taken for a sufficiently long period in order to discriminate events related to the parking of a vehicle versus events related to other activities (the crossing of a pedestrian, vehicle partially covering the field of view). A Setup Time

parameter (ST, typically in ms) is initialized during the configuration to discriminate between two types of events: arrival or departure of a vehicle in the parking space versus other activities. If the status of the parking space changes or if no event is observed, the measurement of the delay will
5 contribute as the reference for the next measurement. The current value of the current background during initialisation of the system and the state of the parking status are stored.

[0058] With specific reference to Fig. 7, configuration is performed 770. A new measurement is acquired, processed and stored 771. It is compared 772
10 to detect any fluctuation greater than the noise level NL. If no fluctuation is detected, the new measurement nm replaces the former "current value" cv 773. But if a significant fluctuation is detected, a new comparison 774 is made to discriminate between modification of the parking status and other activities based on the duration and the level of the fluctuation. In the case where the
15 fluctuation is shorter than the Threshold Th or lasts less than the Setup Time ST, information about activity events is sent 775 to an external system. In the case of long fluctuations and lasting longer than the Threshold for status change, comparison is made 776 to define if the status is available 777 or not available 778. The new measurement nm replaces the former "current value"
20 cv (779) and parking status is sent 775 to the external system. Information data regarding detection of events in the aisle is also transferred to the computer of the external system (ex: passing of vehicle). This information can notably be used by the central system collectively with the information of movement in a parking area for security reasons.

25 **[0059]** All the information related to the events is transferred by interface to the computer. This information allows the central computer to update its database information concerning the occupancy of parking spaces, to modify the parking signal indicators integrated within the lighting module for the occupancy of the parking spaces, to indicate to the vehicles in the aisle by
30 means of these indicators of the parking space occupancy and warn of movement notably for safety applications (ex.: vehicle backing from a parking space) and to control the level intensity of lights within the parking to facilitate the management of the parking. During installation, a central computer or a

local computer allow the configuration of each lighting module part of the lighting network (upgrade, set parameters, etc.) and to calibrate and to determine the start of configurations. The parameters may be modified subsequently.

5 **[0060]** Detection based on triangulation

[0061] This method uses sequential illumination sources and a camera. The lighting device 800 illuminates sequentially the scene by regions at a frequency imperceptible to the human eye. Sub-sections 880 of the lighting device 800 illuminate at least one region 801 over a certain number of
10 parking spaces. At least one camera 884 located at a certain distance from the sub-section 880 of the lighting device 800 integrates the reflection signal 883 which originates from this specific lighting signal 801 .. During the calibration process, without any vehicle, the lighting signal 801 reaches the floor 809 and the reflected signal 883 is captured by the camera 884. The
15 shape of the illumination of the region is stored in the database. When vehicles are parked in the parking spaces, the lighting signal 801 is reflected from the tip of the vehicle 803 in the field of view to the camera 884 at a different angle and the camera 884 can detect a modification in the shape of the illumination of the region and can estimate the probability of the
20 occupancy of the parking space. The distance between sub-sections 880 and camera 884 permits the use of triangulation principle. For instance, if sub-sections 880 illuminate an available parking space with a pattern, a line for example, this pattern is captured by the camera. When a vehicle enters in the parking space, the pattern seen by the camera will change (for example, a
25 line will have transitions) and this modification of the pattern is used as the information of the presence of a vehicle.

[0062] Auxiliary light sources can be used to generate specific lighting patterns in the parking spaces for detection purposes.. Clusters of pixels can be defined during calibration as targets to exploit during operation. This
30 selection can be made using calibration software installed in the computer of the external system.

[0063] In summary, with reference to Fig. 9, one method for detecting availability of a parking space in a parking facility comprises the following

steps. Providing a lighting system having at least one visible-light source for illumination of at least part of the parking space 900. Providing an available space time-of-flight trace 902, the available space time-of-flight trace being a trace, captured by a sensor of the visible-light source, of a reflection of an available space visible-light signal emitted from the visible-light source, in a predetermined direction toward a predetermined target, in the parking space, when the parking space is available, on the predetermined target. Providing an availability threshold value 904, the availability threshold value being a difference value from the available space time-of-flight trace at which the parking space is determined to be available. Illuminating the at least part of the parking space using the at least one visible-light source 908. Emitting a status visible-light signal from the visible-light source in the predetermined direction toward the predetermined target in the parking space 910. Capturing a status reflection trace at the visible-light source 912, the status reflection trace being a trace, captured by the sensor at the visible-light source, of a reflection of the status visible-light signal emitted from the visible-light source. Determining a time-of-flight difference value by comparing the status reflection trace to the available space time-of-flight trace 914. Comparing the time-of-flight difference value with the availability threshold value 916 and determining a status of the parking space to be one of available and not available 918.

[0064] The available space time-of-flight trace can optionally include a trace of a reflection of an obstacle located between the visible-light source and the predetermined target and the determining a time-of-flight difference value includes considering the trace of the reflection of the obstacle 922.

[0065] The method preferably comprises indicating a status of the availability of the parking space using a status indicator for the parking space 920.

[0066] Optionally, invisible light source can be provided and used 902.

[0067] With reference to Fig. 10, another method for detecting availability of a parking space in a parking facility comprises the following steps. Providing a lighting system having at least one visible-light source for illumination of at least part of the parking space 950. Providing a camera 952. Providing an available space region value 954, the available space region value being a

value of shape of a region detected by the camera when visible light emitted from the visible-light source has traveled from the visible-light source in a predetermined direction to a predetermined target in the parking space when the parking space is available, has been reflected by the target, has traveled
5 back from the target to the camera and has been captured by the camera. Providing an availability threshold value 958, the availability threshold value being a difference value from the available space region value at which the parking space is determined to be available. Illuminating the at least part of the parking space using the at least one visible-light source 960. Emitting
10 visible light from the visible-light source in the predetermined direction to the predetermined target in the parking space 962. Capturing a reflection of the emitted visible light at the camera and determining a status region value 964. Determining a region difference value by comparing the status region value to the available space region value 966. Comparing the region difference value
15 with the availability threshold value 968 and determining a status of the parking space to be one of available and not available 970.

[0068] The available space region value can optionally take into consideration a permanent obstacle in the field of view 956.

[0069] The method preferably comprises indicating a status of the
20 availability of the parking space using a status indicator for the parking space 972.

[0070] Optionally, invisible light source can be provided and used 902. The available space time-of-flight trace can optionally include a trace of a reflection of an obstacle located between the visible-light source and the
25 predetermined target and the determining a time-of-flight difference value includes considering the trace of the reflection of the obstacle 922.

[0071] The method preferably comprises indicating a status of the availability of the parking space using a status indicator for the parking space 920.

[0072] This invention provides a cost effective solution by integrating an
30 energy efficient illumination with added-value parking guidance with real-time data of parking space vacancy. The strength of the invention resides in the important valuation of the sensing functions brought to the lighting system and

by the advantage in terms of diminution of cost of installation since only one installation is required for the two functions (illumination and detection) covering the same area and sharing the same electrical infrastructure.

[0073] While illustrated in the block diagrams as groups of discrete
5 components communicating with each other via distinct data signal
connections, it will be understood by those skilled in the art that the illustrated
embodiments may be provided by a combination of hardware and software
components, with some components being implemented by a given function
or operation of a hardware or software system, and many of the data paths
10 illustrated being implemented by data communication within a computer
application or operating system. The structure illustrated is thus provided for
efficiency of teaching the described embodiment.

WHAT IS CLAIMED IS :

1. A method for detecting availability of a parking space in a parking facility, comprising :
- 5 providing a lighting system having at least one visible-light source for illumination of at least part of said parking space;
- 10 providing an available space time-of-flight trace, said available space time-of-flight trace being a trace, captured by a sensor of said visible-light source, of a reflection of an available space visible-light signal emitted from said visible-light source, in a predetermined direction toward a predetermined target, in said parking space, when said parking space is available, on said predetermined target;
- 15 providing an availability threshold value, said availability threshold value being a difference value from said available space time-of-flight trace at which said parking space is determined to be available;
- 20 illuminating said at least part of said parking space using said at least one visible-light source;
- emitting a status visible-light signal from said visible-light source in said predetermined direction toward said predetermined target in said parking space;
- 25 capturing a status reflection trace at said visible-light source, said status reflection trace being a trace, captured by said sensor at said visible-light source, of a reflection of said status visible-light signal emitted from said visible-light source;
- determining a time-of-flight difference value by comparing said status reflection trace to said available space time-of-flight trace;
- 30 comparing said time-of-flight difference value with said availability threshold value and determining a status of said parking space to be one of available and not available.
2. The method as claimed in claim 1, wherein said available space time-of-flight trace includes a trace of a reflection of an obstacle located between said visible-light source and said predetermined target and said determining a

time-of-flight difference value includes considering said trace of said reflection of said obstacle.

3. The method as claimed in claim 1,
5 wherein said lighting system comprises a status indicator for said parking space; and
wherein said method further comprises activating said status indicator to indicate said status of said parking space.
- 10 4. The method as claimed in claim 1, further comprising :
activating at least one of said visible-light source to signal said status of said parking space.
5. The method as claimed in claim 1, further comprising :
15 sensing environment conditions in said parking facility, said environment conditions being at least one of a temperature of at least a part of said parking facility, a natural light intensity in at least a part of said parking facility, a presence of a pedestrian in at least a part of said parking facility;
20 determining a preferred lighting output of said lighting system using said sensed environment conditions;
controlling said lighting system to generate said preferred lighting output.
6. The method as claimed in claim 1, wherein said visible-light source is at
25 least one light emitting diode (LED).
7. The method as claimed in claim 1, further comprising :
triggering a timer when said status is determined;
providing a status update delay;
30 after said timer has reached said status update delay, repeating said steps of emitting, capturing, determining, comparing, triggering and repeating.
8. The method as claimed in claim 1, further comprising :

providing a pedestrian time-of-flight trace, said pedestrian time-of-flight trace being a trace, captured by a sensor of said visible-light source, of a reflection of a pedestrian visible-light signal emitted from said visible-light source, in a predetermined direction toward a predetermined target, in said parking space, when a pedestrian is located in said parking space, on said predetermined target;

5 providing a pedestrian threshold value, said pedestrian threshold value being a difference value from said pedestrian time-of-flight trace at which a pedestrian is determined to be present in said parking space;

10 determining a pedestrian time-of-flight difference value by comparing said status reflection trace to said pedestrian time-of-flight trace; and comparing said pedestrian time-of-flight difference value with said pedestrian threshold value and determining a status of said parking space to be one of having a pedestrian present in said parking space and not

15 having a pedestrian present in said parking space.

9. The method as claimed in claim 1, wherein said illuminating and said emitting comprise modulating said at least one visible-light source at a frequency higher than 100 Hz.

20

10. The method as claimed in claim 1, wherein said lighting system further comprises an auxiliary light source, said auxiliary light source being one of a visible-light source and a non-visible light source.

25 11. A method for detecting availability of a parking space in a parking facility, comprising:

providing a lighting system having at least one visible-light source for illumination of at least part of said parking space;

providing a camera;

30 providing an available space region value, said available space region value being a value of shape of a region detected by said camera when visible light emitted from said visible-light source has traveled from said visible-light source in a predetermined direction to a predetermined

target in said parking space when said parking space is available, has been reflected by said target, has traveled back from said target to said camera and has been captured by said camera;

providing an availability threshold value, said availability threshold value being

5 a difference value from said available space region value at which said parking space is determined to be available;

illuminating said at least part of said parking space using said at least one visible-light source;

emitting visible light from said visible-light source in said predetermined

10 direction to said predetermined target in said parking space;

capturing a reflection of said emitted visible light at said camera and determining a status region value;

determining a region difference value by comparing said status region value to said available space region value; and

15 comparing said region difference value with said availability threshold value and determining a status of said parking space to be one of available and not available.

12. The method as claimed in claim 11, wherein said available space region

20 value includes an obstacle value of a shape of an obstacle located between said visible-light source and said predetermined target and said determining said region difference value includes considering said obstacle value.

13. The method as claimed in claim 11,

25 wherein said lighting system comprises a status indicator for said parking space; and

wherein said method further comprises activating said status indicator to indicate said status of said parking space.

30 14. The method as claimed in claim 11, further comprising :

activating at least one of said visible-light source to signal said status of said parking space.

15. The method as claimed in claim 11, wherein said visible-light source is at least one light emitting diode (LED).
16. The method as claimed in claim 11, further comprising :
- 5 triggering a timer when said status is determined;
providing a status update delay;
after said timer has reached said status update delay, repeating said steps of emitting, capturing, comparing, comparing, triggering and repeating.
- 10 17. The method as claimed in claim 11, wherein said lighting system further comprises an auxiliary light source, said auxiliary light source being one of a visible-light source and a non-visible light source.
18. A system for detecting availability of a parking space in a parking facility,
15 comprising:
a powered lighting module having :
- at least one visible-light source driven by an illumination driver, for illuminating at least part of said parking space and emitting a status visible light signal from said visible-light source in a predetermined direction toward a predetermined target in said
20 parking space;
- an optical detector for capturing a status reflection trace at said lighting module, said status reflection trace being a trace of a reflection of said status visible-light signal emitted from said visible-light
25 source;
- a lighting module processor for controlling said illumination driver and said optical detector and receiving said status reflection trace;
- a powered central unit having :
- a memory for
30 storing an available space time-of-flight trace, said available space time-of-flight trace being a trace, captured by said optical detector, of a reflection of an available space visible-light signal emitted from said visible-light source,

- in a predetermined direction toward a predetermined target, in said parking space, when said parking space is available, on said predetermined target; and
- 5 storing an availability threshold value, said availability threshold value being a difference value from said available space time-of-flight trace at which said parking space is determined to be available;
- a central unit processor for
- 10 receiving said status reflection trace from said lighting module processor;
- retrieving said available space time-of-flight trace and said availability threshold value from said memory,
- determining a time-of-flight difference value by comparing said status reflection trace to said available space time-of-
- 15 flight trace; and
- comparing said time-of-flight difference value with said availability threshold value and determining a status of said parking space to be one of available and not available;
- 20 a network for communicating information between said processor and said central unit.

19. The system as claimed in claim 18, wherein said optical detector includes a lens.

25

20. The system as claimed in claim 18, wherein said lighting module further comprises :

a status indicator for said parking space driven by an indicator controller controlled by said lighting module processor, said lighting module processor

30 activating said status indicator to indicate said status of said parking space.

21. The system as claimed in claim 18, wherein said lighting module further comprises :

a modulation driver for modulating said light source to emit a status visible light signal from said visible-light source in a predetermined direction toward a predetermined target in said parking space.

5 22. The system as claimed in claim 18, wherein said lighting module further comprises :

an auxiliary light source, said auxiliary light source being one of a visible-light source and a non-visible light source;

a modulation driver for modulating said auxiliary light source.

10

23. The system as claimed in claim 18, further comprising :

sensors for sensing environment conditions in said parking facility, said sensors being at least one of a thermometer for sensing a temperature

15

of at least a part of said parking facility, a light intensity detector for measuring a natural light intensity in at least a part of said parking

facility, an infrared detector for detecting a presence of a pedestrian in at least a part of said parking facility;

said lighting module processor controlling said illumination driver to generate a preferred lighting output using said sensed environment conditions.

20

24. The system as claimed in claim 18, wherein said visible-light source is at least one light emitting diode (LED).

25 25. The system as claimed in claim 18, wherein said modulation driver modulates said light source at a frequency higher than 100 Hz.

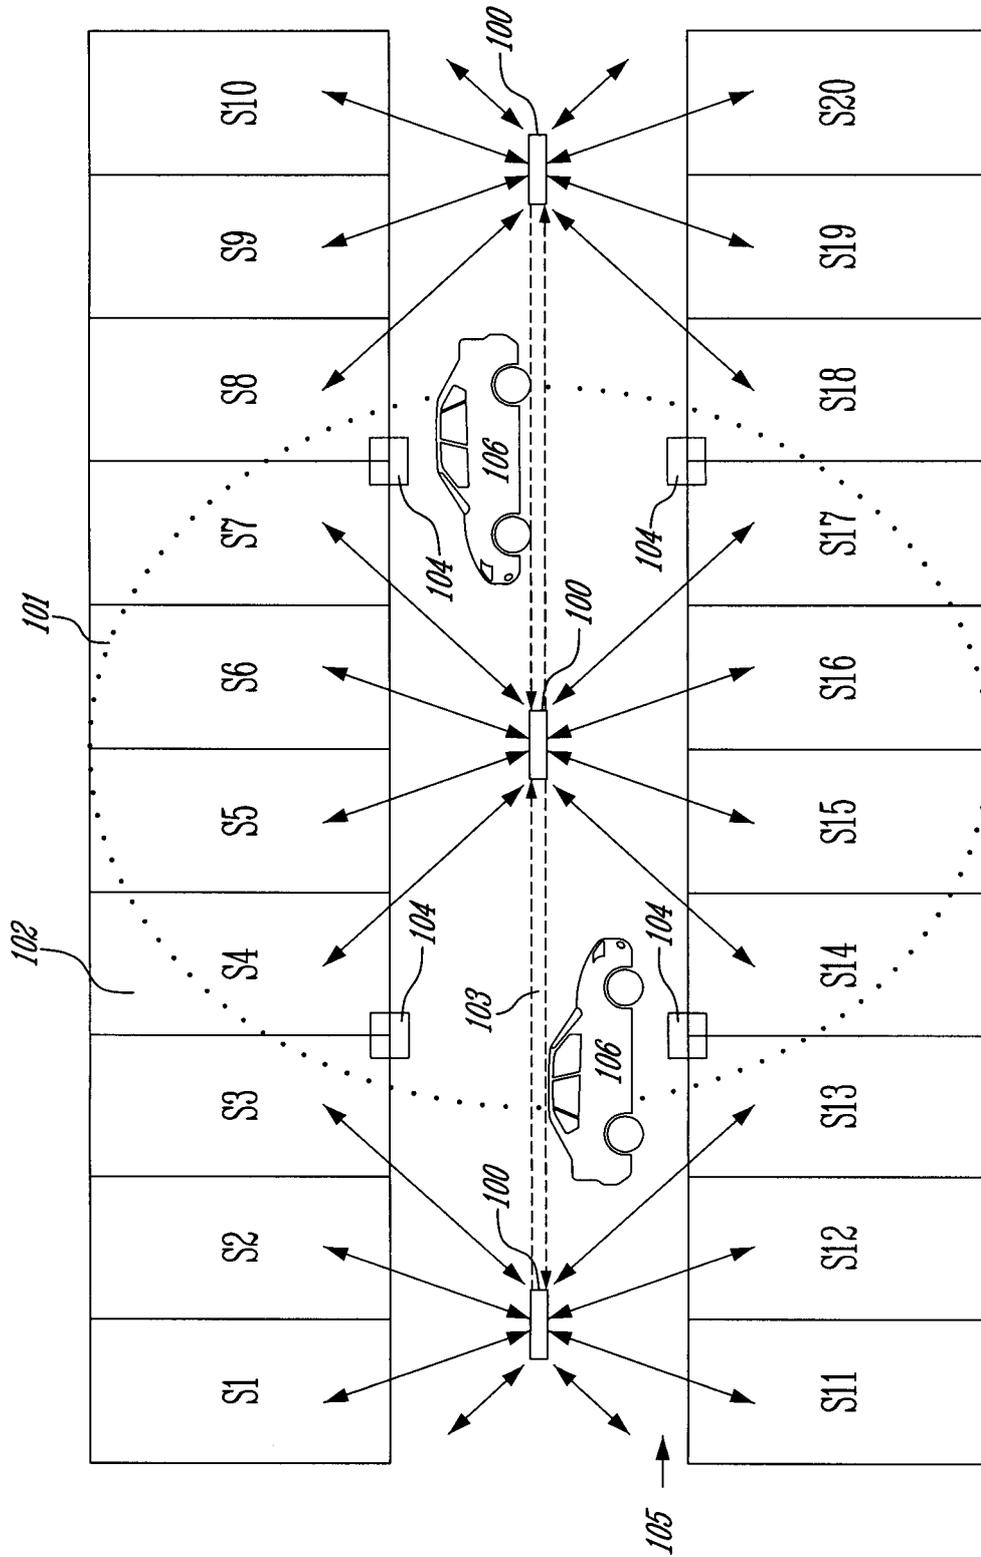


FIG. 1

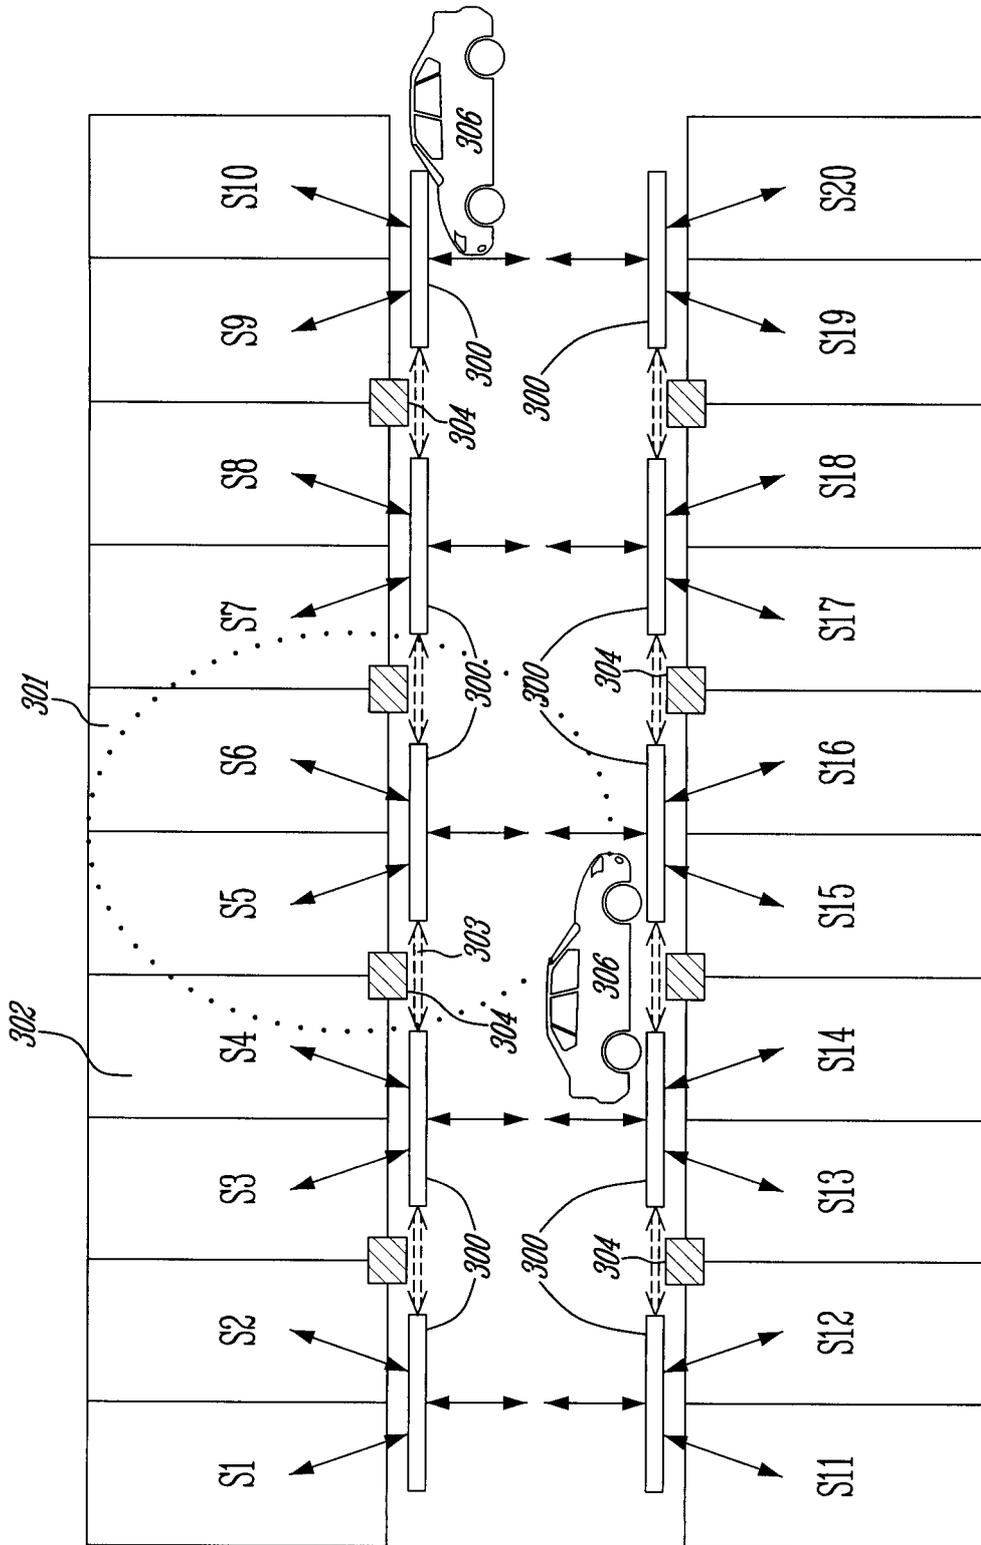


FIG. 3

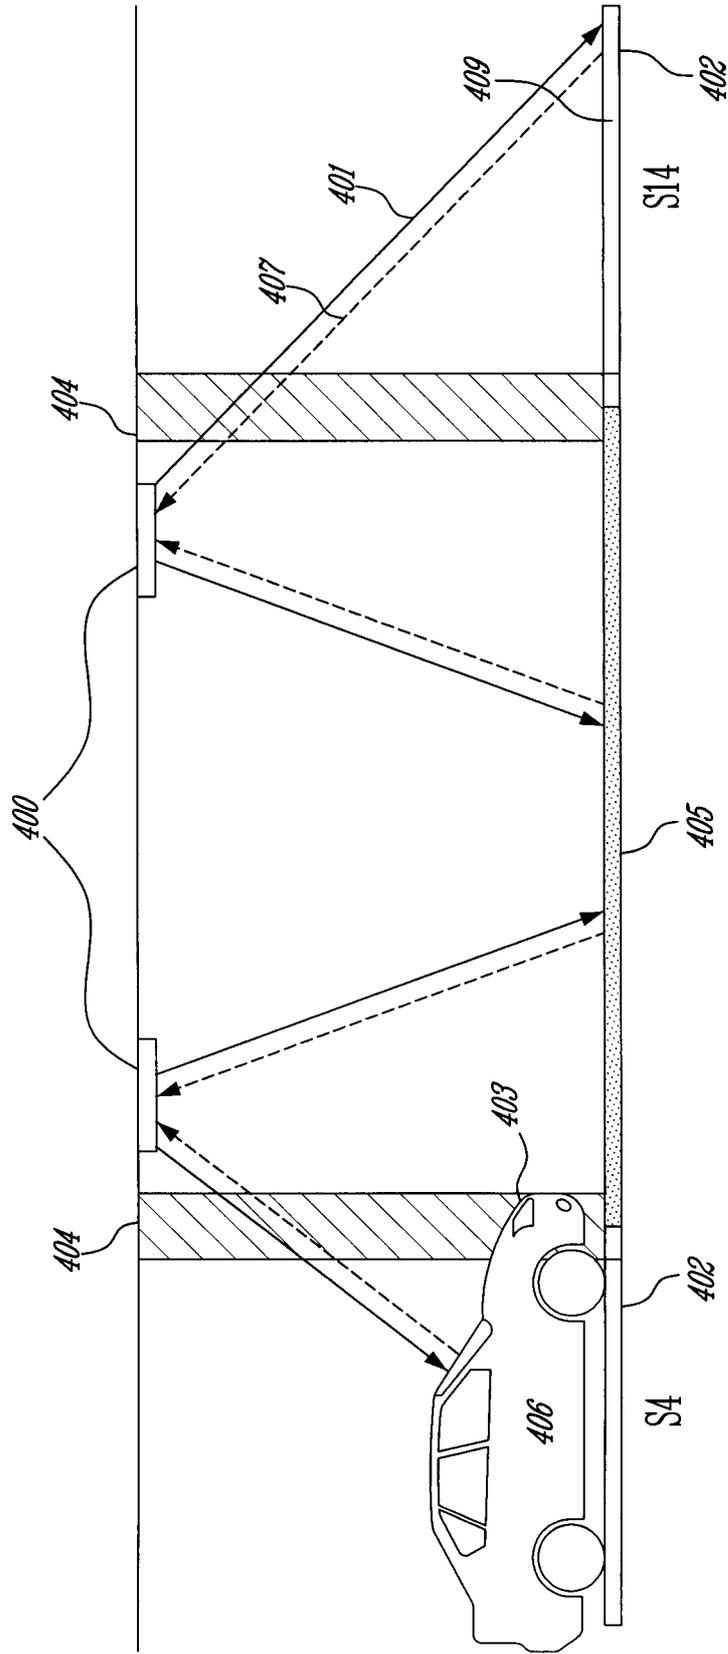


FIG. 4

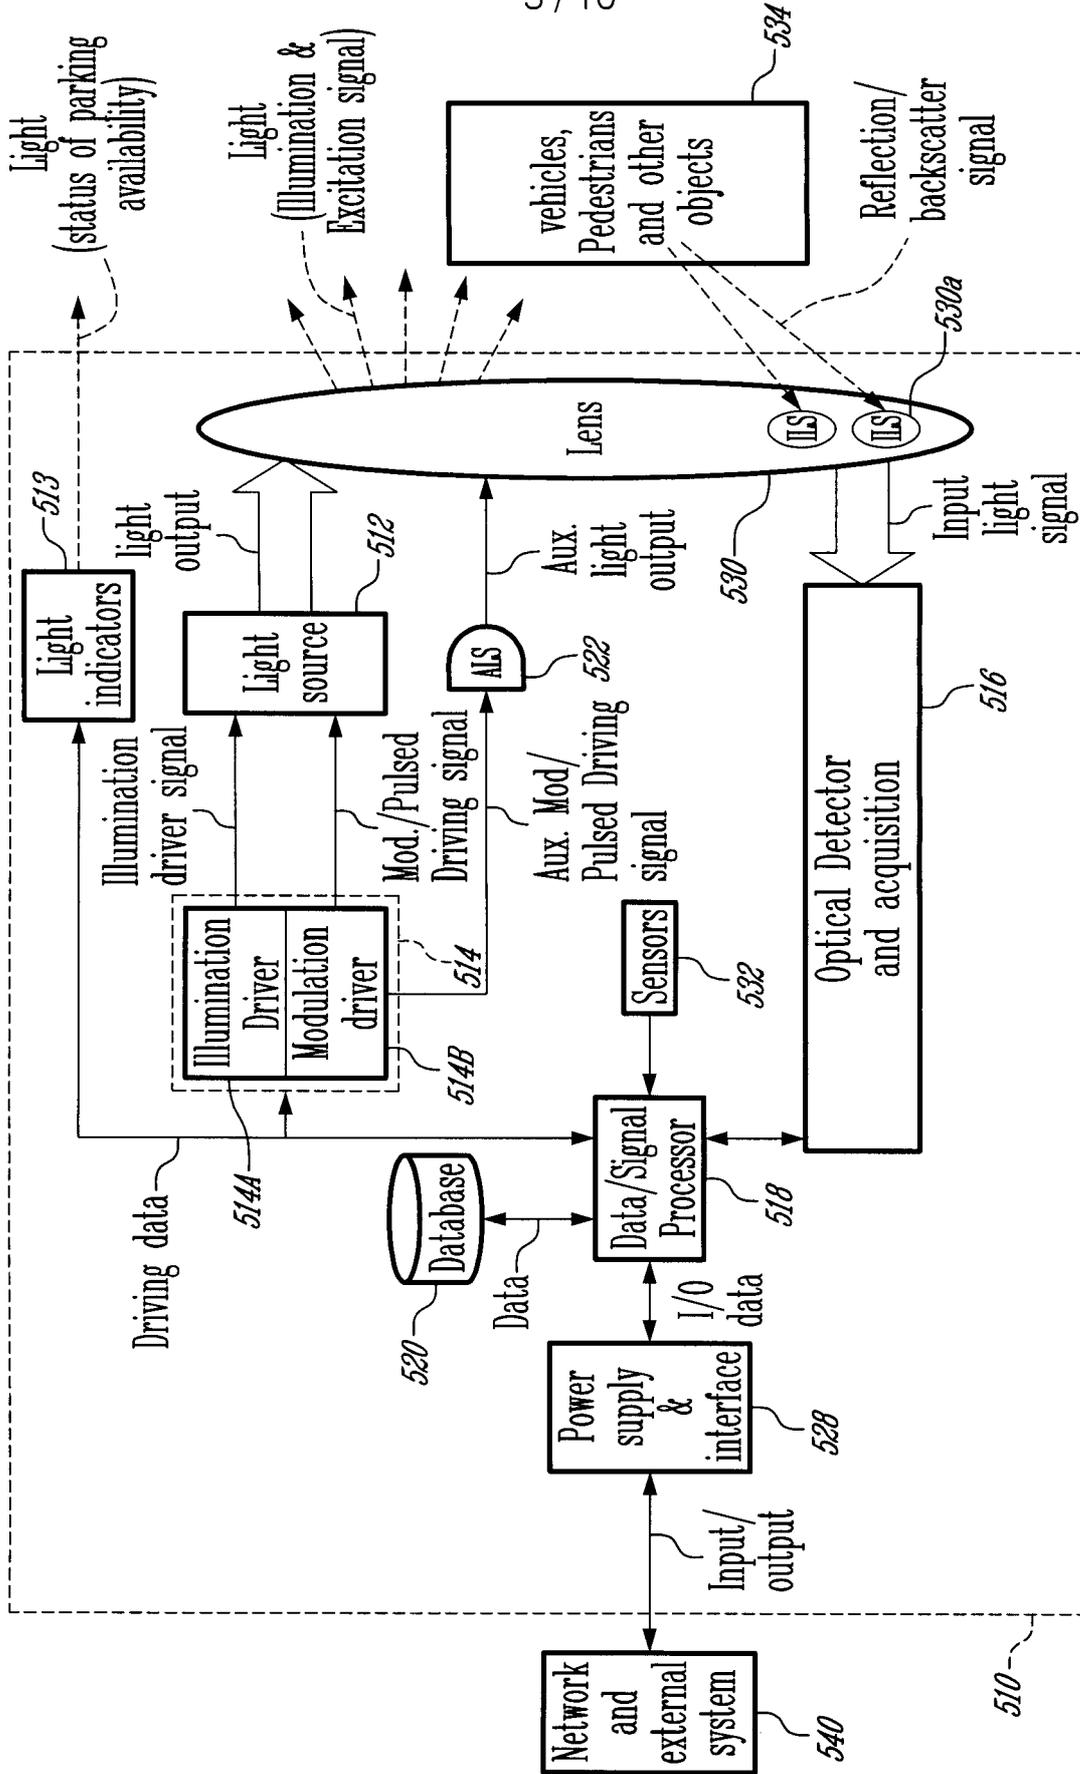


FIG. 5

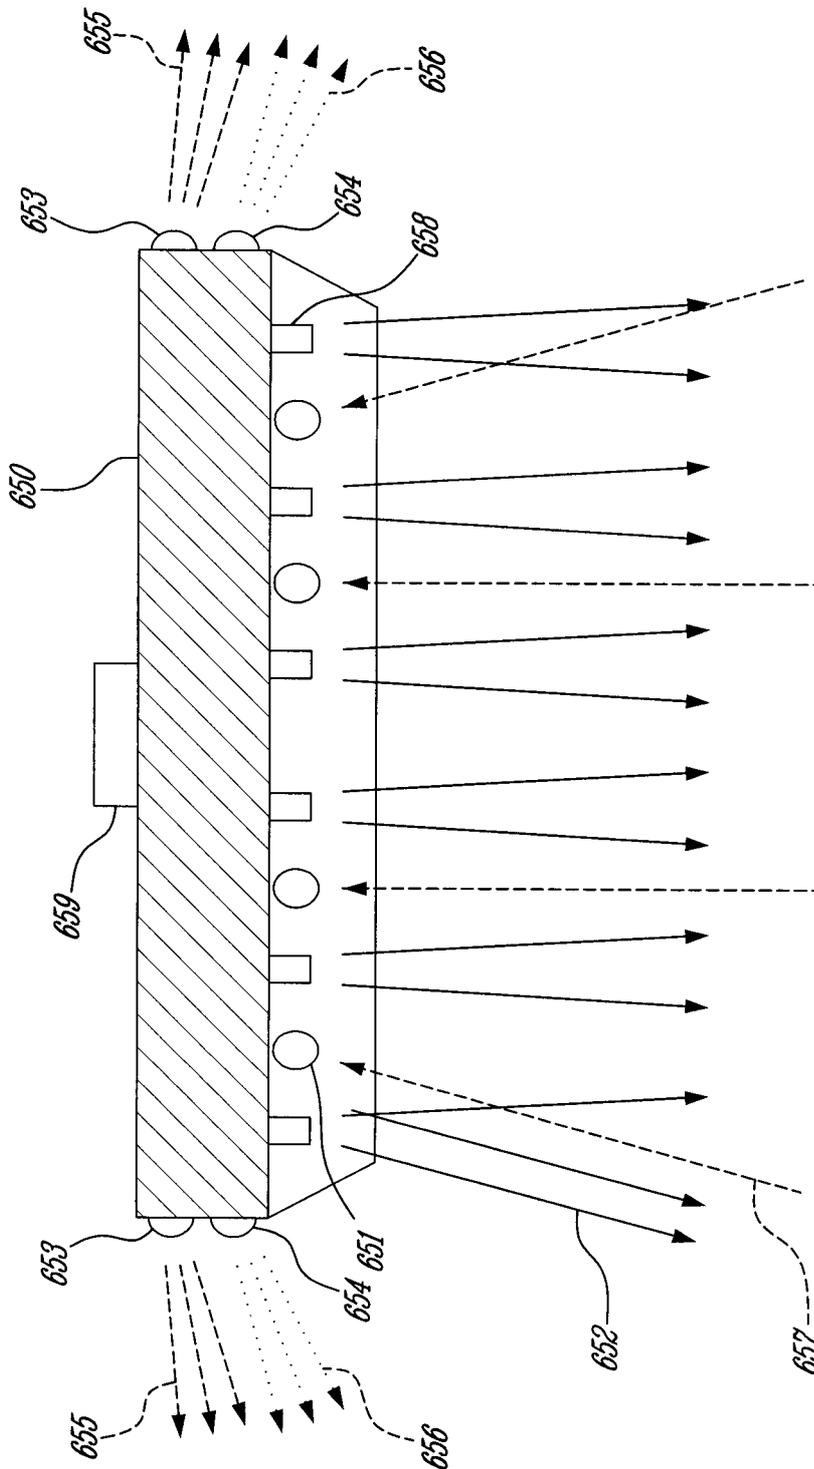


FIG. 6

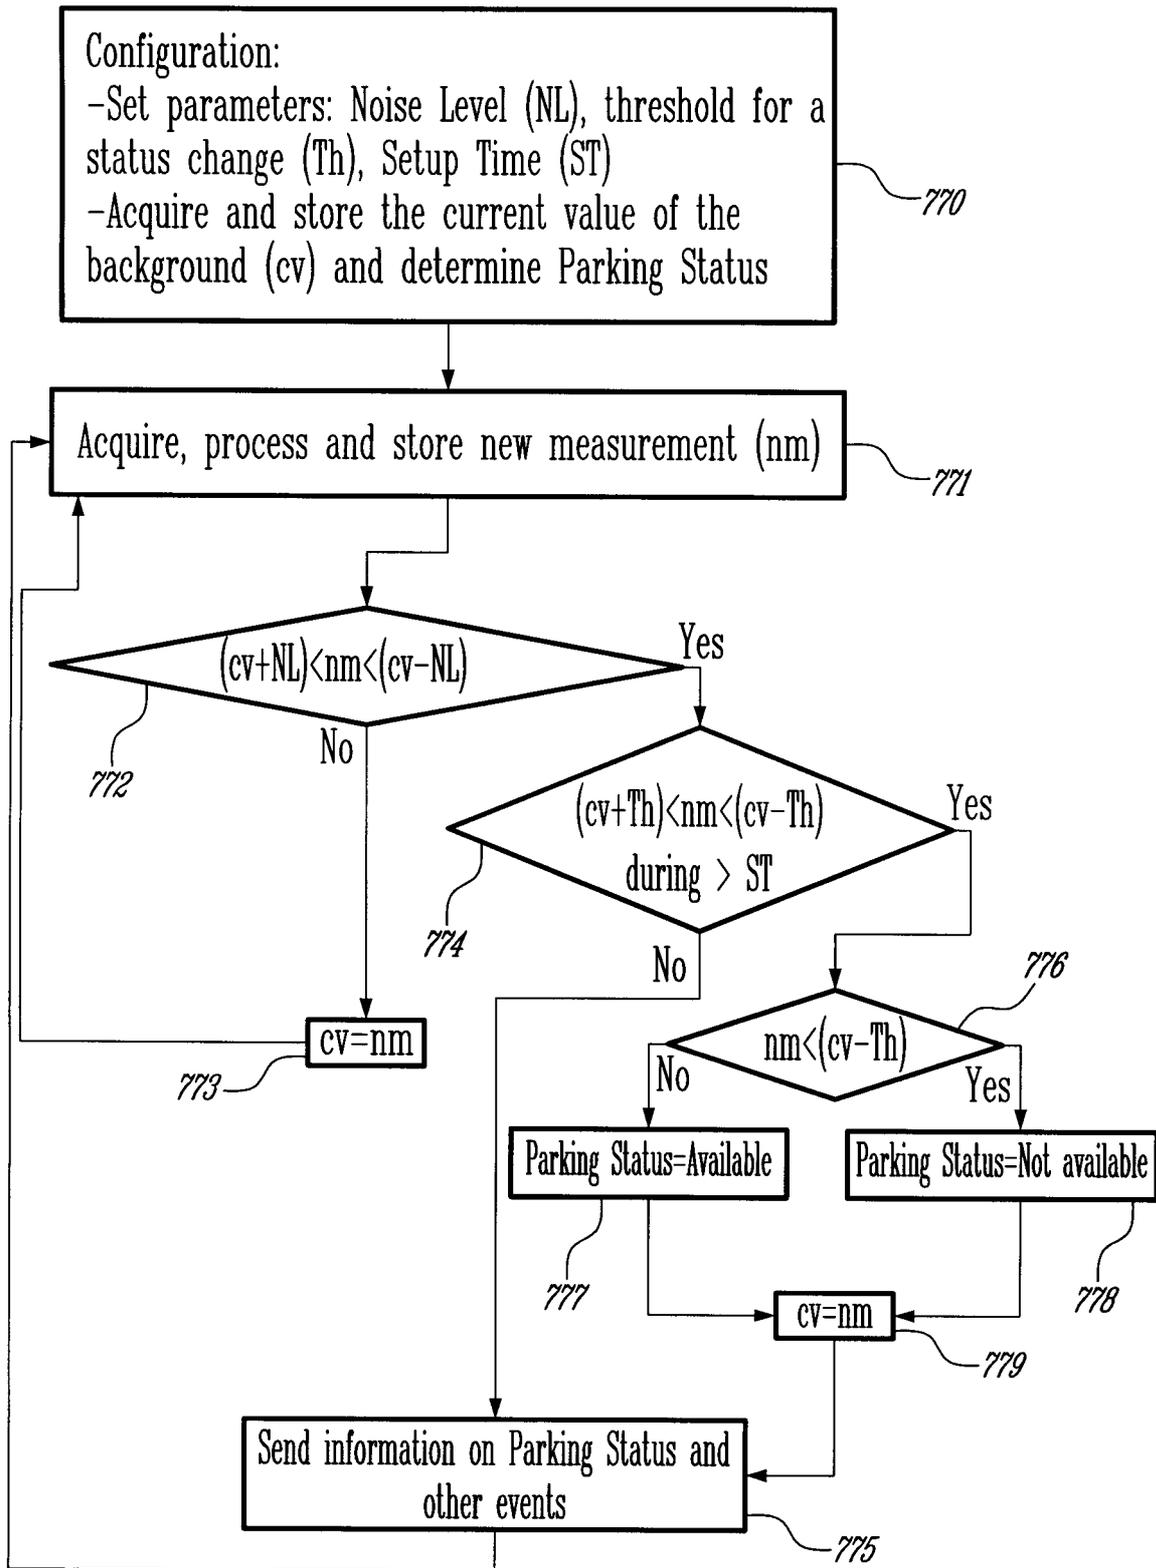


FIG. 7

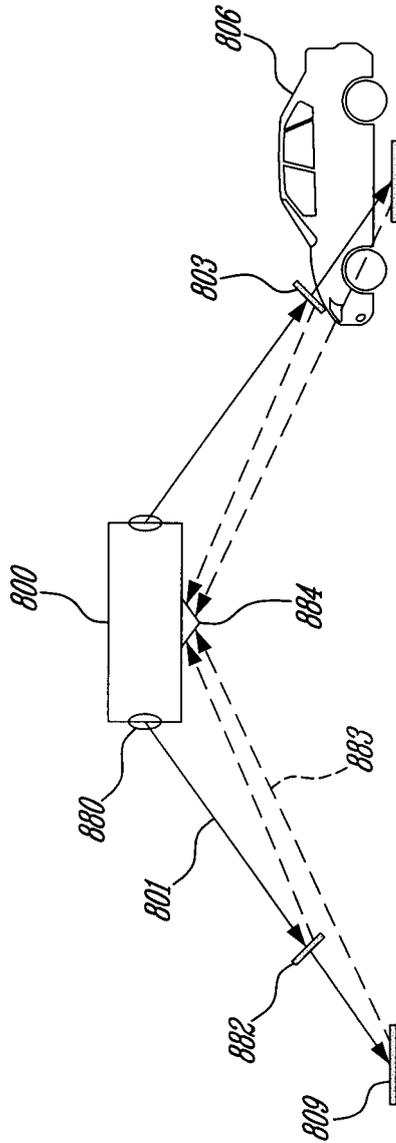


FIG. 8

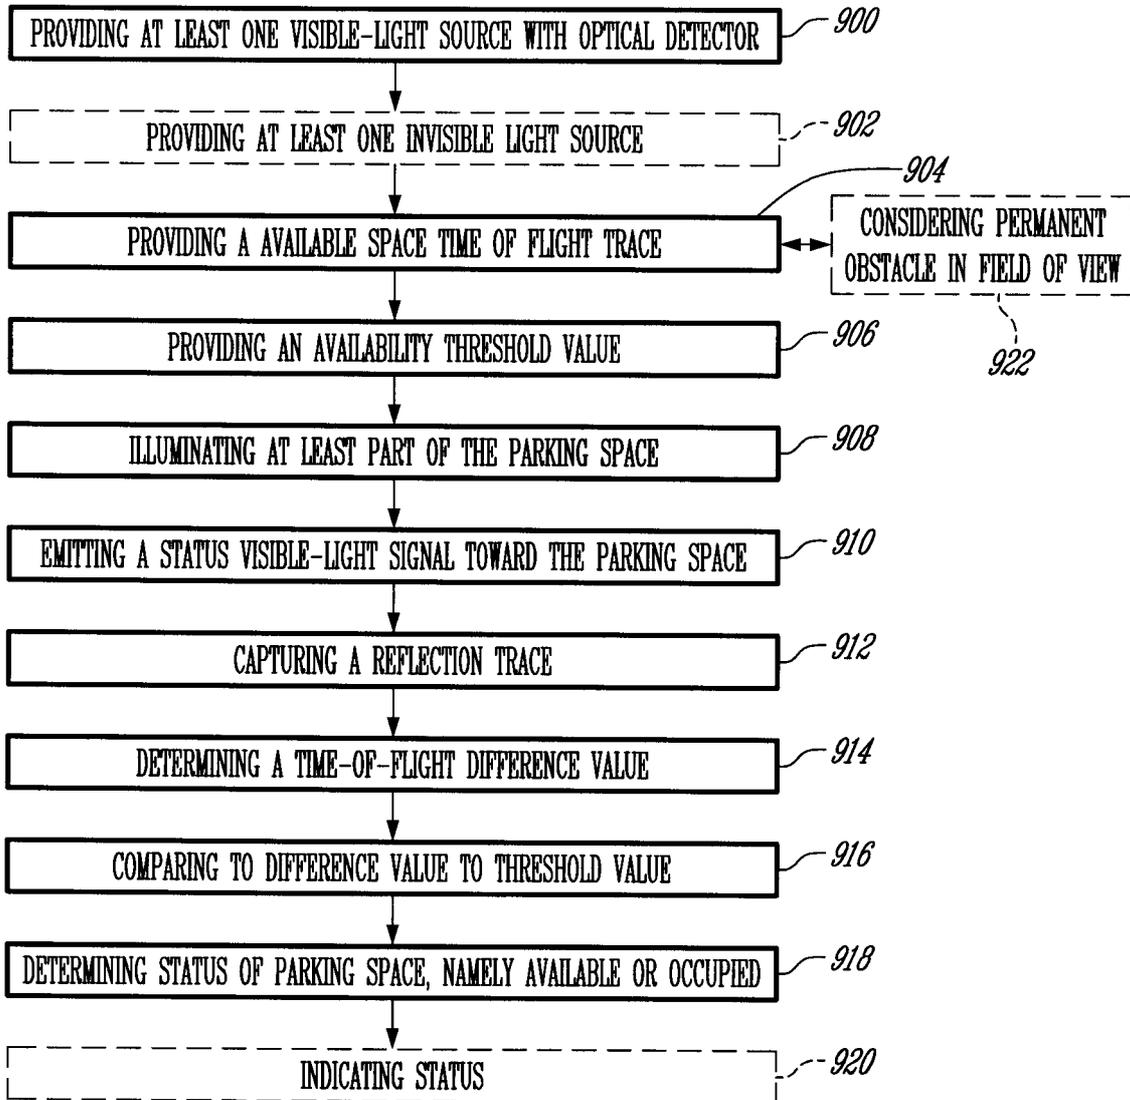


FIG. 9

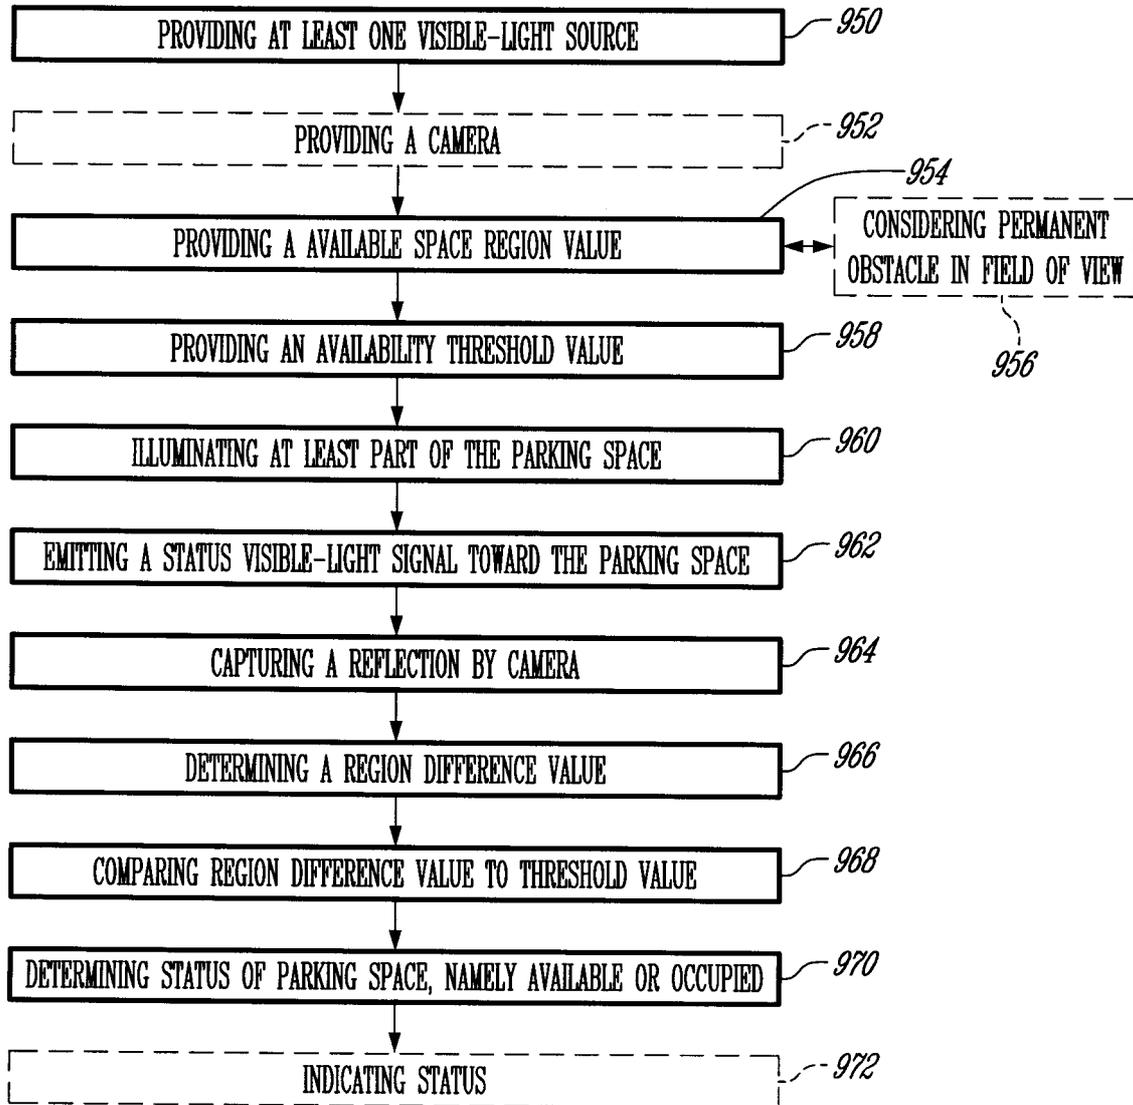


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No
PCT/CA2008/002248

A CLASSIFICATION OF SUBJECT MATTER IPC G08G 1/14 (2006 01) , G08G 1/04 (2006 01) According to International Patent Classification (FPC) or to both national classification and IPC		
B FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC G08G 1/14 (2006 01) , G08G 1/04 (2006 01) Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used) West, Delphion, USPTO, QPat, INTELLECT (Keywords time-of-flight, trace, time-of-flight trace, parking management system, parking facility, parking garage, parking space/spot, detect, sensor, availability, available, occupancy, visible light, light source, emit, illumination, reflection, backscatter, distance, time, status, threshold, difference)		
C DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
A	US 2007/0050240 A1 (BELANI et al) 1 March 2007 (01-03-2007) *see whole document*	1-10, 18-25
	--	
A	US 2007/0257818 A1 (AUBREY et al) § November 2007 (08-11-2007) *see whole document*	1-10, 18-25
	--	
A	US 2006/0250278 A1 (TILLOTSON et al) 9 November 2006 (09-11-2006) *see whole document*	1-10, 18-25
	--	
A	US 6,285,297 B1 (BALL) 4 September 2001 (04-09-2001) *see whole document*	1-10, 18-25
<input type="checkbox"/> Further documents are listed in the continuation of Box C		<input checked="" type="checkbox"/> See patent family annex
* Special categories of cited documents A document defining the general state of the art which is not considered to be of particular relevance E earlier application or patent but published on or after the international filing date L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) O document referring to an oral disclosure use exhibition or other means P document published prior to the international filing date but later than the priority date claimed	T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention X document of particular relevance the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone Y document of particular relevance the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents such combination being obvious to a person skilled in the art & document member of the same patent family	
Date of the actual completion of the international search 2 April 2009 (02-04-2009)	Date of mailing of the international search report 7 April 2009 (07-04-2009)	
Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C1 14 - 1st Floor, Box PCT 50 Victoria Street Gatmeau, Quebec K1A 0C9 Facsimile No 001-819-953-2476	Authorized officer Suchita Varma 819- 934-4549	

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of the first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons

- 1 Claim Nos
because they relate to subject matter not required to be searched by this Authority, namely
- 2 Claim Nos
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically
- 3 Claim Nos
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6 4(a)

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows

Group A: Claims 1-10 and 18-25 relate to a system and method of detecting availability of a parking space in a parking facility wherein the detection is based on the time-of-flight principle such that the availability of a parking space is based on the time difference in the time-of-flight trace

Group B: Claims 11-17 relate to a method of detecting availability of a parking space in a parking facility wherein the detection is based on triangulation such that the availability of a parking space is based on the change in shape of an illumination region

- 1 As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims
- 2 As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees
- 3 As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claim Nos
- 4 No required additional search fees were timely paid by the applicant Consequently, this international search report is restricted to the invention first mentioned in the claims, it is covered by claim Nos 1-10 and 18-25

- Remark on Protest** The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation
- No protest accompanied the payment of additional search fees

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No
PCT/CA2008/002248

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US 2007050240A1	01-03-2007	WO 20070278 18A1 WO 2007027945A1	08-03-2007 08-03-2007
US 2007257818A1	08-1 1-2007	DE 1020060 16050A1 EP 1862987 A2	11-10-2007 05-12-2007
US 2006250278A1	09-1 1-2006	US 7312722B2	25-12-2007
US 6285297B1	04-09-2001	None	