



(51) International Patent Classification:

E21B 33/14 (2006.01) E21B 33/12 (2006.01)

(21) International Application Number:

PCT/US2021/032983

(22) International Filing Date:

18 May 2021 (18.05.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

17/322,496 17 May 2021 (17.05.2021) US

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Pkwy E., Houston, Texas 77032-3219 (US).

(72) Inventors: **ABEIDOH, Abdel-Hamid, Rawhi**; 2601 E Belt Line Rd, Dallas, Texas 75287 (US). **MULLEN, Bryon, D**; 445 Woodline Dr, Carrollton, Texas 75007 (US). **FRIPP, Michael, Linley**; 2601 E Belt Line Rd, Dallas, Texas 75007 (US).

(74) Agent: **TEAKELL, Scott et al.**; 1750 Tysons Blvd #1800, Tysons, Virginia 22102 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: REACTIVE METAL FOR CEMENT ASSURANCE

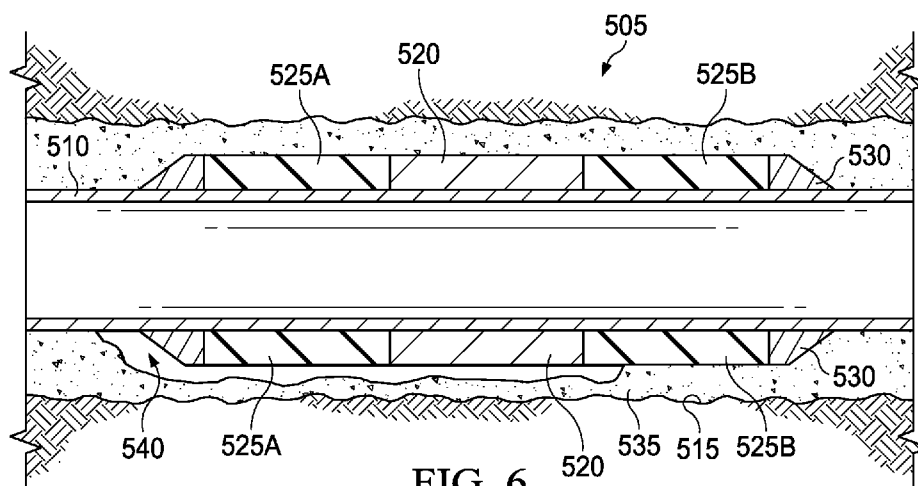


FIG. 6

(57) Abstract: Methods and systems for cementing in a wellbore. An example method includes introducing a conduit into a wellbore. The conduit comprises a reactive metal element disposed on an exterior of the conduit. The reactive metal element comprises a reactive metal having a first volume. The method further includes circulating a cement over the exterior of the conduit and the reactive metal element, contacting the reactive metal element with a fluid that reacts with the reactive metal to produce a reaction product having a second volume greater than the first volume, and contacting a surface of the cement adjacent to the reactive metal element with the reaction product.



REACTIVE METAL FOR CEMENT ASSURANCE

TECHNICAL FIELD

5 The present disclosure relates to the use of a reactive metal element, and more particularly, to the use of a reactive metal element for improving zonal isolation in cementing operations.

BACKGROUND

10 In a cementing operation, a conduit is cemented into place in a wellbore. The conduit may be cemented within another conduit or within the walls of the subterranean formation. The cementing operation provides zonal isolation by sealing off a wellbore or formation zone, thereby isolating the cemented portion from the wellbore and/or conduit.

 In some cementing operations, cement assurance issues may arise due to a lack of
15 homogenous distribution across the intended interval. Additionally, the conduit may not lay perfectly centered within the wellbore and may lay proximate to a formation wall. In such an operation, the cement sheath may be thinner where the conduit is proximate the formation. This could create issues where the cement is not able to fully displace the previous fluid and thus cannot create a homogenous and filled cross-section. Moreover, a thin cement layer increases
20 the risk of cement failure. Another issue is that some wellbore operations may degrade cement protection over time and induce the formation of microannuli or cracks. Once the cement has set, the cement can no longer flow or expand to fill in voids, nor can it repair cracks that may form. The present disclosure provides improved apparatus and methods for providing cement assurance in cementing operations.

25

BRIEF DESCRIPTION OF THE DRAWINGS

Illustrative examples of the present disclosure are described in detail below with reference to the attached drawing figures, which are incorporated by reference herein, and wherein:

5 FIG. 1 is a cross-section of an example conduit system for a wellbore penetrating a subterranean formation in accordance with the examples disclosed herein;

 FIG. 2 is a cross-section of another example conduit system for a primary wellbore penetrating a subterranean formation in accordance with the examples disclosed herein;

10 FIG. 3 is a perspective illustration of an example reactive metal element disposed on a conduit in accordance with the examples disclosed herein;

 FIG. 4 is a perspective illustration of another example of a reactive metal element disposed on a conduit in accordance with the examples disclosed herein;

 FIG. 5 is a perspective illustration of another example of a reactive metal element disposed on a conduit in accordance with the examples disclosed herein;

15 FIG. 6 is a perspective illustration of another example of a reactive metal element as it is disposed on a conduit in accordance with the examples disclosed herein;

 FIG. 7 is a perspective illustration of another example of a reactive metal element as it is disposed on a conduit in accordance with the examples disclosed herein;

20 FIG. 8 is a cross-section illustration of a void in a surface cement sheath in accordance with the examples disclosed herein; and

 FIG. 9 is a cross-section illustrating the surface cement sheath of FIG. 8 after the void has been filled in accordance with the examples disclosed herein.

25 The illustrated figures are only exemplary and are not intended to assert or imply any limitation with regard to the environment, architecture, design, or process in which different examples may be implemented.

DETAILED DESCRIPTION

30 The present disclosure relates to the use of a reactive metal element, and more particularly, to the use of a reactive metal element for improving zonal isolation in cementing operations.

 In the following detailed description of several illustrative examples, reference is made to the accompanying drawings that form a part hereof, and in which is shown by way of illustration examples that may be practiced. These examples are described in sufficient detail to enable those skilled in the art to practice them, and it is to be understood that other examples

may be utilized, and that logical structural, mechanical, electrical, and chemical changes may be made without departing from the spirit or scope of the disclosed examples. To avoid detail not necessary to enable those skilled in the art to practice the examples described herein, the description may omit certain information known to those skilled in the art. The following
5 detailed description is, therefore, not to be taken in a limiting sense, and the scope of the illustrative examples is defined only by the appended claims.

Unless otherwise indicated, all numbers expressing quantities of ingredients, properties such as molecular weight, reaction conditions, and so forth used in the present specification and associated claims are to be understood as being modified in all instances by the term
10 “about.” Accordingly, unless indicated to the contrary, the numerical parameters set forth in the following specification and attached claims are approximations that may vary depending upon the desired properties sought to be obtained by the examples of the present disclosure. At the very least, and not as an attempt to limit the application of the doctrine of equivalents to the scope of the claim, each numerical parameter should at least be construed in light of the number
15 of reported significant digits and by applying ordinary rounding techniques. It should be noted that when “about” is at the beginning of a numerical list, “about” modifies each number of the numerical list. Further, in some numerical listings of ranges some lower limits listed may be greater than some upper limits listed. One skilled in the art will recognize that the selected subset will require the selection of an upper limit in excess of the selected lower limit.

Unless otherwise specified, any use of any form of the terms “connect,” “engage,” “couple,” “attach,” or any other term describing an interaction between elements is not meant to limit the interaction to direct interaction between the elements and may also include indirect interaction between the elements described. Further, any use of any form of the terms “connect,” “engage,” “couple,” “attach,” or any other term describing an interaction between
25 elements includes items integrally formed together without the aid of extraneous fasteners or joining devices. In the following discussion and in the claims, the terms “including” and “comprising” are used in an open-ended fashion, and thus should be interpreted to mean “including, but not limited to.” Unless otherwise indicated, as used throughout this document, “or” does not require mutual exclusivity.

The terms uphole and downhole may be used to refer to the location of various components relative to the bottom or end of a well. For example, a first component described as uphole from a second component may be further away from the end of the well than the second component. Similarly, a first component described as being downhole from a second component may be located closer to the end of the well than the second component.

Examples of the methods and systems described herein relate to the use of a reactive metal element, and more particularly, to the use of a reactive metal element for improving zonal isolation in cementing operations. The reactive metal element comprises a reactive metal which, after reaction, provides an expansion of its metal to fill voids in the surrounding cement sheath. The reactive metal provides this expansion after contacting a specific reaction-inducing fluid, such as a brine, where it produces a reaction product having a larger volume than the base reactive metal reactant. This increase in metal volume of the reaction product provides for an expansion of the metal reaction product into any adjacent void space, such as a void in the surrounding cement sheath. The reaction product solidifies to provide cement assurance for further wellbore operations. The formation of the reaction products results in the volumetric expansion of the reactive metal element allowing for an improvement in zonal isolation of the cement sheath. The solidified reaction products also improve the anchoring of the conduit surrounded by the cement sheath, securing it in the wellbore and allowing for secure suspension. Advantageously, the reactive metal elements may be used in a variety of wellbore applications where there are cement assurance concerns. Yet a further advantage is that the reactive metal elements provide expansion in high-salinity and/or high-temperature environments. An additional advantage is that the reactive metal elements comprise a wide variety of metals and metal alloys and react upon contact with reaction-inducing fluids, including a variety of wellbore fluids. The reactive metal elements may be used as replacements for other types of expandable elements (e.g., elastomeric elements), or they may be used in combination with other types of expandable elements. One other advantage is that in some examples, the reactive metal elements may be placed on existing conduits without impact to or adjustment of the conduit outer diameter or exterior profile to accommodate the reactive metal element. In some examples, the reactive metal elements are free of elastomeric materials and may be usable in wellbore environments where elastomeric materials may be prone to breakdown.

The reactive metals expand by undergoing a reaction in the presence of a reaction-inducing fluid (e.g., a brine) to form a reaction product (e.g., metal hydroxides). The resulting reaction products occupy more volumetric space relative to the base reactive metal reactant. This difference in volume allows the reactive metal element to expand to fill void space at the interface of the reactive metal element and any adjacent surfaces. It is to be understood that the use of the term “fill” does not necessarily mean a complete filling of the void space, and that the reaction product may partially fill the void space in some examples. Magnesium may be used to illustrate the volumetric expansion of the reactive metal as it undergoes reaction with

the reaction-inducing fluid. A mole of magnesium has a molar mass of 24 g/mol and a density of 1.74 g/cm³, resulting in a volume of 13.8 cm³/mol. Magnesium hydroxide, the reaction product of magnesium and an aqueous reaction-inducing fluid, has a molar mass of 60 g/mol and a density of 2.34 g/cm³, resulting in a volume of 25.6 cm³/mol. The magnesium hydroxide volume of 25.6 cm³/mol is an 85% increase in volume over the 13.8 cm³/mol volume of the mole of magnesium. As another example, a mole of calcium has a molar mass of 40 g/mol and a density of 1.54 g/cm³, resulting in a volume of 26.0 cm³/mol. Calcium hydroxide, the reaction product of calcium and an aqueous reaction-inducing fluid, has a molar mass of 76 g/mol and a density of 2.21 g/cm³, resulting in a volume of 34.4 cm³/mol. The calcium hydroxide volume of 34.4 cm³/mol is a 32% increase in volume over the 26.0 cm³/mol volume of the mole of calcium. As yet another example, a mole of aluminum has a molar mass of 27 g/mol and a density of 2.7 g/cm³, resulting in a volume of 10.0 cm³/mol. Aluminum hydroxide, the reaction product of aluminum and an aqueous reaction-inducing fluid, has a molar mass of 63 g/mol and a density of 2.42 g/cm³, resulting in a volume of 26 cm³/mol. The aluminum hydroxide volume of 26 cm³/mol is a 160% increase in volume over the 10 cm³/mol volume of the mole of aluminum. The reactive metal may comprise any metal or metal alloy that undergoes a reaction to form a reaction product having a greater volume than the base reactive metal or alloy reactant.

The reactive metals undergo a chemical transformation whereby the metals chemically react with the reaction-inducing fluid, and upon reaction form a metal hydroxide that is the principal component of the expanded reactive metal element. The solidified metal hydroxide is larger in volume than the base reactive metal, allowing for expansion into the annular space around the reactive metal element (e.g., a void space in a surrounding cement sheath).

Examples of suitable metals for the reactive metal include, but are not limited to, magnesium, calcium, aluminum, tin, zinc, beryllium, barium, manganese, or any combination thereof. Preferred metals include magnesium, calcium, and aluminum.

Examples of suitable metal alloys for the reactive metal include, but are not limited to, alloys of magnesium, calcium, aluminum, tin, zinc, beryllium, barium, manganese, or any combination thereof. Preferred metal alloys include alloys of magnesium-zinc, magnesium-aluminum, calcium-magnesium, or aluminum-copper. In some examples, the metal alloys may comprise alloyed elements that are not metallic. Examples of these non-metallic elements include, but are not limited to, graphite, carbon, silicon, boron nitride, and the like. In some examples, the metal is alloyed to increase reactivity and/or to control the formation of oxides.

In some examples, the metal alloy is also alloyed with a dopant metal that promotes corrosion or inhibits passivation and thus increases hydroxide formation. Examples of dopant metals include, but are not limited to, nickel, iron, copper, carbon, titanium, gallium, mercury, cobalt, iridium, gold, palladium, or any combination thereof.

5 In some examples, the reactive metal comprises an oxide. As an example, calcium oxide reacts with water in an energetic reaction to produce calcium hydroxide. One mole of calcium oxide occupies 9.5 cm³ whereas one mole of calcium hydroxide occupies 34.4 cm³. This is a 260% volumetric expansion of the mole of calcium oxide relative to the mole of calcium hydroxide. Examples of metal oxides suitable for the reactive metal may include, but are not
10 limited to, oxides of any metals disclosed herein, including magnesium, calcium, aluminum, iron, nickel, copper, chromium, tin, zinc, lead, beryllium, barium, gallium, indium, bismuth, titanium, manganese, cobalt, or any combination thereof.

It is to be understood that the selected reactive metal is chosen such that the formed reaction product does not dissolve or otherwise degrade in the reaction-inducing fluid in a
15 manner that prevents its solidification in a void space. As such, the use of metals or metal alloys for the reactive metal that form relatively insoluble reaction products in the reaction-inducing fluid may be preferred. As an example, the magnesium hydroxide and calcium hydroxide reaction products have very low solubility in water. As an alternative or an addition, the reactive metal element may be positioned and configured in a way that constrains the
20 degradation of the reactive metal element in the reaction-inducing fluid due to the geometry of the area in which the reactive metal element is disposed. This may result in reduced exposure of the reactive metal element to the reaction-inducing fluid, but may also reduce degradation of the reaction product of the reactive metal element, thereby prolonging the life of the reaction product in the void space. As an example, the volume of the area in which the reactive metal
25 element is disposed may be less than the potential expansion volume of the volume of reactive metal disposed in said area. In some examples, this volume of area may be less than as much as 50% of the expansion volume of reactive metal. Alternatively, this volume of area may be less than 90% of the expansion volume of reactive metal. As another alternative, this volume of area may be less than 80% of the expansion volume of reactive metal. As another alternative,
30 this volume of area may be less than 70% of the expansion volume of reactive metal. As another alternative, this volume of area may be less than 60% of the expansion volume of reactive metal. In a specific example, a portion of the reactive metal element may be disposed in a recess within the conduit to restrict the exposure area to only the surface portion of the reactive metal element that is not disposed in the recess.

In some examples, the formed reaction products of the reactive metal reaction may be dehydrated under sufficient pressure. For example, if a metal hydroxide is under sufficient contact pressure and resists further movement induced by additional hydroxide formation, the elevated pressure may induce dehydration of the metal hydroxide to form the metal oxide. As an example, magnesium hydroxide may be dehydrated under sufficient pressure to form magnesium oxide and water. As another example, calcium hydroxide may be dehydrated under sufficient pressure to form calcium oxide and water. As yet another example, aluminum hydroxide may be dehydrated under sufficient pressure to form aluminum oxide and water.

The reactive metal elements may be formed in a solid solution process, a powder metallurgy process, or through any other method as would be apparent to one of ordinary skill in the art. Regardless of the method of manufacture, the reactive metal elements may be slipped over the conduit and held in place via any sufficient method. The reactive metal elements may be placed over the conduit in one solid piece or in multiple discrete pieces. Once in place, the reactive metal element may be held in position with end rings, stamped rings, retaining rings, fasteners, adhesives, set screws, swedging, or any other such method for retaining the reactive metal element in position. In some alternative examples, the reactive metal element may not be held in position and may slide freely on the exterior of the tubular. As discussed above, the reactive metal elements may be formed and shaped to fit over existing conduits and may not require modification of the outer diameter or profile of the liner hanger in some examples. Alternatively, the conduit may be manufactured to comprise a recess in which the reactive metal element may be disposed. The recess may be of sufficient dimensions and geometry to retain the reactive metal elements in the recess. In alternative examples, the reactive metal element may be cast onto the conduit. In some alternative examples, the diameter of the reactive metal element may be reduced (e.g., by swaging) when disposed on the conduit. In some examples, the reactive metal elements may be disposed over the length of the conduit (e.g., the singular conduit joint of the conduit string that is threaded or coupled to other conduit joints to form a conduit string). In alternative examples, the reactive metal element may be placed on only a portion of the conduit joint. In some examples, the reactive metal elements may be placed on all conduit joints to form continuous covering of the conduit string. In other examples, the reactive metal elements may be placed on only some of the conduit joints of the conduit string (e.g., at locations where cement assurance issues may occur).

In some optional examples, the reactive metal element may include a removable barrier coating. The removable barrier coating may be used to cover the exterior surfaces of the reactive metal element and prevent contact of the reactive metal with the reaction-inducing

fluid. The removable barrier coating may be removed after the cementing operation has completed. The removable barrier coating may be used to delay reaction and/or prevent premature expansion with the reactive metal element. Examples of the removable barrier coating include, but are not limited to, any species of plastic shell, organic shell, paint, dissolvable coatings (e.g., solid magnesium compounds or an aliphatic polyester), a meltable material (e.g., with a melting temperature less than 550° F), or any combination thereof. When desired, the removable barrier coating may be removed from the reactive metal element with any sufficient method. For example, the removable barrier coating may be removed through dissolution, a phase change induced by changing temperature, corrosion, hydrolysis, melting, or the removable barrier coating may be time-delayed and degrade after a desired time under specific wellbore conditions.

In some optional examples, the reactive metal element may include an additive which may be added to the reactive metal element during manufacture as a part of the composition, or the additive may be coated onto the reactive metal element after manufacturing. The additive may alter one or more properties of the reactive metal element. For example, the additive may improve expansion, add texturing, improve bonding, improve gripping, etc. Examples of the additive include, but are not limited to, any species of ceramic, elastomer, glass, non-reacting metal, the like, or any combination.

The reactive metal element may be used to expand into any void spaces that are proximate to the reactive metal elements. Without limitation, the reactive metal elements may be used to fill any voids in the cement sheath, which may include cracks which form in the set cement, channels formed from gas channeling through cement as it sets, microannuli formed between the cement sheath and the conduit which may be formed from temperature cycling, stress load cycling, conduit shrinkage, etc.

As described above, the reactive metal elements comprise reactive metals and as such, they are non-elastomeric materials. As non-elastomeric materials, the reactive metal elements do not possess elasticity, and therefore, they may irreversibly expand when contacted with a reaction-inducing fluid. The reactive metal elements may not return to their original size or shape even after the reaction-inducing fluid is removed from contact.

Generally, the reaction-inducing fluid induces a reaction in the reactive metal to form a reaction product that occupies more space than the unreacted reactive metal. Examples of the reaction-inducing fluid include, but are not limited to, saltwater (e.g., water containing one or more salts dissolved therein), brine (e.g., saturated saltwater, which may be produced from subterranean formations), seawater, or any combination thereof. Generally, the reaction-

inducing fluid may be from any source provided that the fluid does not contain an excess of compounds that may undesirably affect other components in the sealing element. In the case of saltwater, brines, and seawater, the reaction-inducing fluid may comprise a monovalent salt or a divalent salt. Suitable monovalent salts may include, for example, sodium chloride salt, sodium bromide salt, potassium chloride salt, potassium bromide salt, and the like. Suitable divalent salt can include, for example, magnesium chloride salt, calcium chloride salt, calcium bromide salt, and the like. In some examples, the salinity of the reaction-inducing fluid may exceed 10%. Advantageously, the reactive metal elements of the present disclosure may not be impacted by contact with high-salinity fluids. One of ordinary skill in the art, with the benefit of this disclosure, should be readily able to select a reaction-inducing fluid for inducing a reaction with the reactive metal elements.

The reactive metal elements may be used in high-temperature formations (e.g., in formations with zones having temperatures equal to or exceeding 350° F). Advantageously, the use of the reactive metal elements of the present disclosure may not be impacted in high-temperature formations. In some examples, the reactive metal elements may be used in both high-temperature formations and with high-salinity fluids. In a specific example, a reactive metal element may be positioned on a conduit and used to fill a void in a cement sheath after contact with a brine having a salinity of 10% or greater while also being disposed in a wellbore zone having a temperature equal to or exceeding 350° F.

FIG. 1 is a cross-section of an example conduit system, generally 5, for a wellbore 10 penetrating a subterranean formation 15. The conduit system 5 comprises a surface casing 20 and a surface cement sheath 25 descending from a surface 30. The conduit system 5 further comprises an intermediate casing 35 and intermediate cement sheath 40 deployed and nested concentrically within the surface casing 20. Although only one layer of intermediate casing 35 is illustrated, it is to be understood that more than one layer of intermediate casing 35 may be deployed in any example. A liner hanger 45 is deployed within the intermediate casing 35. The liner hanger 45 may be used to suspend a liner 55 from within the intermediate casing 35. The liner 55 may be any conduit suitable for suspension within the wellbore 10. In the example conduit system 5, a reactive metal element (illustrated in subsequent figures) may be deployed on the exterior of any conduit cemented into place. In this specific example, those conduits would be the surface casing 20 and the intermediate casing 35. The surface cement sheath 25 and the intermediate cement sheath 40 comprise cement that has been circulated over the exterior of the surface casing 20 and the intermediate casing 35. The circulated cement would necessarily also circulate over any reactive metal elements that would be present. Upon contact

with a reaction-inducing fluid, the reactive metals within the reactive metal element will react to form the reaction product, thereby providing a filling expansion into any void space contactable by the reaction product to reinforce and support the surrounding cement sheaths 25 and 40.

5 FIG. 2 is a cross-section of another example conduit system, generally 105, for a primary wellbore 110 penetrating a subterranean formation 115. A deflector 120 has been positioned in primary wellbore 110 to allow the drilling of lateral wellbore 125. Lateral casing 130 has been positioned in lateral wellbore 125. Due to the nature of lateral wellbores 125, the lateral casing 130 may not be positioned exactly concentrically within the lateral wellbore 125
10 which may create a shallow area 135. Once cemented, the shallow area 135 is the location of the thinnest part of the cement sheath. In order to overcome cement assurance issues, a reactive metal element (illustrated in subsequent figures) may be placed over the lateral casing 130 at the location of the shallow area 135. Upon contact with a reaction-inducing fluid, the reactive metals within the reactive metal element will react to form the reaction product, thereby
15 providing a filling expansion into any void space contactable by the reaction product to reinforce and support the surrounding cement sheath that would cover the shallow area 135.

FIG. 3 is a perspective illustration of an example reactive metal element, generally 205, disposed on a conduit 210. The reactive metal element 205 comprises a reactive metal 215 as disclosed and described herein. The reactive metal element 205 is wrapped or slipped on the
20 conduit 210 with weight, grade, and connection specified by the well design. The conduit 210 may be any type of conduit used in a wellbore, including drill pipe, stick pipe, tubing, coiled tubing, etc. The reactive metal element 205 further comprises end rings 220. End rings 220 protect the reactive metal element 205 as it is run to depth. End rings 220 may create an extrusion barrier, preventing the applied pressure from extruding the reactive metal 215 in the
25 direction of said applied pressure. In some examples, end rings 220 may comprise a reactive metal 215 and may thus serve a dual function. In some examples, end rings 220 may not comprise a reactive metal 215. Although FIG. 1 and some other examples illustrated herein may illustrate end rings 220 as a component of a reactive metal element, it is to be understood that end rings 220 are optional components in all examples described herein, and are not
30 necessary for any reactive metal element to function as intended.

FIG. 4 is a perspective illustration of another example of a reactive metal element, generally 305, disposed on a conduit 310. The reactive metal element 305 comprises a reactive metal 315. The reactive metal element 305 is wrapped or slipped on the conduit 310 with weight, grade, and connection specified by the well design. The reactive metal element 305

further comprises optional end rings 320 as described in FIG. 3. Reactive metal element 305 further comprises two swellable non-metal elements 325 disposed adjacent to end rings 320 and the reactive metal 315.

5 Swellable non-metal elements 325 may comprise any oil-swellable, water-swellable, and/or combination swellable non-metal material as would occur to one of ordinary skill in the art. A specific example of a swellable non-metal material is a swellable elastomer. The swellable non-metal elements 325 may swell when exposed to a fluid that induces swelling (e.g., an oleaginous or aqueous fluid). Generally, the swellable non-metal elements 325 may swell through diffusion whereby the swelling-inducing fluid is absorbed into the swellable non-
10 metal elements 325. This fluid may continue to diffuse into the swellable non-metal elements 325 causing the swellable non-metal elements 325 to swell until they contact an adjacent surface such as a cement. The swellable non-metal elements 325 may swell to fill a void in a cement sheath and work in tandem with the reactive metal 315 to provide expansion into a void space within a cement sheath surrounding the conduit 310.

15 Although FIG. 4 illustrates two swellable non-metal elements 325, it is to be understood that in some examples only one swellable non-metal element 325 may be provided, and the reactive metal 315 may be disposed adjacent to an end ring 320, or, alternatively, may comprise the end of the reactive metal element 305 should end rings 320 not be provided.

Further, although FIG. 4 illustrates two swellable non-metal elements 325 individually
20 adjacent to one end of the reactive metal element 305, it is to be understood that in some examples, the orientation may be reversed, and the reactive metal element 305 may instead comprise two reactive metals 315 each individually disposed adjacent to an end ring 320 and also one terminal end of a swellable non-metal element 325.

FIG. 5 is a perspective illustration of another example of a reactive metal element, generally 405, disposed on a conduit 410. The reactive metal element 405 comprises multiple
25 reactive metals 415 and also multiple swellable non-metal elements 425 as described above. The reactive metal element 405 is wrapped or slipped on the conduit 410 with weight, grade, and connection specified by the well design. The reactive metal element 405 further comprises optional end rings 420 as described above. Reactive metal element 405 differs from the examples described in the FIGURES above, in that the reactive metal element 405 further
30 comprises spacer element 430. Spacer element 430 may be a polymer-based material or a metal, such as steel. The spacer element 430 may provide additional anchoring support to the reactive metal element 405 within a fixed location or may space other components such as multiple reactive metals 415 and/or swellable non-metal elements 425.

It is to be understood that the reactive metal elements described herein may comprise any multiple of reactive metals, swellable non-metal elements, and spacer elements arranged in any desired manner. The reactive metals, swellable non-metal elements, and spacer elements may be placed in any pattern or configuration, either by themselves or in conjunction with other elements and components, such as other species of reactive metals, swellable non-metal elements, and spacer elements. As an example, a single reactive metal may be used. As another example, multiple reactive metals may be used. As a further example, multiple reactive metals may be used in a series adjacent to one another with individual other species of spacer elements and/or swellable non-metal elements placed at any point of the series. In some examples, multiple other species of spacer elements may be placed at the ends of the series. As another example, multiple reactive metals may alternate in the series with other species of spacer elements and/or swellable non-metal elements. In some additional examples, the spacer elements may be placed on the conduit in a location that is not proximate to the reactive metals. For example, the spacer elements may be placed on the opposing side of a retaining element or pair of retaining elements such as cup seals, end rings, stamped rings, etc. which may have a reactive metal or series of reactive metal disposed on the other side or therebetween. In some examples, the reactive metals may comprise different species of reactive metals, allowing the reactive metal element to be custom configured to the well as desired.

FIG. 6 is a perspective illustration of another example of a reactive metal element, generally 505, as it is disposed on a conduit 510. Conduit 510 is a surface conduit disposed in an open-hole wellbore 515. Reactive metal 520 is disposed generally in the center of the reactive metal element 505. Two swellable non-metal elements 525 are positioned on either side of the reactive metal 520. Swellable non-metal element 525A is an oil-swelling non-metal element that may swell when contacted with an oleaginous fluid. Swellable non-metal element 525B is a water-swelling non-metal element that may swell when contacted with an aqueous fluid. As illustrated, optional end rings 530 may protect the reactive metal element 505 from abrasion as it is run in hole. As discussed above, different arrangements and species of reactive metals, swellable non-metal elements, and spacer elements may be utilized in the reactive metal elements as desired. Cement sheath 535 surrounds the conduit 510 to cement it in place. A void 540 has formed in the cement sheath 535. Upon contact with a reaction inducing fluid, the reactive metal 520 reacts to form a reaction product that provides expansion into the void 540 to reinforce the cement sheath 535 and provide cement assurance and improved zonal isolation. The two swellable non-metal elements 525 work in tandem with the reactive metal 520 to provide expansion in the void 540 upon contact with their respective swell-inducing fluid.

FIG. 7 is a perspective illustration of another example of a reactive metal element, generally 605, as it is disposed on a conduit 610. Conduit 610 is a surface conduit disposed in an open-hole wellbore 615. Reactive metal 620 is disposed on one side of a spacer element 625 as described above. A swellable non-metal element 630 is disposed on the opposing side of the spacer element 625. As illustrated, optional end rings 635 may protect the reactive metal element 605 from abrasion as it is run in hole. As discussed above, different arrangements and species of reactive metals, swellable non-metal elements, and spacer elements may be utilized in the reactive metal elements as desired. Cement sheath 640 surrounds the conduit 610 to cement it in place. A void 645 has formed in the cement sheath 640. Upon contact with a reaction inducing fluid, the reactive metal 620 reacts to form a reaction product that provides expansion into the void 645 to reinforce the cement sheath 640 and provide cement assurance and improved zonal isolation. The swellable non-metal element 630 works in tandem with the reactive metal 620 to provide expansion in the void 645 upon contact with a swell-inducing fluid.

FIG. 8 is a cross-section illustration of a void in a cement sheath. Surface conduit 705 is deployed in a wellbore 710 that is disposed in a subterranean formation 720. Surface conduit 705 has been cemented into place with surface cement sheath 715. An intermediate conduit 725 resides concentrically within surface conduit 705 and may be cemented into place in a subsequent cement operation. A void 730 has formed in the surface cement sheath 715. The void 730 weakens the supporting surface cement sheath 715 at the location adjacent to the void 730 where the surface cement sheath 715 is thinner than the remaining portion of the surface cement sheath 715. This weakened area in the surface cement sheath 715 may create cement assurance issues.

FIG. 9 is a cross-section illustrating the surface cement sheath 715 of FIG. 8 after the void 730 has been filled. A reactive metal element placed proximate the void 730 allows for the reactive metal to react and fill the void 730 with a reaction product 735 as shown. The reaction product 735 is formed from the reaction of the reactive metal and a reaction-inducing fluid. The reaction product 735 provides expansion into the surrounding void 730, at least partially filling it before solidifying.

It should be clearly understood that the examples illustrated by FIGs. 1-9 are merely general applications of the principles of this disclosure in practice, and a wide variety of other examples are possible. Therefore, the scope of this disclosure is not limited in any manner to the details of any of the FIGURES described herein.

It is also to be recognized that the disclosed reactive metal elements may also directly or indirectly affect the various downhole equipment and tools that may come into contact with the reactive metal elements during operation. Such equipment and tools may include, but are not limited to: wellbore casing, wellbore liner, completion string, insert strings, drill string, 5 coiled tubing, slickline, wireline, drill pipe, drill collars, mud motors, downhole motors and/or pumps, surface-mounted motors and/or pumps, centralizers, turbolizers, scratchers, floats (e.g., shoes, collars, valves, etc.), logging tools and related telemetry equipment, actuators (e.g., electromechanical devices, hydromechanical devices, etc.), sliding sleeves, production sleeves, plugs, screens, filters, flow control devices (e.g., inflow control devices, autonomous inflow 10 control devices, outflow control devices, etc.), couplings (e.g., electro-hydraulic wet connect, dry connect, inductive coupler, etc.), control lines (e.g., electrical, fiber optic, hydraulic, etc.), surveillance lines, drill bits and reamers, sensors or distributed sensors, downhole heat exchangers, valves and corresponding actuation devices, tool seals, packers, cement plugs, bridge plugs, and other wellbore isolation devices, or components, and the like. Any of these 15 components may be included in the systems generally described above and depicted in any of the FIGURES.

Provided are methods for cementing in accordance with the disclosure and the illustrated FIGURES. An example method comprises introducing a conduit into a wellbore. The conduit comprises a reactive metal element disposed on an exterior of the conduit. The 20 reactive metal element comprises a reactive metal having a first volume. The method further comprises circulating a cement over the exterior of the conduit and the reactive metal element, contacting the reactive metal element with a fluid that reacts with the reactive metal to produce a reaction product having a second volume greater than the first volume, and contacting a 25 surface of the cement adjacent to the reactive metal element with the reaction product.

25 Additionally or alternatively, the method may include one or more of the following features individually or in combination. The reactive metal may comprise a metal selected from the group consisting of magnesium, calcium, aluminum, tin, zinc, beryllium, barium, manganese, and any combination thereof. The reactive metal may comprise a metal alloy 30 selected from the group consisting of magnesium-zinc, magnesium-aluminum, calcium-magnesium, aluminum-copper, and any combination thereof. The reactive metal element may comprise a swellable non-metal element. The swellable non-metal element may be an elastomer. The reactive metal element may comprise a spacer element. A cup seal, end ring, or stamped ring proximate to the reactive metal. The conduit may be a surface casing or intermediate casing. The reactive metal element may be continuous along the entire exterior

length of the conduit. The reactive metal element may be disposed along only a portion of the exterior length of the conduit.

Provided are systems for cementing in a wellbore in accordance with the disclosure and the illustrated FIGURES. An example system comprises a conduit disposed in the wellbore, a reactive metal element disposed on the exterior of the conduit and the reactive metal element comprises a reactive metal having a first volume, a reaction-inducing fluid capable of reacting with the reactive metal to produce a reaction product having a second volume that is greater than the first volume, and a cement circulated in the wellbore such that it surrounds the conduit and the reactive metal element.

Additionally or alternatively, the system may include one or more of the following features individually or in combination. The reactive metal may comprise a metal selected from the group consisting of magnesium, calcium, aluminum, tin, zinc, beryllium, barium, manganese, and any combination thereof. The reactive metal may comprise a metal alloy selected from the group consisting of magnesium-zinc, magnesium-aluminum, calcium-magnesium, aluminum-copper, and any combination thereof. The reactive metal element may comprise a swellable non-metal element. The swellable non-metal element may be an elastomer. The reactive metal element may comprise a spacer element. A cup seal, end ring, or stamped ring proximate to the reactive metal. The conduit may be a surface casing or intermediate casing. The reactive metal element may be continuous along the entire exterior length of the conduit. The reactive metal element may be disposed along only a portion of the exterior length of the conduit.

The preceding description provides various examples of the apparatus, systems, and methods of use disclosed herein which may contain different method steps and alternative combinations of components. It should be understood that, although individual examples may be discussed herein, the present disclosure covers all combinations of the disclosed examples, including, without limitation, the different component combinations, method step combinations, and properties of the system. It should be understood that the compositions and methods are described in terms of “comprising,” “containing,” or “including” various components or steps. The systems and methods can also “consist essentially of” or “consist of the various components and steps.” Moreover, the indefinite articles “a” or “an,” as used in the claims, are defined herein to mean one or more than one of the element that it introduces.

For the sake of brevity, only certain ranges are explicitly disclosed herein. However, ranges from any lower limit may be combined with any upper limit to recite a range not explicitly recited, as well as ranges from any lower limit may be combined with any other lower

limit to recite a range not explicitly recited. In the same way, ranges from any upper limit may be combined with any other upper limit to recite a range not explicitly recited. Additionally, whenever a numerical range with a lower limit and an upper limit is disclosed, any number and any included range falling within the range are specifically disclosed. In particular, every range
5 of values (of the form, “from about a to about b,” or, equivalently, “from approximately a to b,” or, equivalently, “from approximately a-b”) disclosed herein is to be understood to set forth every number and range encompassed within the broader range of values even if not explicitly recited. Thus, every point or individual value may serve as its own lower or upper limit combined with any other point or individual value or any other lower or upper limit, to recite
10 a range not explicitly recited.

One or more illustrative examples incorporating the examples disclosed herein are presented. Not all features of a physical implementation are described or shown in this application for the sake of clarity. Therefore, the disclosed systems and methods are well adapted to attain the ends and advantages mentioned, as well as those that are inherent therein.
15 The particular examples disclosed above are illustrative only, as the teachings of the present disclosure may be modified and practiced in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. Furthermore, no limitations are intended to the details of construction or design herein shown other than as described in the claims below. It is therefore evident that the particular illustrative examples disclosed above
20 may be altered, combined, or modified, and all such variations are considered within the scope of the present disclosure. The systems and methods illustratively disclosed herein may suitably be practiced in the absence of any element that is not specifically disclosed herein and/or any optional element disclosed herein.

Although the present disclosure and its advantages have been described in detail, it
25 should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the disclosure as defined by the following claims.

WHAT IS CLAIMED IS:

1. A method for cementing in a wellbore comprising:
introducing a conduit into a wellbore; wherein the conduit comprises a reactive metal
5 element disposed on an exterior of the conduit; wherein the reactive metal element comprises
a reactive metal having a first volume;
circulating a cement over the exterior of the conduit and the reactive metal element;
contacting the reactive metal element with a fluid that reacts with the reactive metal to
produce a reaction product having a second volume greater than the first volume; and
10 contacting a surface of the cement adjacent to the reactive metal element with the
reaction product.
2. The method of claim 1, wherein the reactive metal comprises a metal selected from the
group consisting of magnesium, calcium, aluminum, tin, zinc, beryllium, barium, manganese,
15 and any combination thereof.
3. The method of claim 1, wherein the reactive metal comprises a metal alloy selected
from the group consisting of magnesium-zinc, magnesium-aluminum, calcium-magnesium,
aluminum-copper, and any combination thereof.
20
4. The method of claim 1, wherein the reactive metal element comprises a swellable non-
metal element.
5. The method of claim 4, wherein the swellable non-metal element is an elastomer.
25
6. The method of claim 1, wherein the reactive metal element comprises a spacer element.
7. The method of claim 1, further comprising a cup seal, end ring, or stamped ring
proximate to the reactive metal.
30
8. The method of claim 1, wherein the conduit is a surface casing or intermediate casing.
9. The method of claim 1, wherein the reactive metal element is continuous along the
entire exterior length of the conduit.

10. The method of claim 1, wherein the reactive metal element is disposed along only a portion of the exterior length of the conduit.

5 11. A system for cementing in a wellbore comprising:

a conduit disposed in the wellbore;

a reactive metal element disposed on the exterior of the conduit, the reactive metal element comprising a reactive metal having a first volume;

10 a reaction-inducing fluid capable of reacting with the reactive metal to produce a reaction product having a second volume that is greater than the first volume; and

a cement circulated in the wellbore such that it surrounds the conduit and the reactive metal element.

12. The system of claim 11, wherein the reactive metal comprises a metal selected from the group consisting of magnesium, calcium, aluminum, tin, zinc, beryllium, barium, manganese, and any combination thereof.

13. The system of claim 11, wherein the reactive metal comprises a metal alloy selected from the group consisting of magnesium-zinc, magnesium-aluminum, calcium-magnesium, aluminum-copper, and any combination thereof.

14. The system of claim 11, wherein the reactive metal element comprises a swellable non-metal element.

25 15. The system of claim 14, wherein the swellable non-metal element is an elastomer.

16. The system of claim 11, wherein the reactive metal element comprises a spacer element.

17. The system of claim 11, further comprising a cup seal, end ring, or stamped ring proximate to the reactive metal.

18. The system of claim 11, wherein the conduit is a surface casing or intermediate casing.

19. The system of claim 11, wherein the reactive metal element is continuous along the entire exterior length of the conduit.

20. The system of claim 11, wherein the reactive metal element is disposed along only a
5 portion of the exterior length of the conduit.

10

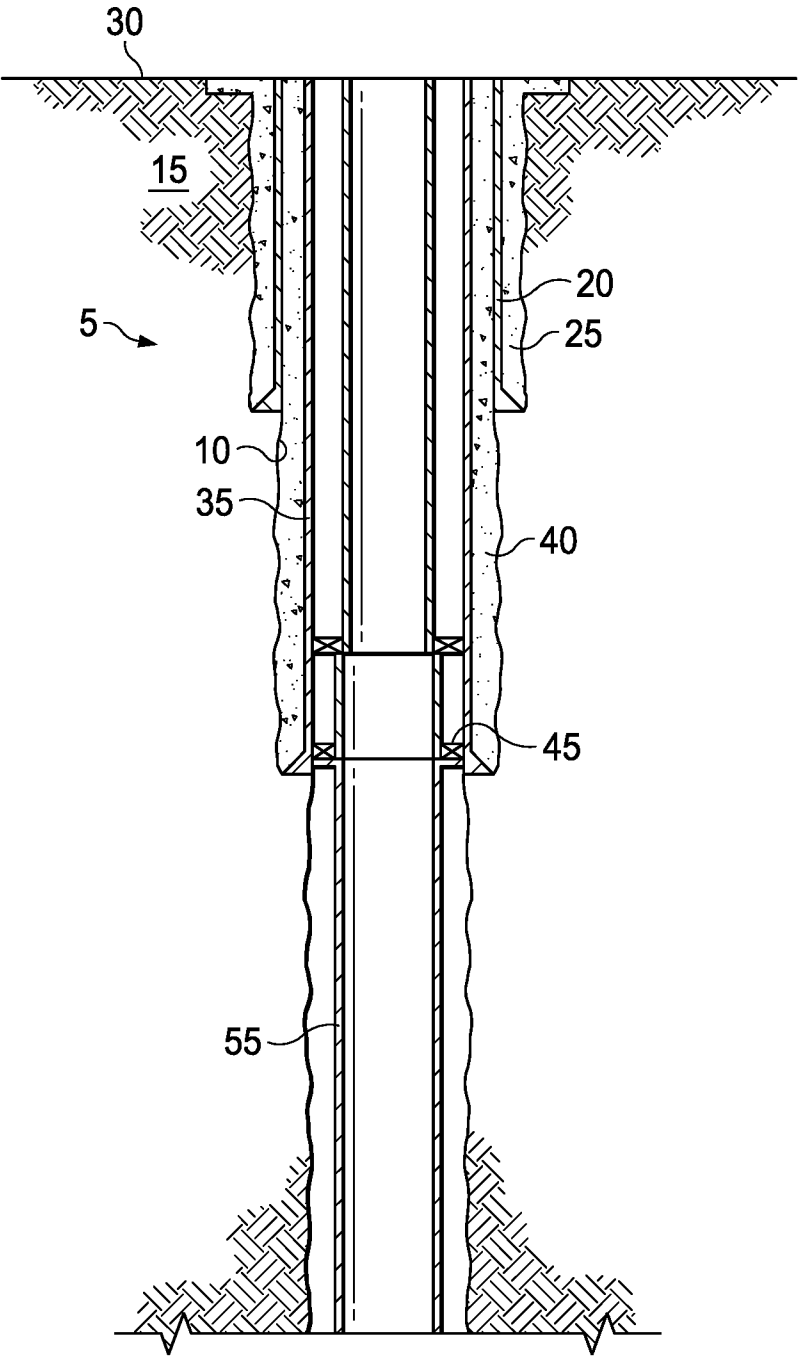
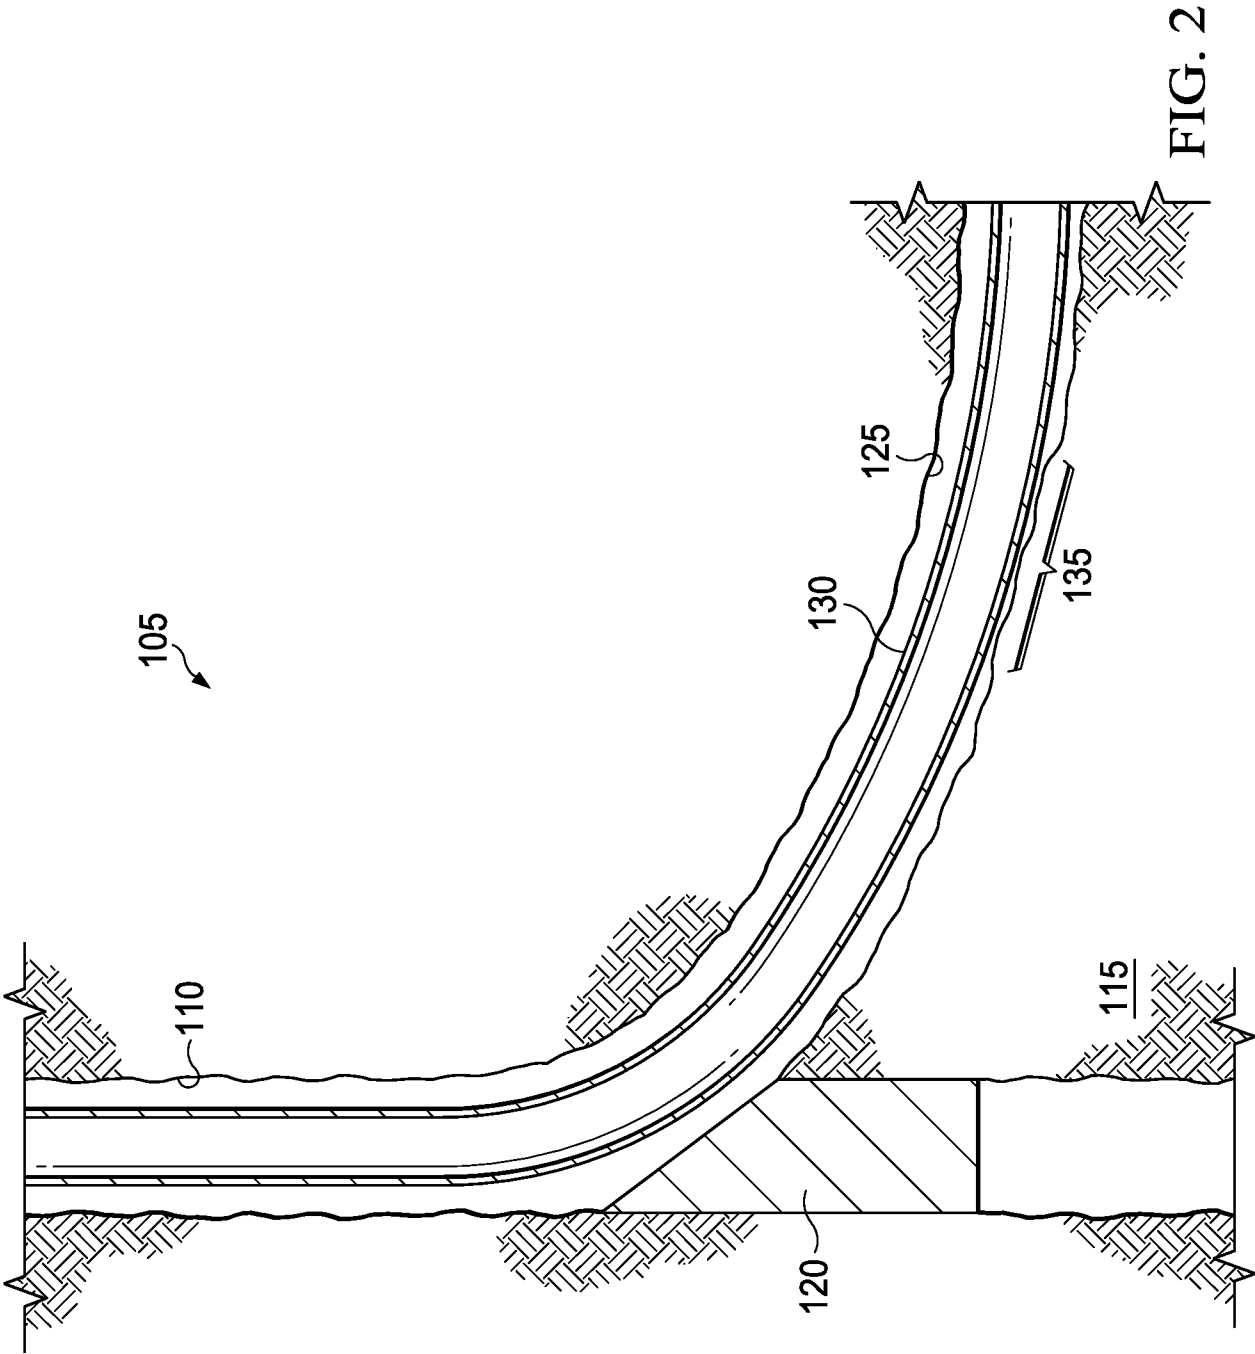


FIG. 1



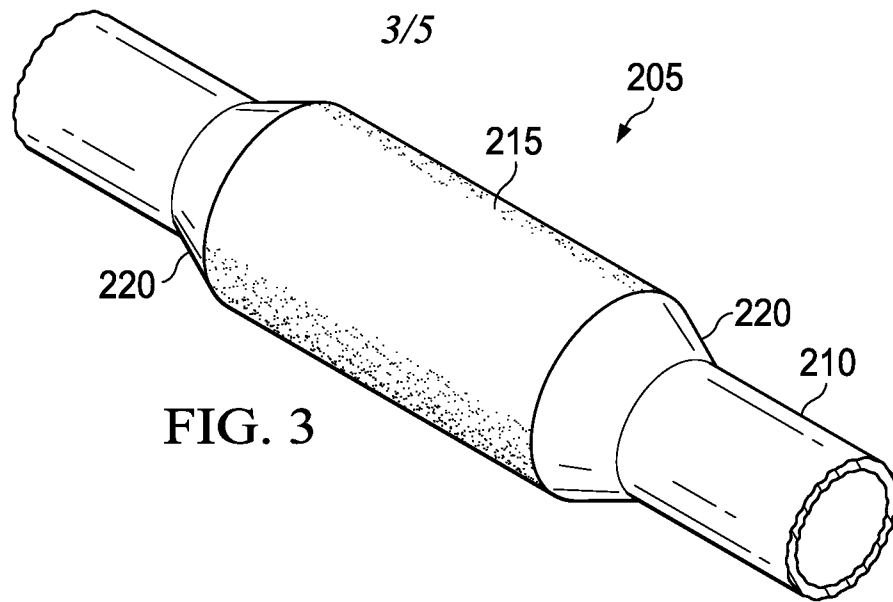


FIG. 3

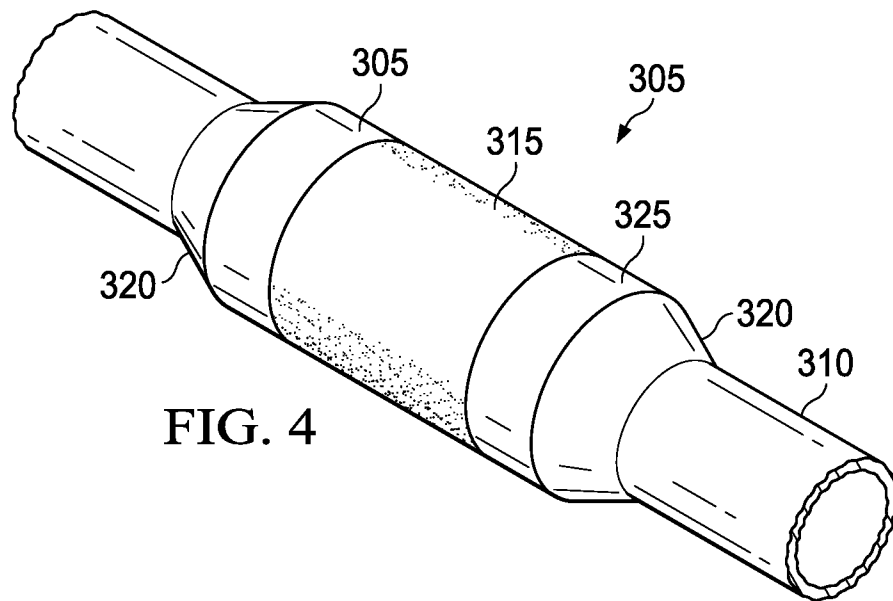


FIG. 4



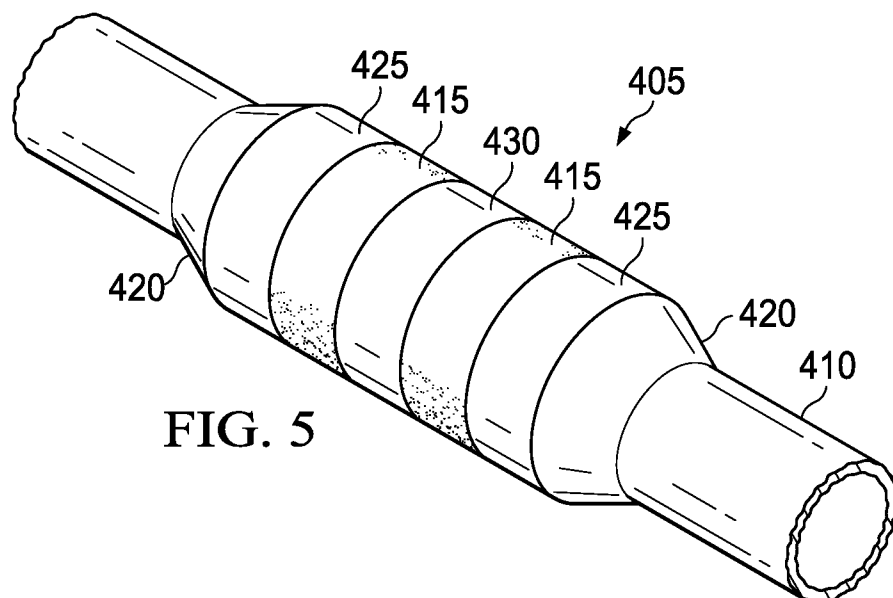


FIG. 5

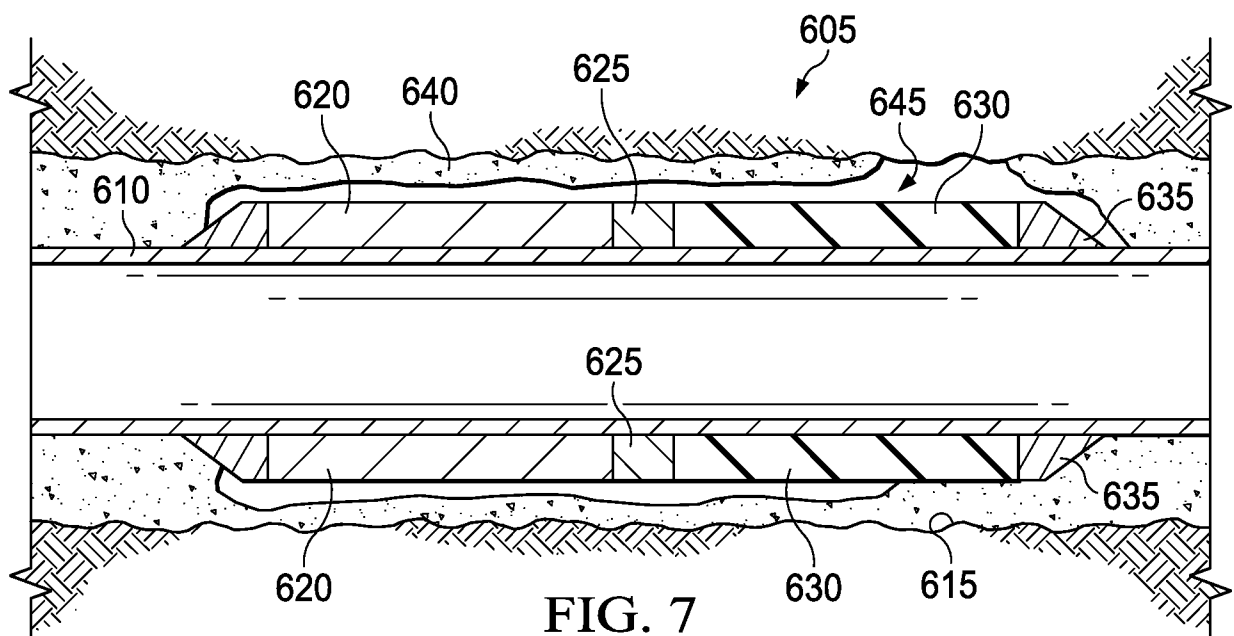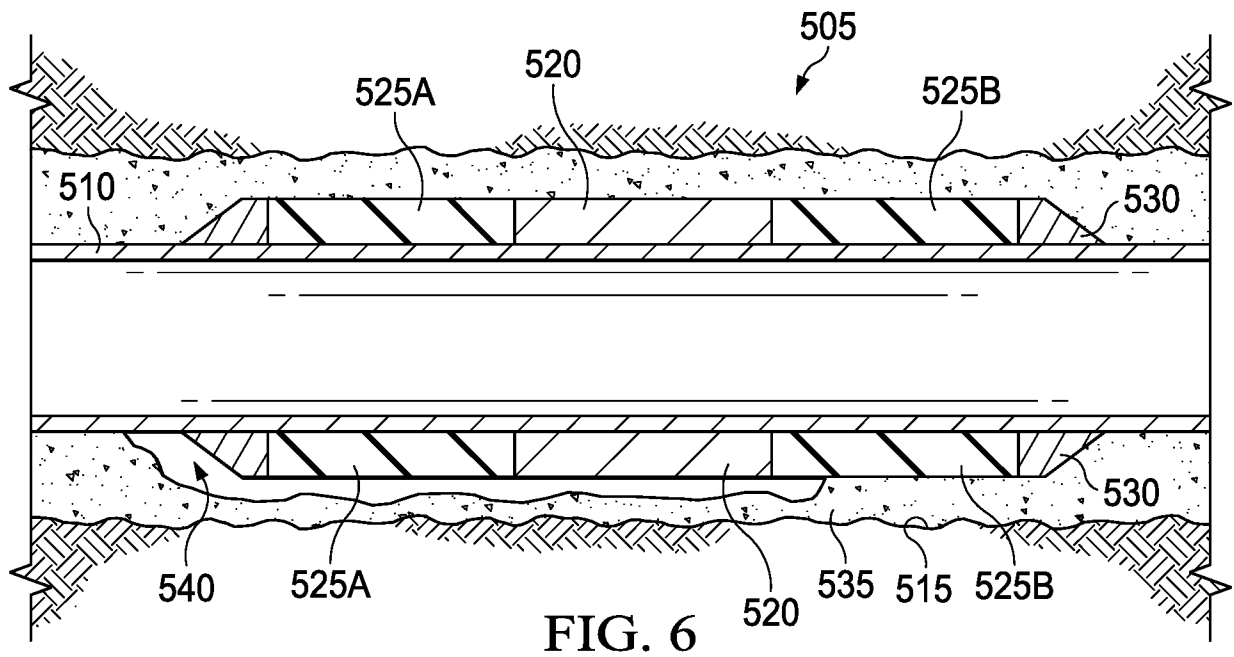

5/5

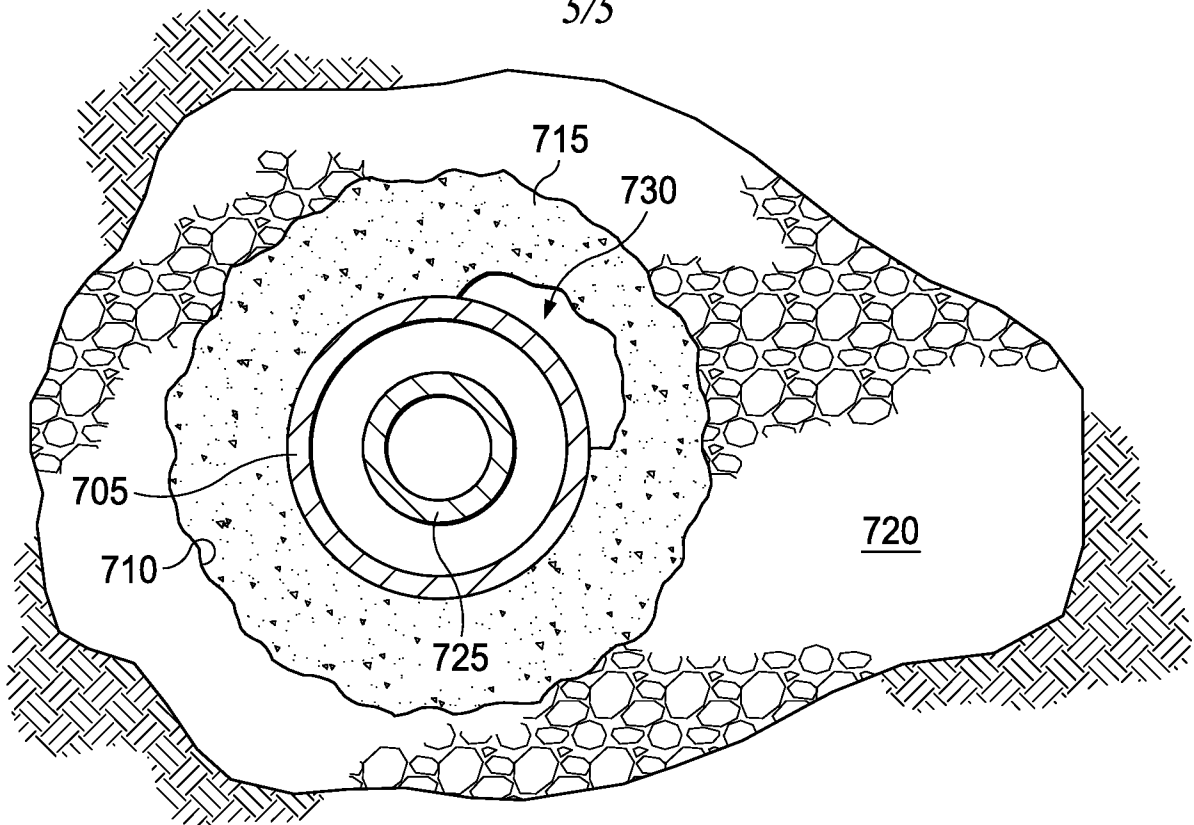


FIG. 8

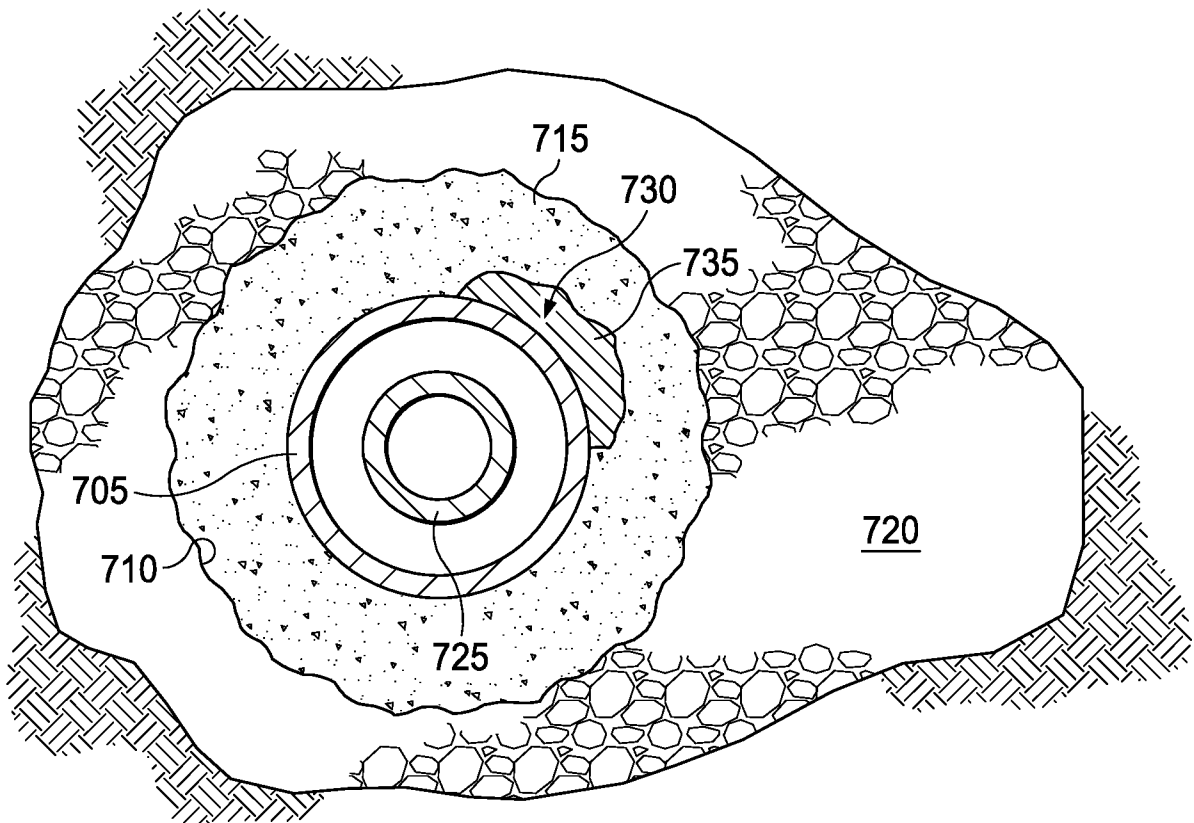


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2021/032983

A. CLASSIFICATION OF SUBJECT MATTER E21B 33/14(2006.01)i; E21B 33/12(2006.01)i According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) E21B 33/14(2006.01); C04B 20/00(2006.01); C09K 8/467(2006.01); C09K 8/50(2006.01); C09K 8/70(2006.01); E21B 33/12(2006.01); E21B 33/126(2006.01); E21B 33/127(2006.01) Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Korean utility models and applications for utility models Japanese utility models and applications for utility models Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) eKOMPASS(KIPO internal) & Keywords: wellbore, conduit, cement, reactive metal element, swellable non-metal element, spacer element				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	US 2021-0017441 A1 (HALLIBURTON ENERGY SERVICES, INC.) 21 January 2021 (2021-01-21) paragraphs [0011], [0024]-[0037], [0042], [0048], [0058] and figures 3A-4D	1-3,8-13,18-20		
Y		4-7,14-17		
Y	WO 2019-164499 A1 (HALLIBURTON ENERGY SERVICES, INC.) 29 August 2019 (2019-08-29) page 9, line 17 - page 11, line 15 and figures 1-3	4-7,14-17		
A	WO 2021-076141 A1 (HALLIBURTON ENERGY SERVICES, INC.) 22 April 2021 (2021-04-22) page 11, line 14 - page 12, line 13 and figure 1	1-20		
A	US 2016-0230495 A1 (MAZYAR et al.) 11 August 2016 (2016-08-11) paragraphs [0012]-[0016] and figures 1-2	1-20		
A	CN 107250321 A (POWDERMET INC.) 13 October 2017 (2017-10-13) paragraphs [0060]-[0071] and figure 1	1-20		
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; border: none;"> * Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "D" document cited by the applicant in the international application "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; vertical-align: top; border: none;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family </td> </tr> </table>			* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "D" document cited by the applicant in the international application "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "D" document cited by the applicant in the international application "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family			
Date of the actual completion of the international search 09 February 2022		Date of mailing of the international search report 10 February 2022		
Name and mailing address of the ISA/KR Korean Intellectual Property Office 189 Cheongsa-ro, Seo-gu, Daejeon 35208, Republic of Korea Facsimile No. +82-42-481-8578		Authorized officer BAHNG, SEUNG HOON Telephone No. +82-42-481-5560		

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2021/032983

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2021-0017441	A1	21 January 2021	AU	2019-457404	A1	11 November 2021
				US	10913885	B1	09 February 2021
				WO	2021-011013	A1	21 January 2021
WO	2019-164499	A1	29 August 2019	AR	114225	A1	05 August 2020
				AU	2018-409809	A1	25 June 2020
				BR	112020014447	A2	01 December 2020
				CA	3088190	A1	29 August 2019
				CN	111630247	A	04 September 2020
				DK	202070389	A1	24 June 2020
				GB	2583661	A	04 November 2020
				NO	20200848	A1	17 July 2020
				RO	134703	A2	29 January 2021
				SG	11202006956	A	28 August 2020
				US	2021-0332659	A1	28 October 2021
				WO	2019-164499	A8	13 August 2020
WO	2021-076141	A1	22 April 2021	NL	2026329	A	04 June 2021
				US	10961804	B1	30 March 2021
				US	2021-0115750	A1	22 April 2021
				US	2021-0198973	A1	01 July 2021
US	2016-0230495	A1	11 August 2016	AU	2013-303158	A1	19 February 2015
				AU	2013-303158	B2	06 October 2016
				BR	112015002787	A2	10 October 2017
				CA	2880960	A1	20 February 2014
				CA	2880960	C	20 June 2017
				CN	104583530	A	29 April 2015
				CN	104583530	B	25 August 2017
				GB	2521298	A	17 June 2015
				GB	2521298	B	25 September 2019
				NO	20150171	A1	06 February 2015
				RU	2015108924	A	10 October 2016
				RU	2634757	C2	03 November 2017
				US	2014-0051612	A1	20 February 2014
				US	9404030	B2	02 August 2016
				US	9725979	B2	08 August 2017
				WO	2014-028149	A1	20 February 2014
CN	107250321	A	13 October 2017	CA	2888137	A1	19 June 2014
				CA	2888137	C	26 January 2021
				CA	2936816	A1	27 August 2015
				CA	2942184	A1	22 October 2015
				CA	2942184	C	21 April 2020
				CA	2966530	A1	26 May 2016
				CA	3017752	A1	30 November 2017
				CA	3019702	A1	06 April 2019
				CA	3040185	A1	11 May 2018
				CN	106029255	A	12 October 2016
				CN	106029255	B	26 October 2018
				CN	106460133	A	22 February 2017
				CN	106460133	B	18 June 2019
				CN	110004339	A	12 July 2019

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2021/032983

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
		CN 110004339 B	26 November 2021
		GB 2537576 A	19 October 2016
		GB 2546448 A	19 July 2017
		US 10106730 B2	23 October 2018
		US 10329653 B2	25 June 2019
		US 10392314 B2	27 August 2019
		US 10584564 B2	10 March 2020
		US 10625336 B2	21 April 2020
		US 10689740 B2	23 June 2020
		US 10724128 B2	28 July 2020
		US 10758974 B2	01 September 2020
		US 10760151 B2	01 September 2020
		US 10858579 B2	08 December 2020
		US 2015-0240337 A1	27 August 2015
		US 2015-0259263 A1	17 September 2015
		US 2015-0299838 A1	22 October 2015
		US 2016-0137912 A1	19 May 2016
		US 2017-0028465 A1	02 February 2017
		US 2017-0268088 A1	21 September 2017
		US 2017-0298492 A1	19 October 2017
		US 2018-0029115 A1	01 February 2018
		US 2018-0078998 A1	22 March 2018
		US 2018-0087350 A1	29 March 2018
		US 2018-0155813 A1	07 June 2018
		US 2018-0163125 A9	14 June 2018
		US 2018-0305801 A1	25 October 2018
		US 2019-0016951 A1	17 January 2019
		US 2019-0023630 A1	24 January 2019
		US 2019-0039126 A1	07 February 2019
		US 2019-0048448 A1	14 February 2019
		US 2019-0054523 A1	21 February 2019
		US 2019-0264543 A1	29 August 2019
		US 2019-0338405 A1	07 November 2019
		US 2020-0080401 A1	12 March 2020
		US 2020-0254516 A1	13 August 2020
		US 2020-0299819 A1	24 September 2020
		US 2020-0308682 A1	01 October 2020
		US 2020-0377790 A1	03 December 2020
		US 9757796 B2	12 September 2017
		US 9903010 B2	27 February 2018
		WO 2014-093269 A1	19 June 2014
		WO 2015-127177 A1	27 August 2015
		WO 2015-161171 A1	22 October 2015
		WO 2016-081287 A1	26 May 2016
		WO 2017-205281 A1	30 November 2017
		WO 2018-085102 A1	11 May 2018
		WO 2018-102196 A1	07 June 2018