




(86) Date de dépôt PCT/PCT Filing Date: 2000/04/26
(87) Date publication PCT/PCT Publication Date: 2000/11/02
(45) Date de délivrance/Issue Date: 2009/03/10
(85) Entrée phase nationale/National Entry: 2001/10/24
(86) N° demande PCT/PCT Application No.: CA 2000/000481
(87) N° publication PCT/PCT Publication No.: 2000/064522
(30) Priorité/Priority: 1999/04/26 (CA2,269,890)

(51) Cl.Int./Int.Cl. *A61M 16/12* (2006.01)
(72) Inventeur/Inventor:
CARTER, STEPHEN A., CA
(73) Propriétaire/Owner:
VERITEK NGV, CANADA, CORPORATION, CA
(74) Agent: DEETH WILLIAMS WALL LLP

(54) Titre : TRAITEMENT DE L'EMPOISONNEMENT AU MONOXYDE DE CARBONE
(54) Title: TREATMENT OF CARBON MONOXIDE POISONING

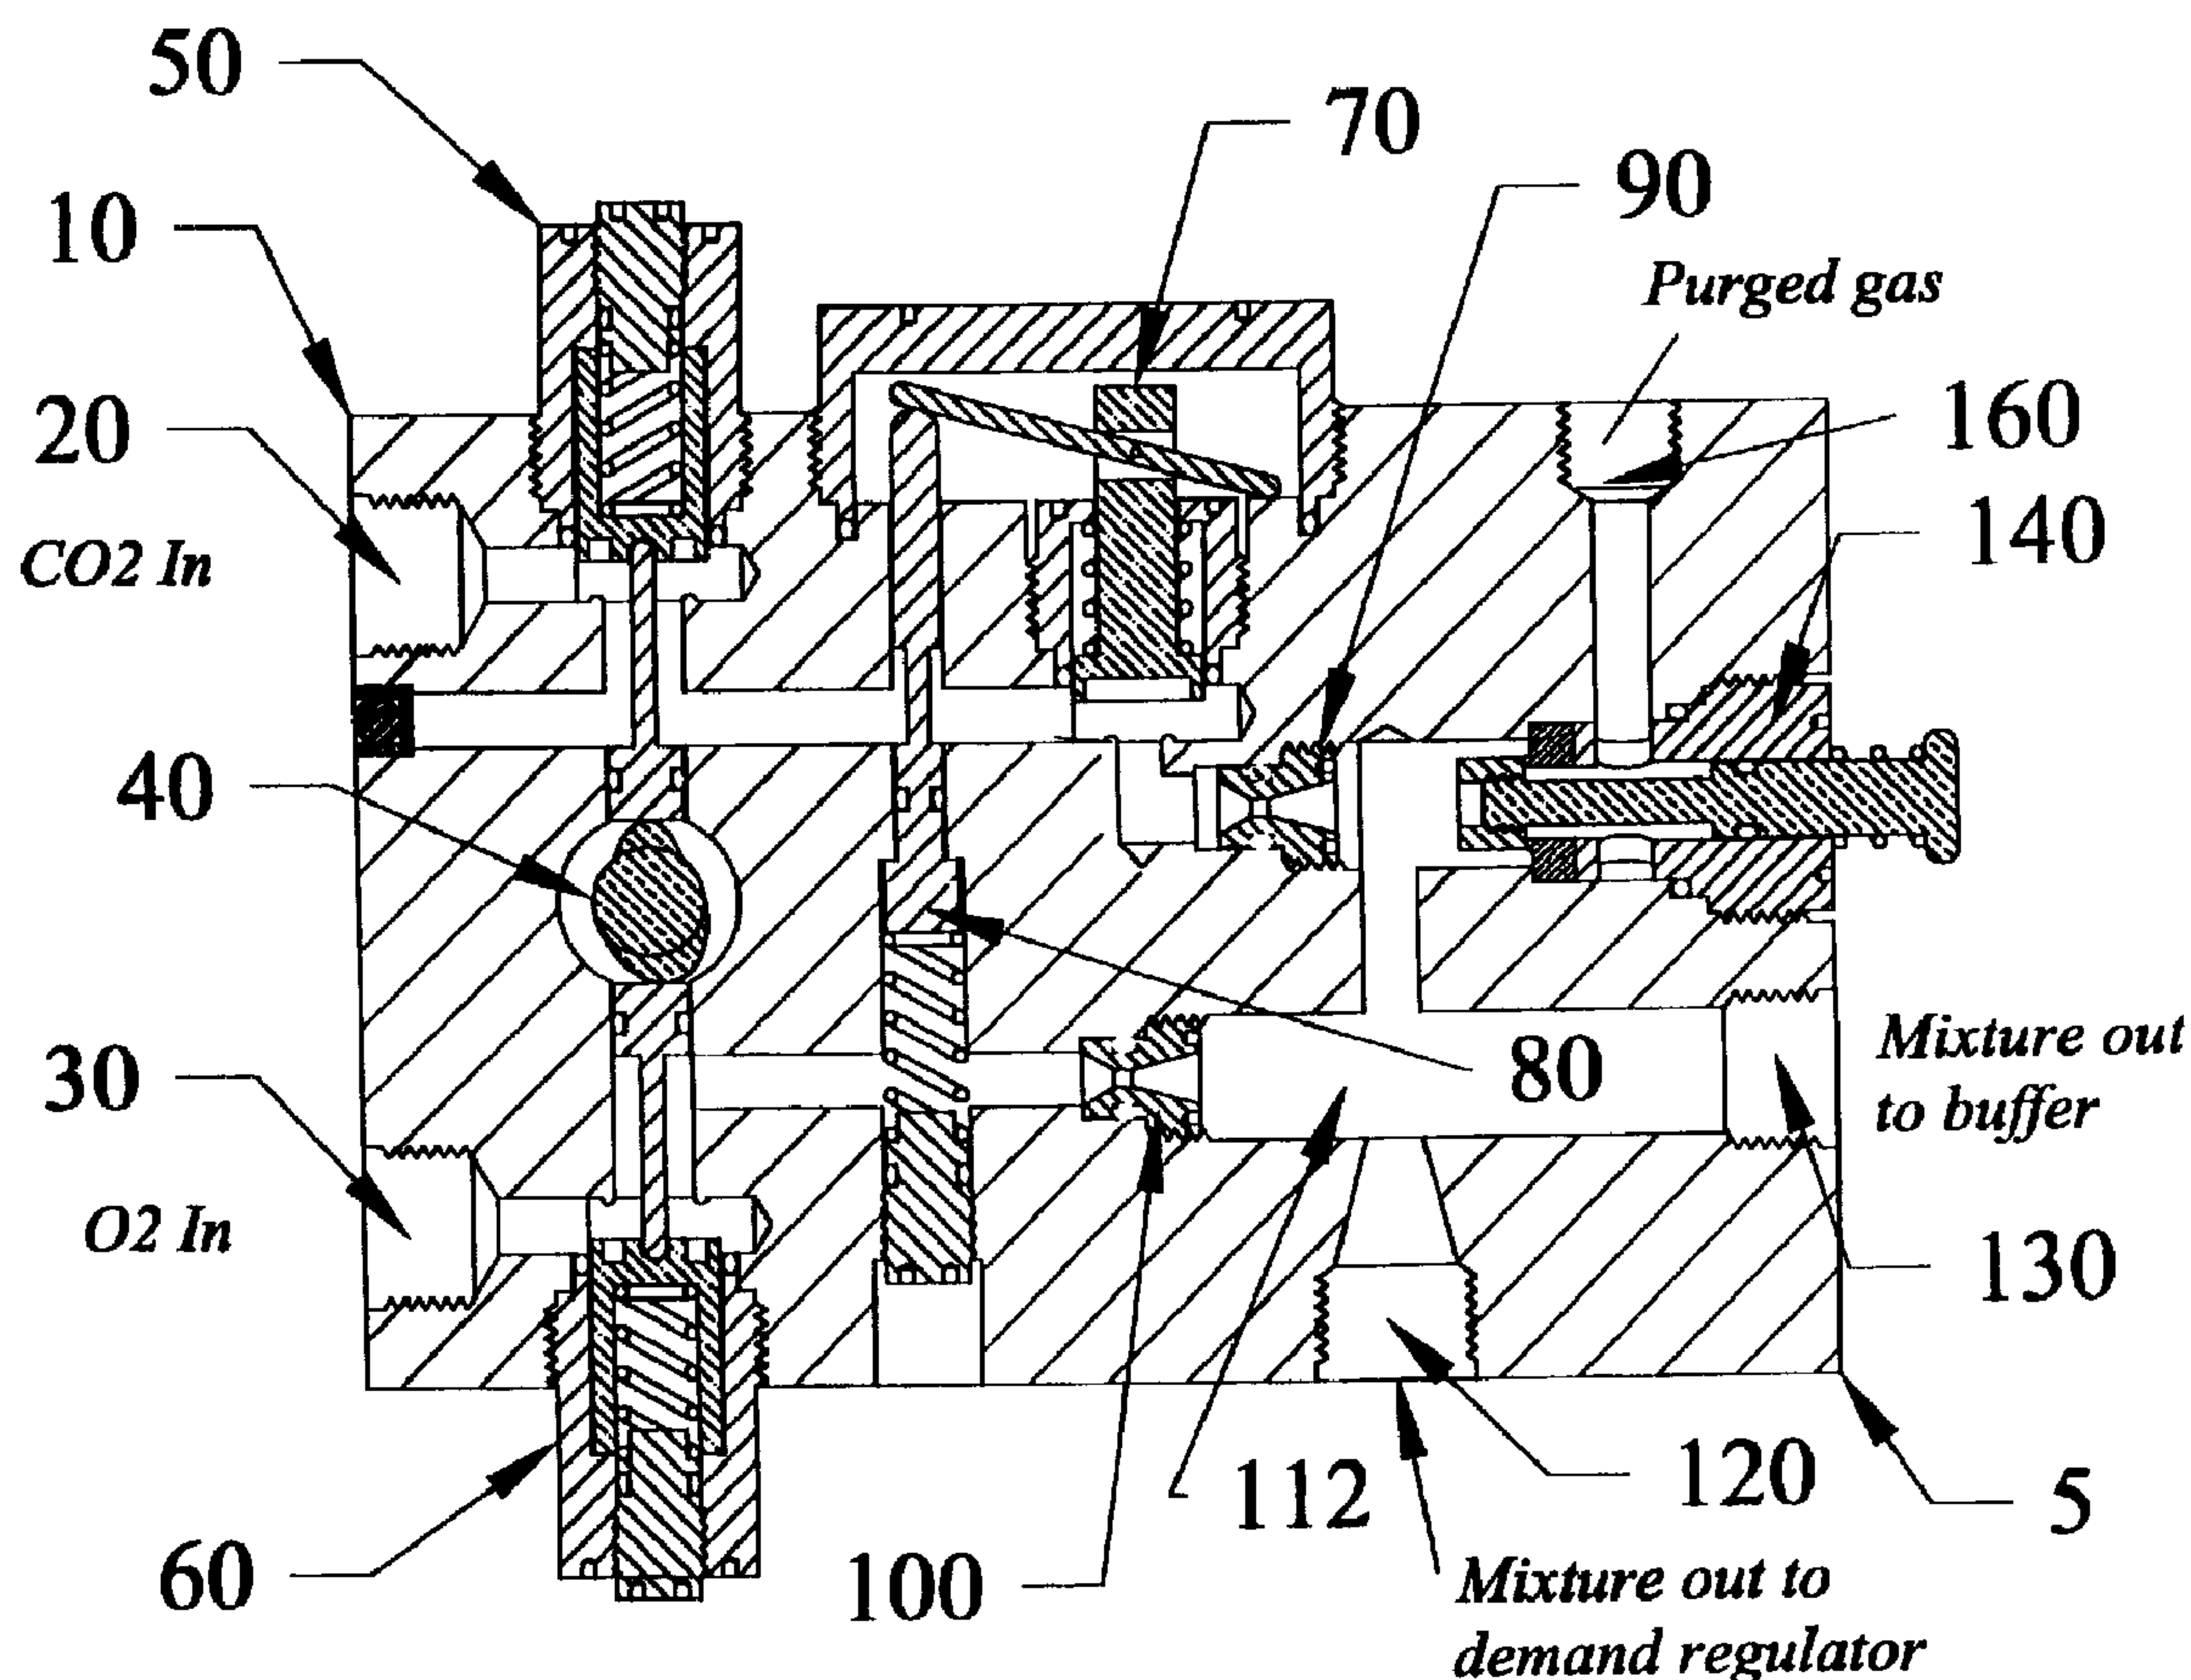

(57) Abrégé/Abstract:

An improved therapy for both clearing the blood of unwanted carbon monoxide and anaesthetic chemicals and for rapidly re-oxygenating blood suffering from carbon monoxide poisoning or smoke inhalation. It also includes a therapy delivery device for



(57) **Abrégé(suite)/Abstract(continued):**

carbon dioxide and oxygen metering and mixing apparatus for gases under pressure particularly for respirators and medical devices which has a plurality of compressed gas supply lines which are connected to a mixing device for delivery into a demand regulator (260) (respirator or face mask). It includes a gas selection device (5), an automatic shut off of the carbon dioxide (70), a purging system (290), metering of the gases and a mixing chamber to promote a homogeneous mixture of gases and sized for field use by emergency care operators. The therapy is a mixture of carbon dioxide and oxygen for promoting the rapid oxygenation of the patient's blood supply for cases of carbon monoxide poisoning, smoke inhalation or other cases where the blood oxygen level is low.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 November 2000 (02.11.2000)

PCT

(10) International Publication Number
WO 00/64522 A1

(51) International Patent Classification⁷: **A61M 16/12**

(21) International Application Number: PCT/CA00/00481

(22) International Filing Date: 26 April 2000 (26.04.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2,269,890 26 April 1999 (26.04.1999) CA

(71) Applicant (for all designated States except US):
VERITEK NGV, CANADA, CORPORATION
[CA/CA]; 1483 Ballantrae Drive, Mississauga, Ontario L5M 3N6 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CARTER, Stephen,**
A. [CA/CA]; 4505 Trailmaster Drive, Mississauga, Ontario L5V 1C9 (CA).

(74) Agent: **DEETH WILLIAMS WALL LLP**; National Bank Building, Suite 400, 150 York Street, Toronto, Ontario M5H 3S5 (CA).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: TREATMENT OF CARBON MONOXIDE POISONING

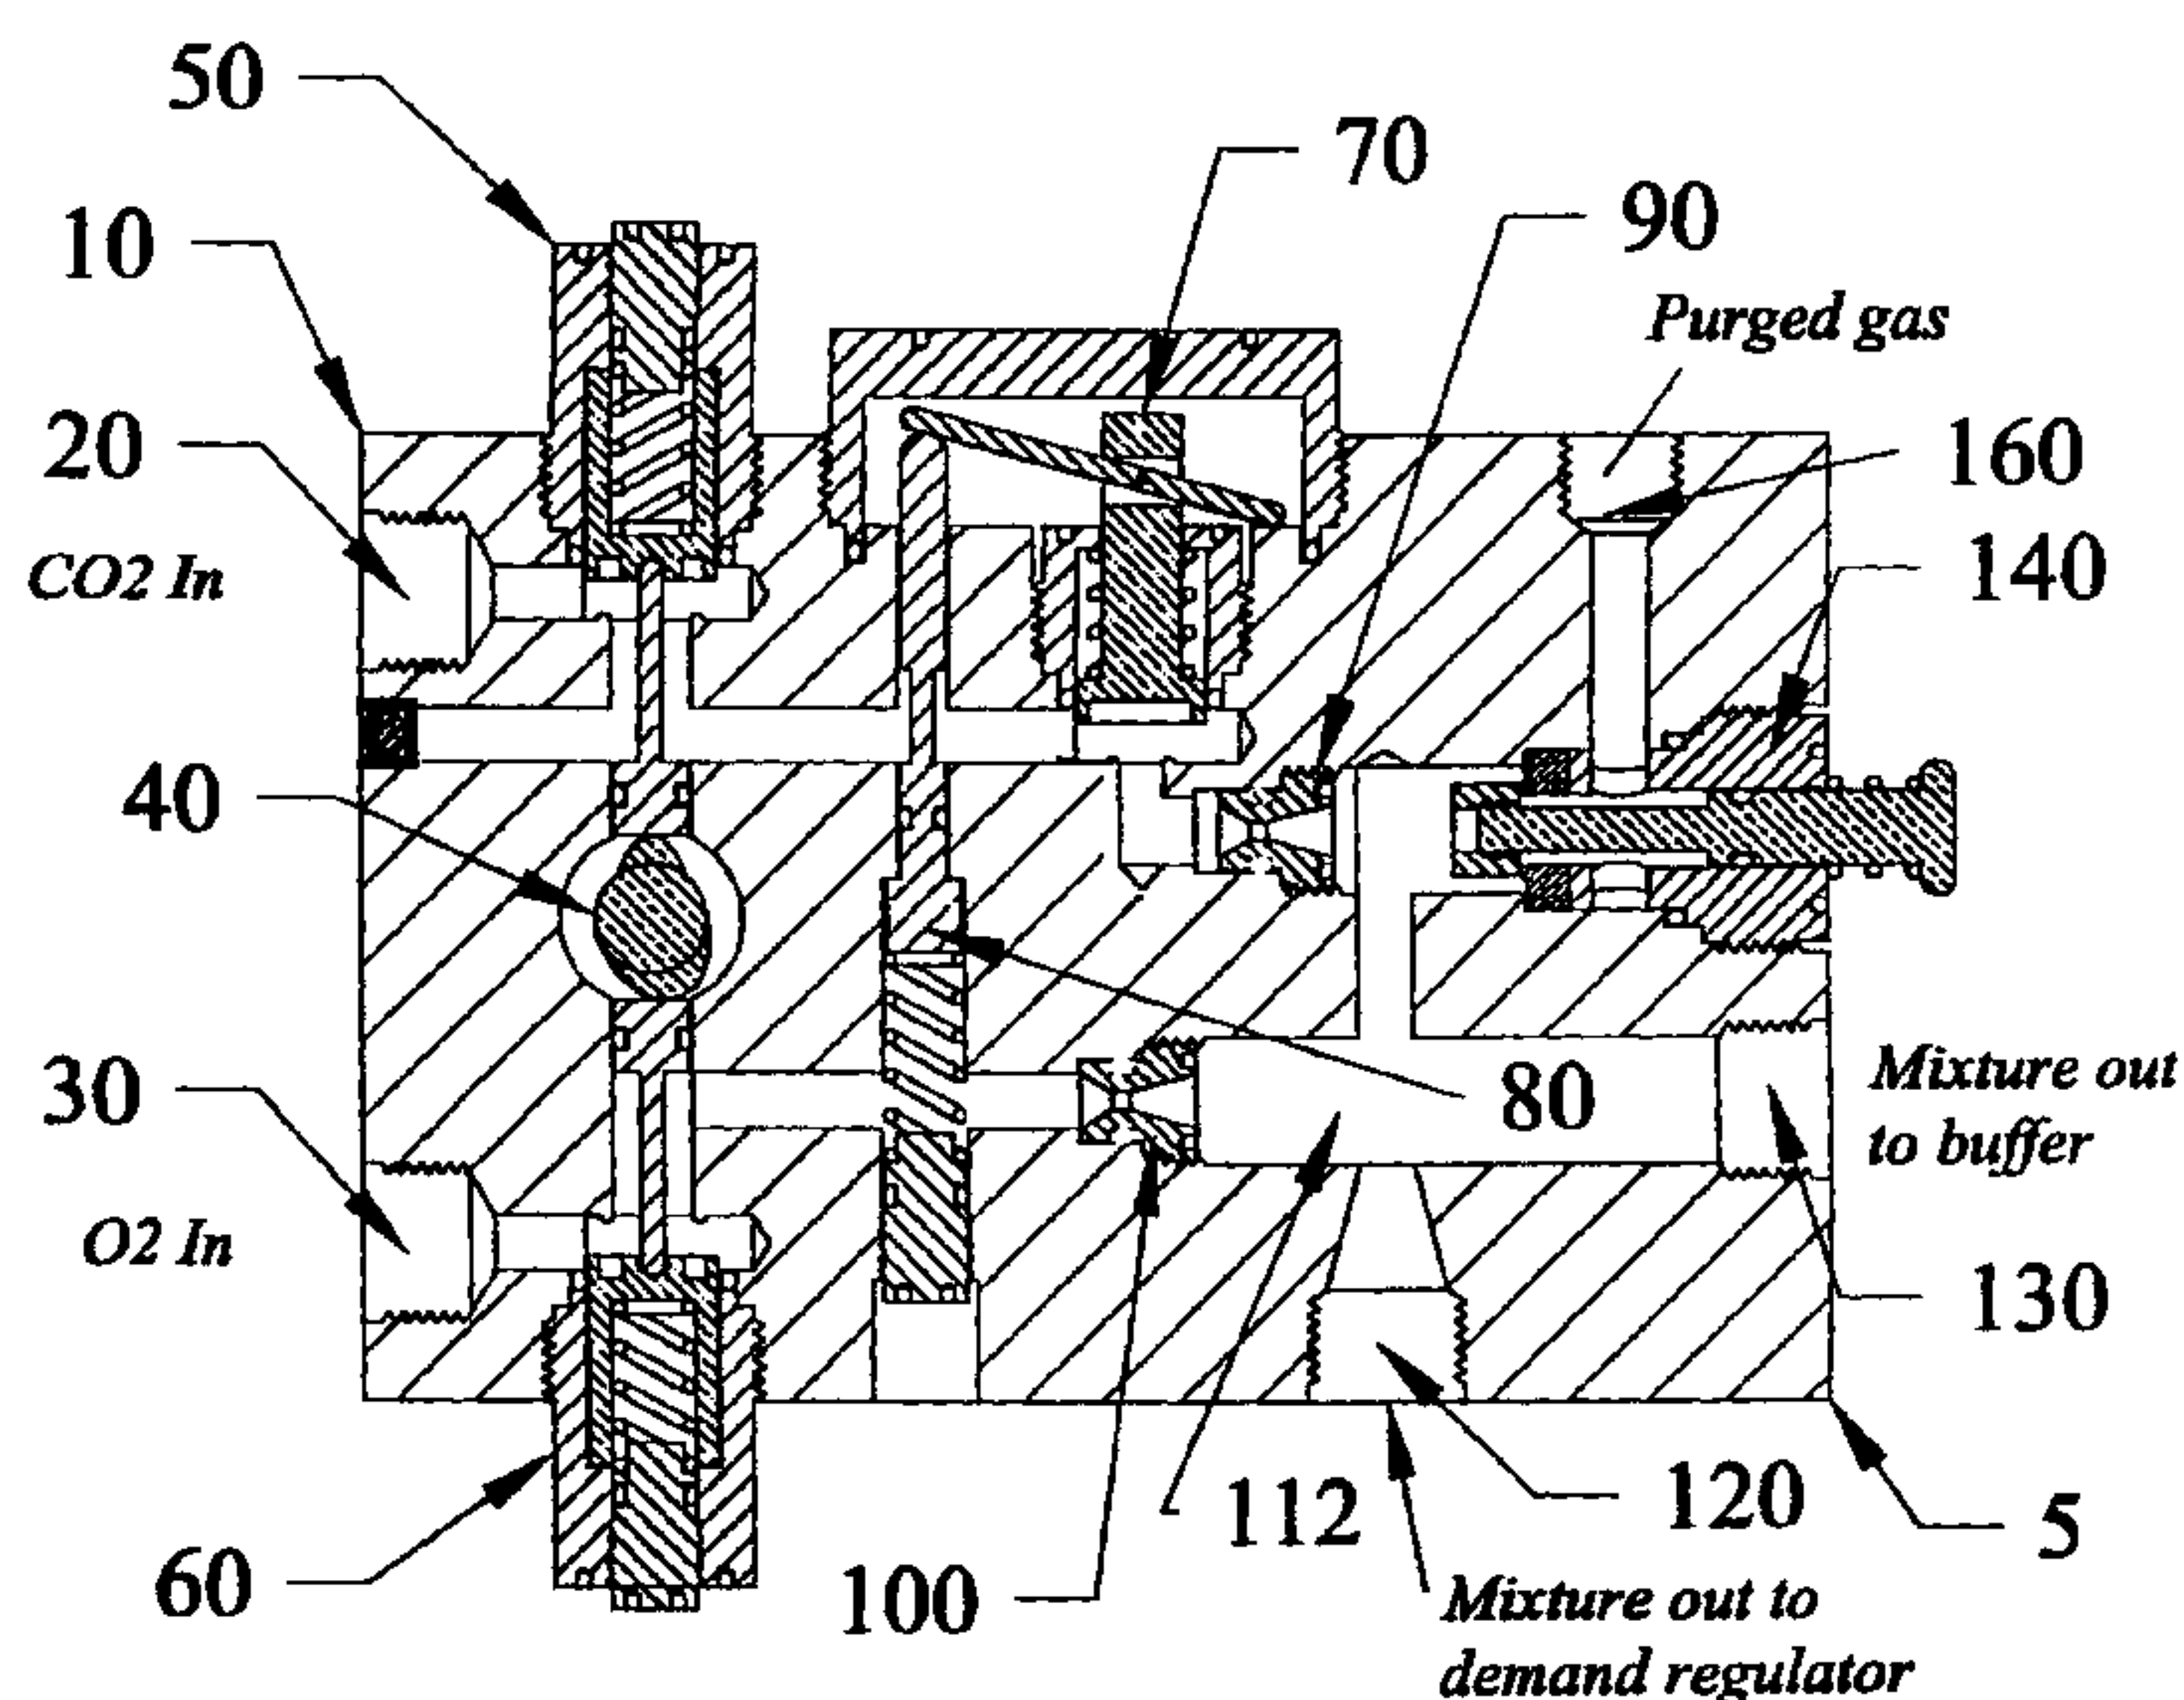

(57) Abstract: An improved therapy for both clearing the blood of unwanted carbon monoxide and anaesthetic chemicals and for rapidly re-oxygenating blood suffering from carbon monoxide poisoning or smoke inhalation. It also includes a therapy delivery device for carbon dioxide and oxygen metering and mixing apparatus for gases under pressure particularly for respirators and medical devices which has a plurality of compressed gas supply lines which are connected to a mixing device for delivery into a demand regulator (260) (respirator or face mask). It includes a gas selection device (5), an automatic shut off of the carbon dioxide (70), a purging system (290), metering of the gases and a mixing chamber to promote a homogeneous mixture of gases and sized for field use by emergency care operators. The therapy is a mixture of carbon dioxide and oxygen for promoting the rapid oxygenation of the patient's blood supply for cases of carbon monoxide poisoning, smoke inhalation or other cases where the blood oxygen level is low.

WO 00/64522 A1

WO 00/64522 A1



(48) Date of publication of this corrected version:

1 November 2001

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(15) Information about Correction:

see PCT Gazette No. 44/2001 of 1 November 2001, Section II

TREATMENT OF CARBON MONOXIDE POISONING

FIELD OF THE INVENTION

This invention relates to a therapy for clearing the blood of unwanted carbon monoxide and anaesthetic chemicals and for rapidly re-oxygenating that has had its oxygen level depleted by environmental conditions i.e. carbon monoxide poisoning or smoke inhalation. The invention includes the means of delivering the therapy in a convenient manner whether given in-situ, in an ambulance or other emergency response vehicle, or at the hospital or other care facility, and whether administered by medical professionals or paramedical personnel. The device relates in general to pneumatic/mechanical control of respirator gas supply control devices and in particular to gas selection, automatic shut off of the carbon dioxide, purging, metering and mixing of the therapeutic gases.

BACKGROUND OF THE INVENTION

Carbon monoxide (CO) is a tasteless, colourless, odourless gas. Thus it is undetectable by potential victims. The blood prefers CO to oxygen by a ratio of 200:1. As a result, relatively small amounts of CO in the air can cause CO poisoning. CO attaches to blood forming carboxyhemoglobin, thus starving the brain and other organs and tissues for oxygen (O₂). Carbon monoxide poisoning occurs when carboxyhemoglobin levels are high enough to impair cellular functions. Symptoms of carbon monoxide poisoning include drowsiness, nausea and possibly death. The CO poisoning rate is significant, with over 70,000 hospital visits and 10,000 deaths per year in the U.S.

The cellular oxygen starvation from CO poisoning can cause death, or long-term, non-reversible health problems (i.e. to the brain, heart or neurological system). If a CO poisoning victim does not die, the average body will clear carboxyhemoglobin at the following typical rates:

Spontaneous breathing – cleansing half-life = 220 minutes; Breathing pure O₂ = 40 minutes; Hyperbaric chamber = 20 minutes.

While the best current therapy is placing the patient in a hyperbaric chamber, these chambers are usually unavailable (only about 700 exist world-wide) and are rarely used. Typically these chambers require a “warm-up” time of 2 hours, which largely negates their theoretical usefulness. That is, significant permanent damage may have already occurred before the treatment can be commenced.

The current therapy of choice is to administer pure O₂. As suggested above, pure O₂ would require approximately 2 hours to clear 87.5% of the CO from the bloodstream (e.g. 40 minutes = 50% of CO is eliminated; 80 minutes = 25%; 120 minutes = 12.5%). Breathing

pure O₂ has an unfortunate side effect; it lowers the respiratory rate and reduces the exchange of gases in the lungs, thereby prolonging the tissue starvation period. Accordingly, there is a need for a device that would overcome these disadvantages.

Typical respirator gas supply control devices, particularly those used for mixing gases under pressure and feed a delivery line of a respirator, or medical device, are too large and bulky to be used in situ or in emergency vehicles. They also require the operation of a skilled, medical practitioner to properly administer. A complete system that can be used by emergency and paramedical should have a gas selection device, an automatic shut off of the carbon monoxide a purging system, metering of the gases and a mixing chamber to promote a homogeneous mixture of gases and sized for in-situ or vehicle as well as hospital emergency room use. It should be able to use a whole range of different gas storage systems for input and demand regulators and facemasks as output. It can not rely on electrical control of the gas flow and mixing as power demand for both in situ or emergency vehicle applications is already greater than is reasonable to expect. Also electrical power at fire and other emergency sites is problematical to provide and higher priority uses get first use of this power. Finally battery power is not acceptable as the system must operate every time demanded regardless of the interval between demand and maintenance of batteries is a low priority item for emergency care providers.

For example, US patent 3,441,041 allows for either atmospheric or compressed air to be used for a breathing apparatus but the mixture device is not easily portable, and requires adjustment by a trained individual when dealing with a patient to determine if the by-pass should be opened or closed and to adjust the compressed air flow based on respiration demands and the state of the patient's health.

US patent 4,535,797 discloses a device that uses flow to keep the by-pass open and the by-pass is required to open the gas flow valve for the first time. Should the CO₂ supply fail, the O₂ supply will shut and the patient's therapy is terminated.

US patent 4,549,563 maintains a constant ratio between two gases, G1 and G2, by keeping the pressure of both gases P1 and P2 constant and keeps P1 constant at a set rate of flow through the use of a pressure limiter.

The device disclosed in US patent 4,549,563 does not provide for automatic shut off of the CO₂ gas stream should the O₂ stream become clogged. This shortcoming would expose the patient to an asphyxiant and would not revert to the previously accepted therapy.

In US patent 4,549,563 the practitioner operates the flush system described in case the patient requires pure O₂ instead of the gas mixer. Such facemasks are commercially available and are not shown in the drawings. Also the system in 4,549,563 has no means of

purging, which would mean that the second patient would face an incorrect mixture or if the system selection was changed, for example from O₂ to CO₂ then the patient would have to inhale the incorrect mixture prior to receiving the correct therapeutic gases.

US patent 4,313,436 mixes O₂ and other medical gases for patients. It requires
5 electronic sensing to determine if the gas mixture is correct and if not then causes a pressure pulse to close the by-pass thereby allowing only pure O₂ to enter the facemask. The use of electronics that have a large demand for power, i.e. 4 sensors and an automatic controller, are not feasible for in-situ on in vehicle use where power demand is already quite high and the most frequent operational problem is dead batteries due to limited maintenance time. Also
10 this device has up to 5 separate valves that need to be adjusted by the medical practitioner to ensure the patient is receiving the proper gas mixture depending on his state. This degree of adjustment is inimical to the use by paramedical and emergency personnel. The system in 4,313,436 lacks a means of purging and only has two selection options, no mixture or mixture. Since there is no intermediary stage the operator is not prompted to purge the
15 system.

US patent 4,827,965 uses a venturi nozzle to simultaneously meter and mix the two gases in proper proportions. This scheme means that pressure of the two gases varies over the flow demand regime and that the charge may be stratified. Finally the system in 4,827,965 does not have a means to shut off the CO₂ mixture thus potentially exposing the patient to an
20 asphyxiant. Nor does it allow selection of different options (i.e. O₂ only, off, mix or off). Nor does it offer a means of purging the system except by drawing off the first amount of improper mixture.

Under US patent 5,727,545, one embodiment requires electronic sensing of two temperatures and a pressure to control the action of four flow regulators. In a second
25 embodiment, it requires electronic sensing of two temperatures and a pressure to control the action of two flow regulators. The by-pass is driven electronically so that any failure of the electrical system would endanger the patient's life. Metering and mixing are all electronic and it has no purging means. The use of electronics that have a large demand for power are not feasible for in-situ on in vehicle use where power demand is already quite high and the most
30 frequent operational problem is dead batteries due to limited maintenance time.

US patent 4,508,143 discloses the use of a cam actuator to open a valve. It opens two poppet valves either automatically or manually. 4,508,143 has no other features that could deliver or control the therapeutic gas delivery.

SUMMARY OF THE INVENTION

The invention provides a therapy clearing the blood of unwanted carbon monoxide and anaesthetic chemicals and for rapidly re-oxygenating that has had its oxygen level depleted by environmental conditions, i.e. carbon monoxide poisoning or smoke inhalation.

5 The invention includes delivering the therapy in a convenient manner *in situ*, in an ambulance or other emergency response vehicle, or at the hospital or other care facility. It may be administered by medical professionals or paramedical personnel. The device relates in general to respirator gas supply control devices and in particular to gas selection, automatic shut off of the carbon monoxide, purging, metering and mixing of the therapeutic gases.

10 It is a great improvement on the current therapy, using pure O₂, in that it is more rapidly clears carboxyhemoglobin from the patient's blood stream. Also it does not lower the respiratory rate or reduce the exchange of gases in the lungs, thereby prolonging the tissue starvation period. In fact the body's autonomous responses in the presence of a CO₂ rich environment is to increase the rate of respiration (panting) thus further decreasing the tissue
15 starvation period. While the method of invention and the use of a hyperbaric chamber are both effective, a hyperbaric chamber is impractical for *in situ* and vehicle applications due to their size, cost, long warm up time and requirement for trained medical practitioner for operation.

Cellular oxygen starvation from CO poisoning, or smoke inhalation, can cause death,
20 or long-term, non-reversible health problems (i.e. to the brain, heart or neurological system). In the United States alone there are 70,000 hospital visits and 10,000 deaths per year due to CO poisoning. Thus a new therapy that radically improves the outcomes of patients exposed to CO poisoning is needed.

The invention also includes a device for delivering the improved therapy for *in situ*,
25 in vehicles (i.e. ambulance or fire truck) and institutional (i.e. hospital) locations. It avoids the above-described shortcomings for example where the system requires electric power to properly operate, making it impractical for most emergency applications. It avoids the requirement for a trained medical practitioner to properly operate and adjust the system while monitoring the patient's state of health. It avoids the requirement to add other required
30 functions to the system with external components.

The invention optionally includes all the functions required of an integrated system: selection of therapy; automatic shut-off of CO₂; (i.e. automatic use of current therapy pure O₂) or in case of O₂ interruption automatic use of atmospheric air; precision metering of both gases; excellent mixing of both gases; and system purging. One embodiment allows for the
35 use of the use of any O₂ and CO₂ supply to accommodate institutional demands (i.e.

hospitals). The first embodiment includes a pneumatic control device. The second embodiment includes its own portable CO₂ supply to allow use with existing portable O₂ supplies found in all emergency response vehicles. The second embodiment contains all items required for the therapy except the external O₂ supply.

5 A cam actuator is used to select the choice of gas that the patient receives and is a four-position, rotary, manual switch. It can either be O₂, off, O₂ /CO₂, off. The two intermediary "off" positions allow for the patient to breathe atmospheric air and are a reminder to the operator to purge the system prior to moving to the next selection position.

Should one of the source gas pressures become too low to maintain a proper
10 therapeutic gas mixture then the CO₂ flow would be halted by the shut-off valve. A CO₂ shut-off is operated by differential pressure between the O₂ and the CO₂ gas mixture; failing a proper supply of O₂, the CO₂ shut-off closes so that only atmospheric air or O₂ can be inhaled. This is acceptable as the system reverts to the previously acceptable therapy. In case of O₂ flow interruption the CO₂ flow stops and automatically the patient inhales atmospheric air
15 through the facemask by-pass valve.

The pressure of one gas G1 (O₂) maintains the flow of the other gas G2 (CO₂), since P1 keeps the G2 flow passage open. Metering is done separately for each gas and is automatic and based on sonic flow of the gases, but accepts sub-sonic flow for either or both gases. Metering keeps the flow proportional regardless of outlet demand, and mixing is done
20 in a separate chamber where the gas path maximises the chance of a homogeneous mixture.

The invention relates to an apparatus and method for clearing the blood of unwanted carbon monoxide and/or anaesthetic chemicals and for rapidly re-oxygenating that has had its oxygen level depleted, for example by environmental conditions i.e. carbon monoxide poisoning or smoke inhalation. The therapy includes respiration by the patient of a mixture of
25 CO₂ and O₂. The apparatus for treating preferably involves administering to the subject oxygen from a source of oxygen and carbon dioxide from a source of carbon dioxide, comprises:

- an oxygen conduit defining an oxygen inlet and an oxygen outlet, the oxygen inlet adapted for fluid communication with the source of oxygen;
- 30 • a carbon dioxide conduit defining a carbon dioxide inlet and a carbon dioxide outlet, the carbon dioxide inlet adapted for fluid communication with the source of carbon dioxide;
- a means for combining the oxygen and the carbon dioxide, the means downstream from the oxygen outlet and the carbon dioxide outlet; and

a means for administering the combined oxygen and carbon dioxide to the subject.

The invention also includes a portable kit including the apparatus. The invention also includes a method for removing carbon monoxide and/or anaesthetic chemicals from blood and for rapidly re-oxygenating that has had its oxygen level depleted, including
5 administering to a subject an effective amount of combined oxygen and carbon dioxide from the apparatus. The invention also includes the use of the apparatus for removing carbon monoxide and/or anaesthetic chemicals from blood and for rapidly re-oxygenating that has had its oxygen level depleted.

10 Oxygen and carbon dioxide therapy using the apparatus and methods of the invention can produce a clearing half-life of about 20 minutes.

The invention relates to an improved therapy for clearing the blood of unwanted carbon monoxide and anaesthetic chemicals and for rapidly re-oxygenating that has had its oxygen level depleted by environmental conditions i.e. carbon monoxide poisoning or smoke inhalation. The therapy includes respiration by the patient of a mixture of CO₂ and O₂. The
15 invention includes an apparatus and method for delivering the improved therapy in a convenient manner whether given in-situ, in an ambulance or other emergency response vehicle, or at the hospital or other care facility, and whether administered by medical professionals or paramedical personnel, and does not require the use of electrical power. In one embodiment, the apparatus acts as a pneumatic control device for the therapeutic gas
20 mixture and where O₂ and CO₂ are stored. Preferably, pressure is regulated externally, an external buffer volume is stored externally and/or the demand regulator and facemask are connected to the equipment.

The invention also includes a method and apparatus for delivering the improved therapy, in the second embodiment, where all necessary functions are delivery of the
25 therapeutic gas mixture is self-contained, with the sole exception of the O₂ supply.

The invention also includes a control system, in the first embodiment, which preferably includes: supplied gas shut-off valves; therapy selector switch; automatic shut-off valve for CO₂ supply to avoid asphyxiating the patient; separate CO₂ and O₂ metering valves; a common gas mixing chamber; outlet ports to the buffer volume; outlet ports to the demand
30 regulator/facemask; a means to purge the system and the buffer volume of previous gas mixtures prior to each new use. This system requires external connections to pressurised CO₂ and O₂, a buffer volume and the demand regulator/facemask to operate.

The invention also includes a portable apparatus and method of delivering the improved therapy, for emergency personnel and first aid care givers at the emergency site, in
35 the second embodiment, which includes: pressure regulation of supplied O₂; CO₂ supply

cylinder; pressure regulation of supplied CO₂; CO₂ and O₂ gas shut-off valves; therapy selector switch; automatic shut-off valve for CO₂ supply to avoid asphyxiating the patient; separate CO₂ and O₂ metering valves; a common gas mixing chamber; a buffer volume; a demand regulator, hose and facemask; a means to purge the system and the buffer volume of
 5 previous gas mixtures prior to each new use. This embodiment only requires connection to an outside, readily available source of pressurised O₂ to operate. The invention also includes alternate methods of providing a suitable gas metering orifice. The invention also includes a member to filter either or both of the therapeutic gases prior to metering.

The invention also relates to a gas metering and mixing apparatus for gases under
 10 pressure, particularly for respirators and medical devices, comprising a plurality of gas meters, a gas mixer device, a plurality of compressed gas supply lines connected to said gas meters, a plurality of mixed gas delivery lines extending out of said gas mixer device for the discharge of a mixture of gases from said compressed gas supply lines from said gas meters and from said gas mixer device to a demand regulator, hose and facemask and to a buffer
 15 storage volume, and a means of selecting which gases, O₂, mixture or none, are sourced to said metering and mixing device and at least an automatic shut-off valve for one of the therapeutic gases, CO₂, which could in excess cause patient asphyxiation without said shut-off valve performing its function and with a means of purging the system including the buffer volume of mixed gases (or O₂ as appropriate). The automatic shut-off valve preferably
 20 includes means of adjusting said valve to vary the pressure in which it opens. The invention also includes a gas metering and mixing apparatus, wherein said metering can be adjusted to vary the proportions of the two different therapeutic gases. The apparatus preferably includes the use of sonic nozzles to meter said therapeutic gases. The invention also includes alternate devices for metering said therapeutic gases. The gas metering and mixing apparatus includes
 25 the ability to add filtration to the system as a means of protecting the sonic nozzles. The invention also includes a gas metering and mixing apparatus which includes the ability to add filtration to the system to protect the alternate metering means.

The invention includes an apparatus for treating carbon monoxide poisoning in a subject by administering to the subject oxygen from a source of oxygen and carbon dioxide
 30 from a source of carbon dioxide, comprising:

- an oxygen conduit defining an oxygen inlet and an oxygen outlet, the oxygen inlet adapted for fluid communication with the source of oxygen;
- a carbon dioxide conduit defining a carbon dioxide inlet and a carbon dioxide outlet, the carbon dioxide inlet adapted for fluid communication with the source of carbon dioxide;

- a means for combining the oxygen and the carbon dioxide, the means downstream from the oxygen outlet and the carbon dioxide outlet; and
- a means for administering the combined oxygen and carbon dioxide to the subject.

In a variation, apparatus comprises a gas control means associated with the apparatus
5 for controlling the pressure, flow rate and the ratio of the combined oxygen and carbon dioxide. The gas control means optionally comprises an oxygen regulator for controlling oxygen pressure and a carbon dioxide regulator for controlling carbon dioxide pressure, the oxygen regulator located between the oxygen source and the combining means and the carbon dioxide regulator located between the carbon dioxide source and the combining means. The
10 regulators also control nominal flow rate of the oxygen and carbon dioxide.

In a variation, the control means further comprises an oxygen sonic nozzle downstream of the oxygen regulator and a carbon dioxide sonic nozzle downstream of the carbon dioxide regulator, the nozzles dispensing the oxygen and the carbon dioxide. The nozzles dispense the oxygen and the carbon dioxide according to a predetermined flow rate.
15 The apparatus preferably also comprises a means for reducing the flow of carbon dioxide when the percentage of carbon dioxide in the combined carbon dioxide and oxygen exceeds about 6.5% by volume. In another embodiment, the reducing means prevents the flow of carbon dioxide.

The invention also includes a variation where the means for reducing the flow of
20 carbon dioxide comprises a differential pressure sensor downstream of the carbon dioxide source and/or the oxygen source.

Another variation involves the reducing means being located proximate to the conduits and in fluid communication with the oxygen and the carbon dioxide sources.

In another variation, the reducing means of the apparatus comprises: a shutoff
25 member located proximate to the carbon dioxide conduit having an on position in which the shutoff member permits the carbon dioxide to communicate from the carbon dioxide source to the combining means and an off position in which the shutoff member prevents the carbon dioxide from communicating from the carbon dioxide source to the combining means; an actuating means for actuating the shutoff member from the on position to the off position
30 when the percentage of carbon dioxide in the combined carbon dioxide and oxygen exceeds about 6.5% by volume, the actuating means operably connected to the shutoff member and responsive to differential pressure in the oxygen conduit and the carbon dioxide conduit. Optionally, the actuating means comprises:

- a piston means in fluid communication with the oxygen conduit, the piston means located proximate to the oxygen conduit and including a first position in which the piston means is biased away from the oxygen conduit and actuates the shutoff member to the on position and a second position in which it is biased towards the oxygen conduit and
5 actuates the shutoff member to the off position;

- a biasing means for urging the piston toward the second position;

the piston means normally biased by oxygen toward the first position against the force of the biasing means, the piston means being urged toward the second position by the biasing means when oxygen pressure decreases in the oxygen conduit.

10 According to another aspect of the invention, the combining means comprises a mixing chamber.

In another variation, the administering means of the apparatus comprises a face-mask including a conduit in fluid communication with the combining means, the face-mask adapted for placement over the face of the subject. The face-mask optionally comprises a pressure
15 regulator.

The invention also includes the variation where the apparatus further comprises a buffer in fluid communication with the combining means, the buffer including combined oxygen and carbon dioxide.

In another variation, the administering means is capable of administering the
20 combined oxygen and carbon dioxide to the subject in an amount effective to increase the breathing rate of the subject. The carbon dioxide is about 3.5 to 6.5 percent by volume of the combined oxygen and carbon dioxide.

According to another aspect of the invention, the combined carbon dioxide and oxygen are in a ratio of about 19:1 by volume.

25 In a variation, the combined carbon dioxide and oxygen have a pressure of about 1 atm to 20 psig.

The invention also includes the variation where the oxygen conduit and the carbon dioxide conduits are connected to a tubular housing and extend into the housing.

In another variation, the conduits of the apparatus are defined by the housing, and are
30 integrally defined by the housing.

In a variation the apparatus is portable. Portable means that the apparatus can fit inside an emergency vehicle and is practical for use in an emergency situation (for example, it can preferably be carried by a person). It further comprises optionally a carbon dioxide tank

capable of connection to the carbon dioxide conduit. The apparatus is preferably capable of fitting in a briefcase. The subject is a mammal, preferably a human. The apparatus is preferably operable without electric power. It is optionally pneumatically powered.

5 The invention may also include a selector means or device to control the flow of carbon dioxide and oxygen. In one embodiment, the selector means may include a rotary selector 40. The invention may also include a purging means or device, such as the valve 140 and port 160 for purging carbon dioxide and oxygen.

Another embodiment of the invention relates to a portable kit for treating carbon monoxide poisoning, comprising the apparatus of the invention.

10 This invention also includes a method of treating carbon monoxide poisoning, comprising administering to a subject an effective amount of combined oxygen and carbon dioxide from the apparatus disclosed. The invention also includes the use of an apparatus of the invention for treatment of carbon monoxide poisoning.

The invention includes an apparatus for treating carbon monoxide poisoning in a
15 subject by administering to the subject oxygen from a source of oxygen and carbon dioxide from a source of carbon dioxide, comprising:

- an oxygen conduit defining an oxygen inlet and an oxygen outlet, the oxygen inlet adapted for fluid communication with the source of oxygen;
- a carbon dioxide conduit defining a carbon dioxide inlet and a carbon dioxide outlet, the
20 carbon dioxide inlet adapted for fluid communication with the source of carbon dioxide;
- a device for combining the oxygen and the carbon dioxide, the device downstream from the oxygen outlet and the carbon dioxide outlet; and
- a device for administering the combined oxygen and carbon dioxide to the subject.

The apparatus optionally further comprises a gas control device associated with the
25 apparatus for controlling the pressure, flow rate and the ratio of the combined oxygen and carbon dioxide.

The control device optionally further comprises an oxygen sonic nozzle downstream of the oxygen regulator and a carbon dioxide sonic nozzle downstream of the carbon dioxide regulator, the nozzles dispensing the oxygen and the carbon dioxide. The apparatus
30 optionally further comprises a device for reducing the flow of carbon dioxide when the percentage of carbon dioxide in the combined carbon dioxide and oxygen exceeds about 6.5% by volume. The reducing device may comprise:

- a shutoff member located proximate to the carbon dioxide conduit having an on position in which the shutoff member permits the carbon dioxide to communicate from the carbon dioxide source to the combining device and an off position in which the shutoff member prevents the carbon dioxide from communicating from the carbon dioxide source to the combining device;
- an actuating device for actuating the shutoff member from the on position to the off position when the percentage of carbon dioxide in the combined carbon dioxide and oxygen exceeds about 6.5% by volume, the actuating device operably connected to the shutoff member and responsive to differential pressure in the oxygen conduit and the carbon dioxide conduit . The actuating device optionally comprises:
 - a piston device in fluid communication with the oxygen conduit, the piston device located proximate to the oxygen conduit and including a first position in which the piston device is biased away from the oxygen conduit and actuates the shutoff member to the on position and a second position in which it is biased towards the oxygen conduit and actuates the shutoff member to the off position;
 - a biasing device for urging the piston toward the second position;

the piston device normally biased by oxygen toward the first position against the force of the biasing device, the piston device being urged toward the second position by the biasing device when oxygen pressure decreases in the oxygen conduit. The device described above may include various means, as described below.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the invention will be described by way of example and with reference to the drawings in which:

FIG. 1 is a general cross-sectional view of the first embodiment of the present invention;

FIG. 2 is a detailed cross-sectional view of the first embodiment of the present invention;

FIG. 3 is a cross-sectional view of an alternative orifice arrangement;

FIG. 4 is a cross-sectional view of a filtering assembly;

FIG. 5 is a general schematic diagram of the second embodiment of the present invention; and

FIG. 6 is a detailed schematic diagram of the second embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The invention comprises a pneumatic control assembly for metering and mixing O₂ and CO₂ in prescribed proportions. The system would preferably operate sonically, with

sonic nozzle orifice sizes and pressures adjusted so that the gases are delivered in a 95% to 5% ratio by volume (see Marks Standard Handbook for Mechanical Engineers 9th Edition 1987; John B. Heywood, Internal Combustion Engine Fundamentals, McGraw Hill 1988). However, other ratios could readily be used: typically a useful range for carbon monoxide is

5 from about 3.5 to 6.5 percent of the combined volume. The control system can be manually selected to deliver pure oxygen, the O₂ - CO₂ mixture, or in two "pause" positions, no gases. A manual valve would preferably allow system purging by venting all contained gases to atmosphere. When operating, the system preferably monitors the O₂ and CO₂ input pressures. Should the two pressures become significantly different the system would automatically stop

10 the CO₂ flow. This feature is desirable because high concentration or pure CO₂ delivery would cause asphyxiation.

The invention relates to an apparatus for treating carbon monoxide poisoning in a subject by administering to the subject oxygen from a source of oxygen and carbon dioxide from a source of carbon dioxide, comprising:

- 15 • an oxygen conduit defining an oxygen inlet and an oxygen outlet, the oxygen inlet adapted for fluid communication with the source of oxygen;
 - a carbon dioxide conduit defining a carbon dioxide inlet and a carbon dioxide outlet, the carbon dioxide inlet adapted for fluid communication with the source of carbon dioxide;
 - 20 • a means for combining the oxygen and the carbon dioxide, the means downstream from the oxygen outlet and the carbon dioxide outlet; and
- a means for administering the combined oxygen and carbon dioxide to the subject.

The conduits may be any conduit compatible with safe medical delivery of carbon dioxide and oxygen. In one embodiment of the invention, the conduits include a connecting passage

25 21 or a flow passage 31 as shown in figure 2. The combining means may include a mixing chamber. For example, one embodiment of the invention includes a mixing chamber 110 as shown in figure 2. The invention also includes a means for administering the combined oxygen and carbon dioxide to the subject. The administering means may comprise a face-mask including a conduit in fluid communication with the combining means, the face-mask

30 adapted for placement over the face of the subject.

The apparatus preferably also includes a gas control means associated with the apparatus for controlling the pressure, flow rate and the ratio of the combined oxygen and carbon dioxide. The gas control means optionally includes a combination regulators (for

example a regulator may be proximate to the oxygen or carbon dioxide source or the face mask) and sonic nozzles.

The apparatus optionally also includes a means for reducing the flow of carbon dioxide when the percentage of carbon dioxide in the combined carbon dioxide and oxygen exceeds about 6.5% by volume. In one variation, this means includes a carbon dioxide shut-off valve 70. The reducing means optionally includes a shutoff member including on and off positions and an actuating means for actuating the shutoff member from the on position to the off position when the percentage of carbon dioxide in the combined carbon dioxide and oxygen exceeds about 6.5% by volume. The actuating means may include a sensor 80 shown in figure 2 having a piston means such as the body 81 and a biasing means such as the spring 86. Other devices for reducing or preventing carbon dioxide flow will be apparent.

According to the first embodiment, the invention preferably comprises a pneumatic control assembly for metering and mixing O₂ and CO₂ in prescribed proportions for applying the invented therapy. According to the second embodiment, the invention comprises a self-contained apparatus, except for the O₂ supply, for administering the invented CO poisoning therapy.

Referring to Figure 1, the pneumatic assembly 5 preferably consists of the following major components: body; gas selector; CO₂ valve; O₂ valve; CO₂ shut off valve; differential pressure sensor; CO₂ metering orifice; O₂ metering orifice; and purge valve. The pneumatic assembly 5 also consists of 5 ports: CO₂ inlet port; O₂ inlet port; outlet to demand regulator and facemask; outlet to buffer volume; and purged gas outlet port. It will be apparent that parts of the embodiments of the invention can be omitted or varied.

The system receives pure CO₂ and O₂ at inlet ports 20 and 30 respectively. The pressures at ports 20 and 30 may be in the operating range of approximately 3.4 bar (50 psig). The inlet pressures for each gas are pre-set and relatively constant and are supplied from gas sources and pressure regulators not shown. Since the human body does not need precisely 5% CO₂, the pressures do not have to be exact. For example, if the input pressures fluctuated from 2.8 to 3.8 bar the mass flow rate would only vary by 11.4%, which is acceptable.

A rotary selection device 40 has two cam lobes to enable O₂ or CO₂/O₂ as required. Preferably, the apparatus has four positions, with positive detent stops for each selection. The positions are: OFF; MIXTURE: O₂; and OFF. The two off positions remind the operator to purge the system prior to selecting a gas flow position. As shown, in Figures 1 and 2 both gases are selected. Accordingly both the CO₂ valve 50 and the O₂ valve 60 are forced open by the cam lobes, enabling flow of both gases. If the CO₂ and O₂ pressures are nearly equal, differential pressure sensor 80 opens the CO₂ shutoff valve 70, allowing CO₂ to flow to the

metering point. Should the CO₂ pressure significantly exceed the O₂ pressure, sensor **80** will retract and thereby shut-off valve **70** will close, and the flow of CO₂ will stop.

Metering orifices **90** and **100** meter the CO₂ and O₂ respectively in the correct proportions. Those orifices are preferably sonic. However, downstream backpressure may occasionally rise to the point where the orifices become sub-sonic. That brief condition is allowed since it represents low flow, or very shallow breathing on the patient's behalf. In this case the volumetric error of the gas mixture is quite low and the therapeutic value of the gas mixture is not appreciably diminished. The output of the two gases is combined in mixing chamber **110**. The two gases collide at an angle to facilitate mixing, as for example 90°, as they enter mixing chamber **112**, creating turbulence, and promoting mixing. The mixed gases pass on to outlet port **120**, which is connected to a conventional demand type regulator and facemask (not shown). When the patient inhales, the demand regulator withdraws the inspiratory volume from the gas-mixture port **120**. When the patient exhales, the demand regulator isolates the facemask from **120** and vents the expiratory gases to atmosphere. The system is assumed to store a quantity of the gas mixture in a buffer volume, to support large instantaneous demands. Outlet port **130** provides a connection between the buffer volume and the regulator port **120**.

After usage, depressing purge valve **140** purges the system. That is, all gases stored in the apparatus and in the buffer volume are vented to port **160**.

Figure 5 shows a second embodiment of the invention **200**, which includes the following major components: carrying case **210**; CO₂ supply **220**; CO₂ regulator **230**; O₂ regulator **240**; control system **5**; buffer volume **250**; demand regulator **260**; low pressure hose **270**; face mask **280**; purge line **290**.

Preferably, the apparatus is enclosed in a portable case **210**, to which all of the components would be mounted. This case is preferably the size of a briefcase. The apparatus includes a medium pressure storage system, for example a conventional cylinder **220** for storage of CO₂. Preferably the dimensions of the cylinder are 3" in diameter and 16" long. As the CO₂ stored pressures might in practice range between 3 and 100 bar, a metal or composite cylinder would preferably be used (such cylinders are commercially available). The stored CO₂ would be connected to a regulator **230**, which reduces pressure to a low, relatively constant pressure (preferably about 3.4 bar). At extreme pressure, accuracy is not required, and a single stage unbalanced regulator would be acceptable (numerous such devices are commercially available). The regulated CO₂ would then be sealably connected to the pneumatic control device **5** described in the first embodiment above.

An O₂ input and regulation system **240** would receive unregulated O₂ from an external source via a quick disconnect. Preferably, the O₂ pressure would range from 3.4 to 160 bar. The received O₂ is connected to a regulator (part of **240**) which reduces its pressure to a low, relatively constant pressure (typically 3.4 bar). At extreme pressure, accuracy is not required, a single stage unbalanced regulator would be acceptable (numerous such devices are commercially available). The regulated O₂ would then be sealably connected to the pneumatic control device **5** described in the first embodiment above.

Depending on the selector position, control device **5** would then deliver no gas, pure O₂, or the invented therapeutic gas-mixture to both a cylindrical buffer volume **250** and to a demand regulator **260**. The pressure in the buffer volume would normally swing between atmospheric pressure and approximately 20 psig, with its maximum pressure being the regulated pressures (approximately 3.4 bar). Accordingly, the buffer volume is preferably a low cost metal or plastic cylinder, fabricated from tubing (e.g. spherical ends are not required) preferably having dimensions of 4" in diameter and 8" long.

When the patient inhales, the demand regulator senses the sub-atmospheric pressure at its outlet port and opens its flow valve to restore a slightly positive pressure (about 1 to 1.5 kPa). Thus the inhalation event causes the demand regulator **260** to withdraw gas from the control system **5** and deliver that gas to the facemask **280**. During inhalation, the demand regulator's valve throttles the flow to match the inspiratory volume demanded. Such demand regulators are commercially available. When the patient stops inhaling, the pressure starts to rise above the 1 to 1.5 kPa set pressure and the demand regulator shuts off. A simple valve (preferably a rubber flapper or umbrella valve) in the outlet chamber **260** vents the outlet gases to atmosphere whenever an overpressure exists. Such an overpressure condition exists every time the patient exhales.

The outlet of the demand regulator **260** is connected to a conventional facemask **280** by preferably a flexible low-pressure hose **270**. The items **260**, **270**, and **280** are readily available commercial parts.

Figure 2 shows the control system **5** preferably housed in a non-sparking body **10**, such as brass to prevent inadvertent problems in the presence of the O₂ gas. Regulated CO₂ (having a preferred inlet pressure of approximately 3.4 bar) is received at any suitable inlet port **20**, such as a threaded female port. After entering port **20**, the CO₂ would pass through a connecting passage **21** and enter valve chamber **22**. If the CO₂ valve **50** is open (as shown), the CO₂ passes through the space between the valve seat **23** and the valve seal **55**. If the valve **50** is shut (not shown), gas flow is prevented by seal **55** resting on seat **23**. As shown, CO₂ flows through the annular space between throat area **24** and the actuator tip **45** and into

interconnecting passage 25. Connecting passage 25 is permanently sealed after construction by a conventional ball 11 and plug 12 system.

CO₂ then passes through 25 (and around 81a) into valve chamber 26. If the CO₂ shut-off valve 70 is closed (not shown), seal 75 sitting on valve seat 13 blocks CO₂ flow. If valve 70 is open (not shown), the CO₂ passes through the space between the valve seat 13 and the valve seal 75. CO₂ then passes through the throat area 27 and into connecting passage 28. From passage 28 the gas turns an angle to facilitate mixing (for example about 90°) as it passes into orifice chamber 29. All of the flow passages (21, 25, 28), flow annuli (23-45, 27-81a), and valve-seat clearances (23-55, 13-75) are chosen so as to be non-restrictive to flow when compared to the calibrated restriction presented by orifice insert 90.

Orifice insert 90 meters the CO₂ in accordance with the ideal gas law. The insert 90 is comprised of a body 91 with threaded section 92 for retaining the component in bore 14. An o-ring 93 (or other appropriate seal), seals the outside diameter of insert 90 to the inside diameter of cavity 29 so that all CO₂ flow must pass through the centre of orifice insert 90. The actual metering section of orifice insert 90 is comprised of a converging inlet section 95, a straight throat area 96 (which is the metering orifice) and a diverging pressure recovery section 97. Two holes 94 in the outlet face of orifice insert 90 allow the insert to be tightened by means of a special tool.

CO₂ exiting orifice insert 90 enters bore 14, then turns turns an angle such as to facilitate mixing (for example, about 90°) as it enters connecting passage 110. This angular turn creates turbulence, which helps to mix the CO₂ and O₂. Connecting passage 110 intersects mixing chamber 112, which is in direct communication with outlet port 120. Preferably port 120 is typically a female port, with threaded section 121, and is connected to a demand regulator. Gas in chamber 112 is also in communication with outlet port 130. Preferably, port 130 is typically a female port, with threaded section 131, and is connected to a buffer volume.

Regulated O₂ (having a preferred inlet pressure of approximately 3.4 bar) is received at any suitable inlet port 30, such as a threaded female port. After entering port 30, the O₂ would pass through a connecting passage 31 and enter valve chamber 32. If the O₂ valve 60 is open (as shown), the O₂ passes through the space between the valve seat 33 and the valve seal 65. If the valve 60 is shut (not shown), gas flow is prevented by seal 65 resting on seat 33. As shown, O₂ flows through the annular space between throat area 34 and the actuator tip 48 and into interconnecting passage 35.

O₂ then passes through 35 into valve chamber 16. The O₂ passes through the annular gap between chamber 16 and the “nose” 87b of adjuster 87 and on into orifice chamber 37.

Some O₂ may also flow in the annular gap between *16* and spring *86*. All of the flow passages (*31, 35, 37*), flow annuli (*16-87b, 16-86*), and valve-seat clearance (*33-65*) are chosen so as to be non-restrictive to flow when compared to the calibrated restriction presented by orifice insert *100*.

5 Orifice insert *100* meters the O₂ in accordance with the ideal gas law. The insert *100* is comprised of a body *101* with threaded section *102* for retaining the component in bore *15*. An o-ring *103* (or other appropriate seal), seals the outside diameter of insert *100* to the inside diameter of cavity *37* so that all O₂ flow must pass through the centre of orifice insert *100*. The actual metering section of orifice insert *100* is comprised of a converging inlet section
10 *105*, a straight throat area *106* (which is the metering orifice) and a diverging pressure recovery section *107*. Two holes *104* in the outlet face of orifice insert *100* allow the insert to be tightened by means of a special tool.

O₂ exits the orifice insert *100* and the mixing chamber *112*, which is in direct communication with outlet port *120*. During periods where the mass flow is entering the
15 buffer volume, the O₂ gas stream continues straight through *112*, and collides with the CO₂ gas stream at right angles, thus promoting mixing. The mixed gases then pass from *112* into port *130* for delivery to the buffer volume. During periods where the mass flow is passing to the demand regulator, the O₂ turns 90° in order to pass from mixing chamber *112* into outlet port *120*. The turbulence from turning 90° and from the O₂ and CO₂ impinging one another at
20 90° promotes mixing. From *112*, the mixed gas (or O₂ only if this operation is selected) enter port and is connected to a demand regulator.

The flow diameters seen by the metered and mixed gases (*14, 15, 110, 112*) are preferably sized so as to minimize pressure drop at high instantaneous flow rates. The nominal maximum inspiratory flow rate is assumed to 60 standard litres per minute.

25 Preferably, a rotary selector *40* is used to actuate CO₂ and O₂ valves *50* and *60*. Selector *40* has two cam lobes, *42* and *43*, which select CO₂ and O₂ respectively. The lobes are presumed to provide four positions: OFF; MIXTURE; O₂; and OFF. This arrangement always allows the user to select the other therapeutic gas stream (than that currently used) or OFF with one click of the selector. Additionally to move from one therapeutic gas stream to
30 another requires two clicks of the selector as a reminder to the operator to purge the system prior to selecting the second therapeutic gas stream. Accordingly, the selector preferably includes a conventional ball-spring-detent system (not shown) so that the selector stops at each position. If the cam lobes are on a single plane (as shown), the selector would rotate through no more than 180°. If continuous 360° rotation were desired, the two cams would be
35 placed on separate planes.

As shown in Figure 2, cam lobe **42** has engaged CO₂ actuator **44** and moved it to its maximum open position. The actuator tip **45** engages a recess **56** in piston **54**, lifting **54** off of valve seat **23**. The end of tip **45** would typically be hemispherical and recess **56** would typically be conical or hemispherical so that the two parts would move freely and smoothly.

5 Actuator **44** slides in bore **17** preferably machined into body **19**, and is sealed to that bore by o-ring **46** (or other appropriate seal). The height of the cam lobe **42**, from the base circle of **41** would typically be such a fraction of sealing diameter of seat **23** such as to ensure that the valve seal **55** does not impact the flow rate when piston **54** is in its open position, for example about 40%. Piston **54** rides in a companion bore in body **51**, with suitable radial clearance.

10 Spring **57** acts to move piston **54** to its closed position when cam lobe **42** is not selecting CO₂. In that case, the force from spring **57** must overcome the friction from o-ring **46** and provide the force needed to create an effective seal between **55** and **23**. As shown, adjuster **58**, sealed by o-ring **58a** to body **51**, is available to set the pre-load from spring **57**. A special tool engaging the two holes **59** in its face turns adjuster **58**. The valve body **51** is retained in body

15 **10** by thread **52**, and sealed from external leakage by o-ring **53**. A special tool engaging the two holes **51a** in its face tightens the valve body **51**.

As shown in Figure 2, cam lobe **43** has engaged O₂ actuator **47** and moved to its maximum open position. The actuator tip **48** engages a recess **66** in piston **64**, lifting **64** off of valve seat **33**. The end of tip **48** is preferably hemispherical and recess **66** is preferably

20 conical or hemispherical so that the two parts move freely and smoothly. Actuator **47** slides in bore **18** preferably machined into body **10**, and is sealed to that bore by o-ring **49** (or other appropriate seal). The height of the cam lobe **43**, from the base circle of **41** is preferably at least 40% of sealing diameter of seat **33**. That value ensures that the valve seal **65** does not impact the flow rate when piston **64** is in its open position. Piston **64** rides in a companion

25 bore in body **61**, with suitable radial clearance. Spring **67** acts to move piston **64** to its closed position when cam lobe **43** is not selecting O₂. In that case, the force from spring **67** must overcome the friction from o-ring **49** and provide the force needed to create an effective seal between **65** and **33**. As shown, adjuster **68**, sealed by o-ring **68a** (or other appropriate seal) to body **61**, is available to set the pre-load from spring **67**. A special tool engaging the two holes

30 **69** in its face turns adjuster **68**. The valve body **61** is retained in body **10** by thread **62**, and sealed from external leakage by o-ring **63**(or other appropriate seal). A special tool engaging the two holes **61a** in its face tightens the valve body **61**.

Referring to Figure 2, sensor **80** is comprised of body **81** which slides in bore **19** machined into body **10**, and is sealed to that bore by o-ring **83** (or other appropriate seal). The

35 outer diameter of body **81** is reduced in area **81a** so as to minimize the flow restriction in connecting passage **25**. Sensor tip **82** operates against lever **79**, which moves through an arc

to raise piston 74 off of valve seat 13. Specifically, the right end of lever 79 rests against the bottom ledge of groove 79a, which is in body 10, and acts as a pivot point for 79. Lever 79 passes through slot 78 in piston 74, with the 78-74 contact point serving to raise or lower 74. The end of tip 82 is preferably hemispherical so that lever 79 will move freely and smoothly.

5 When the pressures in chambers 16 and 27 (O₂ and CO₂) are roughly equal, spring 86 acts to move sensor 81 to its fully open position, moving piston 74 off of seat 13, and enabling CO₂ to flow. Adjusting the pre-load on spring 86 by turning adjuster 87 largely sets the CO₂-O₂ differential pressure required to close sensor 80. Adjuster 87 slides in bore 16 and is sealed to that bore by o-ring 88 (or other appropriate seal). A special tool engaging the two holes 89 in
10 its face preferably tightens the adjuster 87. Its position is retained by thread 87a. The fully open position of sensor 80 is controlled by lip 84 on body 81 engaging a seat 85 machined in the end of bore 16.

The fully open position of sensor 81 preferably provides a gap (13-75) such as to ensure that the valve seal does not impact the flow rate when piston 74 is in its open position,
15 as for example, at least 40% of the sealing diameter of seat 13. Piston 74 rides in a companion bore in body 71, with suitable radial clearance. Spring 77 acts to move piston 74 to its closed position when sensor 81 retracts to disable CO₂ flow.

The mixed gas in chamber 112 is communicated to the input of purge valve 140 by passage 111. Valve 140 includes a plunger 153 attached to seat 151 by thread 152. Seat 151
20 is normally closed against the protruding seal profile 150 of elastomeric seal 149 (or other suitable sealing material), preventing the flow of gases into the purge port 161. This normally closed state is maintained by spring 155 acting against purge body 141 and pushbutton 156, to maintain a closing force on the 150-151 seal interface. Plunger 153 slides in bore 147 of body 141 and is sealed to that bore by o-ring 154 (or other suitable sealing means). Body 141 is
25 retained in body 10 by thread 142 and sealed from external leakage by o-ring 143 (or other suitable sealing means). Body 141 is preferably tightened by a special tool, which engages the two holes 144 on the rear face of 141. When pushbutton 156 is depressed, seat 151 moves away from seal 150 admitting purge gas into the annular space between throat 157 and plunger pin 158. The purge gas then passes into the annular space between bore 147 and pin
30 158. The outside diameter of body 141 has an annular relief 145, which is intersected by four through holes 146. The 145-146 system allows purge gas in the 147-158 cavity to pass first into connecting chamber 159 and then into the purge port 160. Port 160 is typically a female port with thread 161.

As shown in Figure 6, a briefcase-sized system 200 would include all of the items
35 needed to provide the therapeutic gas mixture, except for O₂ storage. As ambulances,

emergency vehicles, fire trucks and hospitals, or other health institutions, already have O₂ storage available, there is no benefit to including the O₂ storage system in such a device.

The apparatus preferably includes a suitcase type of enclosure **210**, which would house and mount all of the equipment. The largest item is most likely the CO₂ storage system **220**. System **220** preferably includes a CO₂ source **221**, capable of operating at least 100 bar. The outlet of **221** accommodates a cylinder valve **222**, with a manual shut-off valve **223** for switching CO₂ sources, an outlet port **224**, and a quick connect **225**. Quick connect **225** would be permanently attached to a line **226**, which delivers the unregulated CO₂ to the pressure regulator **230**. Preferably, a full CO₂ cylinder would preferably contain enough CO₂ to handle two therapy events of 30 minutes each, at 60 litres per minute inspiratory flow at 5% CO₂ by volume. The CO₂ cylinders **221** would be replaced routinely (and after each use) and re-filled as an unrelated activity.

The CO₂ regulator **230** includes an inlet **232**, a main regulator section **231**, and an outlet **233**. The regulating section **231** preferably comprises a single stage, non-balanced conventional pressure regulator. The output of the regulator would be permanently connected to the inlet port **20** of control device **5** (previously described).

The O₂ is preferably sourced externally. The O₂ circuit **240** includes a portal **241** in the suitcase **210** through which a quick-connect **242** passes. Quick connect **242** is connected to line **243** which routes the input O₂ to pressure regulator **244**. The O₂ regulator **244** includes an inlet **245** and an outlet **246**. The regulating section **244** preferably comprises a single stage, non-balanced pressure regulator. Commercial devices are readily available. The output of the regulator is permanently connected to the inlet port **30** of control device **5** (previously described).

Control device **5** includes a selector **40**, to choose O₂, Mixture, or no gases. A button **153** would be used to purge the system after use, with purge gases being vented to port **160**. Purged gases would be plumbed through line **291** to a terminal vent fitting (or quick connect) **292**, passing through a portal **293** in the carrying case.

The gas output of control device **5** would appear at ports **120** and **130**. Port **130** would be permanently connected to a buffer volume **250**. As buffer **250** typically sees only **20** psig, it would preferably be of inexpensive construction, such as from thin wall metal pipe with simple end caps. Preferably, the dimensions of the buffer volume are 4" diameter by 8" in length.

Port **120** is connected to a demand-type regulator **260** (previously described). At a minimum, regulator **260** would include an inlet **261**, a main regulator section **262**, an over

pressure relief valve 263, and an outlet 264. Regulator 260 is connected to a conventional facemask 280 by a conventional flexible hose 270.

For example, Figure 3 shows an alternative orifice arrangement. Certain combinations of design criteria (buffer volume, CO₂ and O₂ pressure, and maximum and minimum respiratory rates) can require very small orifice sizes. In such cases, the design format shown for orifices 90 and 100 may be impractical to machine. For example, orifice size could be as small as 0.003", which is very difficult to mechanically machine using conventional methods. Accordingly, an alternative orifice arrangement is provided, as shown in Figure 3, orifice insert 170 includes an outer body 171, machined conventionally. Body 171 has a similar o-ring sealing diameter 171, and the same o-ring (103) as inserts 90 and 100. Body 171 includes a conventional o-ring gland 173. A similar body outside diameter 174 would be used, along with the same thread 102, as seen in 90 and 100. Body 171 includes a converging inlet section 178, terminating at face 177, with a relatively large terminal outside diameter 179. A preferably thin, circular, flat orifice plate 180 would be inserted from the rear of body 171 and is seated against the face 177. The orifice plate preferably comprises metal substrate with a small through hole 181. Electron discharge machining, laser drilling, mechanical micro machining, and chemical micro-machining means can reliably produce such small holes. The hole 181 would be the actual metering orifice, and the thickness of the plate 180 would provide the desired throat depth. Plate 180 is held in body 171 by a plug 190. Plug 190 threads into 171 via thread 192, and would seal to 180 and 171 by seal 182. Plug 190 creates a chamfer type o-ring gland via surface 197 and sits against the orifice with surface 196. Where practical, plug 190 may preferably have a second throat section 195 and a diverging pressure recovery section 194. Plug 190 is preferably tightened into body 171 via a special tool engaging two holes 193 in its rear face. A commercially available thread sealant would lock plug 190 to orifice insert 170 so that it would function as an integral piece and could be installed and removed from body 10 without the two pieces separating.

A filtration means is optionally provided to keep the orifices clean. In the case of very small orifices, there could be a concern about foreign particles lodging in and blocking the metering orifices. In such a case, a filter element could be included in each orifice. As shown in Figure 4, filter element 199 could be press fitted into a recess 198 in insert 170. Such filter elements are commercially available and could include a wire screen, a sintered (porous) brass or porous fabric.

It will be appreciated that the above description relates to the preferred embodiments by way of example only. Many variations on the apparatus for delivering the invention will

WO 00/64522

PC 1/CA00/00481

be obvious to those knowledgeable in the field, and such obvious variations are within the scope of the invention as described and claimed, whether or not expressly described.

What is claimed is:

1. An apparatus for treating carbon monoxide poisoning in a subject by administering to the subject oxygen from a source of oxygen and carbon dioxide from a source of carbon dioxide, comprising:

5 an oxygen conduit defining an oxygen inlet and an oxygen outlet, the oxygen inlet adapted for fluid communication with the source of oxygen;

a carbon dioxide conduit defining a carbon dioxide inlet and a carbon dioxide outlet, the carbon dioxide inlet adapted for fluid communication with the source of carbon dioxide;

10 a means for combining the oxygen and the carbon dioxide, the means of combining being disposed downstream from the oxygen outlet and the carbon dioxide outlet;

a means for administering the combined oxygen and carbon dioxide to the subject;

means for controlling the pressure, flow rate and the ratio of the combined oxygen and carbon dioxide, comprising

15 an oxygen regulator for controlling oxygen pressure located between the oxygen source and the means for combining the oxygen and the carbon dioxide, a carbon dioxide regulator for controlling carbon dioxide pressure located between the carbon dioxide source and the means for combining the oxygen and the carbon dioxide,

an oxygen sonic nozzle downstream of the oxygen regulator for dispensing the oxygen, and

20 a carbon dioxide sonic nozzle downstream of the carbon dioxide regulator dispensing the carbon dioxide.

2. The apparatus of claim 1, wherein the nozzles dispense the oxygen and the carbon dioxide according to a predetermined flow rate.

25 3. The apparatus of claim 1, further comprising a means for reducing the flow of carbon dioxide when the percentage of carbon dioxide in the combined carbon dioxide and oxygen exceeds about 6.5% by volume.

4. The apparatus of claim 3, wherein the reducing means prevents the flow of carbon dioxide.

30 5. The apparatus of claim 3, wherein the means for reducing the flow of carbon dioxide comprises a differential pressure sensor downstream of at least one of the carbon dioxide source and the oxygen source.

Black-lined claims

2633 0011

6. The apparatus of claim 3, wherein the reducing means is located proximate to the conduits and is in fluid communication with the oxygen and the carbon dioxide sources.
7. The apparatus of claim 3, wherein the reducing means comprises:
 - a shutoff member located proximate to the carbon dioxide conduit having an on position in which the shutoff member permits the carbon dioxide to communicate from the carbon dioxide source to the combining means and an off position in which the shutoff member prevents the carbon dioxide from communicating from the carbon dioxide source to the combining means;
 - an actuating means for actuating the shutoff member from the on position to the off position when the percentage of carbon dioxide in the combined carbon dioxide and oxygen exceeds about 6.5% by volume, the actuating means operably connected to the shutoff member and responsive to differential pressure in the oxygen conduit and the carbon dioxide conduit .
8. The apparatus of claim 7, wherein the actuating means comprises:
 - a piston means in fluid communication with the oxygen conduit, the piston means located proximate to the oxygen conduit and including a first position in which the piston means is biased away from the oxygen conduit and actuates the shutoff member to the on position and a second position in which it is biased towards the oxygen conduit and actuates the shutoff member to the off position;
 - a biasing means for urging the piston toward the second position;
 - the piston means normally biased by oxygen toward the first position against the force of the biasing means, the piston means being urged toward the second position by the biasing means when oxygen pressure decreases in the oxygen conduit.
9. The apparatus of claim 1, wherein the combining means comprises a mixing chamber.
10. The apparatus of claim 1, wherein the administering means comprises a face-mask including a conduit in fluid communication with the combining means, the face-mask adapted for placement over the face of the subject.
11. The apparatus of claim 10, wherein the face-mask further comprises a pressure regulator.
12. The apparatus of claim 1, wherein the apparatus further comprises a buffer in fluid communication with the combining means, the buffer including combined oxygen and carbon dioxide.

13. The apparatus of claim 1, wherein the administering means is capable of administering the combined oxygen and carbon dioxide to the subject in an amount effective to increase the breathing rate of the subject.
14. The apparatus of claim 13, wherein the carbon dioxide is about: 3.5 to 6.5 percent by
5 volume of the combined oxygen and carbon dioxide.
15. The apparatus of claim 13, wherein the combined carbon dioxide and oxygen are in a ratio of about 19:1 by volume.
16. The apparatus of claims 13, wherein the combined carbon dioxide and oxygen have a pressure of about 1 atm to 20 psig.
- 10 17. The apparatus of claim 1, wherein the oxygen conduit and the carbon dioxide conduits are connected to a tubular housing and extend into the housing.
18. The apparatus of claim 17, wherein the conduits are defined by the housing.
19. The apparatus of claim 17, wherein the conduits are integrally defined by the housing.
20. The apparatus of claim 19, configured so that the apparatus is portable.
- 15 21. The apparatus of claim 20, further comprising a carbon dioxide tank capable of connection to the carbon dioxide conduit.
22. The apparatus of claim 21, capable of fitting in a briefcase.
23. The apparatus of claim 22, wherein the subject comprises a human.
24. The apparatus of claim 23, wherein the apparatus is mechanically operable.
- 20 25. A portable kit for treating carbon monoxide poisoning, comprising the apparatus of claim 1.
26. Use of the apparatus of claim 1 for the treatment of carbon monoxide poisoning, wherein an effective amount of combined oxygen and carbon dioxide from the apparatus is administered to a subject.

Figure 1

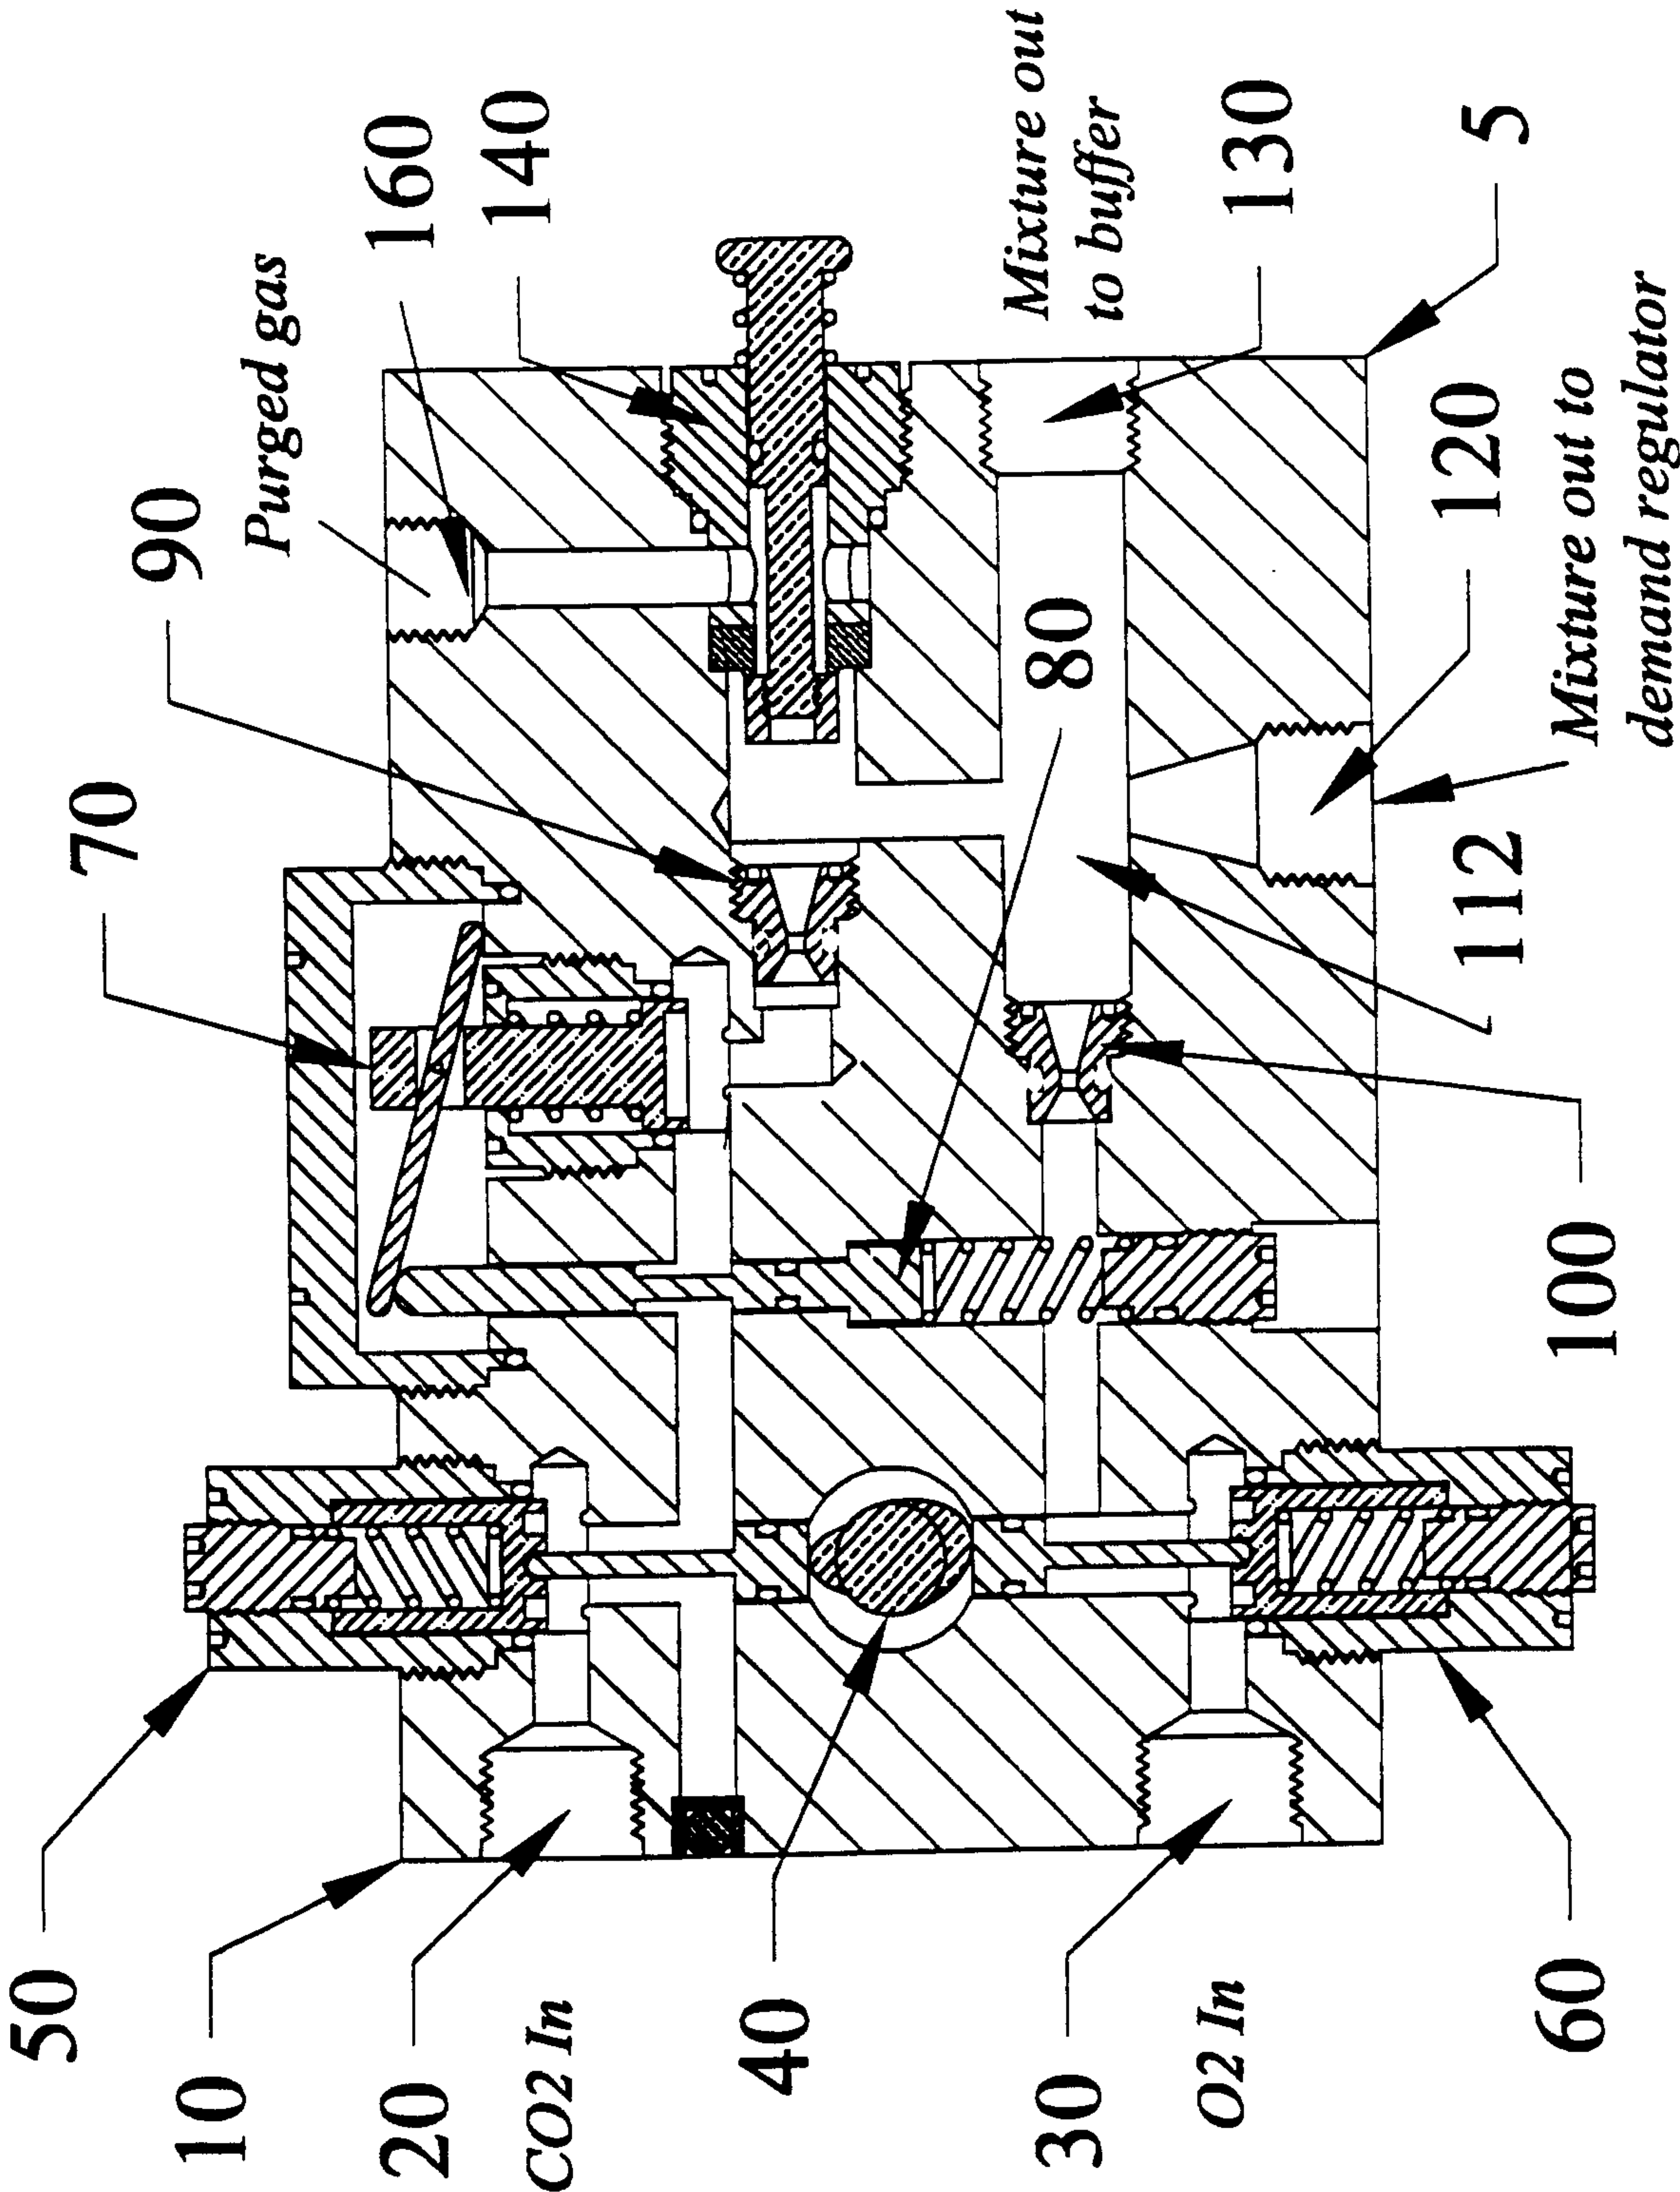


Figure 2

