



- (51) **International Patent Classification:**
E21B 33/128 (2006.01) *E21B 33/127* (2006.01)
- (21) **International Application Number:**
PCT/US2012/027700
- (22) **International Filing Date:**
5 March 2012 (05.03.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/044,072 9 March 2011 (09.03.2011) US
- (71) **Applicant (for all designated States except US):** **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77210-4740 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **XU, Richard, Y.** [US/US]; 11711 Rivergroove Ct., Tomball, TX 77377 (US). **ADAM, Mark, K.** [US/US]; 1036 Al Gregg, Houston, TX 77009 (US).
- (74) **Agent:** **PORTER, Andre, J.**; Baker Hughes Incorporated, P.O. Box 4740, Houston, TX 77210-4740 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) **Title:** EXPANDABLE ISOLATION PACKER

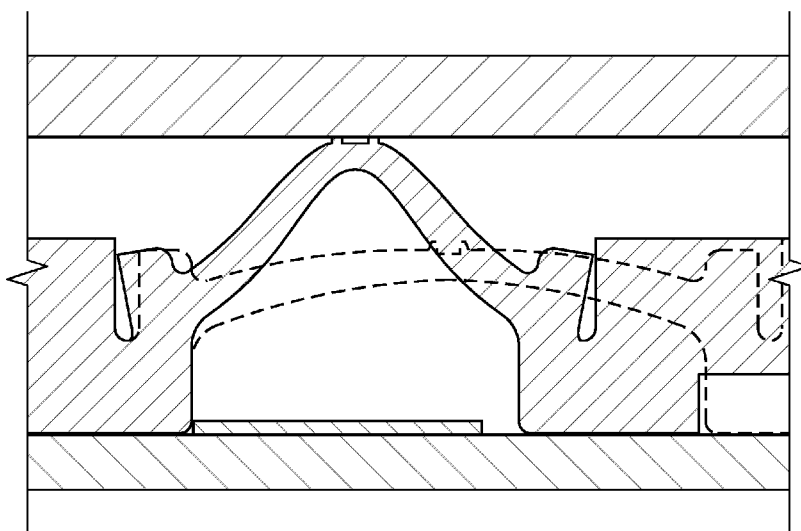


FIG. 4

(57) **Abstract:** An expandable packer features a sealing element in an exterior recess that is straddled by projections or bumps. Upon expansion the bumps move out against the borehole wall as an anchor support. Optionally, the bumps may be covered with a sealing material and may be constructed to assist in their radial movement to the borehole wall as a result of expansion particularly if the mandrel is expanded in compression. The bumps are not necessarily expanded with the swage and their radial growth can be induced from longitudinal shrinkage resulting from radial expansion.





-
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- Published:**
- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

EXPANDABLE ISOLATION PACKER

FIELD OF THE INVENTION

[0001] The field of the invention is packers that are set by expansion of the mandrel and more particularly with a recess feature for the element to give it protection for run in with the adjacent bumps also acting as grip locations.

BACKGROUND OF THE INVENTION

[0002] Packers are isolation devices that are mounted to a tubular mandrel. Some are set with compression of a sealing element external to the mandrel to reduce the length of the sealing element and increase its radial dimension. Other designs expand the mandrel from within to bring the sealing element to the borehole wall. Some designs employ swelling elements to bridge the gap to the borehole wall after exposure to well fluids over a period of time.

[0003] One recurring issue with packers is that they must be run into the well through a tubular with a drift dimension not much larger than the packer run in dimension and then the packer may have to be set in a much larger borehole. Packers with expandable mandrels have typically put the sealing element on the outside diameter of the mandrel leaving the sealing element exposed to damage during running in. US Publication 2010/0314130 puts the sealing elements on the mandrel outer diameter and uses a system of internal rings through which the swage has to pass to expand only at the seal locations with a resulting uniform internal diameter after expansion since the size of the swage is no larger than the drift diameter of the tubular being expanded.

[0004] Other designs place gripping members adjacent a sealing element and expand the mandrel from its interior. In this design the assembly is placed on the mandrel outer diameter which limits the initial internal dimension of the mandrel for run in which makes it more difficult to expand to a sealing condition in a larger wellbore. Such a design is illustrated in USP 7,117,949.

[0005] Other designs that are focused on using lighter wall pipe and giving it strength to resist collapse with a series of closely spaced corrugations make the claim that a sealing material can be deployed in the corrugations and a roller expander can be used to enlarge the corrugated segment with the sealing

material for use as an isolation device. It claims protection for the sealing material during run in via the corrugations. The reality is that if the corrugations act as protection for a sealing material in a helical or circumferential groove then to try to get a seal with expansion will require elimination of the groove to even get the seal against the borehole wall. If that happens then the seal material will comprise of thin unsupported strips as the corrugations will be eliminated to even get sealing contact. The unsupported strips will roll on themselves and will not provide a reasonable annular seal. On the other hand if the corrugations are buried for run in then the sealing element is not protected for run in by the corrugations. Also a factor is that since the corrugations enable the use of thinner wall tubulars the expansion to the point of returning to parallel wall structure by flattening out all the corrugations will present a weaker mandrel that will have a fairly low differential pressure rating and may be too weak to retain the sealing element against the borehole wall in a sealing relationship. Such a design is illustrated in USP 7,350,584.

[0006] What is needed and provided by the present invention is an expandable packer that can have the element protected for run in while still be configured to sealingly be expanded to the surrounding wellbore. These features are addressed by projections on opposed ends of long recesses that hold the sealing element. The projections can extend radially upon expansion to act as anchors or extrusion barriers. A swelling material can optionally be used. Those skilled in the art will better understand the invention from a review of the description of the preferred embodiment and the associated drawings while recognizing that the full scope of the invention is to be determined from the appended claims.

SUMMARY OF THE INVENTION

[0007] An expandable packer features a sealing element in an exterior recess that is straddled by projections or bumps. Upon expansion the bumps move out against the borehole wall as an anchor support. Optionally, the bumps may be covered with a sealing material and may be constructed to assist in their radial movement to the borehole wall as a result of expansion

particularly if the mandrel is expanded in compression. The bumps are not necessarily expanded with the swage and their radial growth can be induced from longitudinal shrinkage resulting from radial expansion. Shrinkage from expansion occurs from axial loading in compression from the swage to be advanced and it also occurs as a consequence of radial expansion resulting from advancing of the swage.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 is a prior art arrangement of elements on a mandrel to be expanded;

[0009] FIG. 2 is a section view of one embodiment with external recesses for the sealing elements and bumps between the elements that are uncovered with a seal material;

[0010] FIG. 3 is a variation of the FIG. 2 design with a sealing material mounted over the bumps that straddle the recess location where the sealing elements are disposed;

[0011] FIG. 3a is a variation of the FIG. 3 design where the bumps are configured for radial movement resulting from longitudinal shrinkage from radial mandrel expansion;

[0012] FIG. 4 is a two segment bump in the extended position from axial compression of the mandrel that shrinks its length as well as shrinkage from radial expansion.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0013] FIG. 1 illustrates multiple elements **10** on a mandrel **12** that is to be expanded. The mandrel **12** has a constant outer dimension and the elements **10** are exposed to damage for run in. The thickness of the seals **10** is limited by the drift dimension of the previously installed or existing tubular and the outside diameter of the mandrel.

[0014] FIG. 2 has a mandrel **14** that has threaded connections **16** that are located preferably under seals **18**. While three are shown one or more seals **18** can be used. A series of humps **20** straddle at least some seals **18** and may bracket each seal **18**. The humps **20** can be formed of multiple segments **22**, **24** and **26** with segments **22** and **26** tapered with respect to a longitudinal axis

of mandrel **14** while segment **24** is substantially parallel to the longitudinal axis of mandrel **14**. Segments **22** on one side of a seal **18** and **26** on the other side of a seal **18** define a valley **28** which allows a greater thickness for the seal **18** while maintaining segment **24** as the largest dimension. Segment **24** preferable extends radially further than the outer surface **30** of the seal **18** but they can also extend co-extensively. Optionally, surface **24** can be eliminated in favor of two sloping surfaces **22** and **26** that join together to make a V shape and come to a point. The point can optionally penetrate the surrounding borehole wall for an anchoring grip. In either case it is preferred that the apex of tapers **22** and **26** or the radial position of a parallel to the axis surface **24** be the furthest extending location for protection of the seals **18** during run in.

[0015] The swage **32** has an outer dimension **34** that in the preferred embodiment is no larger than internal diameter **36** of the bumps **20**, with an exception as pointed out below. In this manner as expansion occurs, with the mandrel **14** preferably in compression but can also occur with the mandrel **14** in tension, the valleys **28** disappear. The expansion in the radial direction reduces the axial length of the mandrel **14** so that the bumps are pushed radially outwardly against the borehole wall as shown in FIG. 4. Optionally the bumps **20** can have an external surface treatment such as a surface roughness or hard particles that will dig into the surrounding borehole wall to act as an anchor.

[0016] Another option to the preferred embodiment is to size the swage outer dimension **34** to be larger than internal diameter **36** so that as a result of expansion the bumps **20** are radially expanded beyond their run in drift outer dimension.

[0017] Another option for the bumps **20** is shown in FIG. 3 where the sealing element **18'** is continuous and runs right over the bumps **20'**. In this version the sealing material can sustain so wear in the region of the humps **20'** and on expansion of the mandrel **14'** that shrinks the mandrel **14'** longitudinally, the result of outward movement of the bumps **20'** is to extend a seal in that location with an added anchoring benefit that is less dramatic than the FIG. 2 embodiment.

[0018] FIG. 3a shows mandrel **14''** covered with sealing element **18''** with hump **20''** preferably extending radially about as far as the outer surface **36** of mandrel **14''**. The hump **20''** is preferably a continuous arcuate surface **38** that defines opposed valleys **40** and **42** on opposed sides of peak surface **44**. In this embodiment the expansion that causes longitudinal shrinkage induces collapse of mandrel **14''** at valleys **40** and **42** that drives surface **44** into the seal **18''** to enhance the sealing against the borehole wall.

[0019] Those skilled in the art will appreciate that in the FIG. 2 embodiment the valleys **28** defined by the humps **20** allow for a thicker element **18** that is protected for run in by the humps **20**. The expansion with swage **32** does not have to expand the peak of the humps as for example segment **24**. The connections **16** being under seals **18** can even leak slightly from expansion but the presence of the seal **18** can close off that leak path. Optionally the seal elements can swell. All the seal elements need not be identical and some can swell while others do not. In some applications where damage during run in is a big concern, the seals **18** can extend radially further than the bumps **20**. The bumps **20** extend radially as a result of longitudinal shrinkage from expansion with the swage **32** and the shape of the bumps can be as shown in FIG. 2 or varied to take out segment **24** so they are more pointed. The outer dimension of the bumps **20** can create an anchor for the packer and it can also bite into the surrounding tubular for a metallic seal as an option. The shape of the bumps **20** promotes their radial growth as a result of expansion. External surface roughening or hard particles can also enhance the ability of the bumps **20** to be packer anchors. Optionally, as shown in FIG. 3 the bumps **20'** can be covered with a seal material so that the sealing ability is improved as the bumps **20'** drive segments of the seal **18'** that is a single long sleeve parts of which are nested in recesses for run in between the humps **20'** against the borehole wall for an enhanced seal. The continuous nature of the long seal in FIG. 3 with the bumps that push it out further improves the performance of the assembly as compared to the FIG. 2 design with a sacrifice of some protection of the seal **18'** during run in.

[0020] In the FIG. 3a embodiment the humps **20''** are fabricated in a manner using the arc to allow them to extend as a result of longitudinal shrinkage from expansion so as to push the seal that extends over them out to the borehole wall. Optionally the humps **20''** of FIG. 3a can be exposed and used in replacement of the humps **20** in FIG. 2. The valleys **40** and **42** assist in the outward growth due to mandrel shrinkage from expansion. As a result of expansion of mandrel **14''** the bumps **20''** can extend further than the mandrel **14''**. For run in it is preferred to have the bumps **20''** extend radially as far as the outer mandrel dimension but having the bumps extend slightly more as an aid to holding the element **18''** in place is also contemplated.


[0021] The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below.

We claim:

1. An expandable packer for subterranean use to engage a borehole wall, comprising:
 - a mandrel having a passage therethrough, said passage having a first internal dimension defining at least one first zone and a second internal dimension larger than said first internal dimension to define at least one second zone;
 - at least one seal mounted externally to said mandrel in said first zone.
2. The packer of claim 1, wherein:
 - said second zone radially enlarging as a result of longitudinal shrinkage from at least one of compressive loading of said mandrel and radial expansion of said mandrel in said first zone.
3. The packer of claim 2, wherein:
 - said second zone of said mandrel extending at least as far radially as said seal before said mandrel is expanded.
4. The packer of claim 2, wherein:
 - said seal overlays a connection in said mandrel.
5. The packer of claim 2, wherein:
 - said first zone is flanked by a pair of said second zones on opposing sides thereof.
6. The packer of claim 5, wherein:
 - said second zones define a valley therebetween and external to said mandrel.
7. The packer of claim 6, wherein:
 - said second zones are defined by a multidimensional shape defining multiple internal dimensions in said passage.
8. The packer of claim 7, wherein:
 - said multidimensional shape comprises tapered segments separated by a substantially parallel segment with respect to an axis of said passage.
9. The packer of claim 7, wherein:
 - said multidimensional shape comprised tapered segments meeting at a point.

10. The packer of claim **9**, wherein:
said point penetrates the borehole wall when said first zone is expanded.
11. The packer of claim **7**, wherein:
said multidimensional shape has an outer surface with a surface treatment to enhance grip against the borehole wall.
12. The packer of claim **8**, further comprising:
a swage for expansion of said mandrel whose outer dimension is smaller than an internal dimension of said substantially parallel segment before expansion starts.
13. The packer of claim **9**, further comprising:
a swage for expansion of said mandrel whose outer dimension is smaller than an internal dimension of said point before expansion starts.
14. The packer of claim **6**, wherein:
said seal is disposed within said valley before expansion begins.
15. The packer of claim **2**, wherein:
said seal extends to both said first and second zones.
16. The packer of claim **2**, wherein:
said mandrel comprises alternating first and second zones and said seal extend is said first and second zones.
17. The packer of claim **7**, wherein:
said second zone has an arcuate shape.
18. The packer of claim **17**, wherein:
said arcuate shape is flanked by exterior valleys in an outer surface of said mandrel.
19. The packer of claim **17**, wherein:
said arcuate shape has an outer surface that extends radially at least as far as an outer surface of said mandrel in an adjacent first zone
20. The packer of claim **17**, wherein:
said seal extends over said arcuate shape and into said valleys.

21. The packer of claim **17**, wherein:
said arcuate shape has an outer surface with a surface treatment to enhance grip against the borehole wall.
22. The packer of claim **2**, wherein:
said second zone radially enlarging as a result of longitudinal shrinkage from both compressive loading of said mandrel and radial expansion of said mandrel in said first zone.
23. The packer of claim **8**, further comprising:
a swage for expansion of said mandrel whose outer dimension is larger than an internal dimension of said substantially parallel segment before expansion starts.
24. The packer of claim **9**, further comprising:
a swage for expansion of said mandrel whose outer dimension is larger than an internal dimension of said point before expansion starts.

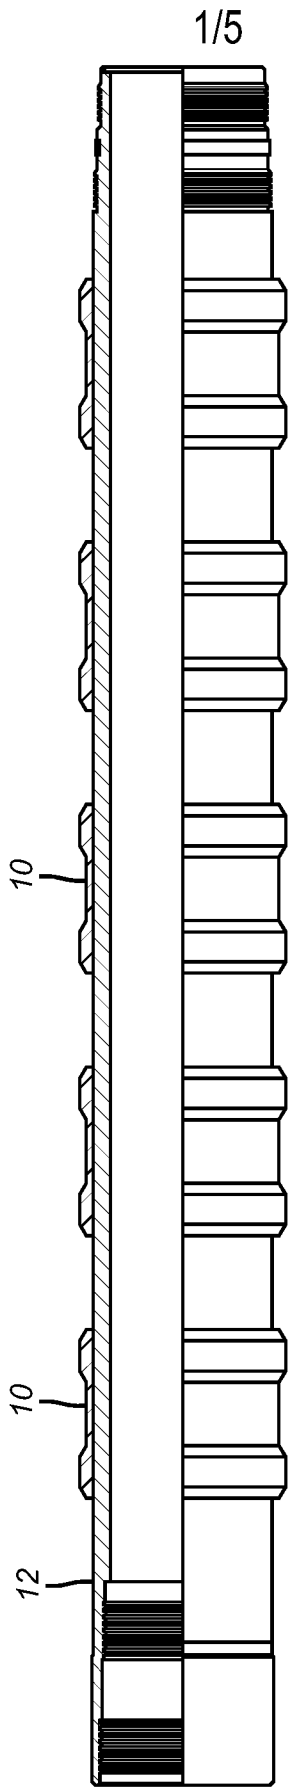

(PRIOR ART)
FIG. 1

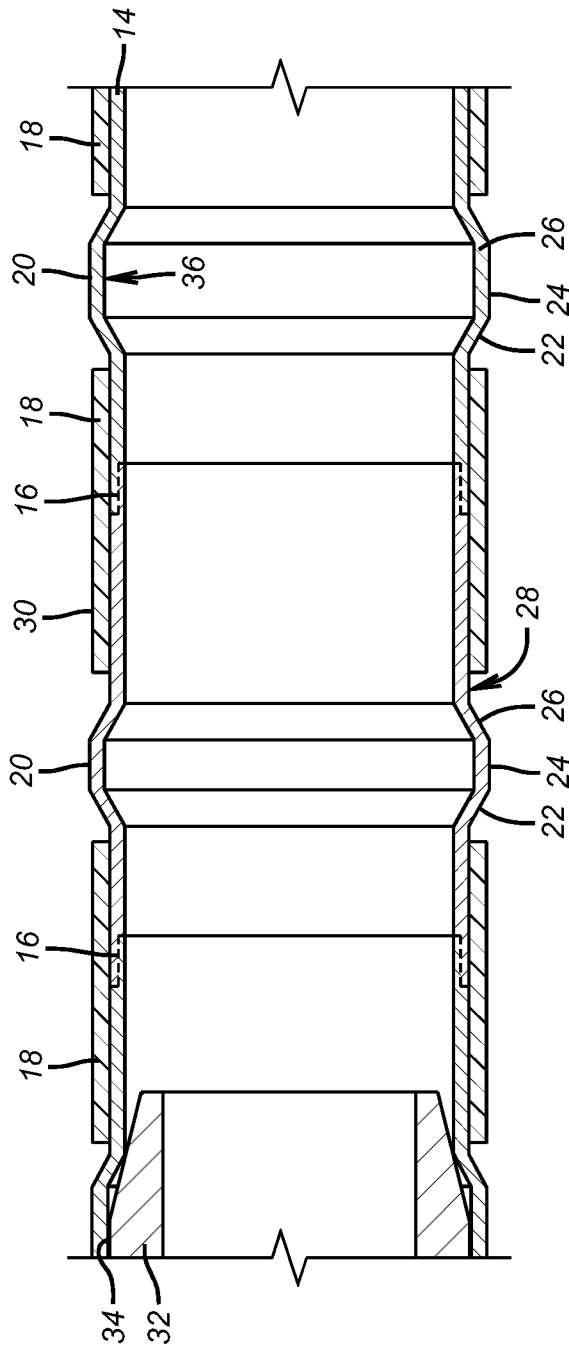


FIG. 2

3/5

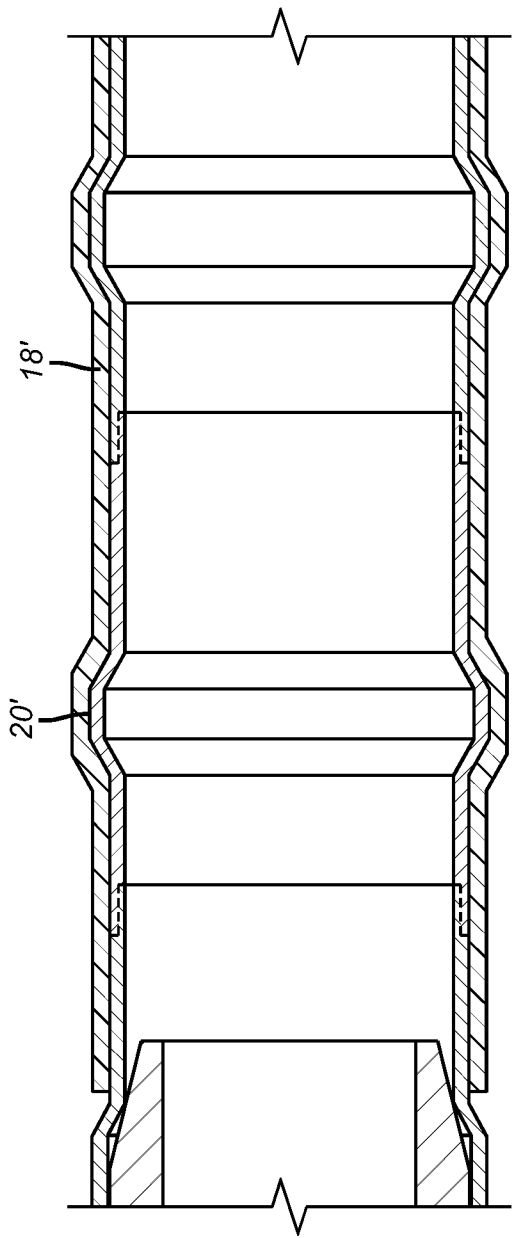


FIG. 3

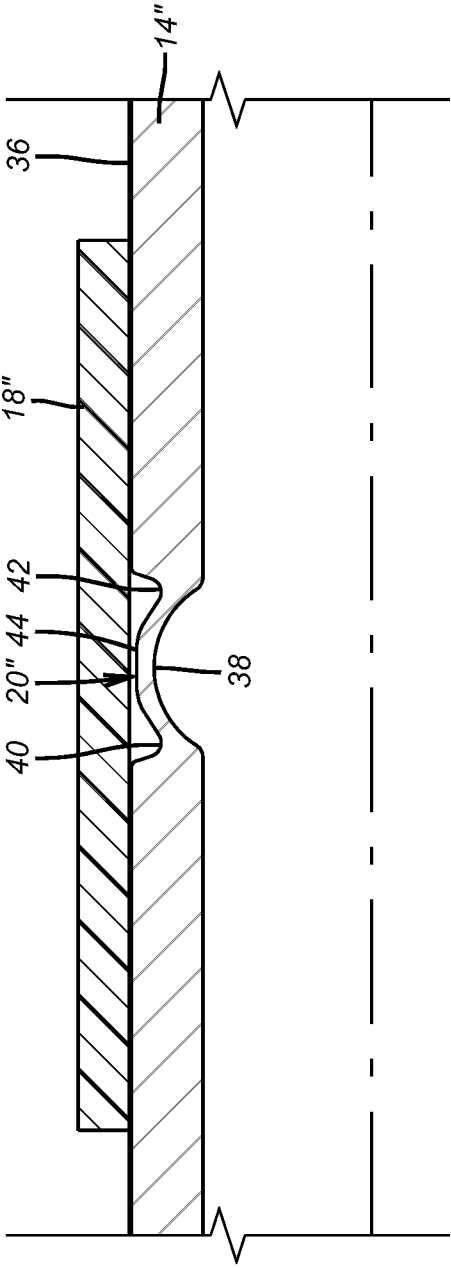


FIG. 3a

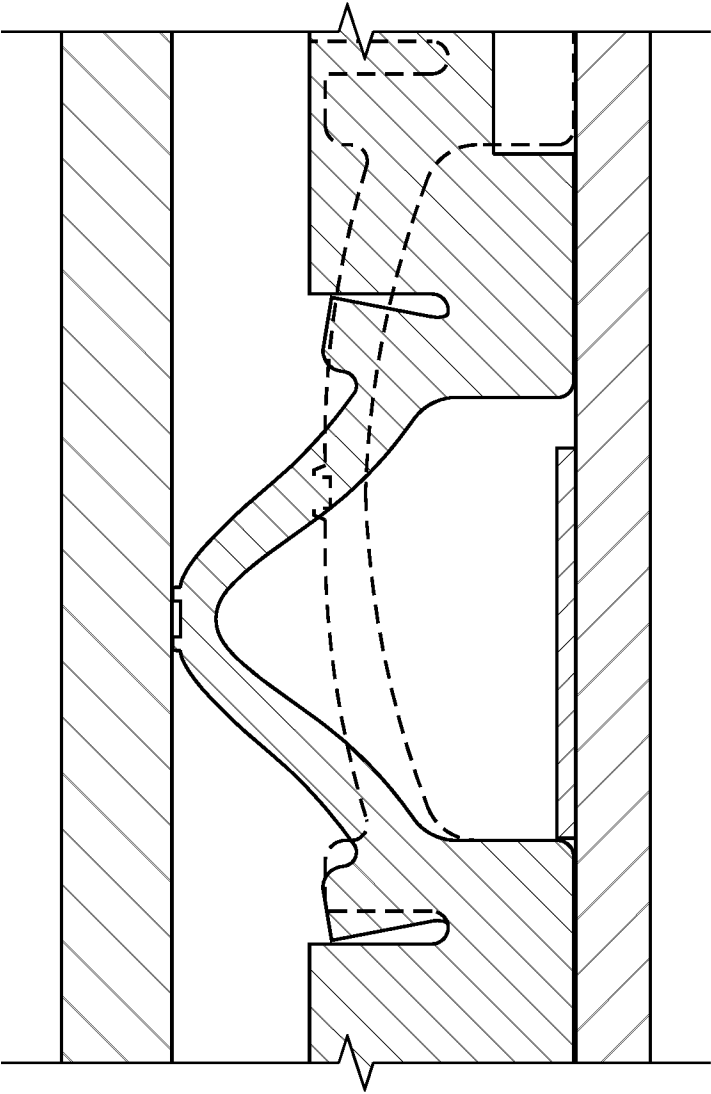


FIG. 4