

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 April 2008 (17.04.2008)

PCT

(10) International Publication Number
WO 2008/045833 A1

(51) International Patent Classification:
H01H 25/04 (2006.01) **G06F 3/033** (2006.01)

(21) International Application Number:
PCT/US2007/080708

(22) International Filing Date: 8 October 2007 (08.10.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/850,662 11 October 2006 (11.10.2006) US
11/812,383 18 June 2007 (18.06.2007) US

(71) Applicant (for all designated States except US): **APPLE INC.** [US/US]; 1 Infinite Loop, Cupertino, CA 95014 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PREST, Christopher, D.** [GB/US]; 1911 California St. Apt. #6, Mountain View, CA 94040 (US). **ROTHKOPE, Fletcher** [US/US]; C/o Apple Computer, Inc., 1 Infinite Loop, Cupertino, CA 95014 (US). **DINH, Richard, H.** [US/US]; 134 Destry Court, San Jose, CA 95136 (US).

(74) Agents: **CHARTOVE, Alex et al.**; Morrison & Foerster LLP, 1650 Tysons Blvd, Suite 400, McLean, VA 22102 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: GIMBALLED SCROLL WHEEL

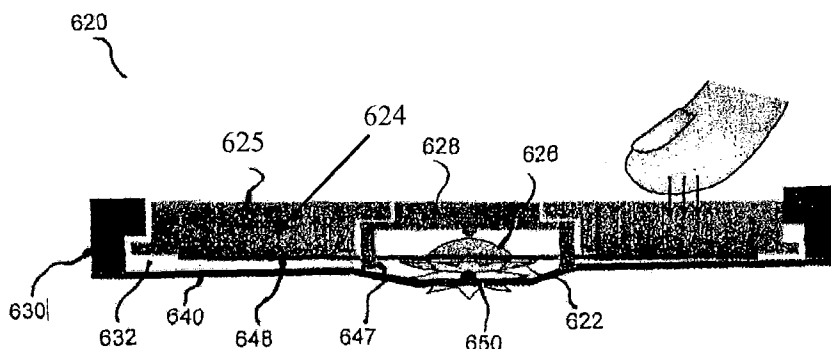

(57) Abstract: An input device that includes both a movement detector, such as mechanical switch, and positional indicator, such as touch pad touch screen, and/or touch sensing housing is disclosed. These two input devices can be used substantially simultaneously to provide a command to the device. In this manner, different commands can be associated with depressing a moveable member in different areas and a single moveable

member can perform like several buttons.

WO 2008/045833 A1

GIMBALLED SCROLL WHEEL

Technical Field

This relates to methods and devices in which data associated with a first input, such as a touch pad or touch screen, and data associated with a second input, such as a button, may both be used in combination to generate a single command.

5

Background

Several kinds of input devices are known for performing operations in a computing device. Some examples of input devices include buttons, switches, keyboards, mice, trackballs, touch pads, joy sticks, touch screens and the like. Each of these devices has advantages and disadvantages that may be taken into account when designing an input apparatus for a computing device. The operations generally include moving a cursor and selecting items displayed on a display screen. The operations may also include paging, scrolling, panning, zooming, etc.

Some input devices are better configured to perform certain functions than other input devices. For example, touch pads and touch screens are useful for providing location information and buttons are useful for indicating selections. Since most computing devices perform several different functions, a combination of different input devices that are able to provide input in different manners is often desired.

In addition, many computing devices are designed to be portable, for example, media players, remote controls, personal digital assistants (PDAs), cellular phones, etc. Designing input devices for these portable devices presents some unique problems. For example, there is typically a push to increase the ability and, thus, the number of functions that these portable computing devices are able to perform. As the number of operations that these portable devices perform increases, the number of controls desired to control these operations and the complexity of these controls also typically increase. A competing concern is that there is also pressure to make portable computing devices smaller, and thus, more portable. However, as the size of

these devices decreases, the amount of space in which to locate input devices also decreases.

Accordingly, a need exists for compact input device configurations that can be used to control a variety of different functions in a variety of different manners.

5

Summary

Described herein are exemplary embodiments of devices, including computing devices, that use at least two different input devices substantially simultaneously to generate a single command. One example of two different input devices may include a movement detector, such as a mechanical switch, and a position indicator, such as a touch pad or touch screen. By using such different input devices in combination, the number of operations that can be controlled by these two input devices can be increased. In addition, the benefits associated with each of these two different input devices can be used while making the command. These input devices may also be layered, one on top of the other, further decreasing the amount of space on a device used by the input devices.

10
15

In some embodiments the input device may include a movement detector, such as a dome switch, placed under a platform that includes a position indicator. The device can then use the movement of the platform in making selections. Since this movement can be felt by a user of the device, this configuration allows the device to give tactile feedback to the user while the user is making a selection. This tactile feedback can further be improved by configuring the device to provide a “click” sensation when the platform is depressed.

20

When the platform is depressed or otherwise moved by a user’s finger (or stylus or other device), a movement detector can detect this movement. In this manner, the platform operates as a button. In some embodiments the entire platform may be depressed. In other embodiments, a portion of the platform may be depressed, causing the platform to tilt or “gimbal.”

25

A position indicator can be configured to indicate the position on the platform that has been acted on by the user’s finger or other device. Examples of a position

indicator include a touch pad and a touch screen. The touch pad or touch screen can be located directly on the platform.

A processor can then be configured to generate a single command that is dependent on both the input from the movement detector and the input from the position indicator. In this manner, different commands can be associated with depressing the platform in different locations, enabling a single platform to provide the functionality of multiple buttons. The platform may also include predetermined zones. An example of a device that includes predetermined button zones can be found in U.S. patent application Ser. No. 11/592,679, entitled "MOVABLE TOUCH PAD WITH ADDED FUNCTIONALITY," filed November 3, 2006, which is hereby incorporated by reference. The processor can then be configured to generate a command that is dependent on the zone in which a user depresses the platform.

Unlike a touch pad or touch screen or non-mechanical sensor alone, this configuration allows the user to receive the tactile feedback associated with buttons while making selections. Further, the number of mechanical movement indicators and the amount of space on a device used for issuing selections can be decreased.

Embodiments of an input device may include a platform suspended on a single flexible member. The flexible member may, for example, be in the shape of a bubble that presses the platform against a housing. The flexible member allows the platform to be tilted 360 degrees about an axis. A movement detector can be configured to detect the movement of the movable platform relative to the housing. The platform also may include a variety of components including a position sensing device to detect the position of a user's finger on the platform when the platform is tilted or depressed.

Examples of devices that may use the input devices described herein include media players, desktop computers, laptop computers, keyboard units, personal digital assistants (PDAs), cellular phones, and remote controls.

Brief Description of the Drawings

FIG. 1 illustrates an example of a perspective view of an input device according to an embodiment of the present invention.

FIGS. 2A and 2B illustrate an example of simplified side views of an input device having a button touch pad according to an embodiment of the present invention.

FIG. 3 illustrates an example of a simplified block diagram of an input device connected to a computing device according to an embodiment of the present invention.

FIG. 4 illustrates an example of a simplified perspective diagram of an input device according to an embodiment of the present invention.

FIGS. 5A-5C illustrate an example of a side view, in cross section, of an input device according to an embodiment of the present invention.

FIGS. 6A-6C illustrate an example of a side view, in cross section, of an input device according to an embodiment of the present invention.

FIG. 7 illustrates an example of a perspective diagram of a media player according to an embodiment of the present invention.

FIG. 8 illustrates an example of a perspective diagram of a laptop computer according to an embodiment of the present invention.

FIG. 9 illustrates an example of a perspective diagram of a desktop computer with a peripheral input device connected thereto according to an embodiment of the present invention.

FIG. 10 illustrates an example of a perspective diagram of a remote control using an input device according to an embodiment of the present invention.

FIG. 11 illustrates an example of an exploded perspective diagram of a media player and input device assembly according to an embodiment of the present invention.

FIG. 12 illustrates an example of a side elevation view of the bottom side of a media player containing an input device according to an embodiment of the present invention.

FIG. 13 illustrates an example of a simplified block diagram of a remote control according to an embodiment of the present invention.

Detailed Description of Preferred Embodiments

The representative embodiments described herein relate to devices that use signals from a movement indicator and a position indicator substantially simultaneously to generate a single command. A platform mounted in a frame of the device can include sensors that can indicate the position of an object, such as a user's finger, in contact with the platform. In addition, a movement indicator on the device can detect movement of the platform relative to the frame.

A user can depress the platform to generate a button command. Since the position of the activation force on the touch pad or touch screen can be determined from the positional indicator, different button commands can be generated depending where on the platform the user depresses the platform.

In the following description of preferred embodiments, reference is made to the accompanying drawings which form a part hereof. It is to be understood that other embodiments may be used and structural changes may be made without departing from the scope of the preferred embodiments. In addition, the following description includes examples that utilize a touch pad as an object sensing device to provide location or other input data. It is understood that reference to a touch pad can also refer to other object sensing devices including (without limitation) touch sensing devices and/or proximity sensing devices, and further including (for example) touch pads, touch screens and/or touch sensing housings.

FIG. 1 illustrates one example of a simplified perspective view of an input device 430. In this example, the input device 430 is generally configured to send information or data to an electronic device in order to perform an action on a display screen (e.g., via a graphical user interface). Examples of actions that may be

performed include, moving an input pointer, making a selection, providing instructions, etc. The input device may interact with the electronic device through a wired connection (e.g., cable/connector) or a wireless connection (e.g., IR, Bluetooth, etc.). The input device 430 may be a stand alone unit or it may be integrated into the electronic device. As a stand alone unit, the input device may have its own enclosure. When integrated into an electronic device, the input device typically uses the enclosure of the electronic device. In either case, the input device may be structurally coupled to the enclosure, as for example, through screws, snaps, retainers, adhesives and the like. In some cases, the input device may be removably coupled to the electronic device, as for example, through a docking station. The electronic device to which the input device is coupled may correspond to any consumer related electronic product. By way of example, the electronic device may correspond to a computer such as desktop computer, laptop computer or PDA, a media player such as a music player, a communication device such as a cellular phone, another input device such as a keyboard, and the like.

As shown in FIG. 1, in this embodiment the input device 430 may include a frame 432 (or support structure) and a touch pad 434. The frame 432 provides a structure for supporting the components of the input device. The frame 432 in the form of a housing may also enclose or contain the components of the input device. The components, which include the touch pad 434, may correspond to electrical, optical and/or mechanical components for operating the input device 430.

The touch pad 434 provides location information for an object in contact with or in proximity to the touch pad. This information can be used in combination with information provided by a movement indicator to generate a single command associated with the movement of the touch pad. The touch pad can be used as an input device by itself; for example, the touch pad may be used to move an object or scroll through a list of items on the device.

The touch pad 434 may be widely varied. For example, the touch pad 434 may be a conventional touch pad based on the Cartesian coordinate system, or the touch pad 434 may be a touch pad based on a Polar coordinate system. An example of a touch pad based on polar coordinates may be found in U.S. Patent No. 7,046,230,

entitled "TOUCH PAD FOR HANDHELD DEVICE," which is herein incorporated by reference. Furthermore, the touch pad 434 may be used in at least two different modes, which may be referred to as a relative mode and/or an absolute mode. In absolute mode, the touch pad 434 reports the absolute coordinates of the location at which it is being touched. For example, these would be "x" and "y" coordinates in the case of a standard Cartesian coordinate system or (r, θ) in the case of a Polar coordinate system. In relative mode, the touch pad 434 reports the direction and/or distance of change, for example, left/right, up/down, and the like. In most cases, the signals produced by the touch pad 434 direct movement on the display screen in a direction similar to the direction of the finger as it is moved across the surface of the touch pad 434.

The shape of the touch pad 434 may be widely varied. For example, the touch pad 434 may be circular, oval, square, rectangular, triangular, and the like. In general, the outer perimeter of the touch pad 434 defines the working boundary of the touch pad 434. In the illustrated embodiment, the touch pad is circular. Circular touch pads allow a user to continuously swirl a finger in a free manner, i.e., the finger can be rotated through 360 degrees of rotation without stopping. This form of motion may produce incremental or accelerated scrolling through a list of songs being displayed on a display screen, for example. Furthermore, the user can rotate his or her finger tangentially from all sides, thus providing more finger position range. Both of these features may help when performing a scrolling function. Furthermore, the size of the touch pad 434 generally corresponds to a size that allows it to be easily manipulated by a user (e.g., the size of a finger tip or larger).

The touch pad 434, which generally takes the form of a rigid planar platform, includes a touchable outer surface 436 for receiving a finger (or object) for manipulation of the touch pad. Although not shown in FIG. 1, beneath the touchable outer surface 436 is a sensor arrangement that is sensitive to such things as the pressure and movement of a finger thereon. The sensor arrangement typically includes a plurality of sensors that may be configured to activate as the finger sits on, taps on or passes over them. In the simplest case, an electrical signal is produced each time the finger is positioned over a sensor. The number of signals in a given time

frame may indicate location, direction, speed and acceleration of the finger on the touch pad 434, i.e., the more signals, the more the user moved his or her finger. In most cases, the signals are monitored by an electronic interface that converts the number, combination and frequency of the signals into location, direction, speed and acceleration information. This information may then be used by the electronic device to perform the desired control function on the display screen. The sensor arrangement may be widely varied. By way of example, the sensors may be based on resistive sensing, surface acoustic wave sensing, pressure sensing (e.g., strain gauge), optical sensing, capacitive sensing and the like.

In the illustrated embodiment, the touch pad 434 is based on capacitive sensing. A capacitively based touch pad is arranged to detect changes in capacitance as the user moves an object such as a finger around the touch pad. In most cases, the capacitive touch pad includes a protective shield, one or more electrode layers, a circuit board and associated electronics including an application specific integrated circuit (ASIC). The protective shield is placed over the electrodes; the electrodes are mounted on the top surface of the circuit board; and the ASIC is mounted on the bottom surface of the circuit board. The protective shield serves to protect the underlayers and to provide a surface for allowing a finger to slide thereon. The surface is generally smooth so that the finger does not stick to it when moved. The protective shield also provides an insulating layer between the finger and the electrode layers. The electrode layer includes a plurality of spatially distinct electrodes. Any suitable number of electrodes may be used. As the number of electrodes increases, the resolution of the touch pad also increases.

Capacitive sensing works according to the principles of capacitance. As should be appreciated, whenever two electrically conductive members come close to one another without actually touching, their electric fields interact to form capacitance. In the configuration discussed above, the first electrically conductive member is one or more of the electrodes and the second electrically conductive member is the finger of the user. Accordingly, as the finger approaches the touch pad, a tiny capacitance forms between the finger and the electrodes in close proximity to the finger. The capacitance in each of the electrodes is measured by the ASIC located

on the backside of the circuit board. By detecting changes in capacitance at each of the electrodes, the ASIC can determine the location, direction, speed and acceleration of the finger as it is moved across the touch pad. The ASIC can also report this information in a form that can be used by the electronic device.

5 In accordance with one embodiment, the touch pad 434 is movable relative to the frame 432. This movement is detected by a movement detector that generates another control signal. By way of example, the touch pad 434 in the form of the rigid planar platform may rotate, pivot, slide, translate, flex and/or the like relative to the frame 432. The touch pad 434 may be coupled to the frame 432 and/or it may be
10 movably restrained by the frame 432. By way of example, the touch pad 434 may be coupled to the frame 432 through axels, pin joints, slider joints, ball and socket joints, flexure joints, magnets, cushions and/or the like. The touch pad 434 may also float within a space of the frame (e.g., gimbal). It should be noted that the input device 430 may additionally include a combination of joints such as a pivot/translating joint,
15 pivot/flexure joint, pivot/ball and socket joint, translating/flexure joint, and the like to increase the range of movement (e.g., increase the degree of freedom).

When moved, the touch pad 434 is configured to actuate a movement detector circuit that generates one or more signals. The circuit generally includes one or more movement detectors such as switches, sensors, encoders, and the like.

20 In the illustrated embodiment, the touch pad 434 is part of a depressible platform. The touch pad operates as a button and performs one or more mechanical clicking actions. Multiple functions of the device can be accessed by depressing the touch pad 434 in different locations. A movement detector signals that the touch pad 434 has been depressed, and the touch pad 434 signals a location on the platform that
25 has been touched. By combining both the movement detector signals and the touch pad signals, the touch pad 434 acts like multiple buttons such that depressing the touch pad at different locations corresponds to different buttons. As shown in FIGS. 2A and 2B, according to one embodiment the touch pad 434 is capable of moving between an upright position (FIG. 2A) and a depressed position (FIG. 2B) when a
30 substantial force from a finger 438, palm, hand or other object is applied to the touch pad 434. The touch pad 434 is typically spring biased in the upright position, as for

example through a spring member. The touch pad 434 moves to the depressed position when the spring bias is overcome by an object pressing on the touch pad 434.

As shown in FIG. 2A, the touch pad 434 generates tracking signals when an object such as a user's finger is moved over the top surface of the touch pad in the x, y plane. As shown in FIG. 2B, in the depressed position (z direction), the touch pad 434 generates both positional information and a movement indicator generates a signal indicating that the touch pad 434 has moved. The positional information and the movement indication are combined to form a button command. Different button commands can correspond to depressing the touch pad 434 in different locations. The different button commands may be used for various functionalities including, but not limited to, making selections or issuing commands associated with operating an electronic device. By way of example, in the case of a music player, the button commands may be associated with opening a menu, playing a song, fast forwarding a song, seeking through a menu and the like.

To elaborate, the touch pad 434 is configured to actuate a movement detector, which together with the touch pad positional information, forms a button command when the touch pad 434 is moved to the depressed position. The movement detector is typically located within the frame 432 and may be coupled to the touch pad 434 and/or the frame 432. The movement detector may be any combination of switches and sensors. Switches are generally configured to provide pulsed or binary data such as activate (on) or deactivate (off). By way of example, an underside portion of the touch pad 434 may be configured to contact or engage (and thus activate) a switch when the user presses on the touch pad 434. The sensors, on the other hand, are generally configured to provide continuous or analog data. By way of example, the sensor may be configured to measure the position or the amount of tilt of the touch pad 434 relative to the frame when a user presses on the touch pad 434. Any suitable mechanical, electrical and/or optical switch or sensor may be used. For example, tact switches, force sensitive resistors, pressure sensors, proximity sensors, and the like may be used. In some case, the spring bias for placing the touch pad 434 in the upright position is provided by a movement detector that includes a spring action.

FIG. 3 illustrates an example of a simplified block diagram of a computing system 439. The computing system generally includes an input device 440 operatively connected to a computing device 442. By way of example, the input device 440 may generally correspond to the input device 430 shown in FIGS. 1, 2A and 2B, and the computing device 442 may correspond to a computer, PDA, media player or the like. As shown, the input device 440 includes a depressible touch pad 444 and one or more movement detectors 446. The touch pad 444 is configured to generate tracking signals and the movement detector 446 is configured to generate a movement signal when the touch pad is depressed. Although the touch pad 444 may be widely varied, in this embodiment, the touch pad 444 includes capacitance sensors 448 and a control system 450 for acquiring the position signals from the sensors 448 and supplying the signals to the computing device 442. The control system 450 may include an application specific integrated circuit (ASIC) that is configured to monitor the signals from the sensors 448, to compute the angular location, direction, speed and acceleration of the monitored signals and to report this information to a processor of the computing device 442. The movement detector 446 may also be widely varied. In this embodiment, however, the movement detector 446 takes the form of a switch that generates a movement signal when the touch pad 444 is depressed. The switch 446 may correspond to a mechanical, electrical or optical style switch. In one particular implementation, the switch 446 is a mechanical style switch that includes a protruding actuator 452 that may be pushed by the touch pad 444 to generate the movement signal. By way of example, the switch may be a tact or dome switch.

Both the touch pad 444 and the switch 446 are operatively coupled to the computing device 442 through a communication interface 454. The communication interface provides a connection point for direct or indirect connection between the input device and the electronic device. The communication interface 454 may be wired (wires, cables, connectors) or wireless (e.g., transmitter/receiver).

Referring to the computing device 442, the computing device 442 generally includes a processor 457 (e.g., CPU or microprocessor) configured to execute instructions and to carry out operations associated with the computing device 442. For example, using instructions retrieved from memory, the processor may control the

reception and manipulation of input and output data between components of the computing device 442. The processor 457 is configured to receive input from both the switch 446 and the touch pad 444 and form a single command that is dependent upon both of these inputs. In most cases, the processor 457 executes instruction under the control of an operating system or other software. The processor 457 can be a single-chip processor or can be implemented with multiple components.

The computing device 442 also includes an input/output (I/O) controller 456 that is operatively coupled to the processor 457. The (I/O) controller 456 may be integrated with the processor 457 or it may be a separate component as shown. The I/O controller 456 is generally configured to control interactions with one or more I/O devices that can be coupled to the computing device 442, as for example the input device 440. The I/O controller 456 generally operates by exchanging data between the computing device 442 and I/O devices that desire to communicate with the computing device 442.

The computing device 442 also includes a display controller 458 that is operatively coupled to the processor 457. The display controller 458 may be integrated with the processor 457 or it may be a separate component as shown. The display controller 458 is configured to process display commands to produce text and graphics on a display screen 460. By way of example, the display screen 460 may be a monochrome display, color graphics adapter (CGA) display, enhanced graphics adapter (EGA) display, variable-graphics-array (VGA) display, super VGA display, liquid crystal display (e.g., active matrix, passive matrix and the like), cathode ray tube (CRT), plasma displays and the like. In the illustrated embodiment, the display device corresponds to a liquid crystal display (LCD).

In most cases, the processor 457 together with an operating system operates to execute computer code and produce and use data. The computer code and data may reside within a program storage area 462 that is operatively coupled to the processor 457. Program storage area 462 generally provides a place to hold data that is being used by the computing device 442. By way of example, the program storage area may include Read-Only Memory (ROM), Random-Access Memory (RAM), hard disk drive and/or the like. The computer code and data could also reside on a removable

program medium and loaded or installed onto the computing device when needed. In one embodiment, program storage area 462 is configured to store information for controlling how the tracking and movement signals generated by the input device are used in combination by the computing device 442 to generate a single button command.

FIG. 4 is a simplified perspective diagram of an input device 470. Like the input device shown in the embodiment of FIGS. 2A and 2B, this input device 470 incorporates the functionality of a button (or buttons) directly into the touch pad 472, i.e., the touch pad acts like a button. In this embodiment, however, the touch pad 472 is divided into a plurality of independent and spatially distinct button zones 474. The button zones 474 represent regions of the touch pad 472 that may be moved by a user to implement distinct button functions. The dotted lines represent areas of the touch pad 472 that make up an individual button zone. Any number of button zones may be used, for example, two or more, four, eight, etc. In the illustrated embodiment, the touch pad 472 includes four button zones 474 (i.e., zones A-D).

As should be appreciated, the button functions generated by pressing on each button zone may include selecting an item on the screen, opening a file or document, executing instructions, starting a program, viewing a menu, and/or the like. The button functions may also include functions that make it easier to navigate through the electronic system, as for example, zoom, scroll, open different menus, home the input pointer, perform keyboard related actions such as enter, delete, insert, page up/down, and the like. In the case of a music player, one of the button zones may be used to access a menu on the display screen, a second button zone may be used to seek forward through a list of songs or fast forward through a currently playing song, a third button zone may be used to seek backwards through a list of songs or fast rearward through a currently playing song, and a fourth button zone may be used to pause or stop a song that is being played.

To elaborate, the touch pad 472 is capable of moving relative to the frame 476 so as to create a clicking action. The frame 476 may be formed from a single component or it may be a combination of assembled components. The clicking action actuates a movement detector contained inside the frame 476. The movement

detector is configured to sense movements of the button zones during the clicking action and to send a signal corresponding to the movement to the electronic device. By way of example, the movement detectors may be switches, sensors and/or the like.

5 In addition, the touch pad 472 is configured to send positional information on what button zone is being acted on when the clicking action occurs. The positional information allows to device to determine which button zone is being activated when the touch pad is moved relative to the frame.

10 The movements of each of the button zones 474 may be provided by various rotations, pivots, translations, flexes and the like. In one embodiment, the touch pad 472 is configured to gimbal relative to the frame 476. By gimbal, it is generally meant that the touch pad 472 is able to float in space relative to the frame 476 while still being constrained thereto. The gimbal may allow the touch pad 472 to move in single or multiple degrees of freedom (DOF) relative to the housing, for example, movements in the x, y and/or z directions and/or rotations about the x, y, and/or z axes
15 $(\theta_x \theta_y \theta_z)$.

FIGs. 5A-5C show a particular implementation of a input device 600. The input device 600 includes a touch pad 605 mounted on a gimbal plate 604. The gimbal plate is held within a space 601 in a housing with top plate 602. The gimbal plate 604 lies on top of a single flexible member 608.

20 One or more movement detectors are activated by the movement of gimbal plate 605. For example, one or more movement detectors can be positioned around or on gimbal plate 608 and can be activated by the tilt or other desired movement of gimbal plate 608. Flexible member 608 can be part of the movement detector, for example the dome on a SMT dome switch.

25 The flexible member 608 can be formed in a bubble shape that provides the spring force to push the gimbal plate into mating engagement with the top wall of frame 602 and away from supportive surface 608. Tab 606 protrudes from the side of gimbal plate 606 and extends under top plate 602.

30 The gimbal plate is allowed to float within cutout 601. The shape of the space 601 generally coincides with the shape of the gimbal plate 604. As such, the unit is

substantially restrained along the x and y axes via a side wall 603 of the top plate 602 and along the z axis via engagement of top plate 602 and tab 606 on gimbal plate 604. Gimbal plate 604 is thus capable of moving within space 601 while still being prevented from moving entirely out of the space 601 via the walls of the top plate 602.

With respect to FIGS. 5B and 5C, according to one embodiment, a user presses on the gimbal plate 604 in the location of the desired button function. As shown in FIG. 5B, if the user presses on the side of the gimbal plate 604, the gimbal plate tilts. Tab 606 and supportive surface 610 limit the amount of tilt of the gimbal plate. The gimbal plate may be tilted about an axis in a 360 degree pattern around the gimbal plate. One or more movement detectors can be positioned to monitor the movement of the gimbal plate.

5C shows that if the user presses down on the center of the gimbal plate 604, the gimbal plate moves down into the housing without tilting. The gimbal plate is nonetheless still restrained within the housing by the walls of top plate 602.

Touch pad 605, mounted on gimbal plate 604, provides the position of the user's finger when gimbal plate 604 is pressed. This positional information is used by the device to determine what button function is desired by the user. For example, the interface may be divided into distinct button zones as shown in FIG. 4. In this instance, activation of a single movement detector that monitors the movement of gimbal plate 604 can be used to provide several button commands. For example, a first signal generated by touch pad 605 on gimbal plate 604 may generate a first signal that indicates the position of the user's finger on the gimbal plate. A movement detector such as a dome switch can then be used to generate a second signal that indicates that the gimbal plate has been moved, for example, depressed.

The input device including the gimbal plate and a touch pad can be part of a computer system 439 as shown in FIG. 3. The communication interface 454 can provide the first and second signals provided by the touch pad and the movement detector respectively to computing device 442 including a processor 454. The processor can then determine which command is associated with the combination of the first and second signals. In this manner, activating the movement detector by

pressing on the touch pad in different positions can correspond to different actions and a single movement detector can be used to provide the functionality of multiple buttons positioned around the gimbal plate 604.

By using a touch pad and the gimbal plate as configured in FIGS 5A-5C,
multiple button functions can be accessed with a single movement detector. This can
be used to produce a device with fewer parts as compared to devices that use a
different movement detector to produce each button command.

Having only a single movement detector positioned under the gimbal plate
also improves the tactile feel of the input device. A user of the device will feel only a
single click on any part of the gimbal plate the user presses. Having multiple
mechanical switch type movement detectors under a gimbal plate can result in a
“crunching” type feel in which the user feels multiple clicks in series when they press
down on the gimbal plate.

FIGs. 6A-6C show a side cross section of an embodiment of an input device
620 that uses two dome switches. One dome switch 622 is activated by a user
pressing anywhere around the click wheel 624, and the second dome switch 626 is
activated by depressing the center button 628.

FIGs. 6A-6C show a cross section of a round click wheel 624 that surrounds
center button 628, which is positioned in the center of the click wheel. The click
wheel 624 includes a touch pad 625. The click wheel 624 is configured to gimbal
relative to the frame 630 in order to provide a clicking action for any position on the
click wheel 624.

The click wheel 624 is restrained within a space 632 provided in the frame
630. The click wheel 624 is capable of moving within the space 632 while still being
prevented from moving entirely out of the space 632 via the walls of the frame 630.
The shape of the space 632 generally coincides with the shape of the click wheel 624.
As such, the unit is substantially restrained along the x and y axes via a side wall 634
of the frame 630 and along the z axis via a top wall 636 and a bottom wall 640 of the
frame 630. A small gap may be provided between the side walls and the platform to
allow the touch pad to gimbal 360 degrees around its axis without obstruction (e.g., a

slight amount of play). In some cases, the platform may include tabs that extend along the x and y axes so as to prevent rotation about the z axis.

The center button 628 is positioned within a space 642 in the click wheel 624. The center button 628 is constrained within space 642 along the x and y axes via side wall 644 of click wheel 624 and along the z axis by tabs 646 of click wheel 646 and by bottom wall 640, which connects with legs 647 of center button 628 when the center button is pressed.

Positioned beneath the center button 628 are two dome switches 622 and 626. The two dome switches provide the mechanical spring action for center button 628 and click wheel 624. A rigid plate 648 is positioned between the two dome switches. The rigid plate 648 extends through holes in legs 647 and under click wheel 624. In this manner, the rigid plate transmits the spring force of dome switches 622 and 626 to the click wheel 624 and the rigid plate transmits any force supplied by a user to click wheel 624 to dome switch 622.

FIG. 6B shows how only click wheel dome switch 622 is activated when a user depresses click wheel 624. When a user depresses anywhere on the click wheel 624, the click wheel gimbals in the area 632 and the force of the user pressing down is conveyed to inverted dome switch 622 by rigid plate 648 and bottom wall 640. Bottom wall 640 may include a nub 650 for conveying the force of the click to the center of the dome switch 622. Center button dome switch 626 does not actuate since it pivots together with the click wheel 624. The clearance between the center button 628 and the snap dome below it remains constant as it pivots together with the wheel.

FIG. 6C shows how only the center dome switch is activated when the center button 628 is depressed. The feet 647 of center button 628 prevent the button 628 from exceeding the travel of the upper dome 626. To ensure that only the upper dome 626 is actuated, the actuation force of the lower dome 622 is higher than the actuation force of the top dome 626. The button 628 may include a nub 652 for conveying the force of the click to the center of the dome switch 626.

As with the configuration described with respect to FIGS. 5A-5C, signals from a touch pad 625 that forms part of click wheel 624 were used in combination with the

signal from the activation of click dome switch 622 to simulate several buttons mounted in different areas around click wheel 624. This configuration, however, allows for a separate center button to be used. This can be particularly useful when a touch pad that only senses angular position is used in the click wheel 624. When only
5 angular position is measured, a center button can not be simulated since the position of the user's finger relative to the center of the click wheel 624 is not measured.

Although not shown, the touch pad may be back lit in some cases. For example, the circuit board can be populated with light emitting diodes (LEDs) on either side in order to designate button zones, provide additional feedback and the
10 like.

As previously mentioned, the input devices described herein may be integrated into an electronic device or they may be separate stand alone devices. FIGS. 7 and 8 show some implementations of an input device 700 integrated into an electronic device. In FIG. 7, the input device 700 is incorporated into a media player 702. In
15 FIG. 8, the input device 700 is incorporated into a laptop computer 704. FIGS. 9 and 10, on the other hand, show some implementations of the input device 700 as a stand alone unit. In FIG. 9, the input device 700 is a peripheral device that is connected to a desktop computer 706. In FIG. 10, the input device 700 is a remote control that wirelessly connects to a docking station 708 with a media player 710 docked therein.
20 It should be noted, however, that the remote control can also be configured to interact with the media player (or other electronic device) directly thereby eliminating the need for a docking station. An example of a docking station for a media player can be found in U.S. patent application Ser. No. 10/423,490, entitled "MEDIA PLAYER SYSTEM," filed Apr. 25, 2003, which is hereby incorporated by reference. It should
25 be noted that these particular embodiments are not a limitation and that many other devices and configurations may be used.

Referring back to FIG. 7, the media player 702 will be discussed in greater detail. The term "media player" generally refers to computing devices that may be dedicated to processing media such as audio, video or other images, as for example,
30 music players, game players, video players, video recorders, cameras, and the like. In some cases, the media players contain single functionality (e.g., a media player

dedicated to playing music) and in other cases the media players contain multiple functionality (e.g., a media player that plays music, displays video, stores pictures and the like). In either case, these devices are generally portable so as to allow a user to listen to music, play games or video, record video or take pictures wherever the user travels.

In one embodiment, the media player is a handheld device that is sized for placement into a pocket of the user. By being pocket sized, the user does not have to directly carry the device and therefore the device can be taken almost anywhere the user travels (e.g., the user is not limited by carrying a large, bulky and often heavy device, as in a laptop or notebook computer). For example, in the case of a music player, a user may use the device while working out at the gym. In case of a camera, a user may use the device while mountain climbing. In the case of a game player, the user may use the device while traveling in a car. Furthermore, the device may be operated by the user's hands. No reference surface, such as a desktop, is needed. In the illustrated embodiment, the media player 702 is a pocket sized hand held MP3 music player that allows a user to store a large collection of music (e.g., in some cases up to 4,000 CD-quality songs). By way of example, the MP3 music player may correspond to the iPod ® brand MP3 player manufactured by Apple Computer, Inc. of Cupertino, Calif. Although used primarily for storing and playing music, the MP3 music player shown herein may also include additional functionality such as storing a calendar and phone lists, storing and playing games, storing photos and the like. In fact, in some cases, it may act as a highly transportable storage device.

As shown in FIG. 7, the media player 702 includes a housing 722 that encloses various electrical components (including integrated circuit chips and other circuitry) internally to provide computing operations for the media player 702. In addition, the housing 722 may also define the shape or form of the media player 702. That is, the contour of the housing 722 may embody the outward physical appearance of the media player 702. The integrated circuit chips and other circuitry contained within the housing 722 may include a microprocessor (e.g., CPU), memory (e.g., ROM, RAM), a power supply (e.g., battery), a circuit board, a hard drive, other memory (e.g., flash) and/or various input/output (I/O) support circuitry. The electrical

components may also include components for inputting or outputting music or sound such as a microphone, amplifier and a digital signal processor (DSP). The electrical components may also include components for capturing images such as image sensors (e.g., charge coupled device (CCD) or complimentary metal-oxide semiconductor (CMOS)) or optics (e.g., lenses, splitters, filters).

In the illustrated embodiment, the media player 702 includes a hard drive thereby giving the media player massive storage capacity. For example, a 20 GB hard drive can store up to 4000 songs or about 266 hours of music. In contrast, flash-based media players on average store up to 128 MB, or about two hours, of music. The hard drive capacity may be widely varied (e.g., 5, 10, 20 GB, etc.). In addition to the hard drive, the media player 702 shown herein also includes a battery such as a rechargeable lithium polymer battery. These types of batteries are capable of offering about 10 hours of continuous playtime to the media player.

The media player 702 also includes a display screen 724 and related circuitry. The display screen 724 is used to display a graphical user interface as well as other information to the user (e.g., text, objects, graphics). By way of example, the display screen 724 may be a liquid crystal display (LCD). In one particular embodiment, the display screen corresponds to a 160-by-128-pixel high-resolution display, with a white LED backlight to give clear visibility in daylight as well as low-light conditions. As shown, the display screen 724 is visible to a user of the media player 702 through an opening 725 in the housing 722 and through a transparent wall 726 that is disposed in front of the opening 725. Although transparent, the transparent wall 726 may be considered part of the housing 722 since it helps to define the shape or form of the media player 702.

The media player 702 also includes the touch pad 700 such as any of those previously described. The touch pad 700 generally consists of a touchable outer surface 731 for receiving a finger for manipulation on the touch pad 730. Although not shown in FIG. 7, beneath the touchable outer surface 731 is a sensor arrangement. The sensor arrangement includes a plurality of sensors that may be configured to activate as the finger sits on, taps on or passes over them. In the simplest case, an electrical signal is produced each time the finger is positioned over a sensor. The

number of signals in a given time frame may indicate location, direction, speed and acceleration of the finger on the touch pad, i.e., the more signals, the more the user moved his or her finger. In most cases, the signals are monitored by an electronic interface that converts the number, combination and frequency of the signals into location, direction, speed and acceleration information. This information may then be used by the media player 702 to perform the desired control function on the display screen 724. For example, a user may easily scroll through a list of songs by swirling the finger around the touch pad 700.

In addition to above, the touch pad may also include one or more movable buttons zones A-D as well as a center button E. The button zones are configured to provide one or more dedicated control functions for making selections or issuing commands associated with operating the media player 702. By way of example, in the case of an MP3 music player, the button functions may be associated with opening a menu, playing a song, fast forwarding a song, seeking through a menu, making selections and the like. In most cases, the button functions are implemented via a mechanical clicking action.

The position of the touch pad 700 relative to the housing 722 may be widely varied. For example, the touch pad 700 may be placed at any external surface (e.g., top, side, front, or back) of the housing 722 that is accessible to a user during manipulation of the media player 702. In most cases, the touch sensitive surface 731 of the touch pad 700 is completely exposed to the user. In the embodiment illustrated in FIG. 7, the touch pad 700 is located in a lower front area of the housing 722. Furthermore, the touch pad 700 may be recessed below, level with, or extend above the surface of the housing 722. In the embodiment illustrated in FIG. 7, the touch sensitive surface 731 of the touch pad 700 is substantially flush with the external surface of the housing 722.

The shape of the touch pad 700 may also be widely varied. Although shown as circular, the touch pad may also be square, rectangular, triangular, and the like. More particularly, the touch pad is annular, i.e., shaped like or forming a ring. As such, the inner and outer perimeter of the touch pad defines the working boundary of the touch pad.

The media player 702 may also include a hold switch 734. The hold switch 734 is configured to activate or deactivate the touch pad and/or buttons associated therewith. This is generally done to prevent unwanted commands by the touch pad and/or buttons, as for example, when the media player is stored inside a user's pocket.

5 When deactivated, signals from the buttons and/or touch pad are not sent or are disregarded by the media player. When activated, signals from the buttons and/or touch pad are sent and therefore received and processed by the media player.

Moreover, the media player 702 may also include one or more headphone jacks 736 and one or more data ports 738. The headphone jack 736 is capable of

10 receiving a headphone connector associated with headphones configured for listening to sound being outputted by the media device 702. The data port 738, on the other hand, is capable of receiving a data connector/cable assembly configured for transmitting and receiving data to and from a host device such as a general purpose computer (e.g., desktop computer, portable computer). By way of example, the data

15 port 738 may be used to upload or download audio, video and other images to and from the media device 702. For example, the data port may be used to download songs and play lists, audio books, ebooks, photos, and the like into the storage mechanism of the media player.

The data port 738 may be widely varied. For example, the data port may be a

20 PS/2 port, a serial port, a parallel port, a USB port, a Firewire port and/or the like. In some cases, the data port 738 may be a radio frequency (RF) link or optical infrared (IR) link to eliminate the need for a cable. Although not shown in FIG. 7, the media player 702 may also include a power port that receives a power connector/cable assembly configured for delivering power to the media player 702. In some cases, the

25 data port 738 may serve as both a data and power port. In the illustrated embodiment, the data port 738 is a Firewire port having both data and power capabilities.

Although only one data port is shown, it should be noted that this is not a limitation and that multiple data ports may be incorporated into the media player. In a similar vein, the data port may include multiple data functionality, i.e., integrating the

30 functionality of multiple data ports into a single data port. Furthermore, it should be noted that the position of the hold switch, headphone jack and data port on the

housing may be widely varied. That is, they are not limited to the positions shown in FIG. 7. They may be positioned almost anywhere on the housing (e.g., front, back, sides, top, bottom). For example, the data port may be positioned on the top surface of the housing rather than the bottom surface as shown.

FIGS. 11 and 12 are diagrams showing the installation of an input device 750 into a media player 752. By way of example, the input device 750 may correspond to any of those previously described and the media player 752 may correspond to the one shown in FIG. 7. As shown, the input device 750 includes a housing 754 and a touch pad assembly 756. The media player 752 includes a shell or enclosure 758. The front wall 760 of the shell 758 includes an opening 762 for allowing access to the touch pad assembly 756 when the input device 750 is introduced into the media player 752. The inner side of the front wall 760 includes a channel or track 764 for receiving the input device 750 inside the shell 758 of the media player 752. The channel 764 is configured to receive the edges of the housing 754 of the input device 750 so that the input device 750 can be slid into its desired place within the shell 758. The shape of the channel has a shape that generally coincides with the shape of the housing 754. During assembly, the circuit board 766 of the touch pad assembly 756 is aligned with the opening 762 and a cosmetic disc 768 and button cap 770 are mounted onto the top side of the circuit board 766. As shown, the cosmetic disc 768 has a shape that generally coincides with the opening 762. The input device may be held within the channel via a retaining mechanism such as screws, snaps, adhesives, press fit mechanisms, crush ribs and the like.

FIG. 13 is a simplified block diagram of a remote control 780 incorporating an input device 782 therein. By way of example, the input device 782 may correspond to any of the previously described input devices. In this particular embodiment, the input device 782 corresponds to the input device shown in FIGS. 5 and 6, thus the input device includes a touch pad 784 and a plurality of switches 786. The touch pad 784 and switches 786 are operatively coupled to a wireless transmitter 788. The wireless transmitter 788 is configured to transmit information over a wireless communication link so that an electronic device that has receiving capabilities may receive the information over the wireless communication link. The wireless

transmitter 788 may be widely varied. For example, it may be based on wireless technologies such as FM, RF, Bluetooth, 802.11 UWB (ultra wide band), IR, magnetic link (induction) and/or the like. In the illustrated embodiment, the wireless transmitter 788 is based on IR. IR generally refers to wireless technologies that convey data through infrared radiation. As such, the wireless transmitter 788 generally includes an IR controller 790. The IR controller 790 takes the information reported from the touch pad 784 and switches 786 and converts this information into infrared radiation, as for example using a light emitting diode 792.

Although the various exemplary embodiments have been fully described with reference to the accompanying drawings, it is to be noted that various changes and modifications will become apparent to those skilled in the art. Such changes and modifications are to be understood as being included within the scope of the subject matter defined by the appended claims.

WHAT IS CLAIMED IS:

1. A device comprising:

a moveable platform comprising a location detector configured to detect the location of an object relative to the platform and configured to move between a first position and at least a second position,

a flexible member centrally positioned relative to the platform and configured to bias the platform toward the first position, and

a movement detector configured to detect movement of the platform.

2. The device of claim 1, further comprising a processor configured to

generate a command associated with the location of an object relative to the platform and the movement of the platform.

3. The device of claim 1, wherein the movable platform comprises a touch

pad or touch screen configured to detect the location of an object in contact with the platform.

4. The device of claim 1, wherein the movable platform comprises a display device.

5. The device of claim 1, wherein the flexible member comprises a dome.

6. The device of claim 1, wherein the flexible member comprises a switch configured to detect movement of the platform.

7. The device of claim 1, wherein the device comprises a portable device.

8. The device of claim 1, wherein the device comprises at least one of a media player, a desktop computer, a laptop computer, a PDA, a cellular phone, or a remote control.

9. The device of claim 2, wherein the platform comprises multiple zones and the processor is configured to generate a command associated with a zone in which the force is applied.

5 10. A device comprising:
a platform,
a frame, the platform configured to gimbal relative to the frame,
a location detector configured to detect a location of an object relative to the
platform,
10 a movement detector configured to detect relative movement between the
platform and the frame, and
a processor configured to generate a command associated with the location of
the object relative to the platform and the relative movement between the platform
and the frame.

15 11. The device of claim 10, further comprising a flexible member centrally
positioned relative to the platform and configured to flexibly support the platform.

20 12. The device of claim 10, wherein the location detector and the platform are
structurally joined.

 13. The device of claim 10, wherein the location detector comprises at least
one sensor.

25 14. The device of claim 10, wherein the location detector comprises a
touchpad.

 15. The device of claim 10, wherein the location detector comprises a touch
screen.

30 16. The device of claim 10, wherein the movement detector comprises a
mechanical switch.

17. The device of claim 10, wherein the device comprises a portable device.

18. The device of claim 10, wherein the platform comprises multiple zones
5 and the processor is configured to generate a command associated with the location of the object relative to the zone.

19. The device of claim 10, wherein the device comprises at least one of a media player, a desktop computer, a laptop computer, a PDA, a cellular phone, or a
10 remote control.

20. A device comprising:
a first flexible member and a second flexible member;
a rigid platform positioned between the first flexible member and the second
15 flexible member;

a first input area configured to apply a force to the rigid platform and to flex the first flexible member when pressed;

a second input area configured to flex the second flexible member when pressed; and

20 a first movement detector configured to detect a movement of the first input area and a second movement detector configured to detect a movement of the second input area.

21. The device of claim 20, wherein the first flexible member and the second
25 flexible member are centrally positioned with respect to the first input area.

22. The device of claim 20, wherein the first input area comprises a location detector configured to detect the location of an object relative to the first input area.

23. The device of claim 21, further comprising a processor configured to generate a command associated with the location of an object relative to the first input area and the movement of the first input area.
30

24. The device of claim 22, wherein the first input area comprises multiple zones and the processor is configured to generate a command associated with a zone in which the force is applied.

5

25. The device of claim 20, wherein the flexible member and the second flexible member each comprise a dome.

26. The device of claim 20, wherein the device comprises a portable device.

10

27. The device of claim 20, wherein the device comprises at least one of a media player, a desktop computer, a laptop computer, a PDA, a cellular phone, or a remote control.

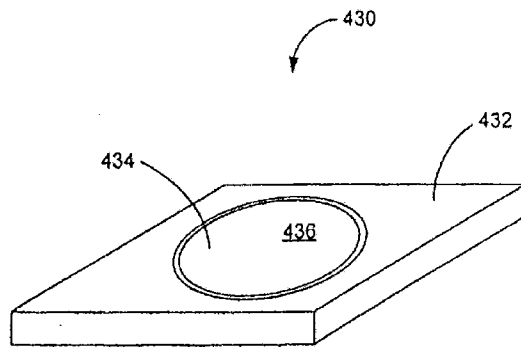


FIG. 1

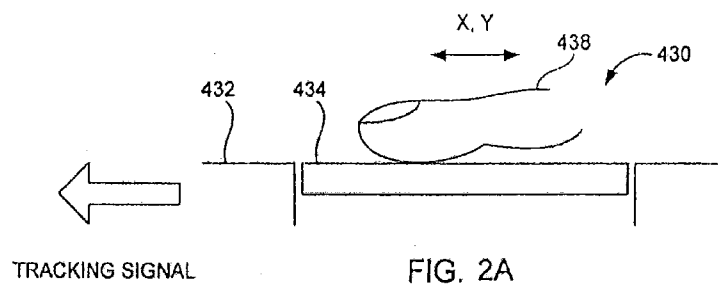


FIG. 2A

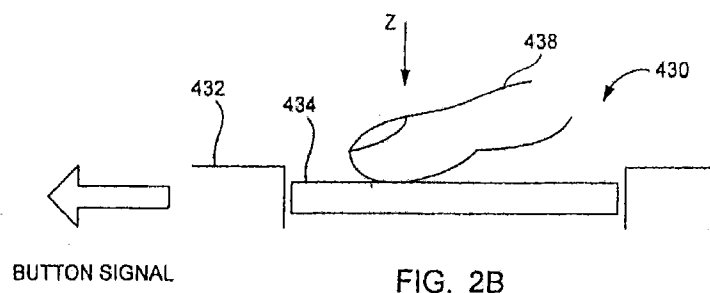


FIG. 2B

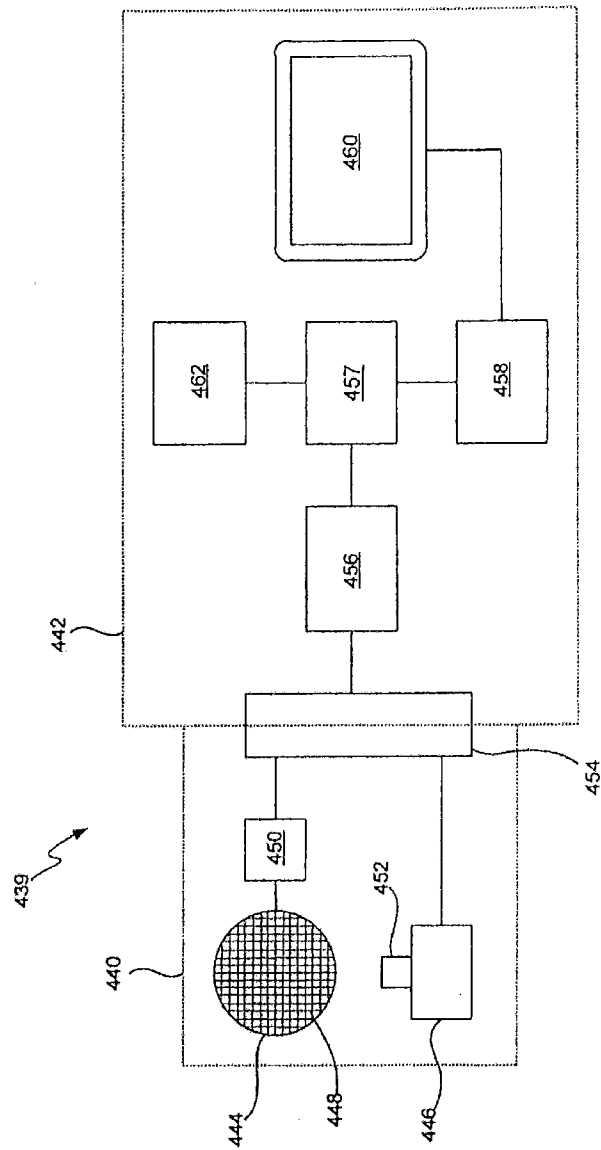
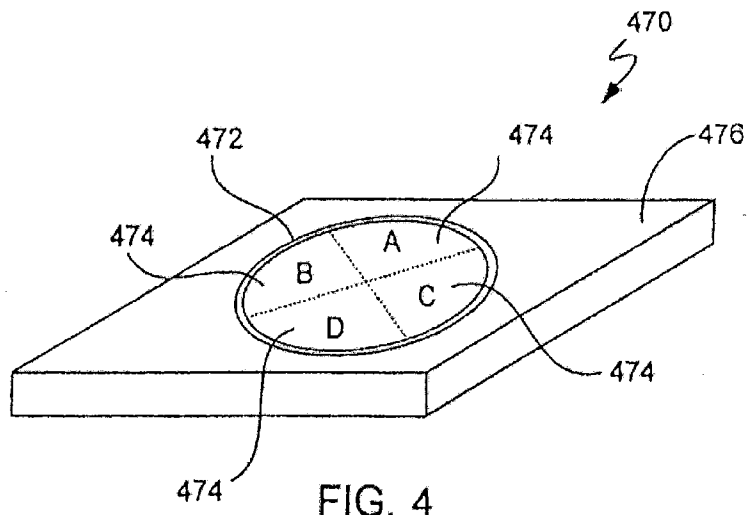


FIG. 3



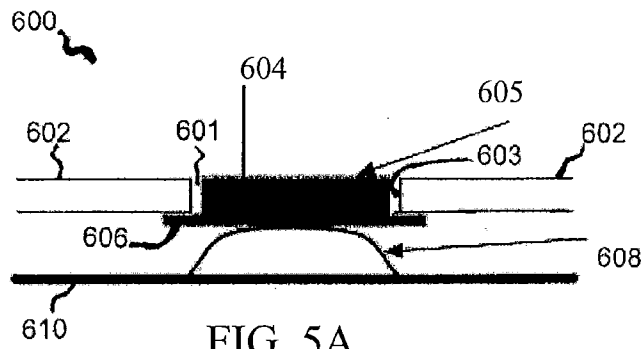


FIG. 5A

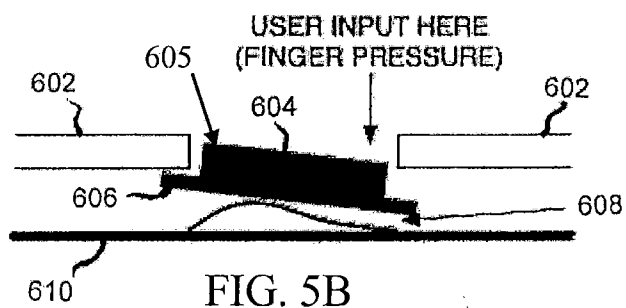


FIG. 5B

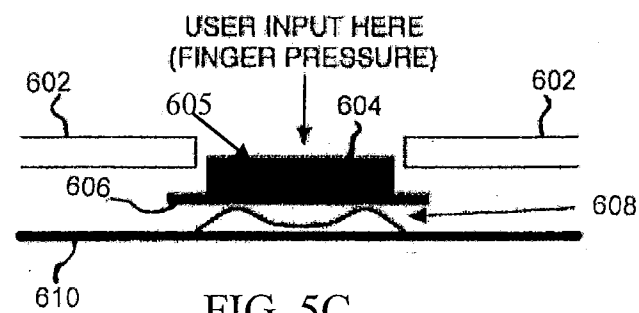


FIG. 5C

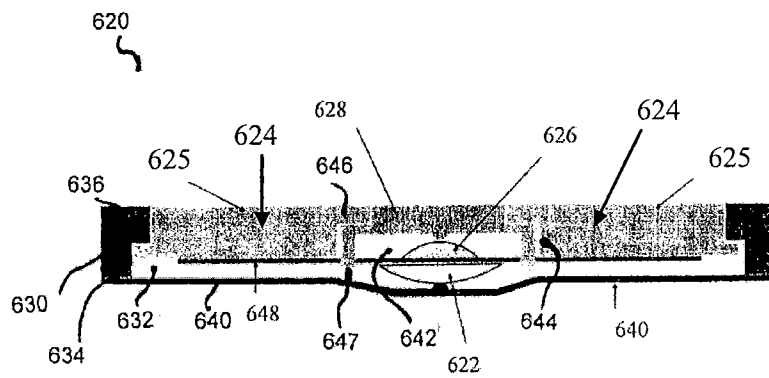


FIG. 6A

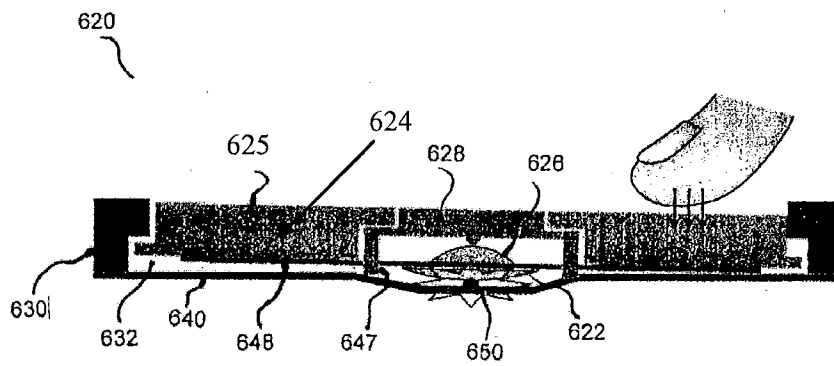


FIG. 6B

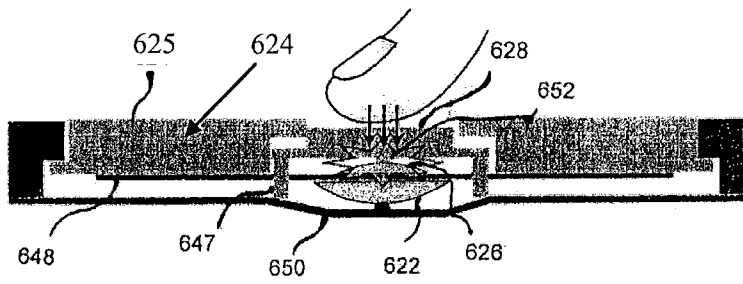
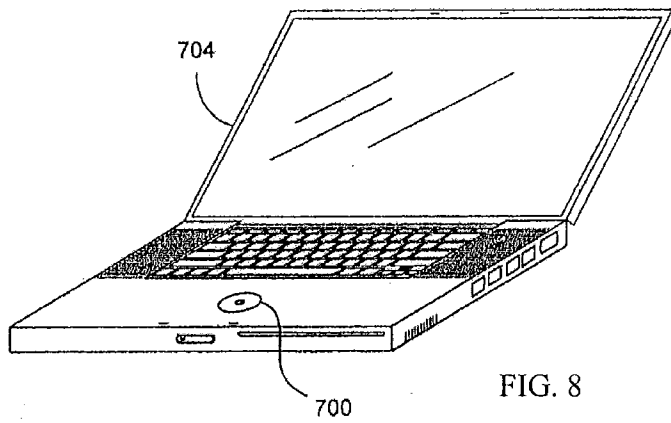
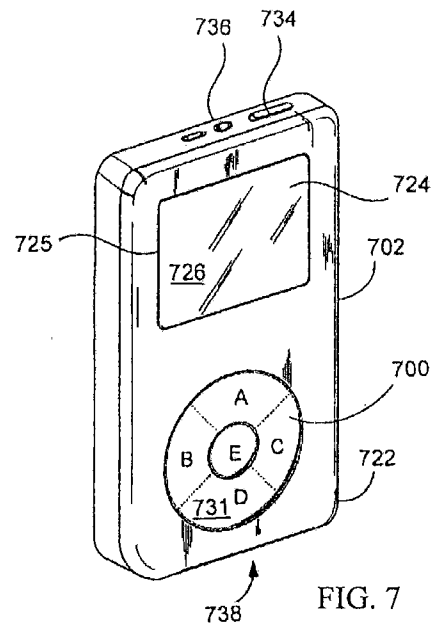


FIG. 6C



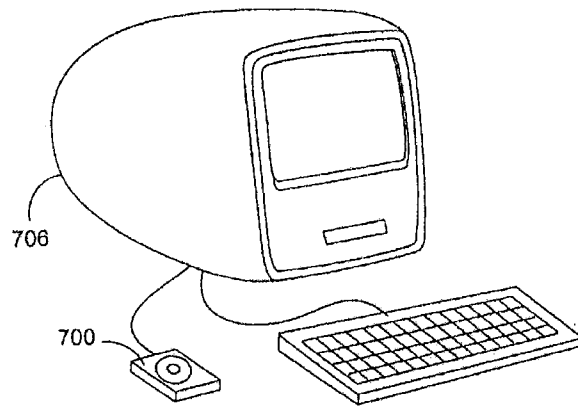


FIG. 9

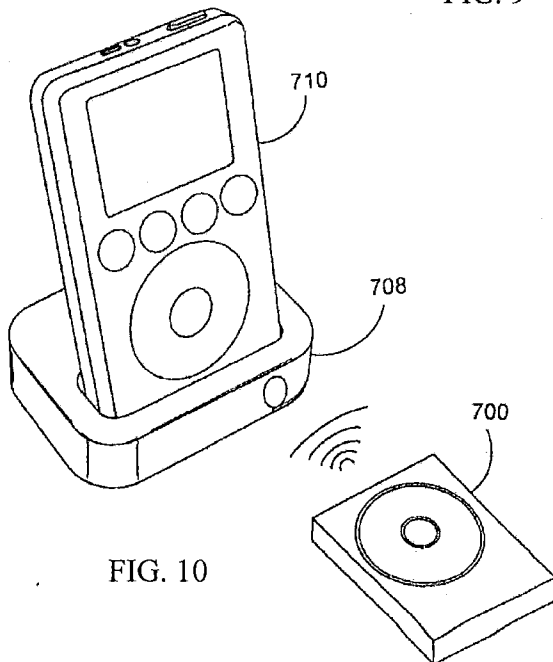
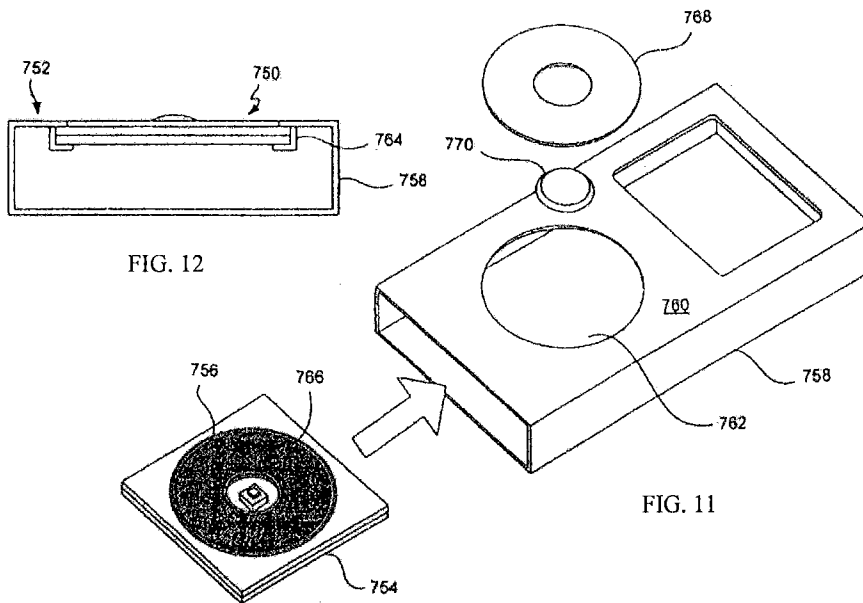


FIG. 10



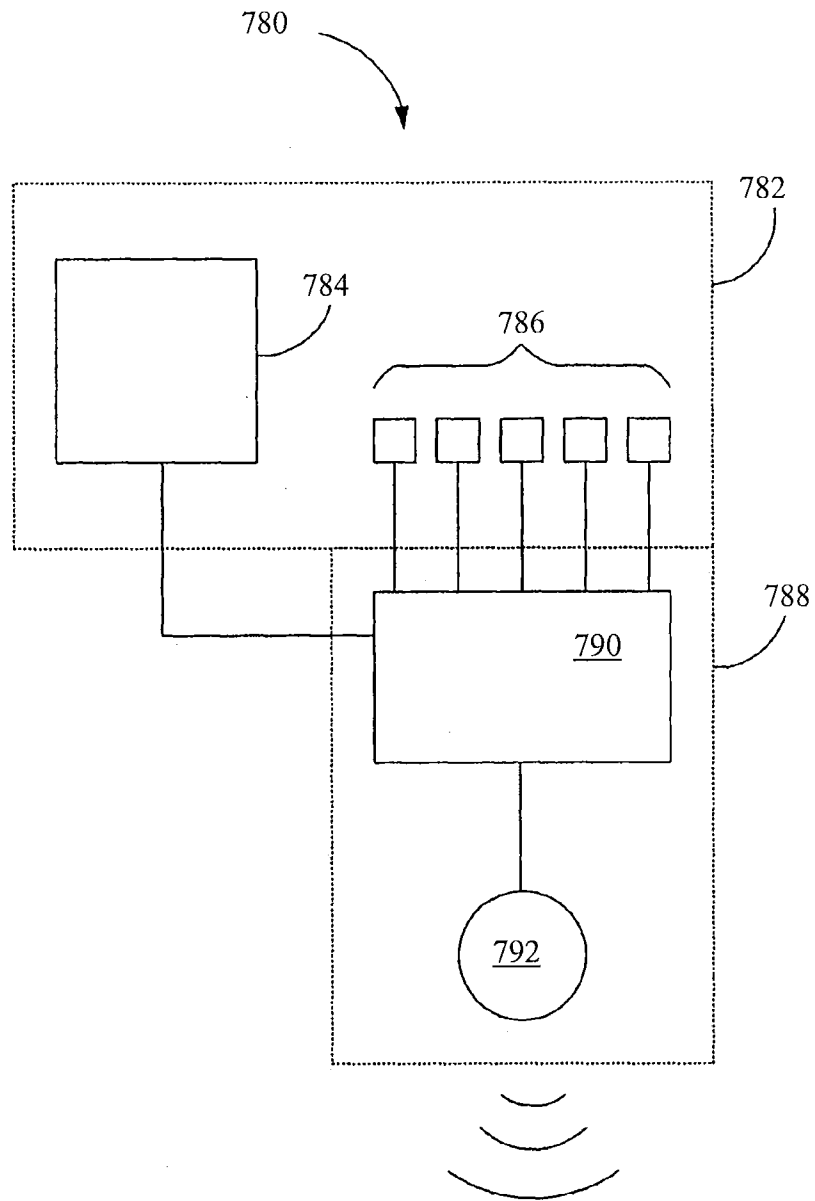


FIG. 13

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/080708

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01H25/04 G06F3/033

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G06F H01H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2004/107146 A (THEREFORE LTD [GB]; RIDDIFORD MARTIN [GB]) 9 December 2004 (2004-12-09)	1-19
Y	abstract; claims 1,8; figures 1-13 page 1, lines 5-15 page 2, lines 3-8 pages 4-9	22-24
X	US 6 243 080 B1 (MOLNE ANDERS L [US]) 5 June 2001 (2001-06-05)	1-19
Y	abstract; claims 1-13; figures 1-5 column 2, lines 5-45 column 3, lines 15-40 column 4, lines 33-50 columns 5-7	22-24
	----- -/--	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

27 February 2008

Date of mailing of the international search report

12/03/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Köhn, Andreas

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2007/080708

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 691 263 A (APPLE COMPUTER [US]) 16 August 2006 (2006-08-16)	1-19
Y	abstract; claim 1; figures 1-18 paragraph [0012] paragraphs [0014] - [0018] paragraphs [0022] - [0027] paragraphs [0037], [0038], [0041] paragraph [0077]	22-24
X	US 6 198 054 B1 (JANNIERE ALAIN [FR]) 6 March 2001 (2001-03-06)	20,21, 25-27
Y	abstract; figures 5-8 column 1, lines 10-15 column 2, lines 47-67 column 3, lines 1-6 column 4, lines 28-46	22-24
X	WO 03/090008 A (BADARNEH ZIAD [NO]; HANSEN BENEDICT J M [NO]) 30 October 2003 (2003-10-30)	20,21, 25-27
Y	abstract; figures 7h-7k page 1, lines 10-14 page 9, lines 6-12	22-24
A	WO 2005/019987 A (APPLE COMUTER INC [US]; ZADESKY STEPHEN PAUL [US]; LYNCH STEPHEN BRIAN) 3 March 2005 (2005-03-03) abstract; figures 1-20 page 4 pages 6-19	1-27
A	EP 1 467 392 A (JAPAN AVIATIONELECTRONICS INDU [JP] JAPAN AVIATION ELECTRON [JP]) 13 October 2004 (2004-10-13) abstract; figures 4-18 paragraphs [0060] - [0072] paragraphs [0092] - [0097]	20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2007/080708

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 2004107146	A	09-12-2004	GB 2402105 A	01-12-2004
US 6243080	B1	05-06-2001	NONE	
EP 1691263	A	16-08-2006	CA 2597500 A1	24-08-2006
			CN 1818840 A	16-08-2006
			GB 2423135 A	16-08-2006
			KR 20070110352 A	16-11-2007
			US 2006181517 A1	17-08-2006
			WO 2006088499 A1	24-08-2006
US 6198054	B1	06-03-2001	CN 1270699 A	18-10-2000
			DE 69811106 D1	06-03-2003
			DE 69811106 T2	13-11-2003
			EP 1025572 A1	09-08-2000
			FR 2770022 A1	23-04-1999
			WO 9921202 A1	29-04-1999
			JP 2001521265 T	06-11-2001
WO 03090008	A	30-10-2003	AU 2003235524 A1	03-11-2003
			NO 20025188 A	23-10-2003
WO 2005019987	A	03-03-2005	AU 2004267727 A1	03-03-2005
			CA 2535427 A1	03-03-2005
			CN 1926604 A	07-03-2007
			DE 202004021284 U1	24-05-2007
			EP 1656599 A2	17-05-2006
			JP 2007503052 T	15-02-2007
			KR 20060081405 A	12-07-2006
			TW 273467 B	11-02-2007
			US 2007052691 A1	08-03-2007
			US 2005052425 A1	10-03-2005
EP 1467392	A	13-10-2004	JP 2004327430 A	18-11-2004
			US 2004200699 A1	14-10-2004