



- (51) International Patent Classification: Not classified
- (21) International Application Number: PCT/US2012/026690
- (22) International Filing Date: 27 February 2012 (27.02.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 13/048,473 15 March 2011 (15.03.2011) US
- (71) Applicant (for all designated States except US): **BAKERS HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77210 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **CHEN, Songhua** [US/US]; 23015 Cable Terrace Drive, Katy, TX 77494 (US).
- (74) Agent: **BYNUM, Todd, A.**; Baker Hughes Incorporated, P.O. Box 4740, Houston, TX 77210-4740 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,

[Continued on next page]

(54) Title: PRECISION MARKING OF SUBSURFACE LOCATIONS

(57) Abstract: A method for performing a downhole operation includes marking at least one location in a wellbore using a magnetized material. The magnetized material may generate a magnetic field stronger than a magnetic field generated in the wellbore by a surrounding formation.

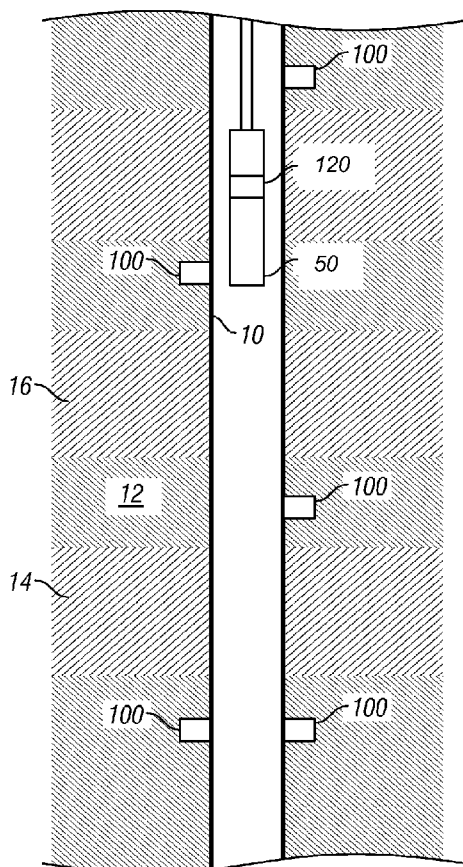


FIG. 1





SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- without international search report and to be republished upon receipt of that report (Rule 48.2(g))

**TITLE: PRECISION MARKING OF SUBSURFACE
 LOCATIONS**

BACKGROUND OF THE DISCLOSURE

1. Field of the Disclosure

[0001] This disclosure relates generally to devices, systems and methods for positioning and using equipment used in connection with subsurface operations.

2. Description of the Related Art

[0002] Boreholes drilled in subsurface formation can include complex three-dimensional trajectories and intersect various formations of interest. Moreover, these boreholes may be hundreds or thousands of meters in length. In many instances, it is desirable to accurately position a well tool in a well or accurately identify a feature along these boreholes. The present disclosure is directed to methods and devices for accurately identifying or locating a depth or location along a borehole.

SUMMARY OF THE DISCLOSURE

[0003] In aspects, the present disclosure provides a method for performing a downhole operation. The method may include marking at least one location in a wellbore using a magnetized material. The magnetized material may generate a magnetic field stronger than a magnetic field generated in the wellbore by a surrounding formation.

[0004] It should be understood that examples of the more important features of the disclosure have been summarized rather broadly in order that the detailed description thereof that follows may be better understood, and in order that the contributions to the art may be appreciated. There are, of

course, additional features of the disclosure that will be described hereinafter and which will form the subject of the claims appended hereto.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] For a detailed understanding of the present disclosure, references should be made to the following detailed description of the preferred embodiment, taken in conjunction with the accompanying drawings, in which like elements have been given like numerals and wherein:

[0006] FIG. 1 schematically illustrates a marker according to one embodiment of the present disclosure that is embedded along several locations along a wellbore in a subterranean formation; and

[0007] FIG. 2 schematically illustrates a reference marker according to one embodiment of the present disclosure; and

[0008] FIG. 3 shows a schematic view of a marking system conveyed by a non-rigid carrier according to one embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE DISCLOSURE

[0009] The present disclosure, in one aspect, relates to devices and methods for estimating depth and/or identifying a location along a borehole. The present disclosure is susceptible to embodiments of different forms. There are shown in the drawings, and herein will be described in detail, specific embodiments of the present disclosure with the understanding that the present disclosure is to be considered an exemplification of the principles of the disclosure, and is not intended to limit the disclosure to that illustrated and described herein.

[0010] Referring initially to **FIG. 1**, there is shown a wellbore **10** intersecting a formation **12**. In embodiments, one or more markers **100** are positioned along the wellbore **10**. The markers **100** operate as a reference object or device that may assist in locating, orienting and/or positioning one or more tools deployed in the wellbore **10**. The markers **100** may be positioned in a wellbore tubular (e.g., casing, liner, production tubing, etc.), in the earth of an adjacent formation, in wellbore equipment (e.g., sandscreen, packers, etc.), in wellbore

materials fluids (e.g., cement, gravel packs, etc.) or any other desired wellbore location. The wellbore **10** may be for hydrocarbon recovery, geothermal application, water production, tunnels, mining operations, or any other uses.

[0011] As will be discussed in greater detail below, the markers **100** may be used for precision depth measurement during wireline logging activities and / or for positioning of logging or formation tester/sampling tools, such as formation tester probe(s) and/or packers. By marking a target location with the marker **100**, formation fluid samples may be taken by tools that are precisely stopped at a desired location. Embodiments of the present disclosure provide a compact, high-precision depth positioning device that delivers straightforward results, instead of relying on methods, such as a reference log interpretation which may be subject to interpretation.

[0012] Referring now to **Fig. 2**, there is shown one embodiment of a marker **100** that exhibits a functionally effective magnetic contrast with a surrounding formation. By “functionally effective” magnetic contrast, it is meant that the magnetic signature of the marker **100** is discernable in quality and strength over magnetic fields associated with the surrounding formation. In one embodiment, the marker **100** may be formed as a microchip that may include a magnetic material **102** that is mounted on a substrate **104**. The magnetic material **102** may be covered by one or more coatings **106**. The coating **106** may be magnetically transparent and may be used to partially or completely encapsulate and protect the marker **100**. Certain earth formations contain diamagnetic and paramagnetic minerals. Also, the formation may have ferromagnetic or ferromagnetic materials. Thus, embodiments of the present disclosure use material or materials that have significantly higher magnetic susceptibility in order to eliminate the ambiguity caused by fluctuation of rock mineral variations. Most commonly occurring minerals in sandstone and carbonate (quartz, feldspar, calcite, dolomite, halite, anhydrite, gypsum, and kaolinite), as well as reservoir fluids (crude oil and water), are diamagnetic. Clay minerals, on the other hand, often are paramagnetic with mass magnetic susceptibility ranging from 10^{-7} m³/kg (muscovite) to 10^{-6} m³/kg (siderite).

Some embodiments of the present disclosure may use a material that has at least a three-order of magnetic susceptibility contrast to distinguish from those of formation minerals. For example, nanoparticles that include spinel ferrites that exhibit magnetic susceptibility three orders of magnitude higher than that of siderite, reaching $40,700 \times 10^{-8} \text{ m}^3/\text{kg}$, may be used. Illustrative spinel ferrites (Fe_2O_4) include, but are not limited to, CoFe_3O_4 , MgFe_2O_4 , MnFe_2O_4 , $\text{CoCrFe}_2\text{O}_4$. In certain embodiments, the magnetic material may be in the form of superparamagnetic microspheres that incorporate nanometer-sized iron oxide crystals into micron-sized polymer particles. These materials may be solid and / or entrained in a fluid medium (e.g., liquid or gas).

[0013] While a generally rectangular marker is shown, it should be understood that the marker **100** may be formed as beads, rods, or any other suitable shape. Moreover, while a generally solid device is depicted, it should be appreciated that the magnetic material may be entrained in a liquid medium. Also, certain embodiments may incorporate nanosensor technology and / or MEM (micro-electromechanical) technology to form a compact depth marker. For example, these markers **100** may be formed on the scale of centimeters, millimeters, or smaller.

[0014] In some embodiments, the number of the markers **100** can be varied to form a unique sensitivity for a particular location along the wellbore **10**. Thus, for example, a first location may include one marker, a second location may include two markers, a third location may include three markers, etc. Thus, each location may be identified by a particular intensity, value, or relative value of magnetic susceptibility.

[0015] Referring still to **Fig. 2**, the marker **100** may use an electromagnetic (EM) signature, signal, or response. For example, instead of a magnetic material **102**, an EM marker may be a resonant circuit (RLC circuit) or a microwave (MW) resonant cavity device that may use either a conventional circuit or a nano-fabricated MEM device. The RLC circuit or the MW resonant cavity device may be tuned to a designated frequency. During the logging pass when the depth positioning is required, an EM signal emitter may emit

the EM signal with a frequency that is the same as or similar to the marking device's resonance frequency. As the emitter moves close to the marker, the resonance signal will be stronger and thus allow the marker to be located. Each marker can be tuned to a different resonant frequency. Thus, the emitter can be switched to a different frequency to precisely identify a specific marker. Such an embodiment may be useful when multiple markers are positioned in close proximity.

[0016] The marker **100** may be used to orient and/or position a wellbore tool with reference to a location parameter such as measured depth, true vertical depth, borehole highside, azimuth, etc. The orientation and/or position may also be with reference to a subsurface feature such as a production zone, a water zone, a particular point or region of interest in the formation, as well as features such as bed boundaries, fluid contacts between fluids (e.g., water and oil), unstable zones, etc.

[0017] Any number of methods and devices may be used to position or fix the marker **100** in the wellbore **10**. For example, the marker **100** may be physically embedded or planted in an earth formation making up a borehole wall. For example, the marker **100** may be pressed or injected into place. Also, an adhesive, a bonding agent, or another similar material may be used to secure the marker **100** in place. The marker **100** may also be secured to a wellbore tubular. For example, the marker **100** may be attached to an inner wall of a casing. In other arrangements, the marker **100** may be installed in the wellbore tubular before the tubular is conveyed into the wellbore **10**. In certain embodiments, the markers **100** may be placed in the pores of an earth formation.

[0018] It should be appreciated that using the markers **100** to identify one or more locations may increase the precision by which tools can be positioned in the wellbore **10**. Non-limiting and illustrative uses will be described with reference to **FIG. 3**, which schematically represents a cross-section of the formation **12** intersected by a drilled wellbore **10**. A formation evaluation tool **50** may be suspended within the wellbore **10** by a carrier **52**. The carrier **52** may be a data-conducting wireline supported by a derrick **56**. A control panel

60 communicates with the tool **50** through the carrier **52**. Personnel may use the control panel **60** to transmit electrical power, data/command signals, and to control operation of the tool **50**. The tool **50** may include a marker detector **120** that is configured to locate the markers **100**. The detector **120** may be a low-field magnetic susceptibility meter or a magnetometer logging device. Generally speaking, the detector **120** may be any device that generates information in response to a magnetic field. The information may be a value, a relative value, a change in a value, etc.

[0019] The markers **100** may have been positioned in the wellbore **10** during prior wellbore operations. For instance, markers **100** emitting a unique signal may have been previously positioned during drilling operations to identify the location of features of interest to well owners and operator such as potential pay zones, depleted zones, unstable zones, "thief" zones (e.g., zones having relatively low pore pressures), etc. The markers **100** may have been positioned during completion operations to identify locations of perforating tools, screens, gravel packs, zone isolation equipment such as packers, production tubing, artificial lift pumps, etc.

[0020] In one mode of use, the tool **50** may be conveyed along the wellbore **10** while surface personnel monitor the detector **120**. For example, the detector **120** may transmit signals representative of a detected magnetic field to the surface. Personnel may evaluate a received signal to determine the position of the tool **120**. For formation sampling operations, personnel may monitor the information provided by the detector **120** to identify a specific zone from which a sample is to be taken. Such a zone may be uniquely identified by a specially configured magnetic marker **100**.

[0021] In another mode of use, the tool **50** may be conveyed along the wellbore **10** while a downhole controller monitors the detector **120** in a closed loop fashion. For example, the downhole controller may have pre-programmed instructions that compare signals from the detector **120** with a programmed reference signal or signals. The downhole controller may be programmed to execute one or more tasks upon detecting a specified condition.

[0022] It should be appreciated that this positioning method eliminates the uncertainty of other positioning methods, such as those that use the synchronization of two logging passes, which can be compromised by cable tension variations. Furthermore, by using a stationary magnetic signal as a positioning reference frame, positioning errors due to cable creeping may be minimized or eliminated. Additionally, laminated thin-beds can be more accurately located with a stationary marker than by techniques such as those using accelerometer measurements, gamma ray logs, or microresistivity logs.

[0023] Embodiments of the present disclosure may also be configured for use during drilling operations. For example, the marker and marker detector may be deployed with drill string that includes a drilling assembly. The drill string may include jointed tubular, coiled tubing, casing joints, liner joints, tubular with embedded signal conductors, or other equipment used in well completion activities.

[0024] The term "carrier" as used herein means any device, device component, combination of devices, media and/or member that may be used to convey, house, support or otherwise facilitate the use of another device, device component, combination of devices, media and/or member. Illustrative "carriers" include wirelines, wireline sondes, slickline sondes, e-lines, jointed drill pipe, coiled tubing, wired pipe, casing, liners, drop tools, etc.

[0025] The foregoing description is directed to particular embodiments of the present disclosure for the purpose of illustration and explanation. It will be apparent, however, to one skilled in the art that many modifications and changes to the embodiment set forth above are possible without departing from the scope of the disclosure. It is intended that the following claims be interpreted to embrace all such modifications and changes.

THE CLAIMS

We claim:

1. A method for performing a downhole operation, comprising:
 - marking at least one location in a wellbore using a magnetized material, the magnetized material generating a magnetic field stronger than a magnetic field generated in the wellbore by a surrounding formation.
2. The method of claim 1, wherein the formation includes at least one of: (i) a diamagnetic material, and (ii) paramagnetic material.
3. The method of claim 1, wherein the magnetized material is at least partially formed of a material having a magnetic susceptibility greater than the surrounding formation.
4. The method of claim 1, wherein the magnetized material are at least partially formed as nanoparticles.
5. The method of claim 1, wherein the at least one location includes a plurality of locations, each of the locations having a magnetized material generating a magnetic field having at least one unique characteristic.
6. The method of claim 1, further comprising:
 - estimating a parameter relating to the magnetized material; and
 - using the estimated parameter to locate the magnetized material.
7. The method of claim 6, wherein the estimated parameter is a strength of the magnetic field.
8. The method of claim 1, wherein the magnetized material is positioned in one of: (i) a wellbore tubular, (ii) a cement, (iii) a wellbore wall and (iv)

inside the pore space in the rock formation in the immediate vicinity of the borehole wall.

9. The method of claim 1, wherein the magnetized material includes at least a spinel ferrite.

10. An apparatus for performing a downhole operation, comprising:
- an magnetized material configured to be positioned along a wellbore, the magnetized material being further configured to generate a magnetic susceptibility greater than a magnetic susceptibility of a surrounding formation.

11. The apparatus of claim 10, wherein the magnetic susceptibility is stronger than a magnetic susceptibility associated with one of: (i) a diamagnetic material, and (ii) a paramagnetic material.

12. The apparatus of claim 10, wherein the magnetized material is at least partially formed of a material having a magnetic susceptibility greater than the surrounding formation.

13. The apparatus of claim 10, wherein the magnetized material includes at least one nanoparticle.

14. The apparatus of claim 10, further comprising a substrate on which the at least one nanoparticle is disposed, and a coating securing the at least one nanoparticle to the substrate.

15. The apparatus of claim 10, wherein the magnetized material includes at least a spinel ferrite.

16. An apparatus for performing a downhole operation, comprising:

a plurality of markers configured to be positioned along a wellbore, each marker being configured to generate a unique signal in response to a received signal.

17. The apparatus of claim 16, wherein each marker resonates in response to the received signal.

18. The apparatus of claim 16, wherein at least one of the plurality of markers includes one of: (i) an RLC circuit, and (ii) a microwave resonant cavity device.

19. The apparatus of claim 16, wherein the unique signal is an electromagnetic signal.

1/2

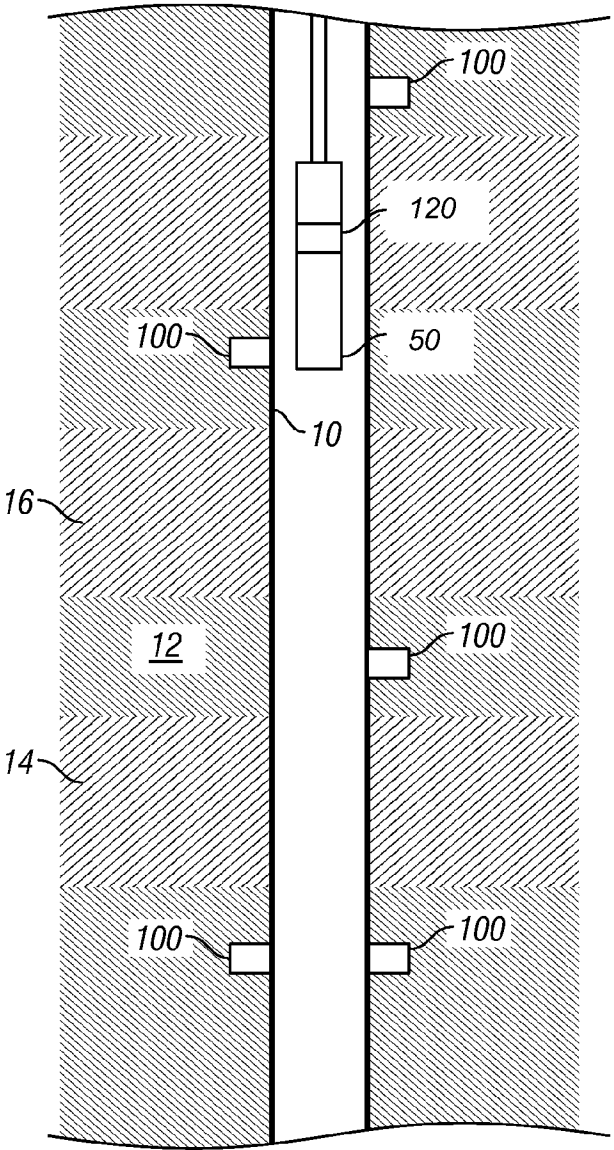


FIG. 1

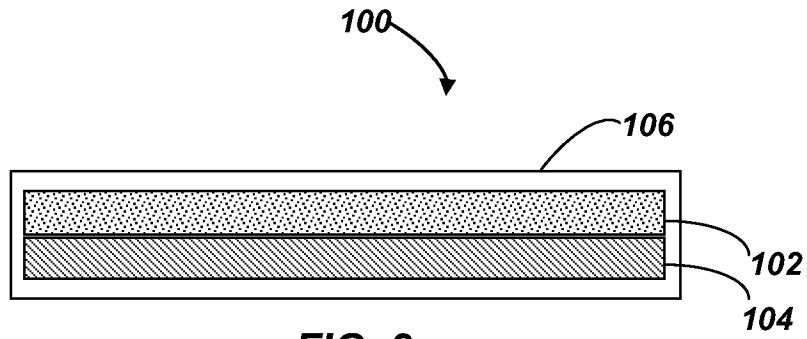


FIG. 2

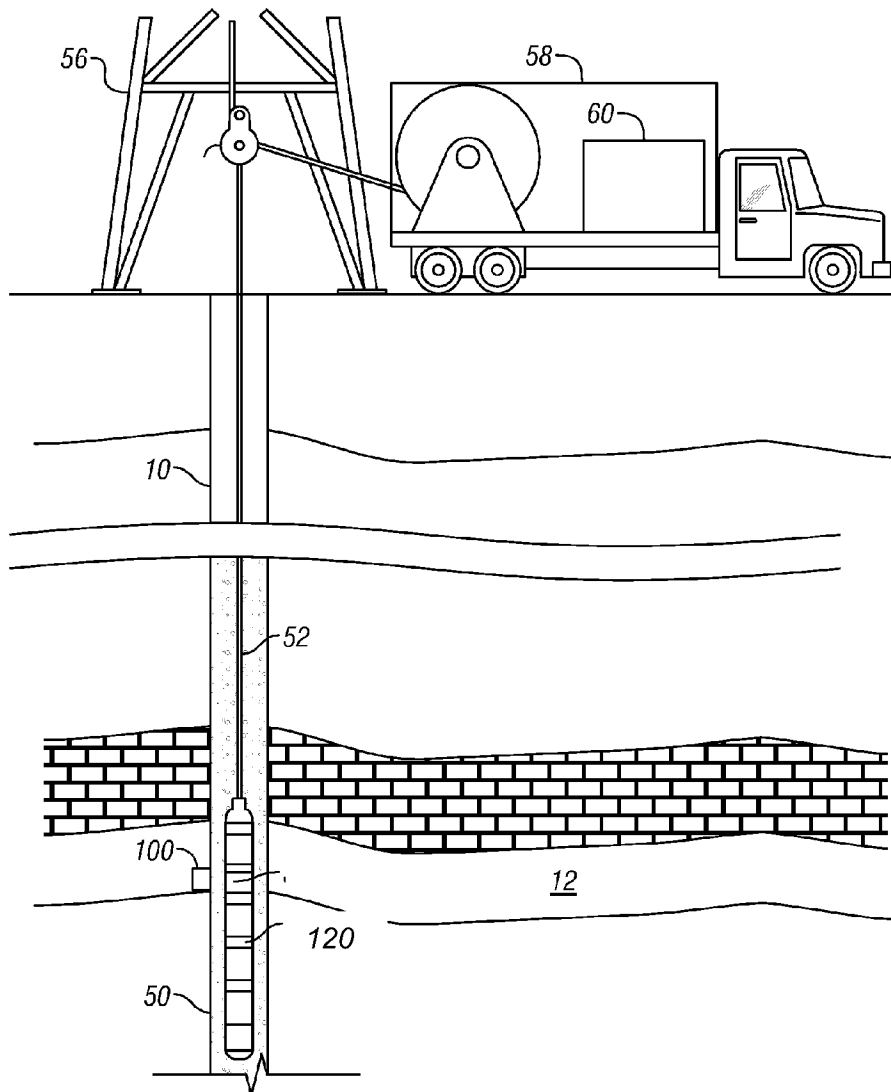


FIG. 3