

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 June 2002 (20.06.2002)

PCT

(10) International Publication Number
WO 02/48862 A2

(51) International Patent Classification⁷: **G06F 9/00**

(21) International Application Number: PCT/US01/43638

(22) International Filing Date:
13 November 2001 (13.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/738,913 13 December 2000 (13.12.2000) US

(71) Applicant: **INTEL CORPORATION** [US/US]; (A Delaware Corporation), 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report


(72) Inventor: **KOSARAJI, Chakravarthy**; 1083 Rembrandt Drive, Sunnyvale CA 94087 (US).

(74) Agents: **MALLIE, Michael, J.** et al.; Blakely, Sokoloff, Taylor & Zafman, 7th floor, 12400 Wilshire Boulevard, Los Angeles, CA 90025 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD AND AN APPARATUS FOR A RE-CONFIGURABLE PROCESSOR

200

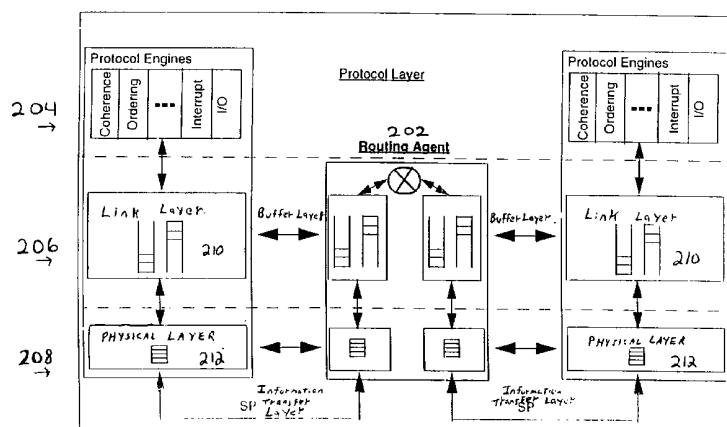

(57) Abstract: The invention generally relates to a method, apparatus, and system to change one or more communication pathways in a processor without changing a physical component layout in the processor. For example, in an embodiment, the invention generally relates to a routing agent to change one or more communication pathways in a processor without changing the physical component layout in the processor. In an embodiment, the invention generally relates to the following method. The method comprises sending a control signal to one or more components within a processor to change one or more communication pathways in the processor without changing the physical component layout in the processor. In an embodiment, the invention generally relates to a method of changing the bandwidth between a processor and a device exterior to the processor without changing the physical component layout in the processor.

A METHOD AND AN APPARATUS FOR A RE-CONFIGURABLE PROCESSOR

FIELD OF THE INVENTION

[0001] This invention generally relates to changing the bandwidth between a device and
5 a processor. More particularly this invention relates to an apparatus and method capable
of changing the bandwidth between a device and a processor without changing the
physical component layout in the processor.

BACKGROUND OF THE INVENTION

[0002] Joining several processors in parallel increases processing capacity. Typically,
10 any number from two to eight processors may be joined in parallel. Generally, multiple
parallel processors are joined together on a shared bus. Figure 1 illustrates a four
processor (4P) architecture used in conjunction with a shared bus. Four processors,
Processor 1, Processor 2, Processor 3, and Processor 4, connect to a shared bus, which in
turn connects to the Northbridge chipset. The Northbridge chipset further connects to the
15 Southbridge chipset and external memory. For example, a Pentium™ processor may
employ the shared bus architecture illustrated in figure 1. However, a point-to point
architecture, typically, provides a higher bandwidth than does a shared bus architecture.

[0003] In a shared bus architecture, multiple devices all share the same bus and must
follow an order and protocol to use the bus. In contrast, a point-to-point bus architecture
20 provides an uninterrupted connection between two separate devices. Thus, in general, a
point-to-point bus creates a higher bandwidth between two separate devices. A higher
bandwidth can have the beneficial effect of yielding an increased performance from a
single processor or group of processors. For example, if a 48-bit connection exists
between two devices, then transactions occur between the two device three times faster
25 than if only a 16-bit connection exists between the two devices. However, a point-to-point
bus architecture may have a disadvantage because the architecture provides an
uninterrupted connection between two separate devices. Thus, if at any given time, light
transfers of information occur between the two devices, then the excess bandwidth
capacity is essentially wasted.

30 [0004] For example, if a customer is using his or her computer system to run both a
workstation application and a server application, then the customer may not be achieving
peak performance from the hardware in his computer system. In a server application a

heavy exchange of information occurs between processors. Thus, the manufacturer creates a high bandwidth connection between each processor in the system. Yet, if for example a customer wants to use his computer system for an application, which involves a heavy exchange of information between processors and a chipset, such as a workstation application, then the manufacturer creates a high bandwidth connection between each processor and the chip in the system. However, if the customer has a computer system which has a high bandwidth connection between the processor(s) and the chipset, but chooses to currently run a server application on this system, then the customer may suffer poor performance from the server application and waste the excess bandwidth between the chipset and processor(s).

BRIEF DESCRIPTION OF THE DRAWINGS

- [0005] The drawings refer to the invention in which:
- [0006] figure 1 illustrates a four processor (4P) architecture used in conjunction with a shared bus;
- [0007] figure 2 illustrates an embodiment of a processor having a routing agent, a protocol layer, a buffer layer, and an information transfer layer;
- [0008] figure 3 illustrates a two processor point-to-point architecture having a 16-bit point-to-point connection between: 1) an input-output component and the first processor; as well as 2) the input-output component and the second processor;
- [0009] figure 4 illustrates a two processor point-to-point architecture having a 32-bit point-to-point connection between: 1) the input-output component and the first processor; as well as 2) the input-output component and the second processor;
- [0010] figure 5 illustrates a four processor point-to-point architecture having a 16-bit point-to-point connection between an input-output component and each of the four processors;
- [0011] figure 6 illustrates an embodiment of the routing agent controlling the inbound communication pathways in an embodiment of the information transfer layer;
- [0012] figure 7 illustrates an embodiment of the routing agent controlling the inbound communication pathways in an embodiment of the buffer layer;
- [0013] figure 8 illustrates an embodiment of the routing agent controlling the outbound communication pathways in an embodiment of the buffer layer; and
- [0014] figure 9 illustrates an embodiment of the routing agent controlling the

communication pathways in an outbound information transfer layer.

[0015] While the invention is subject to various modifications and alternative forms, specific embodiments thereof have been shown by way of example in the drawings and will herein be described in detail. The invention should be understood to not be limited to the particular forms disclosed, but on the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention.

DETAILED DISCUSSION

[0016] A person skilled in the art will appreciate that various deviations from the described embodiments of the invention are possible and that many modifications and improvements may be made within the scope and spirit thereof. For example, in several described embodiments specific clock speeds, specific number of data bits, specific number of layers, a specific number of components, etc. are used within this description to illustrate embodiments of the invention. However, a person skilled in the art will appreciate that embodiments of this invention specifically include various deviations from the specific number given in a particular embodiment described herein for illustrative purposes.

[0017] A routing agent may be used with a processor in a point-to-point architecture to allow a customer to change the bandwidth, or number of bus lines and clock speed, between two devices. A point-to-point bus architecture provides an uninterrupted connection between two separate devices. Generally, a packet based protocol transfers information in a point-to-point bus architecture. The routing agent may alter the effective bandwidth between a processor and a device exterior to the processor by changing one or more communication pathways in the processor without changing a physical component layout in the processor. Bandwidth is the total amount of information that can be transferred within a given time period between two devices. In an embodiment, the manufacturer or the customer may change the number of ports linked between the two devices to increase the bandwidth between the devices. In an embodiment, the manufacturer or the customer may add additional processors linked to a device by changing the number of ports linked between a first processor and the device exterior to the first processor.

[0018] Figure 2 illustrates an embodiment of a processor **200** having a routing agent

202, a protocol layer 204, a buffer layer 206, and an information transfer layer 208. In one embodiment, the processor 200 has a routing agent 202 and three layers, the protocol layer 204, a buffer layer 206 such as one or more link layers 210, and an information transfer layer 208 such as one or more physical layers 212. The routing agent 202 changes the communication pathways within the physical layer 212 and link layer 210 without changing the physical component layout in the processor 200. The physical layer 212 carries out the actual physical transfer of information to and from other devices. The link layer 210 performs liaison functions between the higher functions of the protocol layer 204 and the physical layer 212. The protocol layer 204 processes requests, responses, and data transfers.

[0019] In an embodiment, the routing agent 202 may be internal or external to the processor 200. In an embodiment, a single routing agent 202 controls the communication pathways in all the layers of the processor 200. In an alternative embodiment, multiple routing agents 202 exist to control the communication pathways. The routing agent 202 may be a combination of hardware and software. The routing agent 202 may have several functions such as sending an enable/disable signal to one or more communication pathway switching devices and sending a signal to change various clocking speeds. The buffer layer 206 may have one or more inbound communication pathways. The buffer layer 206 may have one or more outbound communication pathways. The information transfer layer 208 may have one or more inbound communication pathways. The information transfer layer 208 may have one or more outbound communication pathways.

[0020] Figure 3 illustrates a two processor point-to-point architecture 300 having a 16-bit point-to-point connection between: 1) an input-output component 302 and the first processor 304; as well as 2) the input-output component 302 and the second processor 306. A first processor 304 having four 16-bit ports 308, 310, 312, 314 connected to the processor may have three 16-bit ports 308, 310, 312 connected to a second processor 306 and one 16-bit port connected 314 to the input-output component 302. In an embodiment, the input-output component maybe a bridge, a memory, a chipset or similar component. Thus, a 48-bit bandwidth connection exists between the first processor 304 and the second processor 306. Further, the first processor 304 and the second processor 306 have a 16-bit bandwidth connection to the input-output component 302. The routing agent can change the communication pathways in the first processor 304 such that the processor now has

two 16-bit point-to-point (32-bit) connections to the second processor **306** and a 32-bit connection to the input-output component **302**.

[0021] Figure 4 illustrates a two processor point-to-point architecture **400** having a 32-bit point-to-point connection between: 1) the input-output component **402** and the first processor **404**; as well as 2) the input-output component **402** and the second processor **406**. A first processor **404** having four 16-bit ports **408, 410, 412, 414** connected to the processor may have two 16-bit ports connected to a second processor **406** and two 16-bit ports connected to the input-output component **402** such as a chip set. Thus, a 32-bit bandwidth connection exists between the first processor **404** and the second processor **406**. Further, the first processor **404** and the second processor **406** have a 32-bit bandwidth connection to the input-output component **402**. In the 32-bit mode as compared to 16-bit mode, the bandwidth between the input-output component **402** and the first processor **404** as well as the input-output component **402** and the second processor **406** has effectively doubled. In 16-bit mode, eight clock cycles must occur to transfer eight 16-bit packets (128 bits) of information between each processor and the input-output component. In 32-bit mode, four clock cycles must occur to transfer four 32-bit packets (128 bits) of information between each processor and the input-output component.

[0022] Figure 5 illustrates an embodiment of a four processor point-to-point architecture **500** having a 16-bit point-to-point connection between an input-output component **502** and each of the four processors **504, 506, 508, 510**. The four processors are processor 1 **504**, processor 2 **506**, processor 3 **508**, and processor 4 **510**. In an embodiment, each of the four processors **504, 506, 508, 510** employs an embodiment of the arbiter. The processors **504, 506, 508, 510** have a flexible architecture that coordinates with the arbiter to allow a variety of uses for these processors **504, 506, 508, 510**. For example, the four processor architecture **500** may be substituted with the two processor architecture employing a 32-bit connection with the input-output component **502**. Thus, the processing power of this arrangement has effectively doubled because four processors will process the data coming from the input-output component **502**. Thus, an embodiment of the arbiter allows the same input-output component **502** to work with either a two processor architecture, a four processor architecture **500** or other similar multiple processor architecture.

[0023] A programmable knob setting in a configuration register directs the routing agent to establish the customer's current desired configuration such as a 16-bit, 32-bit, or 48-bit

point-to-point connection between the processor and a device exterior to the processor. In an embodiment, the device exterior to the processor may be another processor, an input-output device, a bridge or other similar device. In an embodiment, the customer programs the knob setting to establish the bandwidth connections between the processor and devices exterior to the processor. Based on the knob setting of the configuration register, the routing agent enables and disables communication pathways within the information transfer layer and buffer layer. The routing agent may change the communication pathways to increase or decrease the number of processor ports, and thus, the effective bandwidth, between a processor and another device.

[0024] Typically, in a server, a large exchange of data occurs between a first processor and a second processor. Thus, having a 48-bit point-to-point connection between these two devices greatly decreases the time required to complete each transaction between the devices. Typically, in a workstation, a large exchange of data occurs between a each processor and the input-output component. Thus, having a 32-bit or 48-bit point-to-point connection between these devices greatly decreases the time required to complete each transaction between the devices. Those ordinarily skilled in the art will recognize the specific components illustrated in the following embodiments may be deviated from and still be within the spirit of this invention.

[0025] Figure 6 illustrates an embodiment of the routing agent 602 controlling the inbound communication pathways in an embodiment of the information transfer layer 600. The first physical layer (SPX0) 604 has a first port 606; nine 16-bit registers, a first register 608, a second register 610, a third register 612, a fourth register 614, a fifth register 616, a sixth register 618, a seventh register 620, an eighth register 622, and a ninth register 624; first 64-bit register 626; a communication pathway switching device 628 such as a multiplexer; an embodiment of the routing agent 602; a first time delay 609, and a first flip flop 630. The second physical layer (SPX1) 632 has a second port 634; nine 16-bit registers, a tenth register 636, an eleventh register 638, a twelfth register 640, a thirteenth register 642, a fourteenth register 644, a fifteenth register 646, a sixteenth register 648, a seventeenth register 650, and an eighteenth register 652; a second 64-bit register 653; and a second time delay 637, and a second flip flop 656. A multiplexer is a device that merges several low-speed transmissions into one high-speed transmission and vice versa. The configuration register 654 informs the routing agent 602 whether a

particular component exterior to the processor should be a 16-bit, 32-bit or 48-bit-point-to-point connection.

[0026] If the configuration register **654** is programmed for a 16-bit point-to-point connection to the input-output component, then the routing agent **602** directs each physical layer to act independently of the other physical layers. In an embodiment of a four processor architecture for example, the first port **606** connects to a second processor and the second port **634** links up to an input-output component. The first register **608** receives an inbound 16-bit packet of information through the first port **606**. This 16-bit packet of information is sent from the first register **608** through a first time delay **609** to be stored in the second register **610**. The first register **608** receives another inbound 16-bit packet of information through the first port **606**. The first register **608** sends this second 16-bit packet of information to be stored in the third register **612**. The first physical layer **604** repeats this process until the second register **610** through the ninth register **624** are each storing 16-bit packets of information. The first communication pathway switching device **628** senses that these eight 16-bit (or 128-bits) of information are ready to be transferred to the first link layer through the first flip flop **630**. Upon the next clock cycle the 128-bits of information are transferred to the first link layer through the first flip flop **630**. In a similar manner but using the components of second physical layer **632**, the second physical layer **632** transfers 128-bits to the second link layer. However, the 128-bits of information that are transferred to the first link layer are unrelated to the 128-bits of information that are transferred to the second link layer. Thus, in our example the first 128-bits of information come through the first port **606** from a second processor. Similarly, the second 128-bits of information come through the second port **634** from the input-output component. The routing agent **602** enables the 128-bit path in the first communication pathway switching device **628**. The routing agent **602** disables the dual 64-bit path in the first communication pathway switching device **628**. The routing agent **602** enables the first flip flop **630** and the second flip flop **656**.

[0027] If the configuration register **654** is programmed for a 32-bit point-to-point connection, then the routing agent **602** gangs two physical layers to act together. The routing agent **602** disables the 128-bit path in the first communication pathway switching device **628**. The routing agent **602** enables the dual 64-bit path in the first communication pathway switching device **628**. The routing agent **602** enables the first flip flop **630** but

disables the second flip flop 656. The routing agent 602 increases the clocking speed for the first register 608 through the eighteenth register 652 by a factor of two. The first physical layer 604 receives four 16-bit packets of information and stores the packets of information in the second register 610 through the fifth register 616. The second physical layer 632 receives four 16-bit packets of information and stores the packets of information in the eleventh register 638 through the fourteenth register 644. The first communication pathway switching device 628 senses that the first 64-bit register contains four 16-bit packets of information from the second register 610 through the fifth register 616. The first communication pathway switching device 628 senses that the second 64-bit register contains four 16-bit packets of information from the eleventh register 638 through the fourteenth register 644. Upon the next clock cycle, the 64-bits of information from the first 64-bit register and the 64-bits of information from the second 64-bit register are transferred up to the first communication pathway switching device 628 through the dual 64-bit path. The first communication pathway switching device 628 transfers the eight related 16-bit packets of information to the first link layer. Both the device exterior to the processor and the processor transfer the eight related 16-bit packets of information as if a 32-bit point-to-point connection exists between the processor and the device. The second link layer receives no signal because the second flip flop 656 is disabled. In a similar manner, the routing agent may gang three physical layers together to create a 48-bit point-to-point connection between the processor and the device.

[0028] Figure 7 illustrates an embodiment of the routing agent 702 controlling the inbound communication pathways in an embodiment of the buffer layer 700. The inbound communication pathway of the first link layer 704 has a first 128-bit register 706, a first response queue 708, a first request queue 710, and a first communication pathway switching device 712. The inbound communication pathway of the second link layer 714 has a second 128-bit register 716, a second response queue 711, a second request queue 713, and a second communication pathway switching device 716. The component makeup of the third link layer 718 and fourth link layer 720 are similar to the first link layer 704. The first link layer 704 through the fourth link layer 720 feed into a fifth communication pathway switching device 722, an embodiment of a routing agent 702, a fifth 128-bit register 724, a local address transaction tracker buffer (LATT) 726, a central data management buffer (CDM) 728, and a remote address transaction tracker buffer

(RATT) 730.

[0029] In an embodiment of the inbound buffer layer 700, if the configuration register 732 is programmed for a 32-bit point-to-point connection, then the routing agent 702 effectively gangs two link layers together. The first link layer 704 receives the eight
5 related 16-bit packets (128-bit) of information at twice the clock speed from the communication switching device in the first physical layer. The first link layer 704 stores the 128-bit packet of information in the first register 706. The 128-bit packet of information is routed appropriately to either the first response queue 708 or the first request queue 710. The routing agent 702 sends an enablement signal to the first
10 communication pathway switching device 712, third communication pathway switching device 734, and fifth communication pathway switching device 722. The routing agent 702 also sends a disable signal to the second communication pathway switching device 716 and fourth communication pathway switching device 736. The routing agent 702 directs the fifth communication pathway switching device 722 to request data only from
15 the first communication pathway switching device 712 and the third communication pathway switching device 734. In 32-bit mode, the second communication pathway switching device 716 and fourth communication pathway switching device 736 receive no signal from the physical layer because the routing agent 702 disabled the second flip flop and fourth flip flop in the physical layer.

[0030] The 128-bit packets of information are transferred to the fifth communication pathway switching device 722 through the first communication pathway switching device 712 and then the third communication pathway switching device 734 in a cyclic sequential manner. In a repeating cycle, the fifth communication pathway switching device 722 requests the contents of the first response queue 708, then the first request queue 710, then
25 the third response queue 738, then the third request queue 740, and then repeats this sequence. Every packet of information may be either a request for a command and/or data or a response to a command or data. In an embodiment, once a packet is written into a response queue or request queue, then the information is transferred from these queues at core clock frequency. The packets of information are sent from the fifth communication
30 pathway switching device 722 to one of the following three components. The central data management buffer (CDM) 728 stores data to be consumed by the protocol layer 740. The remote address transaction tracker buffer (RATT) 730 stores commands from a remote

device such as a request from a remote processor. The CDM 728 stores corresponding data, if any, associated with that command. Similarly, the local address transaction tracker buffer (LATT) 726 stores local commands and responses made by the processor core. The corresponding data, if any, associated with that command is stored in the CDM 728.

5 [0031] If the configuration register 732 is programmed for a 16-bit point-to-point connection, then each inbound link layer 704, 714, 718, 720 acts independently. The routing agent 702 directs the fifth communication pathway switching device 722 to request information out of the eight possible sources, the corresponding request queue 710, 713, 740, 750 or the corresponding response queue 708, 711, 738, 748 in each link
10 layer 704, 714, 718, 720, in a cyclic sequential manner. If a particular queue is empty, then the communication pathway switching device 722 automatically pulls packets out of the next queue without any penalty. In an embodiment, the packets from the four physical layers are written into the appropriate queue at 100 megahertz, if the configuration register is programmed for a 16-bit connection. The packets are written into the queues at 200
15 Megahertz if the configuration register 732 is programmed for a 32-bit connection. If the configuration register is configured for a 48-bit connection, then the routing agent 702 gangs three link layers together. Once the fifth communication pathway switching device 722 picks a packet of information from one of the eight possible sources, then the packet is sent to the to the protocol layer 740.

20 [0032] The inbound link layer sends responses and requests to protocol layer 740. The protocol layer 740 alternates choosing a command from the LATT 726 or RATT 730 accompanied by data from the CDM 728. In one embodiment, this physical information may be sent to a CPU. The information goes to the CPU to be processed and sent to the outbound bound link layer. The protocol layer 740 typically is the processing component.
25 The protocol layer 740 typically resolves requests from other local processors and sends requests out through the physical layer. The protocol layer 740 may be responsible for functions such as ordering, conflict detection, and coherence. The protocol layer 740 may forward requests for data to the local memory controller if the request is made to local memory. The protocol layer 740 may send snoop requests to the remote nodes and other
30 local processors. The protocol layer 740 also processes requests made through the link layer, which may come from a remote processor or an input-output component.

[0033] Figure 8 illustrates an embodiment of the routing agent 802 controlling the

outbound communication pathways in an embodiment of the buffer layer **800**. The protocol layer **804** sends the processed data and commands to each outbound link layer **806, 808, 810, 812**. The protocol layer **804** delivers commands generated from itself to the LATT **814** and data, if any, corresponding to that command to the CDM **816**. The protocol layer **804** delivers responses to commands from remote devices to the RATT **818** and data, if any, corresponding to that command to the CDM **816**. If the configuration register **820** is programmed for a 32-bit point-to-point connection, then the routing agent **802** effectively enables two of the four outbound link layers. The following happens in tracing the signal path in the first outbound link layer **806** and the second outbound link layer **808**. The routing agent **802** directs the second communication pathway switching device **822** and the fourth communication pathway switching device (not shown) to be disabled. The routing agent **802** directs the fifth communication pathway switching device **828** to request data through the first communication pathway switching device **824** and third communication pathway switching device **826** from their respective request buffer **830** or response buffer **832**. The fifth communication pathway switching device **828** alternates, in a repeating cycle, requests for bits from the request buffer **830** and the response buffer **832**. The fifth communication pathway switching device **828** also receives any data, if any, corresponding to those commands from the CDM **816**. The fifth communication pathway switching device **828** then routes the 128-bit data packet through a first time delay **833** to either the outbound response queue **836** or outbound request queue **834** located in the outbound physical layer.

[0034] One or more retry queues **838** exist in the outbound link layer. The retry queue **838** stores a duplication of the information to be transferred in case an error occurs in the transfer of the information. The retry queue **838** exists primarily in case there may be an error in the link. The retry queue **838** erases the duplicated information stored in a retry queue **838** upon receiving a confirmation of an error free transfer of information.

[0035] If the configuration register **820** is programmed for a 16-bit point-to-point connection, then the routing agent **802** directs each outbound link layer **806, 808, 810, 812** to act independently. The routing agent **802** sends a signal to enable all of the outbound link layer communication switching devices and set the clock speed to the default clock speed. The information is routed from the LATT **814**, RATT **818**, and CDM **816** through its own respective outbound link layer to the corresponding outbound physical layer. For

example, the routing agent **802** directs the second communication pathway switching device **822** to request data through the sixth communication pathway switching device **840** from the second request queue **842** and then request data through the seventh communication pathway switching device **844** from the second response queue **846**. The second communication pathway switching device **822** alternates, in a repeating cycle, requests for bits from the second response queue **842** and the second request queue **846**. The second communication pathway switching device **822** also receives any data, if any, corresponding to those commands from the CDM **816**. The second communication pathway switching device **822** then routes the 128-bit data packet through a second time delay **848** to either the second outbound response queue **850** or second outbound request queue **852** located in the outbound physical layer.

[0036] Figure 9 illustrates an embodiment of the routing agent **902** controlling the communication pathways in an outbound information transfer layer **900**. In an embodiment, the information transfer layer comprises one or more physical layers. The physical layer carries out the actual physical transfer of information to devices external to the processor through ports, such as a first port **904** and a second port **906**. Typically, one 16-bit port exists on each physical layer such as the first port **904**. The processor transfers information between itself and a device exterior to the processor through these ports. The information signal contains information such as a request, response, or data.

[0037] In an embodiment of a two processor architecture, for example, three ports hook up to the second processor in the system, and the fourth port hooks up an input-output component such as a chip set. A first communication pathway switching device **908** such a multiplexer receives a 128-bit packet of information from the link layer. The first communication pathway switching device **908** reads the 128-bit packet of information from either the response queue **911** or the request queue **910** at a clock speed of 100 megahertz for example. The signal output of the first communication pathway switching device **908** is two 64-bit packets of information, a first 64-bit packet and a second 64-bit packet which are stored in the first register **912**. After a time delay **914**, the second communication pathway switching device **918** reads the first 64-bit packet through the second register **916** at twice the clock speed, 200 megahertz, of the 128-bit packet of information. The signal output of the second communication pathway switching device **918** is two 32-bit packets of information, a first 32-bit packet and a second 32-bit packet

which are stored in the third register **920**. The clock speed of 32-bit packet of information in the third register is again doubled to 400 megahertz.

[0038] The routing agent **902** now directs the 32-bit packet of information to take a 32-bit bypass path **922** or a 16-bit information transfer path in the corresponding communication pathway switching devices **926**, **934**. The configuration register **924** informs the routing agent **902** whether the component exterior to the processor should be a 16-bit, 32-bit or 48-bit-point-to-point connection. In one embodiment, for example, if a 16-bit point-to-point connection exist between the processor and the input-output component, then routing agent **902** directs each physical layer to act independently of the other physical layers. A fourth communication pathway switching device **926** reads the 32-bit packet of information at 400 megahertz from the third register **920** and outputs two 16-bit packets of information. A fifth communication pathway switching device **928** reads the 16-bit packet of information at 400 megahertz from the forth register **927** and outputs the 16-bit packet of information to the first port **904**. The routing agent **902** sends a signal to the sixth communication pathway switching device **930** in the second outbound physical layer **932**. The signal enables the 16-bit path in the fifth communication pathway switching device **928**. The routing agent **902** disables the 32-bit bypass path **922** from the fourth communication pathway switching device **926**. The routing agent **902** also sends a signal to the second physical layer **932**, the sixth communication pathway switching device **930**, to enable the 16-bit path in the sixth communication pathway switching device **930** and disable/ignore the 32-bit bypass path **922** coming from the third register **920**. Thus, the output from first port **904** and the second port **906** are unrelated 16-bit packets of information.

[0039] If in one embodiment for example, a 32-bit point-to-point connection exist between the processor and the input-output component, then the routing agent **902** gangs the output of the first port **904** and the output of the second port **906**. The routing agent **902** sends a signal to the sixth communication pathway switching device **930**. The routing agent's signal disables the 16-bit path in the sixth communication pathway switching device **930** and enables the 32-bit bypass path **922** coming from the third register **920**. The routing agent **902** also sends a signal to the first physical layer **931**, the fourth communication pathway switching device **926**, to enable the 32-bit bypass path **922**. Thus, the output from first port **904** and the second port **906** are related 16-bit packets of

information. In other words, the output from first port **904** and the second port **906** is a 32-bit packet of information. In order to keep the same transfer speeds, the routing agent **902** also sends a signal to double the clocking speed that occurs in the registers. For example, the 32-bit packet of information in the third register **920** is now clocked at 800 megahertz. 800 megahertz is twice the clock speed of when the 16-bit information transfer was occurring. In a similar manner, the routing agent **902** can gang three ports together (not shown) to create a 48-bit connection in the outbound path.

[0040] In alternative embodiment, if three physical layers are linked to, for example, a second processor, then optionally the routing agent can be programmed to route the three related 16-bit packets destined for the second processor through the respective components of each link and physical layer. Thus, the first 16-bit packet travels through the components of the first physical layer and first link layer. The second 16-bit packet travels through the components of the second physical and second link layer. The third 16-bit packet travels through the components of the third physical layer and second link layer. The routing agent changes the addressing header in the three 16-bit packets to convey to the second processor that these three 16-bit packets are related.

[0041] The invention is subject to various modifications and alternative forms. Specific embodiments thereof have been shown only by way of example. The connections between the processor and the devices may be, for example, 8-bit to 64-bit or more. The clock speeds may be, for example, one megahertz to one gigahertz or more. The registers may be 1-bit to 128-bits or more. Further, most functions performed by the electronic hardware components may be duplicated by software emulation. Similarly, the functionality of each layer, the protocol layer, the buffer layer, and the information transfer layer may be combined, for example, on a single layer or transported to another component. The invention should be understood to not be limited to the particular forms disclosed, but on the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

CLAIMS

What is claimed is:

I claim:

1. An apparatus, comprising:

- 5 a routing agent to change one or more communication pathways in a processor without changing a physical component layout in the processor.
2. The apparatus of claim 1, wherein the routing agent comprises a first component and a second component, the first component to determine a bandwidth between a device and the processor, the second component to provide a control signal to one or more
- 10 communication pathway switching devices, the control signal to be based upon the bandwidth determination of the first component.
3. The apparatus of claim 1, further comprising:
 a point-to-point bus, the processor communicates to a device through the point-to-point bus.
- 15 4. The apparatus of claim 1, wherein the routing agent is internal to the processor.
5. The apparatus of claim 1, wherein the routing agent is external to the processor.
6. The apparatus of claim 2, wherein the device is selected from the group consisting of an input-output component, a bridge, a chipset, a memory, or a second processor.
7. The apparatus of claim 2, wherein the control signal is selected from the group
- 20 consisting of an enable signal, a disable signal, an increase clock speed signal, or a set default clock speed signal.
8. The apparatus of claim 1, wherein the processor comprises:
 a protocol layer;
 an information transfer layer to electronically transfer information on a physical
- 25 medium between the protocol layer and a device; and
 a buffer layer to buffer an electronic transfer of information between the protocol layer and the information transfer layer.
9. The apparatus of claim 8, wherein the one or more communication pathways may be changed by altering a signal path that a signal travels in the information transfer layer.
- 30 10. The apparatus of claim 8, wherein the one or more communication pathways may be changed by altering a signal path that a signal travels in the buffer layer.
11. The apparatus of claim 8, wherein the information transfer layer consists of at least

one communication pathway switching device.

12. The apparatus of claim 8, wherein the buffer layer consists of at least one communication pathway switching device.

13. A method comprising:

- 5 sending a control signal to one or more components within a processor having a flexible architecture; and
- changing one or more communication pathways in the processor without changing a physical component layout in the processor.

14. The method of claim 13, further comprising:

- 10 communicating between the processor and a device through at least one point-to-point bus.

15 15. The method of claim 13, wherein the changing of the communication pathway consists of changing a setting in a configuration register to direct a routing agent to send the control signal to one or more communication pathway switching devices located in the processor.

16. A method comprising:

 changing a bandwidth between a processor and a device exterior to the processor without changing a physical component layout in the processor.

17. The method of claim 16, further comprising:

- 20 communicating between the processor and the device through at least one point-to-point bus.

18. The method of claim 16, wherein changing the bandwidth comprises altering a number of ports linked between the processor and the device.

19. A processor, comprising:

- 25 a routing agent to control one or more communication pathways in a processor;
- a protocol layer to process information and generate requests for information;
- an information transfer layer to transfer information on a physical medium between the protocol layer and a device; and
- a buffer layer to transfer information between the protocol layer and the
- 30 information transfer layer.

20. The processor of claim 19, wherein the information transfer layer consists of at least one communication pathway switching device and the buffer layer consists of at least one

communication pathway switching device.

21. The processor of claim 19, wherein the routing agent comprises a first component and a second component, the first component to set a bandwidth between the processor and the device, the second component to send a control signal to at least one communication

5 pathway switching device.

22. A system, comprising:

a processor having a flexible architecture; and

a routing agent to control the one or more communication pathways in the processor.

10 23. The system of claim 22, wherein the processor comprises:

a protocol layer;

an information transfer layer to transfer information on a physical medium between the protocol layer and a device; and

15 a buffer layer to buffer the transfer of information between the protocol layer and the information transfer.

24. The system of claim 22, further comprising:

a point-to-point bus, the processor communicates to a device through the point-to-point bus.

25. The system of claim 22, wherein the system is selected from a group consisting of a work station, or a server.

20 26. An apparatus, comprising:

a means for changing the bandwidth between a processor and a device exterior to the processor without changing a physical component layer in the processor.

27. The apparatus of claim 26, further comprising:

25 a means for communicating between the processor and the device through at least one point-to-point bus.

28. The apparatus of claim 26, wherein changing the bandwidth comprises altering a number of ports linked between the processor and the device. 29. An apparatus, comprising:

30 a routing agent to change the bandwidth between a processor and a device exterior to the processor without changing a physical component layer in the processor.

30. The apparatus of claim 29, wherein the processor uses a point-to-point bus to

communicate with the device.

31. The apparatus of claim 29, wherein routing agent further comprises a configuration register to alter a number of ports linked between the processor and the device

1/8

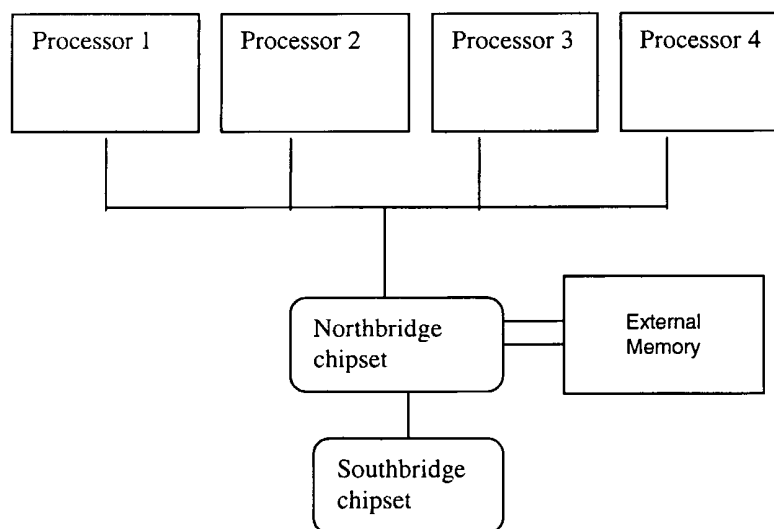


Figure 1

200

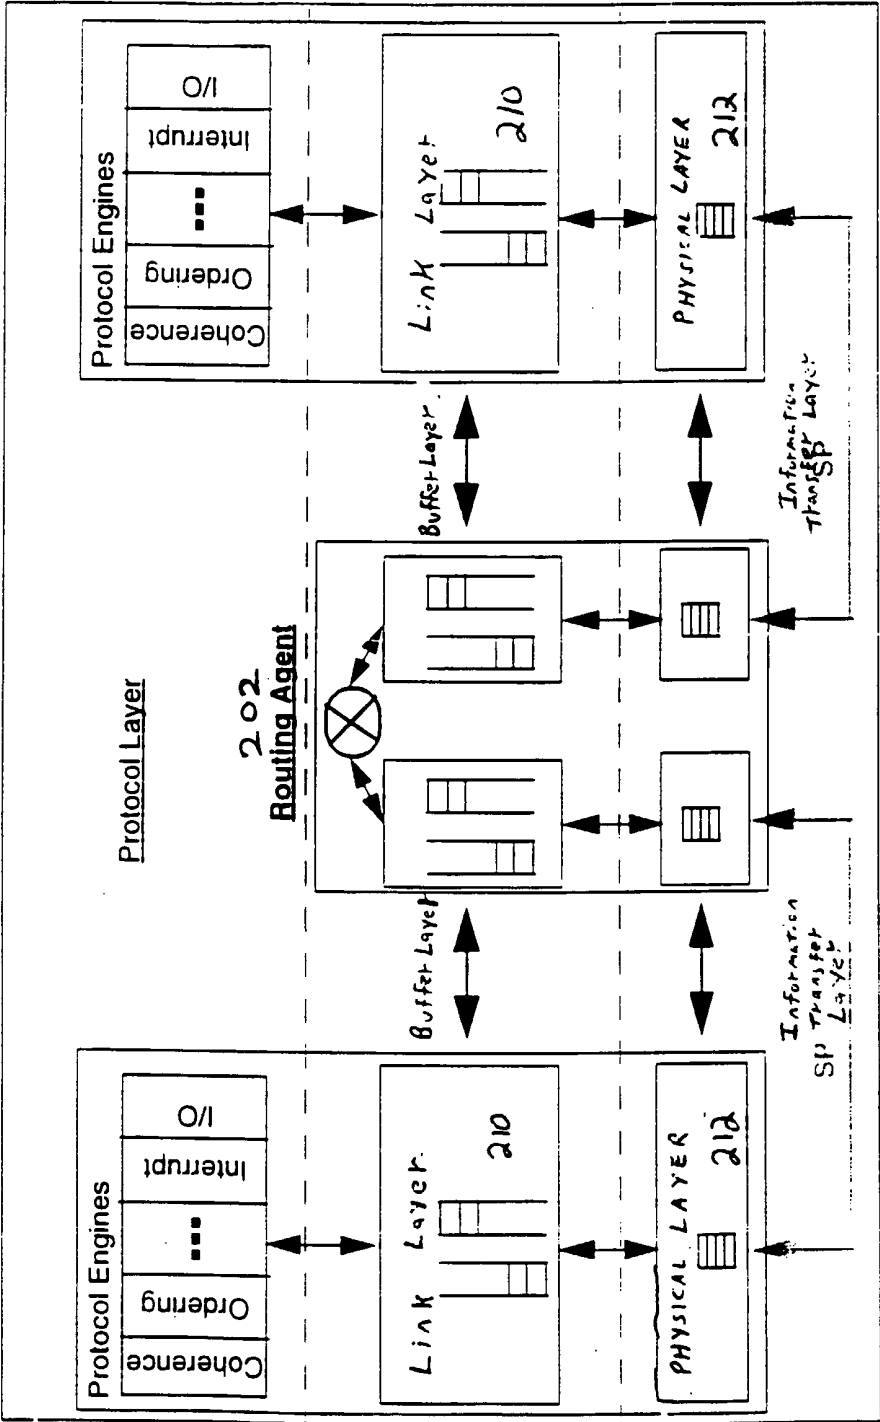


Figure 2

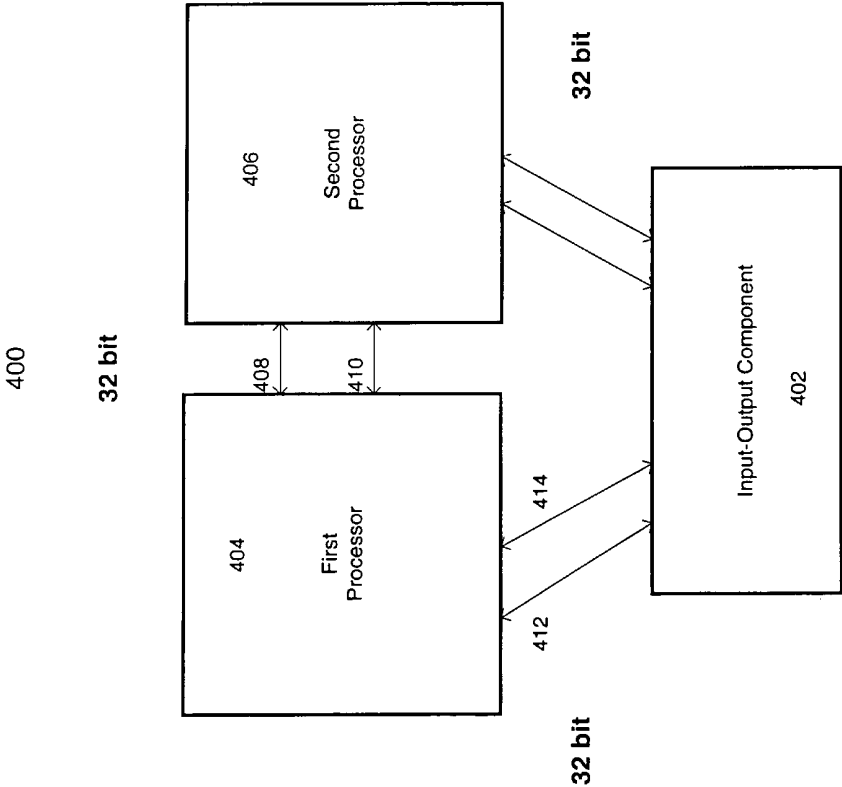


Figure 3

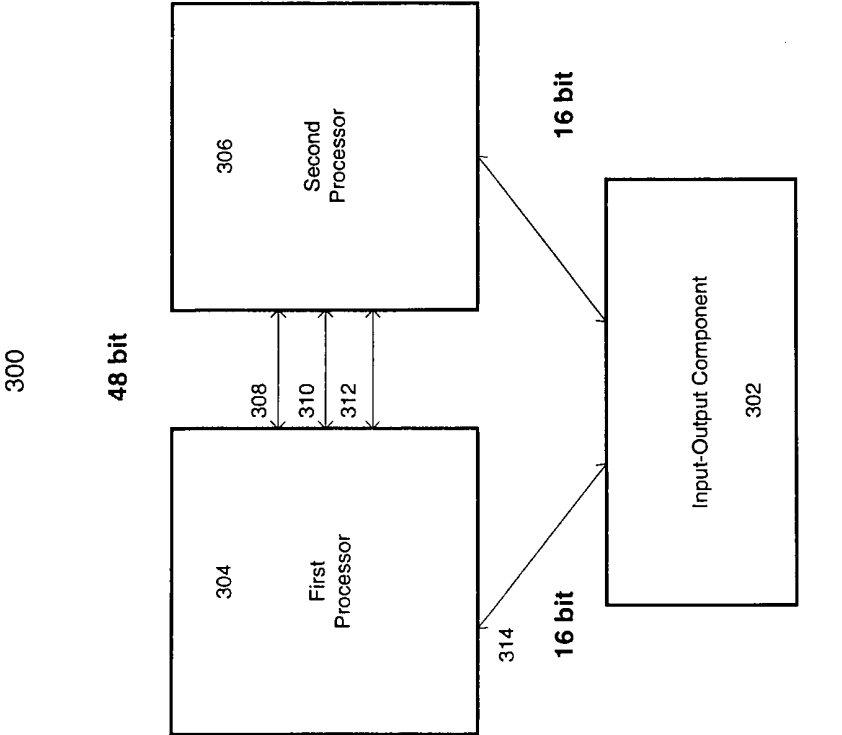


Figure 4

4/8

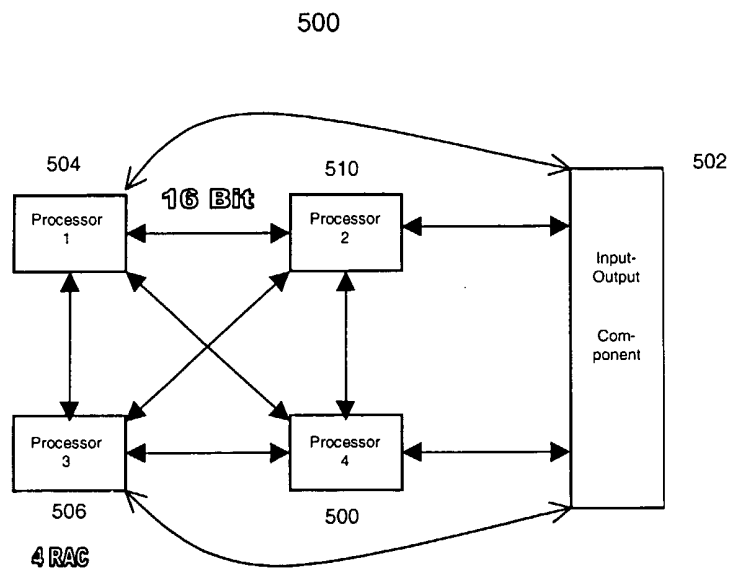


Figure 5

5/8

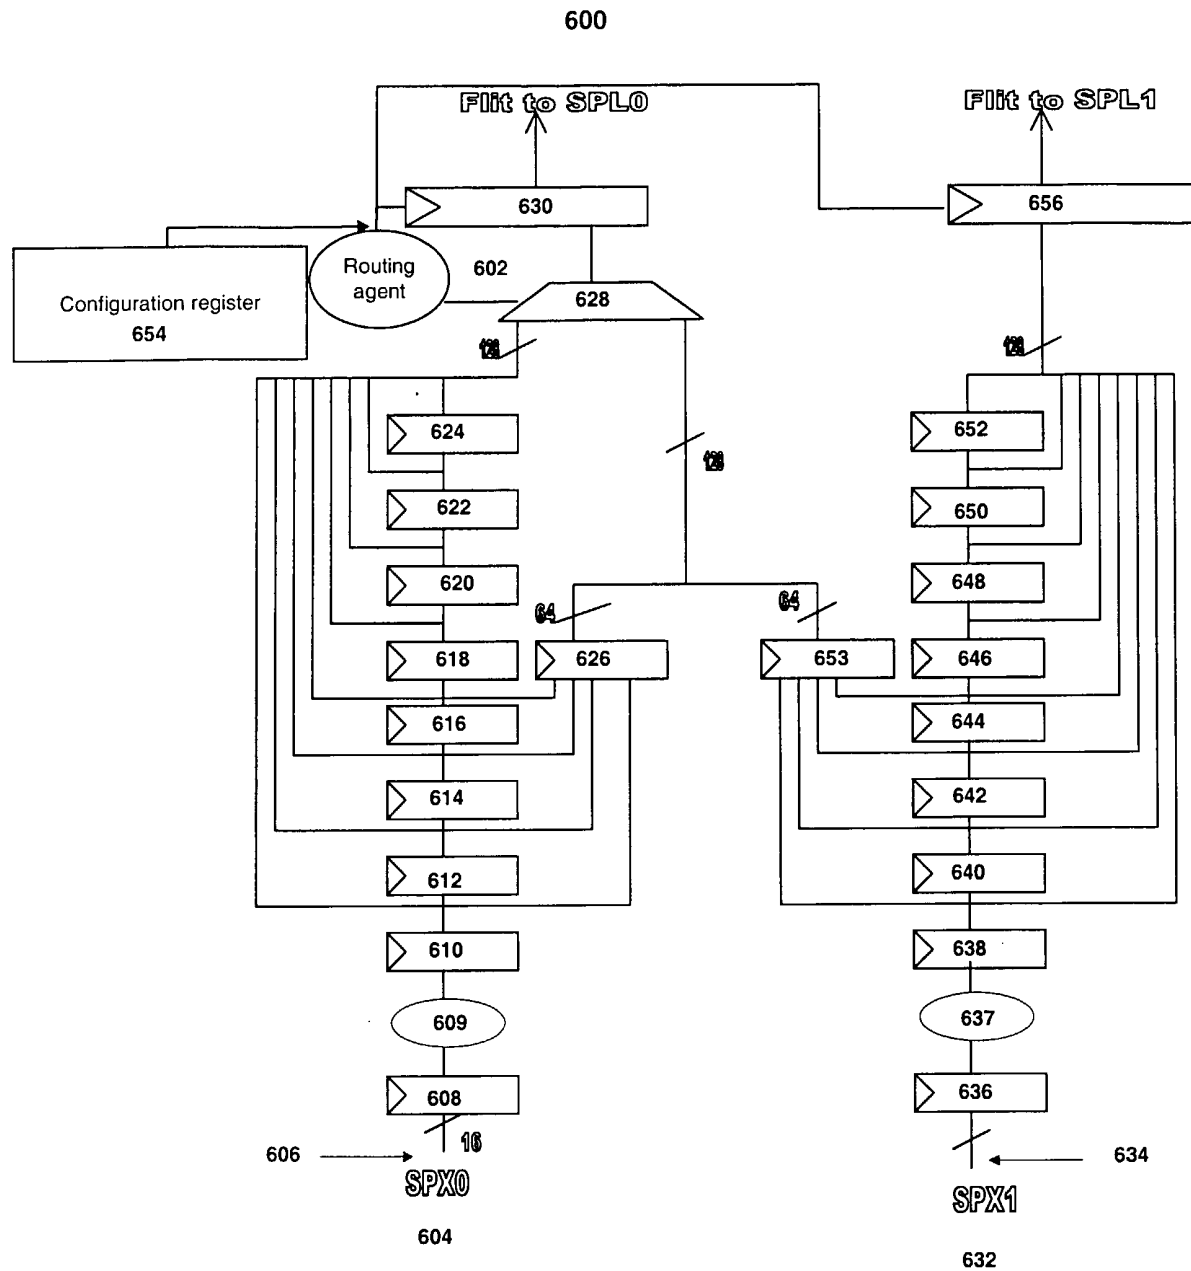


Figure 6

6/8

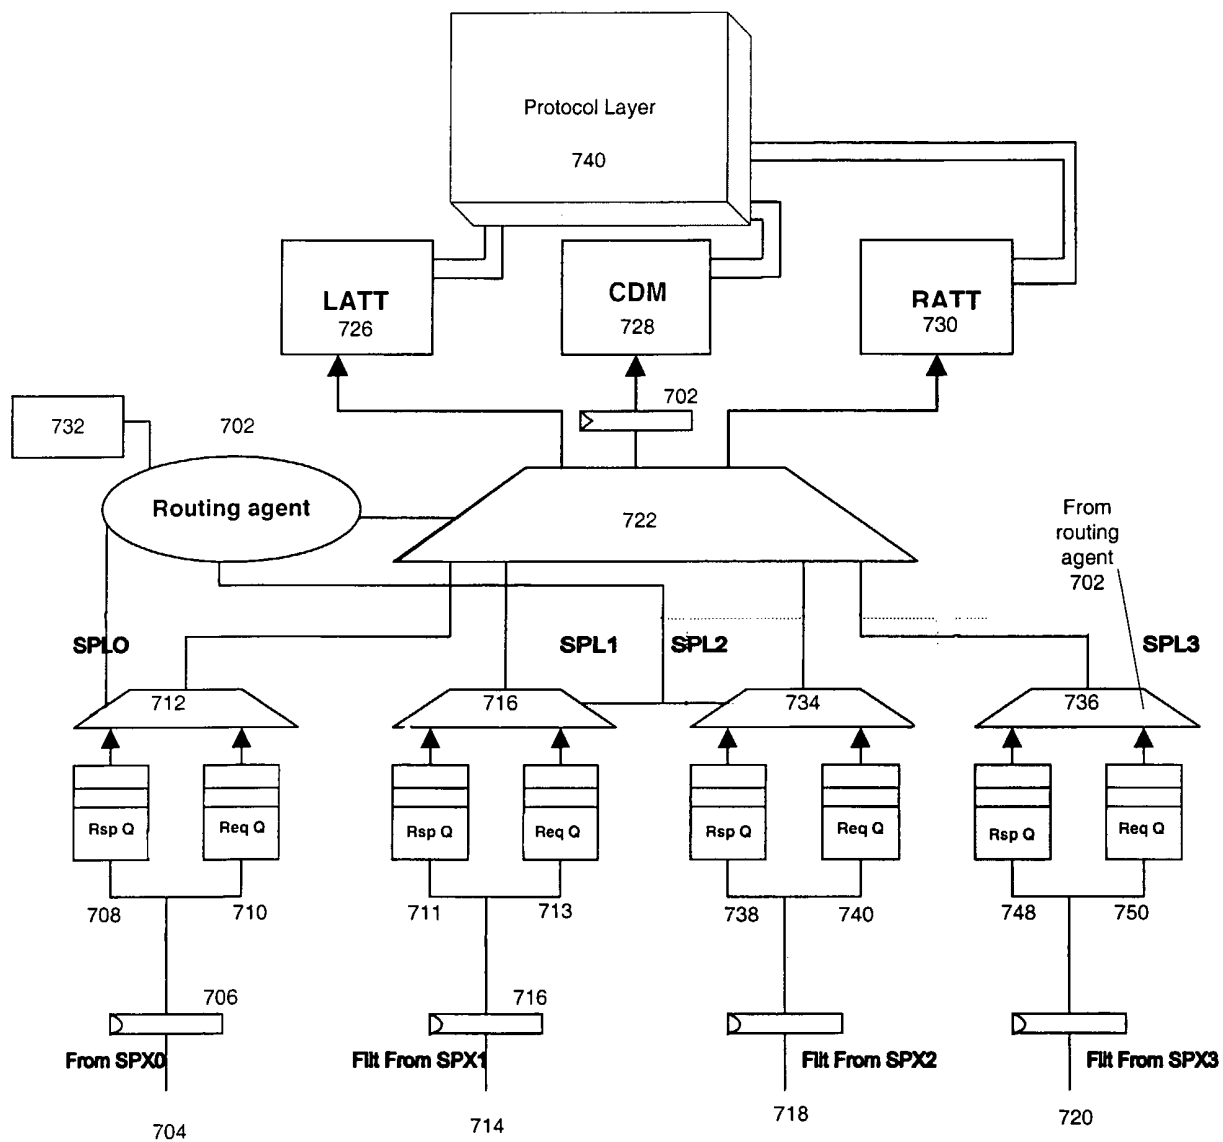


Figure 7

700

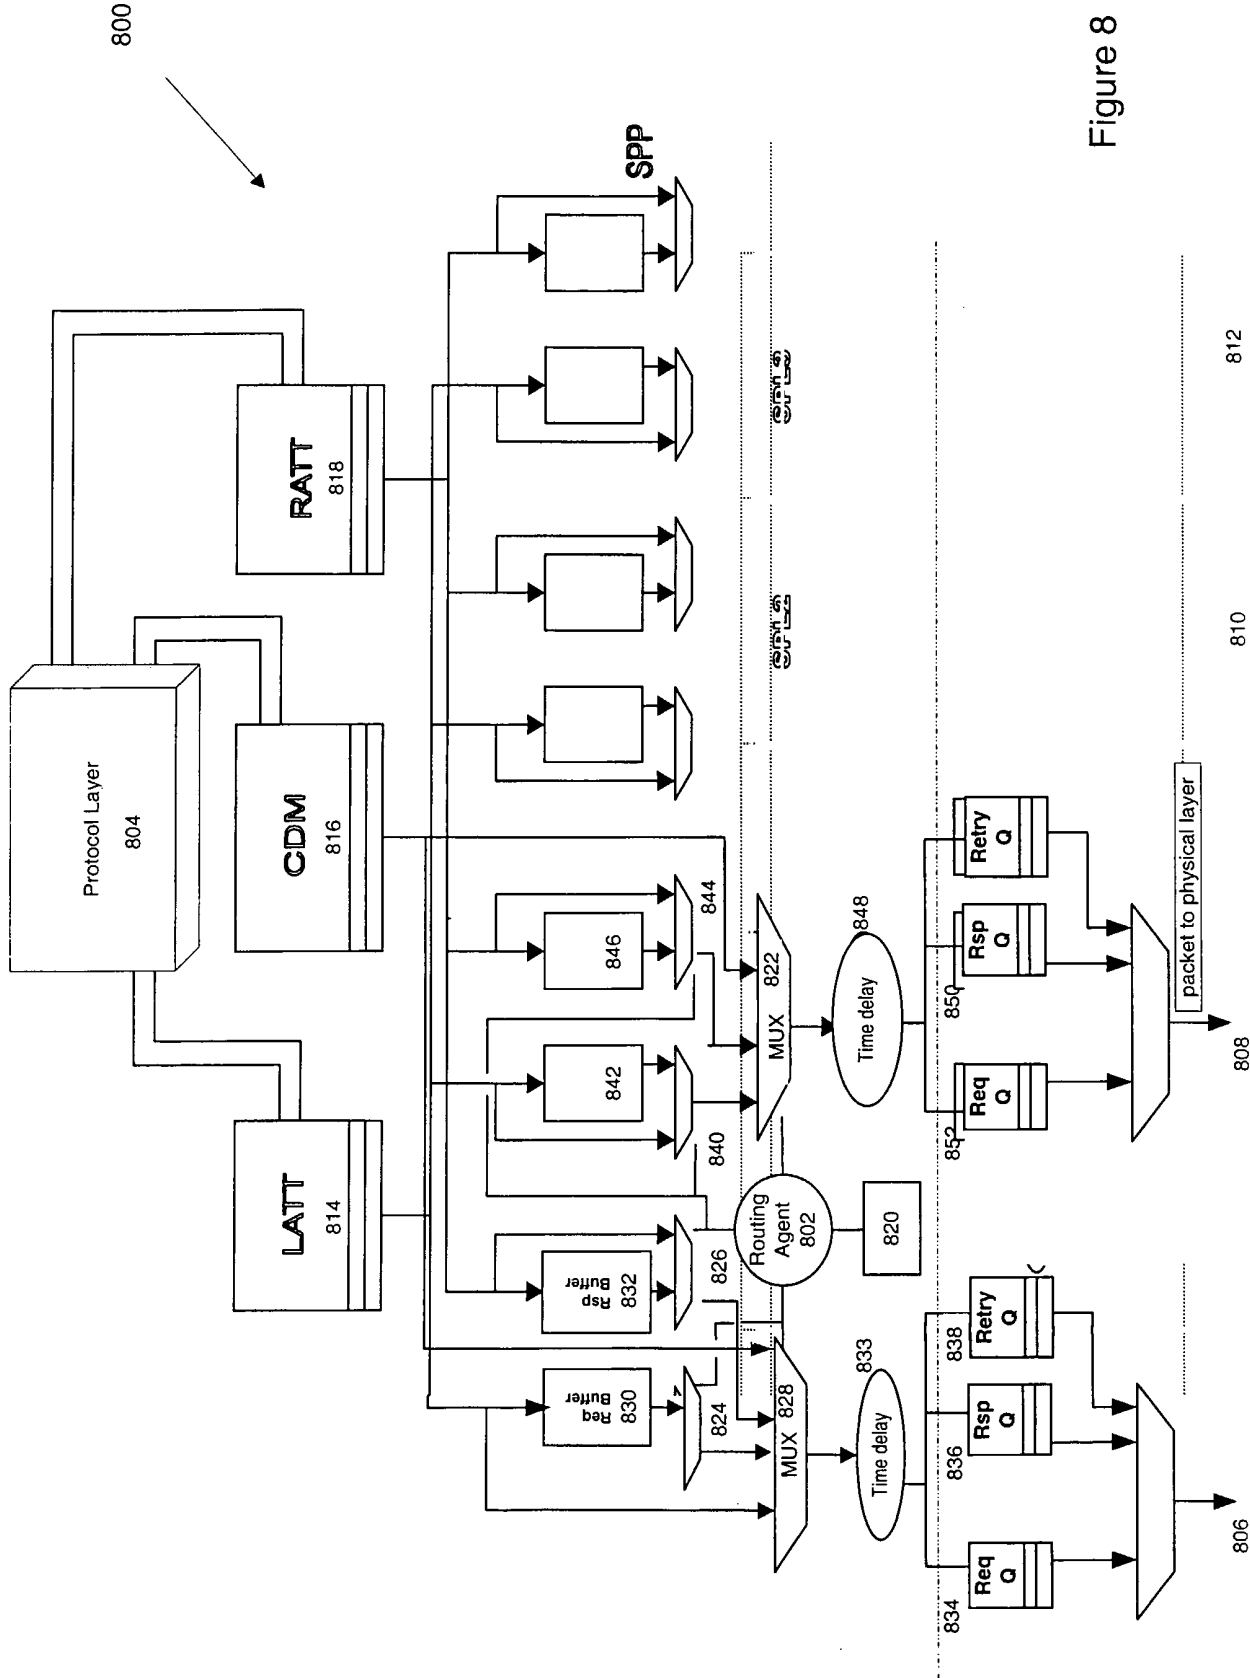


Figure 8

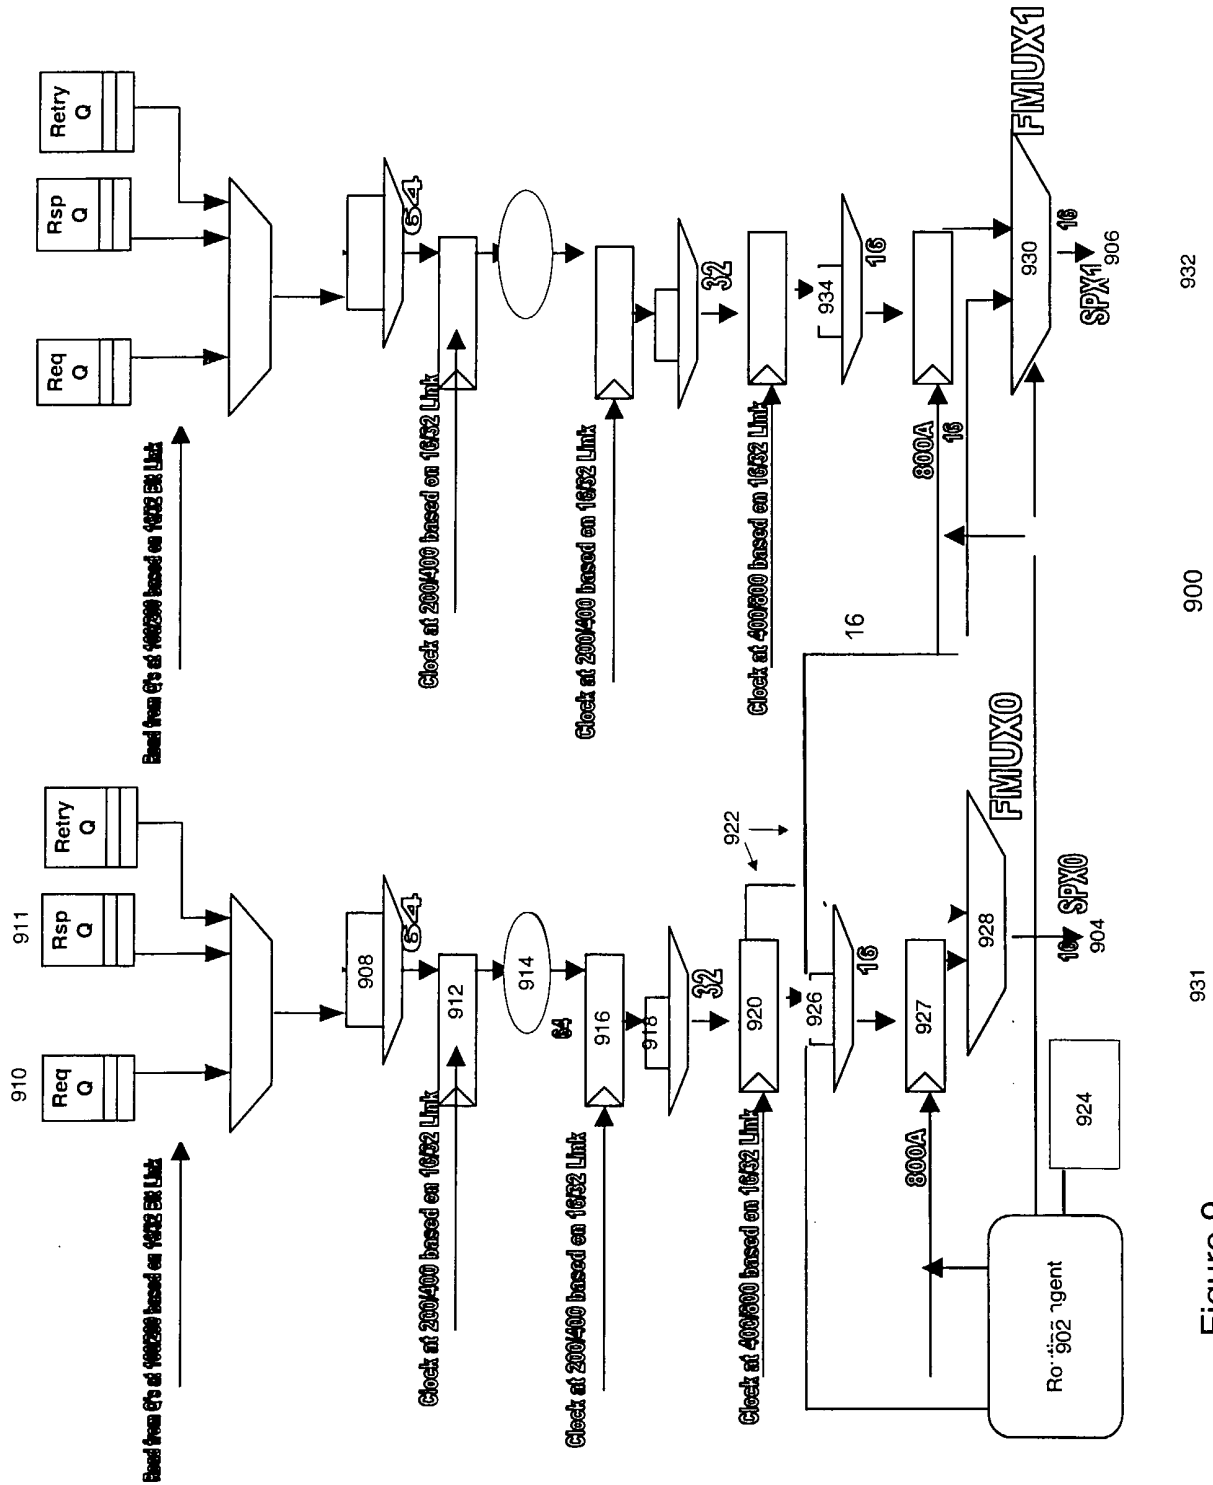


Figure 9