



(51) International Patent Classification:

H04H 60/06 (2008.01) *H04L 29/06* (2006.01)
H04H 20/26 (2008.01)

(21) International Application Number:

PCT/SE2008/050669

(22) International Filing Date:

5 June 2008 (05.06.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET LM ERICSSON** (publ)
[SE/SE]; S-164 83 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CEDERVALL, Mats** [SE/SE]; Fågelstavägen 11, S-871 60 Härmösand (SE). **ÅSTRÖM, Bo** [SE/SE]; Fredsborgsgatan 2, S-117 59 Stockholm (SE). **EDLUND, Peter** [SE/SE]; Kassmyravägen 18, S-147 33 Tumba (SE).

(74) Agent: **BERGENSTRÄHLE & LINDVALL AB**; Box 17704, S-118 93 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: A METHOD AND EQUIPMENT FOR PROVIDING UNICAST PREPARATION FOR IPTV

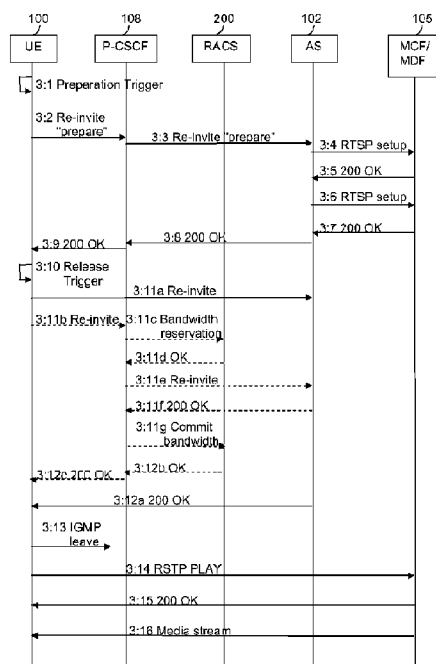


Figure 3

(57) Abstract: A method for providing switching of a media session transmitted from a content server to a user equipment from a multicast to a unicast bearer. A preparation trigger recognised by the user equipment triggers a preparation phase wherein an application server prepares for an upcoming switch by re-configuring the media session and by providing the re-configuration data to the user equipment. Subsequent to the preparation phase, a second trigger triggers a release phase, wherein the multicast bearer is released, and the media session is resumed by the unicast bearer.

WO 2009/148370 A1



Published:

— *with international search report (Art. 21(3))*

A METHOD AND EQUIPMENT FOR PROVIDING UNICAST PREPARATION FOR
IPTV

TECHNICAL FIELD

5 The present invention relates generally to a method and nodes adapted for enabling a smooth switching of a media session delivery from a multicast- to a unicast bearer. The invention also relates to a method and nodes adapted for scheduling the suggested switching method.

10

BACKGROUND

 IPTV is a technology used for delivery of broadcasted TV services over an IP network, typically a broadband access network. The predominant IPTV service today
15 is Broadcast TV, wherein normal non-IPTV bearers, as well as additional bearers with low penetration, are transmitted from a super head-end to end user receivers, such as e.g. a Set Top Box (STB) connected to a TV screen, over a broadband network.

20

 One way of delivering IPTV services to the end users is over an IP multimedia subsystem (IMS) based network architecture. Figure 1 illustrates a simplified IMS based network architecture for delivery of multimedia services to end users, each of which is provided with a STB. In the
25 figure a plurality of IMS enabled STBs **100a**, **100b** of an access domain **101** have access to multimedia services via an Application Server (AS) **102** of a Media and Service Discovery Platform **103**. The services are controlled by Media Control Functions (MCF) **104**, and delivered by Media Delivery
30 Functions (MDF) **105** of a Media and Delivery Platform **106**. An IMS core subsystem **107**, comprising conventional Call Session Control Functions (CSCF), including Proxy-CSCFs (P-CSCF)

108, Interrogation-CSCSs (I-CSCF) **109**, and Serving-CSCFs (S-CSCF) **110**, controls the IPTV services, which may be delivered independently from different types of underlying IP based transport networks. It is to be understood that for simplicity reasons, nodes which may be compulsory for proper operation of delivery and control of IPTV services but which are not necessary for the understanding of the switching mechanisms which is the scope of this document have been omitted.

In order to minimize the bandwidth required for these transmissions and to minimize the resources required by the access network and in the aggregated transport network it is desirable to use multicast techniques. There are, however, a number of situations, such as for example when an end user is tuned in to a personalised TV service, and where it is necessary to switch to unicast stream while the end user is watching TV, distributed over a multicast connection. Examples of such cases are, e.g. during Network-Personal Video Recording (N-PVR) or when personalised advertising is applied. Live TV may be enabled by the Internet Group Management Protocol (IGMP), while Video on Demand (VoD) is another service which typically is enabled by the Real Time Streaming Protocol (RTSP). VoD allows a user to watch a program on a more individual basis. By using trick play functions or commands, such as e.g. pause, slow-motion and wind/re-wind, a user will have full control of a media stream transmitted via unicast.

According to known multicast techniques, an end user receiving a multicast service may have been configured to instruct the transmitting side to leave the present bearer and to join the new one, either by transmitting one Internet Group Management Protocol (IGMP) message, as

proposed in the IGMP version 3 standards, or in two separate messages, as proposed in previous versions. Such a procedure may be applicable for both wire-line access and mobile access.

5 A method for performing a switching from multicast to unicast, according to the prior art TISPAN standards, will now be described in more detail, with reference to figure 2. In the figure a User Equipment (UE) **100**, e.g. a STB, is receiving streamed media content, delivered from a
10 Content or Service Provider (not shown), over an IP based network, typically an IMS based broadband access network, via a content server, which in this context is referred to as a MCF/MDF **105**.

 In an initial **step 2:1**, some trigger initiates a
15 setup of a unicast bearer. According to the described method, this may be achieved by transmitting a re-invite message to a P-CSCF **108** in a next **step 2:2**, which is forwarded to an AS **102**, such as e.g. a SCF, in a subsequent **step 2:3**. The re-invite message is a request for a RTSP
20 setup, comprising a request for a certain bandwidth, which will be required for the requested unicast bearer. AS 102 responds to the re-invite message by setting up a necessary number of RTSP streams. A typical media transmission, will require one audio stream and one video stream, and, thus,
25 for such a scenario, two RTSP setup procedures will be necessary, as illustrated with **steps 2:4** and **2:6**, respectively, wherein each setup steps are responded to by a 200 OK message in **steps 2:5** and **2:7**, respectively. UE 100 is notified of a successful setup via a 200 OK message, sent to
30 P-CSCF 108 in a **step 2:8**, and forwarded to UE 100 in a subsequent **step 2:9**. From this moment, a unicast bearer is established between MCF/MDF 105 and UE 100, as a

consequence, resources necessary for maintaining the bearer are also tied up.

If a resource reservation system is in place, an optional bandwidth reservation procedure may commence at this stage. For a fixed UE, such a procedure may typically be performed according to known TISPAN standards, as indicated with the optional **steps 2:10a - 2:10h**. For a mobile UE, a corresponding bandwidth reservation procedure according to 3GPP standards may be executed instead. For a 3GPP implementation, RACS 200 will also be replaced by a Policy Charging Rule Function (PCRF).

In a **step 2:10a** an additional re-invite message, requesting for additional bandwidth, is transmitted to P-CSCF 108, which transmits a bandwidth resource reservation request to a Resource and Admission Control System (RACS) **200** in a subsequent **step 2:10b**. If the required resources are available, RACS 200 responds by sending an OK message, according to the Diameter AAA protocol, to P-CSCF 108, as indicated with **step 2:10c**. The re-invite message is then forwarded to AS 102 in a subsequent **step 2:10d**, which is responded to with a 200 OK in a next **step 2:10e**. The reserved bandwidth is then committed in **step 2:10f**, and verified with another OK message, sent to P-CSCF 108 in another **step 2:10g**, and forwarded to UE 100 in a **step 2:10h**.

The UE 100 is now ready to leave the multicast bearer, by transmitting an Internet Group Management Protocol (IGMP) leave to a Digital Subscriber Line Access Multiplexer (DSLAM) or the IP Edge router (not shown). This is indicated with another **step 2:11**.

As indicated with a subsequent **step 2:12**, UE 100 activates the unicast session by streaming control signalling, e.g. by transmitting an RTSP trick play command,

such as e.g. RTSP PLAY, to MCF/MDF 105. The RTSP trick play command is responded to by MCF/MDF 105, with a 200 OK message, sent in a **step 2:13**. Optionally, the streaming control signalling may be executed in two steps, i.e.

5 between UE 100 and AS 102, followed by forwarding the command from AS 102 to MCF/MDF 105. At this stage MCF/MDF 105 can start to transmit the media stream via unicast, as indicated in a final **step 2:14**.

10 However, switching from a multicast stream to a unicast stream typically results in a delay which is a disturbing obstacle for the service and/or network provider in its aim to offer a smooth and non-interrupted user experience. The experienced delay may have different causes, such as, e.g. the signalling between the UE and the stream
15 control nodes, the bandwidth reservation made during the bandwidth renegotiation, the control signalling between the stream control nodes and the media servers, the setting-up of unicast streams for playout in the media servers, the delivery of the unicast stream, and/or the required
20 buffering of the unicast stream.

Yet another problem with unicast solutions is that they are inherently resource limited, where typically the resource requirement grows linearly with the number of users tuned into unicast streaming, thereby causing problems to
25 present scheduling mechanisms. It is therefore from a service deployment perspective advisable to limit the number of unicast connections to a minimum and to use these connections only on occasions when it is necessary.

30 SUMMARY

It is an object of the present invention to address at least the problems outlined above. More

specifically, it is an object of the present invention to provide a method, a user equipment and an application server adapted to execute a smooth switching of a media session from multicast and unicast delivery. According to the presented embodiments, such a switching mechanism is achieved by introducing a preparatory phase which is executed prior to the actual switching phase. The claimed invention also relates to a method and an application server adapted to provide an efficient scheduling of such a switching procedure.

According to a first aspect, a method of switching a media session, delivered from a content server to a user equipment via a multicast bearer of an IP network, from multicast to unicast delivery, is provided. Upon having recognised a preparation trigger, the user equipment initiates a preparation phase, which includes the step of preparing the content server for a unicast bearer. Subsequent to having initiated the preparation phase and in response to having recognised a release trigger, the user equipment initiates a release phase. The release phase comprises the step of releasing the multicast bearer and requesting the content server to resume transmission of the media session via the unicast bearer.

According to another aspect a method providing for a switching of a media session, delivered from a content server to a user equipment via an IP network, from multicast to unicast delivery, is provided. Upon receiving a request from the user equipment, and recognising that the request is a request for preparing the content server for a unicast bearer, the application server executes the requested preparation step by executing a configuration of the multicast session. Subsequent to the configuration the

application server receives and recognises a response to the request. The response is transmitted to the user equipment, with the configuration data associated with the unicast bearer preparation attached.

5 The described method enables a smooth switching from multicast to unicast delivery, wherein the preparation phase may reduce the delay to such an extent that a non-interrupted user experience is achieved.

10 According to yet another aspect, a method for providing scheduling unicast delivery to one or more user equipments, receiving a media session, transmitted via multicast from a content server via an IP network, is provided.

15 In a first step, a selection trigger, indicating that a predefined trigger event has occurred, is recognised by the application server. Such a trigger may be received from a media control function, or recognised internally by recognition functionality of the application server.

20 In response to such a trigger the application server retrieves an indication of the amount of resources currently available for unicast delivery from the media control function. On the basis of at least some predefined selection criteria, in combination with the retrieved resource indication, the application server evaluates
25 conditions for triggering one or more of the user equipments to initiate a preparation phase. After the evaluation phase, the application server triggers each of the selected user equipments by transmitting a preparation trigger to the respective user equipment.

30 By implementing a scheduling method according to the suggested embodiment, a more efficient utilisation of the resources available for multicast and unicast

transmission may be achieved. In addition, the scheduling method may also provide an efficient mechanism for providing a smooth transition between different scenes delivered via multicast and unicast, respectively, according to, e.g.

5 personalized information.

The claimed invention also refers to a user equipment, which may be a mobile or a stationary user equipment, and an application server, which may be e.g. a signalling control function, adapted to be used in
10 accordance with the methods described above.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in
15 more detail by means of exemplary embodiments and with reference to the accompanying drawings, in which:

- Figure 1 illustrates an IMS based network architecture for delivery of multimedia services to end users provided with a
20 STB, according to the prior art.

- Figure 2 is a signalling scheme illustrating a method for switching from multicast to unicast, according to the prior art.

- Figure 3 is a signalling scheme illustrating a method for
25 switching a media session from multicast to unicast, according to one embodiment.

- Figure 4 is a signalling scheme illustrating a method for switching a media session from multicast to unicast, according to another embodiment.

30 - Figure 5 is a signalling diagram illustrating a method for triggering any of the switching methods described with reference to figure 3 or 4, according to one embodiment.

- Figure 6 is a block diagram illustrating a user equipment adapted to be used when executing any of the methods described with reference to figure 3, 4 or 5, according to one embodiment.

- 5 - Figure 7 is a block diagram illustrating an application server adapted to be used when executing any of the methods described with reference to figure 3, 4 or 5, according to one embodiment.

10 DETAILED DESCRIPTION

In order to confront at least some of the deficiencies which are presently known when switching from multicast to unicast, we introduce a preparatory phase, which is to be executed prior to the actual switching. One
15 intention with the preparatory phase is to prepare a UE presently receiving TV services via multicast for an upcoming switch to unicast.

By introducing such a preparatory phase, it will be possible to obtain a smooth switching, which causes less
20 delay and provides a non-interrupted user experience to the end user. In addition, the introduction of the preparatory phase also reduces the amount of resources that has to be tied up during and prior to the switching, executed during a subsequent release phase.

25 The claimed invention also relates to a scheduling method which is enabled to schedule unicast sessions on the basis of the current resource utilization, thereby making a more efficient use of the available resources, available for unicast and multicast.

30 A method for obtaining such a switching procedure, according to one embodiment, will now be described in more detail with reference to figure 3.

A UE **100** is receiving a media stream which is multicasted from a content server, typically a MCF/MDF **105**. In an initial **step 3:1**, a predefined trigger event triggers a first trigger, in this context referred to as a
5 preparation trigger, to initiate the preparation phase mentioned above. This trigger is a trigger that may be initiated either manually by the end user of the UE, or automatically, e.g. in response to receiving some indication of an upcoming advertisement/commercial break in the
10 streamed service, and has a purpose of preparing entities involved in an ongoing service delivery for an upcoming switch from multicast to unicast. A method for initiating and scheduling such a trigger, and the associated preparation phase, will be described in further detail later
15 in this document, with reference to figure 5.

According to the embodiment illustrated in figure 3, the preparation phase is initiated with a modified re-invite message, here referred to as a re-invite "prepare" message, which is generated at UE 100, transmitted to a P-
20 CSCF 108 in a **step 3:2**, and forwarded to AS 102 in a subsequent **step 3:3**.

Compared to a conventional re-invite message, the re-invite prepare message does not request for any bandwidth or network resources, and instead of assigning resources for
25 a unicast bearer it performs a unicast bearer preparation procedure at the server side, resulting in a configuration of the ongoing multicast session, typically comprising the allocation of an IP-address, port number, and a session identity, e.g. RTSP session ID, for a unicast bearer at the
30 MCF/MDF 105. The re-invite prepare message used in the described example may be recognised by a network node by the fact that no resources are assigned. Alternatively, the re-

invite message may have a "re-invite prepare message" flag which, when set, indicates that it is a re-invite prepare message. According to the present embodiment, AS 102 responds to the reception of a re-invite prepare by
5 performing a RTSP setup via session configuration signalling, as indicated with a next **step 3:4**. A successful preparation is reported to AS 102 in a 200 OK message, as indicated with a subsequent **step 3:5**.

As indicated in the previous embodiment, unicast
10 delivery typically requires more than one stream, and, thus, a second RTSP setup is executed by AS 102 in a **step 3:6**, followed by a responding 200 OK message, which is sent to AS 102 in another **step 3:7**.

Next AS 102 responds with a 200 OK message, which is
15 sent to UE 100 in a **step 3:8** and a subsequent **step 3:9**, terminating the preparation phase. This 200 OK message will comprise the configuration data mentioned above. At least some of this data will later be used by UE 100 for coordination, when initiating a media stream distribution via
20 unicast, via stream control signalling, e.g. by sending a trick play command to the content server.

Once the preparation phase has been completed, UE 100 is prepared and ready for a smooth and fast switching from multicast to unicast streaming. The actual switching is
25 triggered by a second trigger event, which is triggering a second trigger, here referred to as a release trigger, as indicated with a **step 3:10**. The release trigger, which may occur at any time subsequent to the termination of the preparation phase, initiates a second phase, here referred
30 to as the release phase. The release trigger event, which is an indication to execute the prepared switching to unicast, may be defined, e.g. by the termination of a pre-set timer,

the occurrence of a splicing item in the present media stream, the reception of a trigger message, or by a manually initiated activity, such as, e.g. the activation of an icon on the TV screen, manually selected by the end user.

5 In response to this second trigger, UE 100 generates and transmits another re-invite message to AS 102. This time, however, the present bandwidth is negotiated in order to meet the demand from the unicast bearer, and, thus, this re-invite message comprises an indication of a required
10 bandwidth. If no resource reservation system is available in the IP transport network, the re-invite message is sent to AS 102, as indicated with a next **step 3:11a**, and the re-invite message is responded to with a 200 OK message, as indicated with a subsequent **step 3:12a**.

15 If, however, resource reservation is provided for, a resource reservation procedure may be performed in **steps 3:11b-3:11g**, and **steps 3:11b** and **3:11c**, according to the bandwidth reservation procedure described in the prior art solution of figure 2.

20 Next, the multicast bearer is released by UE 100, transmitting a IGMP leave to the IP edge/DSLAM, as indicated with another **step 3:13**, followed by stream control signalling, performed via a trick play command, in this case RTSP PLAY, to MCF/MDF 105, in a **step 3:14**. RTSP PLAY is an
25 indication for MCF/MDF 105 to start to deliver the selected stream to UE 100 via unicast. In order to coordinate the RTSP setup, i.e. the session configuration signalling, executed in the preparation phase, with the streaming control signalling, performed by the RTSP PLAY, relevant
30 configuration data will be required. This configuration data, which was provided from AS 102 to UE 100 in a 200 OK in the preparation phase, is now provided to MCF/MDF 105

attached to the trick play command. MCF/MDF 105 responds to AS 102 with a 200 OK message in a **step 3:15**. As mentioned for the prior art scenario, the steaming control signalling may alternatively be executed as a two step signalling procedure via AS 102.

The continuing transmission of the media stream will now be performed directly from MCF/MDF 105 to UE 100 via the unicast bearer, as indicated in a final **step 3:16**.

A UE may obtain content by downloading the content using TCP, or HTTP download stream control, instead of via RTSP streaming. A method for downloading content to a UE, according to another embodiment, will therefore now be described in further detail with reference to figure 4.

A UE 100 presently receiving a current multicast session, recognises an upcoming demand to leave the multicast bearer. Such a demand is initiated by a preparation trigger event, triggering the preparation trigger, as indicated in a first **step 4:1**. In resemblance to the previous embodiment, the preparation trigger event may be defined as a manual activity to be entered by the end user, or as an event which is activated automatically.

The preparation trigger initiates a preparation phase, during which the UE 100 will be receiving downloaded content on a unicast bearer in parallel to receiving content on a multicast bearer. In a next **step 4:2**, UE 100 transmits a re-invite prepare message to AS 102, with the purpose of indicating a demand for a unicast bearer to AS 102. In a subsequent **step 4:3** AS 102 configures MCF/MDF 105, by setting up a TCP communication between MCF/MDF 105 and UE 100, in parallel with the present multicast bearer. In order not to tie up more resources than necessary, the TCP unicast bearer is typically chosen on a best effort level. MCF/MDF

105 responds to AS 102 with a 200 OK message, as indicated with a **step 4:4**, and AS 102 forwards the 200 OK message to UE 100 in a subsequent **step 4:5**.

At a next **step 4:6**, UE 100 starts a procedure which
5 corresponds to the trick play procedure described in the former embodiment, namely to download content progressively, e.g. by transmitting a HTTP progressive download to MCF/MDF 105, and content packages are returned to UE 100 in one or more 200 OK messages, as indicated with a **step 4:7**. In
10 resemblance to the former embodiment, the configuration data, provided with the 200 OK message in step 4:5, associated with the TCP setup, is used to coordinate this setup with the HTTP communication, or with an alternative TCP connection.

15 By continuously caching the received media content, UE 100 will be able to play-out the content at a later occasion, e.g. when the UE is performing the switching from the multicast bearer, thereby obtaining a smooth transition from multicast to unicast delivery.

20 If the load of the cache of UE 100 reach a critical level, UE 100, may choose to occasionally reduce the transmission pace, e.g. by sending one or more HTTP commands, such as, e.g. HTTP progressive slow, to MCF/MDF 105, keeping the session alive, but reducing the amount of
25 received content, as well as the reception load.

In a next **step 4:8**, a second trigger event, i.e. a release trigger event, initiates a release phase. The release trigger event may be defined e.g. by a cache threshold being exceeded, the expiry of a timer, the
30 recognition of a splicing item or any other indication in the received media steam, or a manually entered command.

In resemblance to the former embodiment, UE 100 may initiate a bandwidth reservation at this stage. Such a procedure is indicated with optional **steps 4:9a-4:9h**.

The trigger triggers UE 100 to leave the current
5 multicast bearer, typically by invoking IGMP leave, as indicated with a **step 4:10**. In addition to leaving the multicast bearer, UE 100 may also initiate an optional QOS modification procedure of the existing best effort TCP connection by sending a re-invite message, comprising a
10 request for a required QOS, in the existing SIP session, as indicated with the subsequent **steps 4:11 - 4:13**. In the following **steps 4:14** and **4:15**, UE 100 continues to transmit content, but from now on only via unicast delivery.

If a pre-defined cache threshold, defining the
15 release trigger, has been set to correspond to a time interval, T_{playout} , defining the time it takes to play out the content from the cache, and if this time exceeds the switching time, T_{switch} , i.e. the time it is estimated that it takes to switch from multicast reception to reception of the
20 same content over the unicast bearer, the switch from multicast to unicast will be experienced as a seamless switch by the end user.

The preparation for unicast, which is achieved by sending a re-invite prepare message in the first step of the
25 embodiments described above, may be triggered by any of a number of possible events in order to provide a smooth and fast switching from multicast to unicast. A method for scheduling switching between multicast and unicast delivery according to one exemplary embodiment will now be described
30 in more detail with reference to the signalling diagram of figure 5. The scheduling mechanism described in figure 5 is based on the current resource utilisation, and more

specifically on the resources presently available for unicast delivery.

If for example the present media distribution system has been dimensioned to handle a certain amount of unicast streams commonly requested at a busy hour, the media servers of the system will be under-utilized most of the time. The basic concept behind the scheduling mechanism about to be described is to utilize these resources for other purposes, when such resources are available. One typical implementation for such a scheduling mechanism is personalized advertising. If there is an upcoming commercial break for a certain channel, the scheduling mechanism can take this into consideration, and if necessary resources are available it can decide to trigger one or more UEs to switch over to personalized, unicast based advertising according to any of the embodiments described above. In addition to considering the current resource utilisation, the scheduling mechanism may also take other information in consideration.

In figure 5 a UE **100** is receiving a multicast session according to any of the previous embodiments. Apart from providing the conventional application server functionality, AS **102** is also provided with functionality for scheduling multicast to unicast switching. By implementing such a scheduling mechanism, an even more efficient utilisation of the available bearers, and the resources supporting these bearers, may be obtained. The proposed scheduling method may also provide an automated switching which requires no or minimal interaction from the end users. Although, for simplicity reasons, only one UE is shown in the figure, it is to be understood that a typical system comprising the proposed scheduling mechanism is

serving a plurality of UE's which are in connection with AS 102.

From the service providers perspective it may be preferable to be able to utilise a natural break in a media session for personalized unicast distribution, and, thus, preparations for a smooth switching to unicast for one or more selected UEs may be achieved by performing the proposed switching preparation procedure.

In a first **step 5:1**, a trigger, referred to as the selection trigger, is transmitted to AS 102 from a Control Function, in this case a Broadcast Media Control Function (BC-MCF) 500. The selection trigger is initiated by some predefined trigger event specified for the present media session, which may be based, e.g. on the available resources, on a playlist for commercials, or the occurrence of a splicing point in the transmitted media stream. One such event may be that a commercial advertisement break is about to occur in the media stream, which is recognised by BC-MCF 500. Alternatively, such a trigger may be recognised by the AS 102, directly.

In response to the selection trigger, AS 102 transmits a resource request to BC-MDF 500, requesting BC-MCF 500 for an indication of the amount of resources that are available for unicast for the present session. Such a request is indicated with a **step 5:2**, and responded to by BC-MCF 500 in a subsequent **step 5:3**.

In a next **step 5:4**, a selection criteria of AS 102 is activated for evaluating predefined conditions in order to determine which (if any) UEs that are to be triggered to initiate a preparation phase, preparing for an upcoming switch, prior to initiating the actual switching procedure. As indicated above, the selection is based on the current

resource utilization. Typically, this information is combined with additional personalized information, such as e.g. statistics of previously transmitted resource requests, or of any other relevant and accessible information, personalized user profiles, or the end users subscription category. Different information may be considered either alone, or in a certain combination, all according the relevant configuration.

For each UE that fulfil the predefined criteria, AS 102 sends a unicast preparation message, e.g. a SIP INFO message, which will be interpreted by the UE as a trigger to initiate the described preparation phase. This is indicated with a next **step 5:5**. As indicated above, a typical selection procedure, executed in step 5:4, will result in a plurality of unicast preparation messages, each of which will be transmitted to a selected UE.

In response to a unicast preparation message, UE 100 sends a 200 OK message to AS 102, as indicated with a **step 5:6**, and in a final **step 5:7**, UE 100 performs a unicast preparation flow, i.e. the preparation phase is triggered and executed according to any of the embodiments described above.

Once the preparation phase has been executed, the release trigger will initiate the actual switching, as indicated in any of the embodiments described above. In the present case, the switching may typically be triggered e.g. by the UE 100 recognising a splicing point in the received media session, or the timeout of a predefined timer.

For a fixed UE, such as e.g. a STB or for a mobile UE, such as e.g. a cellular telephone, to be able to use the described method according to any of the described embodiments, some modifications will be required. The UE

must be able to generate a re-invite prepare message when required, as well as to recognise the preparation and the release trigger. A simplified block scheme of such a user equipment, according to one embodiment, will now be
5 described with reference to figure 6, where only functionality which is necessary for the understanding of the proposed mechanisms has been included, while other common functionality has been omitted for simplicity reasons.

10 UE **100** comprises a conventional transceiver **600**, which is adapted to receive content provided from a content provider, as well as associated signalling, and to transmit signalling and content associated with a media session. UE 100 also comprises a conventional cache **601**, adapted to
15 cache received content in conventional manners. In addition UE 100 is provided with a trigger identifying means **602**, adapted to recognise triggering events which have been configured to trigger the preparation phase, as well as the release phase, respectively, as described above. The trigger
20 identifying means 602 may be adapted to recognise triggers received as a message via the transceiver 600, as a command entered or selected by an end user, via a conventional GUI, and/or as an instruction generated internally by a process or function of the UE 100. UE 100 also comprises a
25 Configuring Means **603**. The configuring means 603 is adapted to generate a re-invite prepare message, or a conventional re-invite message, whenever applicable, in response to the trigger identifying means having identified an associated trigger, or trigger event. Upon receiving a response
30 message, e.g. a 200 OK message, responding re-invite prepare message, the configuration means 603 has been adapted to recognise this response message, as being a response message

to a re-invite prepare message or a conventional re-invite message, so that the configuration data provided with a response to a re-invite prepare message can be handled accordingly. Configuration means 603 is also adapted to
5 coordinate a RTSP or TCP setup with any streaming control signalling or trick-play command, by recognising and adding the relevant configuration data to the relevant session. Remaining steps which are to be taken during a switching process are considered to be performed in a conventional
10 manner, using conventional UE architecture and communication protocols. If re-invite prepare message is to be identified with a specific re-invite message flag, the configuration means may also be adapted to set that flag whenever a re-invite prepare message is to be transmitted from the UE.

15 Also an Application Server, e.g. a Signalling Control Function (SCF), has to be adapted to be able to operate in accordance with any of the embodiments described above. A simplified block scheme, describing only the functionality which is essential for the understanding of
20 the described mechanism, will therefore be presented with reference to figure 7.

AS 102 comprises a conventional Transceiver **700**, adapted to communicate with the server side, distributing media sessions via multicast and unicast, and the client
25 side, i.e. UEs consuming the services available from a content provider. AS 102 also comprises Identifying Means **701**, adapted to distinguish a re-invite prepare message from a conventional one. Depending on the configuration, the identifying means 701 may be adapted to recognise a re-
30 invite prepare message on the basis of its content, e.g. no bandwidth requirements, or by checking if a re-invite prepare message flag is set or not. AS 102 also comprises

Configuration Means **702**, adapted to handle re-invite prepare messages which have been identified by the identifying means 701, accordingly. The identifying means 701 is also adapted to recognise response messages, responding to a re-invite
5 prepare message, as well as response messages responding to a conventional re-invite message. If a response message has been identified as a response to a re-invite prepare message, configuration means 702 is also adapted to provide relevant configuration data to UE with the response message.

10 If the AS 102 is configured also to provide the scheduling mechanism, described above, AS 102 also comprises a Selection Means **703**. The selection means 703 is adapted to respond to a selection trigger, received from a media control function, by transceiver 700, by requesting the
15 amount of resources available for unicast from the media control function. Once aware of the amount of available resources, selection means 703 is adapted to determine which one or more UEs that fulfils the predefined criteria, for initiating a preparation phase, which has been specified for
20 the scheduling function. This selection procedure is typically executed by combining the obtained current resource information with data, such as e.g. personalized user profiles, obtained from a data storage **704**. For every UE that fulfil the predefined criteria, selection means 703
25 is adapted to generate a unicast preparation message, which is sent to the respective UE via transceiver 700.

While the present invention has been illustrated and described with reference to specific exemplary
embodiments, it is to be understood by anyone of ordinary
30 skill in the art that various changes in form of details may be made therein without departing from the spirit and scope of the present invention as defined by the following claims.

Instead of using trick play commands a UE may for example instead be configured to communicate with a content server via another type of corresponding signalling.

Therefore it is to be understood that the above-
5 described exemplary embodiments have been provided only in a descriptive sense and will not be construed as placing any limitation on the scope of the invention.

ABBREVIATION LIST

	BC-MCF	BroadCasting MCF
	DSLAM	Digital Subscriber Line Access Multiplexer
5	IGMP	Internet Group Management Protocol
	MCF	Media Control Function
	MDF	Media Distribution Function
	N-PVR	Network based Personal Video Recorder
	RACS	Resource and Admission Control System
10	RTSP	Real Time Streaming Protocol
	SCF	Signalling Control Function
	PCRF	Policy and Charging Rule Function

CLAIMS

1. A method of switching a media session from multicast to unicast delivery, said media session being delivered from
5 a content server to a user equipment via a multicast bearer of an IP network, wherein the following steps are performed by the user equipment:
- initiating a preparation phase in response to having recognised a preparation trigger, said preparation phase
10 comprising preparing said content server for a unicast bearer, and
 - initiating a release phase in response to having recognised a release trigger, said release phase comprising releasing said multicast bearer and requesting
15 said content server to resume transmission of said media session via said unicast bearer.
2. A method according to claim 1, wherein said preparation phase comprise the steps of:
- 20 - requesting said application server to prepare for a unicast bearer by configuring said media session, without negotiation the bandwidth, and
 - receiving configuration data associated with said configuration in a response message responding to said
25 request.
3. A method according to claim 2, wherein said release phase further comprises the step of:
- 30 - providing said configuration data to the content server in the request to resume transmission via unicast.

4. A method according to claim 3, wherein said resuming request is a trick play command.

5. A method according to any of claims 2-4, wherein said preparation phase and bandwidth negotiating step are initiated by transmitting a re-invite prepare message and said response message is a 200 OK message.

6. A method according to any of claims 1-5, wherein said release phase further comprising the step of:
- coordinating an RTSP streaming control signalling executed in said release phase with an RTSP setup executed in said preparation phase by identifying configuration data associated with said RTSP setup.

7. A method according to any of claims 1-6, wherein said unicast bearer is a unicast streaming bearer.

8. A method according to claim 1, wherein said preparation phase comprise the steps of:
- requesting said content server to configure said content server and to set up a unicast bearer in parallel with said multicast bearer, and
- receiving configuration data in a response message responding to said request.

9. A method according to claim 8, wherein said unicast bearer is a TCP download or HTTP download bearer on a best effort level.

10. A method according to claim 8 or 9, wherein said preparation phase comprise the further steps of:

- requesting for content delivery via progressive download,
- receiving content via one or more response messages, and
- 5 - caching said received content.

11. A method according to claim 10, wherein said content delivery request is a HTTP download request and the one or more response messages are 200 OK messages.

10

12. A method according to any of claims 8-11, wherein said release trigger is a predefined cache threshold corresponding to a predefined time interval, T_{playout} , said cache threshold being chosen so that

15

$$T_{\text{playout}} > T_{\text{switch}}$$

wherein T_{switch} is an estimated switching time.

13. A method according to any preceding claims, wherein said preparation phase and release phase are triggered by any of:

20

- a splicing point in the received media stream,
- a timeout of timer,
- a trigger message, or
- a manual activation entered by a user of said user
- 25 equipment.

14. A method according to any of the preceding claims, wherein said release phase comprises the further step of:
- negotiating the bandwidth by transmitting a second
30 request to said content server prior to leaving said multicast channel.

15.A method according to any of the preceding claims,
wherein said release phase further comprises the step of:
-initiating a resource reservation process requesting for
a guaranteed bandwidth subsequent to having left said
5 multicast channel.

16.A method of providing for a switching of a media session
from multicast to unicast delivery, said media session
being delivered from a content server to a user equipment
10 via an IP network, wherein the following steps are
performed by an intermediate application server:
- recognising a request for preparing said content server
for a unicast bearer, said request being received from
said user equipment,
15 - preparing for said unicast bearer by configuring said
multicast session,
- recognising a response to said request, and
- transmitting said response to said user equipment, said
response comprising configuring data associated with said
20 unicast bearer preparation.

17.A method according to claim 16, wherein said preparation
step is executed by preparing said content server for a
unicast bearer by configuring said media session but
25 without negotiating the bandwidth.

18.A method according to claim 16, wherein said preparation
step comprises the step of:
- configuring said content server and setting up a
30 unicast bearer in parallel with said multicast bearer.

19. A method of scheduling unicast delivery to at least one user equipment receiving a media session transmitted via multicast from a content server via an IP network, wherein the following steps are performed by an

intermediate application server:

- recognising a selection trigger, said selection trigger indicating that a predefined trigger event has occurred,

- retrieving an indication of the amount of resources currently available for unicast delivery from said media control function,

- evaluating conditions for triggering at least one user equipments to initiate a preparation phase, said evaluating step being based on at least predefined selection criteria in combination with said retrieved

- resource indication, and

- triggering each of said at least one selected user equipments by transmitting a preparation trigger to the user equipment,

wherein said preparation phase comprises a preparation for an upcoming switch from multicast to unicast, said preparation phase being executed prior to the user equipment initiating said switch.

20. A user equipment adapted to switch from multicast to

unicast reception of a media session, said media session being delivered from a content server to said user equipment via a multicast bearer of an IP network, said user equipment comprising:

- trigger identifying means for recognising a preparation trigger event, and a release trigger event, and

- configuring means for initiating a preparation phase in response to having recognised said preparation trigger

event, said preparation phase comprising the step of preparing said content server for a unicast bearer prior to performing said switching.

5 21.A method according to claim 20, wherein said user equipment is a mobile user equipment.

22.A method according to claim 20, wherein said user equipment is a stationary user equipment.

10

23.An application server adapted to participate in a switching of a media session from multicast to unicast delivery, said media session being delivered from a content server to a user equipment via an IP network,
15 said application server comprising:

- identifying means for recognising a request for preparing said content server for a unicast bearer, said request being received from said user equipment and for recognising a response to such a request, and
20 - configuration means for preparing for said unicast bearer by configuring said multicast session and for returning configuring data retrieved in a response to said user equipment.

25 24.An application server adapted to schedule unicast delivery to at least one user equipment receiving a media session transmitted from a content server via an IP network, said application server comprising:
-selection means for recognising a selection trigger
30 indicating that a predefined trigger event has occurred, for retrieving an indication of the amount resources currently available for unicast delivery, for evaluating

conditions for triggering at least one user equipment to initiate a preparation phase, and for generating a preparation trigger for each of said at least one selected user equipments,

5 said application server being further adapted to transmit said one or more preparation triggers to the respective user equipment,

wherein said preparation phase comprising a preparation for an upcoming switch from multicast to unicast which is
10 executed prior to the user equipment initiating said switch and said evaluating step being based on at least predefined selection criteria in combination with said retrieved resource indication.

15 25. An application server according to claim 23 or 24, wherein said application server is a signalling control function.

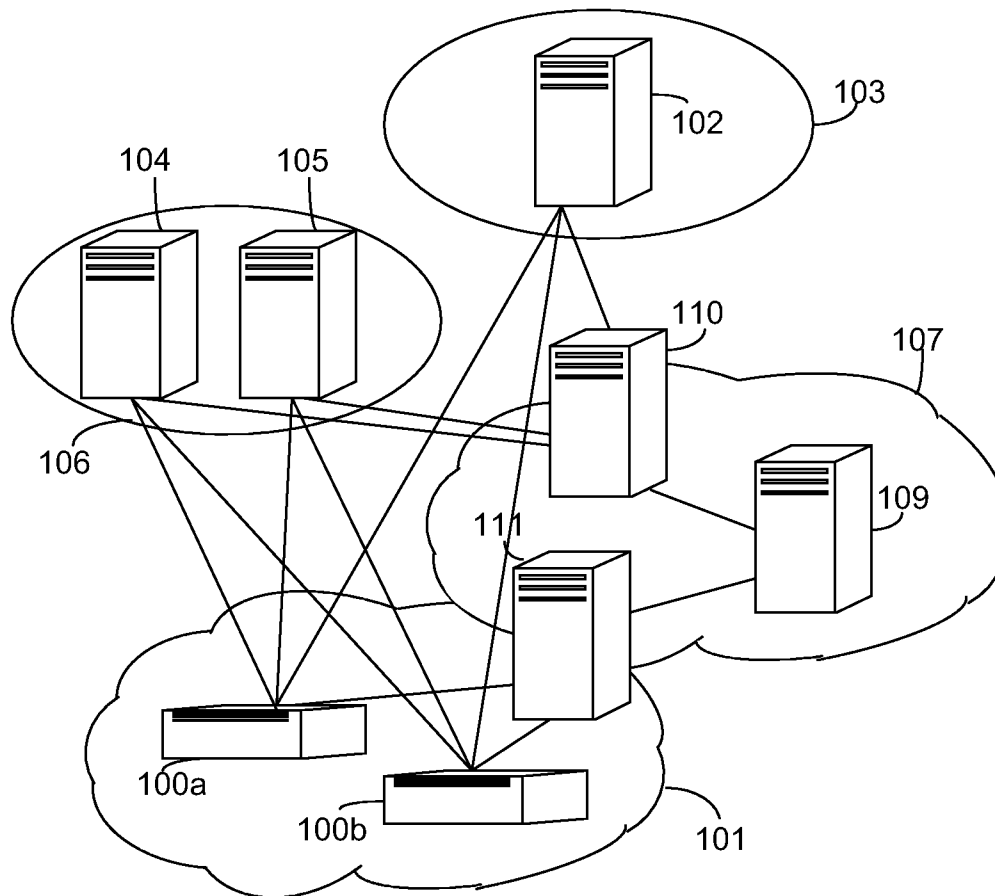


Figure 1 (PRIOR ART)

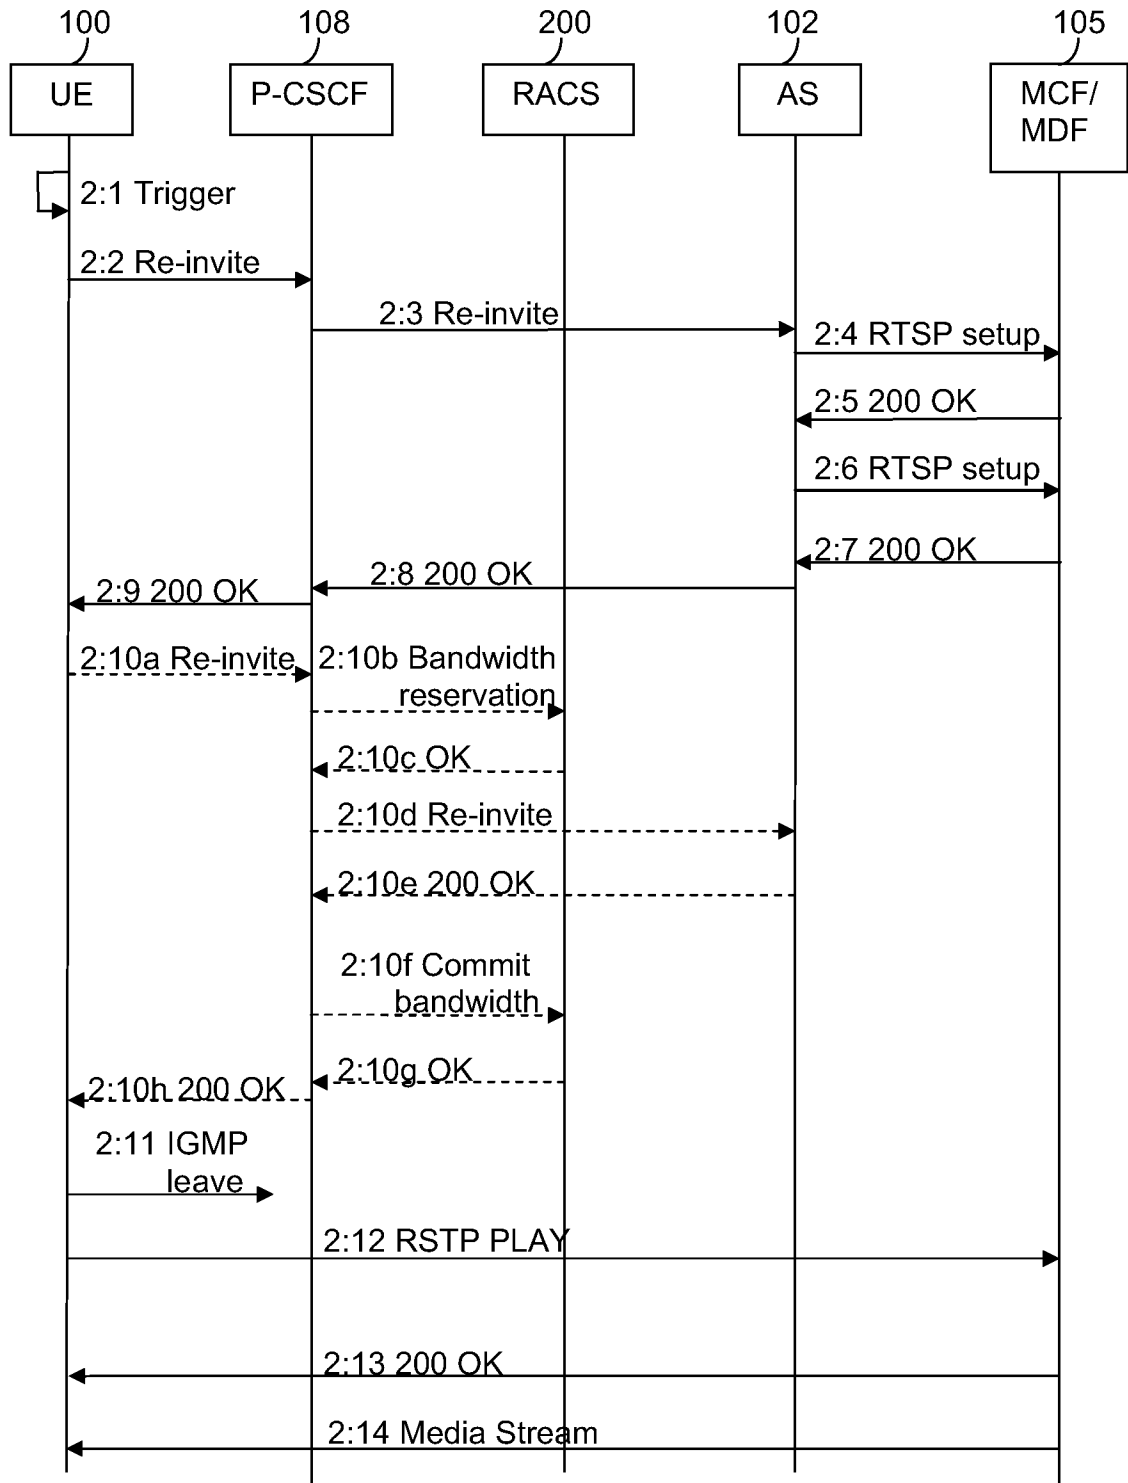


Figure 2 (PRIOR ART)

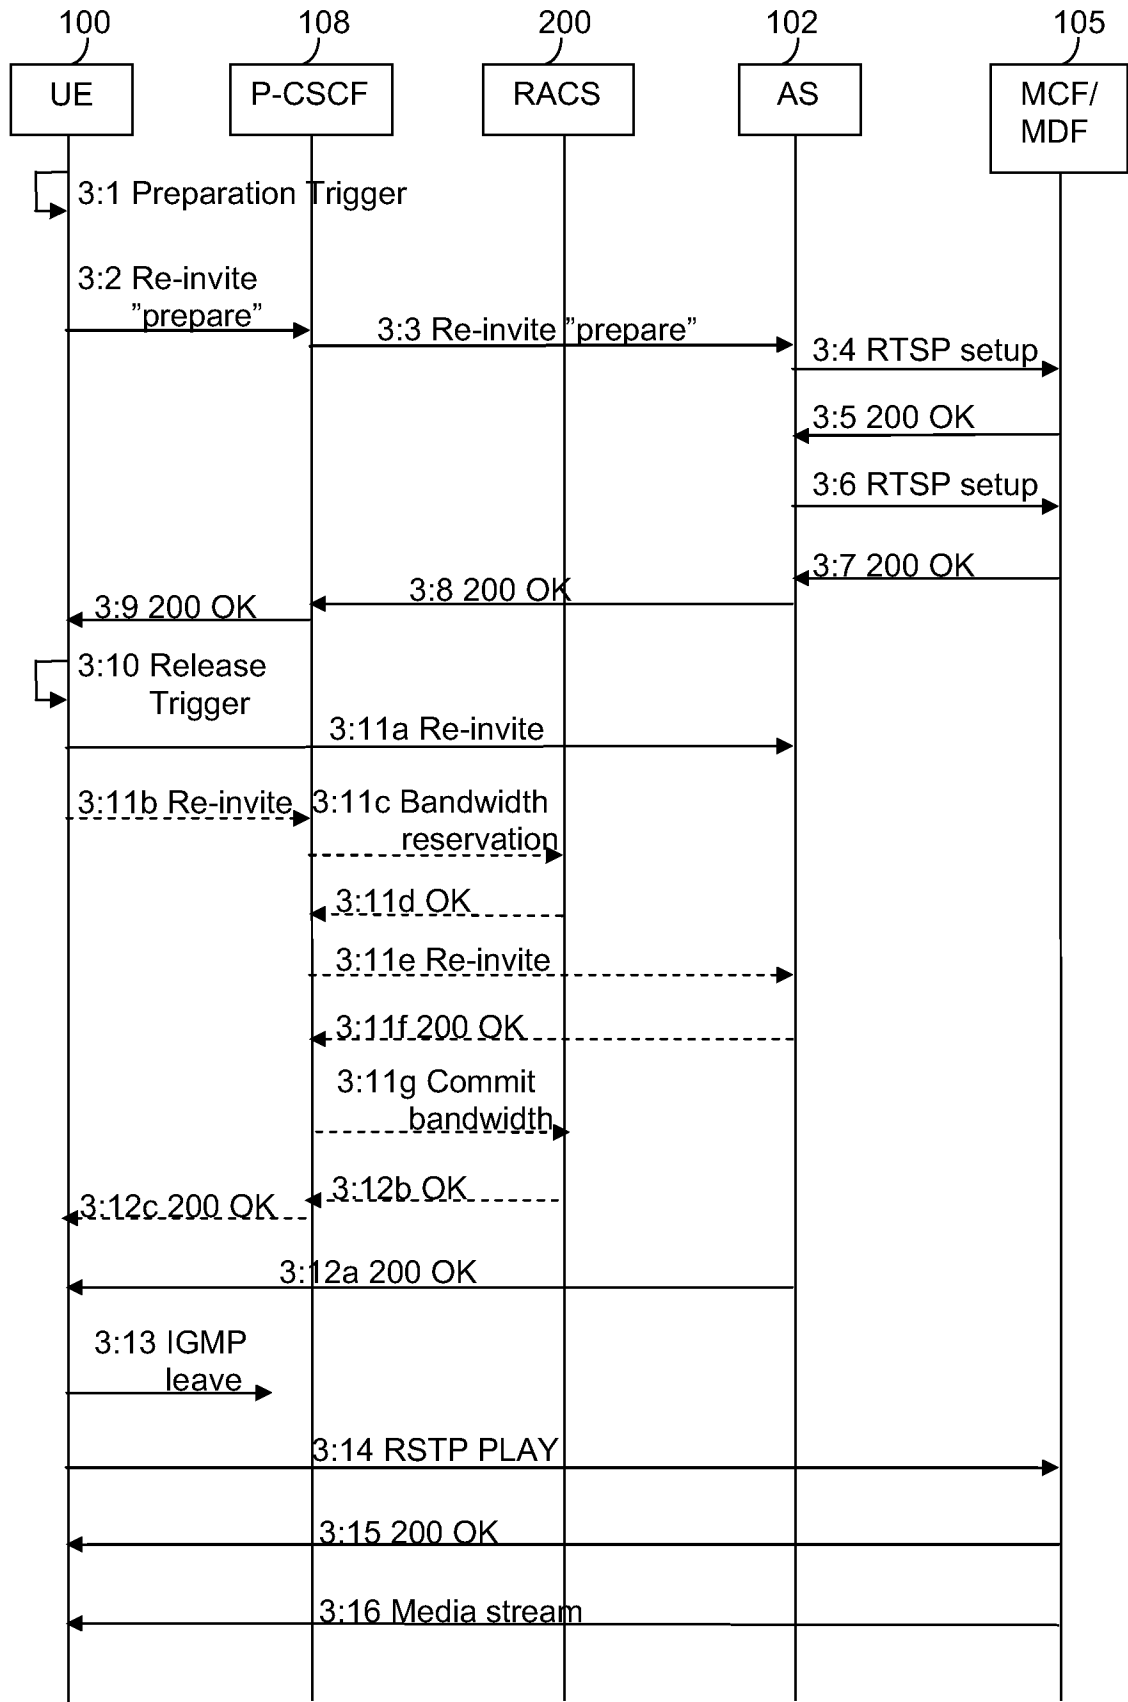


Figure 3

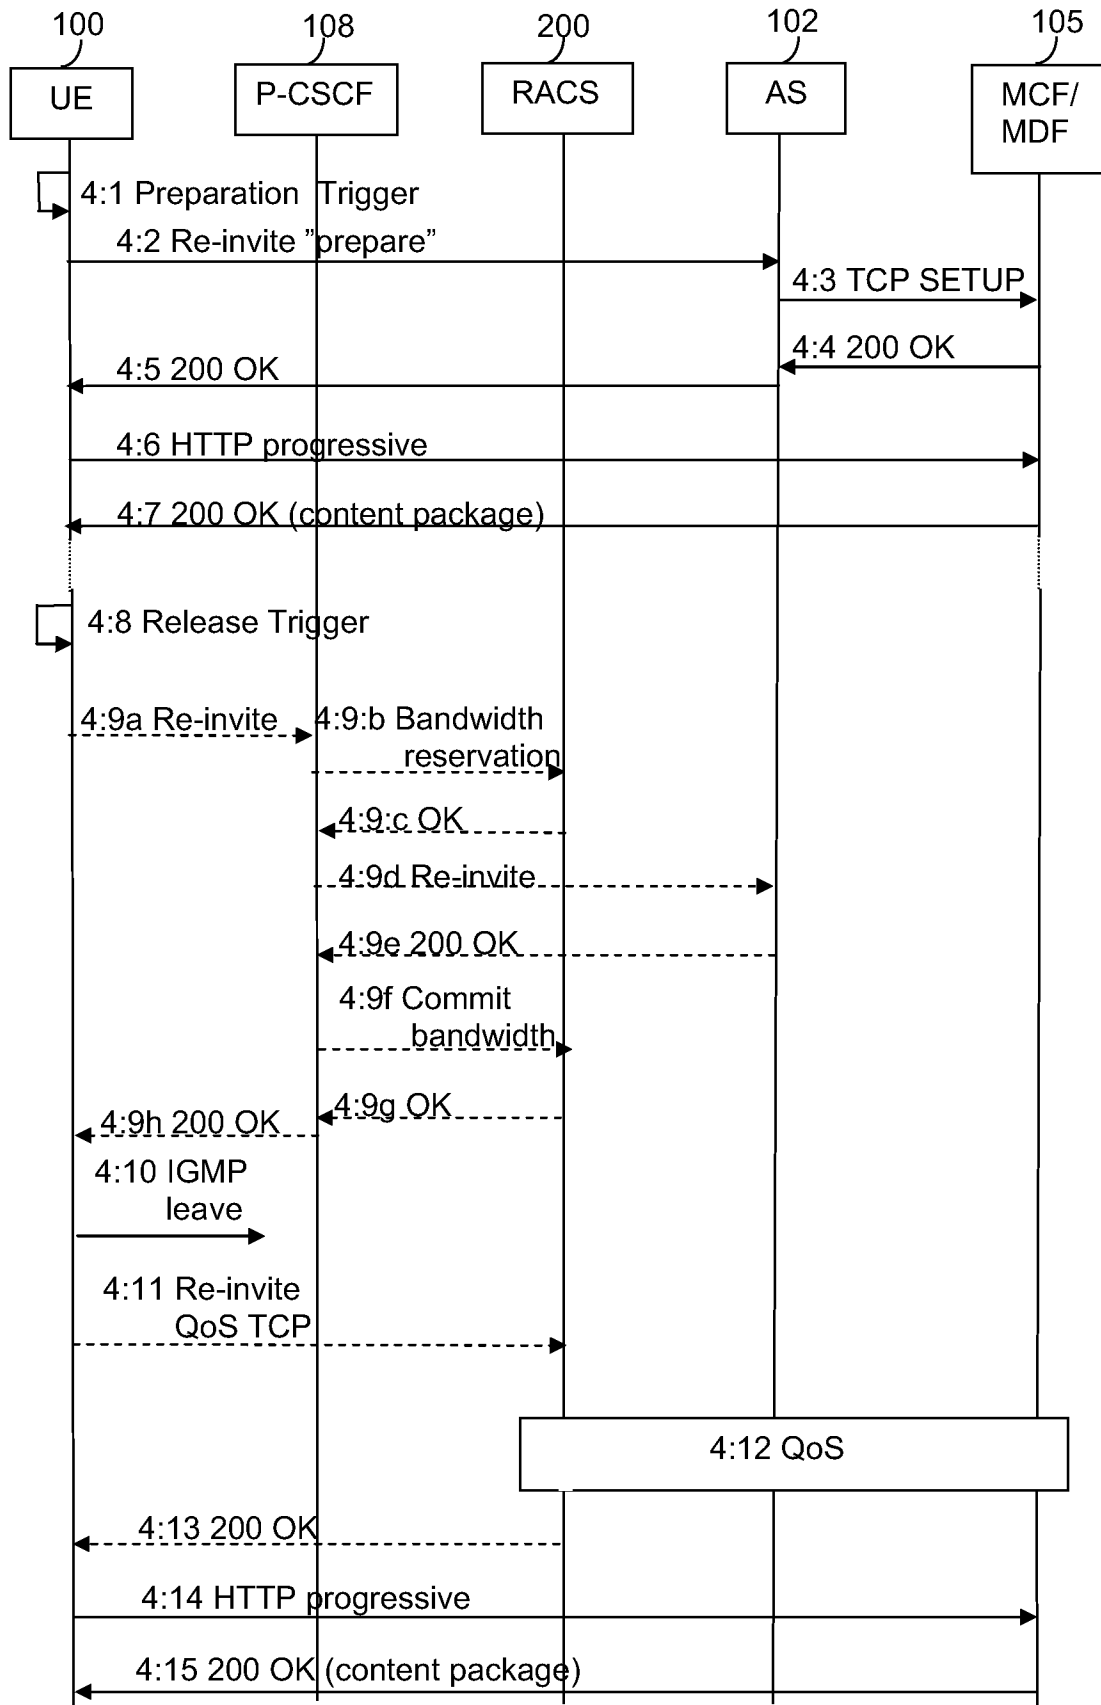


Figure 4

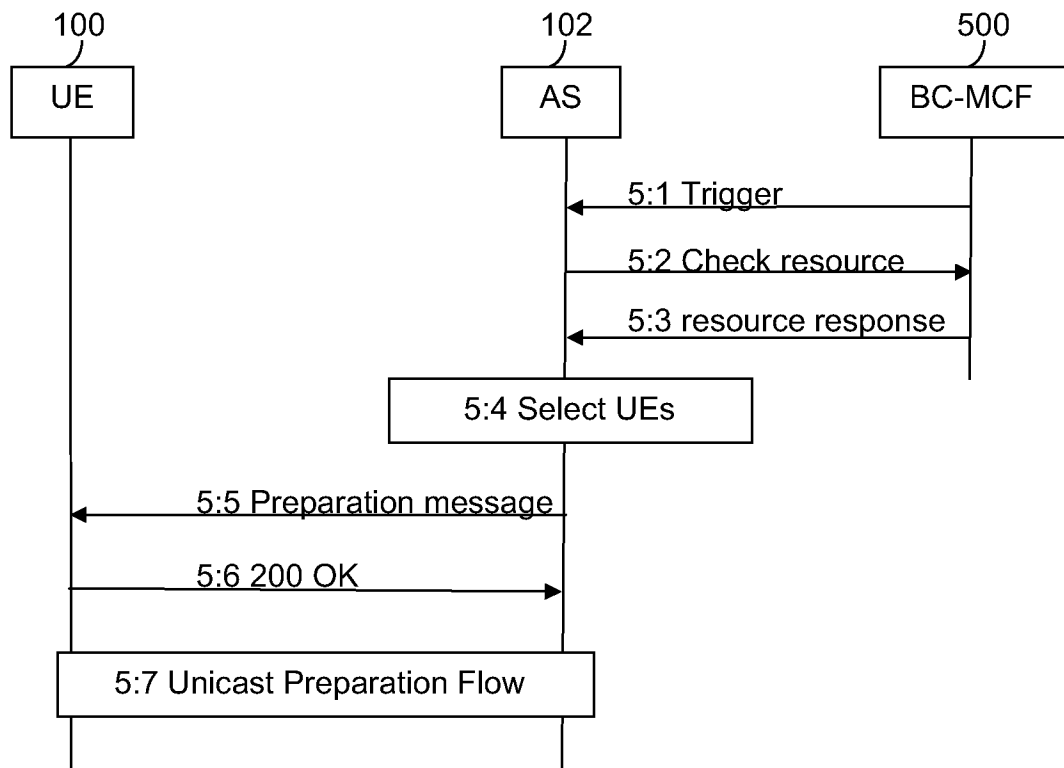


Figure 5

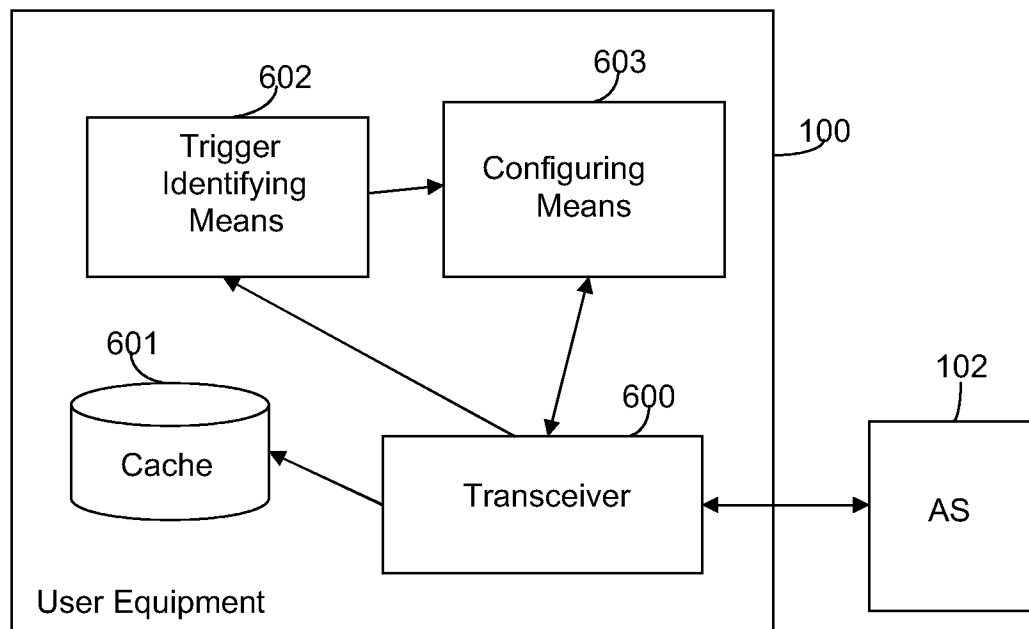


Figure 6

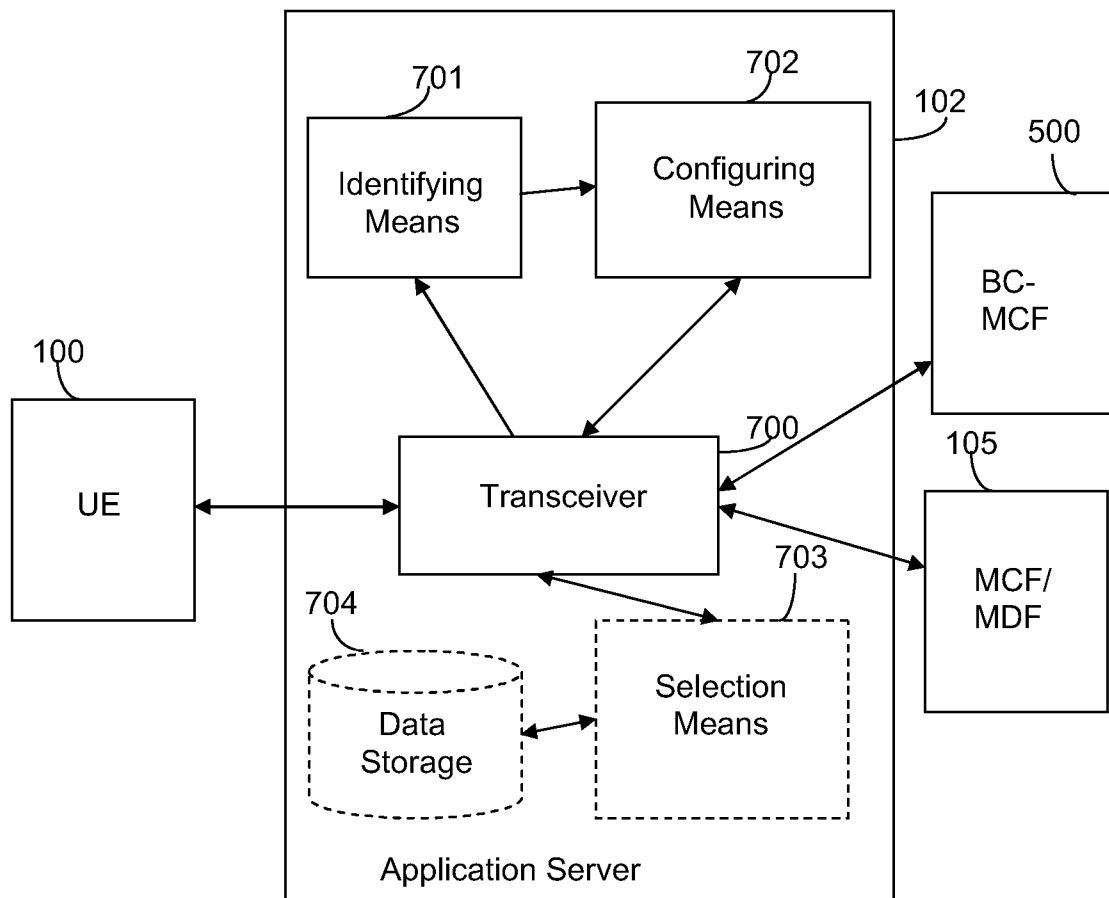


Figure 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2008/050669

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: H04H, H04L, H04N, H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 20070101012 A1 (Q.LI ET AL), 3 May 2007 (03.05.2007), page 1 - page 2, figure 1, claims 1, 4-6, abstract --	1-25
A	WO 2007101473 A1 (TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)), 13 Sept 2007 (13.09.2007), page 3 - page 4; page 11 - page 13, figures 1-2, abstract --	1-25
A	US 20080109853 A1 (T.EINARSSON ET AL), 8 May 2008 (08.05.2008), paragraphs [0020],[0099]-[0106], [0123]-[0128], fig.5,9,abstract --	1-25

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 March 2009

Date of mailing of the international search report

11-03-2009

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Anders Ackeberg /itw

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2008/050669

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 20060200576 A1 (J.PICKENS ET AL), 7 Sept 2006 (07.09.2006), paragraphs [0008],[0026], [0028]-[0040],claim 6,abstract -- -----	1-25

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2008/050669

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 1, 16, 19-20, 23-24 (in part)
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

See supplemental box.

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of any additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

Continuation of Box II.2

The claimed invention solves two different problems, in the technical field of IPTV, by a method for switching of a media session from a multicast- to unicast bearer, and a method for scheduling a unicast delivery (see Box V). However, the two different methods are linked such that they form a single general inventive concept, by the common technical features "initiating a preparation phase ..., wherein said preparation phase comprises a preparation for a switch from multicast to unicast".

However, the subject-matter of claims 1, 16, 19-20 and 23-24 relate to an extremely large number of possible methods and networks. Support within the meaning of Article 6 PCT is to be found for only a very small proportion of the methods and networks claimed. In the present case, the claims so lack support, that a meaningful search over the whole of the claimed scope is impossible. Consequently, the search has been carried out for those parts of the claims which appear to be supported and disclosed, namely those parts related to IPTV.

Furthermore, since the statements "preparation phase", "preparing said content server for a unicast bearer", "preparing for said unicast bearer by configuring said multicast session", "said response comprising configuring data" and "transmitting a preparation trigger ..., wherein said preparation phase comprises a preparation", used in independent claims 1, 16, 19-20 and 23-24, are vague and unclear (see Box VIII), a search has been carried out for a method and arrangement for switching from multicast to unicast delivery, comprising a "re-invite prepare" message which differs from the prior art "re-invite" message in that the "re-invite prepare" message does not request for any bandwidth or network resources, and instead of assigning resources for a unicast bearer it performs a unicast bearer preparation procedure at the server side.

The applicant's attention is drawn to the fact that claims relating to inventions in respect of which no international search report has been established will not be the subject of an international preliminary examination (Rule 66.1(e) PCT). This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure. If the applicant proceeds into the national/regional phase before a national/regional office, the applicant is reminded that a search may be carried out during examination by the national/regional office, should the problems which led to the Article 17(2) declaration be overcome.

International patent classification (IPC)**H04H 60/06** (2008.01)**H04H 20/26** (2008.01)**H04L 29/06** (2006.01)**Download your patent documents at www.prv.se**

The cited patent documents can be downloaded at www.prv.se by following the links:

- In English/Searches and advisory services/Cited documents (service in English) or
- e-tjänster/anförda dokument (service in Swedish).

Use the application number as username.

The password is **UGFLMLPUAB**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SE2008/050669

US 20070101012 A1 03/05/2007 NONE

WO 2007101473 A1 13/09/2007 EP 2005750 A 24/12/2008

US 20080109853 A1 08/05/2008 NONE

US 20060200576 A1 07/09/2006 NONE