




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G09G 5/00, G06F 1/32, H04N 5/44	A1	(11) International Publication Number: WO 96/16395 (43) International Publication Date: 30 May 1996 (30.05.96)
(21) International Application Number: PCT/IB95/00916 (22) International Filing Date: 25 October 1995 (25.10.95) (30) Priority Data: 94203351.5 17 November 1994 (17.11.94) EP (34) Countries for which the regional or international application was filed: NL et al. (71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 5, Kista, S-164 85 Stockholm (SE). (72) Inventors: KIWIET, Nicoline, Johanna; 466 Fisherpond Road, Yorktown Heights, NY 10598 (US). VAN DER WAAL, Robert, Gerbrand; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (74) Agent: DE HAAS, Laurens, J.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).		(81) Designated States: CN, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: APPARATUS COMPRISING A DISPLAY SCREEN WHICH IS ACTIVE IN THE OPERATING MODE AND IN THE STANDBY MODE

(57) Abstract

The apparatus comprises switching means for switching between an operating mode and a standby mode. It generates a picture on a display screen in the standby mode. The apparatus comprises, for example a microphone for picking up a sound volume in the vicinity of the apparatus. The microphone is coupled to the picture-generating means in order to change the picture in the standby mode in response to a change of the measured sound volume.

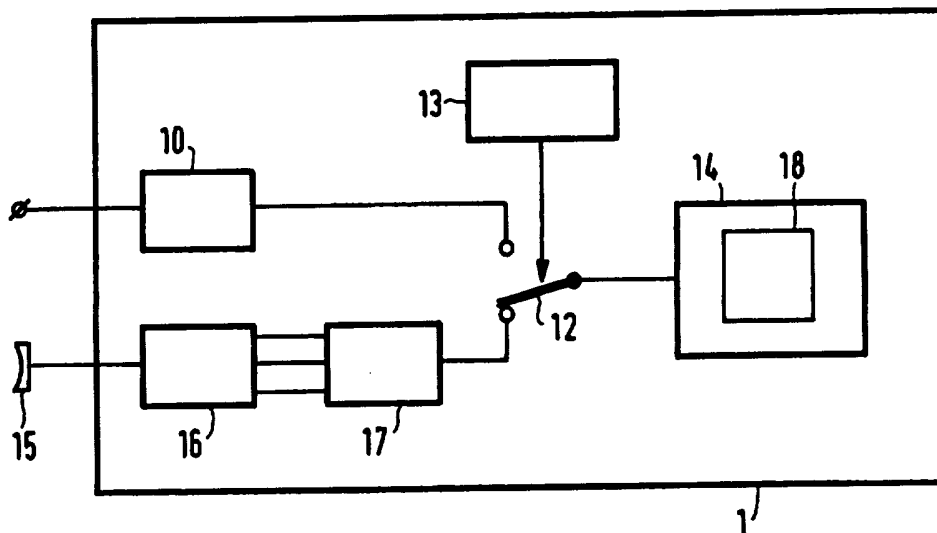

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo			SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	KZ	Kazakhstan	SK	Slovakia
CM	Cameroon	LI	Liechtenstein	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon				

Apparatus comprising a display screen which is active in the operating mode and in the standby mode.

The invention relates to an apparatus which comprises switching means for switching the apparatus between an operating mode and a standby mode, a display screen, and picture generating means for generating a picture on the display screen in the standby mode.

5 When the apparatus is a PC (Personal Computer) operating on the basis of the Microsoft Windows program, for example it is known to switch over from the operating mode to a standby mode if no operations are to be executed *via* the keyboard for a time interval of predetermined duration. The standby mode is in that case a so-called "screen saving" mode in which the picture is, for example darkened or changes in the course of time
10 in order to prevent burning in of the display screen.

It is *inter alia* an object of the invention to provide an apparatus which is more attractive to the consumer in the standby mode and which provides an alternative method of changing the picture.

The apparatus in accordance with the invention is characterized in that it
15 comprises measuring means for measuring a value of a parameter of an environment of the apparatus, coupled to the picture-generating means, in order to change a picture composition in the standby mode in response to a change of the measured value. The parameter of the environment is preferably chosen so that the user of the apparatus can directly influence this parameter (by way of normal physical expressions which are not specifically aimed at control
20 members for the operating mode of the apparatus). This concerns more than changes due exclusively to the elapsing of time. Thus, the apparatus is prevented from monotonously displaying the same picture in the standby mode. The user can (possibly subconsciously) induce a change of the composition of the picture while the apparatus remains in the standby mode.

25 An embodiment of the apparatus in accordance with the invention is characterized in that the parameter is a sound signal. Notably a sound signal can be simply influenced by the user in a variety of ways, so that a variety of changes of the picture composition are possible in response thereto.

An embodiment of the apparatus in accordance with the invention is

characterized in that the measuring means are arranged to measure at least one of the following properties of the sound signal:

- a volume
 - a pitch
 - 5 - a frequency at which maxima occur in the volume,
- and that the picture-generating means are arranged to change the picture composition in response to a change of at least one of said properties. Other feasible parameters are for example an ambient temperature, an ambient light intensity, a spectral composition of the ambient light, *etc.*

10 An embodiment of the apparatus in accordance with the invention is characterized in that the measuring means are arranged to measure at least two of said properties of the sound signal, and that picture-generating means are arranged to induce a unique, respective change of the picture composition in response to a change of each of the measured properties. By coupling a unique type of response to each type of change, a varied
15 picture change is achieved.

An embodiment of the apparatus in accordance with the invention is characterized in that the picture-generating means are arranged to change at least one of the following picture characteristics in response to the change of the measured value:

- a colour contents
- 20 - a size of objects displayed
- a number of objects displayed.

For example, a change of size can be coupled to a change of sound volume, a change of colour can be coupled to a change of frequency, and another change can be coupled to a change of pitch. Other combinations, however, are also feasible. The user himself may even
25 be allowed to adjust the combinations to be used.

The invention is particularly suitable for use in a television receiver; this receiver will usually be switched between the operating mode and the standby mode by the user. The invention, however, can also be used in other apparatus, not only for screen saving purposes but also for energy saving purposes when a part of the apparatus which is normally
30 supplied with energy in the operating mode is not supplied with energy or with less energy, in the standby mode. Generally speaking, in the standby mode an essential part of the apparatus, for example the receiving section, is substantially inactive in the function for which it is provided (for example, supplying the display screen with supplied information and/or information explicitly selected by the user).

These and other aspects of the invention and its advantages will be described in detail hereinafter with reference to the Figures; therein:

Fig. 1 shows an apparatus in accordance with the invention, and

Fig. 2 shows an example of a picture composition.

5 The Figure shows, by way of example, an apparatus 1 in the form of a television receiver. The receiver comprises a receiving and decoding section 10 with an input and an output. The receiver 1 also comprises a microphone 15 which is coupled to a measuring unit 16 which itself is coupled to picture-generating means 17. The output of the picture-generating means 17 and that of the receiving and decoding section 10 are coupled to
10 a switch 12 which optionally connects one of the two outputs to picture display means 14. The picture display means comprise a display screen 18. The switch 12 is controlled by a control unit 13.

 During operation, the control unit 13 receives switching commands, for example from a remote control, in response to which the control unit 13 can switch the
15 switch 12 to and fro between a first position (not shown), in which the output of the receiving and decoding section 10 is coupled to the picture display means 14, and a second position in which the output of the picture-generating means 17 is coupled to the picture display means 14. The first position corresponds to the operating mode of the apparatus 1 whereas the second position corresponds to the standby mode.

20 In the operating mode the apparatus acts as a television receiver and the display means 14 display, on the display screen 18, video signals received on the input of the receiving and decoding unit 10 (for example, from an aerial, a cable television connection, or a video recorder, *etc.*).

 In the standby mode the display means 14 display a picture on the display
25 screen 18 which has been generated by the picture-generating means 17. The picture-generating means 17 comprise, for example a processor (not shown) which executes a graphics program so as to generate the picture. The graphics program provides, for example a picture which comprises a number of circular discs of different colour, diameter and position.

30 The microphone 15 picks up sound from the environment of the apparatus 1 and hence forms a signal which is applied to the measuring unit 16. The measuring unit determines a number of properties of this signal, for example the volume (the amplitude of the signal averaged over a predetermined period of, for example 1 second), the pitch (for example, the period duration between successive zero crossings of the signal), and the peak

frequency, *i.e.* the inverse of the distance in time between instants at which maxima occur in the volume as a function of time.

The measured values of these properties are applied to the picture-generating means 17 which generate the picture in dependence on the measured values.

5 Fig. 2 shows an example of a composition of a picture 20. For example, each time when a peak occurs in the sound signal, the picture-generating means 17 add to the picture 20 a circular disc 22a-d of a size which is proportional to the sound volume and of a colour of a wavelength which is proportional to the pitch. A circular disc is omitted again some time after having been generated.

10 It will be evident that this picture 20 is given merely by way of example and that numerous other types of pictures are feasible which can all be made dependent on the measured properties of the sound signal. For example, instead of using graphically generated pictures of circular segments, use can be made of a graphics system which executes graphic commands which result in a generated picture, the graphics commands (for
15 example outline descriptions as in the language Postscript (R) by Adobe (R), or graphics commands such as available within Windows (R) by Microsoft (R)), being stored in advance in a memory and being supplemented in dependence on the properties of the sound signal (for example with position, colour, rotation or scale commands).

Furthermore, use can be made of a sprite (a bit map of a partial image
20 representing an object) which is stored in a memory, for example a sprite of an animal. For generating the contents of this sprite are then reproduced in the image. Examples of selectable image characteristics are then the choice between different sprites stored in the memory (for example, of different animals), the size of display, colour, speed, direction and path of movements in the image, in dependence on the measured value of the parameter of
25 the environment, for example the sound signal. Use can also be made of pictures of landscapes, as a background, or to introduce changes (seasonal effects, weather conditions, *etc.*), in dependence on the measured value of the parameter of the environment. Numerous other possibilities also exist.

Preferably, the changes in the composition of the picture concern
30 incremental changes, which means that not each time a new picture is generated whose composition is not related to the previous picture, but that picture is only partly changed each time.

The pictures and the way in which they depend on the parameters of the environment can also be automatically changed by the apparatus in the course of time (for

example, after a period of hours or weeks), or be changed by the user. Thus, the type of sprite or the relationship between the picture characteristics and the properties of the parameter of the environment can be made variable.

Even though the invention is notably suitable for television receivers and
5 monitors for picture reproduction apparatus, and has also been described in this context, it
can also be used for other equipment such as personal computers. Instead of the microphone
15 for measuring a sound signal, other types of sensor can be used, for example sensors for
measuring other parameters of the environment, such as temperature, ambient light, motions
in the environment *etc.* Such sensors can also be used in combination or together with a
10 microphone so as to initiate a respective unique change in the picture.

CLAIMS:

1. An apparatus which comprises switching means for switching the apparatus between an operating mode and a standby mode, a display screen, and picture generating means for generating a picture on the display screen in the standby mode, characterized in that the apparatus comprises measuring means for measuring a value of a parameter of an environment of the apparatus, coupled to the picture-generating means, in order to change a picture composition in the standby mode in response to a change of the measured value.
2. An apparatus as claimed in Claim 1, characterized in that the parameter is a sound signal.
3. An apparatus as claimed in Claim 2, characterized in that the measuring means are arranged to measure at least one of the following properties of the sound signal:
 - a volume
 - a pitch
 - a frequency at which maxima occur in the volume
- and that the picture-generating means are arranged to change the picture composition in response to a change of at least one of said properties.
4. An apparatus as claimed in Claim 3, characterized in that the measuring means are arranged to measure at least two of said properties of the sound signal, and that picture-generating means are arranged to induce a unique, respective change of the picture composition in response to a change of each of the measured properties.
5. An apparatus as claimed in any one of the Claims 1 to 4, characterized in that the picture-generating means are arranged to change at least one of the following picture characteristics in response to the change of the measured value:
 - a colour contents
 - a size of objects displayed
 - a number of objects displayed.
6. An apparatus as claimed in any one of the Claims 1 to 5, characterized in that it constitutes a television receiver arranged to display an externally received video signal on the display screen in the operating mode.

1/1

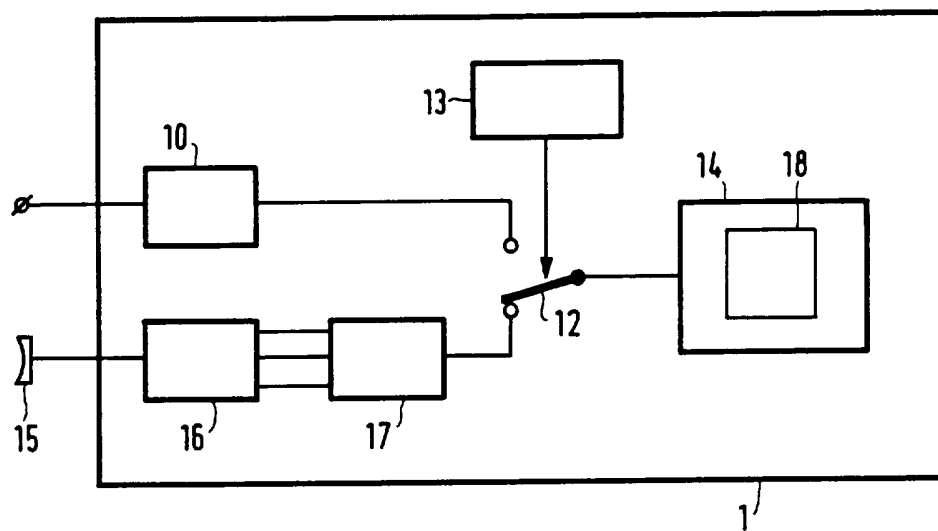


FIG.1

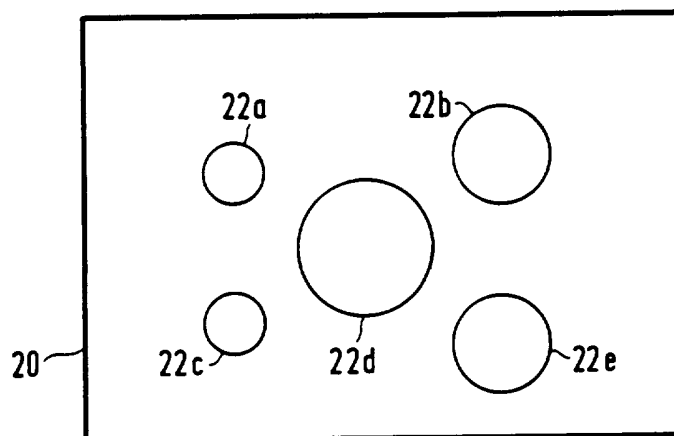


FIG.2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 95/00916

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: G09G 5/00, G06F 1/32, H04N 5/44

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: G09G, G06F, H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0576125 A1 (CANON KABUSHIKI KAISHA), 29 December 1993 (29.12.93), column 10, line 45 - line 55 --	1-6
A	EP 0661682 A1 (CANON KABUSHIKI KAISHA), 5 July 1995 (05.07.95) -- -----	1-6



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 March 1996

Date of mailing of the international search report

15 -03- 1996

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Jan Silfverling
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

05/02/96

International application No.

PCT/IB 95/00916

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A1- 0576125	29/12/93	NONE	
EP-A1- 0661682	05/07/95	NONE	