



(51) International Patent Classification:
A61B 1/00 (2006.01)

[US/US]; 242 Ipswich Road, Topsfield, Massachusetts 01983 (US).

(21) International Application Number:
PCT/US2009/056238

(74) Agent: **SINGER, James M.**; Pepper Hamilton LLP, One Mellon Center, 50th Floor, 500 Grant Street, Pittsburgh, Pennsylvania 15219 (US).

(22) International Filing Date:
8 September 2009 (08.09.2009)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/094,606 5 September 2008 (05.09.2008) US

(71) Applicants (for all designated States except US): **ZUBI-ATE, Brett** [US/US]; 1600 Robin Court, Pittsburgh, Pennsylvania 15237 (US). **CARNEGIE MELLON UNIVERSITY** [US/US]; 5000 Forbes Avenue, Pittsburgh, Pennsylvania 15213 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHOSSET, Howard** [US/US]; 102 Meadow Heights Drive, Pittsburgh, Pennsylvania 15215 (US). **KOLB, Anthony** [US/US]; 57 Hampden Road, East Longmeadow, Massachusetts 01028 (US). **DEGANI, Amir** [US/US]; 5535 Hobart Street, Pittsburgh, Pennsylvania 15217 (US). **GILMARTIN, Kevin P.** [US/US]; 28 Emerald Avenue, Braintree, Massachusetts 02184 (US). **FLAHERTY, J. Christopher**

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MULTI-LINKED ENDOSCOPIC DEVICE WITH SPHERICAL DISTAL ASSEMBLY

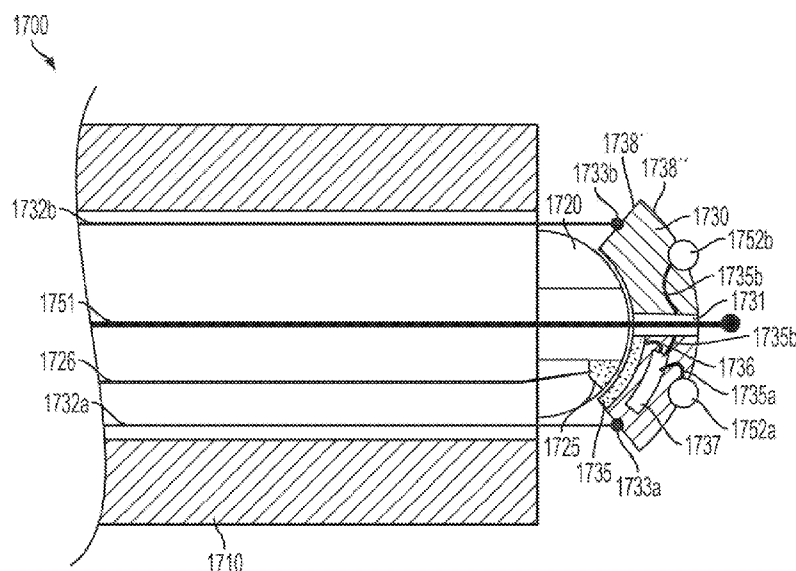


FIG. 17

(57) Abstract: A device for performing a procedure may include an elongate tube having a proximal end and a distal end and an adapted link having a proximal end and a distal end. The distal end may include a first mating surface, where the proximal end may be configured to attach to the distal end of the elongate tube. The device may also include a rotating link having a second mating surface configured to rotatably interface with the adapted link first mating surface.

WO 2010/028371 A1



Published:

— *with international search report (Art. 21(3))*

A. TITLE --- MULTI-LINKED ENDOSCOPIC DEVICE WITH SPHERICAL DISTAL ASSEMBLY

B. CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of the filing date of Provisional Patent Application No. 61/094,606 filed September 5, 2008. This application is related to U.S. Patent Application Nos. 11/630,279; 11/838,519; 11/876,304; 11/923,246; 12/038,560; 12/038,691; 12/038,279 and PCT/US09/40548.

C.-E. Not Applicable

F. BACKGROUND

[0002] This application discloses an invention that is related, generally and in various embodiments, to a multi-linked or continuum device, and other devices having a rotatable distal assembly. Typically, most medical probes and/or multi-linked devices can only “see forward”, that is, the orientation of the leading, or distal end, is parallel to the direction of movement of the probe or multi-linked device. In order to look or aim in any non-moving direction, the probe or device must bend or flex in the desired viewing direction, which occupies volume. In certain applications, the volume required for bending the probe to view other directions is limited, or in extreme situations, non-existent.

G. SUMMARY

[0003] Before the present methods are described, it is to be understood that this invention is not limited to the particular systems, methodologies or protocols described, as these may vary. It is also to be understood that the terminology used herein is for the purpose

of describing particular embodiments only, and is not intended to limit the scope of the present disclosure which will be limited only by the appended claims.

[0004] It must be noted that as used herein and in the appended claims, the singular forms “a,” “an,” and “the” include plural reference unless the context clearly dictates otherwise. Unless defined otherwise, all technical and scientific terms used herein have the same meanings as commonly understood by one of ordinary skill in the art. As used herein, the term “comprising” means “including, but not limited to.”

[0005] In an embodiment, a device for performing a procedure may include an elongate tube having a proximal end and a distal end and an adapted link having a proximal end and a distal end. The distal end may include a first mating surface, where the proximal end may be configured to attach to the distal end of the elongate tube. The device may also include a rotating link having a second mating surface configured to rotatably interface with the adapted link first mating surface.

[0006] In an embodiment, a method of performing a procedure may include selecting a device and rotating a rotating link of the device.

[0007] In an embodiment, a steerable multi-linked device may include a first link and a plurality of intermediate links. A first one of the intermediate links may be movably coupled to the first link. The device may also include an adapted link movably coupled to one of the intermediate links at a first end and having a concave surface at the second end and a spherical link fitted in said concave surface of said adapted link.

[0008] In an embodiment, a steerable multi-linked device may include a first multi-linked mechanism and a second multi-linked mechanism. The second multi-linked mechanism may include a first link, a plurality of intermediate links, an adapted link movably coupled to one of the intermediate links at a first end and having a concave surface at the

second end and a spherical link fitted in the concave surface of the adapted link. A first one of the intermediate links may be movably coupled to the first link.

H. BRIEF DESCRIPTION OF DRAWINGS

[0009] Various embodiments of the invention are described herein by way of example in conjunction with the following figures.

[0010] FIGS. 1A and 1B illustrate various embodiments of a steerable multi-linked device;

[0011] FIG. 2 illustrates various embodiments of a core mechanism of the device of FIG 1;

[0012] FIGS. 3A-3C illustrate various embodiments of a proximal link of the core mechanism;

[0013] FIGS. 4A-4C illustrate various embodiments of an intermediate link of the core mechanism;

[0014] FIGS. 5A-5C illustrate various embodiments of a distal link of the core mechanism;

[0015] FIG. 6 illustrates various embodiments of a sleeve mechanism of the device of FIG 1;

[0016] FIGS. 7A-7C illustrate various embodiments of a proximal link of the sleeve mechanism;

[0017] FIGS. 8A-8C illustrate various embodiments of an intermediate link of the sleeve mechanism;

[0018] FIGS. 9A-9D illustrate various embodiments of a distal link of the sleeve mechanism;

[0019] FIG. 10 illustrates various embodiments of a motion sequence of the device of FIG. 1;

[0020] FIG. 11 illustrates various embodiments of a steerable multi-linked device traversing a path having tight curvatures;

[0021] FIG. 12 illustrates various embodiments of a steerable multi-linked device having a spherical distal assembly;

[0022] FIGS. 13A-13D illustrates various embodiments of individual links of the steerable multi-linked device of FIG. 12.

[0023] FIG. 14 illustrates an additional embodiment of a spherical distal link cup as described in FIG. 13C.

[0024] FIG. 15 illustrates various embodiments of a catheter device with a rotatable distal assembly comprising a hinge pin attachment between an adapted link and a rotating link.

[0025] FIGS. 15A-B illustrate magnified views of the distal end of the catheter device of FIG. 15.

[0026] FIG. 16 illustrates various embodiments of a laparoscopic device including a scissor assembly inserted through a rotatable distal assembly.

[0027] FIG. 17 illustrates various embodiments of a device including a rotatable distal assembly comprising a spherical adapted link and a cup shaped rotatable link.

[0028] FIG. 18A illustrates various embodiments of a cup assembly including a curvilinear groove.

[0029] FIG. 18B illustrates various embodiments of a device including a rotatable distal assembly comprising the cup assembly of FIG. 18A and a mating rotating sphere.

[0030] FIG. 19 illustrates various embodiments of a device including a rotatable distal assembly comprising a mechanical advantage element.

[0031] FIG. 20 illustrates various embodiments a device including a first rotating cable and second rotating cable that provide different rotational performance.

[0032] FIG. 21 illustrates various embodiments of a device including multiple rotating spheres.

I. DETAILED DESCRIPTION

[0033] It is to be understood that at least some of the figures and descriptions of the invention have been simplified to focus on elements that are relevant for a clear understanding of the invention, while eliminating, for purposes of clarity, other elements that those of ordinary skill in the art will appreciate may also comprise a portion of the invention. However, because such elements are well known in the art, and because they do not necessarily facilitate a better understanding of the invention, a description of such elements is not provided herein.

[0034] According to various embodiments, the invention described herein may be utilized to control movement of a multi-linked device such as the steerable multi-linked device described herein. For ease of explanation purposes, the invention will be described in the context of its use with various embodiments of the steerable multi-linked device described herein. However, one skilled in the art will appreciate that the invention may be utilized with other types of multi-linked devices.

[0035] FIGS. 1A and 1B illustrate various embodiments of a steerable multi-linked device **10**. According to various embodiments, the steerable multi-linked device may be a snake robot, a continuum robot or the like. Various embodiments of the device **10** may be utilized for medical procedures (e.g., as a robotic bore, positioning device, ablation tool, camera or instrument support, or guidance system for minimally invasive procedures), for

surveillance applications, for inspection applications, for search and rescue applications, etc. For purposes of clarity only, the utility of the device **10** will be described hereinbelow in the context of its applicability to medical procedures. However, a person skilled in the art will appreciate that the device **10** can be utilized in a variety of different applications.

[0036] The device **10** comprises a first mechanism **12** and a second mechanism **14**. According to various embodiments, a mechanism may be a snake robot, a continuum robot or the like. According to various embodiments, the second mechanism **14** is structured and arranged to receive and surround the first mechanism **12** as shown in FIG. 1B. Thus, the first mechanism and second mechanism may be concentric. For such embodiments, the first mechanism **12** may be considered the inner mechanism or the core mechanism, and the second mechanism **14** may be considered the outer mechanism or the sleeve mechanism. According to other embodiments, the first and second mechanisms **12**, **14** may be structured and arranged to have a relationship other than a concentric relationship. For example, one skilled in the art will appreciate that, according to various embodiments, the first and second mechanisms **12**, **14** may be structured and arranged to operate in a side-by-side arrangement, where the first mechanism **12** operates adjacent to the second mechanism **14**. According to various embodiments, additional and/or alternate configurations may be used within the scope of this disclosure. According to various embodiments, a three-dimensional space **240** may be provided between the first and second mechanisms. This space will be described in more detail below.

[0037] As described in more detail hereinbelow, the first mechanism **12** may operate in either a rigid mode or a limp mode, the second mechanism **14** may operate in either a rigid mode or a limp mode, and the first and second mechanisms **12**, **14** may operate independent of one another. Both the first mechanism **12** and the second mechanism **14** may be steerable mechanisms. Accordingly, it will be appreciated that the device **10** may be utilized to

navigate a luminal space as well as any three-dimensional path within an intracavity space. According to various embodiments, the device **10** may advance by alternating the operation of the first mechanism **12** and the second mechanism **14** between a limp mode and a rigid mode.

[0038] According to various embodiments, the device **10** may also comprise one or more cables. According to various embodiments, one or more of the cables may be steering cables and/or tensioning cables. For example, the device may include three steering cables and one tensioning cable.

[0039] FIG. 2 illustrates various embodiments of the first mechanism **12** of the device **10**. The first mechanism **12** is a multi-linked mechanism and includes a first end **24** and a second end **26**. The first end **24** may be considered the proximal end and the second end **26** may be considered the distal end. The first mechanism **12** may comprise a first link **28**, a second link **30**, and one or more intermediate links **32** between the first and second links **28**, **30**. The first link **28** may be considered the proximal link, and the second link **30** may be considered the distal link.

[0040] FIGS. 3A-3C illustrate various embodiments of the first link **28** (inner proximal link) of the first mechanism **12**. The first link **28** includes a first end **34** and a second end **36**, and defines a longitudinal axis **38** that passes through the center of the first end **34** and the center of the second end **36** as shown in FIG. 3B. The first link **28** may be fabricated from any suitable material. According to various embodiments, the first link **28** is fabricated from a fiber reinforced material such as, for example, G10/FR4 Garolite®. The first link **28** has a generally cylindrical shaped exterior and is described in more detail hereinbelow.

[0041] The first link **28** comprises a first portion **40** and a second portion **42**. The first portion **40** may be considered the proximal portion and the second portion **42** may be

considered the distal portion. The first portion 40 may be fabricated integral with the second portion 42. The first portion 40 has a cylindrical shaped exterior, and extends from the first end 34 of the first link 28 toward the second end 36 of the first link 28. According to various embodiments, the diameter of the first portion 40 may be on the order of approximately 6.35 millimeters. Other sizes are possible.

[0042] The second portion 42 has a generally cylindrical shaped exterior, with other features described below. The second portion 42 has a cylindrical shaped exterior where it contacts the first portion 40, and tapers toward the second end 36 of the first link 28. The second portion 42 may be shaped in the form of a generally segmented hemisphere at the second end 36 of the first link 28. According to various embodiments, the diameter of the second portion 42 may be on the order of approximately 4.75 millimeters where it contacts the first portion 40. Other sizes are possible.

[0043] The second portion 42 comprises a first surface 44. The first surface 44 may be considered the outer surface of the second portion 42. The second portion 42 defines a first groove 46 parallel to the longitudinal axis 38 along the first surface 44, a second groove 48 parallel to the longitudinal axis 38 along the first surface 44, and a third groove 50 parallel to the longitudinal axis 38 along the first surface 44. Each of the first, second and third grooves 46, 48, 50 extend along the first surface 44 toward the second end 36 of the first link 28. The first, second and third grooves 46, 48, 50 may be semi-tubular shaped and may be evenly spaced about the first surface 44 of the second portion 42 of the first link 28 as shown in FIG. 3C. According to various embodiments, the first, second, and third grooves 46, 48, 50 may be configured in the shape of a segmented cylinder. The size of each of the grooves 46, 48, 50 may be identical to one another or may be different from one another. For example, according to various embodiments, the first and second grooves 46, 48 may be configured as segments of a cylinder having a diameter on the order of approximately 1.25

millimeters, and the third groove **50** may be configured as a segment of a cylinder having a diameter on the order of approximately 2.50 millimeters. The length of the first link **28** may be on the order of approximately 65 millimeters. However, one skilled in the art will appreciate that the length or diameter of the first link **28** can vary based on the application.

[0044] The first link **28** also defines a passage **52** extending from the first end **34** to the second end **36** along the longitudinal axis **38** as shown in FIG. 3B. The passage **52** is of a size sufficient to allow at least one cable to pass therethrough. According to various embodiments, the passage **52** may be of a sufficient size to allow a tensioning cable to pass therethrough. According to various embodiments, the passage **52** is generally configured as a complex shape that comprises a combination of a first cylinder **54** that extends from the first end **34** toward the second end **36**, and a second cylinder **56** that extends from the first cylinder **54** toward the second end **36**. The diameter of the first cylinder **54** is larger than the diameter of the second cylinder **56**. For example, according to various embodiments, the first cylinder **54** may have a diameter on the order of approximately 3.20 millimeters and the second cylinder **56** may have a diameter on the order of approximately 1.50 millimeters. Other sizes are possible.

[0045] FIGS. 4A-4C illustrate various embodiments of one of the intermediate links **32** (inner intermediate link) of the first mechanism **12**. The intermediate link **32** is representative of the other intermediate links **32**. The intermediate link **32** includes a first end **58** and a second end **60**, and defines a longitudinal axis **62** that passes through the center of the first end **58** and the center of the second end **60** as shown in FIG. 4B. The intermediate link **32** may be fabricated from any suitable material. According to various embodiments, the intermediate link **32** is fabricated from a fiber reinforced material such as, for example, G10/FR4 Garolite®. The intermediate link **32** has a generally bullet-shaped exterior and is described in more detail hereinbelow.

[0046] The intermediate link 32 comprises a first portion 64 and a second portion 66. The first portion 64 may be considered the proximal portion and the second portion 66 may be considered the distal portion. The first portion 64 may be fabricated integral with the second portion 66. The first portion 64 has a generally cylindrical shaped exterior, and extends from the first end 58 of the intermediate link 32 toward the second end 60 of the intermediate link 32. According to various embodiments, the second portion 66 has a generally cylindrical shaped exterior where it contacts the first portion 64, and tapers toward the second end 60 of the intermediate link 32. The exterior of the second portion 66 is configured in the form of a generally segmented hemisphere. According to various embodiments, the diameter of the intermediate link 32 may be on the order of approximately 4.75 millimeters at the first end 58 thereof. The length of the intermediate link 32 may be on the order of approximately 5.85 millimeters. However, one skilled in the art will appreciate that the length or diameter of the intermediate link 32 can vary based on the application.

[0047] The intermediate link 32 also comprises a first surface 68 that extends from the first end 58 of the intermediate link 32 to the second end 60 of the intermediate link 32. The first surface 68 may be considered the outer surface of the intermediate link 32. The intermediate link 32 also defines a first groove 70 parallel to the longitudinal axis 62 along the first surface 68, a second groove 72 parallel to the longitudinal axis 62 along the first surface 68, and a third groove 74 parallel to the longitudinal axis 62 along the first surface 68. Each of the first, second and third grooves 70, 72, 74 extend along the first surface 68 from the first end 58 of the intermediate link 32 toward the second end 60 of the intermediate link 32. The first, second and third grooves 70, 72, 74 may be semi-tubular shaped and may be evenly spaced about the first surface 68 of the intermediate link 32 as shown in FIG. 4C. According to various embodiments, the first, second, and third grooves 70, 72, 74 may be configured in the shape of a segmented cylinder. The size of each of the grooves 70, 72, 74

may be identical to one another or may be different from one another. For example, according to various embodiments, the first and second grooves **70**, **72** are configured as segments of a cylinder having a diameter on the order of approximately 1.75 millimeters at the first end **58** of the intermediate link **32**, and the third groove **74** is configured as a segment of a cylinder having a diameter on the order of approximately 2.50 millimeters at the first end **58** of the intermediate link **32**. The first, second and third grooves **70**, **72**, **74** are each configured to receive and partially surround any of a variety of tools or instruments (e.g., ablation tools) which may pass from the first end **24** of the multi-linked device **10** to the second end **26** of the multi-linked device **10**.

[0048] The intermediate link **32** also defines a passage **76** extending from the first end **58** to the second end **60** along the longitudinal axis **62** as shown in FIG. 4B. The passage **76** may be of a size sufficient to allow one or more cables to pass therethrough. According to various embodiments, the passage **76** may be of a size sufficient to allow a tensioning cable to pass therethrough. According to various embodiments, the passage **76** is generally configured as a complex shape that comprises a combination of a first segmented hemisphere **78** that extends from the first end **58** toward the second end **60**, a second segmented hemisphere **80** that extends from the first segmented hemisphere **78** toward the second end **60**, a cylinder **82** that extends from the second segmented hemisphere **80** toward the second end **60**, and a third segmented hemisphere **84** that extends from the cylinder **82** to the second end **60** of the intermediate link **32**. According to various embodiments, the first segmented hemisphere **78** represents a portion of a sphere having a diameter on the order of approximately 4.75 millimeters, the second segmented hemisphere **80** represents a portion of a sphere having a diameter on the order of approximately 2.25 millimeters, the cylinder **82** may have a diameter on the order of approximately 1.0 millimeter, and the third segmented

hemisphere 84 represents a portion of a sphere having a diameter on the order of approximately 2.25 millimeters. Other sizes are possible.

[0049] The first segmented hemisphere 78 of the passage 76 is configured to receive the second end 36 of the first link 28 when the first link 28 is coupled to the intermediate link 32. Similarly, for a given intermediate link 32, the first segmented hemisphere 78 of the passage 76 is configured to receive the second end 60 of another intermediate link 32 when the other intermediate link 32 is coupled to the given intermediate link 32. The third segmented hemisphere 84 may serve to reduce the pinching or binding a cable when one intermediate link 32 moves relative to an adjacent intermediate link 32 coupled thereto. Similarly, when the second link 30 is coupled to a given intermediate link 32, the third segmented hemisphere 84 may serve to reduce the pinching or binding of a cable when the second link 30 moves relative to the given intermediate link 32.

[0050] With the above described structure, the first link 28 may be coupled to the intermediate link 32 by seating the second end 36 of the first link 28 in the first segmented hemisphere 78 of the passage 76 of the intermediate link 32. As the convex configuration of the second end 36 of the first link 28 generally corresponds with the concave configuration of the first segmented hemisphere 78 of the passage 76 of the intermediate link 32, the first link 28 may be coupled to the intermediate link 32 such that the longitudinal axis 38 and the first, second and third grooves 46, 48, 50 of the first link 28 are respectively aligned with the longitudinal axis 62 and the first, second and third grooves 70, 72, 74 of the intermediate link 32. The intermediate link 32 may be moved relative to the first link 28 such that the longitudinal axis 62 of the intermediate link 32 is not aligned with the longitudinal axis 38 of the first link 28. According to various embodiments, the configuration of the first link 28 and the intermediate link 32 allows for the intermediate link 32 to be moved relative to the first link 28 coupled thereto such that the longitudinal axis 38 of the first link 28 and the

longitudinal axis 62 of the intermediate link 32 are up to approximately 25° out of alignment with one another. Similarly, one intermediate link 32 may be coupled to another intermediate link 32, and so on, by seating the second end 60 of one intermediate link 32 in the first segmented hemisphere 78 of the passage 76 of another intermediate link 32. As the convex configuration of the second end 60 of the intermediate link 32 generally corresponds with the concave configuration of the first segmented hemisphere 78 of the passage 76 of the intermediate link 32, the intermediate links 32 may be coupled such that the respective longitudinal axes 62 and the respective first, second and third grooves 46, 48, 50 of the intermediate links 32 are aligned. The coupled intermediate links 32 may be moved relative to one another such that the respective longitudinal axes 62 of the coupled intermediate links 32 are not aligned. According to various embodiments, the configuration of the coupled intermediate links 32 allows for one intermediate link 32 to be moved relative to an adjacent intermediate link 32 coupled thereto such that the respective longitudinal axes 62 are up to approximately 25° out of alignment with one another.

[0051] FIGS. 5A-5C illustrate various embodiments of the second link 30 (inner distal link) of the first mechanism 12. The second link 30 includes a first end 86 and a second end 88, and defines a longitudinal axis 90 that passes through the center of the first end 86 and the center of the second end 88 as shown in FIG. 5B. The second link 30 may be fabricated from any suitable material. According to various embodiments, the second link 30 is fabricated from a thermoplastic material such as, for example, Delrin®.

[0052] The second link 30 comprises a first portion 92 and a second portion 94. The first portion 92 may be considered the proximal portion and the second portion 94 may be considered the distal portion. The first portion 92 may be fabricated integral with the second portion 94. The first portion 92 has a generally cylindrical shaped exterior, and extends from the first end 86 of the second link 30 toward the second end 88 of the second link 30.

According to various embodiments, the second portion **94** has a generally cylindrical shaped exterior where it contacts the first portion **92**, and tapers toward the second end **88** of the second link **30**. The exterior of the second portion **94** is configured in the form of a generally segmented cone. According to various embodiments, the diameter of the second link **30** may be on the order of approximately 4.75 millimeters at the first end **86** thereof, and the taper of the second portion **94** may be at an angle of approximately 30° relative to the exterior of the first portion **92**. The length of the second link **30** may be on the order of approximately 5.90 millimeters. However, one skilled in the art will appreciate that the length or diameter of the second link **30** can vary based on the application.

[0053] The second link **30** also comprises a first surface **96** that extends from the first end **86** of the second link **30** to the second end **88** of the second link **30**. The first surface **96** may be considered the outer surface of the second link **30**. The second link **30** also defines a first groove **98** parallel to the longitudinal axis **90** along the first surface **96**, a second groove **100** parallel to the longitudinal axis **90** along the first surface **96**, and a third groove **102** parallel to the longitudinal axis **90** along the first surface **96**. Each of the first, second and third grooves **98**, **100**, **102** extend along the first surface **96** from the first end **86** of the second link **30** toward the second end **88** of the second link **30**. The first, second and third grooves **98**, **100**, **102** may be semi-tubular shaped and may be evenly spaced about the first surface **96** of the second link **30** as shown in FIG. 5C. According to various embodiments, the first, second, and third grooves **98**, **100**, **102** may be configured in the shape of a segmented cylinder. The size of each of the grooves **98**, **100**, **102** may be identical to one another or may be different from one another. For example, according to various embodiments, the first and second grooves **98**, **100** are configured as segments of a cylinder having a diameter on the order of approximately 1.25 millimeters at the first end **86** of the second link **30**, and the third groove **102** is configured as a segment of a cylinder having a

diameter on the order of approximately 2.50 millimeters at the first end **86** of the second link **30**. The first, second and third grooves **98**, **100**, **102** are each configured to receive and partially surround any of a variety of tools or instruments (e.g., ablation tools) which may pass from the first end **24** of the multi-linked device **10** to the second end **26** of the multi-linked device **10**.

[0054] The second link **30** also defines a passage **104** extending from the first end **86** to the second end **88** along the longitudinal axis **90** as shown in FIG. 5B. The passage **104** may be of a size sufficient to allow at least one cable to pass therethrough. According to various embodiments, the passage **104** may be of a size sufficient to allow a tensioning cable to pass therethrough. According to various embodiments, the passage **104** is generally configured as a complex shape that comprises a combination of a first segmented hemisphere **106** that extends from the first end **86** toward the second end **88**, a second segmented hemisphere **108** that extends from the first segmented hemisphere **106** toward the second end **88**, and a cylinder **110** that extends from the second segmented hemisphere **108** to the second end **88** of the second link **30**. According to various embodiments, the first segmented hemisphere **106** represents a portion of a sphere having a diameter on the order of approximately 4.75 millimeters, the second segmented hemisphere **108** represents a portion of a sphere having a diameter on the order of approximately 2.50 millimeters, and the cylinder **110** may have a diameter on the order of approximately 1.0 millimeter. The first segmented hemisphere **106** of the passage **104** may be configured to receive the second end **60** of an intermediate link **32** when the intermediate link **32** is coupled to the second link **30**.

[0055] With the above described structure, an intermediate link **32** may be coupled to the second link **30** by seating the second end **60** of the intermediate link **32** in the first segmented hemisphere **106** of the passage **104** of the second link **30**. As the convex configuration of the second end **60** of the intermediate link **32** generally corresponds with the

concave configuration of the first segmented hemisphere 106 of the passage 104 of the second link 30, the intermediate link 32 may be coupled to the second link 30 such that the longitudinal axis 62 and the first, second and third grooves 70, 72, 74 of the intermediate link 32 are respectively aligned with the longitudinal axis 90 and the first, second and third grooves 98, 100, 102 of the second link 30. The second link 30 may be moved relative to the intermediate link 32 coupled thereto such that the respective longitudinal axes 62, 90 are not aligned. According to various embodiments, the configuration of the second link 30 allows for an intermediate link 32 coupled thereto to be moved relative to the second link 30 such that the respective longitudinal axes 62, 90 are up to approximately 25° out of alignment with one another.

[0056] FIG. 6 illustrates various embodiments of the second mechanism 14 of the device 10. The second mechanism 14 is a multi-linked mechanism and includes a first end 120 and a second end 122. The first end 120 may be considered the proximal end and the second end 122 may be considered the distal end. The second mechanism 14 comprises a first link 124, a second link 126, and any number of intermediate links 128 between the first and second links 124, 126. The first link 124 may be considered the proximal link, and the second link 126 may be considered the distal link.

[0057] FIGS. 7A-7C illustrate various embodiments of the first link 124 (outer proximal link) of the second mechanism 14. The first link 124 includes a first end 130 and a second end 132, and defines a longitudinal axis 134 that passes through the center of the first end 130 and the center of the second end 132 as shown in FIG. 7B. The first link 124 may be fabricated from any suitable material. According to various embodiments, the first link 124 is fabricated from a stainless steel material such as, for example, 316 stainless steel. The first link 124 has a generally bullet-shaped exterior and is described in more detail hereinbelow.

[0058] The first link 124 comprises a first portion 136 and a second portion 138. The first portion 136 may be considered the proximal portion and the second portion 138 may be considered the distal portion. The first portion 136 may be fabricated integral with the second portion 138. The first portion 136 has a cylindrical shaped exterior, and extends from the first end 130 of the first link 124 toward the second end 132 of the first link 124. According to various embodiments, the diameter of the first portion 136 may be on the order of approximately 12.70 millimeters. Other sizes are possible.

[0059] The second portion 138 has a generally cylindrical shaped exterior. The second portion 138 has a cylindrical shaped exterior where it contacts the first portion 136, and tapers toward the second end 132 of the first link 124. The second portion 138 may be shaped in the form of a generally segmented hemisphere at the second end 132 of the first link 124. According to various embodiments, the diameter of the second portion 138 may be on the order of approximately 9.50 millimeters where it contacts the first portion 136. Other sizes and shapes are possible.

[0060] The second portion 138 comprises a first surface 140. The first surface 140 may be considered the outer surface of the second portion 138. The second portion 138 defines a first groove 142 along the first surface 140, a second groove 144 along the first surface 140, and a third groove 146 along the first surface 140. Each of the first, second and third grooves 142, 144, 146 are oblique relative to the longitudinal axis 134 and extend along the first surface 140 toward the second end 132 of the first link 124. According to various embodiments, each of the grooves 142, 144, 146 are oriented at an angle on the order of approximately 15° relative to the longitudinal axis 134. As shown in FIG. 7C, the first, second and third grooves 142, 144, 146 may be evenly spaced about the first surface 140 of the first link 124. According to various embodiments, the first, second, and third grooves 142, 144, 146 may be configured in the shape of a segmented cylinder. The size of each of

the grooves **142**, **144**, **146** may be identical to one another or may be different from one another. For example, according to various embodiments, each of the grooves **142**, **144**, **146** are configured as segments of respective cylinders having diameters on the order of approximately 3.0 millimeters. The first, second and third grooves **142**, **144**, **146** are each configured to facilitate the introduction of various tools or instruments (e.g., ablation tools) into the multi-linked device **10**. The length of the first link **124** may be on the order of approximately 18.5 millimeters. However, one skilled in the art will appreciate that the length or diameter of the first link **124** can vary based on the application.

[0061] The first link **124** also defines a passage **148** extending from the first end **130** to the second end **132** along the longitudinal axis **134** as shown in FIG. 7B. The passage **148** is of a size sufficient to allow the first mechanism **12** to pass therethrough. According to various embodiments, the passage **148** is generally configured as a complex shape that comprises a combination of a segmented cone **150** that extends from the first end **130** toward the second end **132**, and a cylinder **152** that extends from the segmented cone **150** to the second end **132** of the first link **124**. According to various embodiments, the segmented cone **150** has a diameter on the order of approximately 7.0 millimeters at the first end **130** of the first link **124**, and may be tapered at an angle on the order of approximately 45° relative to the longitudinal axis **134**. The cylinder **152** may have a diameter on the order of approximately 5.50 millimeters. Other dimensions are possible.

[0062] The first link **124** also defines a first through-hole **154**, a second through-hole **156**, and a third through-hole **158**. (See FIG. 7C). The first through-hole **154** is substantially parallel to the longitudinal axis **134**, extends from the first portion **136** toward the second end **132**, and is positioned between the passage **148** and the first surface **140**. The second through-hole **156** is substantially parallel to the longitudinal axis **134**, extends from the first portion **136** to the second end **132**, and is positioned between the passage **148** and the first

surface 140. The third through-hole 158 is substantially parallel to the longitudinal axis 134, extends from the first portion 136 to the second end 132, and is positioned between the passage 148 and the first surface 140. The first, second and third through-holes 154, 156, 158 are generally cylindrical shaped. According to various embodiments, the through-holes 154, 156, 158 are evenly spaced from one another as shown in FIG. 7C. The size of each of the through-holes 154, 156, 158 may be identical to one another or may be different from one another. For example, according to various embodiments, the respective diameters associated with the through-holes 154, 156, 158 may each be on the order of approximately 1.20 millimeters. The first through-hole 154 is configured to receive and surround a cable. The second through-hole 156 is configured to receive and surround a cable. The third through-hole 158 is configured to receive and surround a cable. The first, second and third through-holes 154, 156, 158 may serve as guidepaths for movement of the cables.

[0063] FIGS. 8A-8C illustrate various embodiments of one of the intermediate links 128 (outer intermediate link) of the second mechanism 14. The intermediate link 128 is representative of the other intermediate links 128. The intermediate link 128 includes a first end 160 and a second end 162, and defines a longitudinal axis 164 that passes through the center of the first end 160 and the center of the second end 162 as shown in FIG. 8B. The intermediate link 128 may be fabricated from any suitable material. According to various embodiments, the intermediate link 128 is fabricated from a polymer thermoplastic material such as, for example, polysulfone. The intermediate link 128 has a generally bullet-shaped exterior and is described in more detail hereinbelow.

[0064] The intermediate link 128 comprises a first portion 166 and a second portion 168. The first portion 166 may be considered the proximal portion and the second portion 168 may be considered the distal portion. The first portion 166 may be fabricated integral with the second portion 168. The first portion 166 has a generally cylindrical shaped

[0065] The intermediate link 128 also comprises a first surface 170 that extends from the first end 160 of the intermediate link 128 to the second end 162 of the intermediate link 128, and a second surface 172 that extends from the first end 160 of the intermediate link 128 to the second end 162 of the intermediate link 128. The first surface 170 may be considered the outer surface of the intermediate link 128, and the second surface 172 may be considered the inner surface of the intermediate link 128. The intermediate link 32 also defines a first groove 174 substantially parallel to the longitudinal axis 164 along the second surface 172, a second groove 176 substantially parallel to the longitudinal axis 164 along the second surface 172, and a third groove 178 substantially parallel to the longitudinal axis 164 along the second surface 172. Each of the first, second and third grooves 174, 176, 178 extend along the second surface 172 toward the second end 162 of the intermediate link 128. The first, second and third grooves 174, 176, 178 may be semi-tubular shaped and may be evenly spaced about the second surface 172 of the intermediate link 128 as shown in FIG. 8C. According to various embodiments, the first, second, and third grooves 174, 176, 178 may be configured in the shape of a segmented cylinder. The size of each of the grooves 174, 176,

178 may be identical to one another or may be different from one another. For example, according to various embodiments, the first and second grooves 174, 176 are configured as segments of cylinders having diameters on the order of approximately 1.75 millimeters at the first end 160 of the intermediate link 128, and the third groove 178 is configured as a segment of a cylinder having a diameter on the order of approximately 2.50 millimeters at the first end 160 of the intermediate link 128. The first, second and third grooves 174, 176, 178 are each configured to receive and partially surround any of a variety of tools or instruments (e.g., ablation tools) which may pass from the first end 24 of the multi-linked device 10 to the second end 26 of the multi-linked device 10.

[0066] The intermediate link 128 also defines a passage 180 extending from the first end 160 to the second end 162 along the longitudinal axis 164 as shown in FIG. 8B. The passage 180 is of a size sufficient to allow the first mechanism 12 to pass therethrough. According to various embodiments, the passage 180 is generally configured as a complex shape that comprises a combination of a segmented hemisphere 182 that extends from the first end 160 toward the second end 162, a first segmented cone 184 that extends from the segmented hemisphere 182 toward the second end 162, a cylinder 186 that extends from the first segmented cone 184 toward the second end 162, and a second segmented cone 188 that extends from the cylinder 186 to the second end 162 of the intermediate link 128. According to various embodiments, the segmented hemisphere 182 represents a portion of a sphere having a diameter on the order of approximately 9.65 millimeters, the first segmented cone 184 is tapered at an angle on the order of approximately 15° relative to the longitudinal axis 164, the cylinder 186 has a diameter on the order of approximately 5.50 millimeters, and the second segmented cone 188 is tapered at an angle on the order of approximately 15° relative to the longitudinal axis 164. The segmented hemisphere 182 of the passage 180 is configured to receive the second end 132 of the first link 124 when the first link 124 is coupled to the

intermediate link 128. Similarly, for a given intermediate link 128, the segmented hemisphere 182 of the passage 180 is configured to receive the second end 162 of another intermediate link 128 when the other intermediate link 128 is coupled to the given intermediate link 128.

[0067] The intermediate link 128 also defines a first through-hole 190, a second through-hole 192, and a third through-hole 194. (See FIG. 8C). The first through-hole 190 is substantially parallel to the longitudinal axis 164, extends from the first portion 166 toward the second end 162, and is positioned between the passage 180 and the first surface 170. The second through-hole 192 is substantially parallel to the longitudinal axis 164, extends from the first portion 166 to the second end 162, and is positioned between the passage 180 and the first surface 170. The third through-hole 194 is substantially parallel to the longitudinal axis 164, extends from the first portion 166 to the second end 162, and is positioned between the passage 180 and the first surface 170. The first, second and third through-holes 190, 192, 194 are generally cylindrical shaped. According to various embodiments, the through-holes 190, 192, 194 are evenly spaced from one another. The size of each of the through-holes 190, 192, 194 may be identical to one another or may be different from one another. For example, according to various embodiments, the respective diameters associated with the through-holes 190, 192, 194 may each be on the order of approximately 1.25 millimeters. The first through-hole 190 is configured to receive and surround a cable. The second through-hole 192 is configured to receive and surround a cable. The third through-hole 194 is configured to receive and surround a cable. The first, second and third through-holes 190, 192, 194 may serve as guidepaths for movement of the cables.

[0068] As shown in FIG. 8C, the intermediate link 128 also defines first, second and third indents 196, 198, 200 at the second end 162 thereof resulting, in part, from the combination of the taper associated with the second portion 168 and the configuration and

orientation of the first, second, and third grooves 174, 176, 178. The first, second and third indents 196, 198, 200 may be evenly spaced about the second end 162 of the intermediate link 128 as shown in FIG. 8C. The first, second and third indents 196, 198, 200 may serve to reduce the pinching or binding of various tools or instruments (e.g., ablation tools) when one intermediate link 128 of the second mechanism 14 is moved relative to another intermediate link 128 coupled thereto.

[0069] The intermediate link 128 also defines fourth, fifth and sixth indents 202, 204, 206 at the second end 162 thereof resulting from the combination of the taper associated with the second portion 168 and the configuration and orientation of the first, second, and third through-holes 190, 192, 194. The fourth, fifth and sixth indents 202, 204, 206 may be evenly spaced about the second end 162 of the intermediate link 128, and may be evenly spaced from the first, second and third indents 196, 198, 200 as shown in FIG. 8C. The fourth, fifth and sixth indents 202, 204, 206 may serve to reduce the pinching or binding of the cables when one intermediate link 128 of the second mechanism 14 is moved relative to another intermediate link 128 coupled thereto.

[0070] According to various embodiments, an intermediate link 128 may also define an opening (not shown) that extends from the second surface 172 or from one of the grooves 174, 176, 178 to the first surface 170 of the intermediate link 128. The intermediate link 128 may have any number of such openings, and any number of the intermediate links 128 may have such openings. Referring to FIGs. 2 and 4, the opening may be utilized as an exit point for a tool or instrument which may pass from the first end 24 of the multi-linked device 10 toward the second end 26 of the multi-linked device 10. For such embodiments, the respective intermediate link 128 may be positioned proximate to the second link 126 of the second mechanism 14. The opening may be oriented at any angle relative to the longitudinal axis 134 of the intermediate link 128. When the first mechanism 12 is removed from the

second mechanism 14, and a relatively large tool or instrument is advanced from the first end 120 of the second mechanism 14 to the second end 122 of the second mechanism 14, sufficient room may not exist for a second tool or instrument (e.g., fiber optic cable) to pass through the second end 122 of the second mechanism 14. For such instances, the second tool or instrument may exit through an opening of one of the intermediate links 128.

[0071] With the above described structure, the first link 124 may be coupled to the intermediate link 128 by seating the second end 132 of the first link 124 in the segmented hemisphere 182 of the passage 180 of the intermediate link 128. As the convex configuration of the second end 132 of the first link 124 generally corresponds with the concave configuration of the segmented hemisphere 182 of the passage 180 of the intermediate link 128, the first link 124 may be coupled to the intermediate link 128 such that the longitudinal axis 134, the first, second and third grooves 142, 144, 146, and the first, second and third through-holes 154, 156, 158 of the first link 124 are respectively aligned with the longitudinal axis 164, the first, second and third grooves 174, 176, 178, and the first, second and third through-holes 190, 192, 194 of the intermediate link 128. The intermediate link 128 may be moved relative to the first link 124 such that the longitudinal axis 164 of the intermediate link 128 is not aligned with the longitudinal axis 134 of the first link 124. According to various embodiments, the configuration of the first link 124 and the intermediate link 128 allows for the intermediate link 128 to be moved relative to the first link 124 coupled thereto such that the longitudinal axis 134 of the first link 124 and the longitudinal axis 164 of the intermediate link 128 are up to approximately 10° out of alignment with one another. Similarly, one intermediate link 128 may be coupled to another intermediate link 128, and so on, by seating the second end 162 of one intermediate link 128 in the segmented hemisphere 182 of the passage 180 of another intermediate link 128. As the convex configuration of the second end 162 of the intermediate link 128 generally corresponds with the concave configuration of the

segmented hemisphere 182 of the passage 180 of the intermediate link 128, the intermediate links 128 may be coupled such that the respective longitudinal axes 164, the respective first, second and third grooves 174, 176, 178, and the respective first, second and third through-holes 190, 192, 194 of the intermediate links 128 are aligned. The coupled intermediate links 128 may be moved relative to one another such that the respective longitudinal axes 164 of the coupled intermediate links 128 are not aligned. According to various embodiments, the configuration of the coupled intermediate links 128 allows for one intermediate link 128 to be moved relative to another intermediate link 128 coupled thereto such that the respective longitudinal axes 164 are up to approximately 10° out of alignment with one another.

[0072] FIGS. 9A-9D illustrate various embodiments of the second link 126 (outer distal link) of the second mechanism 14. The second link 126 includes a first end 208 and a second end 210, and defines a longitudinal axis 212 that passes through the center of the first end 208 and the center of the second end 210 as shown in FIG. 9C. The second link 126 may be fabricated from any suitable material. According to various embodiments, the second link 126 is fabricated from a thermoplastic material such as, for example, Delrin®.

[0073] The second link 126 comprises a first portion 214 and a second portion 216. The first portion 214 may be considered the proximal portion and the second portion 216 may be considered the distal portion. The first portion 214 may be fabricated integral with the second portion 216. The first portion 214 has a generally cylindrical shaped exterior, and extends from the first end 208 of the second link 126 toward the second end 210 of the second link 126. According to various embodiments, the diameter of the first portion 214 is on the order of approximately 4.80 millimeters.

[0074] According to various embodiments, the second portion 216 has a generally cylindrical shaped exterior where it contacts the first portion 214, and tapers toward the second end 210 of the second link 126. The exterior of the second portion 216 is configured

in the form of a generally segmented cone. According to various embodiments, the exterior of the second portion **216** tapers from the first portion **214** to the second end **210** of the second link **126** at an angle on the order of approximately 20° relative to the exterior of the first portion **214**. The length of the second link **126** may be on the order of approximately 15 millimeters. However, one skilled in the art will appreciate that the length of the second link **126** can vary based on the application.

[0075] The second link **126** also comprises a first surface **218** that extends from the first end **208** of the second link **126** to the second end **210** of the second link **126**, and a second surface **220** that extends from the first end **208** of the second link **126** toward the second end **210** of the second link **126**. The first surface **218** may be considered the outer surface of the second link **126**, and the second surface **220** may be considered the inner surface of the second link **126**.

[0076] The second link **126** also defines a first port **222**, a second port **224**, and a third port **226**. (See FIG. 9B). The first port **222** extends from the second surface **220** to the first surface **218** and is substantially parallel to the longitudinal axis **212**. The second port **224** extends from the second surface **220** to the first surface **218** and is substantially parallel to the longitudinal axis **212**. The third port **226** extends from the second surface **220** to the first surface **218** and is substantially parallel to the longitudinal axis **212**. The first, second and third ports **222**, **224**, **226** may be cylindrical shaped and may be evenly spaced about the longitudinal axis **212** of the second link **126** as shown in FIG. 9D. The size of each of the ports **222**, **224**, **226** may be identical to one another or may be different from one another. For example, according to various embodiments, the first and second ports **222**, **224** are configured as cylinders having diameters on the order of approximately 1.50 millimeters, and the third port **226** is configured as a cylinder having a diameter on the order of approximately 2.50 millimeters. Other dimensions are possible. The first, second and third ports **222**, **224**,

226 are each configured to receive and surround any of a variety of tools or instruments (e.g., ablation tools) which may pass from the first end 24 of the multi-linked device 10 to the second end 26 of the multi-linked device 10.

[0077] The second link 126 also defines a first through-hole 228, a second through-hole 230, and a third through-hole 232. (See FIG. 9B). The first through-hole 228 extends from the second surface 220 to the first surface 218 and is substantially parallel to the longitudinal axis 212. The second through-hole 230 extends from the second surface 220 to the first surface 218 and is substantially parallel to the longitudinal axis 212. The third through-hole 232 extends from the second surface 220 to the first surface 218 and is substantially parallel to the longitudinal axis 212. The first, second and third through-holes 228, 230, 232 are generally cylindrical shaped. According to various embodiments, the through-holes 228, 230, 232 are evenly spaced from one another as shown in FIG 9D. The size of each of the through-holes 228, 230, 232 may be identical to one another or may be different from one another. For example, according to various embodiments, the respective diameters associated with the through-holes 228, 230, 232 may each be on the order of approximately 1.25 millimeters. The first through-hole 228 is configured to receive and surround a cable. The second through-hole 230 is configured to receive and surround a cable. The third through-hole 232 is configured to receive and surround a cable.

[0078] The second link 126 also defines a recess 234 that extends from the first end 208 toward the second end 210 along the longitudinal axis 212 as shown in FIG. 9C. According to various embodiments, the recess 234 is generally configured as a complex shape that comprises a combination of a first segmented hemisphere 236 that extends from the first end 208 toward the second end 210, and a second segmented hemisphere 238 that extends from the first segmented hemisphere 236 toward the second end 210 of the second link 126. According to various embodiments, the first segmented hemisphere 236 represents

a portion of a sphere having a diameter on the order of approximately 9.50 millimeters, and the second segmented hemisphere 238 represents a portion of a sphere having a diameter on the order of approximately 7.0 millimeters. The first segmented hemisphere 236 of the recess 234 is configured to receive the second end 162 of an intermediate link 128 when the intermediate link 128 is coupled to the second link 126.

[0079] With the above described structure, an intermediate link 128 may be coupled to the second link 126 by seating the second end 162 of the intermediate link 128 in the first segmented hemisphere 236 of the recess 234 of the second link 126. As the convex configuration of the second end 162 of the intermediate link 128 generally corresponds with the concave configuration of the first segmented hemisphere 236 of the recess 234 of the second link 126, the intermediate link 128 may be coupled to the second link 126 such that the longitudinal axis 164, the first, second and third grooves 174, 176, 178, and the first, second and third through-holes 190, 192, 194 of the intermediate link 128 are respectively aligned with the longitudinal axis 212, the first, second and third ports 222, 224, 226, and the first, second and third through-holes 228, 230, 232 of the second link 126. The second link 126 may be moved relative to the intermediate link 128 coupled thereto such that the respective longitudinal axes 164, 212 are not aligned. According to various embodiments, the configuration of the second link 126 allows for an intermediate link 128 coupled thereto to be moved relative to the second link 126 such that the respective longitudinal axes 164, 212 are up to approximately 10° out of alignment with one another.

[0080] When the first mechanism 12 is inserted into the second mechanism 14, the first second and third grooves 70, 72, 74 of the intermediate links 32 of the first mechanism 12 may be substantially aligned with the first, second and third grooves 174, 176, 178 of the intermediate links 128 of the second mechanism 14, and the first, second and third grooves 98, 100, 102 of the second link 30 of the first mechanism 12 may be substantially aligned

with the first, second and third ports **222**, **224**, **226** of the second link **126** of the second mechanism **14**. The combination of the first grooves **70** of the intermediate links **32** of the first mechanism **12** aligned with the first grooves **174** of the intermediate links **128** of the second mechanism **14** allows the respective first grooves **70**, **174** to collectively serve as a first working port that is substantially aligned with the first port **222** of the second link **126** of the second mechanism **14**. The first groove **70** may be considered the inner portion of the first working port and the first groove **174** may be considered the outer portion of the first working port.

[0081] Similarly, the combination of the second grooves **72** of the intermediate links **32** of the first mechanism **12** aligned with the second grooves **176** of the intermediate links **128** of the second mechanism **14** allows the respective second grooves **72**, **176** to collectively serve as a second working port that is substantially aligned with the second port **224** of the second link **126** of the second mechanism **14**, and the combination of the third grooves **74** of the intermediate links **32** of the first mechanism **12** aligned with the third grooves **178** of the intermediate links **128** of the second mechanism **14** allows the respective third grooves **74**, **178** to collectively serve as a third working port that is substantially aligned with the third port **226** of the second link **126** of the second mechanism **14**. The second groove **72** may be considered the inner portion of the second working port and the second groove **176** may be considered the outer portion of the second working port. The third groove **74** may be considered the inner portion of the third working port and the third groove **178** may be considered the outer portion of the third working port. The first, second and third working ports may be utilized to pass various tools or instruments (e.g., ablation tools) from the first end **24** of the multi-linked device **10** to the second end **26** of the multi-linked device **10**. For the exemplary sizes described hereinabove, the third working port is larger than the first and second working ports. Accordingly, the third working port may be utilized to carry a

particular tool or instrument that is too large to be carried by the first or second working ports.

[0082] When the respective grooves 70, 72, 74, 174, 176, 178 of the respective intermediate links 32, 128 are aligned and collectively surround the various tools and instruments, the combination of the grooves 70, 72, 74, 174, 176, 178 and the tools and instruments may serve to limit or prevent the rotation of the first mechanism 12 relative to the second mechanism 14.

[0083] As the diameter of the passage 180 of the intermediate link 128 of the second mechanism 14 is larger than the diameter of any portion of the first mechanism 12, a three-dimensional space 240 exists between the first mechanism 12 and the second mechanism 14 when the first mechanism 12 is received by the second mechanism 14 (See FIG. 1B). According to various embodiments, the space 240 may be utilized to carry wiring, tools, instruments, etc. from the first end 24 of the multi-linked device 10 toward the second end 26 of the multi-linked device 10.

[0084] According to various embodiments, one or more steering cables may be fabricated from any suitable material. For example, according to various embodiments, the steering cables may be fabricated from a polyethylene fiber cable such as, for example, Spectra®. The steering cables may be utilized to control the movement of the multi-linked device 10. For example, by applying a substantially equal tension to each of the steering cables, the first mechanism 12 and/or second mechanism 14 may be steered in a direction such that the respective longitudinal axes 38, 62, 90, 134, 164, 212 of each of the links 28, 30, 32, 124, 126, 128 are all aligned. By applying a different tension to one or more of the steering cables, the first mechanism 12 and/or the second mechanism 14 may be steered in a direction such that the respective longitudinal axes 38, 62, 90, 134, 164, 212 of each of the links 28, 30, 32, 124, 126, 128 are not all aligned. The cables 16, 18, 20 may also be utilized

to control the relative state of the second mechanism **14**. For example, when a uniform tension is applied to the steering cables, the second mechanism **14** may be placed in a “rigid” state, and when a tension is removed from the steering cables, the second mechanism **14** may be placed in a “limp” state. According to various embodiments, one or more of the steering cables may be attached at the first end **130** of the first link **124** of the second mechanism **14** to respective pulleys (not shown) by, for example, respective stopper knots. The steering cables may be attached to the second end **132** of the second link **126** of the second mechanism **14** by, for example, respective stopper knots. One skilled in the art will appreciate that, according to other embodiments, the “rigid” and “limp” states may be achieved by subjecting the first and/or second mechanisms **12**, **14** to a twisting force, or by any other manner known in the art.

[0085] According to various embodiments, one or more tensioning cables may be fabricated from any suitable material. For example, according to various embodiments, the tensioning cables may be fabricated from a polyethylene fiber cable such as, for example, Spectra®. The tensioning cables may be utilized to control the relative state of the first mechanism **12**. For example, when the tensioning cable is drawn tight, the first mechanism **12** may be placed in a “rigid” state, whereas when the tensioning cable is let loose, the first mechanism **12** may be placed in a “limp” state. According to various embodiments, the tensioning cable may be attached at the first end **34** of the first link **28** of the first mechanism **12** to a pulley (not shown) by, for example, a stopper knot. The tensioning cable may be attached to the second end **88** of the second link **30** of the first mechanism **12** by, for example, a stopper knot.

[0086] FIG. 10 illustrates various embodiments of a motion sequence of the steerable multi-linked device **10**. At the start of the sequence, the second mechanism **14** surrounds the first mechanism **12** as shown in step “a” of FIG. 10, the longitudinal axes **38**, **62**, **90** of the

links 28, 30, 32 of the first mechanism 12 are substantially aligned with the respective longitudinal axes 134, 164, 212 of the links 124, 126, 128 of the second mechanism, and the second end 26 of the first mechanism 12 is at substantially the same position as the second end 122 of the second mechanism 14. A tensioning cable is pulled tight, thereby placing the first mechanism 12 in the rigid mode. The steering cables are not pulled tight, thereby placing the second mechanism 14 in the limp mode.

[0087] The second mechanism 14 is then advanced so that its second link 126 is positioned approximately one link ahead of the second end 24 of the first mechanism 12 as shown in step "b" of FIG. 10. The cables 16, 18, 20 may be utilized to orient the second link 126 to a particular orientation, where the longitudinal axis 134 of the first link 124 is no longer aligned with the longitudinal axes 164 of the intermediate links 128 of the second mechanism 14 or the longitudinal axis 90 of the second link 30 of the first mechanism 12. After the second link 126 is in the desired position and orientation, the steering cables are pulled with identical force in order to place the second mechanism 14 in the rigid mode, thereby preserving the position and orientation of the second mechanism 14.

[0088] The pulling force of the tensioning cable is then released to place the first mechanism 12 in the limp mode. After the first mechanism 12 is placed in the limp mode, the first mechanism 12 is advanced so that its second link 30 is at substantially the same position as the second end 122 of the second mechanism 14 as shown in step "c" of FIG. 10. After the second link 30 of the first mechanism 12 is in the desired position and orientation, the tensioning cable is pulled tight to place the first mechanism 12 back in the rigid mode, thereby preserving the position and orientation of the first mechanism 12.

[0089] The pulling forces of the steering cables are then released to place the second mechanism 14 back in the limp mode. After the second mechanism 14 is placed back in the limp mode, the second mechanism 14 is advanced so that its second link 126 is once again

positioned approximately one link ahead of the second end 26 of the first mechanism 12 as shown in step “d” of FIG. 10. After the second link 126 is in the desired position and orientation, the steering cables are pulled with identical force in order to place the second mechanism 14 in the rigid mode, thereby preserving the position and orientation of the second mechanism 14.

[0090] The pulling force of the tensioning cable is then released to place the first mechanism 12 back in the limp mode. After the first mechanism 12 is placed back in the limp mode, the first mechanism 12 is advanced so that its second link 30 is once again at substantially the same position as the second end 122 of the second mechanism 14 as shown in step “e” of FIG. 10. After the second link 30 of the first mechanism 12 is in the desired position and orientation, the tensioning cable is pulled tight to place the first mechanism 12 back in the rigid mode, thereby preserving the position and orientation of the first mechanism 12. The general motion sequence described hereinabove, may be repeated any number of times, and the second link 126 of the second mechanism 14 may be advancing in any direction and orientation. One skilled in the art will appreciate that any number of motion sequences may be utilized with the multi-linked device 10. For example, according to various embodiments, the second mechanism 14 may advance any number of links ahead of the first mechanism 12.

[0091] The exemplary sizes described hereinabove are generally relative to each other, and one skilled in the art will appreciate that the multi-linked device 10 can be scaled up or scaled down. For example, although the diameter at the largest portion of the intermediate link 128 of the multi-linked device 10 is on the order of approximately 9.65 millimeters for the embodiments described hereinabove, one skilled in the art will appreciate that, for other embodiments, the intermediate link 128 can be scaled down such that the diameter at the largest portion of the intermediate link 128 of the multi-linked device 10 is on

the order of approximately 1.0 millimeter. For such embodiments, each of the other components of the multi-linked device **10** would also be proportionally scaled down.

[0092] The combination of the unique configuration of the respective links **28**, **30**, **32** which comprise the first mechanism **12** and the unique configuration of the respective links **124**, **126**, **128** which comprise the second mechanism **14** provides the multi-linked device **10** with the ability to traverse a path defined by the circumference of a circle having a relatively small radius. For example, for the exemplary sizes described hereinabove, the multi-linked device **10** can traverse a path defined by the circumference of a circle having a radius on the order of approximately 45 millimeters. An example of the multi-linked device **10** navigating such tight curvatures is shown in FIG. 11. For embodiments, where the largest portion (e.g., measured at the outer diameter) of the intermediate link **128** of the multi-linked device **10** is on the order of approximately 1.0 millimeter, the multi-linked device **10** can traverse a path defined by the circumference of a circle having a radius significantly smaller than 45 millimeters. It may also be possible to achieve a smaller radius of curvature independently of reducing outer diameter. For example, changing the longitudinal dimension (e.g., length of an intermediate link), the radius of curvature may be reduced while maintaining a constant outer diameter. One skilled in the art will appreciate that the ability to navigate such tight curvatures makes the multi-linked device **10** suitable for use in a number of different minimally invasive procedures, both in luminal spaces and in intracavity spaces.

[0093] In an embodiment, the steerable multi-linked device may include a spherical distal assembly. The assembly includes at least two components, typically a distal link cup and a sphere. The sphere is a separate component from the distal link cup, and is connected to a separate control system than the multi-linked device. This separate control system includes a set of auxiliary actuation cables as well as additional control elements. The auxiliary actuation cables may be connected to the sphere as well as the additional control

elements, and the additional control elements may alter the lengths of the auxiliary actuation cables, resulting in movement of the sphere. The separate control system may be located in the feeder as discussed above, or in the multi-linked device.

[0094] The sphere is kinematically constrained from translation in the x-direction and y-direction (of a three dimensional coordinate system originating from the distal link cup where the z-axis points forward, i.e., is the longitudinal axis of the distal link cup and the x-axis and y-axis are perpendicular to the z-axis) by the shape of the distal link cup, and is constrained in the z-direction by the auxiliary actuation cables. The sphere is also constrained from rotation about the longitudinal axis of the distal link cup (z-axis) by the auxiliary actuation cables, but the sphere may rotate about the two axes orthogonal to the z-axis.

[0095] The inclusion of the spherical distal assembly extends the range of motion of the distal tip of the multi-linked device. However, it is important to note that the sphere need not be connected to the multi-link device. Tension on the auxiliary actuation cables kinematically constrains the sphere in the distal link cup, thereby forming the distal link assembly. A steerable multi-linked device with a distal link cup may function normally without the sphere; however, the sphere will not function without the distal link cup and auxiliary actuation cables. The spherical distal assembly is described below in more detail with regards to FIGs. 12-14.

[0096] FIG. 12 illustrates an exemplary embodiment of multi-linked device **1200**. Similar to embodiments represented above (e.g., the embodiment illustrated in FIG. 2), multi-linked device **1200** has a proximal link **1202** and a series of intermediate links **1204**. Device **1200** also has a spherical distal link cup **1206** and a spherical link **1208**, which combine to form the spherical distal assembly. As shown in FIG. 12, the spherical link of device **1200** has a significantly wider range of motion than the relative motion of the intermediate links

and the distal link cup (represented by arrows **1210** and **1212**) for orientating a device (e.g., a camera) mounted in spherical link **1208**, or a device passing through one of the ports of the multi-linked device (e.g., and ablation catheter). In alternative embodiments, the spherical link may have a range of motion similar to or narrower than the motion of the intermediate links and the distal link cup.

[0097] Movement of device **1200** is similar to the movement of device **12** as discussed above. A number of steering cables (in this example, three steering cables) are directed through holes in each link to the spherical distal link cup **1206** where the cables are terminated. Similar to before, by changing the length of each steering cable (e.g., by changing the tension on each cable, thus changing the length), the distal link of device **1200** may be oriented in a specific direction. Control of spherical link **1208** is achieved through an additional set of auxiliary actuation cables. These auxiliary actuation cables may be directed through either the same set of holes as the steering cables, or a separate set of holes in each link and are terminated on spherical link **1208**. Each link of device **1200** (i.e., proximal, intermediate, and spherical distal assembly) and the associated cable holes and cable terminations are discussed in greater detail with respect to FIGS. 13A-14.

[0098] FIG. 13A illustrates multiple views of proximal link **1202**, a cross-sectional view and an isometric view of the link. Proximal link **1202** functions similarly to proximal link **124** as discussed above and illustrated in FIGs. 7A-7C. Proximal link **1202** differs from link **124** though as proximal link **1202** includes six holes to accommodate the cables, e.g., holes **1302**, **1304** and **1306** for accommodating the three steering cables, and holes **1308**, **1310** and **1312** for accommodating the auxiliary actuation cables. However, it should be recognized that this arrangement is merely shown by way of example. Any configuration of holes that provides protection for the cables while still maintaining link integrity may be used, for example, three total holes wherein each hole accommodates two separate cables,

one cable for steering the multi-linked device and one auxiliary actuation cable, such as the arrangement illustrated in FIG. 7C, where proximal link **124** has three holes **154**, **156** and **158**. Using this arrangement, however, may cause friction between the two sets of cables and require a coating be applied to each cable to prevent any damage to the cables caused by friction. Similarly, each cable may be housed in a low friction sheath that would limit the friction caused due to cables sharing a hole. According to various embodiments, proximal link **1202** is fabricated from a thermoplastic material such as, for example, Delrin®, or any suitable metal such as aluminum or stainless steel.

[0099] FIG. 13B illustrates multiple views of intermediate link **1204**, a cross-sectional view and an isometric view of the link. Intermediate link **1204** functions similarly to intermediate link **128** as discussed above and illustrated in FIGs. 8A-8C. Intermediate link **1204** differs from link **128** though as intermediate link **1204** includes six holes to accommodate the cables, e.g., holes **1322**, **1324** and **1326** for accommodating the three steering cables, and holes **1328**, **1330** and **1332** for accommodating the auxiliary actuation cables. However, it should be recognized that this arrangement is merely shown by way of example. Any configuration of holes that provides protection for the cables while still maintaining link integrity may be used, for example, three total holes wherein each hole accommodates two separate cables, one cable for steering the multi-linked device and one auxiliary actuation cable, such as the arrangement illustrated in FIG. 7C, where proximal link **128** has three holes **190**, **192** and **194**. Using this arrangement, however, may cause friction between the two sets of cables and require a coating be applied to each cable to prevent any damage to the cables caused by friction. Similarly, each cable may be housed in a low friction sheath that would limit the friction caused due to cables sharing a hole. According to various embodiments, intermediate link **1204** is fabricated from a thermoplastic material such as, for example, Delrin®, or polysulfone.

[00100] FIG. 13C illustrates multiple views of spherical distal link cup **1206**, a cross-sectional view and an isometric view of the link. Spherical distal link cup **1206** is the termination point for the multi-link device steering cables. The multi-link device cables are accommodated by holes **1342**, **1344** and **1346**. A knot may be made in the end of the multi-link steering cables such that the end of the cable is larger than the opening of the holes. Similarly, additional termination techniques may be used, such as a mechanical clamp or splicing the cables. Once the cables are terminated at spherical distal link cup **1206**, any change in length of the multi-link device steering cables is transferred directly to the spherical distal link cup **1206**, thereby changing the orientation of the spherical distal assembly. In the example spherical distal cup illustrated in FIG. 13C, three separate holes **1348**, **1350** and **1352** may be provided for the auxiliary actuation cables. However, as before with proximal link **1202** and intermediate link **1204**, auxiliary actuation cables may share a hole with a multi-link device steering cable. FIG. 14 illustrates an example of spherical distal cup **1206** wherein three holes **1402**, **1404** and **1406** are provide, wherein each hole accommodates both a steering cable as well as an auxiliary actuation cable.

[00101] Spherical distal link cup **1206** also has three concave surfaces (e.g., **1360**, **1362** and **1364** in FIG. 13C). These concave surfaces may have a radius similar to the radius of the spherical link to insure a proper fit with the spherical link. According to various embodiments, spherical distal link cup **1206** is fabricated from a thermoplastic material such as, for example, Delrin®, or any suitable metal such as aluminum or stainless steel.

[00102] FIG. 13D illustrates multiple views of spherical link **1208**, a cross sectional view and an isometric view of the link. Spherical link **1208** functions similarly to distal link **30** as discussed above. A device (e.g., a camera) may be mounted in opening **1370**, similar to distal link **30**, however, due to the manner of control and termination locations of the auxiliary actuation cables, spherical link **1208** provides a larger range of motion for the

mounted device than distal link **30**. Additionally, a medical tool (e.g., an ablation catheter) may be mounted in one of working ports **1372**, **1374** and/or **1376**.

[00103] Each of the auxiliary actuation cables is terminated at spherical link **1208** via holes **1380**, **1382** and **1384**. Each cable is run along the exterior of spherical link **1208** and fed into a hole. The cable is then knotted or otherwise terminated at the interior of spherical link **1208** such that the auxiliary actuation cables react on the inner surface of spherical link **1208**, for example, inner surface **1390**. Once the auxiliary actuation cables are attached, spherical link **1208** is fitted into spherical distal link cup **1206** forming the spherical distal assembly. By applying a tension to one of the auxiliary actuation cables which thereby changes the length of the auxiliary actuation cable, spherical link **1208** rotates accordingly. As configured, spherical link **1208** is not attached to the multi-link device, rather it is kinematically constrained in spherical distal cup **1206** and is held in place by the auxiliary actuation cables.

[00104] According to various embodiments, spherical link **1208** is fabricated from a material that is mismatched from the type of material used to fabricate spherical distal link cup **1206**. For example, if spherical distal link cup **1206** is fabricated from a thermoplastic material such as, for example, Delrin®, then spherical link **1208** may be fabricated from metal such as, for example, stainless steel or other suitable metal. By fabricating both spherical distal link cup **1206** and spherical link **1208** from mismatched materials, friction between the two is reduced. However, it should be noted that mismatched materials are not required, and in some applications (e.g., precision surgical applications) additional friction may be desired.

[00105] FIG. 15 illustrates an exemplary side view of a device according to an embodiment. As illustrated by FIG. 15, the device may include a rotating link configured to rotate with a single degree of freedom. Device **1500** may be a catheter, such as an

interventional or percutaneous catheter device. Device **1500** may include a flexible catheter shaft **1510**, such as a shaft made of a biocompatible elastomer or other plastic such as silicone or polyurethane. Handle **1540** may be located on the proximal end of shaft **1510** and may include a control, knob **1541** and/or a standard luer-lock access port **1542**. Port **1542** may be configured to allow one or more tools to be inserted through port **1542**, and through one or more working channels of shaft **1510**, channels not shown but described in detail hereabove.

FIG. 15A illustrates an exemplary distal end of a device **1500** according to an embodiment. Pivot assembly **1520** may be attached to the distal end of shaft **1510**, such as via a glued joint or the like. Numerous attachment forms may be utilized to attach pivot assembly **1520** or other adapted links to shaft **1510**. For example, one or more threads, snap fits, barbed connections, adhesive bonds, welds, frictional engagements and/or the like may be used. In a particular embodiment, one or more cables may be attached to pivot assembly **1520** and maintained in tension to maintain contact between shaft **1510** and pivot assembly **1520**. In an alternative embodiment, one or more magnets or electromagnets may be included in the distal end of shaft **1510** and/or the proximal end of pivot assembly **1520**, each of which may mate with a magnet or magnetic material in the corresponding part. The resulting magnetic force may maintain the pivot assembly **1520** in contact with the distal end of shaft **1510**.

[00106] Pivot assembly **1520** may include a hinge pin **1521** to which rotating sphere **1530** may be rotatably attached. Two rotation cables, cables **1532a** and **1532b** may travel through a channel, lumen or other opening of shaft **1510**, and terminate on sphere **1530** at welds **1533a** and **1533b** respectively. Welds **1533a** and **1533b** may be positioned on sphere **1530** such as to determine the amount of rotation caused as cables **1532a** and **1532b** are retracted proximally. The amount of rotation may be related to the positioning of the termination. For example, as oriented in FIG. 15A, as the termination moves distally, more rotation may be achieved by retracting the associated cable. As the termination approaches

the distal end, and continues along the same circumference proximally, rotational range may be further increased. Position of the exit of each cable **1532a** and **1532b** from pivot assembly **1520** may also determine the amount of rotation by sphere **1530**. The closer the exit of cables **1532a** and **1532b** to the axial center of pivot assembly **1520**, the greater the rotation achievable.

[00107] Holes or other pass thru locations for cables combined with cable termination sites (e.g. location on sphere **1530**) and sphere versus cup diameter may determine the range of allowable rotation. In an embodiment, a first cable, a first pass thru hole and a first cable termination may be positioned to allow a range of rotational patterns all starting from a first starting position. A second cable, second pass thru hole and a second cable termination may be positioned to allow any of the range of rotational positions caused by retracting the first cable to be reversed by retracting the second cable (e.g. returned to the first starting position). In an embodiment, sphere **1530** may be rotated by retracting a first cable and a second cable simultaneously. In another embodiment, sphere **1530** may be rotated by retracting a first cable and advancing a second cable (e.g. to accommodate the rotation causes by the first cable retraction).

[00108] Holes or other pass through locations for cables combined with cable termination sites (e.g. location on sphere **1530**) may be chosen to prevent the performance of a rotation to any rotational position from which advancement or retraction of one or more cables (or other action) cannot recover or otherwise depart from. In robotic engineering, this condition may be caused by a singularity. Singularities may also describe conditions in which a degree of freedom is lost, such as when joints approach a mechanical limit, e.g. when a cable reaches a mechanical stop. Singularities may be avoiding by the repositioning of holes or termination points, or by the addition of one or more additional cables configured to move sphere **1530** from the undesired position (i.e. the additional cable adds another degree

of freedom). Singularities may also be avoided with one or more features of the distal rotating assembly such as one or more ridges configured to mechanically stop rotation at one or more locations in one or more directions. Other unrecoverable positions may be avoided, such as when a first cable is wrapping around a partial circumference of a spherical portion of sphere **1530** when sphere **1530** is in a first position. If this first position is such that the path of least resistance for the first cable to follow from is different than the cable followed as it was pulled to this first position, retraction of the cable may cause an undesired rotation (e.g. during retraction the cable may slide along the surface of sphere **1530** because that was the path of least resistance). In an alternative embodiment, a singularity or other unrecoverable position may be desired, such as to cause the spherical link to rotate to such a position and remain in that position.

[00109] Device **1500** may include one or more tools, insertable through port **1542** of handle **1540** and advanced to pass through shaft **1510**, pivot assembly **1520** and into channel **1522** of sphere **1530**. Numerous medical and other tools may be inserted into device **1500** and the other devices may include, but are not limited to, cutters, graspers, dissectors, biopsy mechanisms, sensing devices such as EKG electrode or array of electrodes, energy delivery tools such as cryogenic and radiofrequency (RF) tissue ablating tools, drug delivery devices, cameras and/or the like. As shown in FIG. 15A, ablation probe **1550** has been inserted into device **1500** and its distal end resides in channel **1522**. Channel **1522** has at its distal end, an exit hole, tool port **1531** from which ablation probe **1550** can be advanced when the distal end of shaft **1510** is placed proximate a target location, and channel **1522** of sphere **1530** is rotated toward the target location. The interface of pin **1521** with sphere **1530**, allows sphere **1530** to be rotated with a single degree of freedom, along lines **1210**, such that channel **1522** traverses a single plane. Referring to FIG. 15B, sphere **1530** has been rotated such that advancement of ablation probe **1550** will cause the distal end of probe **1550** to travel toward

target T. Target T may be a target location on a patient's heart, a tumor, or other tissue intended to be ablated in a medical procedure. Sphere **1530** has been rotated by pulling on cable **1532b** and/or pushing on cable **1532a**. The devices may provide a rotational link which can be oriented in numerous directions, including the radially out or 90° orientation of device **1500** illustrated by FIG. 15. Numerous procedures, such as transoral robotic surgery (TORS) procedures, may be performed with 90° and larger orientations, wherein a tool enters a conduit such as the esophagus, and exits the rotating link into the wall of the conduit relatively orthogonally. In an embodiment, an endoscope may enter a conduit such as the colon, and a tool may be advanced approximately orthogonally through the wall of the colon to perform a medical event within the wall of the colon or outside the colon.

[00110] Handle **1540** may include additional components such as additional access ports, one or more power supplies, an electronic module such as the module described in reference to FIG. 17, additional controls such as a slide or knob controlling one or more linkages, pneumatic or hydraulic assemblies and/or the like. While device FIGS. 15, 15A and 15B illustrate exemplary catheter devices **1500**, additional and/or alternate devices, including, but not limited to flexible devices, such as an endoscope or multi-link device, or rigid devices, such as a laparoscopic device, may be used within the scope of this disclosure.

[00111] FIG. 16 illustrates a side view of an exemplary device according to an embodiment. As illustrated by FIG. 16, a device may include a rotating link configured to rotate a cutting assembly. Device **1600** may be a laparoscopic or other similar minimally invasive medical device. Device **1600** may include rigid tube **1610**, such as a stainless steel, titanium, or other metal tube, or a non-metallic tube such as a biocompatible hard plastic tube. Cup assembly **1620** may be attached to tube **1610**, such as been described above in reference to FIGS. 15, 15A and 15B. Cup assembly **1620** may be fixedly attached to tube **1610** or it may be rotatably attached. In an embodiment, cup assembly **1620** may be

removably attached to tube **1610** such as to allow a different configuration cup assembly to be attached to tube **1610** and/or to allow access to the distal end of tube **1610** and/or the distal end of one or more tools advanced through tube **1610**. Rotatably attached to cup assembly **1620**, may be sphere **1630** which may be configured to rotate with two degrees of freedom, along lines **1210** and **1212**. At the proximal end of device **1600** may be a control, joystick **1641**, which may be operably attached to two or more cables. Movement of joystick **1641** may cause sphere **1630** to move along either or both lines **1210** and **1212**. In an alternative embodiment, a counter part sphere may be directly connected to the proximal end of sphere **1630** with actuation cables such that the sphere is controlled in a one-to-one motion map (spheres of equal diameter), or a scaled motion map (spheres having different diameters).

[00112] Device **1600** may include a cutting assembly which may include at its distal end, scissor assembly **1650** shown exiting sphere **1630**. Scissor assembly **1650** may include blades **1651** which may rotate with the rotation of sphere **1630**, along one or both lines **1210** and **1212**. Also at the proximal end of device **1600** may be a scissor handle-like mechanism, actuator **1642**. Opening and closing of actuator **1642** may cause the correlating opening and closing of blades **1651**, such as via a mechanical, pneumatic, hydraulic or other applicable linkage that may be operably connected between actuator **1642** and scissor assembly **1650**.

[00113] FIG. 17 illustrates a side sectional view of an exemplary distal portion of a device. As illustrated by FIG. 17, a distal portion may include a distal cup configured to rotatably interface with a more proximal spherical surface and/or means for transferring power, such as electrical current, or data to a rotating distal member. In an embodiment, power and/or data may be transmitted using one or more lines, wires, cables and/or the like. Device **1700** may include shaft **1710**, such as a shaft similar to shaft **1510** of FIGS. 15, 15A or 15B, tube **1610**, such as that of FIG. 16, or a shaft of the multi-link devices of FIGS. 1 through 14. Shaft **1710** may include partial sphere **1720**, which may be fixedly or removably

attached to shaft 1710. Partial sphere 1720 may be maintained in position with the distal end of shaft 1710 with one or more cables. The concave surface of the rotating cup 1730 may be rotatably engaged with the convex surface of partial sphere 1720. Cable 1732a and cable 1732b are attached at their distal ends to cup 1730 at joint 1733a and 1733b respectively, and at their proximal ends to a handle. Joint 1733b may be attached to surface 1738' of rotating cup 1730. The moment arm achieved with this location may be less than the moment arm that would be achieved if joint 1733a was located on surface 1738'' of rotating cup 1730. The rotation angle per unit length of a retraction of cable 1732b may be greater with joint 1733 on surface 1738' versus on surface 1738''. In addition, as cable 1732b is retracted, surface 1738' may eventually make contact with the distal end of shaft 1710, stopping the rotation. By varying the surface geometry of the adapted links and rotating links of the device (e.g. concave versus convex), the performance and other mechanical properties of the rotating mechanism may be customized. The various configurations of the distal rotating assemblies described herein may be applied to achieve varied performance such as rotation magnitude versus cable retraction and rotational force versus cable retraction force.

[00114] In an embodiment, a knot, adhesive ball, splice, mechanical crimp, and/or other cable enlarging means may be formed in the end of a multi-link cable such that the end of the cable is larger than a hole through which the cable passes (e.g. a thru hole in rotating cup 1730). Similarly, termination techniques may be used to attach the cable end directly such as a weld, an adhesive joint, frictional engagement between the cable and a capture element, such as a v-shaped or spring-loaded capture device, a loop at the end of a cable that is fastened by way of a hook or threaded hole and screw and/or other joint forming means. In addition to cable 1732a and 1732b, one or more other cables may be provided, such as to rotate cup 1730 in alternative orientations and/or to reverse one or more rotational directions.

[00115] Partial sphere 1720 includes a first conductive element 1725, which may be configured to electrically attach to a second conductive element 1739 which may be integral to cup 1730 (i.e. similar to a slip ring connection used to transfer electrical signals or power from a rotating frame of reference to a stationary frame of reference). Conductive element 1725 may be attached to wire 1726. In an embodiment, conductive elements 1725 and 1739 may include multiple, isolated or otherwise independent conductive elements (e.g. multiple aligned conductive strips separated by one or more insulators), and wire 1726 may include multiple independent wires, such that multiple independent electrical transmissions may be communicated from first conductive element 1725 to second conductive element 1739. In a preferred embodiment, wire 1726 transmits electrical energy and/or data to electronic module 1737 via first conductive element 1725, second conductive element 1739, and wire 1736 respectively. Electronic module 1737 may include energy storage means, such that cup 1730 may have an available energy source when wire 1726 is not transmitting energy, such as when wire 1726 is transmitting data to or from electronic module 1737. The electrical energy transferred can be stored and/or used by electronic module 1737 or another component within or in proximity to cup 1730. Data transmitted or received may be rotational position control or position feedback signals respectively, or numerous other forms of data such as data sent to one or more tools of device 1700, or data received from one or more sensors of device 1700.

[00116] Electronic module 1737 may be a simple or complex electrical circuit configured to perform one or more functions such as to record data from one or more sensors, not shown but integral to cup 1730, sphere 1720 or shaft 1710. Module 1737 may include various electronic and electromechanical components or systems including but not limited to digital to analog converters, analog to digital converters, microcontrollers, microprocessors, multiplexers and demultiplexers, switching circuitry, MEMS circuitry and componentry/

memory devices such as RAM and ROM and/or the like. Module **1737** may include one or more software programs embedded therein, such as software activated by a user during use of a device. Module **1737** may be configured to operate and/or receive data from one or more tools, such as a camera assembly including cameras **1752a** and **1752b**. Cameras **1752a** and **1752b** are connected to electronic module **1737** via wires **1735a** and **1735b**. Wires **1735a** and **1735b** may be conductive wires, or other power and/or data conduits such as fiber optic cables. In an embodiment, cameras **1752a** and **1752b** may be lens assemblies, wires **1735a** and **1735b** may be fiber optic cables, and the optical information may be captured in a camera module integrated to electronic module **1737**.

[00117] Device **1700** may include one or more medical or other tools, such as biopsy device **1751** shown in FIG 17, as passing through shaft **1710**, through partial sphere **1720** and into an opening of cup **1730**, tool port **1731**. As cup **1730** is rotated, by advancing and/or retracting cable **1732a** and/or **1732b**, or other cables not shown, the trajectory of tool port **1731** may be correspondingly rotated, such as to control the trajectory of an advanced or yet to be advanced biopsy device **1751**.

[00118] FIGS. 18A and 18B illustrate a top view of an exemplary adapted link and a side sectional view of an exemplary device according to an embodiment. As shown in FIG. 18A, cup assembly **1820** may include a curvilinear groove **1824** which may be configured to guide the rotation of a rotating link, including a pin or other mating protrusion, in a preferred rotational pattern. Cup assembly **1820** may include an opening for passage of one or more wires or cables, slot **1823**. Referring to FIG. 18B, device **1800** may include tube **1810** having one or more constructions or configurations as has been described in detail hereabove. The distal end of tube **1810** may include integral cup assembly **1820**, which may include a concave surface and providing an adapted link. Of similar diameter and matingly received by the concave surface of cup assembly **1820**, may be the convex surface of rotating sphere

[00119] Cable **1832** may be configured to allow electrical signals or power to be transmitted from the proximal end of device **1800** to one or more components integral to tube **1810**, cup assembly **1820**, sphere **1830**, or other component of device **1800**. Cable **1832** may be electrically attached to the proximal end of wire **1852** which may be attached at its distal end to electrode **1851**, shown on the distal end of sphere **1830**. When sphere **1830** is rotated in a predetermined rotational pattern or otherwise, electrode **1851** may be correspondingly rotated such as to be oriented toward a target such as a particular tissue target within a patient. Device **1800** may include a handle at its proximal end. The handle may include one or more controls operably connected to cable **1832**.

[00120] FIG. 19 illustrates a side sectional view of a distal portion of an exemplary device. As illustrated by FIG. 19, a device may include an element configured to limit travel of a rotating cable. Device **1900** may include tube **1910**, such as a shaft similar to shaft **1510** of FIGS. 15A, 15B or 15C, tube **1610** of FIG. 16, or a shaft of the multi-link devices of FIGS.

1 through 14. Positioned at the distal end of tube **1910** may be cup assembly **1920** maintained in longitudinal position by tensioning of cable **1922**, which attaches to cup assembly **1920** at weld **1929**. Sphere **1930**, shown with a smaller diameter than the concave surface of cup assembly **1920**, may be attached to two cables, cables **1932a** and **1932b** at welds **1933a** and **1933b** respectively. Cables **1932a** and **1932b** may pass through holes **1927a** and **1927b** respectively, of cup assembly **1920**. Cable **1932b** may pass through ring **1928** of cup assembly **1920** such that as cable **1932b** is retracted, rotation of sphere **1930** in a clockwise direction is limited to the location where weld **1933b** is proximate ring **1928**. Application of torsional force to sphere **1930** by retraction of cable **1932a** may include a tangential force applied at weld **1933a** as well as forces resulting from any frictional engagement of cable **1932a** with the surface of sphere **1930**. Application of torsional force to sphere **1930** by retraction of cable **1932b** may include torsion created by the force vector between weld **1933b** and ring **1928**. Numerous configurations of hole **1927a** and weld **1933a** may be chosen to modify the torsional response of sphere **1930** caused when cable **1932a** is retracted. Similarly, numerous positions and other configurations of ring **1928** and weld **1933b** may be chosen to customize the torsional response of sphere **1930** caused when cable **1932b** is retracted. In an alternative embodiment, a similar ring may be provided for cable **1932a**, such that rotation in a counter-clockwise direction can be limited.

[00121] Device **1900** may include a thru lumen, lumen **1912** which may exit tube **1910** at exit port **1913**. Lumen **1912** may be configured to allow one or more tools to pass out of tube **1910**, or to deliver one or more fluid into the area proximate port **1913**. Sphere **1930** and cup assembly **1920** include one or more thru holes which may be configured to allow one or more tools to pass through and be rotated by the rotation of sphere **1930**, as has been described in detail hereabove. Cup assembly **1920** may include on its distal end, cameras **1960a** and **1960b** oriented to view the area in front of sphere **1930** as shown, such as

to view one or more tools advanced through sphere **1930**. Wide angle lenses may be included to view radially out, such as when sphere **1930** and any attached or inserted tools, have been rotated 90°. Cameras **1960a** and **1960b** may be attached to wires **1961a** and **1961b** respectively, each of which travels proximally to a handle, such as described in reference to FIG. 15 hereabove. The handle may include a monitor or a video attachment port for connection to a monitor. In an alternative embodiment, cameras **1960a** and **1960b** may be simply camera lenses and wires **1961a** and **1961b** may be fiber optic cables operably attached to the lenses such that a camera can be attached to device **1900** and view the image provided by the lenses. The handle may include one or more controls operably connected to cables **1932a** and **1932b**, as well as cable **1922**. The handle may include one or more ports for introduction of one or more tools configured to exit sphere **1930**.

[00122] FIG. 20 illustrates a side sectional view of an exemplary distal portion of a device according to an embodiment. As illustrated by FIG. 20, the device may include two cables and associated pass thru holes that are oriented to different rotational performance. Device **2000** may include tube **2010**, such as a shaft similar to shaft **1510** of FIGS. 15, 15A or 15B, tube **1610** of FIG. 16, or a shaft of the multi-link devices of FIGS. 1 through 14. Integral to the distal end of tube **2010** may be concave surface **2020**, an adapted link, which may rotatably mates with the convex surface of sphere **2030**. Sphere **2030** may be attached to cable **2032a** and **2032b** at welds **2033a** and **2033b** respectively. Cables **2032a** and **2032b** may pass through convex surface **2020** at holes **2027a** and **2027b** respectively. The configuration of the holes (e.g. holes **2027a** and **2027b**) of device **2000** may be such that the closer the hole is located to central axis C of the distal end of tube **2010**, the greater the range of rotation is made available by retracting the associated cable. The configuration of the termination points (e.g. welds **2033a** and **2033b**) may be such that the larger the amount of circumference traversed between the hole and termination point, the greater the range of

rotation is made available by retracting the associated cable. Referring back to FIG. 20, hole **2027a** through which cable **2032a** may pass may be located more proximal to axis C than hole **2027b** through which cable **2032b** passes through. Also, weld **2033a** of cable **2032a** and weld **2033b** of cable **2032b** may be positioned such that cable **2032a** traverses more circumference of sphere **2030** than cable **2032a** does. Therefore, cable **2032a** may have a much larger rotational range (approaching 180°) than cable **2032b** does.

[00123] Sphere **2030** and concave surface **2020** may include one or more thru holes configured to allow one or more tools to pass through and to be rotated by the rotation of sphere **2030**, as has been described in detail hereabove. Device **200** may include at its proximal end a handle such as that described in reference to FIG. 15 hereabove. The handle may include one or more controls operably connected to cables **2032a** and **2032b**. The handle may include one or more ports for introduction of one or more tools configured to exit sphere **2030**.

[00124] FIG. 21 illustrates a side sectional view of an exemplary distal portion of a device. As illustrated by FIG. 21, a device may include a kit of multiple rotating links that can be used with a single adapted link. Device **2100** may include tube **2110**, such as a shaft similar to shaft **1510** of FIGS. 15, 15A or 15B, tube **1610** of FIG. 16, or a shaft of the multi-link devices of FIGS. 1 through 14. Integral to the distal end of tube **2110** may be a linearly tapered, concave surface, cone surface **2120**, an adapted link, which may rotatably mate with the convex surfaces of spheres **2130a**, **2130b** and **2130c**. Spheres **2130a**, **2130b** and **2130c** may be configured to engagably attach to one or more rotating cables which may pass through channel **2111** or other cable lumen of tube **2110**. The engagable attachment may include attachment means such as a loop located at or near the end of one or more cables that attaches to a threaded hole of a sphere with a screw, a barb or other projection which frictionally engages a hole in a sphere or other user engagable cable attachment means.

[00125] Spheres **2130a**, **2130b** and **2130c** may have decreasing diameters, respectively, and may have unique engaging surface areas, each a circle (e.g. a single line of contact), with linear tapered conical surface **2120**. The varied diameters may cause spheres **2130a**, **2130b** and **2130c** to be positioned at different longitudinal positions along conical surface **2120**, heights **H1**, **H2** and **H3** respectively. The forces required to actuate the sphere (with one or more cables not shown but described in detail hereabove) may vary due to the change in moment arm between each cable and sphere. The surface area of engagement and frictional forces may allow customized rotational movement and forces required. Alternatively and/or additionally, the conical features of conical surface **2120** may be varied, in diameter and angle of taper (i.e. pitch), to customize range of motion as well as forces required and generated from and by retraction and advancement of one or more cables. In an embodiment, the cross-sectional geometry of a sphere or conical surface may be varied to customize performance and/or forces required.

[00126] Spheres **2130** and cone surface **2120** may include one or more thru holes which may be configured to allow one or more tools to pass through and be rotated by the rotation of spheres **2130** as has been described in detail hereabove. Device **2100** may include a handle at its proximal end such as described in reference to FIG. 15 hereabove. The handle may include one or more controls operably connected to one or more cables, which may terminate at spheres **2130** and which may be configured to rotate spheres **2130** as has been described in detail hereabove. The handle may include one or more ports for introduction of one or more tools configured to exit sphere **2130**.

[00127] While the positioning of cable exit holes and cable termination points as shown in FIG. 20 and FIG. 21 imply that larger rotations can be achieved with holes close to the center axis of the adaptive link and/or termination locations “higher up in altitude” on the rotating link. There are limitations in having multiple cables positioned for a maximum

range or rotation, such as increasing the likelihood of for singularities and other non-desired rotational states (e.g. loss of control of the rotating link).

[00128] It should be understood that numerous other configurations of the devices, systems and methods described herein can be employed without departing from the spirit and scope of this application. Numerous figures have illustrated typical dimensions, but it should be understood that other dimensions can be employed which result in similar functionality and performance.

[00129] The described devices and systems may be used to perform various procedures including medical procedures such as diagnostic procedures, therapeutic procedures, surgery, blunt dissections, minimally invasive surgery, interventional procedures, endoscopic procedures and/or the like. In an embodiment, the described devices and systems may be used to perform a procedure on an organ of a patient, such as the heart during a cardiac ablation or mapping procedure for a patient diagnosed with a heart arrhythmia.

[00130] The elongate shafts of a device may have various cross-sectional geometries including geometries that vary along the length of the shaft. Applicable cross-sectional geometries include, but are not limited to, circular, elliptical, trapezoidal, rectangular, triangular and/or other geometries.

[00131] While the distal rotating links have been illustrated at the distal portion of the described devices and systems, the distal rotating links may be located at the proximal end or at an intermediate portion of the device, such as when the device includes multiple links attached to the distal end of the distal rotating link, allowing these multiple links and any tools passed within or attached thereto to be rotated by rotating the distal rotating link.

[00132] In an embodiment, adaptive links may be fixedly or removably attached to the elongate tube and may utilize one or more attachment means. The adaptive links may be fixedly attached to the elongate shaft in a kinematically constrained manner, such as with one

or more cables, one or more of these cables further configured to cause rotation of the adaptive link. In an embodiment, the adaptive link may be fixedly attached to the elongate tube with a hinge pin arrangement, such that the attachment is independent of rotating cable tension. The adaptive links may have relatively concave or convex distal ends, configured to allow rotation of the mating surface of the associated rotating link. Relative diameters of the mating surfaces may be similar or dissimilar.

[00133] The rotating links may be oriented in various orientations such as a change in orientation of 90° to 180°. The rotating links may be operated in a reciprocating motion, and the motion of the rotating link may be used to actuate a tool such as a surgical tool or an end effector tool integral to the rotating link.

[00134] The shafts, adapted links and rotating links may include one or more exit holes from which one or more tools may exit the device. A system may include multiple shafts, adaptive links and/or rotating links, such as components with different working channel or other thru hole sizes and pattern, different exit ports from which one or more tools may exit; different cable termination types and/or locations; different integral tools such as one or more cameras or other tools integral to a rotating link; and other differences that may be supplied in a system of kit form. The shafts, adapted links and rotating links may include a tool attachment element configured to attach one or more tools thereto.

[00135] The described systems and devices may include one or more rotating or attachment cables. In an embodiment, three or more rotating cables may be included such as to provide stability, and two degree of freedom rotation (pitch and yaw), such as when the rotating link includes a complete spherical surface. One or two cables may be used such as when the rotating link is constrained by mating projections and grooves, or by other motion constraining means. A first cable may be used to cause rotation in a first direction or pattern, and a second cable used to return the rotating link to its original position. In an embodiment,

three or more attachment cables may be included to kinematically constrain the adaptive link, such as to provide stability and allow rotation of the adaptive link with two degrees of freedom.

[00136] The cables may be similar or dissimilar, and may provide additional functions such as to transmit energy; allow flow of liquids or gases such as cryogenic materials to ablate tissue; and provide additional functions. The cables may be solid, or include one or more lumens, such as a lumen configured to transport a liquid or gas, such as a cryogenic material used to perform a tissue ablation procedure, or a cooling fluid used to prevent overheating of tissue of a patient. One or more cables may be stretch resistant, such as a cable made of metal wire or hypotube such as a stainless steel or Nitinol wire, fluorocarbon filament, braided strands of material and/or the like. One or more cables may be configured to stretch, such as a cable made of a monofilament polymer or monofilament polymer blend.

[00137] In an embodiment, the described methods may include the performance of medical and other procedures. In an embodiment, a medical procedure may be performed by a clinician and may include a diagnostic procedure, a therapeutic procedure, a blunt dissection, surgery, minimally invasive surgery, an interventional procedure, an endoscopic procedure and/or the like. Methods may include various rotations of the rotating link, such as 90° and 180° rotations. In an embodiment, the rotating link may be rotated approximately 90° or otherwise such that a tool can be advanced orthogonally toward the surface of tissue such as esophageal tissue or colorectal tissue, when the device is inserted into the esophagus or rectum, respectively. In an embodiment, the rotating link may be rotated to actuate one or more tools, such as a surgical tool that passes thru the rotating link, or a tool attached to the rotating link such as an end effector tool. Motion of the rotating link may be a reciprocating motion, such as to cause a blunt or sharp tool to cut or dissect tissue. The various links of the

described devices may be locked in place by the tensioning of one or more cables. In an embodiment, one or more links may be locked prior to rotation of the rotating link and/or advancement of one or more tools through the rotating link.

[00138] While several embodiments of the invention have been described herein by way of example, those skilled in the art will appreciate that various modifications, alterations, and adaptations to the described embodiments may be realized without departing from the spirit and scope of the invention defined by the appended claims.

J. CLAIMS

What Is Claimed Is:

1. A device for performing a procedure comprising:
 - an elongate tube comprising a proximal end and a distal end;
 - an adapted link comprising a proximal end and a distal end, wherein the distal end comprises a first mating surface, wherein the proximal end is configured to attach to the elongate tube distal end; and
 - a rotating link comprising a second mating surface configured to rotatably interface with the adapted link first mating surface.
2. The device of claim 1, wherein said device comprises a steerable multi-linked device, comprising:
 - a first link; and
 - a plurality of intermediate links, wherein a first one of the intermediate links is movably coupled to the first link,
 - wherein the proximal end of the adapted link is movably coupled to one of the intermediate links.
3. The device of claim 1, wherein the device comprises a steerable multi-linked device, comprising:
 - a first multi-linked mechanism; and
 - a second multi-linked mechanism comprising:
 - a first link, and
 - a plurality of intermediate links, wherein a first one of the intermediate links is movably coupled to the first link,

wherein the proximal end of the adapted link is movably coupled to one of the intermediate links.

4. The device of claim 2 or 3, wherein the intermediate links are configured to be in a locked position while the rotating link is rotated.

5. The device of claim 2 or 3, further comprising at least one cable comprising a distal end attached to the adaptive link, wherein the locked position is achieved when the at least one cable is retracted.

6. The device of claim 1, wherein the device is configured to perform a medical procedure.

7. The device of claim 1, wherein the device is configured to perform a blunt dissection procedure.

8. The device of claim 7, wherein the rotating link is configured to be rotated in a reciprocating lateral motion.

9. The device of claim 1, wherein the rotating link is configured to be oriented at approximately 90 degrees to the axis of the distal end of the elongate tube when the procedure is being performed.

10. The device of claim 9, wherein the procedure is a transoral robotic surgery procedure.

11. The device of claim 1, further comprising a tool and wherein the rotating link is configured to rotate in a motion that actuates the tool.
12. The device of claim 1, wherein the elongate tube comprises one or more rigid portions.
13. The device of claim 12, wherein the device is configured to perform a laparoscopic procedure.
14. The device of claim 1, wherein the elongate tube is flexible.
15. The device of claim 14, wherein the device is a catheter device.
16. The device of claim 14, wherein the device is an endoscope device.
17. The device of claim 1, wherein the elongate tube comprises a plurality of connected links.
18. The device of claim 1, further comprising a second elongate tube configured to be slidably received by the elongate tube.
19. The device of claim 1, further comprising a second elongate tube configured to slidably receive the elongate tube.

20. The device of claim 1, wherein the tube comprises a portion having a cross-sectional geometry comprising one or more of the following:

round,
elliptical,
trapezoidal,
rectangular, and
triangular.

21. The device of claim 1, wherein the elongate tube comprises a uniform diameter along a length of the elongate tube.

22. The device of claim 1, wherein the elongate tube comprises a non-uniform diameter along a length of the elongate tube.

23. The device of claim 1, wherein the adapted link is rotatably attached to the elongate tube.

24. The device of claim 23, wherein the adapted link is configured to rotate about the distal end of the elongate tube.

25. The device of claim 24, wherein the device is a multi-linked device and the tube distal end is an intermediate link of a multi-linked device.

26. The device of claim 1, wherein the adapted link is attached to the distal end of the elongate tube by one or more of the following:

One or more attached cables placed in tension such that the adapted link is kinematically constrained;

a thread;

a snap;

a barb;

an adhesive bond;

a magnets;

an electromagnets; and

a frictional engaging member.

27. The device of claim 1, wherein the adapted link is fixedly attached to the elongate tube.

28. The device of claim 1, wherein the adapted link is removably attached to the elongate tube.

29. The device of claim 1, further comprising at least one cable that is configured to provide tension to maintain contact between the proximal end of the adapted link and the distal end of the elongate tube.

30. The device of claim 29, comprising at least two cables configured to provide tension to maintain contact between the proximal end of the adapted link and the distal end of the elongate tube.

31. The device of claim 1, wherein the adapted link comprises a proximal end and a distal end, wherein the adapted link is configured to allow one or more tools to traverse from the proximal end of the adapted link to the distal end of the adapted link.

32. The device of claim 1, wherein the adapted link comprises a proximal end and a distal end, wherein the adapted link is configured to transmit one or more of the following from the proximal end of the adapted link to the distal end of the adapted link:

power; and

data.

33. The device of claim 32, further comprising one or more of the following:

one or more power lines extending from the proximal end of the adapted link to the distal end of the adapted link; and

one or more data lines extending from the proximal end of the adapted link to the distal end of the adapted link.

34. The device of claim 32, wherein the adapted link further comprises a first conductive portion, wherein the rotating link further comprises a second conductive portion, wherein the first conductive portion is configured to maintain electrical connection with the second portion while the rotating link rotates.

35. The device of claim 1, wherein the adapted link further comprises an outlet port configured to allow one or more tools to pass therethrough.

36. The device of claim 35, wherein the elongate tube further comprises at least one lumen, wherein the outlet port is operably connected to the at least one lumen.
37. The device of claim 1, further comprising a second adapted link comprising a proximal end, a distal end, and a connecting element, wherein said proximal end of the second adapted link is configured to attach the distal end of elongate tube, wherein the distal end of the second adapted link comprises a third mating surface configured to mate with the rotating link second mating surface.
38. The device of claim 37, wherein the first adapted link comprises a first geometry, wherein the second adapted link comprises a second geometry that is different than the first geometry.
39. The device of claim 38, wherein the first adapted link comprises one or more first holes configured in a first hole geometry, wherein the second adapted link comprises one or more second holes configured in a second hole geometry, wherein the second hole geometry is different than the first hole geometry.
40. The device of claim 1, wherein the first mating surface comprises a relatively concave geometry.
41. The device of claim 40, wherein the second mating surface comprises a relatively convex geometry.

42. The device of claim 1, wherein the first mating surface comprises a relatively convex geometry.

43. The device of claim 42, wherein the second mating surface comprises a relatively concave geometry.

44. The device of claim 1, wherein the first mating surface comprises a geometry associated with a first radius, wherein the second mating surface comprises a geometry associated with a second radius, wherein the first radius and the second radius are approximately equal.

45. The device of claim 1, wherein the first mating surface comprises a geometry associated with a first radius, wherein the second mating surface comprises a geometry associated with a second radius, wherein the second radius is one or more of the following:

larger than the first radius; and
smaller than the first radius.

46. The device of claim 1, wherein the first mating surface comprises one or more of the following geometries: spherical and ellipsoidal.

47. The device of claim 1, wherein the first mating surface comprises a cone-shaped geometry.

48. The device of claim 1, wherein the first mating surface comprises a single line of contact with the second mating surface.

49. The device of claim 1, wherein the first mating surface comprises a groove, wherein the second mating surface comprises a projection, wherein the groove is configured to slidably receive the projection.
50. The device of claim 49, wherein the rotation comprises motion along a single plane.
51. The device of claim 49, wherein the groove is non-linear.
52. The device of claim 49, wherein the projection is a pin.
53. The device of claim 1, wherein the rotating link defines an internal opening.
54. The device of claim 53, further comprising a tool mounted in the internal opening.
55. The device of claim 54, wherein the tool is appropriately sized to be placed securely in the internal opening.
56. The device of claim 1, further comprising a second rotating link comprising a third mating surface configured to rotatably interface with the first mating surface of the first adapted link.
57. The device of claim 56, wherein the first rotating link comprises a first geometry, wherein the second rotating link comprises a second geometry, wherein the first geometry is different than the second geometry.

58. The device of claim 56, wherein the first rotating link comprises one or more first tools, wherein the second adapted link comprises one or more second tools, wherein the first tools are different than the second tools.

59. The device of claim 1, wherein the second mating surface comprises a relatively concave geometry.

60. The device of claim 1, wherein the second mating surface comprises a relatively convex geometry.

61. The device of claim 1, wherein the rotating link is configured to rotate with a single degree of freedom.

62. The device of claim 61, further comprising a projection which is slidably received by a groove, said projection and groove causing a predetermined rotational pattern.

63. The device of claim 1, wherein the rotating link is configured to rotate with two degrees of freedom.

64. The device of claim 1, further comprising at least one steering cable configured to steer the device, wherein an end of the at least one steering cable is located proximal to the adapted link.

65. The device of claim 64, wherein the device is a catheter and the at least one steering cable is a pull wire terminated along the elongate tube and configured to deflect the distal end of the elongate tube.

66. The device of claim 64, wherein the device is a multi-linked device, and the at least one steering cable is a steering cable terminated at the adapted link and configured to steer the multi-linked device.

67. The device of claim 64, wherein the at least one cable is configured to transmit one or more of the following:

- electrical energy;
- data optical information;
- data;
- a liquid; and
- a gas.

68. The device of claim 1, further comprising a set of rotation cables that terminate at the rotating link.

69. The device of claim 68, wherein at least one cable of the set of rotation cables is configured to transmit one or more of the following:

- electrical energy;
- optical information;
- data;
- a liquid; and

a gas.

70. The device of claim 68, wherein at least one cable is configured to resist stretching.

71. The device of claim 70, wherein the cable is constructed from one or more of the following materials:

a braided material;

a metal filament; and

a fluorocarbon filament.

72. The device of claim 68, wherein at least one cable is configured to stretch.

73. The device of claim 72, wherein the cable is constructed of one or more of the following: a polymer; and a polymer blend monofilament.

74. The device of claim 68, wherein the at least one cable comprises:

a proximal end;

a distal end; and

a lumen therethrough.

75. The device of claim 74, wherein the lumen is configured to transport fluid or gas.

76. The device of claim 75, wherein the lumen is configured to transport a cryogenic agent configured to ablate tissue of a patient.

77. The device of claim 75, wherein the lumen is configured to transport a cooling fluid configured to prevent undesired tissue damage to the patient.

78. The device of claim 68, further comprising at least one steering cable configured to steer the device, wherein an end of at least one steering cable is located proximal to said adapted link.

79. The device of claim 78, wherein the at least one steering cable is terminated proximal to the adapted link.

80. The device of claim 79, wherein the device is a catheter device.

81. The device of claim 78, wherein the at least one steering cable is terminated at the adapted link.

82. The device of claim 78, wherein the first link and the intermediate links each comprise at least one hole configured to receive at least one steering cable.

83. The device of claim 82, wherein the first link, the intermediate links and the adapted link each comprise a set of holes configured to receive a set of rotating cables.

84. The device of claim 78, wherein the first link and the intermediate links each further comprise a set of holes, and wherein the at least one steering cable and at least one rotation cable pass through a common hole.

85. The device of claim 84, wherein the at least one steering cable or the at least one rotation cable further comprises a friction reducing surface.
86. The device of claim 68, wherein a first rotation cable is configured to generate motion in a first direction.
87. The device of claim 86, wherein a second rotation cable is configured to generate motion in a direction opposite the first direction.
88. The device of claim 68, wherein the first rotation cable is terminated at the rotating link at a first position, wherein the first position determines a range of rotation that is generated by retracting the first rotation cable.
89. The device of claim 88, wherein a second rotation cable is terminated at the rotating link at a second position, wherein the second position determines the range of rotation that is generated by retracting the second rotation cable.
90. The device of claim 89, wherein the first rotation cable is configured to traverse a first circumferential length of the rotating link and the second rotation cable is configured to traverse a second circumferential length of the rotating link, wherein the second circumferential length is longer than the first circumferential length, wherein the range of rotation generated by retracting the second rotation cable is greater than the range of rotation generated by retracting the first rotation cable.

91. The device of claim 68, wherein the adapted link further comprises a hole, wherein a first rotation cable from the set of rotation cables passes through the hole.

92. The device of claim 91, wherein the adapted link further comprises a central axis, wherein a magnitude of the range of rotation generated by retracting the first cable is related to a distance of the hole from the central axis.

93. The device of claim 92, wherein the range of rotation generated by retracting the first cable is inversely proportional to the distance of the hole from the central axis.

94. The device of claim 68, wherein at least one cable is terminated at the rotating link by one or more of the following:

- a knot,
- an adhesive ball,
- a splice on an end of a cable passed through a hole,
- a weld,
- an adhesive joint,
- a frictional engagement between the cable and a capture element; and
- a cable with a looped end fixedly attached to a hole.

95. The device of claim 68, wherein the adapted link further comprises a central axis, wherein at least one rotation cable is terminated such that the distal portion of said at least one rotation cable is relatively perpendicular to the adapted link central axis.

96. The device of claim 95, further comprising a bearing surface configured to slidingly deflect at least one rotation cable approximately ninety degrees.

97. The device of claim 68, wherein a first rotation cable is terminated at a first rotating link location, and a second rotation cable is terminated at a second rotating link location, wherein the first location and the second location avoid a singularity that prevents movement of the rotating link.

98. The device of claim 68, wherein a first rotation cable is terminated in a position causing rotation from a first rotating link orientation to a second rotating link orientation as the first rotation cable is retracted, wherein the first orientation is separated from the second orientation by no more than 90 degrees.

99. The device of claim 98, wherein a second rotation cable is terminated in a position causing rotation from the second orientation to the first orientation when the second rotation cable is retracted.

100. The device of claim 68, wherein a first rotation cable is terminated in a position causing rotation from a first rotating link orientation to a second rotating link orientation as said first rotation cable is retracted, wherein the first orientation is separated from said second orientation by no more than 180 degrees.

101. The device of claim 1, wherein the device is a multi-linked device that comprises at least one working channel.

102. The device of claim 101, wherein the device comprises at least two working channels, wherein the adapted link comprises a first quantity of working channels, wherein the rotating link comprises a second quantity of working channels, wherein the second quantity of working channels is less than the first quantity of working channels.

103. The device of claim 1, further comprising a tool.

104. The device of claim 103, wherein the tool comprises one or more of the following:

- a cutters;
- a grasper;
- a dissector;
- a biopsy mechanism;
- a sensing device;
- an EKG electrode;
- an energy delivery tool;
- a cryogenic tool;
- an RF tissue ablating tool;
- a drug delivery device;
- a recording device; and
- a camera.

105. The device of claim 104, wherein the tool is attached to the rotating link.

106. The device of claim 104, wherein the tool is configured to pass through the elongate tube.

107. The device of claim 106, wherein the tool is configured to pass through the rotating link.

108. The device of claim 1, further comprising an interface between the adapted link and the rotating link.

109. The device of claim 108, wherein the interface is configured to transfer to the rotating link one or more of the following:

one or more electrical signals;

one or more optical signals;

a fluid; and

a gas.

110. The device of claim 108, wherein the rotating link further comprises an electronic module, wherein the interface is configured to transmit energy to the electronic module.

111. The device of claim 110, wherein the electronic module is configured to store received energy.

112. The device of claim 111, wherein the electronic module is configured to receive energy intermittently during use of the device.

113. The device of claim 108, wherein the rotating link comprises a tool, wherein the interface is configured to supply power to the tool.

114. The device of claim 113, wherein the tool comprises one or more of the following:

- a cutters;
- a grasper;
- a dissector;
- a biopsy mechanism;
- a sensing device;
- an EKG electrode;
- an energy delivery tool;
- a cryogenic tool;
- an RF tissue ablating tool;
- a drug delivery device;
- a recording device; and
- a camera.

115. The device of claim 108, wherein the interface comprises a plurality of independent channels, wherein each channel is configured to transmit one or more of the following: power and data.

116. The device of claim 115, wherein:

- a first channel is configured to perform one or more of the following:

- transmit data, and

- receive data,

- wherein a second channel is configured to perform one or more of the following:

- transmit power, and

receive power.

117. The device of claim 1, wherein one or more of the adapted link and the rotating link further comprise an electronic module.

118. The device of claim 117, wherein the electronic module comprises one or more of the following:

- a digital to analog converter;
- an analog to digital converter;
- a microcontroller;
- a microprocessor;
- a multiplexer;
- a demultiplexer;
- switching circuitry;
- MEMS circuitry; and
- memory circuitry.

119. The device of claim 1, wherein the elongate tube comprises a cross-section comprising

one or more of the following:

- a non-uniform major axis;
- a non-uniform minor axis;
- a uniform major axis; and
- a uniform minor axis.

120. A method of performing a procedure comprising:
selecting a device of any of claims 1 thru 119; and
rotating a rotating link of the device.
121. The method of claim 120, wherein the rotating comprises rotating the rotating link approximately 90 degrees.
122. The method of claim 121, wherein the rotating comprises:
rotating the rotating link approximately 90 degrees; and
advancing a tool relatively orthogonal to a tissue surface of a patient.
123. The method of claim 122, wherein the procedure is a transoral robotic surgery procedure.
124. The method of claim 120, wherein the rotating actuates a tool.
125. The method of claim 124, wherein the tool is configured to attach to the rotating link.
126. The method of claim 124, wherein actuating a tool comprises actuating a surgical tool.
127. The method of claim 120, further comprising locking two or more links of a multi-link device prior to performing the rotation.

128. The method of claim 120, wherein the procedure comprises a blunt dissection procedure.
129. The method of claim 128, wherein rotating comprises rotating the rotating link in a reciprocating lateral motion.
130. The method of claim 120, wherein the procedure is a medical procedure comprising one or more of the following:
- surgery;
 - minimally invasive surgery;
 - a robotic procedure;
 - an interventional procedure; and
 - an endoscopic procedure.
131. The method of claim 120, wherein the procedure is performed by a clinician.
132. A steerable multi-linked device, comprising:
- a first link;
 - a plurality of intermediate links, wherein a first one of the intermediate links is movably coupled to the first link;
 - an adapted link movably coupled to one of said intermediate links at a first end and having a concave surface at a second end; and
 - a spherical link fitted in the concave surface of the adapted link.

133. The device of claim 132, wherein a first set of cables for steering said multi-linked device are terminated at the adapted link.

134. The device of claim 133, wherein a second set of cables are terminated at the spherical link.

135. The device of claim 134, wherein the first set of cables pass through a first set of holes in each of the first link and the plurality of intermediate links.

136. The device of claim 135, wherein the second set of cables pass through a second set of holes in each of the first link, the plurality of intermediate links, and the adapted link.

137. The device of claim 134, wherein the first and second set of cables pass through a common set of holes.

138. The device of claim 132, wherein the spherical link defines an internal opening.

139. The device of claim 138, wherein a device is mounted in the internal opening.

140. The device of claim 139, wherein the device is appropriately sized to be placed securely in the internal opening.

141. A steerable multi-linked device, comprising:
a first multi-linked mechanism; and
a second multi-linked mechanism comprising:

a first link,
a plurality of intermediate links, wherein a first one of the intermediate links is movably coupled to the first link,
an adapted link movably coupled to one of the intermediate links at a first end and having a concave surface at the second end, and
a spherical link fitted in the concave surface of the adapted link.

142. The device of claim 141, wherein a first set of cables for steering the multi-linked device are terminated at the adapted link.

143. The device of claim 142, wherein a second set of cables are terminated at the spherical link.

144. The device of claim 143, wherein said first set of cables pass through a first set of holes in each of the first link and the plurality of intermediate links.

145. The device of claim 144, wherein the second set of cables pass through a second set of holes in each of said first link, the plurality of intermediate links, and the adapted link.

146. The device of claim 143, wherein the first and second set of cables pass through a common set of holes.

1/35

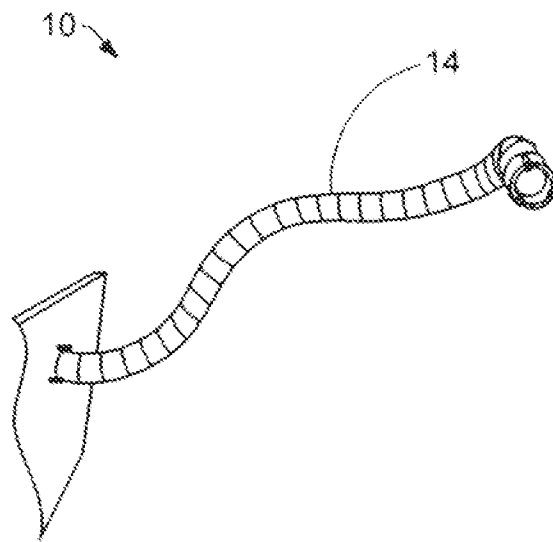


FIG. 1A

2/35

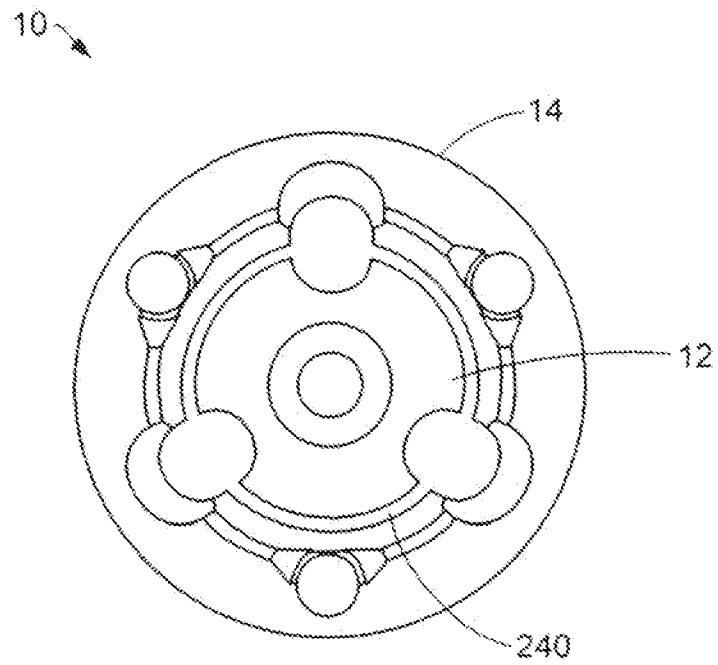


FIG. 1B

3/35

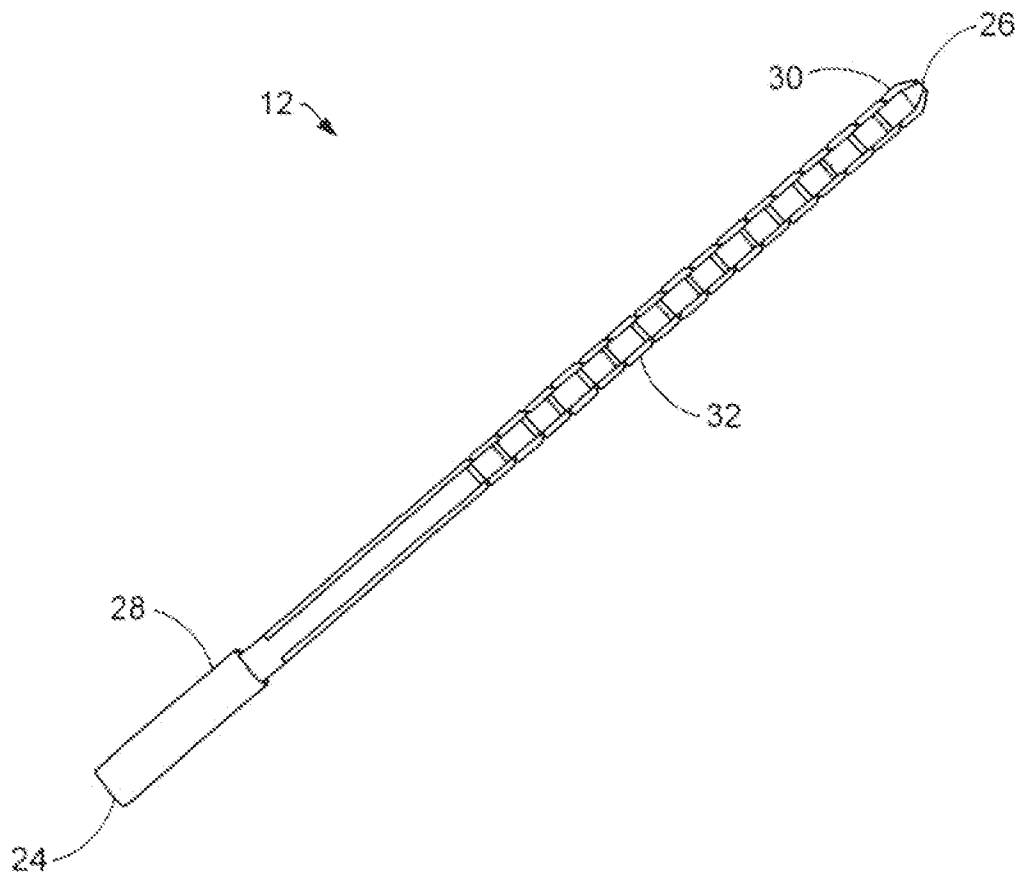


FIG. 2

4/35

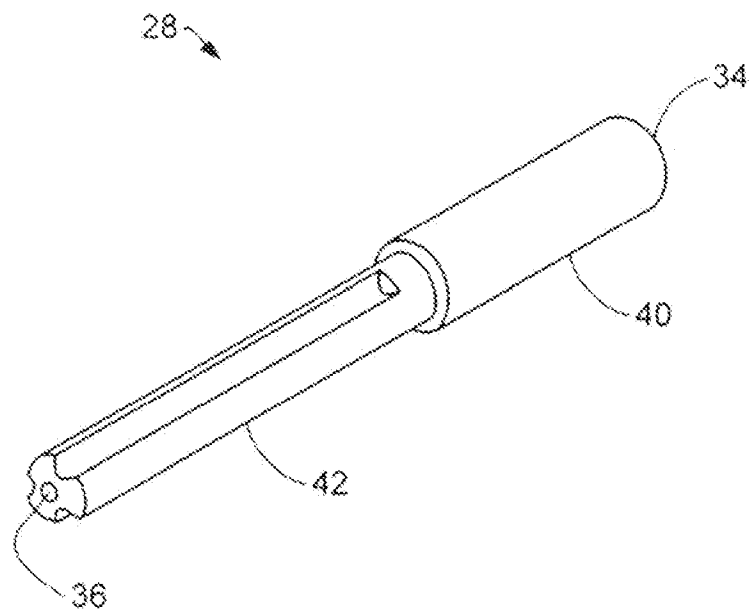


FIG. 3A

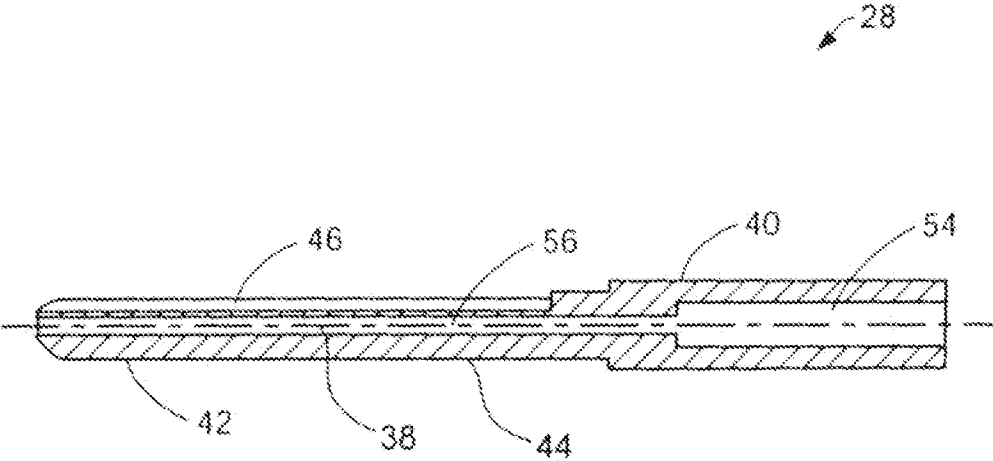


FIG. 3B

6/35

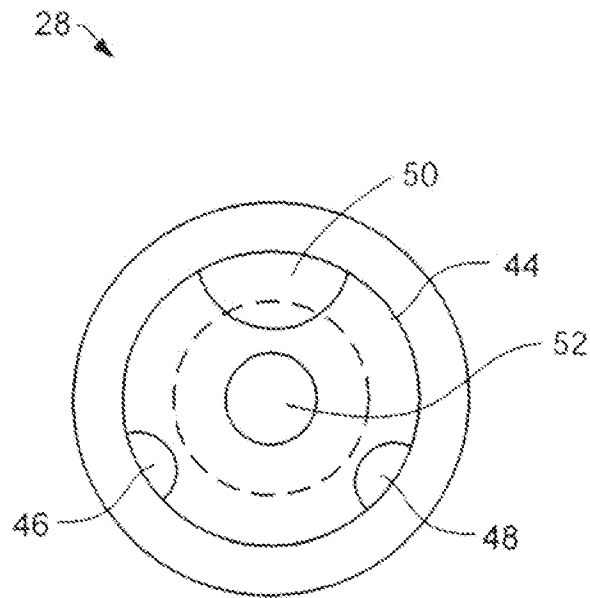


FIG. 3C

7/35

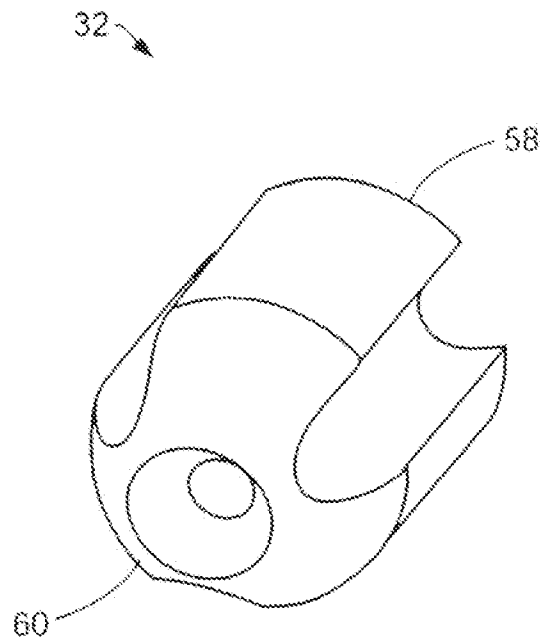


FIG. 4A

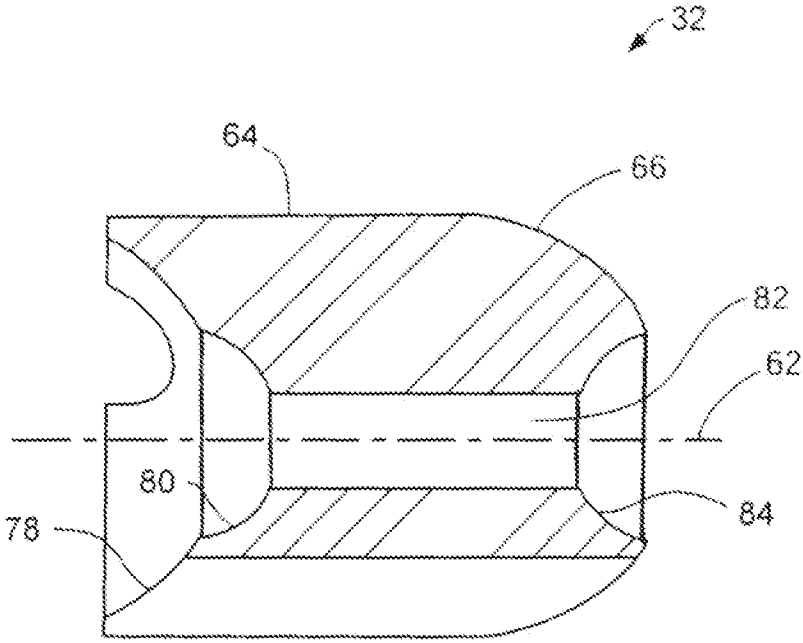


FIG. 4B

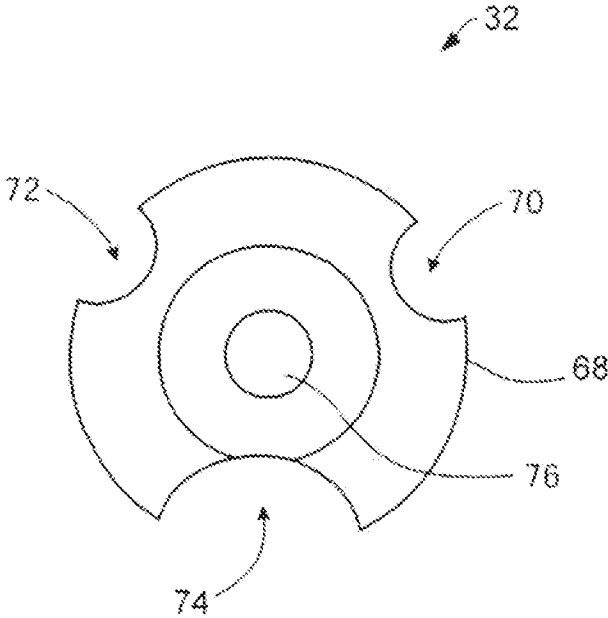


FIG. 4C

10/35

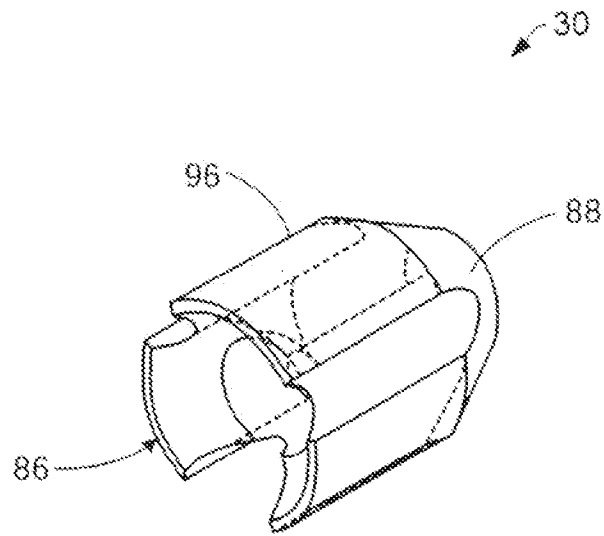


FIG. 5A

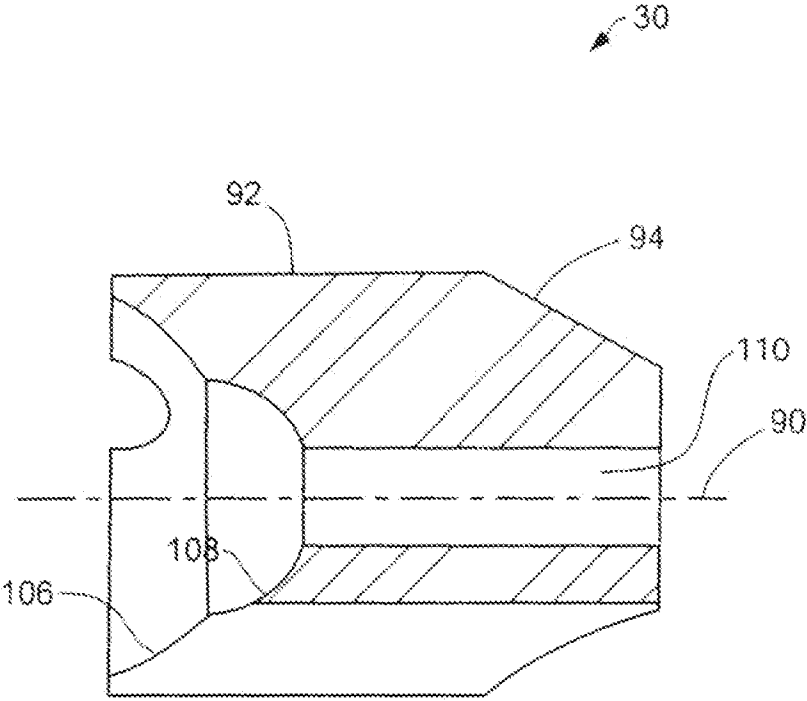


FIG. 5B

12/35

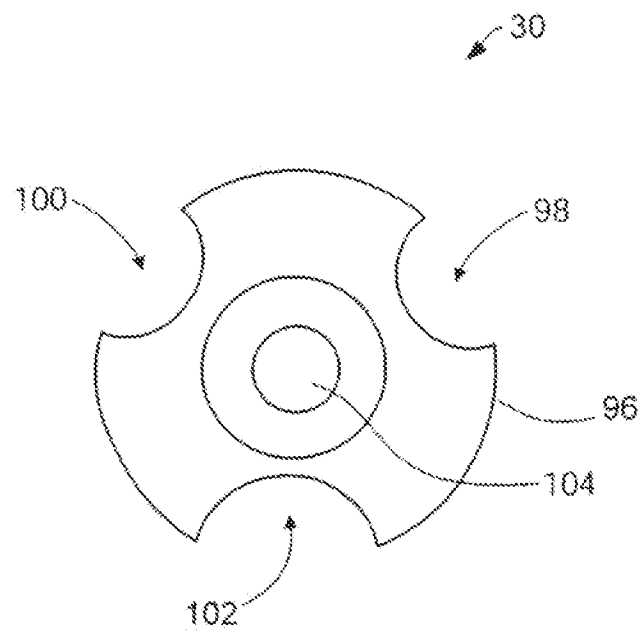


FIG. 5C

13/35

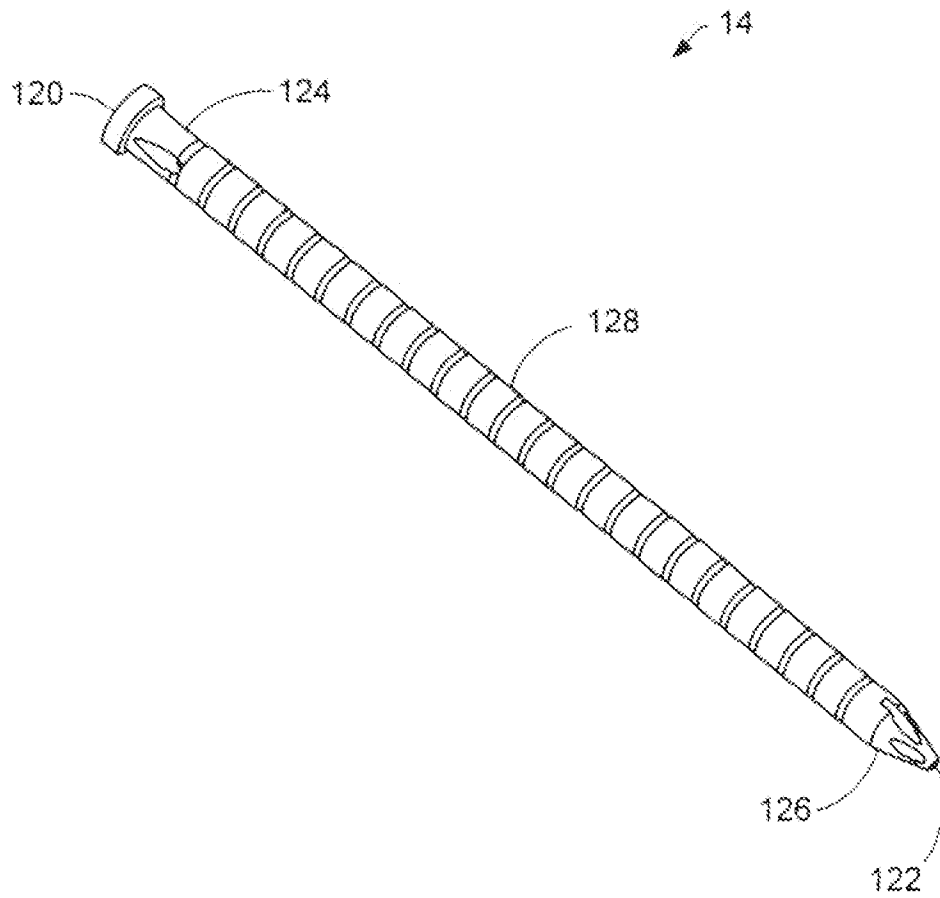


FIG. 6

14/35

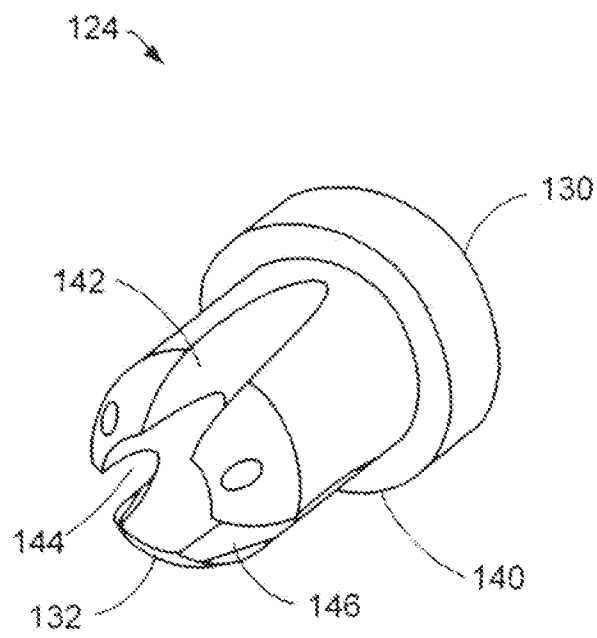


FIG. 7A

15/35

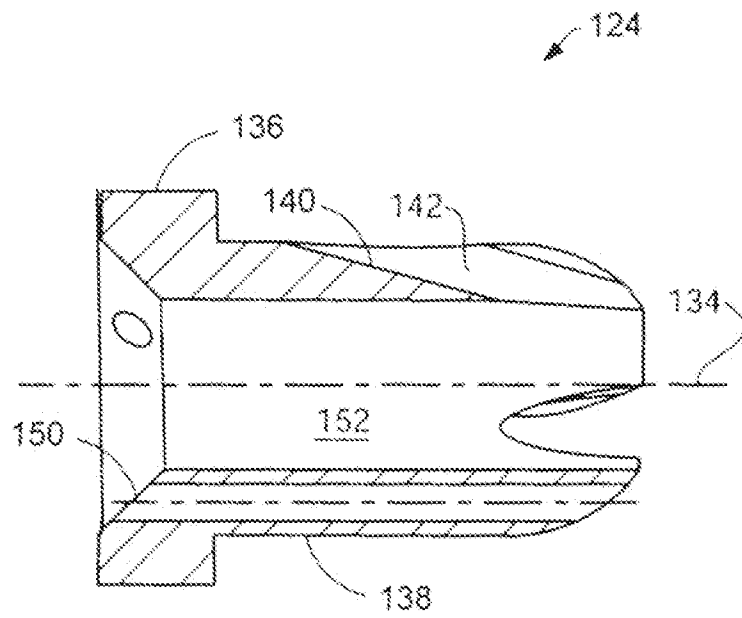


FIG. 7B

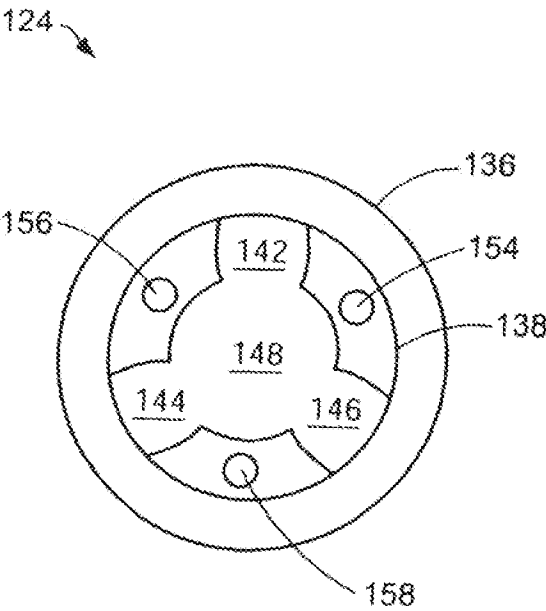


FIG. 7C

17/35

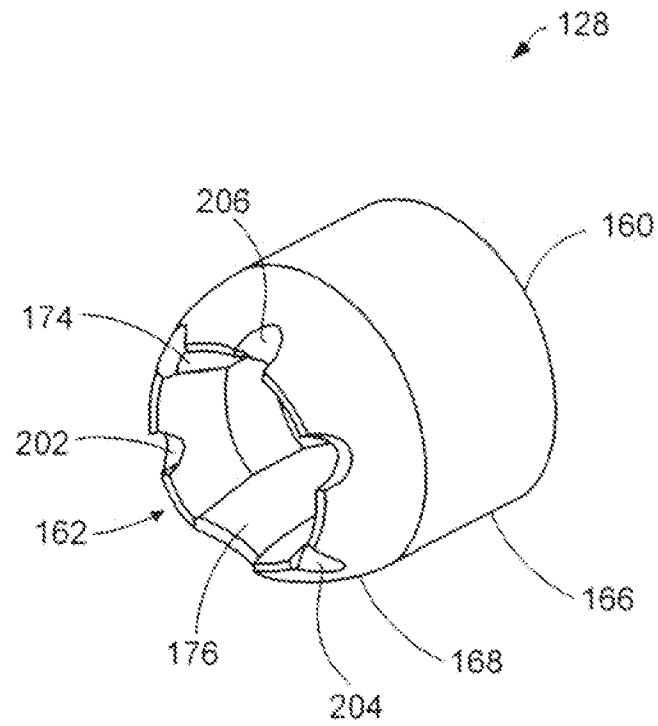


FIG. 8A

18/35

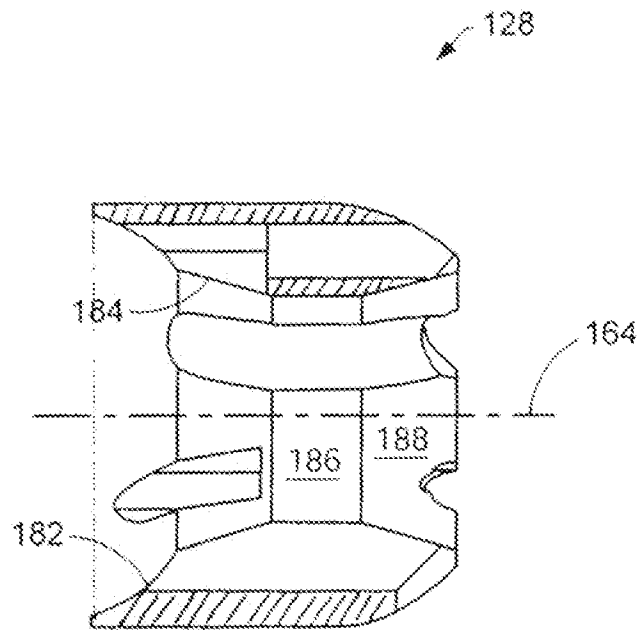


FIG. 8B

19/35

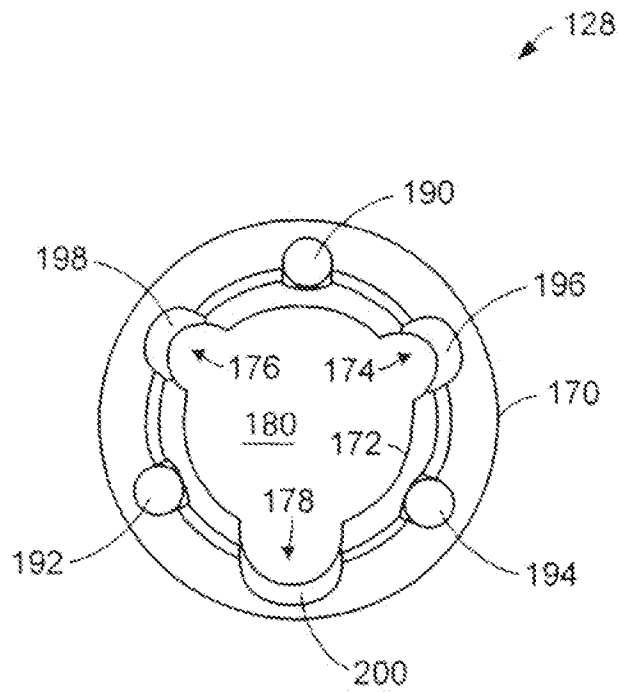


FIG. 8C

20/35

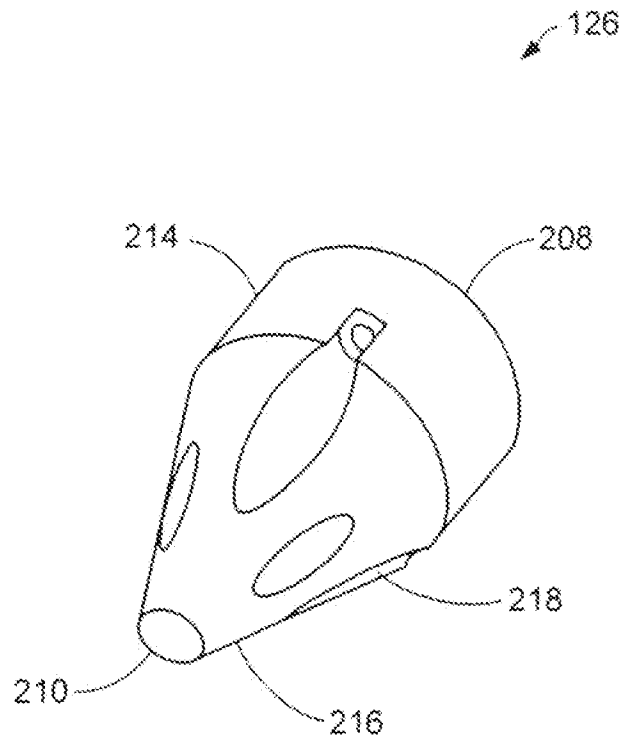


FIG. 9A

21/35

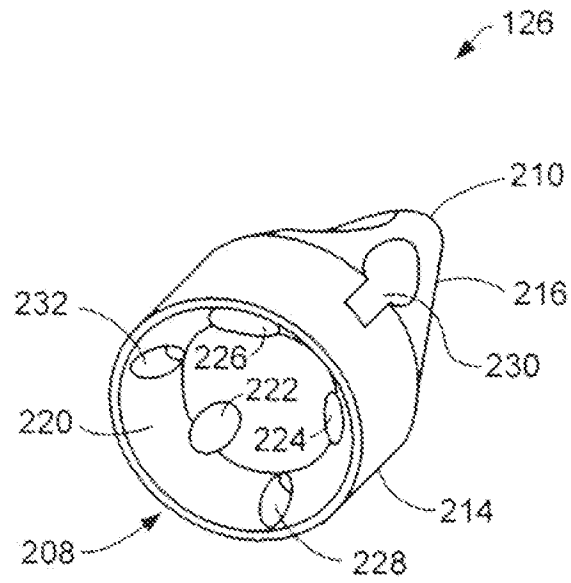


FIG. 9B

22/35

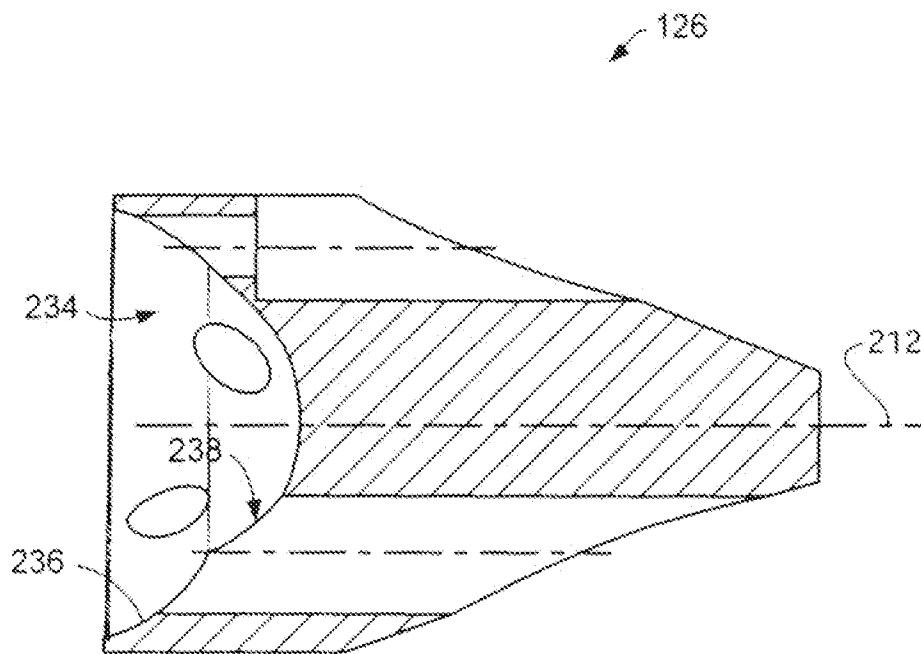


FIG. 9C

23/35

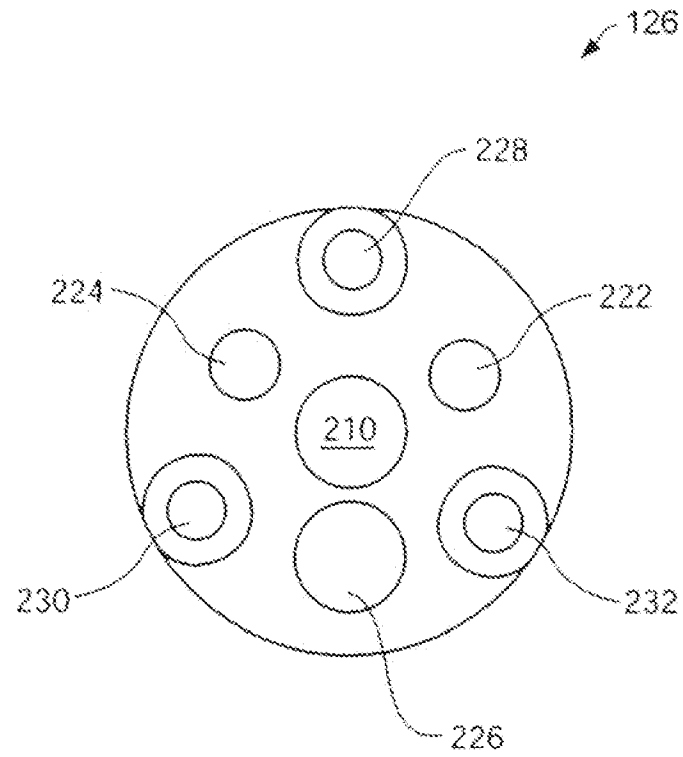


FIG. 9D

24/35

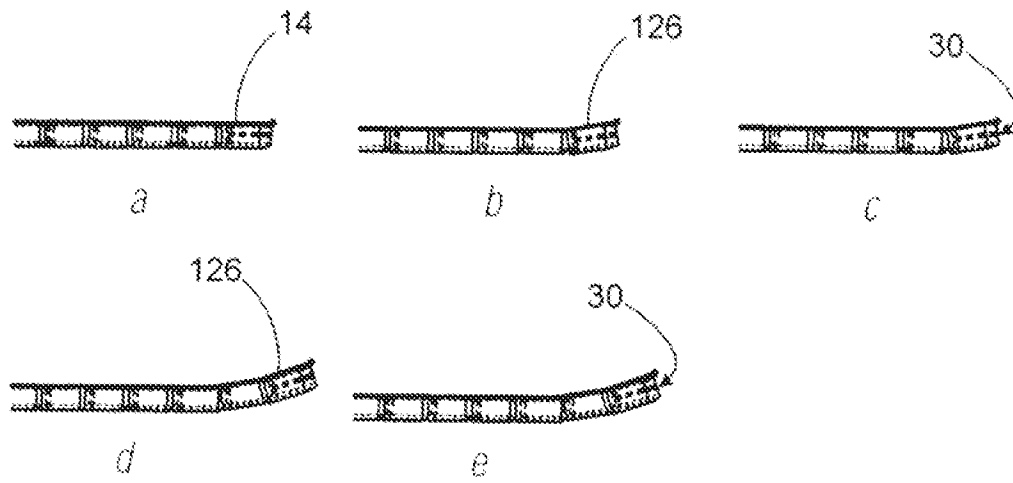


FIG. 10

25/35

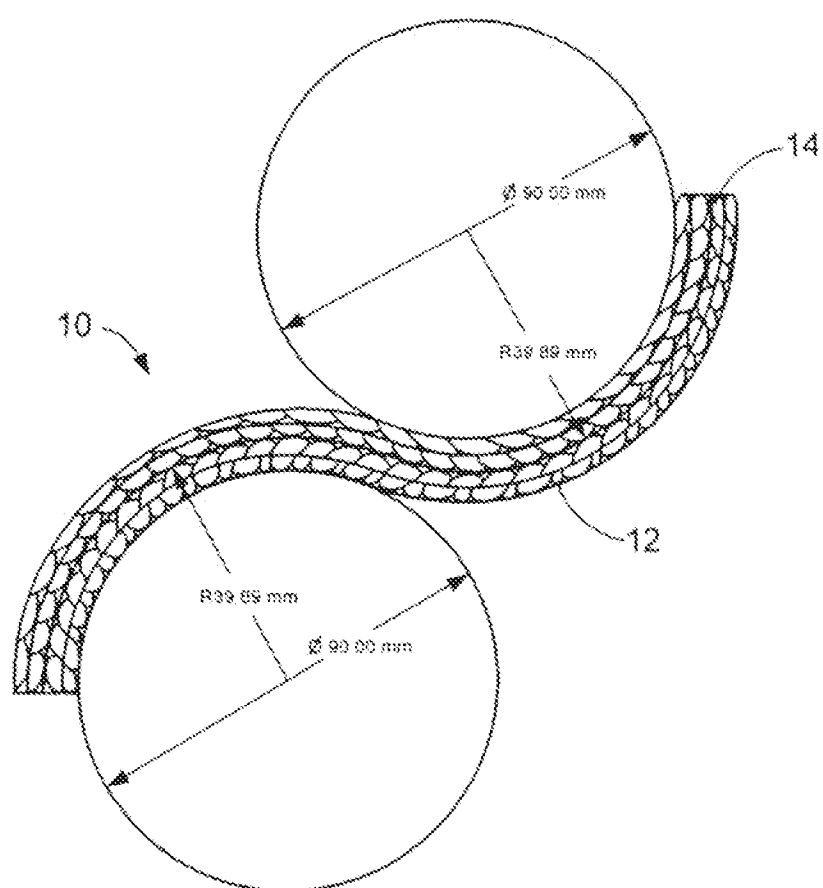


FIG. 11

26/35

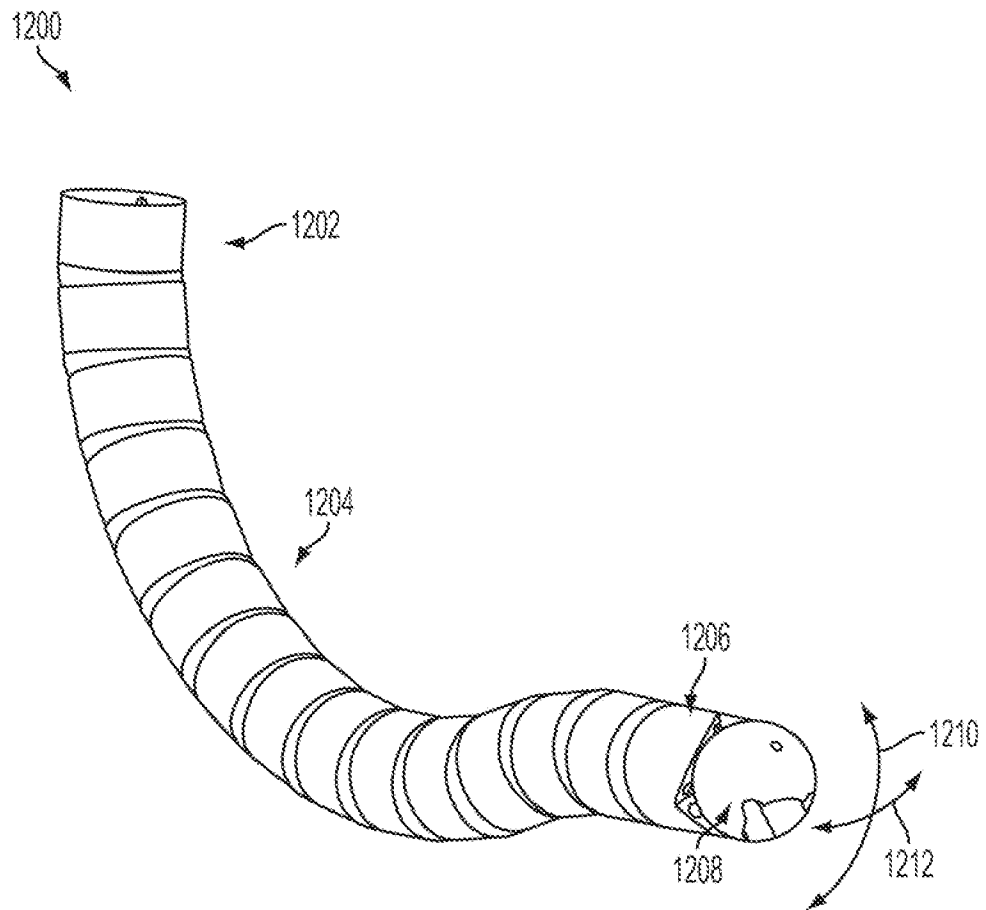


FIG. 12

27/35

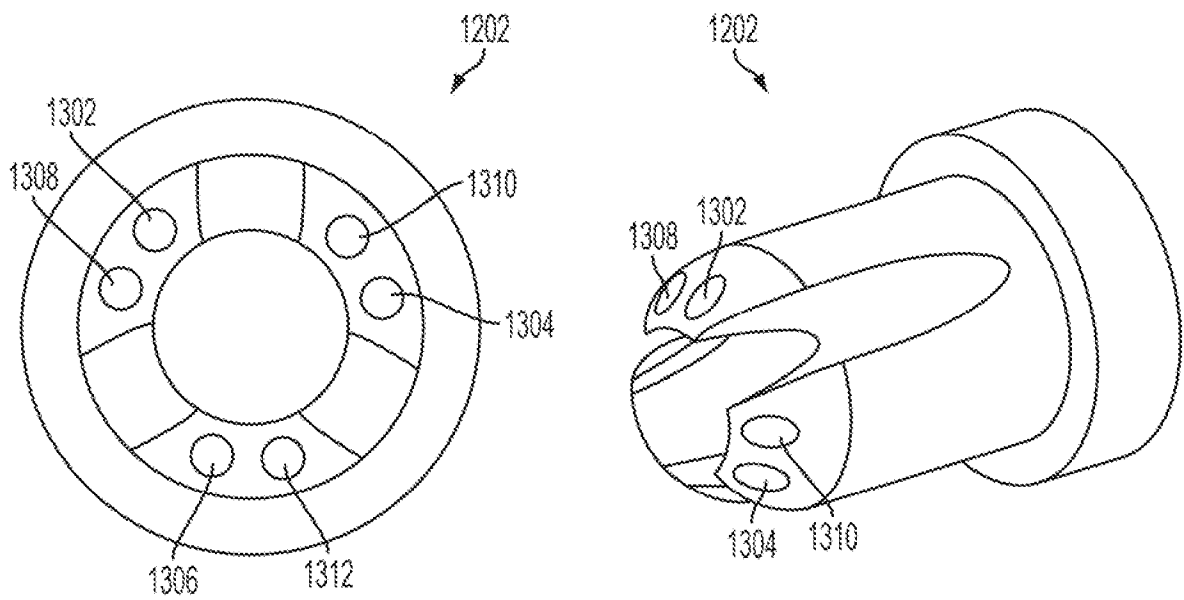


FIG. 13A

28/35

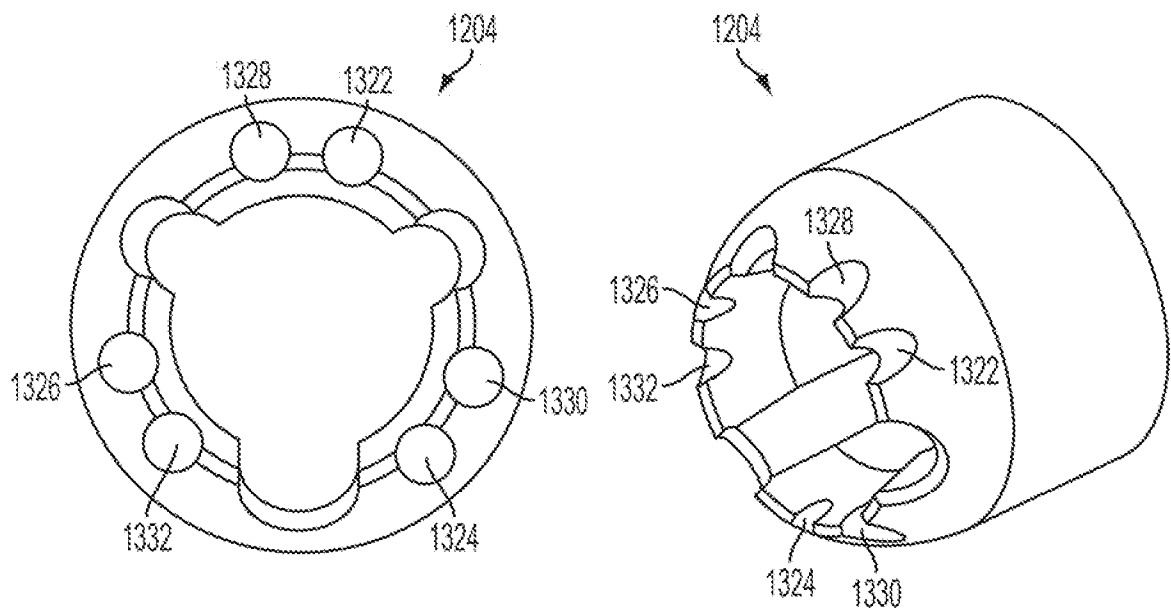


FIG. 13B

29/35

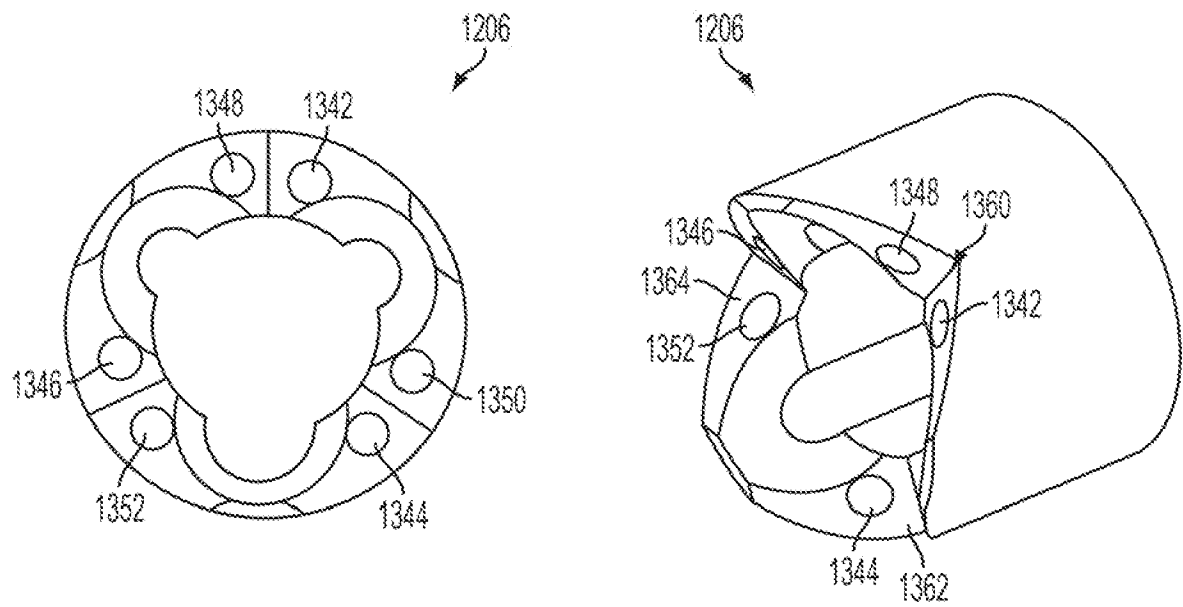


FIG. 13C

30/35

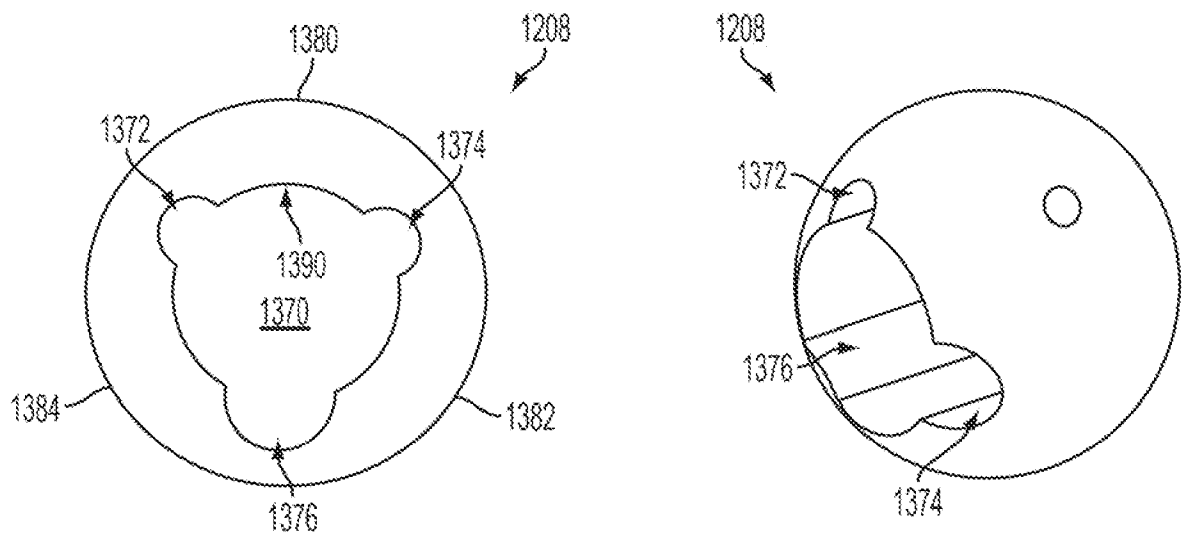


FIG. 13D

31/35





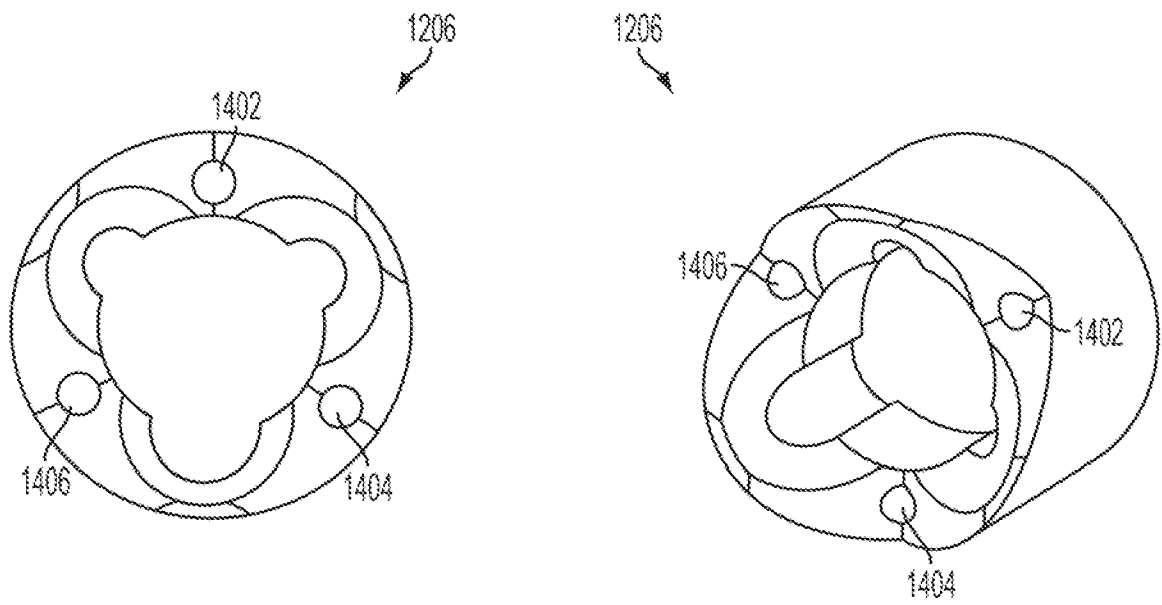


FIG. 14

32/35

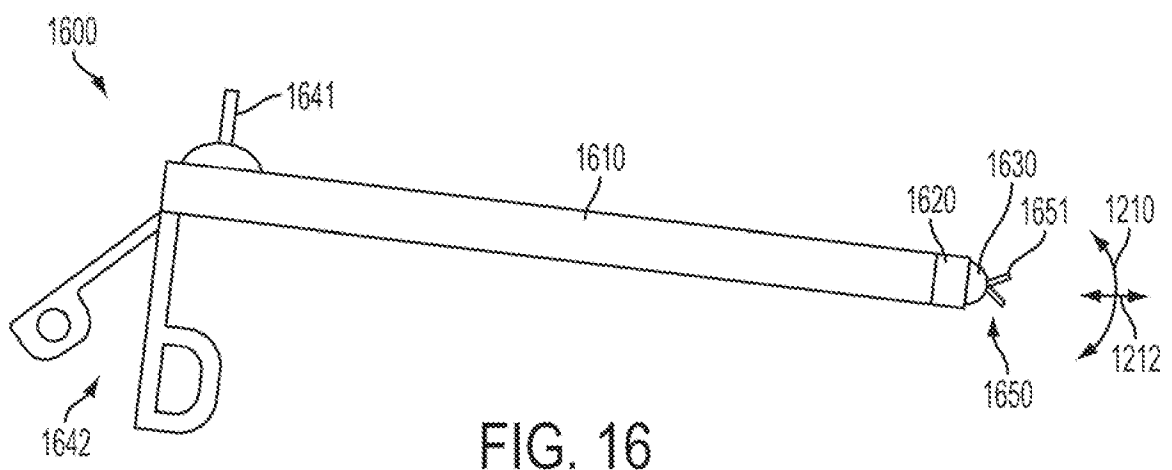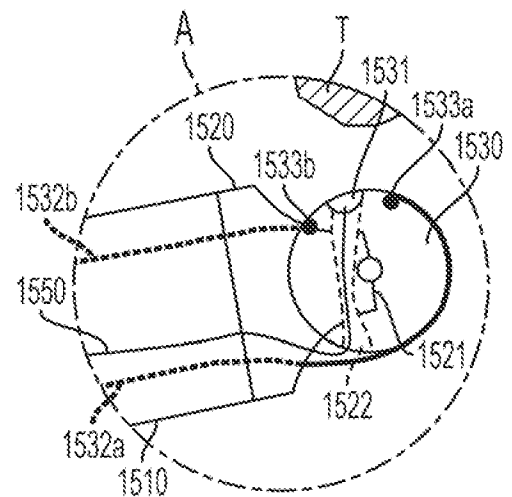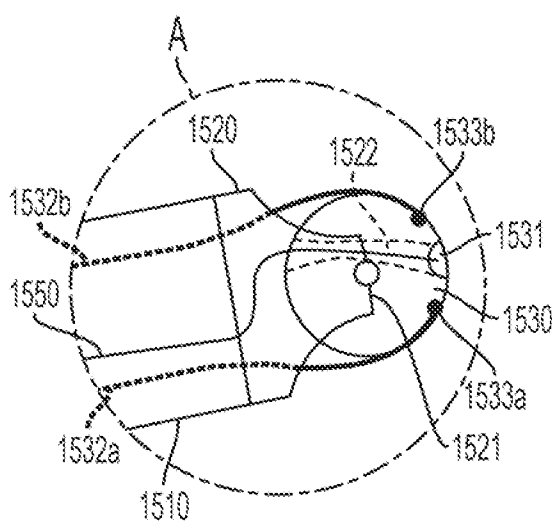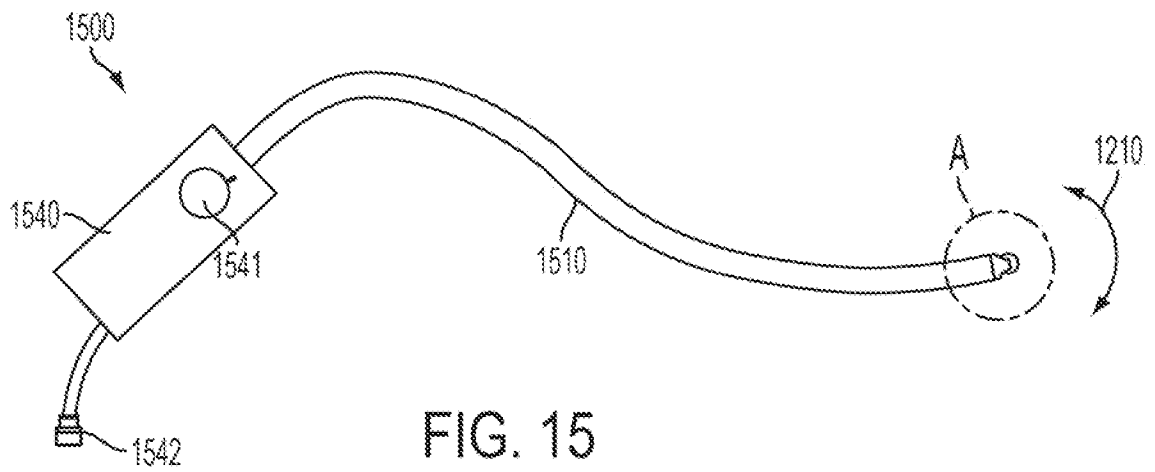

33/35

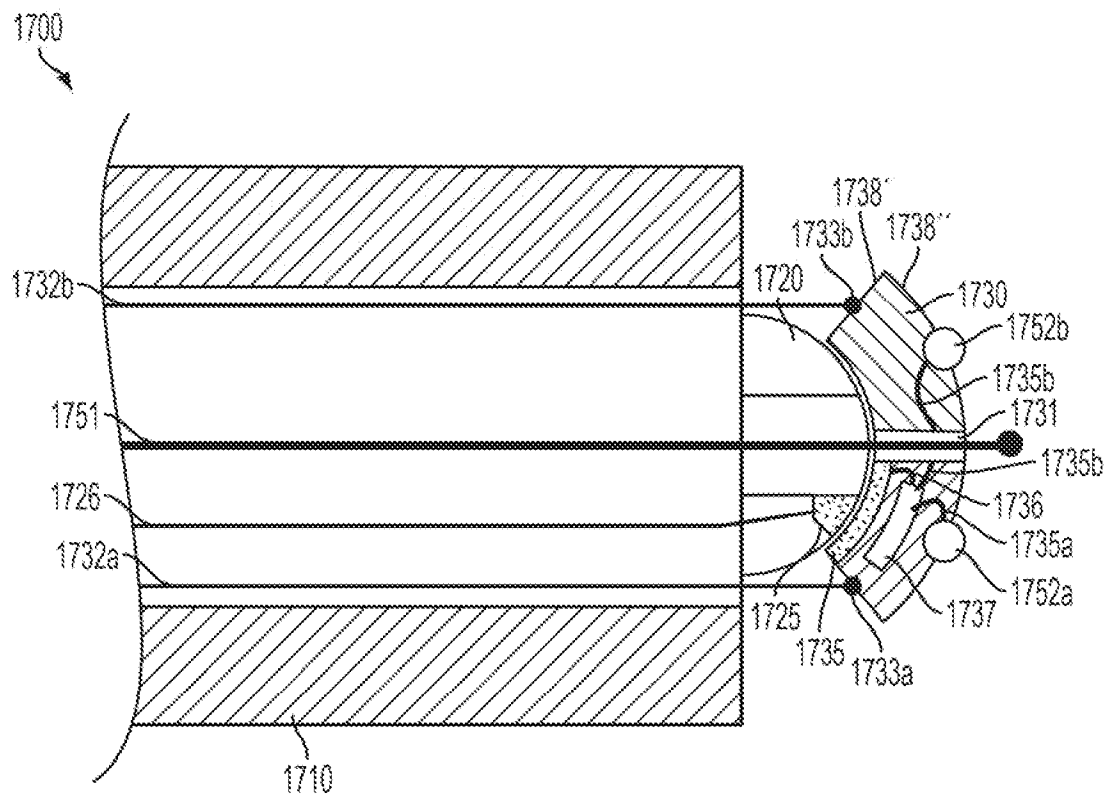


FIG. 17


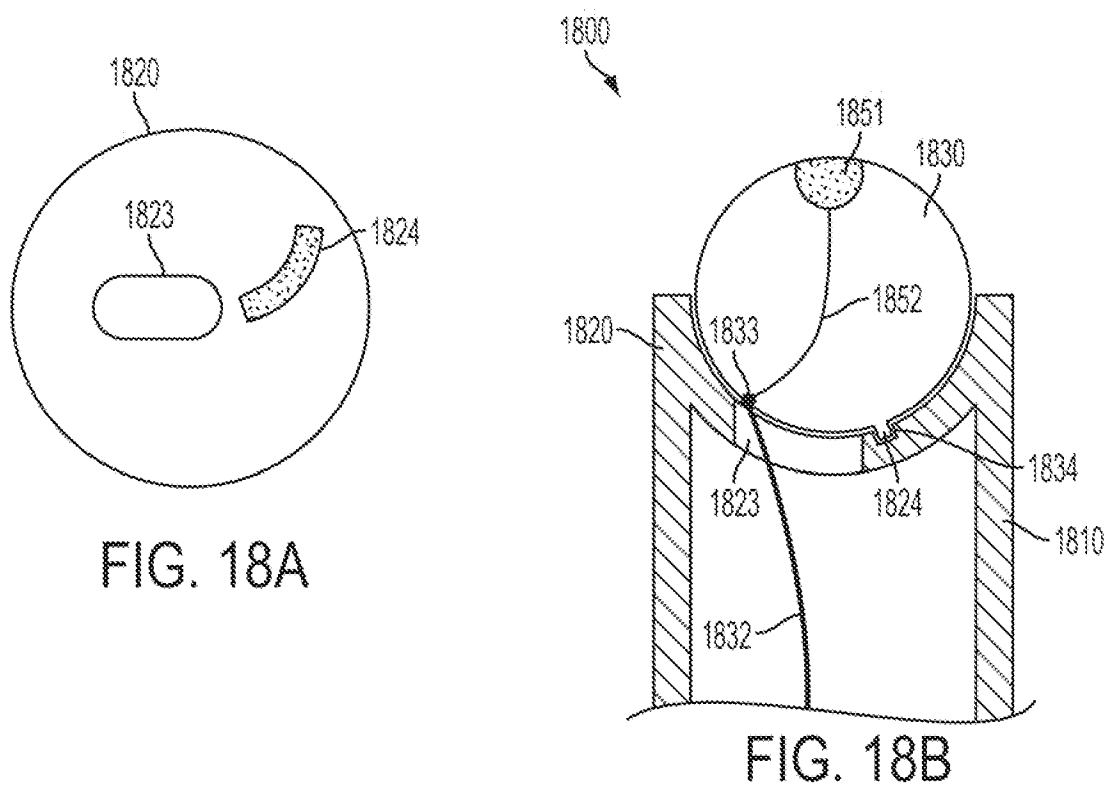


FIG. 18A

FIG. 18B

34/35

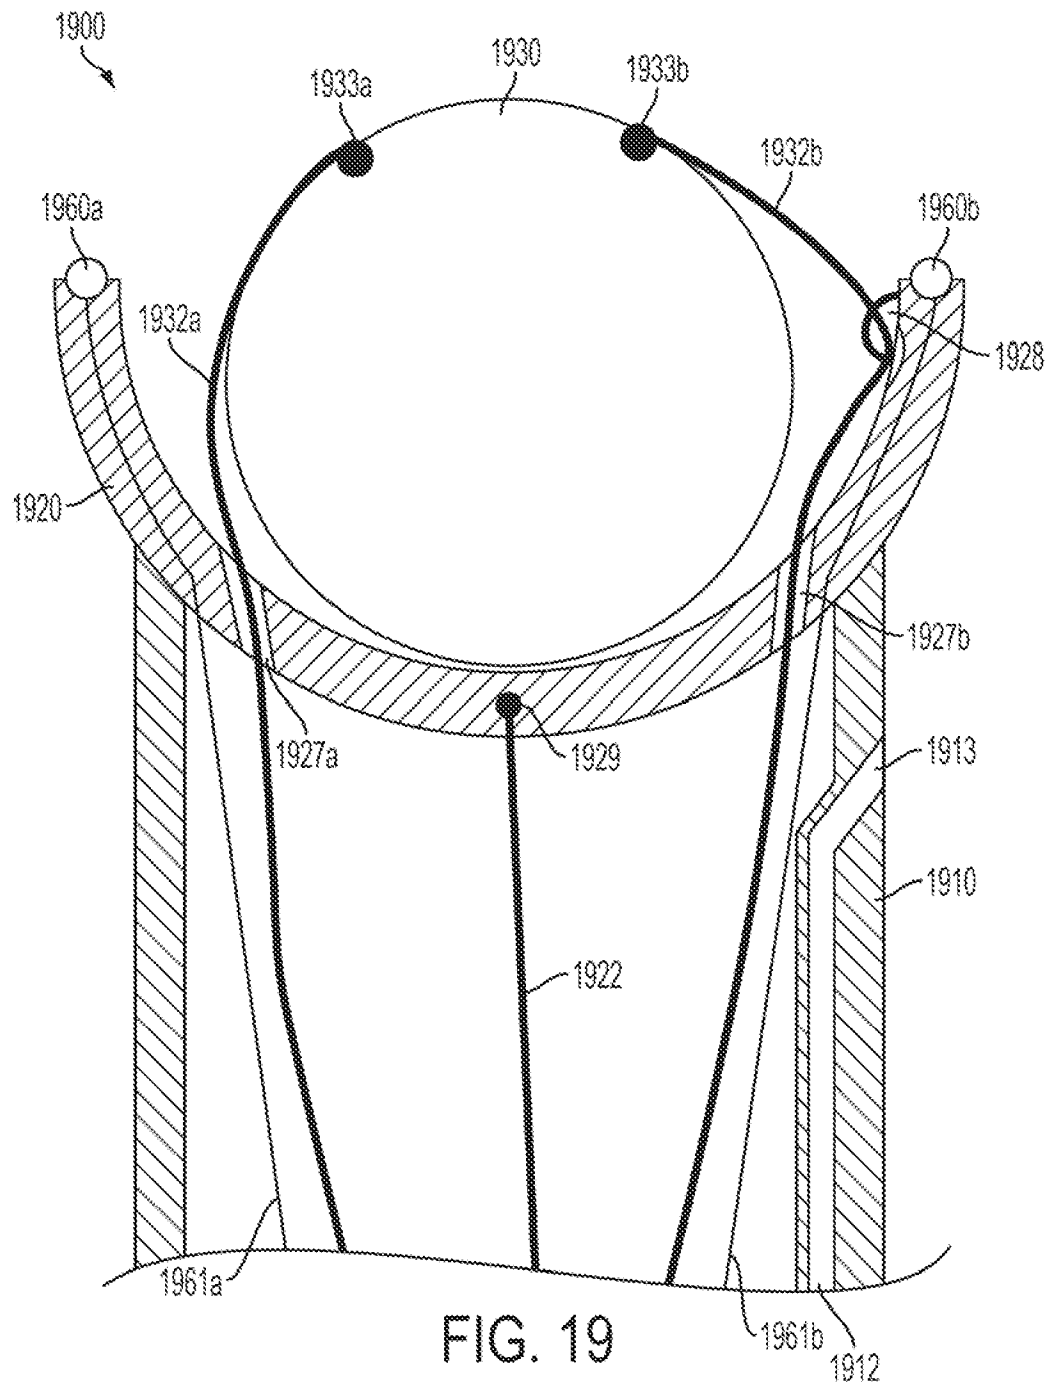

35/35

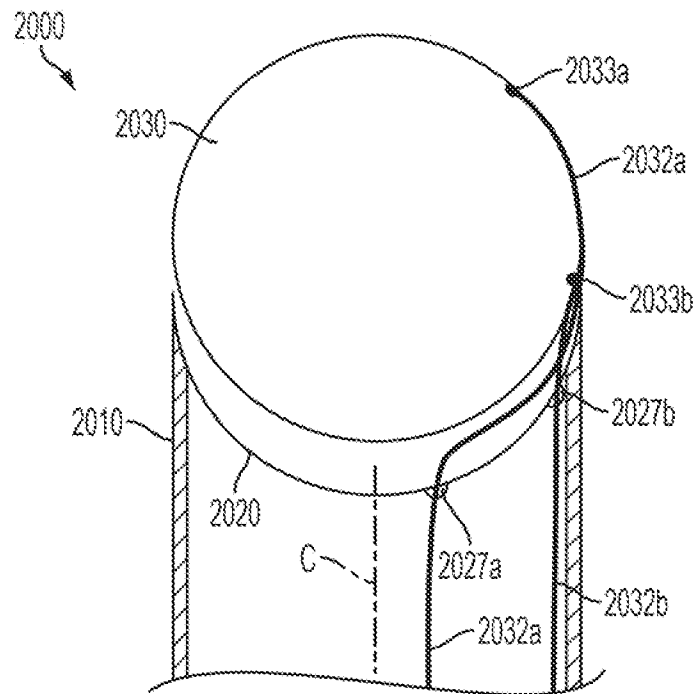


FIG. 20

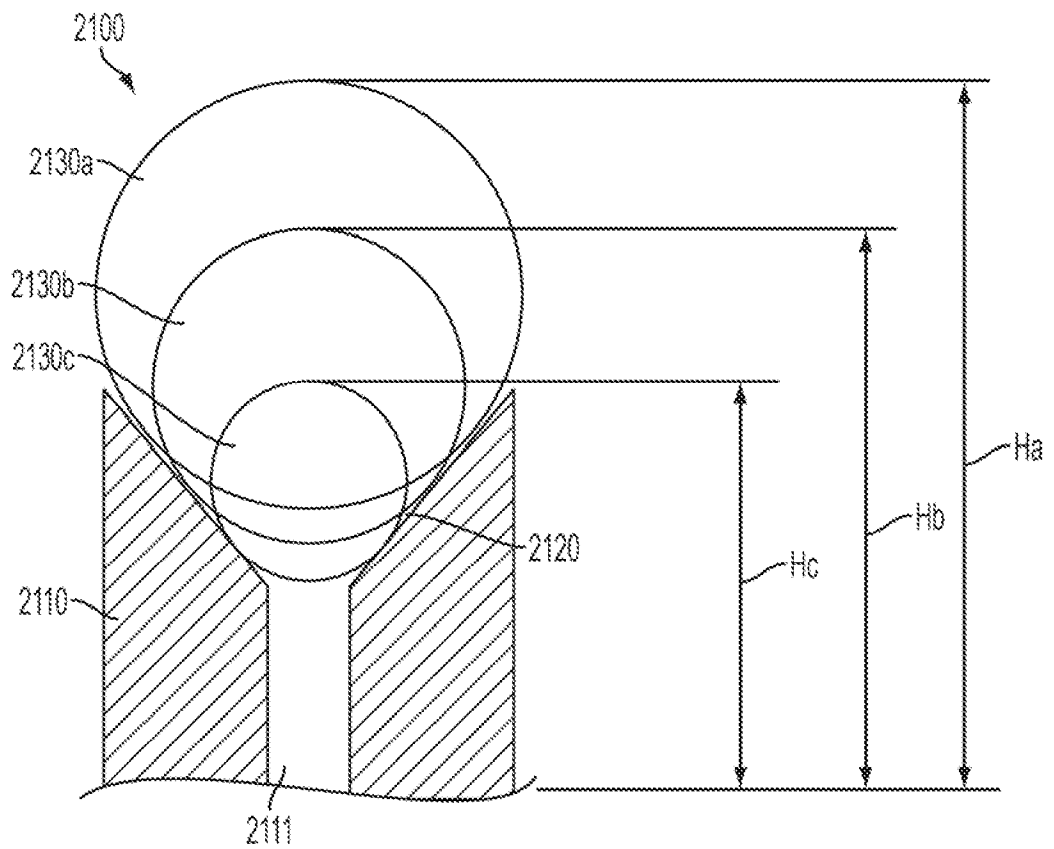


FIG. 21

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 09/56238

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61B 1/00 (2009.01)

USPC - 600/101

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8): A61B 1/00 (2009.01)

USPC: 600/101

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

USPC: 600/37, 101-102, 114, 126, 201, 204, 219, 231-232, 234-235; 414/431, 746.7; 294/106; 227/19, 175.1, 176.1, 180.1; 606/119, FOR103; 348/65; 359/362, 385, 431, 831; 403/43, 60, 78-79, 301; 745/86 (view text search terms below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST (DB=PGPB,USPT,USOC,EPAB,JPAB; PLUR=YES; OP=ADJ), Google. Search terms: cannula, catheter, laparoscope, endoscope, rotate, swivel, pivot, tip, head, lateral, tension, lock, tube, proximal, distal, link, joiner, connection, attachment, coupling, element, mating, mate, couple, pairing, surface, end, face, exterior, actuate, operate...

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X ----- Y	US 2005/0051631 A1 (DEJIMA et al.) 28 February 2008 (28.02.2008) entire document, especially Abstract; Figs. 7A-7B, 18-20, 22-26, 28-31, 71-72; Para [0005], [0139], [0152], [0167]-[0169], [0201]-[0212], [0228], [0230]-[0231], [0242], [0270], [0303], [0308], [0311]	1-3, 6-28, 31-39, 53-58, 63-68, 74-75, 78-93, 95-117, 119 ----- 4-5, 29-30, 40-52, 59-62, 69-73, 76-77, 94, 118, 132-146
Y	US 2008/0091170 A1 (VARGAS et al.) 17 April 2008 (17.04.2008) entire document, especially Abstract; Figs. 1-2D, 4A-4B, 6, 9, 13A-13C, 21; Para [0050]-[0051], [0054], [0060]-[0061], [0063]-[0068], [0070], [0081], [0094], [0096]	4-5, 29-30, 40-52, 59-62, 69, 72-73, 132-146
Y	US 2007/0015965 A1 (COX et al.) 18 January 2007 (18.01.2007) entire document, especially Abstract; para [0071], [0084]	70-71, 94
Y	US 2008/0097471 A1 (ADAMS et al.) 24 April 2008 (24.04.2008) entire document, especially Abstract; para [0085]-[0096], [0144], [0178]	76, 118
Y	US 2008/0065098 A1 (LARKIN) 13 March 2008 (13.03.2008) entire document, especially Abstract; para [0235]-[0237]	77

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 October 2009 (27.10.2009)

Date of mailing of the international search report

05 NOV 2009

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 09/56238

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claims Nos.: 120-131
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.