




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>5</sup> :</b>  <b>G11B 5/02, 5/596, 5/265</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 91/13433</b>  <b>(43) International Publication Date:</b> 5 September 1991 (05.09.91)
<b>(21) International Application Number:</b> PCT/US91/01243 <b>(22) International Filing Date:</b> 25 February 1991 (25.02.91)  <b>(30) Priority data:</b> 485,060                      26 February 1990 (26.02.90)    US  <b>(71)(72) Applicants and Inventors:</b> BEHR, Michael, I. [US/US]; 395 South Oakland, Pasadena, CA 91001 (US). BUMB, Frank, C., Jr. [US/US]; 740 S. Orange Grove, #8, Pasaden- a, CA 91105 (US).  <b>(74) Agent:</b> ROTH, W., Norman; Roth & Goldman, 523 West Sixth Street, Suite 840, Los Angeles, CA 90014 (US).		<b>(81) Designated States:</b> AT (European patent), BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), NL (European patent), NO, SE (European patent).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** SYSTEMS USING SUPERIMPOSED, ORTHOGONAL BURIED SERVO SIGNALS

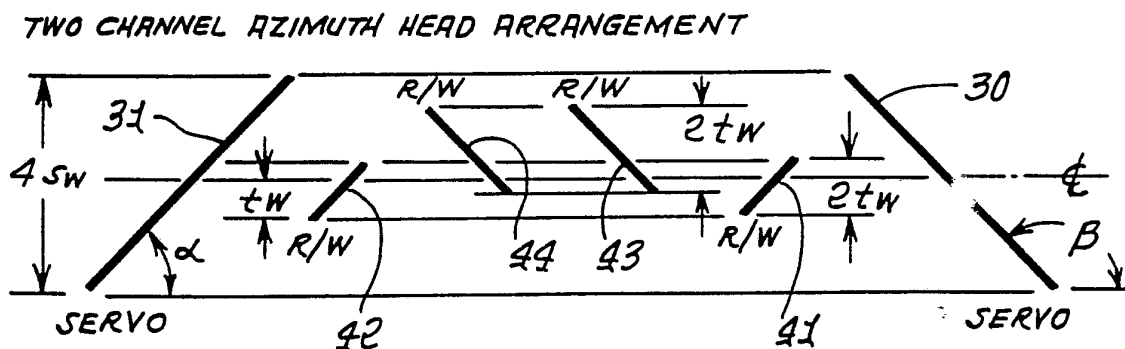

**(57) Abstract**

A track means (10) defined by magnetic recording media (11) on a substrate (12), the media along the track means having two levels, one for recording of data (17), and the other for recording of servo information (16), wherein recorded magnetic transitions at the second level define the servo information, the transitions arrayed along the track means as groups of converging lines (24, 28) which extend in crosswise or spanwise relation to multiple tracks. The data is recorded without any wasted magnetic space between tracks (zero guardband) using alternating angles (azimuthal) of magnetic orientation so that they do not interfere with each other when read. The read head cores or gaps (41-44) may be "oriented" to read recorded data transitions extending at different angles relative to track length direction.

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

<b>AT</b>	Austria	<b>ES</b>	Spain	<b>MG</b>	Madagascar
<b>AU</b>	Australia	<b>FI</b>	Finland	<b>ML</b>	Mali
<b>BB</b>	Barbados	<b>FR</b>	France	<b>MN</b>	Mongolia
<b>BE</b>	Belgium	<b>GA</b>	Gabon	<b>MR</b>	Mauritania
<b>BF</b>	Burkina Faso	<b>GB</b>	United Kingdom	<b>MW</b>	Malawi
<b>BG</b>	Bulgaria	<b>GN</b>	Guinea	<b>NL</b>	Netherlands
<b>BJ</b>	Benin	<b>GR</b>	Greece	<b>NO</b>	Norway
<b>BR</b>	Brazil	<b>HU</b>	Hungary	<b>PL</b>	Poland
<b>CA</b>	Canada	<b>IT</b>	Italy	<b>RO</b>	Romania
<b>CF</b>	Central African Republic	<b>JP</b>	Japan	<b>SD</b>	Sudan
<b>CG</b>	Congo	<b>KP</b>	Democratic People's Republic of Korea	<b>SE</b>	Sweden
<b>CH</b>	Switzerland	<b>KR</b>	Republic of Korea	<b>SN</b>	Senegal
<b>CI</b>	Côte d'Ivoire	<b>LI</b>	Liechtenstein	<b>SU</b>	Soviet Union
<b>CM</b>	Cameroon	<b>LK</b>	Sri Lanka	<b>TD</b>	Chad
<b>CS</b>	Czechoslovakia	<b>LU</b>	Luxembourg	<b>TG</b>	Togo
<b>DE</b>	Germany	<b>MC</b>	Monaco	<b>US</b>	United States of America
<b>DK</b>	Denmark				

SYSTEMS USING SUPERIMPOSED, ORTHOGONAL BURIED SERVO SIGNALS5 Technical Field

The present invention generally relates to increasing the data storage capacity of systems using magnetic media by increasing the ability to record and reproduce more tracks in the same area of recording media; i.e., the recording and reproducing of data tracks at very high track densities.

The invention specifically relates to the generation of reference location data (indicia) on or in magnetic recording media by the generation of configurations of such reference data at buried locations in such media, to enable accurate lateral positioning control of a read and/or write head relative to which the media travels longitudinally, to the extent that more information data can then be provided (magnetically recorded) on the media.

There has been a consistent increase in data storage densities of other devices using magnetic media such as floppy discs and Winchester discs. The density of data storage on Winchester disc drives and helical scan tape drives has increased much faster than areal densities of conventional longitudinal recorders, i.e., tape.

The density of data storage capability on longitudinal tape recorders and floppy discs has increased more slowly than on Winchester and helical scan devices, particularly as to increasing the number of data tracks per inch recorded/reproduced, i.e., the lateral storage density. Some reasons for this are: Winchesters use various servo locating reference modalities to accurately locate the data record/reproduce (or write/read) head over the track when it is recorded or reproduced. Helical scan

recorders guide tape carefully on "fences" or leads around a cylindrical drum, and use servo schemes to position the head over the relocated data track, when reading data.

Longitudinal recorders employing one quarter inch  
5 data cartridge drives have generally used less accurate head reference or locating schemes. They have depended on holding "open loop" tolerance accumulations to tape, guides and head track variations to position the write head approximately on or at a required physical location. In  
10 the read mode, most conventional tape drives use the same approach of "open loop" positioning (no servo feedback) to position the read head. This requires that space be left between the tracks to allow for these tolerances. These are called "guardbands." Some drives have used servo  
15 approaches as outlined below. However, because of the relatively coarse or approximate head positioning for writing, azimuthal recording is not being used because the tolerance accumulations would not, in practice, allow "zero guardband recording," i.e., the tolerance variations are  
20 too large.

As will be explained, the present invention directly addresses the problem of accurate track location relative to the write/read head for the initial write or recordation of data and the subsequent reproduction of  
25 data. The invention provides location reference information by (a) an approach that does not use media surface area to record reference data, and (b) a technique enabling unusually precise head location relative to a data track. The use of so-called "buried servos" (i.e.  
30 reference data locations deep in the media) was proposed some time ago, i.e., as in IBM tech. Disclosure Bulletins Vol. 23, #7A, Dec. 1980 and Vol. 23 July 1980. Such buried servos were difficult or impractical to implement in disc drives. One buried servo scheme used a combination of  
35 recording separate signal frequencies in separate sub-data

media areas and then comparing amplitudes of respective frequencies to determine head position. This amplitude sensing and comparison approach is less accurate, and more difficult to implement than the signal phase techniques  
5 discussed herein.

It is a principal object of the invention to overcome the restrictions and limitations on track density of previous approaches, and to provide means to record a precisely located series or matrix of superimposed,  
10 orthogonal successive magnetic transitions. The resultant orthogonal pattern recorded at a buried level in the media is characterized by relatively long wave-length. Convergent azimuth patterns other than orthogonal can be used.

15 Basically, the invention is embodied in track means having two levels, one for recording of data, and the other for recording of servo information, and employs recorded magnetic transitions at the second level defining the servo information, the transitions arrayed along the  
20 track means as groups of converging intersecting lines which extend in superimposed relation to multiple tracks, i.e., crosswise or spanwise of the tracks.

As will appear, the transitions are typically "buried" at a level closer to the substrate; and the groups  
25 of transitions define sequences or transitions including a first sequence of parallel transitions extending at one angle, and a second sequence of parallel transitions extending at a second angle, the transitions of each sequence extending in superimposed relation to multiple  
30 tracks.

It is another object to provide a means to record this servo information on multiple tracks or magnetic flexible tape in which case the buried servo transitions are straight, or alternatively on a disc, in which case the  
35 groups of servo transitions are spiral shaped.

Further objects include the provision, in such buried servo systems of

- 1.1 means for providing continuous high precision tracking input to tracking servo for recording and for playback;
- 1.2 means for high precision location of tracks at instant of recording such data tracks;
- 1.3 means for minimizing the effects of track-to-track crosstalk resulting from head off-track wandering, head dimensional tolerances and environment influences (drift, due to temperature and humidity);
- 1.4 means for providing multiple parallel tracks using azimuthal recording in order to speed up transfer of information to and from the tape;
- 1.5 means for permitting substantial storage enhancement for exiting tape storage hardware and retaining majority of essential components;
- 1.6 means to generate positioning servo data source readily and rapidly without need for complicated and expensive processes and instrumentation.

A further object is to provide magnetic head means having data read/write flux gaps for writing and reading data on parallel tracks and wherein a first two of the data flux gaps extend at an obtuse angle  $\beta$  relative to the leading and tracking direction, and a second two more of the data flux gaps extend normal to the leading and trailing direction. In this regard, the second two flux gaps are spaced longitudinally along the direction, and the first two flux gaps are spaced between the second two flux gaps. Further, the "rotated" gap configuration allows reading of data on "alternative azimuth" data tracks, as

well as on conventional linear type conventional data tracks.

A further object is to provide servo and data heads providing unusual advantages in construction and modes of operation, and affording unique results.

These and other objects and advantages of the invention, as well as the details of an illustrative embodiment, will be more fully understood from the following specification and drawings, in which:

10

#### Brief Description of Drawings

Fig. 1 is a tape/head schematic diagram;

Fig. 2 is a schematic showing data tracks as related to buried servo transition bands;

Fig. 3 is a view of a servo record head face (surface in contact with magnetic tape);

Fig. 4 is an enlarged view showing one possible embodiment of servo transition bands;

Fig. 5 is a two channel data track write pattern;

Fig. 6 is a two channel (chevron) azimuthal head construction;

Fig. 7 is a schematic showing phase error signal generation;

Figs. 8 and 9 show forward and reverse data writing modes;

Fig. 10 shows head location when reading the data pattern;

Fig. 11 is a view of a modified head;

Fig. 12 is a view of yet another modified head;

Figs. 13 and 14 are views showing alternative data and servo core (gap) configurations in heads;

Fig. 15 is a view like Fig. 6 showing a modification;

Fig. 16 is a circuit diagram;

Fig. 17 is a modified head configuration reading alternate azimuth data; and

Fig. 18 is a view of the Fig. 17 head reading conventional linear spaced data.

5

#### Detailed Description

Fig. 1 shows magnetic media such as tape 10 which includes magnetic layer 11 fixed on a flexible plastic substrate 12. The tape is passed or driven relatively past a magnetic read/write head means 13, longitudinally forwardly (see arrow 14) or reversely (see arrow 15). Servo information (magnetic transitions) is recorded at a "buried" level 16 in media 11, and data is recorded at a level 17 closer to the media surface 11a. Thus, level 16 is closer to substrate 12 than level 17. Servo information is read by the head and transmitted at 18 to a processor 18a, which in turn controls an actuator 19 to precisely locate the head laterally, relative to multiple data tracks 20 extending longitudinally in or on the media at level 17. See Fig. 2 indicating 124 such tracks. Eight "buried" servo information carrying bands are also indicated at 21 in Fig. 2, each such band laterally spanning (at level 16) multiple data tracks (at level 17). Other numbers of servo tracks and data tracks are possible. These numbers are used only as an example.

Fig. 7 schematically shows two orthogonal servo transitions 23 and 24 recorded in the tape that pass the head "sensors" (flux gaps) 25 and 26, and read, with the head aligned or centered relative to the head; and two subsequent transitions 23a and 24a recorded in the tape media that pass the sensors 25 and 26, the tape having become misaligned laterally by amount "d" when 23a and 24a are read. This causes a reading timewise phase error  $\phi$  due to reading of 23a by 25, and later reading of 24a by 26.

this phase error  $\phi$  generates an error signal that is transmitted to processor 18, as described, to control the head so that it follows the tape laterally and precisely aligns with the tape for aligning the data read/write magnetic (flux) gaps with the data track being read or written.

#### Servo Writing on Tape

Servo writing can be done with two heads writing simultaneously on one pass over the tape, one head to write transitions 23, and the other to write transitions 24. See Figs. 3, 4, and 7. Both heads are wider than the tape, and each has a diagonal flux gap which spans the full width of the tape. The gaps or cores are oriented at the desired positive and negative angles for the servo pattern (i.e.,  $\pm 45^\circ$ ). The servo pattern is written at a current which saturates the full depth of the oxide coating. The wavelength of the servo signal is a low frequency compared to the data frequencies in order to minimize servo to data channel cross-talk and vice versa.

The heads are located in leading and trailing configurations, and the leading head is a normal head with a continuous gap 30 over its length. See Fig. 3. The trailing head is identical to the leading head, except that its gap 31 is oriented at the opposite azimuth angle, and has notches 32 machined into its face in the gap area (see Fig. 3). The head magnetic core material that is removed in the notching operation is replaced with a nonmagnetic material, such as a ceramic. The width and tolerance on each notch is not critical, and has no effect on the accuracy of the servo information.

With this configuration, the leading head writes transition signal at one azimuth angle over the full width, and the trailing head overwrites this signal with new bands, or strips, of transition signal at the opposite azimuth angle. The resulting composite signal consists of

lateral servo bands 35 with zig-zag segments 35a and 35b written at alternating azimuth angles with the timing (the gap line) of all the bands with the same azimuth angle precisely aligned and synchronized (see Fig.4).

5           The location of the servo signal laterally on the tape is not critical. Fixed heads with normal guiding tolerances provide adequate accuracy. Drives using this technique of track following may determine a desired distance from any of the coincident points 27 in the  
10 pattern when starting to write the first data track on the tape, and then use the servo information to maintain this position and locate all remaining tracks.

          In the read mode, the drive locates a reference burst (like the zero track burst in quarter inch cartridge  
15 committee formats) to determine the relationship between the data tracks and the servo signal. Once this calibration procedure is completed for the starting track, the drive again uses the servo information to maintain this position and locate all remaining data tracks. This self-  
20 calibrating scheme eliminates the many dimensional difference and tolerance problems between the writing and reading heads, and allows for different servo head and data track configurations. The diagonal dotted lines in Fig. 4 indicate that the transitions are written by the same head,  
25 in order to maintain alignment. Alternately, the servo pattern can be written by a narrower head (i.e., the head in a drive) in several passes, progressing across the width of the tape, electronically synchronized.

#### Two Data Channel Azimuthal (Chevron) Format

30           The data tracks 20 may be written two at a time, side-by-side, and backand forth as the tape is transported forwardly and reversely. By "painting" the tracks at the proper pitch, the desired track width is achieved for all tracks, except for the last one recorded. Writing two  
35 tracks at a time reduces time required to transfer a given

amount of data by a factor of two. See Fig.5 for a two-track scheme, and note overlap.

Referring to Fig. 6, the head configuration is a six-core head with four read or write cores 41-44 and two servo cores 30 and 31. they are arranged as shown, with gap 31 extending at angle  $\alpha$  and gap 30 at angle  $\beta$ , where  $\alpha = 180^\circ - \beta$ . The R/W cores are double the final data track width. They are arranged so that each set of heads overlap the centerline reference by .5 data track widths. the servo cores are centered on the reference centerline, and they are four time (or other even multiples of) the servo track widths.

When writing the data, the tracks are trimmed as shown in Figs. 8 and 9, in the forward and reverse directions to their final width.

When reading the data tracks, the heads are offset by 1/2 track width so that cores of both heads 41 and 42 overlap both edges of the track, as do cores 43 and 44. The overlap for this arrangement is 1/2 track on either side of both heads. This head is easier to produce (six cores) than other two channel bi-directional read after write heads (seven or more cores). Fig. 10 shows the position of the read heads when reading data.

#### Head Construction

Figs. 13 and 14 show alternative servo and data head gap (core) arrangements as labeled and with relative width as seen.

In Fig. 15, the modified head gaps 30a, 31a, 41a--44a are arranged as shown, with lengths and azimuth angles as in Fig. 6, gap 30a serving an erase function to erase previously recorded data. Tape moves in direction 70. Gap 31a operates as a servo. Gaps 41a--44a are shifted toward longitudinal edge 72, as shown. Head structure 80 supports the gaps.

Fig. 16 shows associated circuitry, including

10

head coil 73, and servo drive amplifier 74 with inputs 74a and 74b connected via filter 75, with coil terminals 73a and 73b. High frequency erase signal is transmitted at 76 to core 30a.

5 In Fig. 15, gap 30a extends at angle  $\beta$ , and gap 31a extends at angle  $\alpha$ , where  $\alpha \approx 180^\circ - \beta$ .

Additional Description

10 This invention utilizes two proven recording technologies and combines them to provide benefits that cannot be achieved with either technology alone, nor with any other known technology. Furthermore, this invention provides solutions for the practical problems that have prevented the combination of these technologies in the past, in linear recording.

15 These solutions include:

- . A head design with complexity and tolerances comparable to today's commonly used heads but provides significantly more data capacity.
- 20 . A simple, single pass mode for servo writing the tape with a "generic" servo pattern that does not dictate the number of tracks, the data density, the format, or even the recording method, and yet provides the
- 25 precision necessary for high track densities. This servo pattern can be used for several generations of products.
- . A multiple track, zero guardband, read/write format necessary to reduce data transfer
- 30 times at gigabyte capacities, and which does not impose difficult tolerances on the head.

While the discussion has proceeded with reference to magnetic tape, the invention is also applicable to other magnetic media, such as magnetic discs (floppies, etc.).

35 The servo transitions that may extend upward to

level 17 do not interfere with read data because of their low frequency and azimuthal misalignment with the data heads. See Fig. 1.

A representative specification, buried servo, zero guardband format, is as follows:

- 1) Storage Capacity - 5.9 GB, formatted.
- 2) Servo - 16 bands, servo pitch  $S_w = .0156''$  width, buried, orthogonal pattern recorded at  $+45^\circ$  on  $.25''$  magnetic tape.
- 3) Tape Speed - 120 IPS.
- 4) Servo Density - 1000 FCI.
- 5) Data Density - 38,750 FTPI or 51,667 BPI.
- 6) Encoding Scheme - RLL 1,7.
- 7) Number of Tracks - 124, alternate azimuth, zero guardband, recorded at  $\pm 10^\circ$  or  $20^\circ$  and  $0^\circ$ .
- 8) Data Channels - 2.
- 9) Head Lateral track Width -  $.0036$  IN.
- 10) Track Pitch (Recorded Track Width) -  $.0019$  IN.
- 11) Dump Time - 77 MIN. (for signal channel).
- 12) Data Rate - 775 kilobytes/sec.
- 13) Head Type - 2 servo and 4 R/W heads (see Fig. 6 for possible configurations).
- 14) Tape Type - 900 Oe, 750 FT., full size data cartridge. will also work with 215 FT, DC-2000 900 Oe mini cartridges.
- 15) Positioner resolution -  $.0002$  IN maximum.

Referring to Figs. 17 and 18, the head configuration 140 is a four core head, i.e., four read/write cores 141-144. thus, it is similar to Fig. 10 and also to Fig. 6 except that servo cores shown in Fig. 6 are omitted. (Such servo cores may be used in conjunction with servo transitions as seen in Fig. 4.)

In Figs. 17 and 18, data read/write cores 141 and 142 are aprallel and extend normal  $\alpha = 90^\circ$  to the length

direction of the data tracks shown (tracks 180-181); and data read/write cores or gaps 143 and 144 extend at angles relative to such data track length directions. is  $135^\circ$  for example. If servo reference transitions are used at angles  $\alpha$  and  $\beta$ , as per above, then should differ from  $\alpha$  and  $\beta$ , for example be  $120^\circ$ . The length of cores 143 and 144 is about three data track widths; and the length of cores 141 and 142 is two data track widths. (Note that the projected length of each of 143 and 144 normal to tape direction is two-track width.)

The "rotation" of the heads 141 and 142 still retains the desired difference in azimuth between the heads that provides the benefits of alternate azimuth recording, and yet leaves one set of head cores available to read and write linear perpendicular azimuth formats without the need to add additional head cores. Heads 141 and 142 read magnetic data transitions 210, and heads 143 and 144 align with and read transitions 211. Heads 141 and 142 cannot read transitions 211; and heads 142 and 143 cannot read transitions 210. All heads are on a single carrier 213.

In reading the "alternate azimuth data track pattern" of Fig. 17 (data on alternate tracks 180 and 182 has conventional linear format, and data on alternate tracks 181 and 183 has angled azimuthal configuration, typically where  $= 135^\circ$ ), the cores 141 and 142 laterally bridge the entire width of track 182, reading data thereon, and also extend partly over tracks 181 and 183, but not reading data thereon since these data magnetic transitions are angled relative to cores 141 and 142. The cores 143 and 144 align azimuthally with angled data transitions on track 181, as shown, reading data thereon, and they also extend partly over tracks 180 and 182, but not reading data on the latter since the data transitions on 180 and 182 are not aligned angularly with cores 143 and 144. Therefore, the tracks may extend directly adjacent one another,

laterally, as shown, and no guardband is needed. the core lengths are typically:

- length of each core 141 and 142 = approximately two track widths
- 5        - projected length normal to the direction of each core 143 and 144 = approximately three track widths.

In Fig. 18, the cores 141-144 are the same as in Fig. 17. data tracks 184 and 185 are conventional, with  
10 linear spaced transitions 186 extending normal to the longitudinal length directions of the tracks (i.e., such transitions have "zero azimuth"). A narrow guardband 187 is employed between the tracks 184 and 185, as is conventional. Cores 141 and 142 can read those transitions  
15 on track as at 185, since those cores align with those transitions. Cores 143 and 144 are not then used. Cores 141 and 142 may be regarded as effectively "rotated" relative to corresponding cores 41 and 42 in Fig. 10. Note that cores 141 and 142 bridge the entire width of track  
20 185.

Cores or flux gaps 141 and 142 may be regarded as extending at different azimuth angles relative to cores 143 and 144 and vice versa.

The drawings may be considered as examples of  
25 applicability to linear magnetic tape, or to magnetic discs, or spiral tracks.

In Fig. 11, a composite head 250 has data read/write core or flux gap elements 141a, 142a, 143a, and 144a that respectively correspond to elements 141-144 of  
30 Figs. 17 and 18. Elements 141a and 142a are laterally offset (direction 251) relative to elements 143a and 144a, the same as in Figs. 17 and 18, and relative to the tape tracks. Core elements 141a and 142a are carried by head block part 252 which interfits with head block part 253,  
35 for example, and at the notching indicated at 254.

Servo flux gapes 130a and 131a correspond to those shown at 30a and 31a in Fig. 15; however, gaps 130a and 131a are now laterally offset from one another, and located between 141a and 142a, and between 143a and 144a as indicated. they may be carried by a head block part 255 interfitting 252 and 253, as shown.

By placing the two identical servo gaps in Fig. 11 in laterally offset relation, the accuracy of lateral head position correction relative to the tape track (being read or written upon) is enhanced, as contrasted with the servo gap arrangement seen in Fig. 15.

Fig. 12 shows, schematically, an arrangement like that of Fig. 11 but modified in that two sets of servo cores are provided, i.e., set 230a and 231a, and 330a and 331a. The cores 230a and 231a are directly laterally spaced apart, as are the cores 330a and 331a; and the first set (230a and 231a) is longitudinally offset from, but close to, the second set (330a and 331a). The corresponding detected time phase differences developing, in case of yaw or lateral misalignment of the tape relative to the head, allow lateral offset (misalignment) of the tape to be separated from yaw offset. This provides a means for correcting for both lateral offset and yaw offset at the data read/write cores or heads.

From the foregoing, it will be understood that the combination provides a method for recording data on track means defined by magnetic recording media on a substrate, the media along the track means having two levels, including a first level for recording of data, and a second level for recording of servo information in the form of transitions arrayed along the track means as groups of converging lines which extend in superimposed relation to multiple tracks.

The method includes the steps:

- a) recording data as magnetic transitions

spaced along the track means at the first level, such recording including operating a record head,

b) and operating servo means for sensing such converging servo lines, and to control lateral movement of the record head relative to the track means, in response to such sensing.

In this regard, the operating step typically includes providing servo magnetic core means on the record head; and the data magnetic transitions are advantageously recorded azimuthally angularly relative to the track means length direction. Highly accurate recording of data is then made possible without guard bands.

Further, a data read magnetic core is typically provided on the head in travel direction alignment with a data record magnetic core on the head, and the cores may be operated to record data, and immediately thereafter to read data. Such write/read mode of operation, using azimuthal cores and transitions, is useful for example in comparing data written with data read for accuracy.

Claims

1. In the method of recording magnetic servo transitions in magnetic media on a substrate, and along track means having two levels, one for recording of data, and the other for recording of said servo transitions, the steps that include
- a) magnetically recording said transitions at said second level to array the transitions along the track means as groups of converging intersecting lines,
- b) and causing said lines to extend in spanwise relation to multiple tracks.
2. The method of claim 1 in which the data transitions are recorded closer to the media surface than the servo transitions.
3. The method of claim 1 including recording said servo transitions to define sequences of lines including a first sequence of parallel servo transitions extending at one angle, and a second sequence of parallel lines extending at a second angle, the lines of each sequence extending in superimposed relation to multiple tracks.
4. The method of claim 3 including locating said first and second sequences of transitions to extend lengthwise in laterally adjacent relation, with pairs of transitions in the two sequences defining chevron configurations.
5. The method of claim 4 including detecting the lateral misalignment positioning of said chevron configurations relative to a magnetic head as phase variations, and controlling the lateral positioning of the

head as a functioning of said phase variations to reduce said misalignment.

6. The method of claim 5 including azimuthally recording data transitions on or along the track means.

7. The method of claim 4 wherein said method is carried out using multiple magnetic flux write gaps in recording head means, said gaps including a first elongated gap extending at an angle  $\alpha$ , and a second gap extending at an angle  $\beta$ , relative to the direction of travel of the media past and adjacent the head means, and spacing said gaps in leading and trailing relation in said direction and so that each of the gaps spans multiple of the tracks.

8. The method of claim 7 including providing gap interruptions along the trailing gap, whereby the interruptions will not cause erasing of transition lines written by flux from the leading gap, at locations along said transition lines transversed by said interruptions.

9. The method of claim 7 wherein  $\alpha = 180^\circ - \beta$ .

10. The method of claim 1 that includes:  
c) simultaneously writing the data upon first and second side-by-side tracks to produce transitions on the first track that are angled relative to transitions produced on the second track.

11. The method of claim 10 wherein said a) step is carried out while the media is transported relatively forwardly, and including

d) subsequently simultaneously writing the data upon third and fourth side-by-side tracks to produce transitions on the third track that are angled relative to

18

transitions produced on the fourth track, and while the media is transported relatively reversely.

12. The method of claim 11 wherein said b) step  
5 is carried out to cause data on the third track to at least partially overwrite data on the second track.

13. The method of claim 1 including:

c) recording said data as magnetic transitions  
10 spaced along the track means at a first of said levels, said recording including operating a record head,

d) and operating servo means for sensing said  
converging servo lines, and to control lateral movement  
of the record head relative to the track means, in response  
15 to said sensing.

14. The method of claim 13 wherein said  
operating step includes providing servo magnetic core means  
on said record head.

20

15. The method of claim 13 wherein said data  
magnetic transitions are recorded azimuthally angularly  
relative to the track means length direction.

25

16. The method of claim 15 including providing  
a data read magnetic core on said head in travel direction  
alignment with a data record magnetic core on said head,  
and operating said cores to record said data, and  
immediately thereafter read said data.

30

17. The method of claim 1 that includes:

c) magnetically writing data magnetic  
transitions on the track means, and azimuthally angularly  
relative to the track means length direction,

35

d) and immediately thereafter magnetically

reading said azimuthally angular transitions.

18. The method of claim 17 including providing a read/write head means with read/write magnetic cores which are azimuthally angled relative to the track means length direction, and operating said cores to carry out said a) and b) steps of claim 46.

19. The method of claim 18 including providing a guidance system, and operating said system to laterally guide said head means to maintain the read core in angular alignment with azimuthally written data transitions.

20. A track defined by magnetic recording media on a substrate for use in the method of claim 1, the media along the track means having two levels, one for recording of data, and the other for recording of servo information, the combination comprising recorded magnetic transitions at the second level defining the servo information, the transitions arrayed along the track means as groups of converging lines which extend in superimposed relation to multiple tracks.

21. The combination of claim 20 wherein said transitions are at the level closer to the substrate.

22. The combination of claim 20 wherein said groups of lines define sequences of lines including a first sequence of parallel lines extending at one angle, and a second sequence of parallel lines extending at a second angle, the lines of each sequence extending in superimposed relation to multiple tracks.

23. The combination of claim 22 wherein said first and second sequences of lines extend lengthwise in

laterally adjacent relation, with pairs of lines in the two sequences defining chevron configurations.

24. The combination of claim 23 including  
5 detector means to detect the laterally misalignment positioning of said chevron configuration relative to a magnetic head as phase variations, and control means responsive to said phase variations to correct the positioning of the head to reduce said misalignment.

10

25. The combination of claim 24 including magnetic core means on the head to azimuthally record data transitions in and along the track means.

15 26. The combination of claim 20 wherein said track means and media define one of the following:

- i) a flexible tape
- ii) a rotary disc
- 20 iii) a rotary disc wherein the track means has spiral configuration on the disc.

27. The combination of claim 20 for magnetic recording media on a substrate, there being side-by-side parallel data tracks at a first level in the media, and  
25 there being parallel servo information containing bands at a second level in the media underlying the first level, comprising

- a) servo transitions spaced along said bands to define lines extending at first azimuth angles,
- 30 b) data transitions spaced along said data tracks and extending at second azimuth angles which are different from said first azimuth angles.

28. The combination of claim 27 including  
35 read/write heads overlying the media and with flux gaps

overlying at least two data tracks to simultaneously write data transitions onto said tracks.

29. A magnetic read/write head having multiple  
5 flux gaps for use in conjunction with magnetic recording media on a substrate for use in the method of claim 1, there being side-by-side parallel data tracks at a first level in the media, and there being parallel servo information containing bands at a second level in the media  
10 underlying the first level, there also being:

- a) servo transitions spaced along said bands to define lines extending at first azimuth angles, pairs of said lines extending azimuthally convergently, and
- b) data transitions spaced lengthwise along  
15 said data tracks and extending at second azimuth angles which are different from said first azimuth angles, the head having;
- c) first flux gaps which are relatively long, and azimuthally corresponding to said servo transitions,
- 20 d) a sequence of data read/write flux gaps which are relatively short, which are spaced lengthwise of said first flux gaps, and which azimuthally correspond to said data transitions.

25 30. The head of claim 29 wherein two of said data flux gaps and one of the first gaps extend at angle  $\alpha$  relative to the leading and trailing direction, and two of the data flux gaps and the other of the first gaps extend at angle  $\beta$  relative to said leading and trailing direction  
30 where  $\alpha = 180^\circ - \beta$ .

31. The head of claim 29 wherein each of said first gaps is a servo gap, one extending at angle  $\alpha$  relative to said leading and trailing direction, and the  
35 other extending at angle  $\beta$  relative to said leading and

trailing direction, where  $\alpha = 180^\circ - \beta$ .

32. The head of claim 29 wherein one of said first gaps is a trailing servo gap connected with a servo drive for the head, and the other of said first gaps is a leading data erase gap, said one gap extending at angle  $\alpha$  relative to said leading and trailing direction, and the other extending at angle  $\beta$  relative to said direction, where  $\alpha \approx 180^\circ - \beta$ .

10

33. The head of claim 29 wherein a first two of said data flux gaps extends at an obtuse angle  $\beta$  relative to said leading and trailing direction, and a second two of said data flux gaps extend normal to said leading and trailing direction.

15

34. The head of claim 33 wherein said second two data flux gaps are spaced longitudinally along said direction, and said first two data flux gaps are spaced between said second two flux gaps, and offset laterally relative thereto.

20

35. The head of claim 34 where said angle  $\beta \approx 135^\circ$ .

25

36. The head of claim 34 where the projected length of each of said first two flux gaps is about twice the data track width.

30

37. The head of claim 34 where the length of each of said second two flux gaps is about two times the data track width.

38. The head of claim 34 wherein there are four parallel data tracks subtended by said data flux gaps, and

35

arranged as follows:

- i) the first, second and third data tracks are subtended by each of said first two data flux gaps,
- 5 ii) the second, third and fourth data tracks are subtended by each of said second two flux gaps,
- iii) the second data track is completely bridged by the first two flux gaps,
- 10 iv) the third data track is completely bridged by the second two flux gaps.

39. The head of claim 38 wherein data transitions on the first and third tracks extends normal to  
15 the length direction of the tracks, and the data transitions on the second and fourth tracks extends at said azimuth angle .

40. The head of claim 38 wherein:
- 20 x1) the first and second tracks extend directly adjacent one another,
  - x2) the second and third tracks extend directly adjacent one another,
  - 25 x3) the third and fourth tracks extend directly adjacent on another.

41. The head of claim 29 having data read-write flux gaps for reading data transitions on parallel tracks, and wherein a first two of said data flux gaps extend at an  
30 obtuse angle relative to said leading and trailing direction, and a second two more of said data flux gaps extend normal to said leading and trailing direction.

42. The head of claim 41 wherein said second two  
35 flux gaps are spaced longitudinally along said direction,

and said first two flux gaps are spaced between said second two flux gaps, and offset laterally relative thereto.

43. The head of claim 42 wherein there are four  
5 parallel data tracks subtended by said data flux gaps, and arranged as follows:

- 10 i) the first, second and third data tracks are subtended by each of said first two data flux gaps,
- ii) the second, third and fourth data tracks are subtended by each of said second two flux gaps,
- 15 iii) the second data track is completely bridged by the first two flux gaps,
- iv) the third data track is completely bridged by the second two flux gaps.

44. The head of claim 34 wherein there are two  
20 parallel data tracks separated by a narrow guardband, and further arranged as follows:

- i) the data transitions on both tracks are normal to the track length, and spaced therealong,
- 25 ii) both data tracks are subtended by the first two data flux gaps,
- iii) only the second data track is completely subtended laterally by each of the second two flux gaps.

30 45. The head of claim 29 having multiple flux gaps for use in conjunction with magnetic recording media on a substrate, there being parallel, lengthwise extending data tracks at a first level in the media, and there being parallel servo information containing bands at a second  
35 level in the media underlying the first level, comprising:

a sequence of data read flux gaps which are spaced apart lengthwise of said data tracks, said flux gaps extending at azimuthally different angles relative to said length direction.

5

46. The head means of claim 45 wherein two of said data flux gaps extend at angle  $\alpha$  relative to said length direction, and two more of the data flux gaps extend at angle  $\beta$  relative to said length direction, where  $\alpha \approx 90^\circ$ .

10




47. The combination of claim 29 wherein there are at least two of said first flux gaps which are laterally spaced apart and which extend in convergent relation.




15




48. The combination of claim 29 wherein there are two pairs of said first flux gaps, the pairs longitudinally spaced apart, the first flux gaps of each pair being laterally spaced apart and extending in convergent relation.

20

25

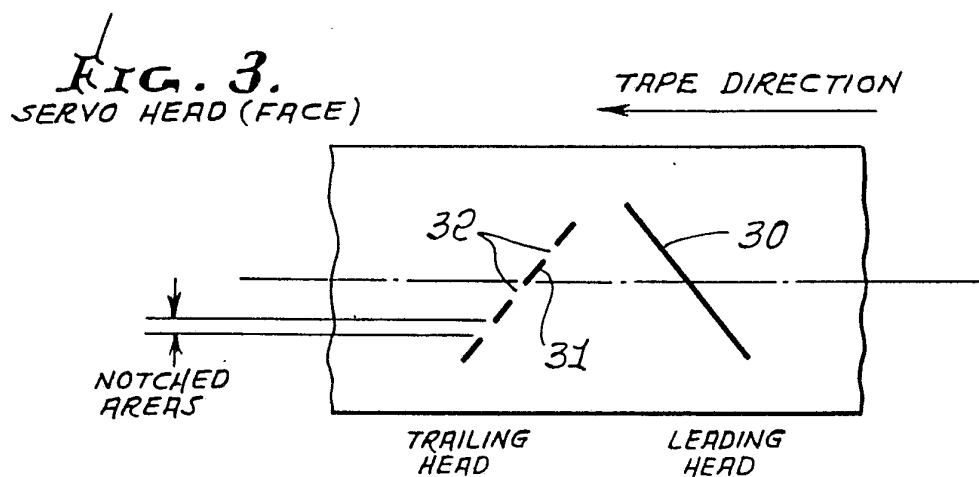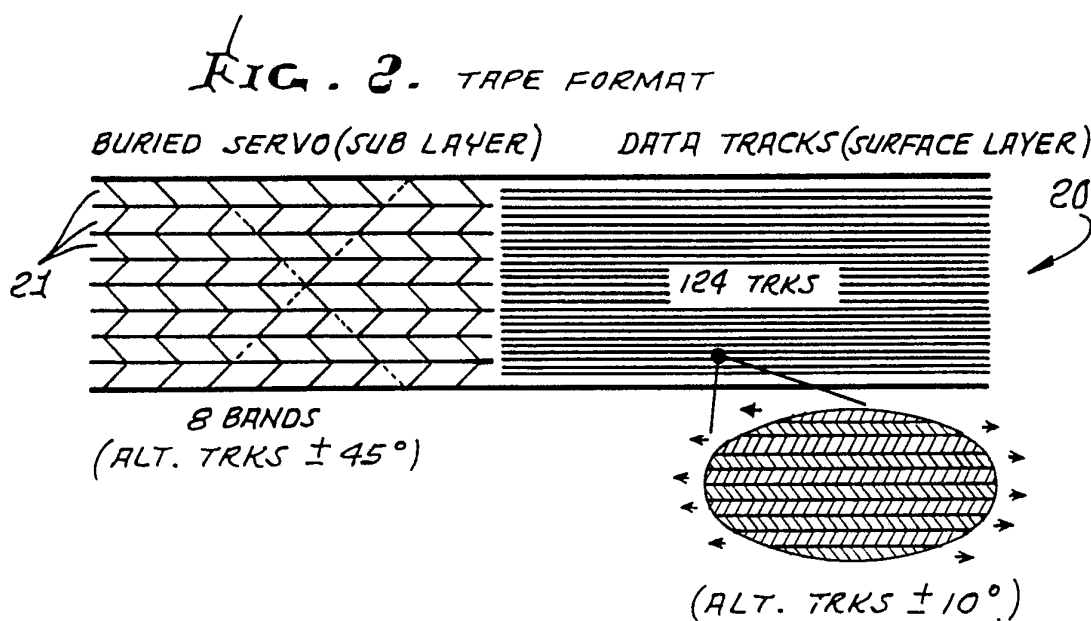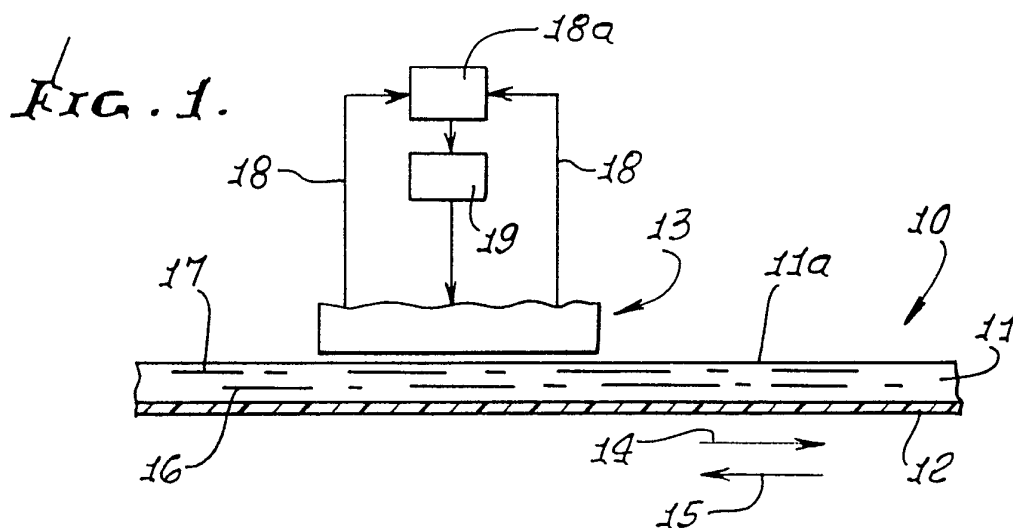

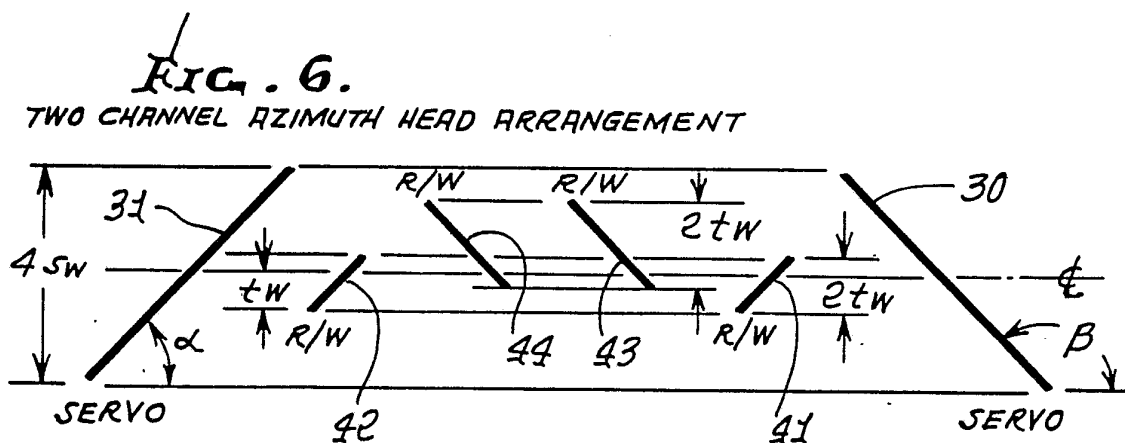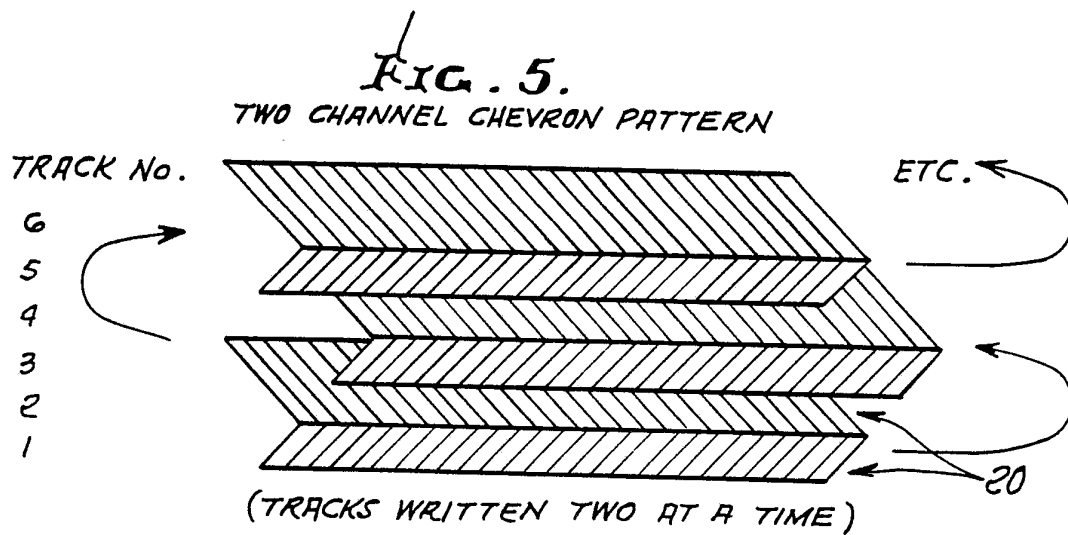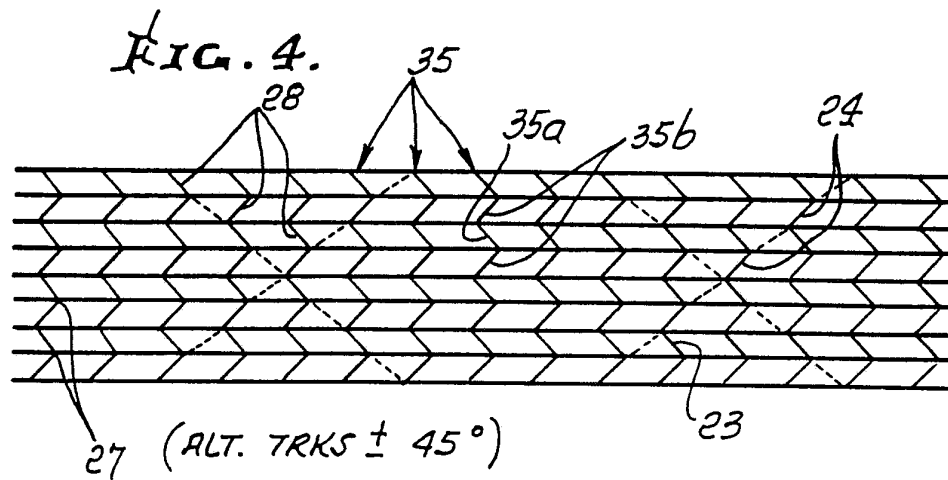

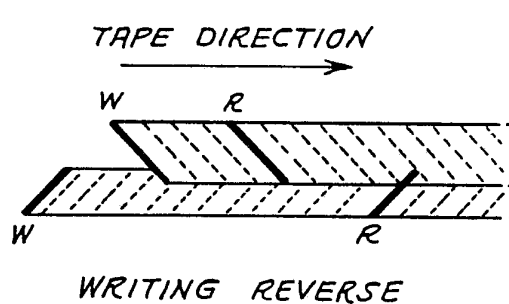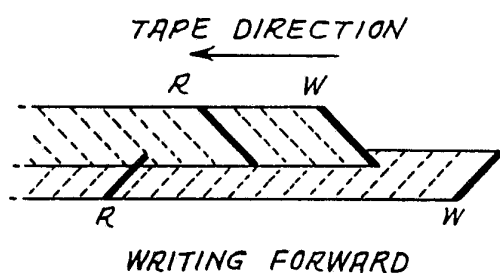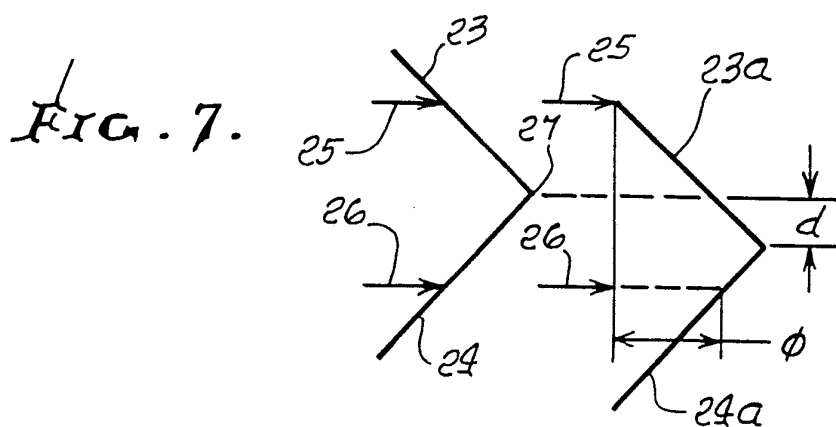

**FIG. 10.**  
READING TWO CHEVRON PATTERN

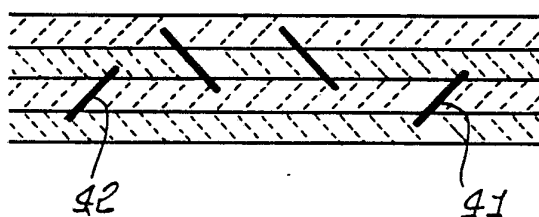


FIG. 11.

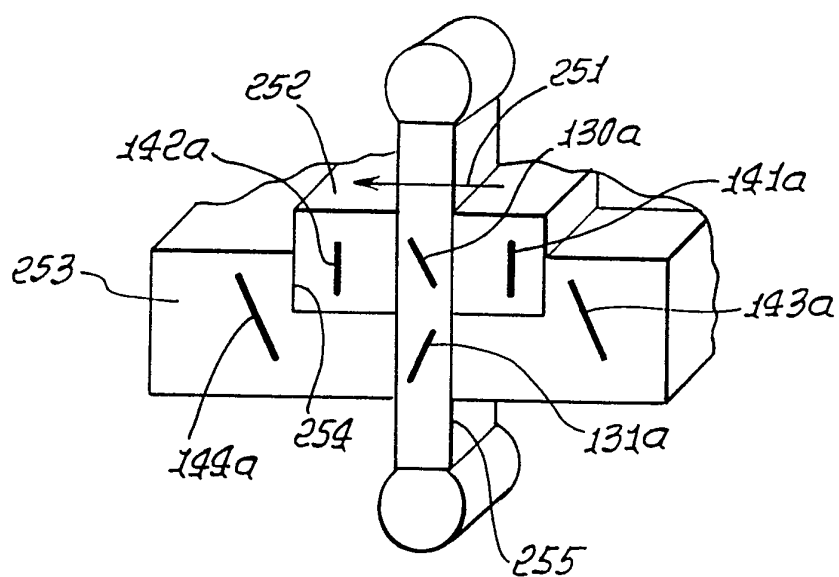


FIG. 12.

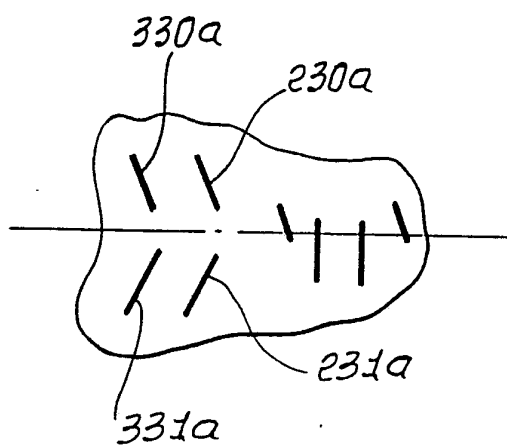


FIG. 13.

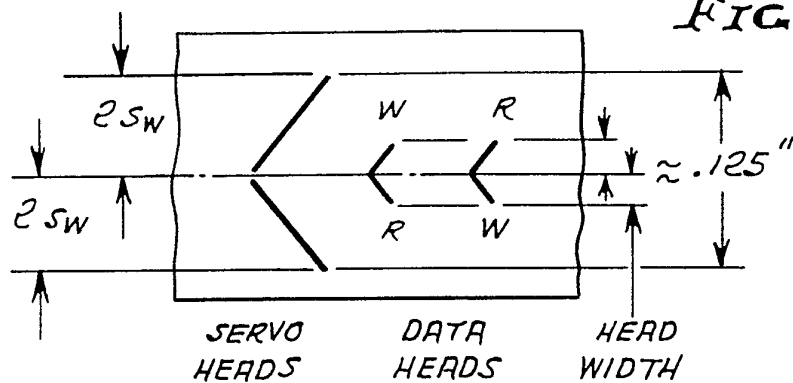


Fig. 14.


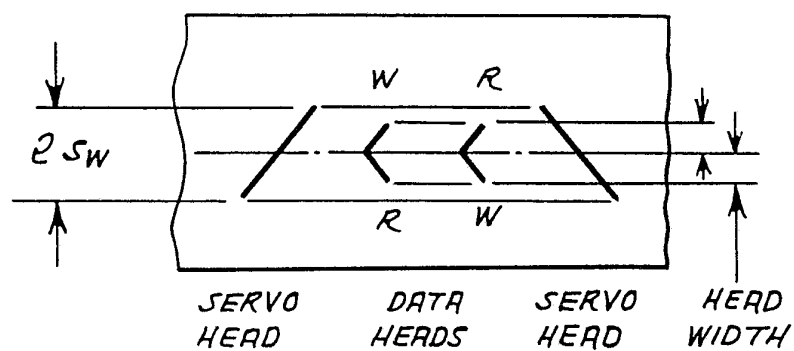


FIG. 15.

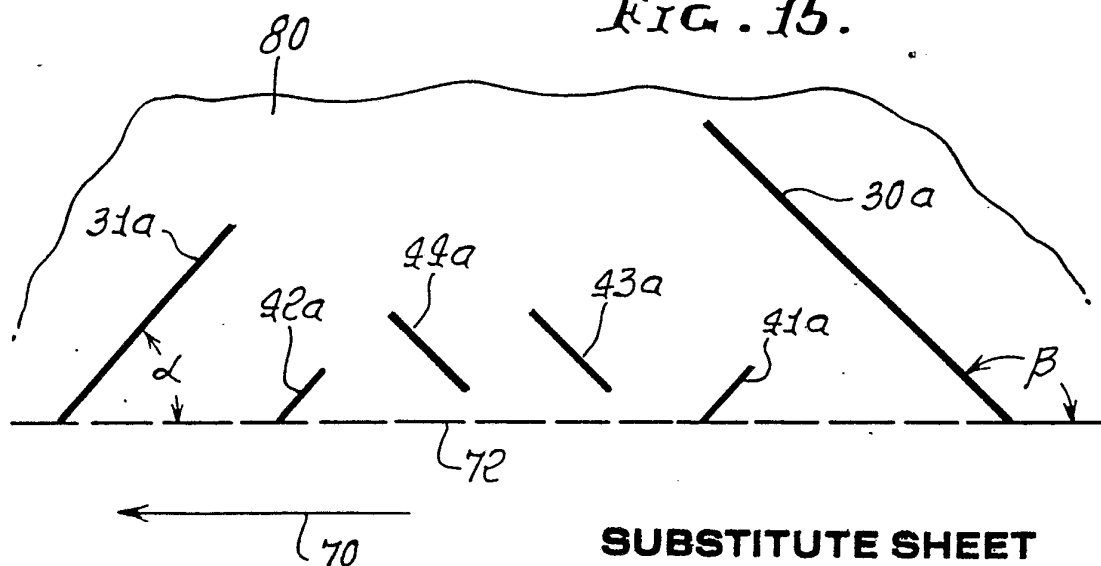

# SUBSTITUTE SHEET

FIG. 16.



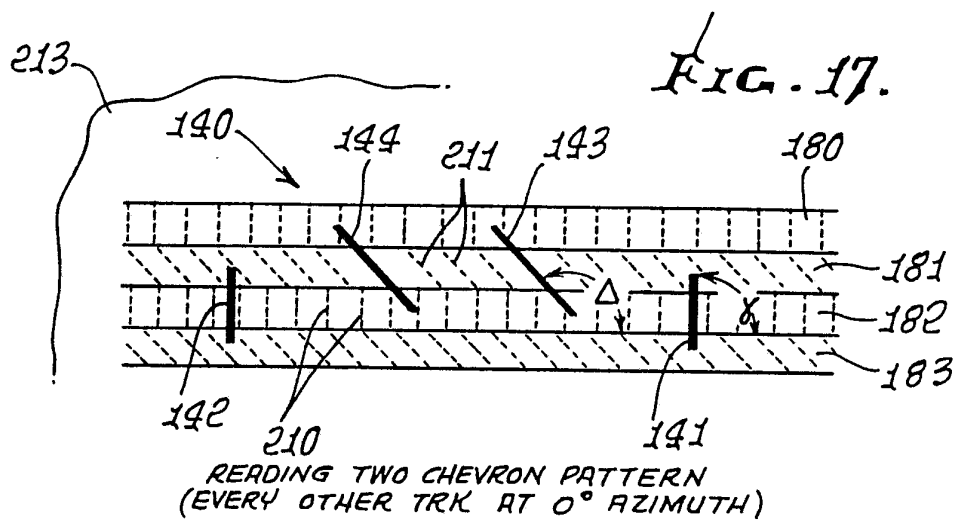


FIG. 18.

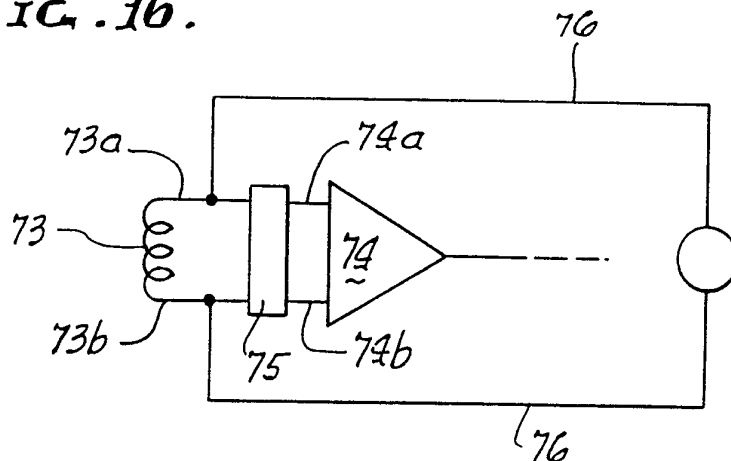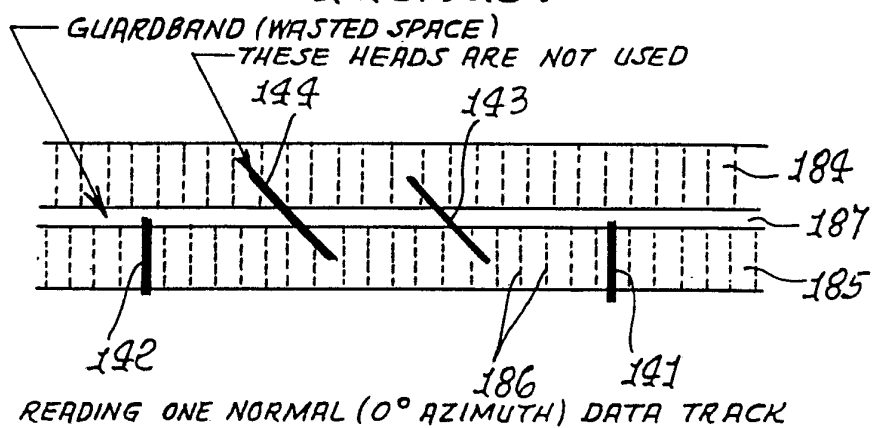

# INTERNATIONAL SEARCH REPORT

International Application No PCT/US91/01243

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>3</sup>		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC 5 G11B 5/02, G11B 5/596, G11B 5/265 U.S. Cl. 360/18		
<b>II. FIELDS SEARCHED</b>		
Minimum Documentation Searched <sup>4</sup>		
Classification System	Classification Symbols	
U.S. Cl.	360/18, 77.01, 77.05, 77.07, 77.12, 119, 121	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>5</sup>		
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT</b> <sup>14</sup>		
Category <sup>6</sup>	Citation of Document, <sup>16</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. <sup>18</sup>
<u>X</u> <u>Y</u>	WO 89/04040 (BRIER TECHNOLOGY) 05 May 1989(05.05.89) See entire document.	1-3,13-14,20-22 26-27,29 4-12,15-17,23-24 28,30,32
Y	WO 89/09476(CALISLE) 05 October 1989 (05.10.89) See Abstract and all figures.	30-35,44-45,47
A,Y	US,A 4,314,290 (RAGLE) 02 February 1982(02.02.82) See Figures.	5-6,13-16,24 29-48
A,Y	US,A 4,149,198 (BEHR ET AL) 10 April 1979(10.04.79) See figures	5-6,13-16,24 29-48
A,Y	US,A 4,007,493 (BEHR ET AL) 08 February 1977(08.02.77) See figures	5-6,11-16,24 29-48
<p><sup>6</sup> Special categories of cited documents: <sup>15</sup></p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&amp;" document member of the same patent family</p>		
<b>IV. CERTIFICATION</b>		
Date of the Actual Completion of the International Search <sup>1</sup>	Date of Mailing of this International Search Report <sup>2</sup>	
21 May 1991	14 JUN 1991	
International Searching Authority <sup>1</sup>	Signature of Authorized Officer <sup>19</sup>	
ISA/US	David L. Robertson, Examiner	

## FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

A,Y	US, <del>2</del> 2,929,670 (GARRITY) 22 March 1960(22.03.60) See figures.	29-48
A,E	US,A 4,996,609 (JOANNOU) 26 February 1991(26.02.91) See Figs. 1,3 and 5	1,29
Y,P	US,A 4,945,438 (MATSUMOTO ET AL) 31 July 1990 (31.07.90). See Figs. 1(a), 1(b), 3(a)	33-34

V. ☒ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE<sup>1</sup>

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers \_\_\_\_\_ because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claim numbers \_\_\_\_\_ because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out<sup>1</sup>, specifically:
3. ☒ Claim numbers 18-19 because they are dependent claims not drafted in accordance with the second and third sentences of PCT Rule 6.4(a).

VI. ☒ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING<sup>2</sup>

This International Searching Authority found multiple inventions in this international application as follows:

- I. Claims 1-4,10-12,17,20-23 and 26-27 drawn to a method of recording
- II. Claims ~~5~~ 6,13-16 and 24 drawn to serve control of a magnetic head
- III. Claims ~~7~~ 9,25 and 29-48 drawn to gap details of a magnetic head

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.
2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:
3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:
4. ☐ As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

## Remark on Protest

- ☐ The additional search fees were accompanied by applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category <sup>15</sup>	Citation of Document, <sup>16</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No <sup>18</sup>
A	US,A 3,092,692 (JAVORIK) 4 June 1963 (04.06.63) See figs. 2-8	47-48
Y	US,A 4,334,252 (TORIU) 8 June 1982(08.06.82) See figs. 3-4,6-9, 15, 3,6,9 and 10	17,25
Y	US,A 4,321,634 (LEHUREAU) 23 March 1982(23.03.82) See figs. 4,8,9	3-4,6-9,15, 17,25
A	US,A 4,318,141 (HAYNES) 02 March 1982(02.03.82) See figs. 1,3	1
A	US,A 3,404,392 (SORDELLO) 01 October 1968(01.10.68) See figs. 4,5	1