

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
3 November 2005 (03.11.2005)

PCT

(10) International Publication Number
WO 2005/103466 A2

(51) International Patent Classification⁷: **F02D**

(21) International Application Number:
PCT/JP2005/008108

(22) International Filing Date: 21 April 2005 (21.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-127025 22 April 2004 (22.04.2004) JP
2004-371489 22 December 2004 (22.12.2004) JP

(71) Applicants (for all designated States except US): **TOYOTA JIDOSHA KABUSHIKI KAISHA** [JP/JP]; 1, Toyota-cho, Toyota-shi, Aichi, 4718571 (JP). **DENSO CORPORATION** [JP/JP]; 1-1, Showa-cho, Kariya-shi, Aichi, 4488661 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KASASHIMA,**


Kenji [JP/JP]; c/o TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyota-cho, Toyota-shi, Aichi, 4718571 (JP). **KANEKO, Rihito** [JP/JP]; c/o TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyota-cho, Toyota-shi, Aichi, 4718571 (JP). **SENDA, Kenji** [JP/JP]; c/o TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyota-cho, Toyota-shi, Aichi, 4718571 (JP). **KAMIO, Shigeru** [JP/JP]; c/o DENSO CORPORATION, 1-1, Showa-cho, Kariya-shi, Aichi, 4488661 (JP). **INOUE, Masaomi** [JP/JP]; c/o DENSO CORPORATION, 1-1, Showa-cho, Kariya-shi, Aichi, 4488661 (JP). **TAKEMURA, Yuuichi** [JP/JP]; c/o DENSO CORPORATION, 1-1, Showa-cho, Kariya-shi, Aichi, 4488661 (JP).

(74) Agents: **FUKAMI, Hisao** et al.; Fukami Patent Office,, Mitsui Sumitomo Bank Minamimorimachi Bldg.,, 1-29, Minamimorimachi 2-chome,, Kita-ku, Osaka-shi, Osaka, 5300054 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,

[Continued on next page]

(54) Title: INTERNAL COMBUSTION ENGINE KNOCK DETERMINATION DEVICE AND IGNITION CONTROL SYSTEM INCLUDING THE SAME

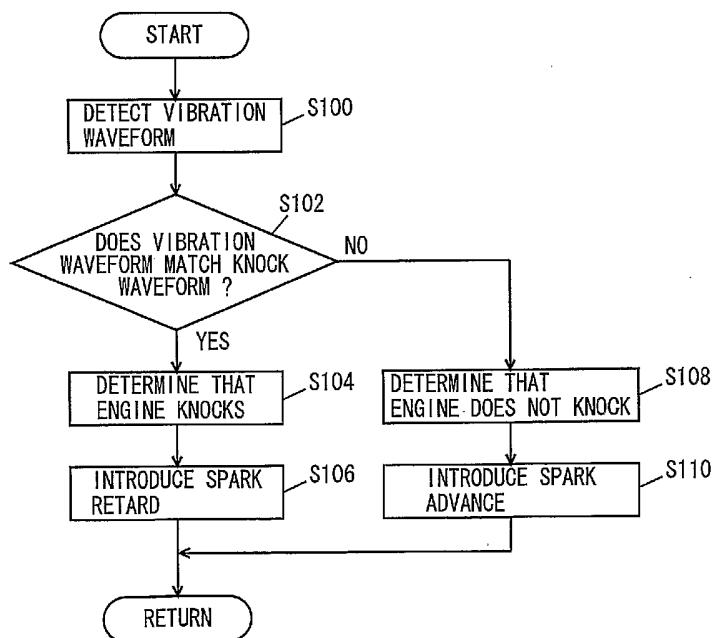

(57) Abstract: An engine ECU executes a program including the steps of: detecting a waveform of vibration of an engine at a predetermined knock detection gate (S100); determining whether a detected vibration's waveform and a knock waveform model stored in memory match within a predetermined range; if the model and the detected vibration's waveform match within the predetermined range (YES at S102), determining that the engine knocks (S104); and if the model and the detected vibration's waveform do not match within the predetermined range (NO at S102), then determining that the engine does not knock (S108).

WO 2005/103466 A2



KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DESCRIPTION

Internal Combustion Engine Knock Determination Device
and Ignition Control System Including the Same

5

Technical Field

The present invention relates generally to knock determination devices and ignition control systems including the same and particularly to such devices and systems that determine from a waveform of vibration of an internal combustion engine whether the engine knocks.

Background Art

Conventionally a technique employed to detect whether an internal combustion engine knocks is known. Japanese Patent Laying-Open No. 2000-205096 discloses an internal combustion engine knock detection device provided for an internal combustion engine and capable of detecting knocking with high precision. The knock detection device disclosed in this document includes a knock detector detecting the internal combustion engine's mechanical vibration to output a knock signal, and a knock determiner determining whether the engine knocks from the knock detector's knock signal in accordance with a reference knock level obtained by a background level BG (i.e., the knock detector's output level provided when the engine does not knock minus a mechanical vibration noise component and an electrical noise component that is multiplied by an adaptation constant K. The knock determiner determines that the engine knocks if a vibration component calculated by subtracting mechanical vibration and electrical components from a peak value of a signal output from the knock detector is larger than the reference knock level, and if the vibration component is equal to or smaller than the reference knock level the knock determiner determines that the engine does not knock.

The knock detection device described in this document can compare a vibration component corresponding to a peak value of a signal output from the knock determiner minus mechanical vibration and electrical noise components with a reference knock level obtained by removing mechanical vibration and electrical noise components to detect 5 with high precision whether an internal combustion engine knocks or not.

The knock detection device described in the above document is, however, disadvantageous in that if the knock detector outputs a signal having a peak large in value the device detects that the engine knocks, and when the engine does not knock and the knock detector nonetheless outputs a signal having a peak increased in value a 10 decision that the engine knocks may erroneously be made.

Disclosure of the Invention

An object of the present invention is to provide a knock determination device capable of determining with high precision whether knocking occurs.

15 Another object of the present invention is to provide an ignition control system capable of determining with high precision whether knocking occurs, and if so, reducing the knocking.

Still another object of the present invention is to provide a knock determination 20 device capable of reducing an erroneous decision that knocking does not occur despite that knocking occurs.

Still another object of the present invention is to provide a knock determination device capable of objectively determining whether knocking occurs.

The present knock determination device for an internal combustion engine 25 includes: a crank angle detector detecting the internal combustion engine's crank angle; a waveform detector detecting a waveform of vibration of the internal combustion engine for a predetermined crank angle range; a storage previously storing a waveform of vibration of the internal combustion engine for the predetermined crank angle range; a corrector correcting the waveform of the vibration of the internal combustion engine

stored in the storage, as based on a waveform of vibration of the internal combustion engine detected when the internal combustion engine is in a predetermined driving condition; and a determiner determining whether the internal combustion engine knocks, as based on a result of comparing the detected waveform and the corrected waveform.

5 In accordance with the present invention a crank angle detector detects an internal combustion engine's crank angle and a waveform detector detects a waveform of vibration of the internal combustion engine for a predetermined crank angle range. A storage previously stores a waveform of vibration of the internal combustion engine for the predetermined crank angle range and a corrector corrects the waveform of the vibration of the internal combustion engine stored in the storage, as based on a waveform of vibration of the internal combustion engine detected when the internal combustion engine is in a predetermined driving condition. Thus as a waveform of vibration caused when the engine knocks a knock waveform model created for example in an experiment can be corrected as based a waveform of vibration detected when the 10 engine does not knock, and the engine itself's mechanical vibration component can be contained in a waveform of vibration stored. As such, the knock waveform model can be more approximate to a waveform of vibration of the engine caused when the engine knocks. The model and a detected waveform can be compared to determine whether the engine knocks. Thus in addition to magnitude of vibration of the engine, a crank 15 angle for which vibration occurs can also be depended on to determine whether the engine knocks. Thus the knock determination device can determine with high precision whether the engine knocks.

20

25 Preferably the determiner determines that the internal combustion engine knocks when the detected waveform and the corrected waveform match within a predetermined range.

 In accordance with the present invention the determiner determines that the internal combustion engine knocks when the detected waveform and the corrected waveform match within a predetermined range. A knock waveform model

corresponding to a waveform of vibration caused when the engine knocks can previously be created for example in an experiment and stored and if for example a corrected version of this knock waveform model and a detected waveform provide a deviation within a reference value for each crank angle or such deviations' average falls 5 within the reference value a decision can be made that the engine knocks. Thus in addition to magnitude of vibration of the engine, a crank angle for which vibration occurs can also be depended on to determine whether the engine knocks. As a result whether the engine knocks can be determined with high precision.

Still preferably, the corrector corrects the waveform of the vibration of the 10 internal combustion engine stored in the storage, as based on a waveform of vibration of the internal combustion engine detected when fuel supplied to the internal combustion engine is interrupted.

In accordance with the present invention, the corrector corrects the waveform of the vibration of the internal combustion engine stored in the storage, as based on a 15 waveform of vibration of the internal combustion engine detected when fuel supplied to the internal combustion engine is interrupted. When the engine is interrupted from receiving the fuel, the engine does not knock, and a waveform of vibration detected will be that of mechanical vibration of the engine itself. This waveform of mechanical vibration of the engine itself can be used to correct a stored waveform of vibration to 20 allow the stored waveform of vibration to contain the engine itself's mechanical vibration component. The stored waveform of vibration can thus be more approximate to a waveform of vibration of the engine caused when the engine knocks. As a result, whether the engine knocks can be determined with high precision.

Still preferably the corrector corrects the waveform of the vibration of the 25 internal combustion engine stored in the storage, as based on a waveform of vibration of the internal combustion engine detected when the internal combustion engine's output transitions.

When the internal combustion engine's output transitions, the determiner

determines whether the internal combustion engine knocks, as based on a result of comparing the detected waveform and the corrected waveform.

In accordance with the present invention the corrector corrects the waveform of the vibration of the internal combustion engine stored in the storage, as based on a waveform of vibration of the internal combustion engine detected when the internal combustion engine's output transitions. This allows the stored waveform of vibration to contain a vibration component provided in the transition. As such, the stored waveform of vibration can be more approximate to a waveform of vibration of the engine caused in the transition when the engine knocks. In the transition, a detected waveform and a corrected waveform are compared and from a result thereof the determiner determines whether the engine knocks. Whether the engine knocks can thus be determined with precision.

The present invention in another aspect provides a knock determination device for an internal combustion engine, including: a crank angle detector detecting the internal combustion engine's crank angle; a waveform detector detecting a waveform of vibration of the internal combustion engine for a predetermined crank angle range; a storage previously storing a waveform of vibration of the internal combustion engine for the predetermined crank angle range; and a determiner determining whether the internal combustion engine knocks, as based on a result of comparing the detected waveform and the stored waveform. When the internal combustion engine has a spark retard as compared with a predetermined crank angle, the determiner determines whether the internal combustion engine knocks, as based on a result of comparing a waveform of vibration of a frequency higher than a predetermined frequency with the stored waveform.

In accordance with the present invention, a crank angle detector detects an internal combustion engine's crank angle and a waveform detector detects a waveform of vibration of the internal combustion engine for a predetermined crank angle range. A storage previously stores a waveform of vibration of the internal combustion engine

for the predetermined crank angle range and a determiner determines whether the internal combustion engine knocks, as based on a result of comparing the detected waveform and the stored waveform. A knock waveform model corresponding to a waveform of vibration caused when the engine knocks can previously be created for example in an experiment and stored and the model and a detected waveform can be compared to determine whether the engine knocks. As such, in addition to magnitude of vibration of the engine, a crank angle for which vibration occurs can also be depended on to determine whether the engine knocks. When the internal combustion engine has a spark retard as compared with a predetermined crank angle (formed for example when the engine starts), a decision is made as to whether the internal combustion engine 5 knocks, as based on a result of comparing a waveform of vibration of a frequency higher than a predetermined frequency with the stored waveform. If the internal combustion engine has a spark retard as compared with the predetermined crank angle, and the engine does not knock, a waveform of vibration of low frequency can nonetheless be 10 analogous to a waveform provided when the engine knocks. In such a case, of detected waveforms, a waveform of vibration of a frequency higher than the predetermined frequency can be compared with the stored waveform and from a result thereof whether the internal combustion engine knocks can be determined. This can minimize an erroneous decision that the engine knocks and thus allow whether the 15 engine knocks to be determined with high precision. Thus the knock determination device can determine with high precision whether the engine knocks.

20

The present invention in still another aspect provides an ignition control system including: the knock determination device; and a spark retard device providing the internal combustion engine with a spark retard when the knock determination device 25 determines that the internal combustion engine knocks.

In accordance with the present invention when the knock determination device determines that the internal combustion engine knocks the spark retard device provides the internal combustion engine with a spark retard. Thus the system can determine

with high precision whether the engine knocks, and if so reduce the knocking.

The present invention in still another aspect provides a knock determination device for an internal combustion engine, including: a crank angle detector detecting the internal combustion engine's crank angle; a vibration detector detecting a value 5 associated in magnitude with vibration of the internal combustion engine; a waveform detector detecting, as based on the value associated in magnitude with vibration of the internal combustion engine, a waveform of vibration of the internal combustion engine for a predetermined crank angle range; a storage previously storing a waveform of vibration of the internal combustion engine; and a determiner determining whether the 10 internal combustion engine knocks, as based on a result of comparing the detected waveform with the stored waveform. The waveform detector detects the waveform of vibration of the internal combustion engine, as based on the value associated in magnitude with vibration of the internal combustion engine divided by a maximum one of values associated in magnitude with vibration detected.

15 In accordance with the present invention the crank angle detector detects the internal combustion engine's crank angle. The vibration detector detects a value associated in magnitude with vibration of the internal combustion engine. The waveform detector detects, as based on the value associated in magnitude with vibration of the internal combustion engine, a waveform of vibration of the internal combustion 20 engine for a predetermined crank angle range. The storage previously stores a waveform of vibration of the internal combustion engine. The determiner determines whether the internal combustion engine knocks, as based on a result of comparing the detected waveform with the stored waveform. A knock waveform model corresponding to a waveform of vibration caused when the engine knocks can 25 previously be created for example in an experiment and stored and the model and a detected waveform can be compared to determine whether the engine knocks. Thus whether the engine's vibration is attributed to knocking can be analyzed more specifically. In doing so, a value associated in magnitude with vibration is divided by

the maximum one of values associated in magnitude with vibration detected to represent detected waveform's vibration in magnitude by a dimensionless number of 0 to 1. Thus, regardless of magnitude of vibration attributed to knocking, a detected waveform and a knock waveform model can be compared to determine whether the engine knocks. As 5 a result the knock determination device can determine with high precision whether the engine knocks.

Preferably, the vibration detector detects at a predetermined interval the value associated in magnitude with vibration of the internal combustion engine.

In accordance with the present invention, a value associated in magnitude with 10 vibration of the internal combustion engine can be detected at a predetermined interval. This allows minimized detection of a waveform having a complicated form associated with vibration having a magnitude varying minutely as a crank angle changes, and a waveform having a form suitable for comparison with a knock waveform model can be detected. This allows a waveform to be compared with the knock waveform model 15 with high precision.

Still preferably, the determiner determines whether the internal combustion engine knocks, as based on a result of comparing the detected waveform with the stored waveform while a timing of the detected waveform attaining vibration maximized in magnitude and that of the stored waveform attaining vibration maximized in magnitude 20 are matched.

In accordance with the present invention, a detected waveform and a stored waveform can be compared at a crank angle considered as an angle for which the engine knocks. This allows detected and stored waveforms to be compared at a crank angle free of knocking to minimize an erroneous decision that the engine knocks.

25 Still preferably the knock determination device further includes a deviation calculator calculating a deviation of the detected waveform and the stored waveform. The determiner determines from the deviation whether the internal combustion engine knocks.

In accordance with the present invention a difference between detected and stored waveforms is represented numerically as a deviation. Thus the detected waveform can be numerically analyzed to objectively determine whether the engine knocks.

5 Still preferably, the determiner determines whether the internal combustion engine knocks from the deviation and in addition thereto the maximum value associated in magnitude with vibration of the internal combustion engine.

10 In accordance with the present invention, in addition to vibration's waveform, vibration's magnitude can also be depended on to determine whether the engine knocks with higher precision.

Brief Description of the Drawings

Fig. 1 is a control block diagram for control, showing an engine controlled by the present ignition control system in a first embodiment.

15 Fig. 2 is a diagram representing a knock waveform model stored in a memory of an engine ECU in the present ignition control system in the first embodiment.

Fig. 3 is a flow chart for illustrating a structure for control of a program executed by the engine ECU in the present ignition control system in the first embodiment.

20 Fig. 4 represents a knock waveform model and an engine's vibration waveform.

Fig. 5 is a flow chart for illustrating a structure for control of a program executed by the engine ECU in the present ignition control system in a second embodiment.

25 Fig. 6 represents an engine's vibration waveform detected when spraying a fuel is stopped.

Fig. 7 represents an uncorrected knock waveform model stored in the memory of the engine ECU in the present ignition control system in the second embodiment.

Fig. 8 represents a knock waveform model corrected in the present ignition

control system in the second embodiment.

Fig. 9 is a flow chart for illustrating a structure for control of a program executed by the engine ECU in the present ignition control system in a third embodiment.

Fig. 10 represents an uncorrected knock waveform model stored in the memory of the engine ECU in the present ignition control system in the third embodiment.

Fig. 11 represents an engine's vibration waveform detected when the engine's output is in transition.

Fig. 12 represents a knock waveform model corrected in the present ignition control system in the third embodiment.

Fig. 13 is a flow chart for illustrating a structure for control of a program executed by the engine ECU in the present ignition control system in a fourth embodiment.

Fig. 14 is a diagram representing a knock waveform model stored in the memory of the engine ECU in the present ignition control system in a fifth embodiment.

Fig. 15 is a flow chart for illustrating a structure for control of a program executed by the engine ECU in the present ignition control system in the fifth embodiment.

Fig. 16 shows an integrated value calculated for every five degrees.

Fig. 17 represents a normalized vibration waveform.

Fig. 18 represents a knock waveform model and an engine's vibration waveform.

Best Modes for Carrying Out the Invention

Hereinafter with reference to the drawings the present invention in embodiments will be described. In the following description, identical components are identically denoted and also identical in name and function.

First Embodiment

With reference to Fig. 1 an engine 100 controlled by the present ignition control system in a first embodiment will be described. Engine 100 is an internal combustion

engine that allows a mixture of air aspirated through an air cleaner 102 and a fuel injected by an injector 104 to be ignited in a combustion chamber by an ignition plug 104 and thus combusted.

5 The air fuel mixture combusted causes combustion pressure which presses a piston 108 down and a crank shaft 110 rotates. The combusted air fuel mixture (or exhaust gas) is purified by a ternary catalyst 112 and thereafter discharged outside the vehicle. Engine 110 aspirates an amount of air adjusted by a throttle valve 114.

10 Engine 100 is controlled by an engine ECU 200 having connected thereto a knock sensor 300, a water temperature sensor 302, a crank position sensor 306 arranged opposite a timing rotor 304, a throttle opening sensor 308, a vehicle speed sensor 310, and an ignition switch 312.

15 Knock sensor 300 is implemented by a piezoelectric element. As engine 100 vibrates, knock sensor 300 generates a voltage having a magnitude corresponding to that of the vibration. Knock sensor 300 transmits a signal representing the voltage to engine ECU 200. Water temperature sensor 302 detects temperature of refrigerant water in engine 100 at a water jacket and transmits a signal representing a resultant detection to engine ECU 200.

20 Timing rotor 304 is provided at a crank shaft 110 and rotates as crank shaft 110 do. Timing rotor 304 is circumferentially provided with a plurality of protrusions spaced as predetermined. Crank position sensor 306 is arranged opposite the protrusions of timing rotor 304. When timing rotor 304 rotates, an air gap between the protrusions of timing rotor 304 and crank position sensor 306 varies, and a coil portion of crank position sensor 306 passes an increased/decreased magnetic flux and thus experiences electromotive force. Crank position sensor 306 transmits a signal representing the electromotive force to engine ECU 200. From the signal, engine ECU 25 200 detects a crank angle.

Throttle opening sensor 308 detects a throttle opening and transmits a signal representing a resultant detection to engine ECU 200. Vehicle speed sensor 310

detects a rate of rotation of a wheel (not shown) and transmits a signal representing a resultant detection to engine ECU 200. From the wheel's rate of rotation engine ECU 200 calculates the vehicle's speed. Ignition switch 312 is turned on by a driver starting engine 100.

5 Engine ECU 200 uses the signals transmitted from each sensor and ignition switch 312 and a map and program stored in a memory 202 to perform an arithmetic operation to control equipment so that engine 100 has a desired driving condition.

10 In the present embodiment engine ECU 200 depends on a signal transmitted from knock sensor 300 and a crank angle to detect a waveform of vibration of engine 100 at a predetermined knock detection gate (a section from a predetermined first crank angle to a predetermined second crank angle) (hereinafter the waveform will also simply be referred to as "vibration waveform") and from the detected vibration waveform determines whether engine 100 knocks.

15 To determine whether the engine knocks, the engine ECU 200 memory 202 stores a knock waveform model corresponding to a model of a waveform of vibration caused when engine 100 knocks, as shown in Fig. 2. The model is stored in association with vibration of a plurality of frequency bands. More specifically, a plurality of such models are stored. The models are obtained as follows: an experiment or the like is conducted to cause engine 100 to knock to detect the engine's vibration waveform, from which the models are previously created and stored. It should be noted, however, that the models may be created by a different method. Engine ECU 200 compares a detected waveform with the stored models to determine whether engine 20 100 knocks.

25 With reference to Fig. 3, in present embodiment's ignition control system engine ECU 200 executes a program controlled in a structure as will be described hereinafter.

At step (hereinafter simply referred to as "S") 100 engine ECU 200 detects the engine 100 vibration waveform based on a signal transmitted from knock sensor 300 and a crank angle.

At S102 engine ECU 200 determines for all frequency bands whether any detected vibration waveform matches any stored knock waveform model within a predetermined range. In the present embodiment whether the detected vibration waveform and the model match within the predetermined range may be determined for example by whether for each crank angle the engine 100 vibrates with a deviation falling within a reference value or whether such deviations averaged fall within the reference value. Note that a method different than the above may alternatively be employed to determine whether the detected waveform and the stored model match within the predetermined range. If the detected waveform and the stored model match within the predetermined range (YES at S102) the control proceeds with S104. Otherwise (NO at S102) the control proceeds with S108.

At S104 engine ECU 200 determines that engine 100 knocks. At S106 engine ECU 200 introduces a spark retard. At S108 engine ECU 200 determines that engine 100 does not knock. At S110 engine ECU 200 introduces a spark advance.

In accordance with the above described configuration and flow chart for the present embodiment's ignition control system engine ECU 200 operates as will be described hereinafter.

When a driver turns on ignition switch 312 to start engine 100 and knock sensor 300 transmits a signal from which and a crank angle the engine 100 vibration waveform is detected (S100) and a decision is made as to whether the detected waveform matches a stored knock waveform model within the predetermined range (S102).

As shown in Fig. 4, if a vibration waveform indicated by a chained, single dashed line and a knock waveform model indicated by a solid line match within the predetermined range (YES at S102) the control determines that the engine knocks (S104) and introduces a spark retard (S106) to prevent the engine from knocking.

As shown in Fig. 4, if a vibration waveform indicated by a chained, double dashed line and the model indicated by the solid line do not match within the predetermined range (NO at S102), then the control determines that the engine does not

knock even if the vibration waveform has a peak equal to or larger in value than that of vibration of the model (S108). The control introduces a spark advance (S110).

Thus in the present embodiment's ignition control system the engine ECU depends on a signal received from a knock sensor and a crank angle to detect the engine's vibration waveform at a predetermined knock detection gate and compares the vibration waveform with a knock waveform model to determine whether the engine knocks. Thus in addition to vibration's magnitude a crank angle for which vibration occurs can also be depended on to determine whether the engine knocks.

Consequently, whether engine knocks or not can be determined with high precision.

10 Second Embodiment

With reference to Figs. 5-8 the present invention in a second embodiment will be described. The present embodiment is distinguished from the first embodiment by correcting a knock waveform model. The remainder in configuration and function is identical to the first embodiment.

15 With reference to Fig. 5, the present embodiment's ignition control system has engine ECU 200 executing a program controlled in a structure as will be described hereinafter. Note that engine ECU 200 executes the program described in the first embodiment and in addition thereto a program as will be described hereinafter.

At S200 engine ECU 200 determines whether injector 100 is interrupted from injecting a fuel (hereinafter also referred to as "the fuel is cut"). Whether the fuel is cut may be determined by whether the vehicle is in a driving condition cutting the fuel (e.g., whether the accelerator is turned off and the engine rotates at at least a predetermined rate). If the fuel is cut (YES at S200) the control proceeds with S202, otherwise (NO at S202) this process ends.

25 At S202 engine ECU 200 detects the engine 100 vibration waveform from a signal transmitted from knock sensor 300 and a crank angle. At S204 engine ECU 200 depends on the detected vibration waveform to correct a knock waveform model stored in memory 202.

In accordance with the above described configuration and flow chart for the present embodiment's ignition control system engine ECU 200 operates as will be described hereinafter.

When the fuel is cut (YES at S200) the engine 100 vibration waveform is detected (S202). When the fuel is cut, there is no vibration occurring attributed to combustion (including knocking), and the detected waveform will be a waveform of mechanical vibration of engine 100 itself, as shown in Fig. 6. The engine 100 itself's mechanical vibration occurs, regardless of whether the engine knocks, as long as crank shaft 100 rotates. Accordingly, vibration detected by knock sensor 300 constantly contains mechanical vibration of engine 100 itself.

At such, if the Fig. 7 model is fixed, and the engine knocks, the engine 100 itself's mechanical vibration affects so that a detected vibration waveform may not match the model. To eliminate the effect by the mechanical vibration of engine 100 itself, the model has the waveform of the mechanical vibration of engine 100 itself added thereto to correct the model, as shown in Fig. 8 (S204). Thus the model can be more approximate to a waveform of vibration of engine 100 caused when the engine knocks.

Thus in the present embodiment's ignition control system the engine ECU corrects a knock waveform model in a memory by mechanical vibration of the engine itself detected when the fuel is cut. Thus the model can be approximated to the engine's vibration waveform caused when the engine knocks, and whether the engine knocks or not can thus be determined with high precision.

Third Embodiment

With reference to Figs. 9-12 the present invention in a third embodiment will be described. The present embodiment is distinguished from the first embodiment by correcting a knock waveform model. The remainder in configuration and function is identical to the first embodiment.

With reference to Fig. 9, the present embodiment's ignition control system has engine ECU 200 executing a program controlled in a structure as will be described

hereinafter. Note that engine ECU 200 executes the program described in the first embodiment and in addition thereto a program as will be described hereinafter.

At S300 engine ECU 200 determines whether the engine 100 provides an output that transitions (or varies). Whether the engine 100 output is in transition may be determined for example by whether a throttle opening's variation rate, aspirated air's temperature, the engine 100 refrigerant water's temperature and the like are larger in value than predetermined. If the engine 100 output is in transition (YES at S300), the control proceeds with S302. Otherwise (NO at S300) this process ends.

At S302 engine ECU 200 detects the engine 100 vibration waveform from a signal received from knock sensor 300. At S304 engine ECU 200 determines whether the detected vibration waveform does not contain a vibration component attributed to knocking. This decision may be made for example by whether the vibration waveform has a peak having a value smaller than a predetermined value. If the detected vibration waveform does not contain a vibration component attributed to knocking (YES at S304), the control proceeds with S306. Otherwise (NO at S304) this process ends. At S306 engine ECU 200 corrects a knock waveform model in memory 202, as based on the detected vibration waveform.

In accordance with the above described configuration and flow chart for the present embodiment's ignition control system engine ECU 200 operates as will be described hereinafter.

If the engine 100 output is in transition (YES at S300) the engine 100 vibration waveform is detected (S302). If the engine 100 output is in transition, the engine tends to knock, and it is necessary to determine with high precision whether the engine has knocked. When the engine's output is in transition, however, the engine 100 vibration varies even if the engine does not knock. As such, if the Fig. 10 knock waveform model is fixed, and engine 100 knocks, the engine 100 itself's mechanical vibration affects so that the model and a detected vibration waveform do not match, which may result in an erroneous decision that the engine does not knock.

To prevent such erroneous decision, as shown in Fig. 11, if a detected vibration waveform does not contain a vibration component attributed to knocking (YES at S304), the vibration waveform is added to a knock waveform model stored in memory 202 to correct the model, as shown in Fig. 12 (S306). This allows the model stored in memory 202 to match by the engine 100 vibration waveform caused when the engine 5 knocks.

Thus in the present embodiment's ignition control system the engine ECU 10 corrects a knock waveform model stored in a memory by a vibration waveform detected when the engine's output is in transition. Thus the model can be more approximate to a vibration waveform caused when the engine knocks, and whether the engine knocks or 10 not can be determined with high precision.

Fourth Embodiment

With reference to Fig. 13 the present embodiment in a fourth embodiment will be 15 described. While in the first embodiment a decision as to whether an engine knocks is made from waveforms of vibrations of all frequency bands, in the present embodiment such decision is made from a waveform of vibration of a frequency equal to or larger than a predetermined frequency. The remainder in configuration and hence function is identical to the first embodiment.

With reference to Fig. 13, in present embodiment's ignition control system 20 engine ECU 200 executes a program controlled in a structure as will be described hereinafter.

At S400 engine ECU 200 determines whether engine 100 is controlled to have a spark retard from a predetermined crank angle (formed for example when engine 100 starts) (hereinafter such control will also be referred to as "spark retard control"). 25 Whether spark retard control is effected may be determined from whether the vehicle is in a condition subject to spark retard, such as whether the catalyst's temperature is lower than a predetermined temperature, whether the vehicle is rapidly accelerated, or the like. If spark retard control is effected (YES at S400), the control proceeds with S402,

otherwise (NO at S400) this process ends.

At S402 engine ECU 200 detects the engine 100 vibration waveform based on a signal transmitted from knock sensor 300. At S404 engine ECU 200 determines whether a detected vibration waveform that is equal to or higher than a predetermined frequency matches a knock waveform model stored in memory 202 within a predetermined range. More specifically, whether the engine knocks is not determined for waveforms of vibration of low frequency. If the model and the detected vibration waveform match within the predetermined range (YES at S404) the control proceeds with S406, otherwise (NO at S404) the control proceeds with S410.

At S406 engine ECU 200 determines that engine 100 knocks. At S408 engine ECU 200 introduces a spark retard. At S410 engine ECU 200 determines that engine 100 does not knock. At S412 engine ECU 200 introduces a spark advance.

In accordance with the above described configuration and flow chart for the present embodiment's ignition control system engine ECU 200 operates as will be described hereinafter.

When spark retard control is effected (YES at S400), the engine 100 vibration waveform is detected (S402). During spark retard control, there exists a crank angle range for which a waveform of vibration of low frequency is analogous to a waveform provided when the engine knocks despite that the engine does not knock (hereinafter this range will be referred to as a pseudo knock range). As such, if whether the engine knocks is determined from the waveform of vibration of low frequency, a decision that the engine knocks may erroneously be made despite that the engine does not knock.

To prevent such erroneous decision associated with the pseudo knock range, a decision is made as to whether a detected vibration waveform that is equal to or higher than a predetermined frequency matches a knock waveform model stored in memory 202 within a predetermined range (S404).

If the model and the detected vibration waveform match within the predetermined range (YES at S404) a decision is made that engine 100 knocks (S406)

and a spark retard is introduced (S408) to prevent the engine from knocking.

When the model and the detected vibration waveform do not match within the predetermined range (NO at S404), a decision is made that engine 100 does not knock (S410), and a spark advance is introduced (S412).

5 Thus in the present embodiment's ignition control system when spark retard control is effected the engine ECU determines whether a detected vibration waveform that is equal to or higher than a predetermined frequency matches a knock waveform model stored in a memory within a predetermined range. If so, a decision is made that the engine knocks. Otherwise, a decision is made that the engine does not knock.

10 This can prevent an erroneous decision associated with a pseudo knock range for which a waveform of vibration of low frequency is analogous to a waveform provided when the engine knocks.

Fifth Embodiment

With reference to Figs. 14-18 the present invention in a fifth embodiment will be described. The present invention differs from the first embodiment in that waveforms of vibration of different frequency bands are composited together to detect a vibration waveform. Furthermore a knock waveform model provides vibration having a magnitude that does not uniquely correspond to a crank angle. The remainder in configuration and hence function is identical to the first embodiment.

20 As shown in Fig. 14, the engine ECU 200 memory 202 has stored therein a knock waveform model corresponding to a portion of vibration, represented in magnitude, caused by knocking that follows a peak. Note that a knock waveform model that corresponds to vibration attributed to knocking following the rise of the vibration, may be stored.

25 In the model, vibration's magnitude is represented by a dimensionless number of 0 to 1 and does not uniquely correspond to a crank angle. More specifically, for the present embodiment's knock waveform model, after vibration's peak value in magnitude the vibration is reduced in magnitude as the crank angle increases, however the crank

angle for which the vibration has the peak value in magnitude is not determined. Furthermore, the model is a wave of a composition of vibration of frequency bands. In Fig. 14, CA represents a crank angle.

With reference to Fig. 15, in present embodiment's ignition control system 5 engine ECU 200 executes a program controlled in a structure as will be described hereinafter.

At S500 engine ECU 200 detects the engine 100 vibration in magnitude from a signal transmitted from knock sensor 300. The vibration's magnitude is represented by a value of voltage output from knock sensor 300. Note that the vibration's magnitude 10 may be represented by a value corresponding to the value of the voltage output from knock sensor 300. The vibration's magnitude is detected in a combustion process for an angle from a top dead center to (a crank angle of) 90°.

At S502 engine ECU 200 calculates for a crank angle of every five degrees an integration (hereinafter also be referred to as an "integrated value") of values of voltage 15 output from knock sensor 300 (i.e., representing magnitude of vibration). The integrated value is calculated for vibration of each frequency band. Thus a waveform of vibration of each frequency band is detected. Note that the integrated value may be calculated for a crank angle other than every five degrees.

At 504 engine ECU 200 composites waveforms of vibration of frequency bands. 20 Thus engine 100 vibration waveform is detected. At S506 engine ECU 200 uses the largest integrated value of waveforms of vibration composited to normalize the engine's vibration waveform. Herein, normalizing a waveform means dividing each integrated value by the largest integrated value to represent the vibration's magnitude by a dimensionless number of 0 to 1.

25 At S508 engine ECU 200 calculates a coefficient of correlation K, a value associated with a deviation of a normalized vibration waveform and a knock waveform model. A timing of the normalized vibration waveform achieving vibration maximized in magnitude and that of the model achieving vibration maximized in magnitude are

matched, while the deviation in absolute value (or an amount of offset) of the normalized vibration waveform and the model is calculated for each crank angle (of five degrees) to calculate the coefficient of correlation K.

If the normalized vibration waveform and the model provides a deviation $\Delta S (I)$ in absolute value for each crank angle and the model's vibration as represented in magnitude integrated by the crank angle (i.e., the model's area) is represented by S, wherein I = 1 to 18, then the coefficient of correlation K is calculated by an equation $K = (S - \sum \Delta S (I))/S$, wherein $\sum \Delta S (I)$ represents a sum of $\Delta S (I)$ s for the top dead center to 90°. Note that the coefficient of correlation K may be calculated by a different 10 method.

At S510 engine ECU 200 calculates a knock intensity N. If calculated integrated values have a largest value P and engine 100 does not knock and vibrates with a magnitude represented in value by a background level (BGL), then knock intensity N is calculated by an equation $N = P \times K / BGL$. The BGL is stored in 15 memory 202. Note that knock intensity N may be calculated by a different method.

At S512 engine ECU 200 determines whether knock intensity N is larger than a predetermined reference value. If so (YES at S512) the control proceeds with S514, otherwise (NO at S512) the control proceeds with S518.

At S514 engine ECU 200 determines that engine 100 knocks. At S516 engine ECU 200 introduces a spark retard. At S518 engine ECU 200 determines that engine 100 does not knock. At S502 engine ECU 200 introduces a spark advance. 20

In accordance with the above described configuration and flow chart for the present embodiment's ignition control system engine ECU 200 operates as will be described hereinafter.

When a driver turns on ignition switch 312 and engine 100 starts, the engine 100 vibration is detected in magnitude from a signal transmitted from knock sensor 300 (S500). 25

In a combustion process for a range from the top dead center to 90° an

integrated value for every five degrees is calculated for each frequency (S502) and integrated values calculated for the frequencies are composited together (S504). Thus, as shown in Fig. 16, the engine 100 vibration waveform is detected. Note that while Fig. 16 represents a vibration waveform in a rectangle, each integrated value may be 5 connected by a line to represent the vibration waveform. Furthermore, each integrated value alone may be represented in a dot to represent the vibration waveform.

Using an integrated value for every five degrees to detect a vibration waveform allows minimized detection of a waveform of vibration having a complicated form attributed to vibration having a magnitude varying minutely. This can help to compare 10 a detected vibration waveform with a knock waveform model.

Of thus detected vibration waveforms' integrated values, the maximum integrated value is used to normalize the engine's vibration waveform (S506). Herein the integrated value for 15° to 20° is used to normalize the engine's vibration waveform for the sake of illustration.

15 In the normalization, an integrated value for each crank angle is divided by that for 15 to 20° and, as shown in Fig. 17, the magnitude of vibration in the vibration waveform is represented by a dimensionless number of 0 to 1. By this normalization a detected vibration waveform and a knock waveform model can be compared regardless of magnitude of vibration. This can eliminate the necessity of storing a large number of 20 knock waveform models corresponding to magnitude of vibration and thus help to create a knock waveform model.

As shown in Fig. 18, a timing of a normalized vibration waveform providing vibration maximized in magnitude and that of a knock waveform model providing vibration maximized in magnitude are matched, while a deviation in absolute value ΔS 25 (I) of the normalized vibration waveform and the knock waveform model is calculated for each crank angle. Sum $\Sigma \Delta S$ (I) of such ΔS (I)s and value S representing a magnitude of vibration in knock waveform model that is integrated by crank angle are used to calculate the coefficient of correlation $K = (S - \Sigma \Delta S$ (I)) (S508). This allows a

degree of matching of a detected vibration waveform and a knock waveform model to be numerically represented and thus objectively determined.

Furthermore the product of the calculated coefficient of correlation K and the maximum integrated value P is divided by the BGL to calculate knock intensity N (S512). Thus, in addition to the degree of matching between the detected vibration waveform and the knock waveform model, vibration's magnitude can also be depended on to analyze in more detail whether the engine 100 vibration is attributed to knocking.

5

If knock intensity N is larger than a predetermined reference value (YES at S512) a decision is made that engine knocks (S514) and a spark retard is introduced (S516) to prevent the engine from knocking.

10

If knock intensity N is not larger than the predetermined reference value (NO at S512), a decision is made that the engine does not knock (S108) and a spark advance is introduced (S110).

15

Thus in the present embodiment's ignition control system the engine ECU detects the engine's vibration waveform based on a signal transmitted from a knock sensor and compares the vibration waveform with a knock vibration model to calculate the coefficient of correlation K. Furthermore, the product of the coefficient of correlation K and the vibration waveform's maximum integrated value P is divided by the BGL to calculate knock intensity N. If knock intensity N is larger than a reference value, a decision is made that the engine knocks. If knock intensity N is not larger than the reference value, a decision is made that the engine does not knock. Thus, in addition to a degree of matching between a detected vibration waveform and a knock waveform model, vibration's magnitude can also be depended on to analyze in more detail whether the engine's vibration is attributed to knocking. Thus whether the engine knocks or not can be determined with high precision.

20

25

Although the present invention has been described and illustrated in detail, it is clearly understood that the same is by way of illustration and example only and is not to be taken by way of limitation, the spirit and scope of the present invention being limited only by the terms of the appended claims.

CLAIMS

1. A knock determination device for an internal combustion engine, comprising:

5 a crank angle detector (306) detecting said internal combustion engine's crank angle;

a waveform detector (200) detecting a waveform of vibration of said internal combustion engine for a predetermined crank angle range;

10 a storage (202) previously storing a waveform of vibration of said internal combustion engine for said predetermined crank angle range;

a corrector (200) correcting the waveform of the vibration of said internal combustion engine stored in said storage, as based on a waveform of vibration of said internal combustion engine detected when said internal combustion engine is in a predetermined driving condition; and

15 a determiner (200) determining whether said internal combustion engine knocks, as based on a result of comparing the detected waveform and the corrected waveform.

2. The knock determination device according to claim 1, wherein said determiner (200) determines that said internal combustion engine knocks when the 20 detected waveform and the corrected waveform match within a predetermined range.

3. The knock determination device according to claim 1, wherein said corrector (200) corrects the waveform of the vibration of said internal combustion engine stored in said storage, as based on a waveform of vibration of said internal combustion engine detected when fuel supplied to said internal combustion engine is 25 interrupted.

4. The knock determination device according to claim 1, wherein:

said corrector (200) corrects the waveform of the vibration of said internal combustion engine stored in said storage, as based on a waveform of vibration of said internal combustion engine detected when said internal combustion engine's output transitions; and

5 when said internal combustion engine's output transitions, said determiner (200) determines whether said internal combustion engine knocks, as based on a result of comparing the detected waveform and the corrected waveform.

10 5. A knock determination device for an internal combustion engine, comprising:

a crank angle detector (306) detecting said internal combustion engine's crank angle;

a waveform detector (200) detecting a waveform of vibration of said internal combustion engine for a predetermined crank angle range;

15 a storage (202) previously storing a waveform of vibration of said internal combustion engine for said predetermined crank angle range; and

20 a determiner (200) determining whether said internal combustion engine knocks, as based on a result of comparing the detected waveform and the stored waveform, wherein when said internal combustion engine has a spark retard as compared with a predetermined crank angle, said determiner (200) determines whether said internal combustion engine knocks, as based on a result of comparing a waveform of vibration of a frequency higher than a predetermined frequency with the stored waveform.

6. An ignition control system comprising:

25 said knock determination device as recited in any of claims 1-5; and

a spark retard device providing said internal combustion engine with a spark retard when said knock determination device determines that said internal combustion engine knocks.

7. A knock determination device for an internal combustion engine, comprising:

5 a crank angle detector (306) detecting said internal combustion engine's crank angle;

a vibration detector (200) detecting a value associated in magnitude with vibration of said internal combustion engine;

10 a waveform detector (200) detecting, as based on the value associated in magnitude with vibration of said internal combustion engine, a waveform of vibration of said internal combustion engine for a predetermined crank angle range;

a storage (202) previously storing a waveform of vibration of said internal combustion engine; and

15 a determiner (200) determining whether said internal combustion engine knocks, as based on a result of comparing the detected waveform with the stored waveform, wherein said waveform detector (200) detects the waveform of vibration of said internal combustion engine, as based on the value associated in magnitude with vibration of said internal combustion engine divided by a maximum one of values associated in magnitude with vibration detected.

20 8. The knock determination device according to claim 7, wherein said vibration detector (200) detects at a predetermined interval the value associated in magnitude with vibration of said internal combustion engine.

25 9. The knock determination device according to claim 7, wherein said determiner (200) determines whether said internal combustion engine knocks, as based on a result of comparing the detected waveform with the stored waveform while a timing of the detected waveform attaining vibration maximized in magnitude and that of the stored waveform attaining vibration maximized in magnitude are matched.

10. The knock determination device according to claim 7, further comprising a deviation calculator (200) calculating a deviation of the detected waveform and the stored waveform, said determiner (200) determining from said deviation whether said 5 internal combustion engine knocks.

11. The knock determination device according to claim 10, wherein said determiner (200) determines whether said internal combustion engine knocks from said deviation and in addition thereto said maximum value associated in magnitude with 10 vibration of said internal combustion engine.

FIG. 1

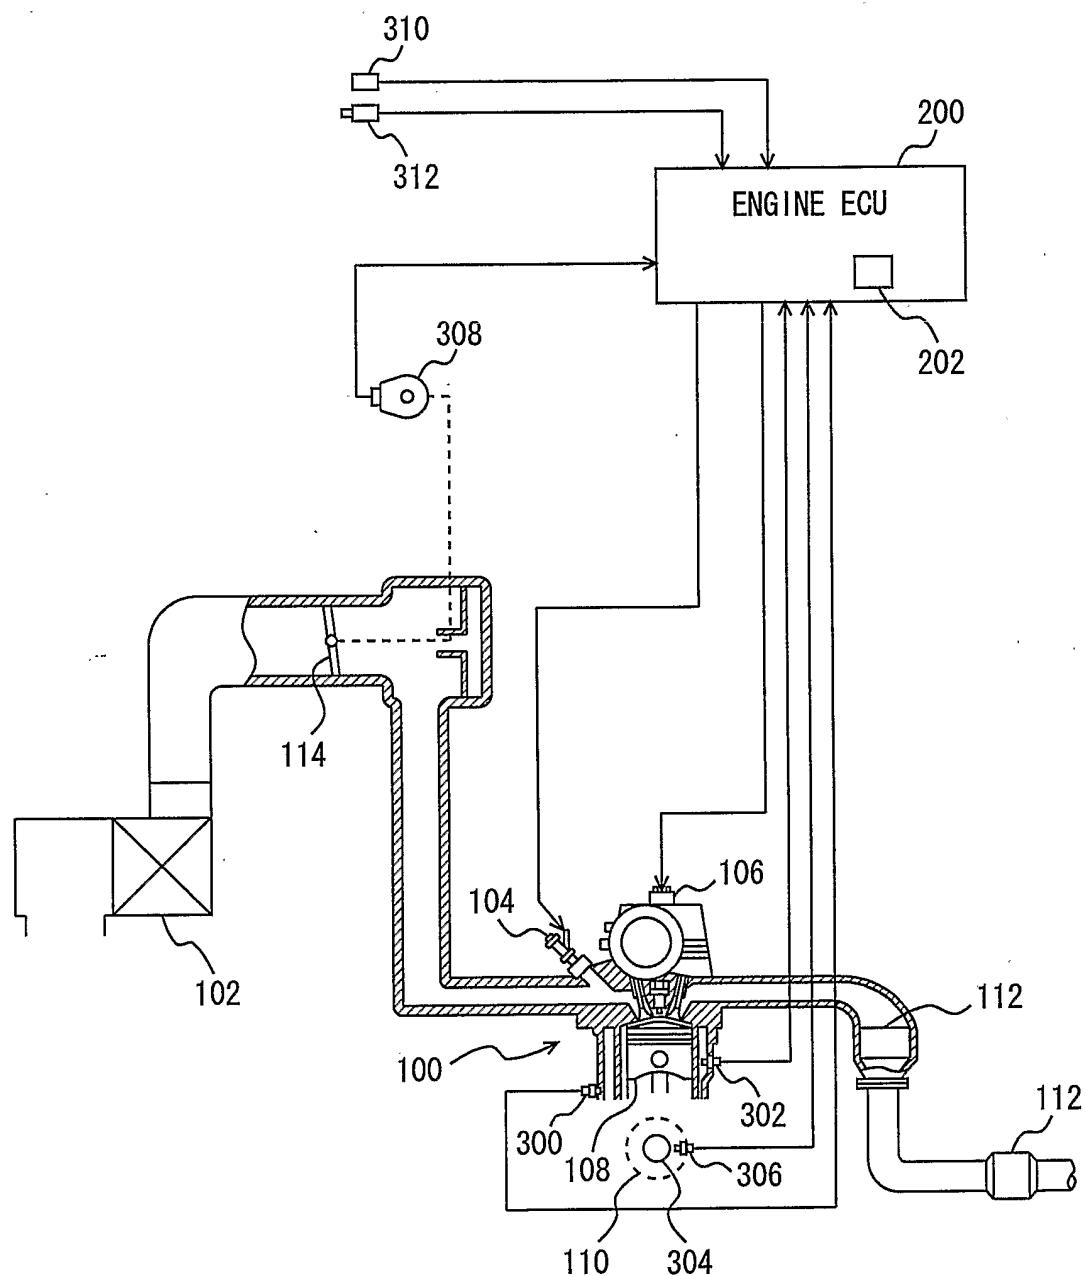


FIG. 2

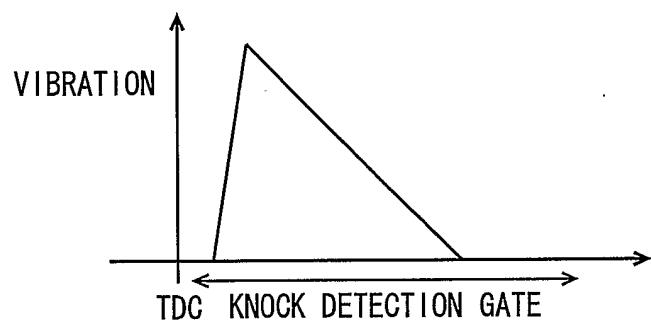


FIG. 3

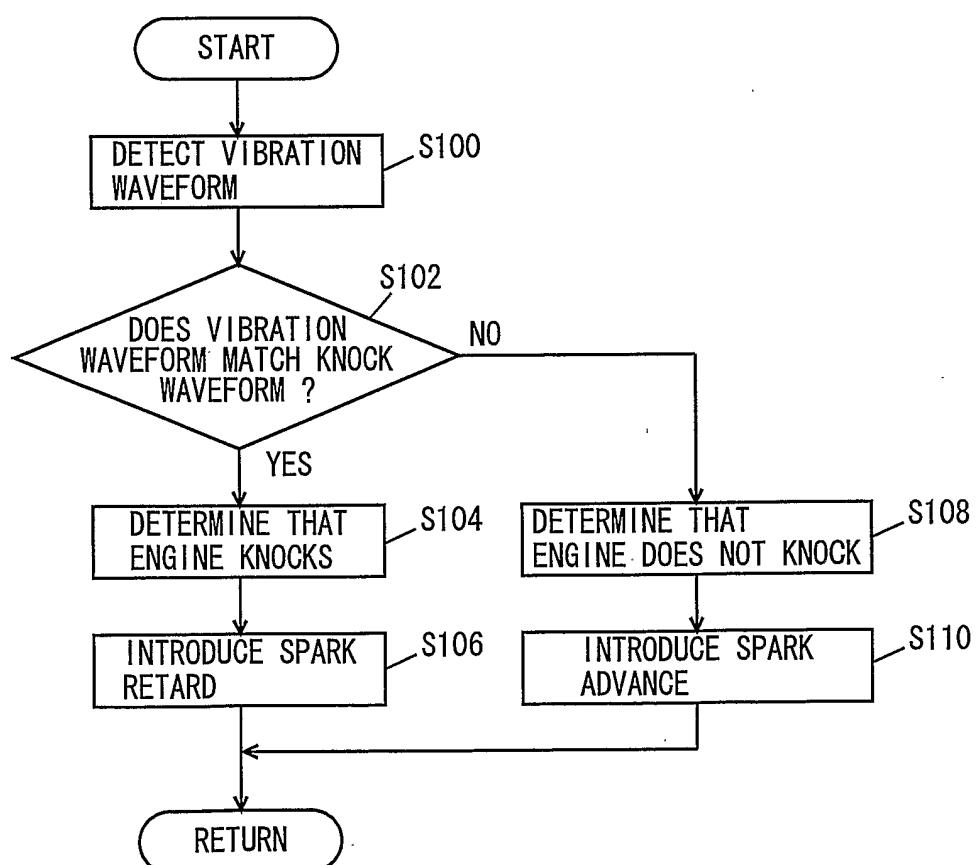


FIG. 4

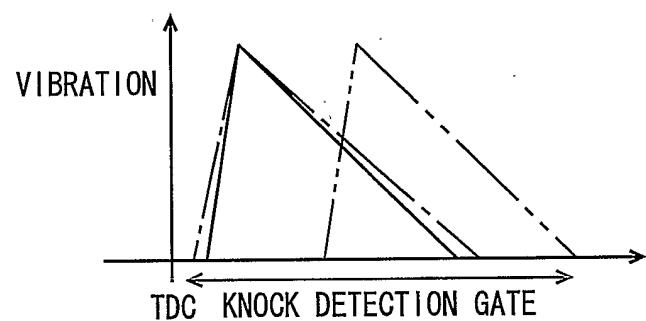


FIG. 5

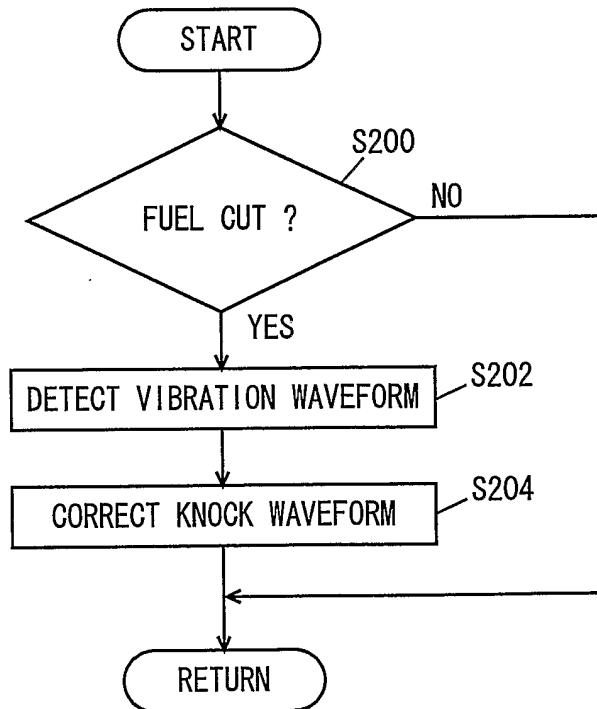


FIG. 6

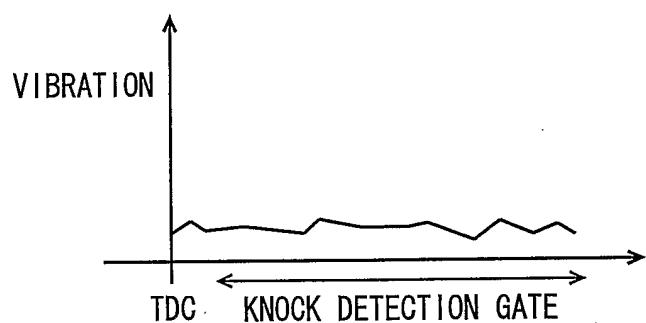


FIG. 7

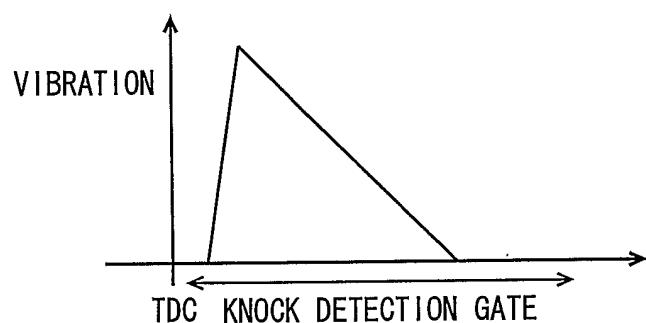


FIG. 8

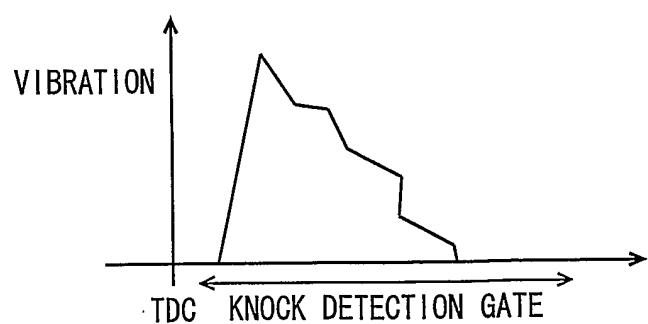


FIG. 9

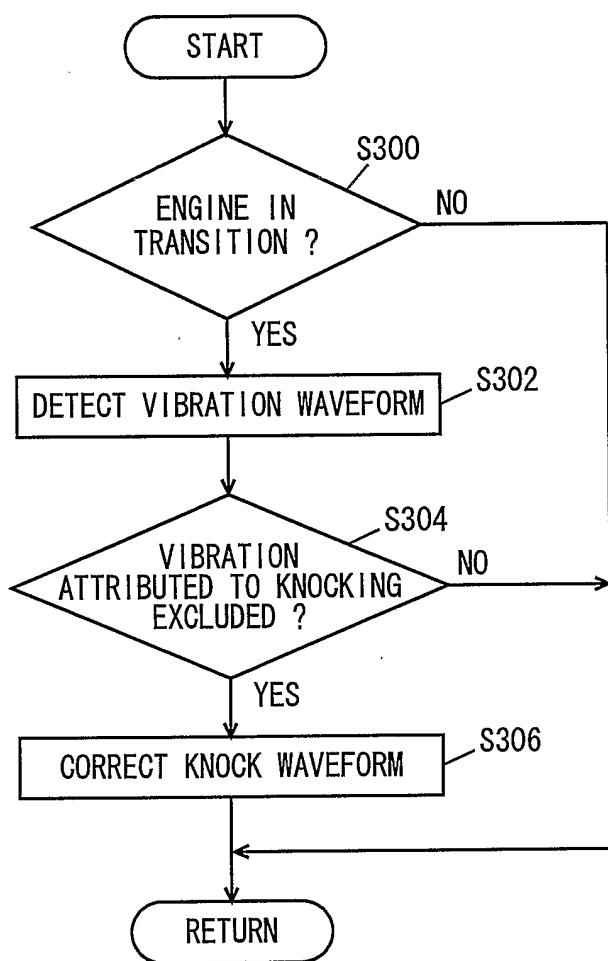


FIG. 10

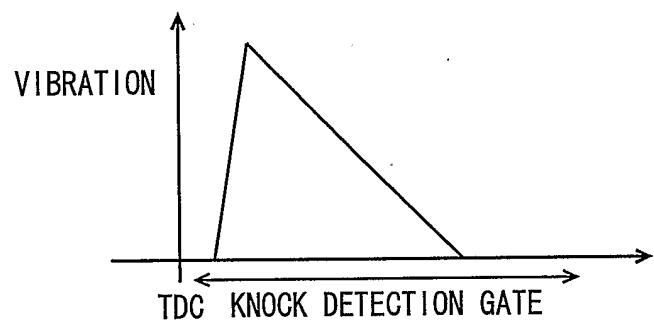


FIG. 11

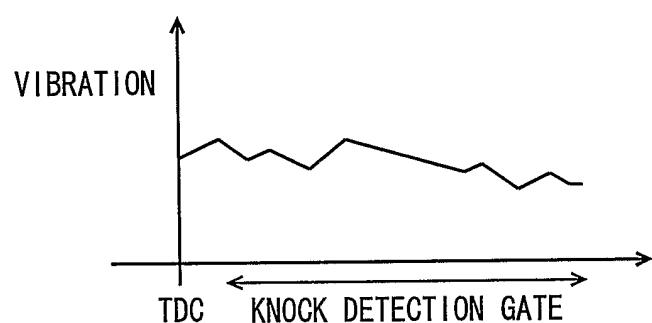


FIG. 12

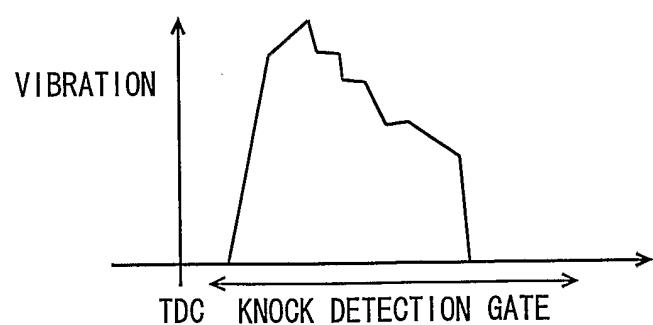
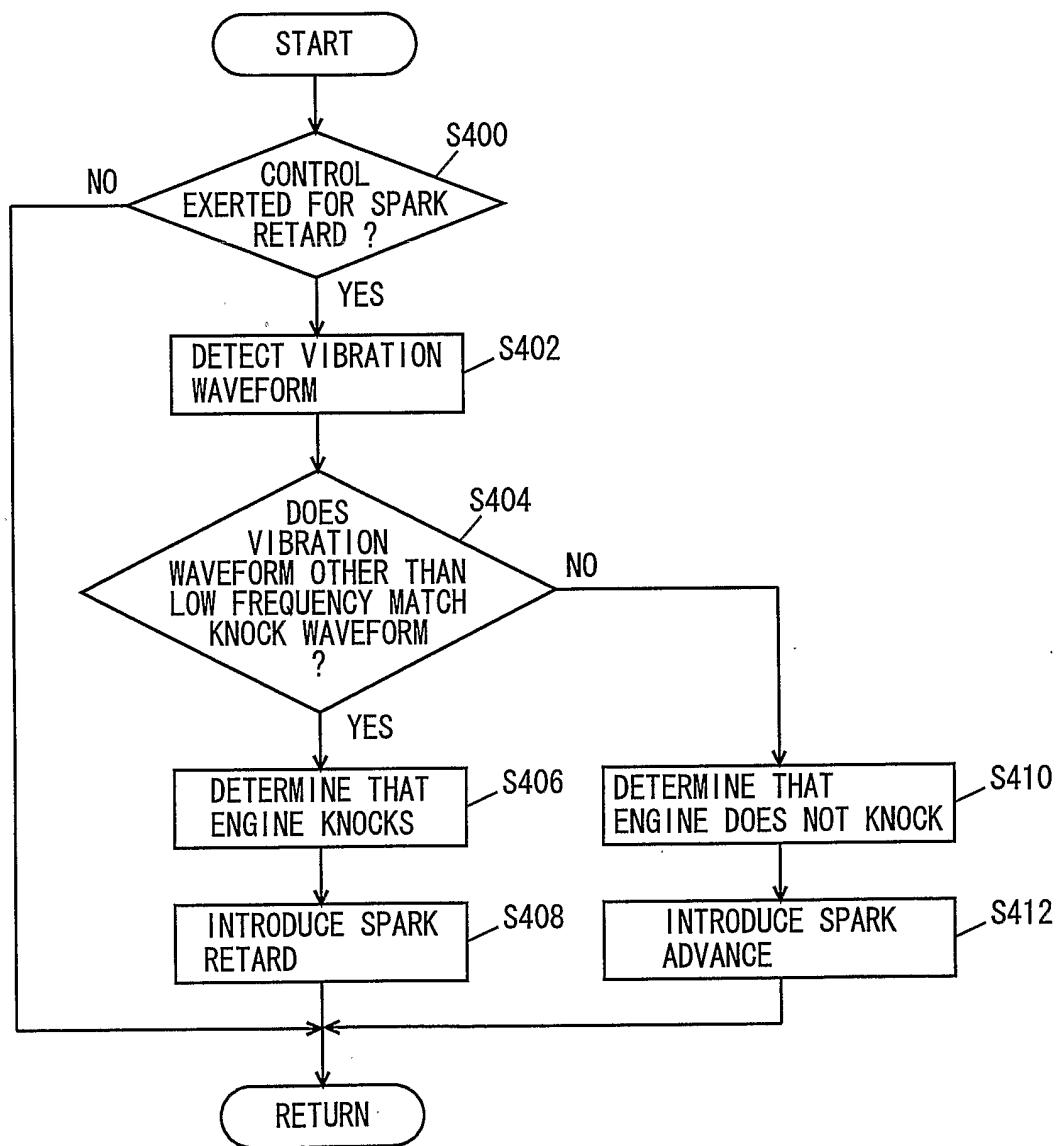


FIG. 13



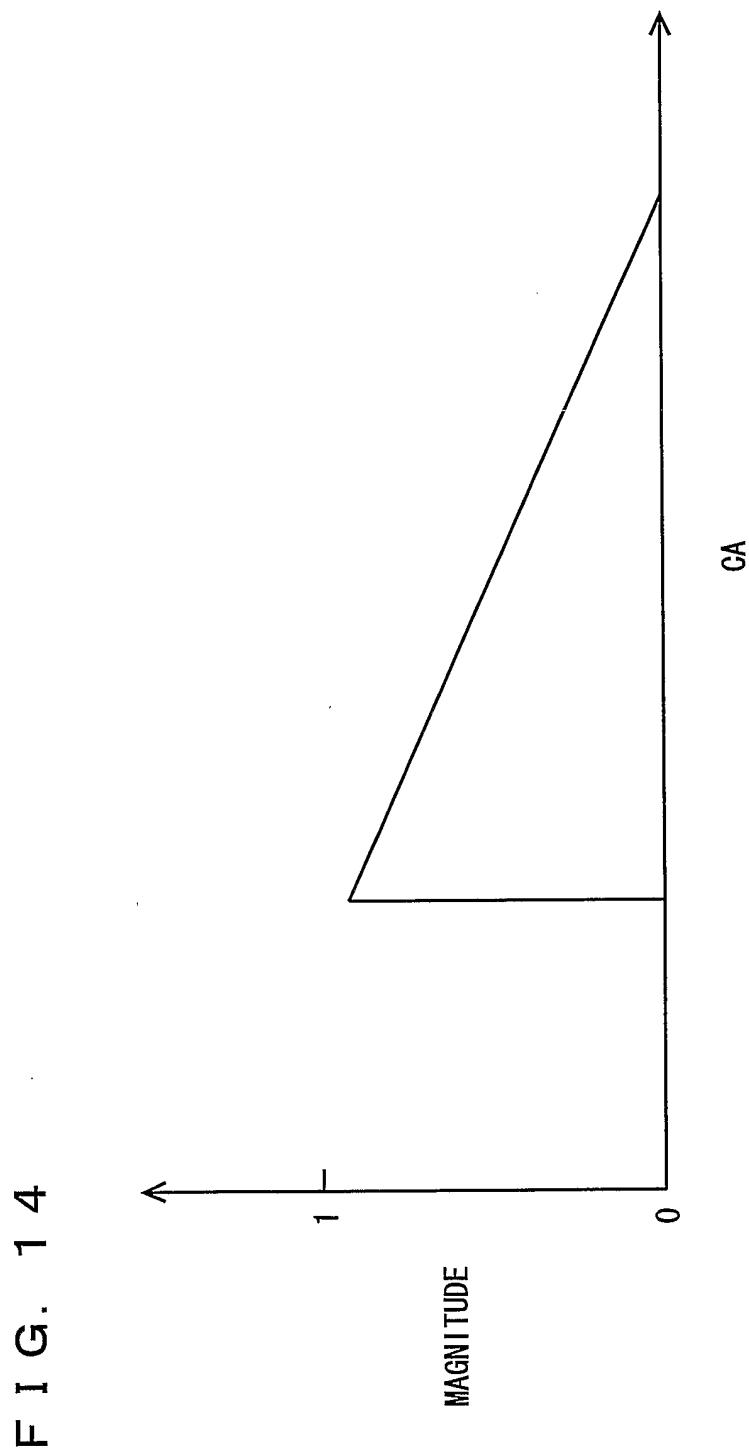


FIG. 14

FIG. 15

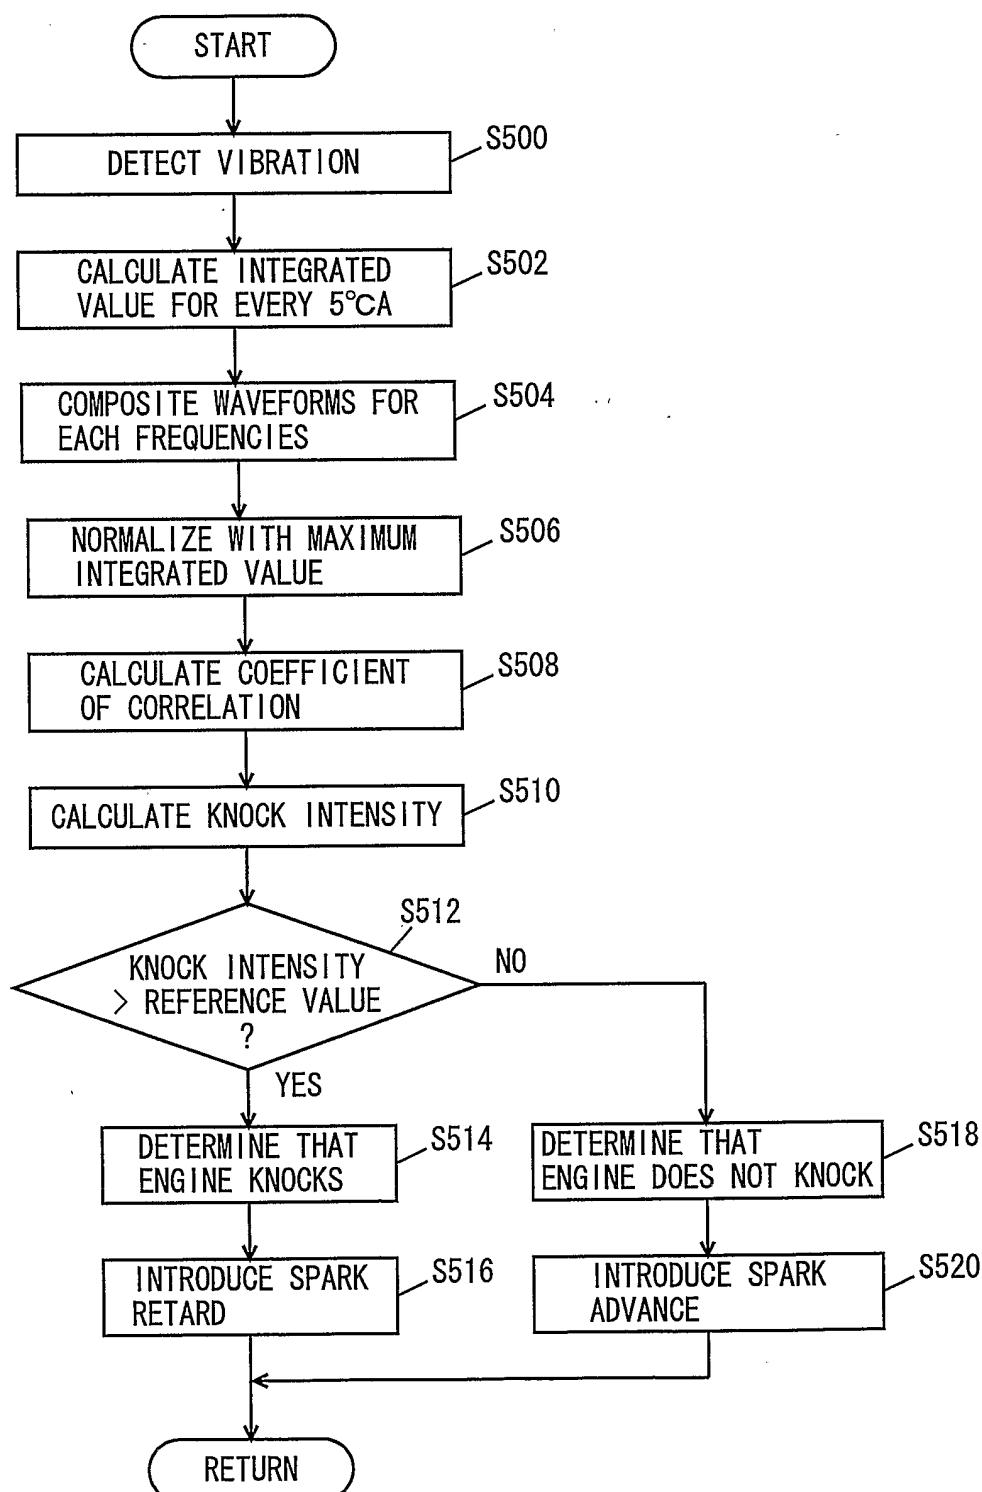


FIG. 16


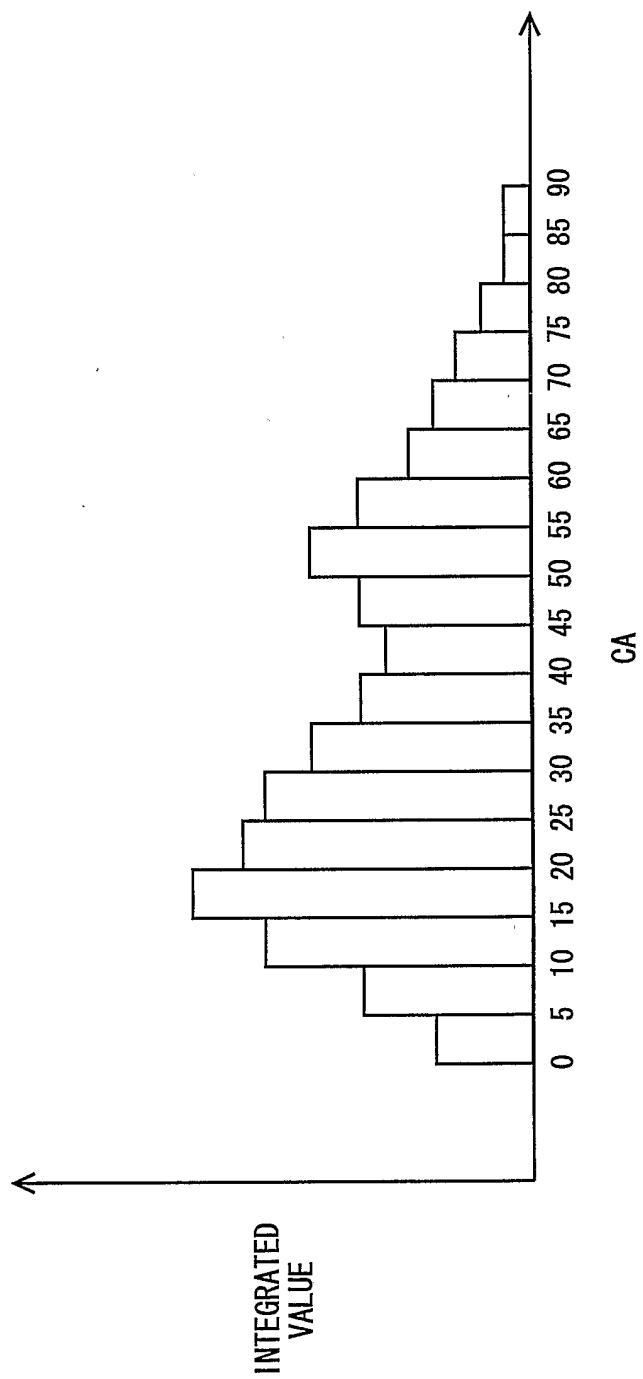


FIG. 17



11/12

FIG. 18

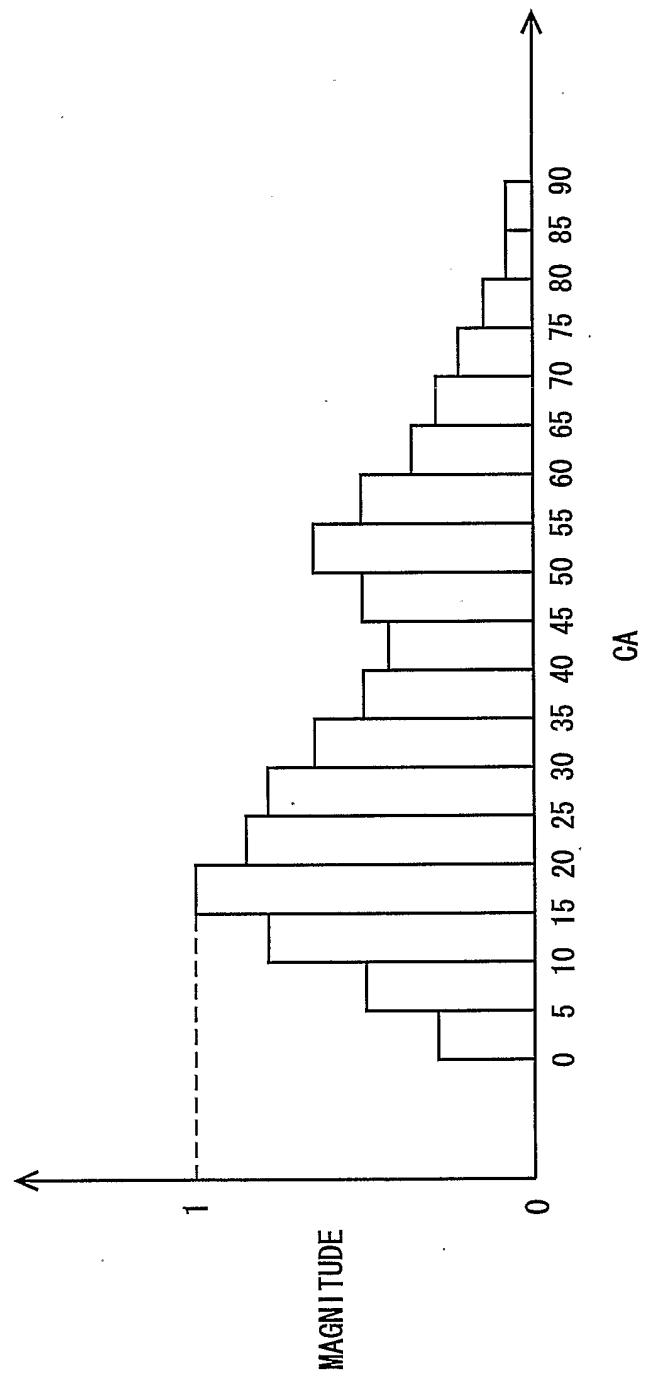