

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
8 October 2009 (08.10.2009)

(10) International Publication Number  
**WO 2009/122339 A1**

- (51) **International Patent Classification:**  
F21V 7/22 (2006.01) F21Y 101/02 (2006.01)
- (21) **International Application Number:**  
PCT/IB2009/051303
- (22) **International Filing Date:**  
30 March 2009 (30.03.2009)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
08154010.6 3 April 2008 (03.04.2008) EP
- (71) **Applicant (for all designated States except US):** KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** HOLTEN, Petrus, A., J. [NL/NL]; c/o High Tech Campus, Building 44, NL-5656 AE Eindhoven (NL). FABRIEK, Vincent [NL/NL]; c/o High Tech Campus, Building 44, NL-5656 AE Eindhoven (NL). TORDINI, Giorgia [IT/NL]; c/o High Tech Campus, Building 44, NL-5656 AE Eindhoven (NL). WEGH, Rene, T. [NL/NL]; c/o High Tech Campus, Building 44, NL-5656 AE Eindhoven (NL). HUISMAN, Bart-Hendrik [NL/NL]; c/o High Tech Campus, Building 44, NL-5656 AE Eindhoven (NL).
- (74) **Agents:** BEKKERS, Joost, J., J. et al.; High Tech Campus, Building 44, NL-5656 AE Eindhoven (NL).

(81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


**Declarations under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

**Published:**

— with international search report (Art. 21(3))

(54) **Title:** IMPROVED WHITE LIGHT-EMITTING DEVICE

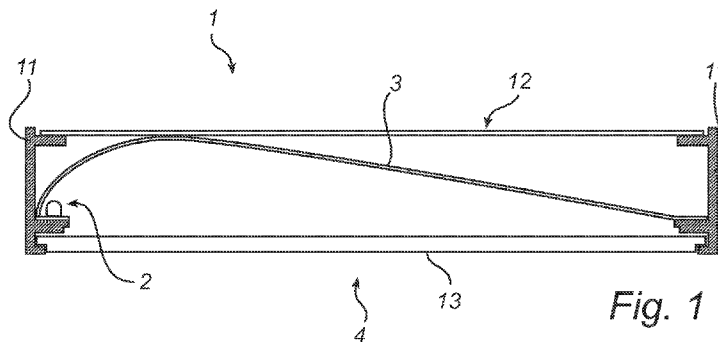

(57) **Abstract:** A light-emitting device comprises a light source adapted to emit light of a first wavelength range; a reflective body comprising a reflective layer; a wavelength converting layer comprising a wavelength converting material adapted to absorb light of said first wavelength range and to emit light of a second wavelength range, said wavelength converting layer and said light source being arranged mutually spaced apart; and light-scattering elements adapted to scatter light of at least said first wavelength range; wherein at least part of said light-scattering elements are arranged in the path of light from said light source to said wavelength converting layer. The light-emitting device according to the invention provides improved uniformity in colour and also improved brightness uniformity.



WO 2009/122339 A1

Improved white light-emitting device

## FIELD OF THE INVENTION

The invention relates to the field of light-emitting devices comprising a wavelength converting material arranged at a distance from a light source, and scattering elements.

5

## BACKGROUND OF THE INVENTION

Light emitting diode (LED) based light-emitting devices are today increasingly used for a wide variety of lighting applications, including for instance office lighting luminaires, downlighters and retrofit lamps. White light may be obtained from an LED by using a blue LED and a wavelength converting material, sometimes referred to as a phosphor, which absorbs part of the blue light emitted by the LED and reemits light of longer wavelength(s). For reasons of efficacy it is preferable to have the wavelength converting material arranged at a distance from the LED. Usually, the wavelength converting material is applied on a substrate, which is for example arranged at the light exit window of the device. However, the adhesion of the wavelength converting material to the substrate often requires the use of a transparent coating film which may decrease the optical efficiency of the lighting device.

10

15

Since the light emitted by the wavelength converting material is emitted in all directions, a back reflector is generally used for reflect light emitted back into the optical chamber so that it is redirected towards the exit window. However, to provide a homogeneous white light output, the non-converted light, i.e., the blue light, must be effectively scattered as well. Usually, scattering of non-converted light is achieved by placing a diffuser at the exit window and/or using a diffusing back reflector. The use of an additional optical element, such as a diffuser, with reflections on all surfaces will however lead to a lower light output of the lighting device.

20

25

WO 2007/130536 discloses a lighting device which comprises solid state light emitters such as LEDs, a thermal conduction element and a reflective element. The lighting device may optionally include a lumiphor such as a phosphor. However, WO 2007/130536 does not provide a solution to the above-mentioned problem of adhesion of the phosphor.

Thus, there is a need in the art for improved LED-based lighting devices.

## SUMMARY OF THE INVENTION

5 It is an object of the invention to provide an improved high efficacy LED-based light-emitting device which provides homogeneous white light output.

In one aspect, the invention relates to a light-emitting device comprising a light source adapted to emit light of a first wavelength range; a reflective body comprising a reflective layer, said reflective body being arranged to receive light emitted by said light source and to reflect said light towards a light exit window of the light-emitting device;

10 a wavelength converting layer comprising a wavelength converting material adapted to absorb light of said first wavelength range and to emit light of a second wavelength range, said wavelength converting layer and said light source being arranged mutually spaced apart; and

15 light-scattering elements adapted to scatter light of at least said first wavelength range;

wherein at least part of said light-scattering elements are arranged in the path of light from said light source to said wavelength converting layer. Preferably, the light source comprises at least one light-emitting diode.

20 It has been found that by arranging light-scattering elements and the wavelength converting layer such that light from the light source is scattered before part of the light is converted by the wavelength converting material, improved uniformity in colour and also improved brightness uniformity is achieved, compared to the case of wavelength conversion before scattering of the non-converted light. Preferably the light-emitting device comprises a diffusing layer arranged in the path of light from said light source to said wavelength converting layer, said diffusing layer comprising at least part of said light-scattering elements.

30 In order to further improve the light mixing properties of the light-emitting device, the wavelength converting layer may comprise at least part of said light-scattering elements. By integrating light-scattering elements in the wavelength converting layer, further improved scattering of non-converted light is achieved, resulting in a higher output of homogeneous white light. Moreover, by including scattering elements in the wavelength converting layer, the optical path length of the light that is to be converted by the wavelength converting material in the wavelength converting layer is increased, making the conversion

more efficient. As a result, less wavelength converting material may be used to achieve a certain level of wavelength conversion.

Furthermore, the reflective layer may comprise at least part of said light-scattering elements. In this way further scattering of non-converted light, and optionally also of converted light, is provided.

For example, the wavelength converting layer may be located in said light exit window.

Furthermore, the reflective body may comprise the wavelength converting layer, said wavelength converting layer being arranged in the path of light from said light source to said reflective layer. The reflective body may optionally further comprise said diffusing layer. By thus integrating the wavelength converting layer and optionally the diffusing layer in the reflective body, which is arranged in the interior of the light-emitting device, there is less need to protect the wavelength converting layer and/or the diffusing layer from mechanical damage, compared to when these layers are located at the exit window. The integrated arrangement may be thus advantageous since mechanical damage, such as scratches, in a body of wavelength converting and diffusing layers appear in different colours, which would be perceived as disturbing.

Preferably said reflective layer, said wavelength converting layer and, when present, said diffusing layer form a multi-layer film.

It has been found that by arranging a wavelength converting layer closely between the diffusing layer and the reflective layer, such as in a multi-layer film, very effective diffuse reflection is obtained. Since light emitted by the light source is scattered in the diffusing layer before entering the wavelength conversion layer and also after being reflected by the wavelength converting layer, the scattering of the reflected (both converted and non-converted) light is very effective. In particular, scattering of the non-converted light is improved compared to conventional light-emitting devices having a separate diffuser arranged at the exit window.

Moreover, by arranging a wavelength converting layer between the diffusing layer and the reflective layer, the wavelength converting layer is protected by the diffusing layer, resulting in the wavelength converting layer not being visible when the light emitting device is switched off. This is a major advantage, since the visibility of the coloured phosphor is generally perceived as a disadvantage of the application of a wavelength converting layer. The application of a diffusing layer on top of the wavelength converting

layer provides scattering of white light in the diffusing layer and weakens the hindering color contrast.

Furthermore, arranging a wavelength converting layer between two other layers also allows for improving of the adhesion of the wavelength converting material. For example, the diffusing layer and/or the reflective layer may have an open structure providing enclosure of particles of wavelength converting material into the diffusing and reflective layers, thus avoiding a delamination after combining the layers.

It is to be noted that the present invention relates to all possible combinations of the appended claims.

Embodiments of the invention will now be described in detail with reference to the appended drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a a schematic cross-sectional view of a light-emitting device according to embodiments of the invention.

Fig. 2 is a a schematic cross-sectional view of a reflective body according to an embodiment of the invention.

Fig. 3 is a a schematic cross-sectional view of a reflective body according to another embodiment of the invention.

#### DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 shows a light-emitting device 1 comprising a light source 2, which is adapted to emit light of a first wavelength range. The light source is preferably adapted to emit blue light (wavelength range of about 400-500 nm); however, the light source may also emit light of other wavelengths, for example UV radiation and/or visible light of other colours such as green, yellow or red. Preferably, the light source 2 comprises at least one light-emitting diode (LED). Any type of conventional LED or combination of conventional LEDs may be used. Optionally, the light-emitting device may comprise a plurality of light sources.

Furthermore, a reflective body 3 is arranged to receive light emitted by the light source 2 and to reflect this light towards a light exit window 4 of the light-emitting device. The reflective body 3 may have any desired shape. For example, the reflective body 3 may have a flat shape. The reflective body 3 may also have a curved or concave shape. Optionally, the reflective body 3 may be partly transmissive.

Light may exit the light-emitting device 1 through the light exit window 4. The light exit window 4 may be open, or, as in Fig. 1, it may be at least partly covered by a translucent plate 13. The translucent plate 13 may be at least partly transparent. The translucent plate 13 may also have a diffusing function and/or a light beam shaping function (e.g. comprising an optical structure with lenses and/or prisms).

Optionally, when the reflective body 3 is partly light transmissive, light may also exit the light-emitting device 1 through a back area 12, which is located opposite the light exit window 4. The back area 12 may then be referred to as a second light exit window. The second light exit window may be open, or it may be at least partly covered by a translucent plate as described above for the light exit window 4. When the reflective body 3 is non-transmissive, the back area 12 may be a non-translucent back wall.

As is shown in Fig. 1, the reflective body 3 is located in a space defined by side walls 11, the light exit window 4 and the back area 12. The reflective body and optionally the side walls 11 may define a light mixing chamber. Light may exit the light mixing chamber through the light exit window 4 as described above. When the light-emitting device comprises a plurality of light sources, the light sources may be arranged at different locations in a space defined by the side walls 11, the light exit window 4 and the reflective body 3. Typically, the light sources are located close to the side walls 11, two opposite light sources being separated at least by a distance represented by the width of the light exit window. Thus, the reflective body 3 may receive light from different directions.

The light-emitting device 1 further comprises a wavelength converting layer comprising a wavelength converting material adapted to absorb light of a first wavelength range and to emit light of a second wavelength range. The wavelength converting layer and the light source 2 are arranged mutually spaced apart.

Furthermore, light-scattering elements adapted to scatter light of at least said first wavelength are arranged in the path of light from said light source 2 to the wavelength converting layer. The light-scattering elements are thus adapted scatter light that is emitted from the light source 2 and/or reflected by the reflective body 3 before said light enters the wavelength converting layer.

In a first embodiment of the invention, a wavelength converting layer is arranged in the light exit window 4. The wavelength converting layer comprises a wavelength converting material adapted to absorb light of a first wavelength range and to emit light of a second wavelength range. The wavelength converting layer may for instance

be included in the translucent plate 13. Alternatively, the wavelength converting layer may be coated on the translucent plate.

In a second embodiment, the light emitting device 1 comprises a diffusing layer comprising said light-scattering elements. When present, such a diffusing layer is thus arranged in the path of light from the light source 2 to the wavelength converting layer. For example, when the wavelength converting layer is arranged in the light exit window 4, the diffusing layer may be comprised in the reflective body 3 so as to scatter light before and/or after it is reflected. Alternatively, the diffusing layer may be arranged at the light exit window 4 adjacent to the wavelength converting layer and in the path of light from the light source 2 to the wavelength converting layer.

In a third embodiment, the wavelength converting layer may comprise at least part of said scattering elements. For example, the wavelength converting layer may be prepared as an extruded polymer film comprising the wavelength converting material and scattering particles. Optionally, a wavelength converting layer comprising scattering elements may be combined with a separate diffusing layer comprising scattering elements arranged in the path of light from the light source to the wavelength converting layer as described above.

In a fourth embodiment, the reflective body 3 comprises a wavelength converting layer as described herein. Typically, the reflective body 3 also comprises at least one diffusing layer arranged in the path of light from the light source 2 to the wavelength converting layer.

In an fifth embodiment shown in Fig. 4, the reflective body 3 comprises defined domains 14 comprising wavelength converting material 9 arranged on a reflective layer 5. The reflective layer 5 may be diffusive.

When the reflective body 3 is partly transmissive, it may optionally comprise an additional wavelength converting layer and/or an additional diffusing layer. Said additional wavelength converting layer and/or said additional diffusing layer is/are preferably arranged on a side of the reflective body 3 facing away from the light source 2. Preferably, said additional diffusing layer is arranged in the path of light from the light source 2 to said additional wavelength converting layer, when present.

Figures 2 and 3 illustrate a reflective body according to embodiments of the invention.

In Fig. 2, the reflective body 3 comprises a diffusing layer 7 and a wavelength converting layer 6 arranged on a reflective layer 5. The reflective layer 5, the wavelength

converting layer 6 and the diffusing layer 7 form a multi-layer reflective film. The wavelength converting layer 6 is arranged between the diffusing layer 7 and the reflective layer 5, in the path of light from the light source to the reflective layer 5. Consequently, the diffusing layer 7 is arranged in the path of light from the light source to the wavelength  
5 converting layer 6.

The diffusing layer 7 is adapted to receive and scatter light emitted by the light source. The diffusing layer 7 may comprise light-scattering elements, for instance scattering particles, or pores formed in a carrier material. The carrier material may be a polymer, such as PET, PMMA or PC. Examples of scattering particles include titanium dioxide, zirconium  
10 dioxide and aluminium oxide particles. For example, the diffusing layer 7 may comprise light-scattering particles dispersed in a carrier material at a concentration in the range of from 1 to 75 % w/w, preferably from 2 to 20 % w/w.

Optionally, at least a part of the scattering elements may be adapted to differently scatter light of different wavelengths. For example, the scattering elements may be  
15 adapted to scatter non-converted light only (i.e., light of said first wavelength range).

The diffusing layer 7 is at least partly transmissive in order to allow a major part of the light from the light source to reach the wavelength converting layer 6. Preferably, the diffusing layer 7 is very thin, such as having a thickness in the range of from 0.5 to 100  
μm, preferably from 2 to 25 μm.

The diffusing layer 7 may serve to mechanically protect the wavelength  
20 converting layer 6 and to hide it from sight, while also improving the mixing of converted and non-converted light.

The wavelength converting layer 6 comprises a wavelength converting material 9, such as a material commonly known as a phosphor. The wavelength converting  
25 material 9 is adapted to absorb light of a first wavelength range and to emit light of a second wavelength range. For example, the wavelength converting material may absorb blue light (wavelength range of about 400-500 nm) and emit light of longer wavelengths, for example in the yellow light wavelength range. Examples of suitable wavelength converting materials include  $Y_3Al_5O_{12}:Ce$ ,  $CaAlSiN_3:Eu$  and  $CaS:Eu$ . Additional suitable wavelength converting  
30 materials are known to persons skilled in the art.

Typically, a part of the light of said first wavelength range emitted by the light source 2 is transmitted through the wavelength converting layer 6 without being absorbed by the wavelength converting material 9.



The wavelength converting layer 6 may have a thickness in the range of from 5 to 2000  $\mu\text{m}$ , preferably from 10 to 50  $\mu\text{m}$ . The wavelength converting layer 6 may comprise an amount of wavelength converting material per unit area in the range of from 5 to 200  $\text{g}/\text{m}^2$ , preferably from 10 to 100  $\text{g}/\text{m}^2$ .

5 In embodiments of the invention the wavelength converting layer 6 does not form part of a multi-layer film, but may be a substrate formed by e.g. extrusion or injection moulding. In such embodiments, the diffusing layer 7 and the reflective layer 5 may be coated on opposite sides of the wavelength converting substrate 6.

10 The reflective layer 5 is adapted to receive light that is transmitted through the wavelength converting layer 6 and to reflect it back into the wavelength converted layer 6, where the light is further transmitted into the diffusing layer 7, possibly after being converted as described above. Preferably the reflective layer 5 is a diffusing reflector; however, in embodiments of the invention, the reflective layer 5 may be a specular reflector. The reflective layer 5 preferably is a polymer based white reflective film, e.g. a PET based white reflective film. Several such reflective materials are known in the art. The reflective film 5  
15 may have a thickness in the range of from 5 to 2000  $\mu\text{m}$ , preferably from 20 to 800  $\mu\text{m}$ .

In embodiments of the invention the reflective layer 5 does not form part of a multi-layer film, but may be a reflective substrate formed by e.g. extrusion or injection moulding. In such embodiments, the diffusing layer 7 and the wavelength converting layer 6  
20 may be coated on the reflective substrate. Alternatively, the diffusing layer 7 may form a substrate on which the wavelength converting layer 6 and the reflective layer 5 are coated as described above. In embodiments of the invention, such as light-emitting devices adapted for emitting a part of the light through the back area (a second light exit window), an additional wavelength converting layer and optionally an additional diffusing layer may be arranged on  
25 a side on the reflective layer 5 facing away from the light source.

The reflective layer 5 may contain scattering elements as described above. When it is desirable to achieve complete reflection of light, the reflective layer 5 preferably comprises scattering particles at a concentration that is higher than that of the diffusing layer 7. However, if a part of the light received by the reflective body is to be transmitted, the  
30 reflective layer 5 may have a concentration of scattering particles that is approximately the same, or at least in the same range, as that of the diffusing layer 7.

Furthermore, the total thickness of the diffusing layer 7, the wavelength converting layer 6 and the reflective layer 5 may be in the range of from 0.01 to 4 mm, preferably from 0.1 to 1 mm.

The reflective body 3 may further comprise a substrate 8 for improving the reflectivity of the reflective body 3. The substrate 8 may be reflective. The reflection factor of the reflective body 3 is influenced by the thickness of the reflective body, and in particular by the thickness of the reflective layer 5. For example, if the diffusing reflective layer 5 is very thin, a part of the light received by the reflective layer 5 from the wavelength converting layer 6 is diffusively transmitted rather than diffusively reflected. In embodiments of the invention, it is desired to achieve a reflection factor of at least 0.85, preferably at least 0.95. By arranging the reflective layer 5 on a substrate 8, the reflectivity of a relatively thin film may thus be improved.

In some applications, it may be preferable to have a certain degree of light transmittance through the reflective body 3, e.g. in a luminaire having both an upward and a downward lighting component. Thus, in some embodiments of the invention, the substrate 8 is thus preferably omitted, or is made of a translucent material.

The reflective body of Fig. 2 provides improved mixing of light of different wavelengths; in particular, this embodiment provides improved scattering of non-converted light (that is, light of the first wavelength range). A mixture of wavelength converted light and well-scattered, non-converted light may exit the reflective body 3 through the diffusing layer 7 in the direction of the light exit window. However, embodiments of the invention in which light is transmitted through the reflective layer 5 as described above provides excellent mixing of light in this direction as well, resulting in a homogeneous white light output in both directions.

The multi-layer reflective film shown in Fig. 2 may be produced by preparing the individual layers and subsequently combining these layers into a film by lamination. For example, the wavelength converting layer and the diffusing layer 7 can be coated on a carrier film for subsequent lamination onto the reflective layer 5. Alternatively, the wavelength converting layer and the diffusing layer 7 can be coated directly on the reflective layer 5 by means of any suitable conventional coating technique, such as spray coating, slid-coating, transfer coating, printing etc. The wavelength converting layer can also be prepared by e.g. extrusion, vacuum/thermo forming, injection moulding resulting in a plate, in which case the other layers could be applied by lamination onto or direct coating on the plate. The diffusing layer 7 and/or the reflective layer 5 may have an open structure providing enclosure of particles of wavelength converting material 9 in the wavelength converting layer 6 into the layers 7 and 5, thus improving the adhesion of the layers to the wavelength converting layer 6.

In the embodiment illustrated in Fig. 3, the reflective body 3 is a multi-layer film comprising a wavelength converting layer 6 and a reflective layer 5. The wavelength converting layer 6 is adapted to receive light emitted by the light source. The wavelength converting layer 6 is adapted to absorb and reemit light as described above. Furthermore, the wavelength converting layer 6 generally transmits a part of the light emitted by the light source as described above.

In addition to the wavelength converting material 9, the wavelength converting layer 6 comprises light-scattering elements 10. Hence, the wavelength converting layer 6 also serves as a diffusing layer. The light-scattering elements 10 may be as described above. In embodiments of the invention, the wavelength converting layer thus comprises a mixture of wavelength converting material and scattering particles dispersed in a carrier material. For example, the wavelength converting layer 6 may comprise light-scattering particles at a concentration of 1 to 50 % w/w, preferably from 2 to 20 % w/w. The wavelength converting layer may comprise an amount of wavelength converting material per unit area in the range of from 5 to 200 g/m<sup>2</sup>, preferably from 10 to 100 g/m<sup>2</sup>.

The wavelength converting layer of the embodiment of Fig. 3 may have a thickness in the range of, for example, from 5 to 2000 μm, and preferably from 10 to 50 μm.

The reflective layer 5 may be as described above. In particular, it may be a specular reflector. When the reflective layer 5 is a diffusing reflective layer, it may comprise light-scattering elements as described above.

The total thickness of the multi-layer film of Fig. 3 (i.e, the wavelength converting layer 6 and the reflective layer 5) may be in the range of from 0.01 to 4 mm, preferably from 0.1 to 1 mm.

It is to be noted that the embodiments of the invention described above are exemplary and not limitative of the scope of the invention.

## CLAIMS:

1. Light-emitting device (1) comprising
  - a light source (2) adapted to emit light of a first wavelength range;
  - a reflective body (3) comprising a reflective layer (5), said reflective body (3) being arranged to receive light emitted by said light source (2) and to reflect said light
- 5 towards a light exit window (4) of the light-emitting device (1);
  - a wavelength converting layer (6) comprising a wavelength converting material (9) adapted to absorb light of said first wavelength range and to emit light of a second wavelength range, said wavelength converting layer (6) and said light source (2) being arranged mutually spaced apart; and
- 10 - light-scattering elements (10) adapted to scatter light of at least said first wavelength range;
  - wherein at least part of said light-scattering elements (10) are arranged in the path of light from said light source (2) to said wavelength converting layer (6).
- 15 2. Light-emitting device according to claim 1, further comprising a diffusing layer (7) arranged in the path of light from said light source (2) to said wavelength converting layer (6), said diffusing layer (7) comprising at least part of said light-scattering elements (10).
- 20 3. Light-emitting device according to claim 1 or 2, wherein said wavelength converting layer (6) further comprises at least part of said light-scattering elements (10).
4. Light-emitting device according to any one of the preceding claims, wherein said reflective layer (5) comprises at least part of said light-scattering elements (10).
- 25 5. Light-emitting device according to any one of the preceding claims, wherein said wavelength converting layer (6) is located in said light exit window (4).

6. Light-emitting device according to any one of the claims 1 to 4, wherein said reflective body (3) further comprises said wavelength converting layer (6), said wavelength converting layer (6) being arranged in the path of light from said light source (2) to said reflective layer (5).

5

7. Light-emitting device according to claims 6 and 2, wherein said reflective body (3) further comprises said diffusing layer (7).

8. Light-emitting device according to claim 6 or 7, wherein said reflective, layer (5), said wavelength converting layer (6), and, if present, said diffusing layer (7) form a multi-layer film.

10

9. Light-emitting device according to any one of the preceding claims, wherein said light source (2) comprises at least one light-emitting diode.

1/1

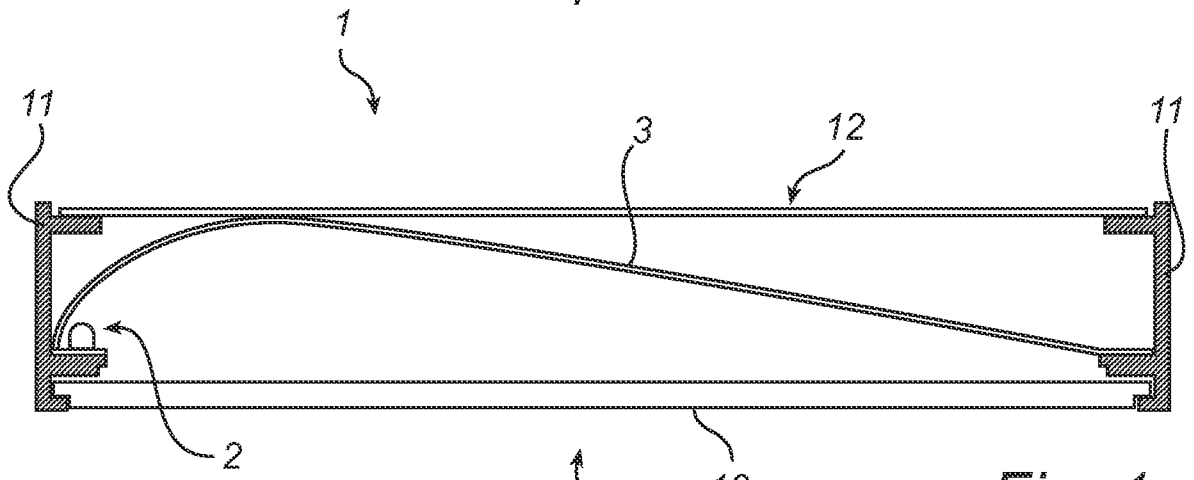


Fig. 1

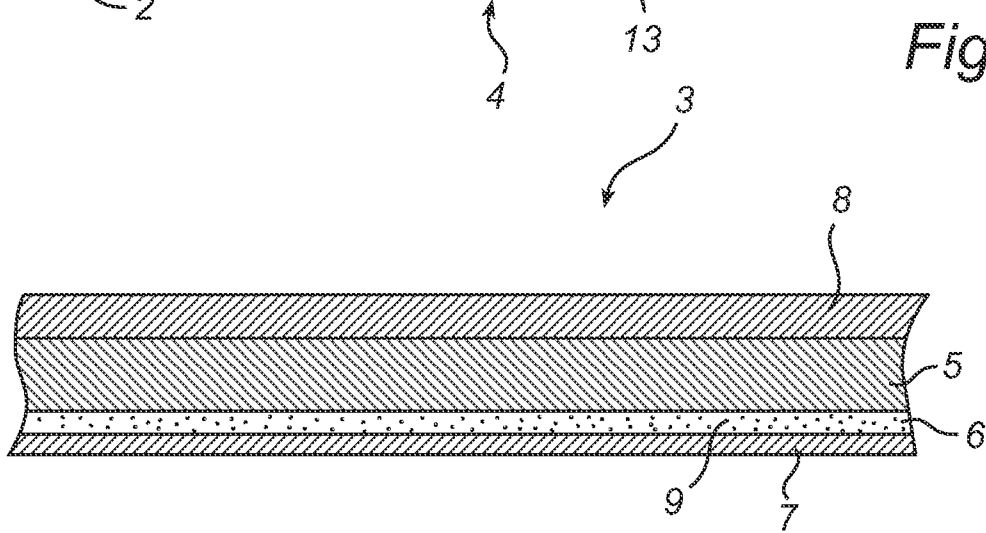


Fig. 2

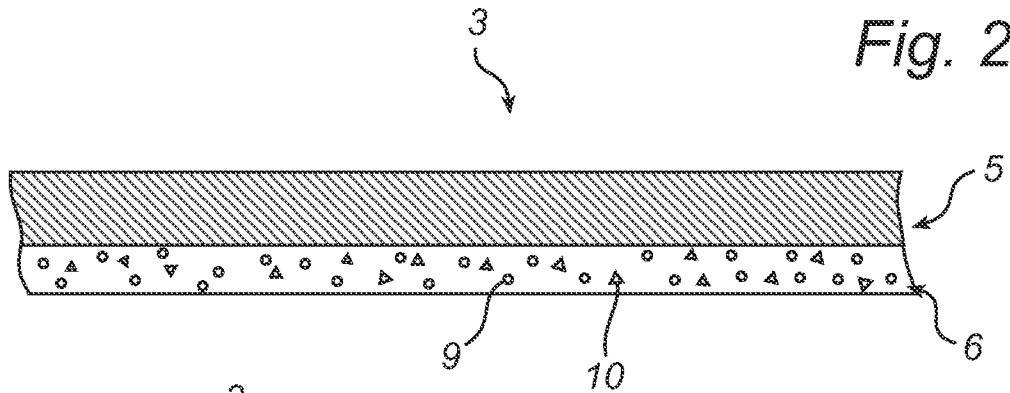


Fig. 3

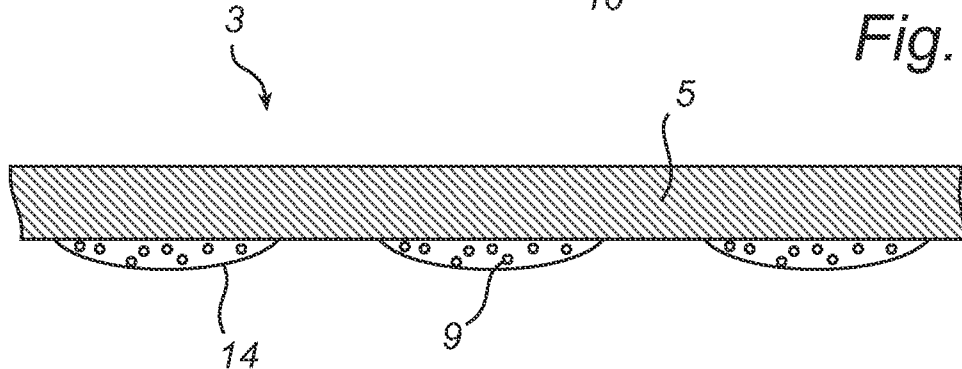


Fig. 4

**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/IB2009/051303

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> INV. F21V7/22 ADD. F21Y101/02				
According to International Patent Classification (IPC) or to both national classification and IPC				
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) F21V H01L F21K				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal				
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	US 6 791 259 B1 (STOKES EDWARD BRITTAIN [US] ET AL) 14 September 2004 (2004-09-14) column 2, line 66 - column 3, line 23 column 4, lines 16-48; figure 5 column 6, lines 20-43 column 7, line 27 - column 8, line 52; figure 7	1,2,4,5,9		
X	US 2007/297179 A1 (LEUNG MICHAEL [US] ET AL) 27 December 2007 (2007-12-27) paragraphs [0057] - [0060]; figures 6,7 paragraph [0043]; figure 1 paragraph [0046]; figure 2 paragraphs [0031] - [0036]	1,3,6,8,9		
	----- -/-- -----			
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <span style="margin-left: 200px;"><input checked="" type="checkbox"/> See patent family annex.</span>				
* Special categories of cited documents :				
<table style="width:100%; border:none;"> <tr> <td style="width:50%; border:none;">                     *A* document defining the general state of the art which is not considered to be of particular relevance                      *E* earlier document but published on or after the international filing date                      *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)                      *O* document referring to an oral disclosure, use, exhibition or other means                      *P* document published prior to the international filing date but later than the priority date claimed                 </td> <td style="width:50%; border:none;">                     *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention                      *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone                      *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.                      *&amp;* document member of the same patent family                 </td> </tr> </table>			*A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family
*A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family			
Date of the actual completion of the international search  <p align="center">13 July 2009</p>		Date of mailing of the international search report  <p align="center">17/07/2009</p>		
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer  <p align="center">Tinjod, Frank</p>		

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/IB2009/051303

## C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2007/130536 A (LED LIGHTING FIXTURES INC [US]; VAN DE VEN ANTONY PAUL [CN] CREE LED L) 15 November 2007 (2007-11-15) cited in the application page 5, lines 27-30 page 6, lines 8-13 page 13, line 1 - page 14, line 11 page 14, lines 22-24 page 15, line 12 - page 18, line 10 page 19, line 18 - page 20, line 1 page 21, lines 10-26 page 28, lines 3-8 page 29, line 2 - page 30, line 6; figures 2,3 page 30, lines 17-26; figure 6 page 32, lines 14-24; figure 16 page 32, line 30 - page 33, line 22; figures 14,15	1-9
X	----- US 2006/072314 A1 (RAINS JACK C [US]) 6 April 2006 (2006-04-06) paragraphs [0001] - [0010], [0015]	1,3,4,9
A	paragraphs [0029] - [0033], [0035] - [0046]; figures 1,2	2,6-8
A	----- WO 00/19546 A (KONINKL PHILIPS ELECTRONICS NV [NL]; PHILIPS CORP INTELLECTUAL PTY [DE]) 6 April 2000 (2000-04-06) page 6, line 12 - page 7, line 14; figure 1A -----	1,7



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No  
PCT/IB2009/051303

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6791259	B1	14-09-2004	AU 2033800 A 19-06-2000
			CN 1289455 A 28-03-2001
			EP 1051758 A1 15-11-2000
			JP 2002531955 T 24-09-2002
			WO 0033389 A1 08-06-2000
			US 6429583 B1 06-08-2002
US 2007297179	A1	27-12-2007	EP 2038939 A1 25-03-2009
			KR 20090026196 A 11-03-2009
			WO 2008002362 A1 03-01-2008
WO 2007130536	A	15-11-2007	CN 101449100 A 03-06-2009
			EP 2021688 A2 11-02-2009
			KR 20090018092 A 19-02-2009
			US 2007263393 A1 15-11-2007
US 2006072314	A1	06-04-2006	CA 2577798 A1 13-04-2006
			EP 1794493 A2 13-06-2007
			JP 2008515164 T 08-05-2008
			US 2008291670 A1 27-11-2008
			WO 2006039017 A2 13-04-2006
WO 0019546	A	06-04-2000	CN 1289454 A 28-03-2001
			DE 69937993 T2 24-12-2008
			ES 2299260 T3 16-05-2008
			JP 2003529889 T 07-10-2003
			US 6234648 B1 22-05-2001