




(86) Date de dépôt PCT/PCT Filing Date: 2014/07/07
(87) Date publication PCT/PCT Publication Date: 2015/02/26
(45) Date de délivrance/Issue Date: 2018/05/15
(85) Entrée phase nationale/National Entry: 2016/02/09
(86) N° demande PCT/PCT Application No.: EP 2014/001869
(87) N° publication PCT/PCT Publication No.: 2015/024612
(30) Priorité/Priority: 2013/08/22 (DE10 2013 013 810.8)

(51) Cl.Int./Int.Cl. *A61F 2/64* (2006.01),
A61F 2/68 (2006.01), *A61F 5/01* (2006.01)
(72) Inventeurs/Inventors:
AUBERGER, ROLAND, AT;
SEYR, MARTIN, AT;
SEIFERT, DIRK, AT;
MANDL, CLEMENS, AT;
DIETL, HANS, AT
(73) Propriétaire/Owner:
OTTO BOCK HEALTHCARE PRODUCTS GMBH, AT
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : PROCEDE DE COMMANDE D'UNE ARTICULATION ARTIFICIELLE D'UNE ORTHESE OU D'UNE PROTHESE DU GENOU
(54) Title: METHOD FOR CONTROLLING AN ARTIFICIAL ORTHOTIC OR PROSTHETIC KNEE JOINT

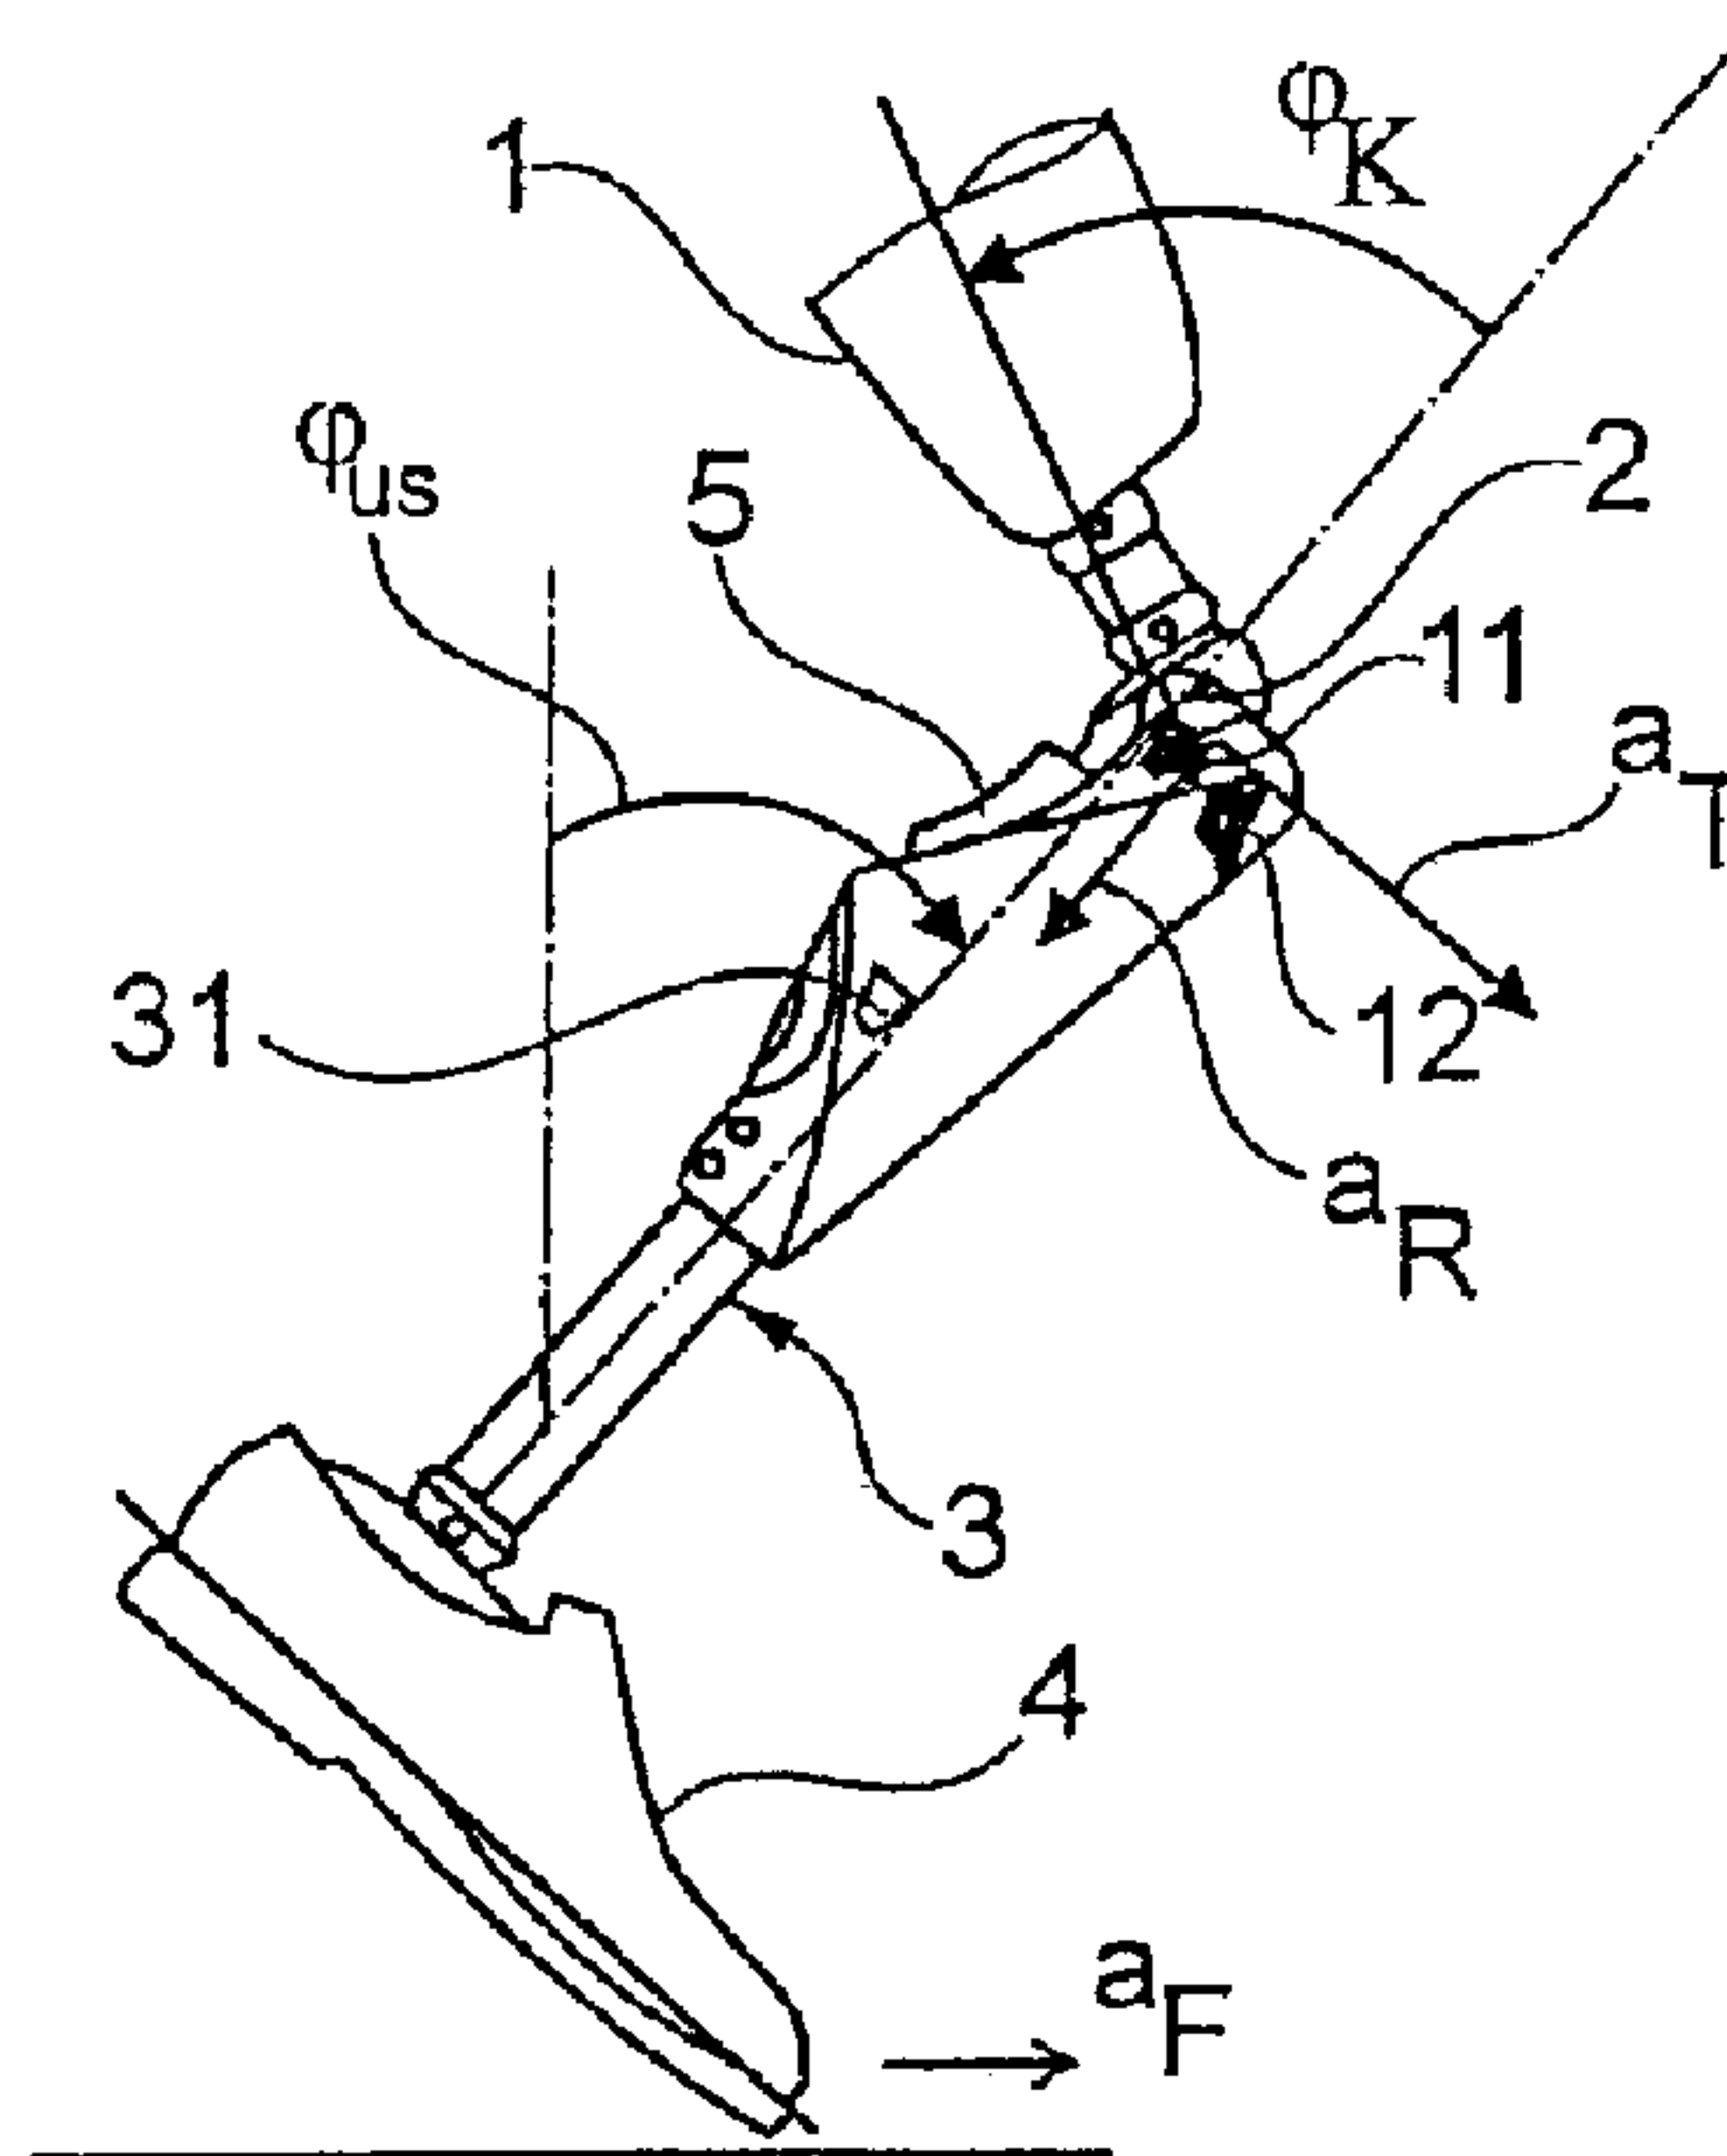

(57) Abrégé/Abstract:

The invention relates to a method for controlling an artificial orthotic or prosthetic knee joint, on which a lower-leg component is arranged and with which a resistance device is associated, the bending resistance of which resistance device is changed in dependence on sensor data that are determined by means of at least one sensor during the use of the orthotic or prosthetic knee joint, wherein a linear acceleration of the lower-leg component is determined, the determined linear acceleration is compared with at least one threshold value, and, if a threshold value of the linear acceleration of the lower-leg component is reached, the bending resistance is changed.

ABSTRACT

The invention relates to a method for controlling an artificial orthotic or prosthetic knee joint (2), on which a lower-leg component (3) is arranged and with which a resistance device (5) is associated, the bending resistance (R) of which resistance device is changed in dependence on sensor data that are determined by means of at least one sensor (11, 12, 31) during the use of the orthotic or prosthetic knee joint, wherein a linear acceleration (a_F) of the lower-leg component (3) is determined, the determined linear acceleration (a_F) is compared with at least one threshold value, and, if a threshold value of the linear acceleration (a_F) of the lower-leg component (3) is reached, the bending resistance (R) is changed.

Method for controlling an artificial orthotic or prosthetic knee joint

5 The invention relates to a method for controlling an artificial orthotic or prosthetic knee joint, on which a below-knee component is arranged and which is assigned a resistance device in which the flexion resistance is changed in accordance with sensor data
10 that are determined via at least one sensor during the use of the orthotic or prosthetic knee joint.

Prosthetic or orthotic knee joints replace or support the function of a natural knee joint. In order to
15 achieve a maximally optimal functionality of the artificial knee joint, there are many designs on the market which influence the behavior of the knee joints during the stance phase and the swing phase. Mechatronic knee joints are known, in which the
20 movement situations are detected via a plurality of different sensors and the sensor data are used to control a resistance device via which the flexion resistance or the extension resistance is varied. One basic problem is that the great variety of the possible
25 movement situations can be encompassed only with difficulty in simple rules. Therefore, in order to control actuators and brakes, so-called state machines are used, which are highly complex and represent many different activities. Disadvantages with this are the
30 long development time and the use of elaborate components.

EP 1 237 513 B1 relates to a supporting device which replaces the existence or function of a limb and which
35 consists of at least two parts, connected to each other by an artificial joint, and a control device. The supporting device comprises a sensor, which detects an inclination angle relative to a line of gravity of a

part connected to the joint and is coupled to the control device. The control device is arranged in such a way that it influences the joint on the basis of inclination angle data communicated by the sensor. In
5 one configuration, the inclination angle sensor is arranged as a prosthetic knee joint on a thigh tube; in order to enhance the data situation, a second sensor can be arranged on the lower leg.

10 DE 10 2008 027 639 A1 relates to an orthotic joint for supporting an anatomical knee joint, having an upper joint part and a lower joint part which are connected to each other in an articulated manner. A locking element for automatically unlocking and locking the
15 orthotic joint in an arbitrary position is provided, likewise an actuation element for the locking element and a sensor means for detecting relevant information for the unlocking and locking. An evaluation unit for evaluating the information acquired, and for forwarding
20 this information to a control and/or regulating unit for the actuation element, is likewise present. The sensor means comprises at least two sensors from the group including inclination sensors, rotation angle sensors, acceleration sensors or gyroscopes, for
25 acquiring information describing the movement state and/or resting state of a person. Two sensors of one type or one sensor each of different types may be selected. All the sensors are arranged downward from the anatomical joint, in particular knee joint.

30

There is provided a method for controlling an artificial orthotic or prosthetic knee joint, with which method a reliable gait pattern can be achieved with minimal outlay in control terms.

In one embodiment there is provided a method for controlling an artificial orthotic or prosthetic knee joint, on which a below-knee component is arranged and which is assigned a resistance device in which the flexion resistance is changed in accordance with sensor data that are determined via at least one sensor during the use of the orthotic or prosthetic knee joint, wherein a linear acceleration of the below-knee component is determined, the determined linear acceleration is compared with at least one threshold value, and, if a threshold value of the linear acceleration of the below-knee component is reached, the flexion resistance is reduced. Advantageous embodiments and refinements of the invention are disclosed in the following description and the figures.

In the method for controlling an artificial orthotic or prosthetic knee joint on which a below-knee component is arranged and which is assigned a resistance device in which the flexion resistance is modified in accordance with sensor data that are determined via at least one sensor during the use of the orthotic or prosthetic knee joint, provision is made that a linear acceleration of the below-knee component is determined, and, if a limit value of a linear acceleration of the below-knee component is not reached, the flexion resistance is changed, in particular reduced. With the proposed method, it is possible for a knee joint, by which are understood both orthotic knee joints and also prosthetic knee joints, to be controlled exclusively by simple sensors, without elaborate and delicate force measurements having to be carried out. In particular, the use of DMS applications is thereby made redundant.

In a development of the invention, provision is made that an extended stride position of a prosthesis or orthosis with a prosthetic or orthotic knee joint is

determined and, when the extended stride position is present, the flexion resistance is reduced. The extended stride position is present when the knee angle is 0° or the knee joint is minimally bent, i.e. has a flexion angle within a range of $\pm 5^\circ$. If the extended stride position is present, it can be assumed that the user of the knee joint is in the terminal stance phase, and therefore a reduction in resistance can take place.

10 In order to detect a terminal stance phase, an absolute angle of the below-knee component can additionally be determined, and, if a predefined limit value for the absolute angle of the below-knee component is exceeded, the flexion resistance can be reduced. From the inclination angle of the below-knee component with respect to the vertical, meaningful conclusions can be drawn concerning the particular phase within a stride, such that the absolute angle is a good indicator of the change, in particular the reduction, of the flexion resistance.

The absolute angle of the below-knee component can be determined from an absolute angle of a thigh component and from a known, e.g. measured, knee angle or can be measured directly with an inertial angle sensor, which is secured on the below-knee component.

Moreover, provision can be made that the knee angle is additionally determined via a knee angle sensor, and, if a limit value for the knee angle is not reached, the flexion resistance is reduced, since the knee angle is an indicator of the state of extension of the leg or of the prosthesis and, consequently, of the particular phase within a step cycle. The knee angle can also be determined from the inertial angles of the thigh and of the lower leg.

- 5 -

If several parameters are available, for example the exceeding of a limit value for the absolute angle of the below-knee component, the falling below a limit value for the knee angle and the falling below a limit value of an acceleration of the below-knee component, it can be more safely assumed that the flexion resistance is intended to be changed, in particular reduced, in order to allow a swing phase to be enabled. With the proposed method, it is possible to safely control a knee joint exclusively via simple sensors.

The majority of microprocessor-controlled prosthetic and orthotic systems are controlled by measurements of force and moment being carried out by means of strain gauges, the decisive aspect for the safety of a knee joint being the change from a high flexion resistance in the stance phase to a low flexion resistance during the swing phase and *vice versa*. The change-over is also referred to as enablement of the swing phase. In addition to the calculation of bending moments at the ankle level or of the knee moment, threshold values of the values calculated from the strain gauges have to be exceeded in order to enable the swing phase. Furthermore, the enablement of the swing phase often takes place only after a certain forward inclination, such that walking with small steps becomes difficult.

In the method according to the invention, the knee joint is controlled exclusively by knee angle sensors and inertial sensors from whose data the necessary parameters or auxiliary values can be calculated. The absolute angle of the below-knee component, i.e. the inclination of the longitudinal extent of the below-knee component with respect to the vertical, is determined via the inertial sensor. The absolute angle must exceed a minimum value in order to detect a forward inclination of the below-knee component, i.e. an inclination in the walking forward direction. Only

at a certain angle in forward inclination can it be assumed that a step in the forward direction is to be taken. The knee angle is determined via a knee angle sensor. If a limit value for a knee angle is not
5 reached, this is a sign that the user is in a terminal stance phase, such that an enablement of the swing phase and therefore a reduction of the flexion resistance are indicated. In addition, the acceleration of the below-knee component is determined. If an
10 acceleration limit value is not reached, it can be assumed that the foot component, for example the foot plate or the prosthetic foot, is still located on the ground, and it is therefore ascertained that the patient is in the terminal stance phase of a stride and
15 the flexion resistance can thus be reduced.

In a development of the invention, provision is made that the knee angle velocity is determined, and the flexion resistance is reduced only when a limit value
20 for the knee angle velocity is exceeded. A minimum knee angle velocity should be present, since otherwise a stance situation may arise in which a reduction of the flexion resistance may be undesired. With the low or relatively low knee angle velocity, it is additionally
25 ensured that the patient is in the terminal stance phase during a forward movement.

An angular velocity of the below-knee component can be calculated or can be detected via a sensor, for example
30 from the sensor data of a gyroscope. The calculated or detected value of the angular velocity is compared with a limit value, and the flexion resistance is reduced only when the angular velocity is below a limit value.

35 The linear acceleration of the below-knee component is advantageously determined or measured at the sole level and is used as a basis for the control; the acceleration at the sole level derives from the linear

- 7 -

accelerations at the position of the acceleration sensor, for example below the knee joint axis, the angular acceleration of the below-knee component as a first-order derivative of a gyroscope signal, and the
5 location vector of the position of the acceleration sensor to the reference position on the foot, for example on the forefoot. From the linear accelerations at the sole level, conclusions are drawn concerning the kinematic contact condition between the foot or foot
10 part and the ground or concerning the dynamics of the movement, and it is possible to determine in which phase of a stride the patient is located. If there is no linear acceleration or only a very slight linear acceleration, the foot, by which is also understood a
15 prosthetic foot or a foot part of an orthosis, is still located in the stance phase, or if there is also no longer any vertical acceleration, the set-down phase is ended, such that the linear accelerations can be used to draw conclusions regarding the orientation and
20 positioning of the leg. For example, the accelerations can be used to determine corresponding speeds, which can likewise be suitably used for the control.

In a development of the invention, provision is made
25 that the reduction of the flexion resistance takes place when there is a hyperextension of the below-knee component, i.e. that the hyperextension is one of those parameters that are used as controls to change the flexion resistance. The knee angle of 0° is assumed if
30 the below-knee component bears without force on an extension stop. An increase in the knee angle is assumed if a bending of the knee joint is performed counter to the walking direction. If the knee is hyperextended, the knee angle decreases further, since
35 it is regarded as a negative knee angle. If the knee joint experiences an extension moment about the knee axis as a result of forces acting on the joint, for example via the ground reaction force, stump forces or

hip moments, a hyperextension may occur which, when detected, can signal that the patient is in the terminal stance phase and, therefore, a swing phase should be enabled.

5

The knee joint can have an elastic extension stop, for example in order to prevent the below-knee component from swinging hard against the stop in an extension movement. The elastic extension stop can be composed of
10 elastomer bodies, spring elements or the like. By virtue of the elastic extension stop, it is possible to permit a hyperextension in a small angle range when an extension moment is applied about the knee axis, and, when the extension moment ceases, the below-knee
15 component is brought back by the elastic extension stop to the extended or almost extended position, in which the knee angle is 0° . After the load has been removed, the joint returns to the extended or almost extended position. Knowing the spring characteristics of the
20 extension stop and the negative knee angle, it is possible to calculate a knee moment acting in the extension direction about the knee joint and, when a knee moment is present in the extension direction, i.e. when the elastic extension stop is compressed, to
25 reduce the flexion resistance. The knee moment is calculated on the basis of the knee angle and on the knowledge of the spring characteristic, and force measurement sensors or moment sensors are not needed. If there is a knee moment in the extension direction,
30 this is a further factor for ascertaining in which phase of a step the patient is located and whether a swing phase takes place directly and, accordingly, the flexion resistance should be reduced.

35 A rotation direction of the below-knee component can be calculated or detected via a sensor, for example a gyroscope. The flexion resistance is reduced only if there is a forward rotation of the below-knee

- 9 -

component, in order to rule out the possibility of the flexion resistance being undesirably reduced when walking backward.

- 5 Acceleration data of the below-knee component can be determined via an acceleration sensor in order to be able to derive or calculate required parameters.

10 After a reduction of the flexion resistance, the latter can be increased again, in particular to a stance phase level or to such a high level that unwanted bending is not possible or is possible only slowly, if, within a predefined time interval, no bending of the knee joint takes place, or if, within a flexion angle after
15 bending, a previously established limit value for a horizontal acceleration is exceeded. This serves to increase the stability if a swing phase is discontinued, i.e. if no complete step cycle can be performed.

20

An illustrative embodiment of the invention is explained in more detail below with reference to the figures, in which:

- 25 Figure 1 shows a schematic representation of a prosthetic knee joint;

Figure 2 shows a schematic representation of an extension stop;

30

Figure 3 shows an example of a control sequence, and

Figure 4 shows a schematic representation of a control concept.

35

Figure 1 shows a prosthetic device for patients with a thigh stump and with no knee joint and lower leg. A prosthesis socket 1, also designated as the thigh

- 10 -

component of the prosthesis or as the thigh socket, serves to receive the stump (not shown). Arranged on the prosthesis socket 1, there is a prosthetic knee joint 2 which, in the present case, is designed as a monocentric knee joint, and a below-knee component 3 is mounted so as to pivot about a pivot axis relative to the thigh socket 1. A prosthetic foot 4 is arranged at the distal end of the below-knee component 3. The prosthetic device is shown in a terminal stance phase, the prosthetic foot 4 still located on the ground. Arranged inside the below-knee component 3 there is a resistance device 5, which offers resistance to bending, i.e. flexion, and the resistance device 5 likewise serves for variable adjustment of an extension resistance. The resistance within the resistance device is changed via an actuator which, for example, opens or closes valves or redirects hydraulic flows. Alternatively, it is likewise possible that the actuator changes rheological properties of the hydraulic fluid in order to change the resistance. Alternative changes to resistance are possible, for example the activation of brakes or the conversion of kinetic energy to electrical energy.

An inertial sensor 31 is arranged on the below-knee component 3 and records the absolute angle φ_{US} of the below-knee component. The inertial sensor 31 measures the absolute angle φ_{US} of the below-knee component 3 with respect to the vertical and can be configured as a 2D or 3D magnetic field sensor, a 2D or 3D acceleration sensor or as a gyroscope. The absolute angle φ_{US} increases as the inclination of the below-knee component 3 in the forward walking direction increases, i.e. during a clockwise pivoting about a distal point of contact with the ground. Moreover, an acceleration sensor 12 is arranged on the below-knee component 3 and can determine a tangential acceleration a_T , i.e. an acceleration tangential to the pivot radius of the

- 11 -

below-knee component 3, and a radial acceleration a_R , i.e. an acceleration in the direction of the distal rotation point of the below-knee component 3, of the knee joint 2. With a corresponding sensor, e.g. a 3D acceleration sensor, it is also possible to detect the medial and lateral accelerations in addition or to detect only these accelerations.

Finally, a knee angle sensor 11 is provided via which the knee angle ϕ_k can be detected. The knee angle ϕ_k is regarded as increasing positively in the flexion direction from the prolongation of the longitudinal extent of the below-knee component 3; the knee angle ϕ_k is 0 when the longitudinal extent of the prosthesis socket 1 is flush with the axis of the longitudinal extent of the below-knee component 3. A hyperextension is regarded as a negative knee angle ϕ_k .

The prosthetic knee joint 2 can have an elastic extension stop, which is shown schematically in Figure 2. In addition to the schematic thigh socket 1 and the schematic below-knee component 3, which are mounted pivotably on each other about a joint axis, an abutment 10 is arranged on the upper part of the prosthetic knee joint 2. The abutment 10 is substantially rigid and, in the extended state as shown in Figure 2, an elastic stop element 30 bears on the rigid abutment 10. A slight hyperextension is permitted by the spring design and, from knowledge of the spring rate of the stop element 30, the knee moment acting in the extension direction can be calculated from the knee angle ϕ_k . Of course, it is also possible to arrange the abutment 10 on the below-knee component and to arrange the elastic stop element on the upper part 1.

To control the enablement of a swing phase, several parameters can be used, namely the forward inclination of the below-knee component 3, i.e. a positive below-

knee angle φ_{US} of the below-knee component 3, a forward rotation of the lower leg in the walking direction, i.e. an increase in the absolute angle φ_{US} of the below-knee component 3, an acceleration of the knee joint, in order in particular to determine the state of movement of the prosthetic foot 4 at the sole level, and the knee angle φ_K and a knee angle velocity ω_K , which can be calculated from the first time derivative of the knee angle φ_K .

10

Figure 3 shows a schematic control sequence. In order to enable a swing phase and to reduce the flexion resistance R of the resistance device 5, the forward inclination is first determined, i.e. the positive absolute angle φ_{US} of the below-knee component 3 relative to the vertical. If the absolute angle φ_{US} is above a set limit value, for example 5° , the first condition for enablement of the swing phase is met. If, in addition, a forward rotation in the form of a lower leg angular velocity ω_{US} is detected, it can be assumed that the lower leg is in movement; a forward rotation of $> 10^\circ/\text{s}$, for example, can be assumed as limit value. As soon as these limit values are met or exceeded, a check is made to ascertain whether the knee angle φ_K corresponds to a set limit value. In the terminal stance phase, which is adopted before initiation of the swing phase, the prosthetic knee joint 2 is situated in an extended or almost extended position, and a hyperextension can even occur in the case of an elastic extension stop. If a limit value for the knee angle φ_K , which is $< 5^\circ$ and can also assume negative values, is not reached, then a further condition for initiating the enablement of a swing phase is met. The knee moment acting in the extension direction can be calculated using the knee angle φ_K and the known data of the spring device in the elastic extension stop.

35

- 13 -

In the case of a negative knee angle ϕ_K , i.e. in the case of hyperextension, a check is made to ascertain how great the knee angle velocity ω_K is. If the latter is below a limit value, for example below $7^\circ/\text{s}$, it can
5 be assumed that there is no or only slight knee flexion and knee dynamic, which is likewise characteristic for a terminal stance phase. If there is no hyperextension, a check is made to ascertain whether the negative angular velocity is below a limit value, and the
10 question here is how great is the knee angle velocity in the flexion direction or extension direction. If the determined knee angle velocities ω_K are below the required limit values, the extent of the acceleration a_F at sole level is calculated, which is based on the
15 relative position of the acceleration vector with respect to the prosthetic foot 4. If the acceleration a_F at sole level is below a limit value, for example below $3\text{m}/\text{s}^2$, it is to be assumed that the kinematic contact conditions between the prosthetic foot 4 and the ground
20 correspond to those of a terminal stance phase and, consequently, the reduction of the resistance R of the resistance device 5 can be initiated.

For the clear decision between forward heel-toe walking
25 via the prosthetic foot 4, i.e. a forward stride, and a rearward swing-through of the prosthesis under the body, for example in the swing phase of a rearward step, all the steps and questions are necessary that follow the establishment of a forward inclination and
30 forward rotation of the below-knee component 3. For this purpose, a hyperextension of the prosthetic knee joint 2 counter to an elastic extension stop 10, 30 or a strongly extending movement at a low knee angle ϕ_K is needed, which can be measured by the knee angle sensor
35 11. In addition, the acceleration sensor 12 determines whether the extension moment about the knee joint is applied statically or dynamically. In particular, the linear accelerations of the prosthesis at the sole

- 14 -

level are calculated. Assuming that the forward inclination, i.e. the positive absolute angle φ_{US} , and a forward rotation of the below-knee component are given, case distinctions can be made on the basis of accelerations and knee moments and, on the basis of these case distinctions, the flexion resistance R is either maintained at a high stance-phase flexion level or is reduced to a swing-phase level.

10 If there is an insufficient extension moment or a sufficient flexion moment about the prosthetic knee joint 2, or if the knee angle velocity ω_K is either extending or the prosthetic knee joint 2 is in hyperextension, there can be no enablement of the swing phase.

If the prosthetic knee joint experiences an extension moment about the knee axis on account of dynamic forces, for example on account of the inertial forces of the prosthetic foot 4 and of the below-knee component 3, a hyperextension in the knee joint or a stretching movement can be measured. If the below-knee component 3 thus moves, this situation corresponds to that of a pendulum, such that there is no enablement of a swing phase.

Enablement of a swing phase accordingly takes place when an extension moment about the knee axis is caused by static forces, such as ground reaction force, and stump forces acting on the prosthetic knee joint. In this case, a hyperextension or a greatly stretching movement of the knee joint is measured, but no or only slight acceleration a_F at sole level. Such a situation is characteristic of the terminal stance phase, in which the prosthesis, loaded in the walking direction, rolls heel to toe over the foot. In this situation, the resistance R is reduced.

The characteristic of the elastic hyperextension, in particular the spring characteristic of the elastic extension stop, and the threshold values for the knee angle φ_K , the knee angle velocity ω_K and the admissible accelerations a_F for enablement of a swing phase have to be chosen such that, on the one hand, a clear distinction can be made as to whether a swing phase is enabled and, on the other hand, also a slight hyperextension is achieved, for example by users with low body weight and with small steps and slow walking speeds.

If, for example, within the first 5° of a knee flexion movement after enablement of the resistance device to a reduced flexion resistance R , an acceleration a_F of a magnitude above a defined threshold is established, for example by striking against an obstacle, it is possible for the flexion resistance R to be immediately switched back to a high level of stance-phase flexion damping, in order to avoid unwanted flexion in an emergency.

All of the measured signals of the sensors can be filtered in order to be able to compensate for measurement inaccuracies. For the acceleration conditions, asymmetrical limit values can be set in order to be able to perform individual adaptation to the respective gait situation and movement directions.

The proposed control arrangement does not require direct measurement of forces, and it is therefore possible to do without force sensors that can in some cases be sensitive and difficult to evaluate. The sensors used are exclusively knee angle sensors, inertial angle sensors such as gyroscopes, and acceleration sensors. The moments about the knee axis, particularly in the extension direction, can be easily determined with these sensors, since the parameters of

- 16 -

an elastic extension stop are detected and used as a basis for the calculation.

The easily determinable linear and angular accelerations are used to calculate the state of movement of the prosthesis, in particular to identify the state of movement of the prosthetic foot 4. Through the logical linkage of forces and moments with accelerations, it is possible to distinguish between static forces and dynamic forces and moments, such that this distinction permits detection of the walking pattern. In this way, a distinction can easily be made as to whether a free swing-through or a terminal stance phase is present.

The control according to the method described moreover also permits the reliable enablement of the swing phase even with slow walking speeds, small strides and on soft ground, for example loose sand or snow. The control is independent of the patient's weight and is able to ensure the patient can safely walk backward.

Figure 4 shows a schematic view of a control concept of a prosthetic knee joint, the set-up of the prosthesis corresponding to that of Figure 1. It is also possible in principle to use the control concept in orthoses, particularly in what is called a KAFO (knee ankle foot orthosis). The prosthesis socket 1 or the thigh component is connected to the below-knee component 3 via the prosthetic knee joint 2. The prosthetic foot 4 is arranged at the distal end of the below-knee component 3. The resistance device 5 is likewise situated inside the below-knee component 3. The elastic extension stop, which can be arranged in particular inside the resistance device 5, is shown on the right next to the schematic representation of the prosthetic device. The prosthetic device is located in the extended stride position in the terminal stance phase,

which means that, in the front area of the foot, a resting and rotating point 6 is created about which the prosthetic device rotates. On account of the lever between the longitudinal axis of the below-knee component 3 and the resting point 6, an extension moment is applied around the knee joint 2, and this has the effect that the abutment 10, which in this case is movable and part of a hydraulic piston, is pressed against the stop element 30 in the form of a spring. At the same time, it is ascertained whether the prosthetic device has a forward inclination, which is indicated by the curved arrow. If an absolute angle φ_{US} is present, i.e. an inclination to the vertical in the clockwise direction in the illustrative embodiment shown, and if a forward rotation takes place, i.e. an increase of the absolute angle φ_{US} in the forward direction of walking, wherein the rotation takes place about the distal resting point 6, further criteria are given for determining the instantaneous state and the phase within a gait cycle or a gait sequence. The extension moment can be calculated from the spring rate of the stop element 30 and the knee angle, in this case the negative knee angle φ_K .

To rule out the possibility of the below-knee component simply swinging freely about the knee joint 2, the linear acceleration a_F at the contact point 6 is determined. If this acceleration is 0 or very low, it can be assumed that the prosthetic foot 4 and the resting point 6 have ground contact, such that a stationary rotation point is present at the resting point 6. The load is virtually static. In the case of a static load, a forward inclination and forward rotation and, if appropriate, hyperextension, if the extension moment does not exceed a limit value X , the flexion resistance R of the resistance device 5 is then reduced, such that a bending of the prosthetic knee joint 2 can easily take place.

Claims:

1. A method for controlling an artificial orthotic or
prosthetic knee joint, on which a below-knee
5 component is arranged and which is assigned a
resistance device in which the flexion resistance
is changed in accordance with sensor data that are
determined via at least one sensor during the use
of the orthotic or prosthetic knee joint, wherein
10 a linear acceleration of the below-knee component
is determined, the determined linear acceleration
is compared with at least one threshold value,
and, if a threshold value of the linear
acceleration of the below-knee component is
15 reached, the flexion resistance is reduced.
2. The method as claimed in claim 1, characterized in
that an extended stride position of a prosthesis
or orthosis with a prosthetic or orthotic knee
20 joint is determined, and, when the extended stride
position is present, the flexion resistance is
reduced.
3. The method as claimed in claim 1 or 2,
25 characterized in that, in order to detect a
terminal stance phase, an absolute angle of the
below-knee component is determined, and, if a
predefined limit value for the absolute angle of
the below-knee component is exceeded, the flexion
30 resistance is reduced.
4. The method as claimed in claim 3, characterized in
that the absolute angle of the below-knee
component is measured from an absolute angle of a
35 thigh component and a knee angle or directly with
an inertial angle sensor.

5. The method as claimed in any one of claims 1 to 4, characterized in that a knee angle is determined via a knee angle sensor, and, if a predefined limit value for the knee angle is not reached, the flexion resistance is reduced.
5
6. The method as claimed in any one of claims 1 to 5, characterized in that a knee angle velocity is additionally determined, and the flexion resistance is reduced only when a limit value is exceeded.
10
7. The method as claimed in any one of claims 1 to 6, characterized in that an angular velocity of the below-knee component is calculated or is detected via a sensor, and the flexion resistance is reduced only when the angular velocity is below a limit value.
15
8. The method as claimed in any one of claims 1 to 7, characterized in that the linear acceleration of the below-knee component at the sole level is used as a basis for the control.
20
9. The method as claimed in any one of claims 1 to 8, characterized in that the reduction of the flexion resistance takes place when there is a hyperextension of the below-knee component.
25
10. The method as claimed in any one of claims 1 to 9, characterized in that the knee joint has an elastic extension stop, a knee moment is calculated via the knee angle and a spring characteristic of the extension stop is calculated, and the flexion resistance is reduced if a knee moment in the extension direction exceeds a threshold value.
30
35

11. The method as claimed in any one of claims 1 to 10,
characterized in that a rotation direction of the
below-knee component is calculated or is detected
via a sensor, and the flexion resistance is
5 reduced only if there is a forward rotation.
12. The method as claimed in any one of claims 1 to 11,
characterized in that acceleration data of the
below-knee component are determined via an
10 acceleration sensor.
13. The method as claimed in any one of claims 1 to 11,
characterized in that acceleration data of the
below-knee component are determined via an
15 inertial angle sensor.
14. The method as claimed in any one of claims 1 to 13,
characterized in that, after a reduction of the
flexion resistance, the latter is increased again
20 if, within a predefined time interval, no bending
of the knee joint took place, or if, within an
enclosed knee angle, a limit value for an
acceleration is exceeded.

WO 2015/024612

PCT/EP2014/001869

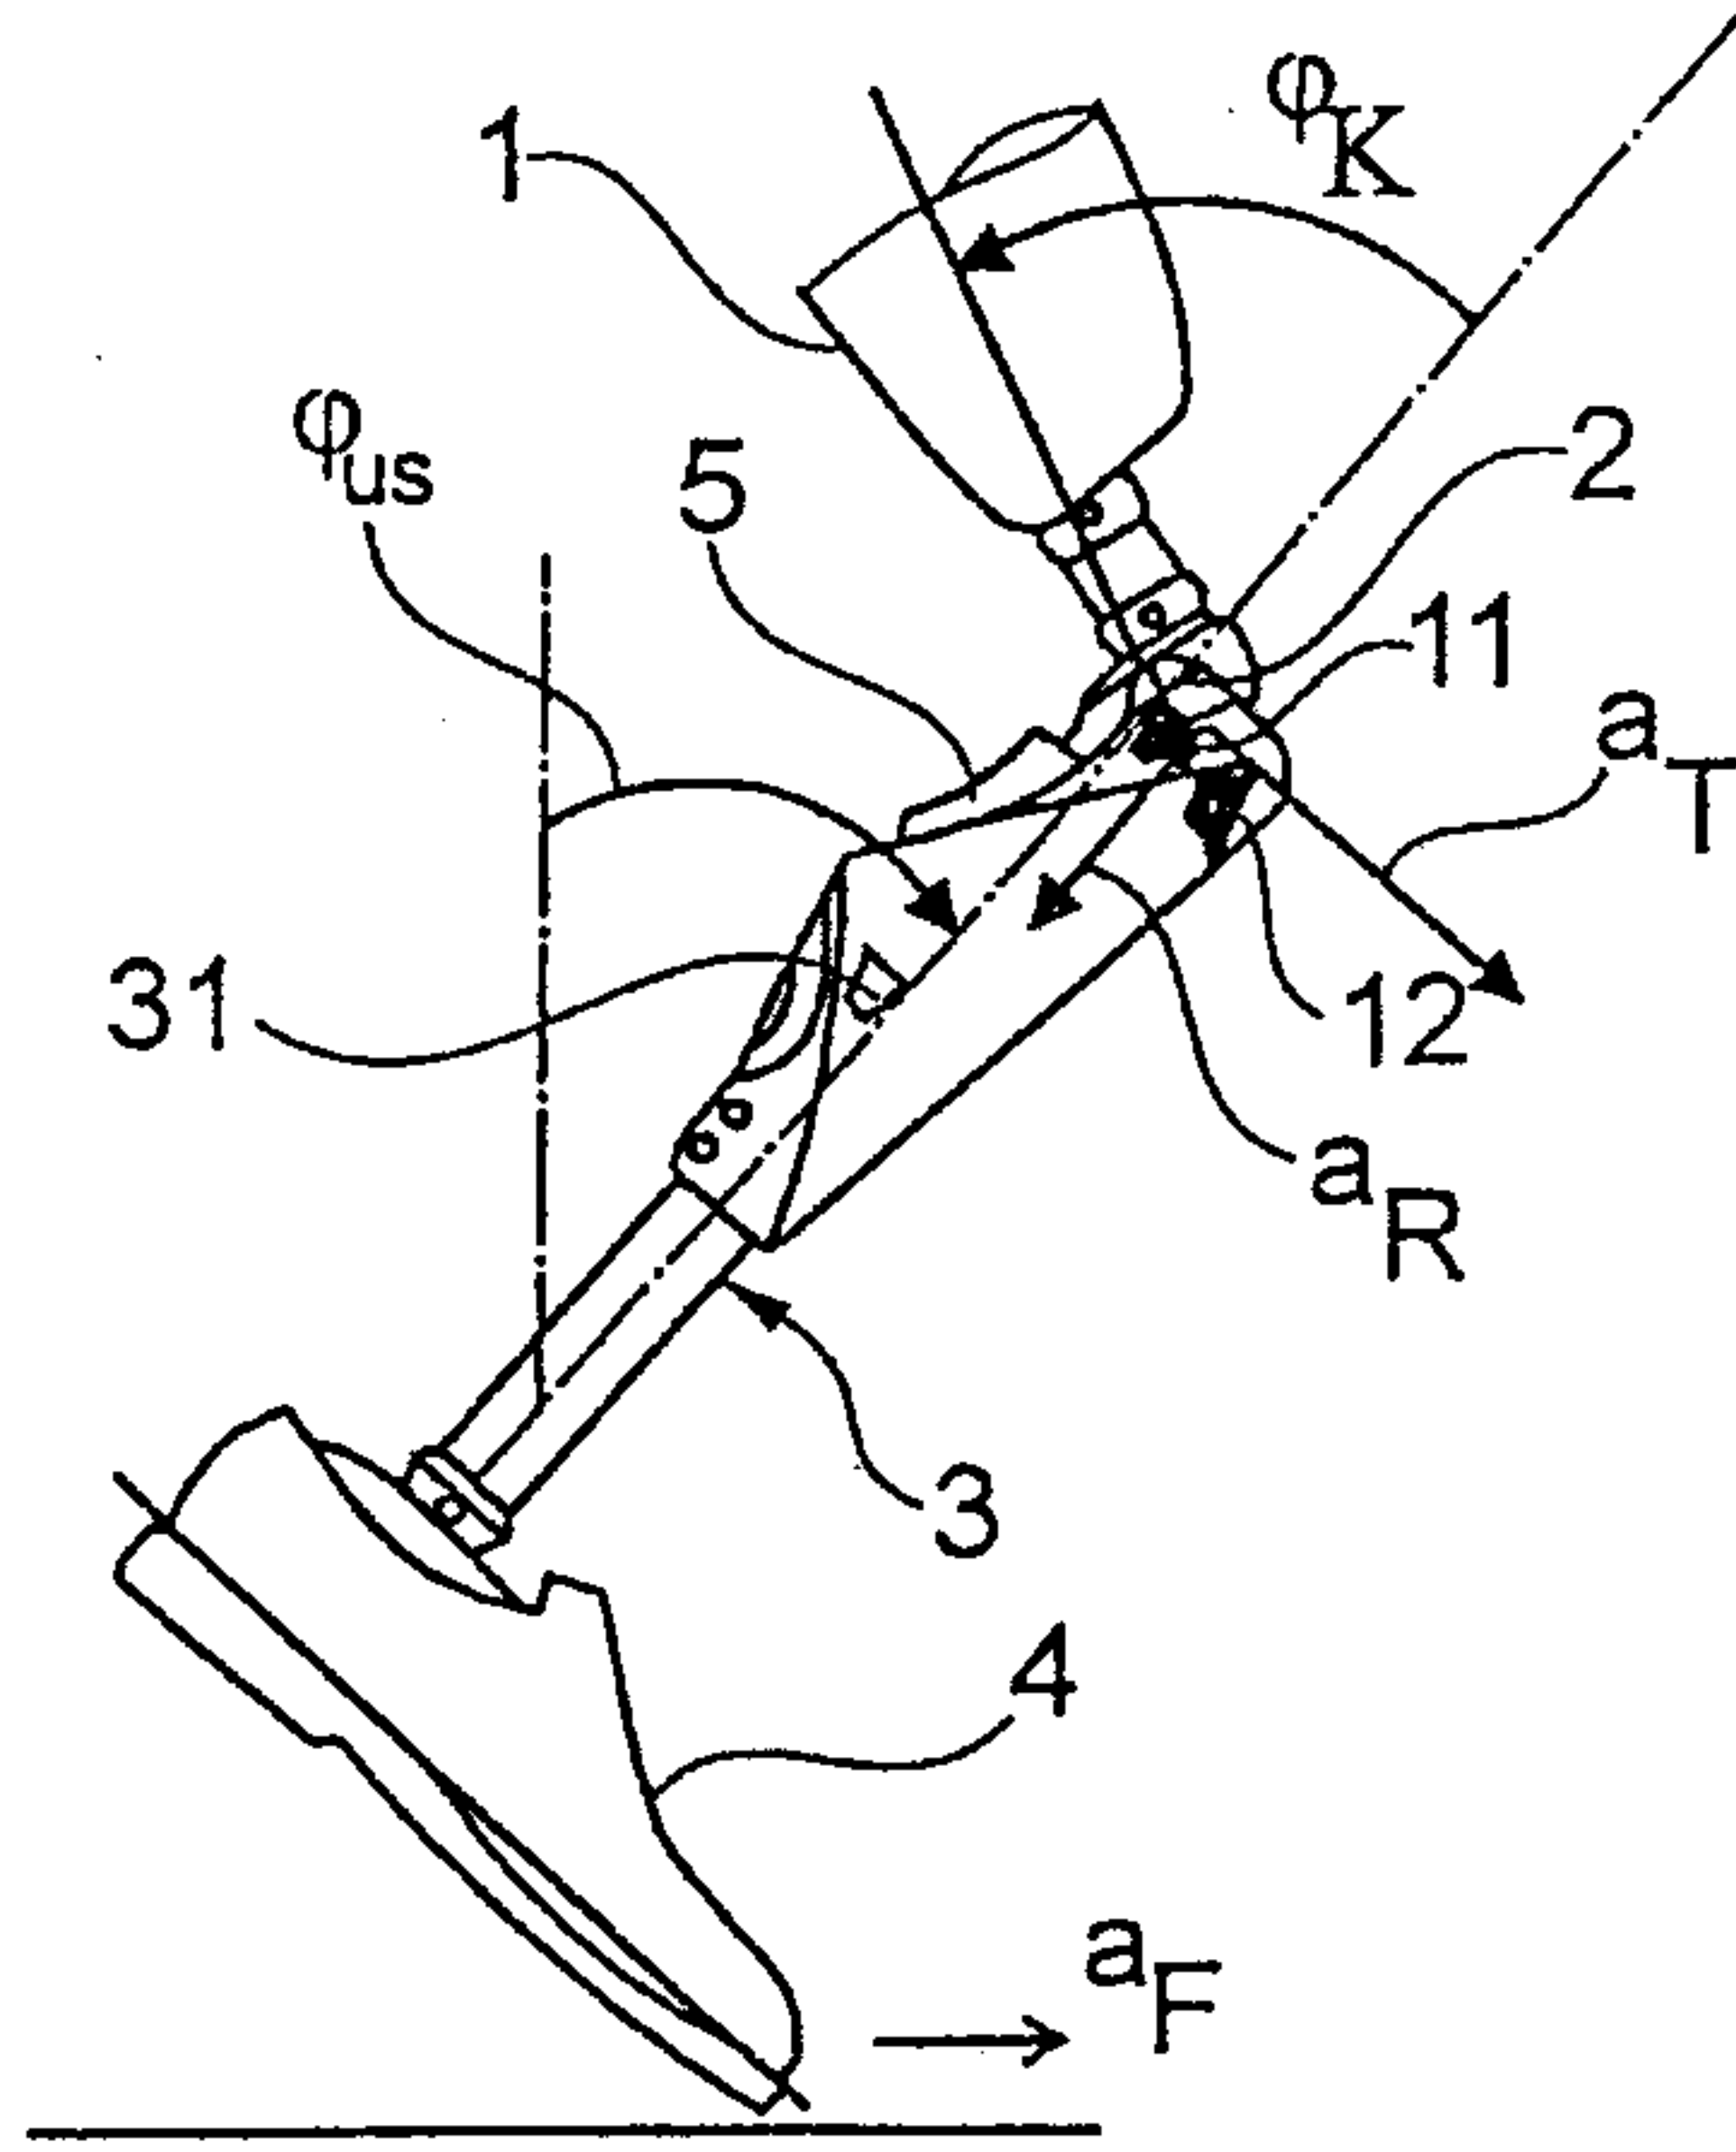


Fig. 1

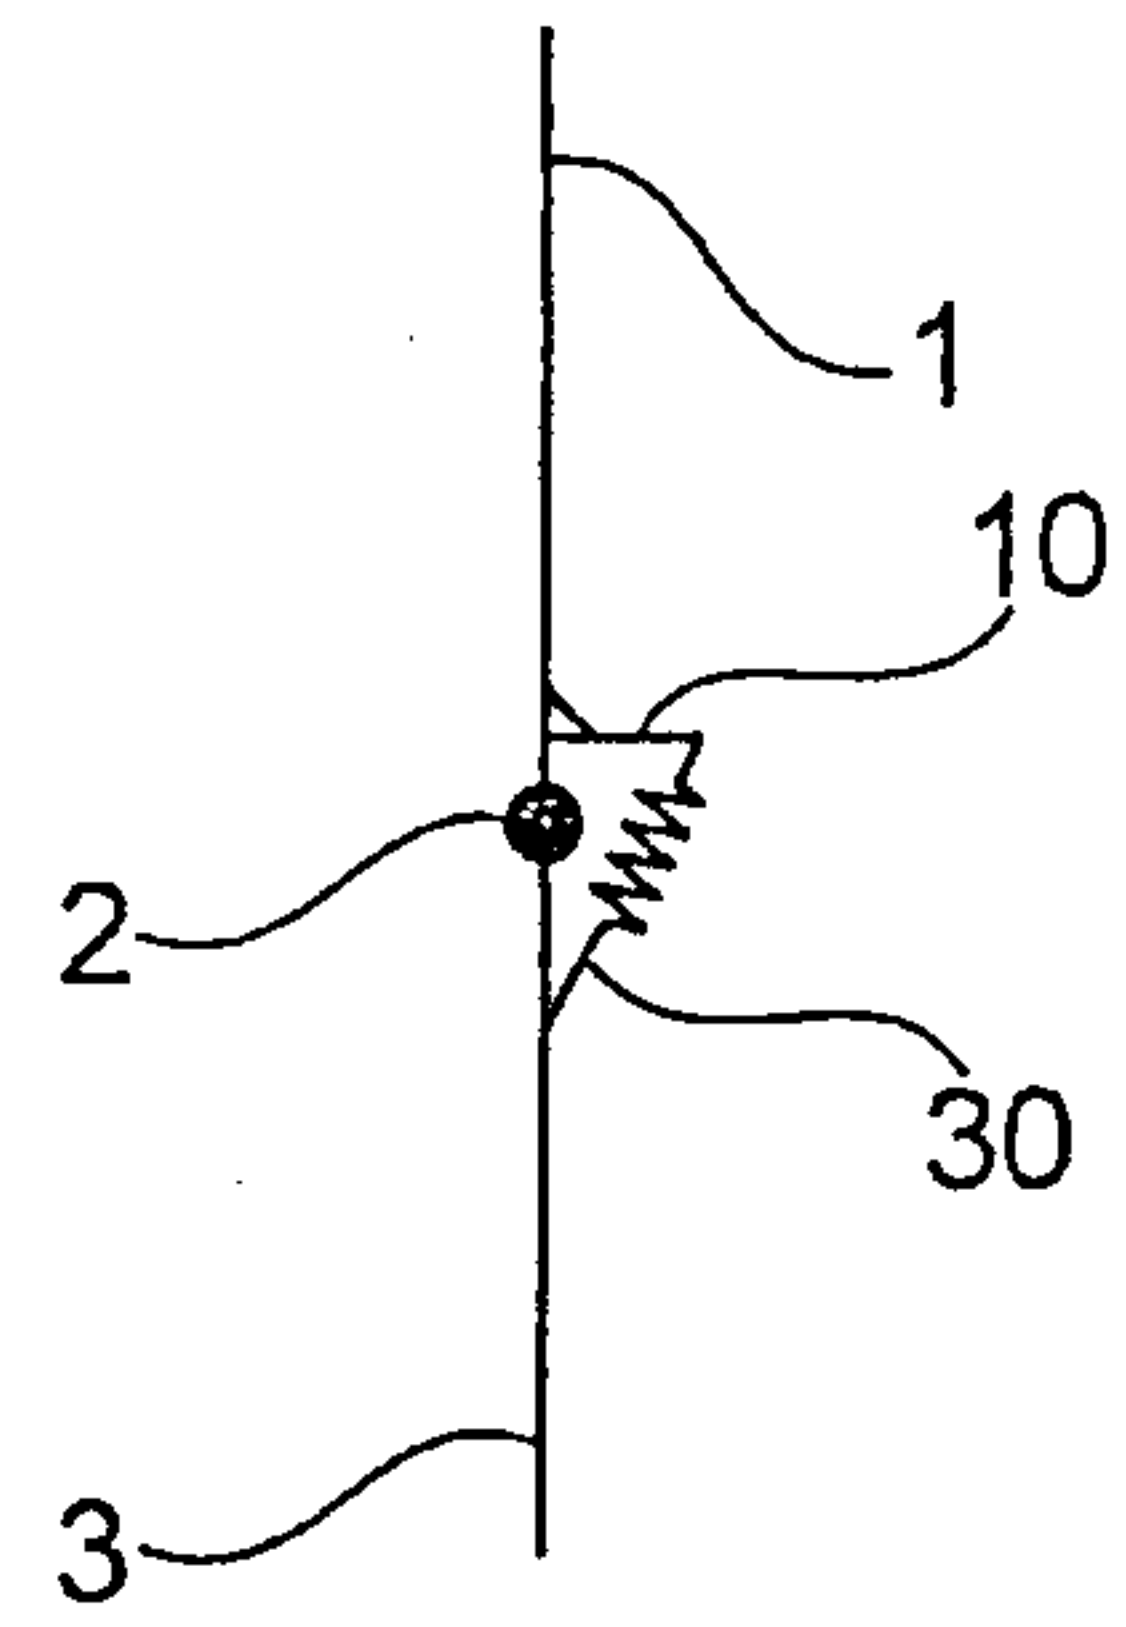


Fig. 2

WO 2015/024612

PCT/EP2014/001869

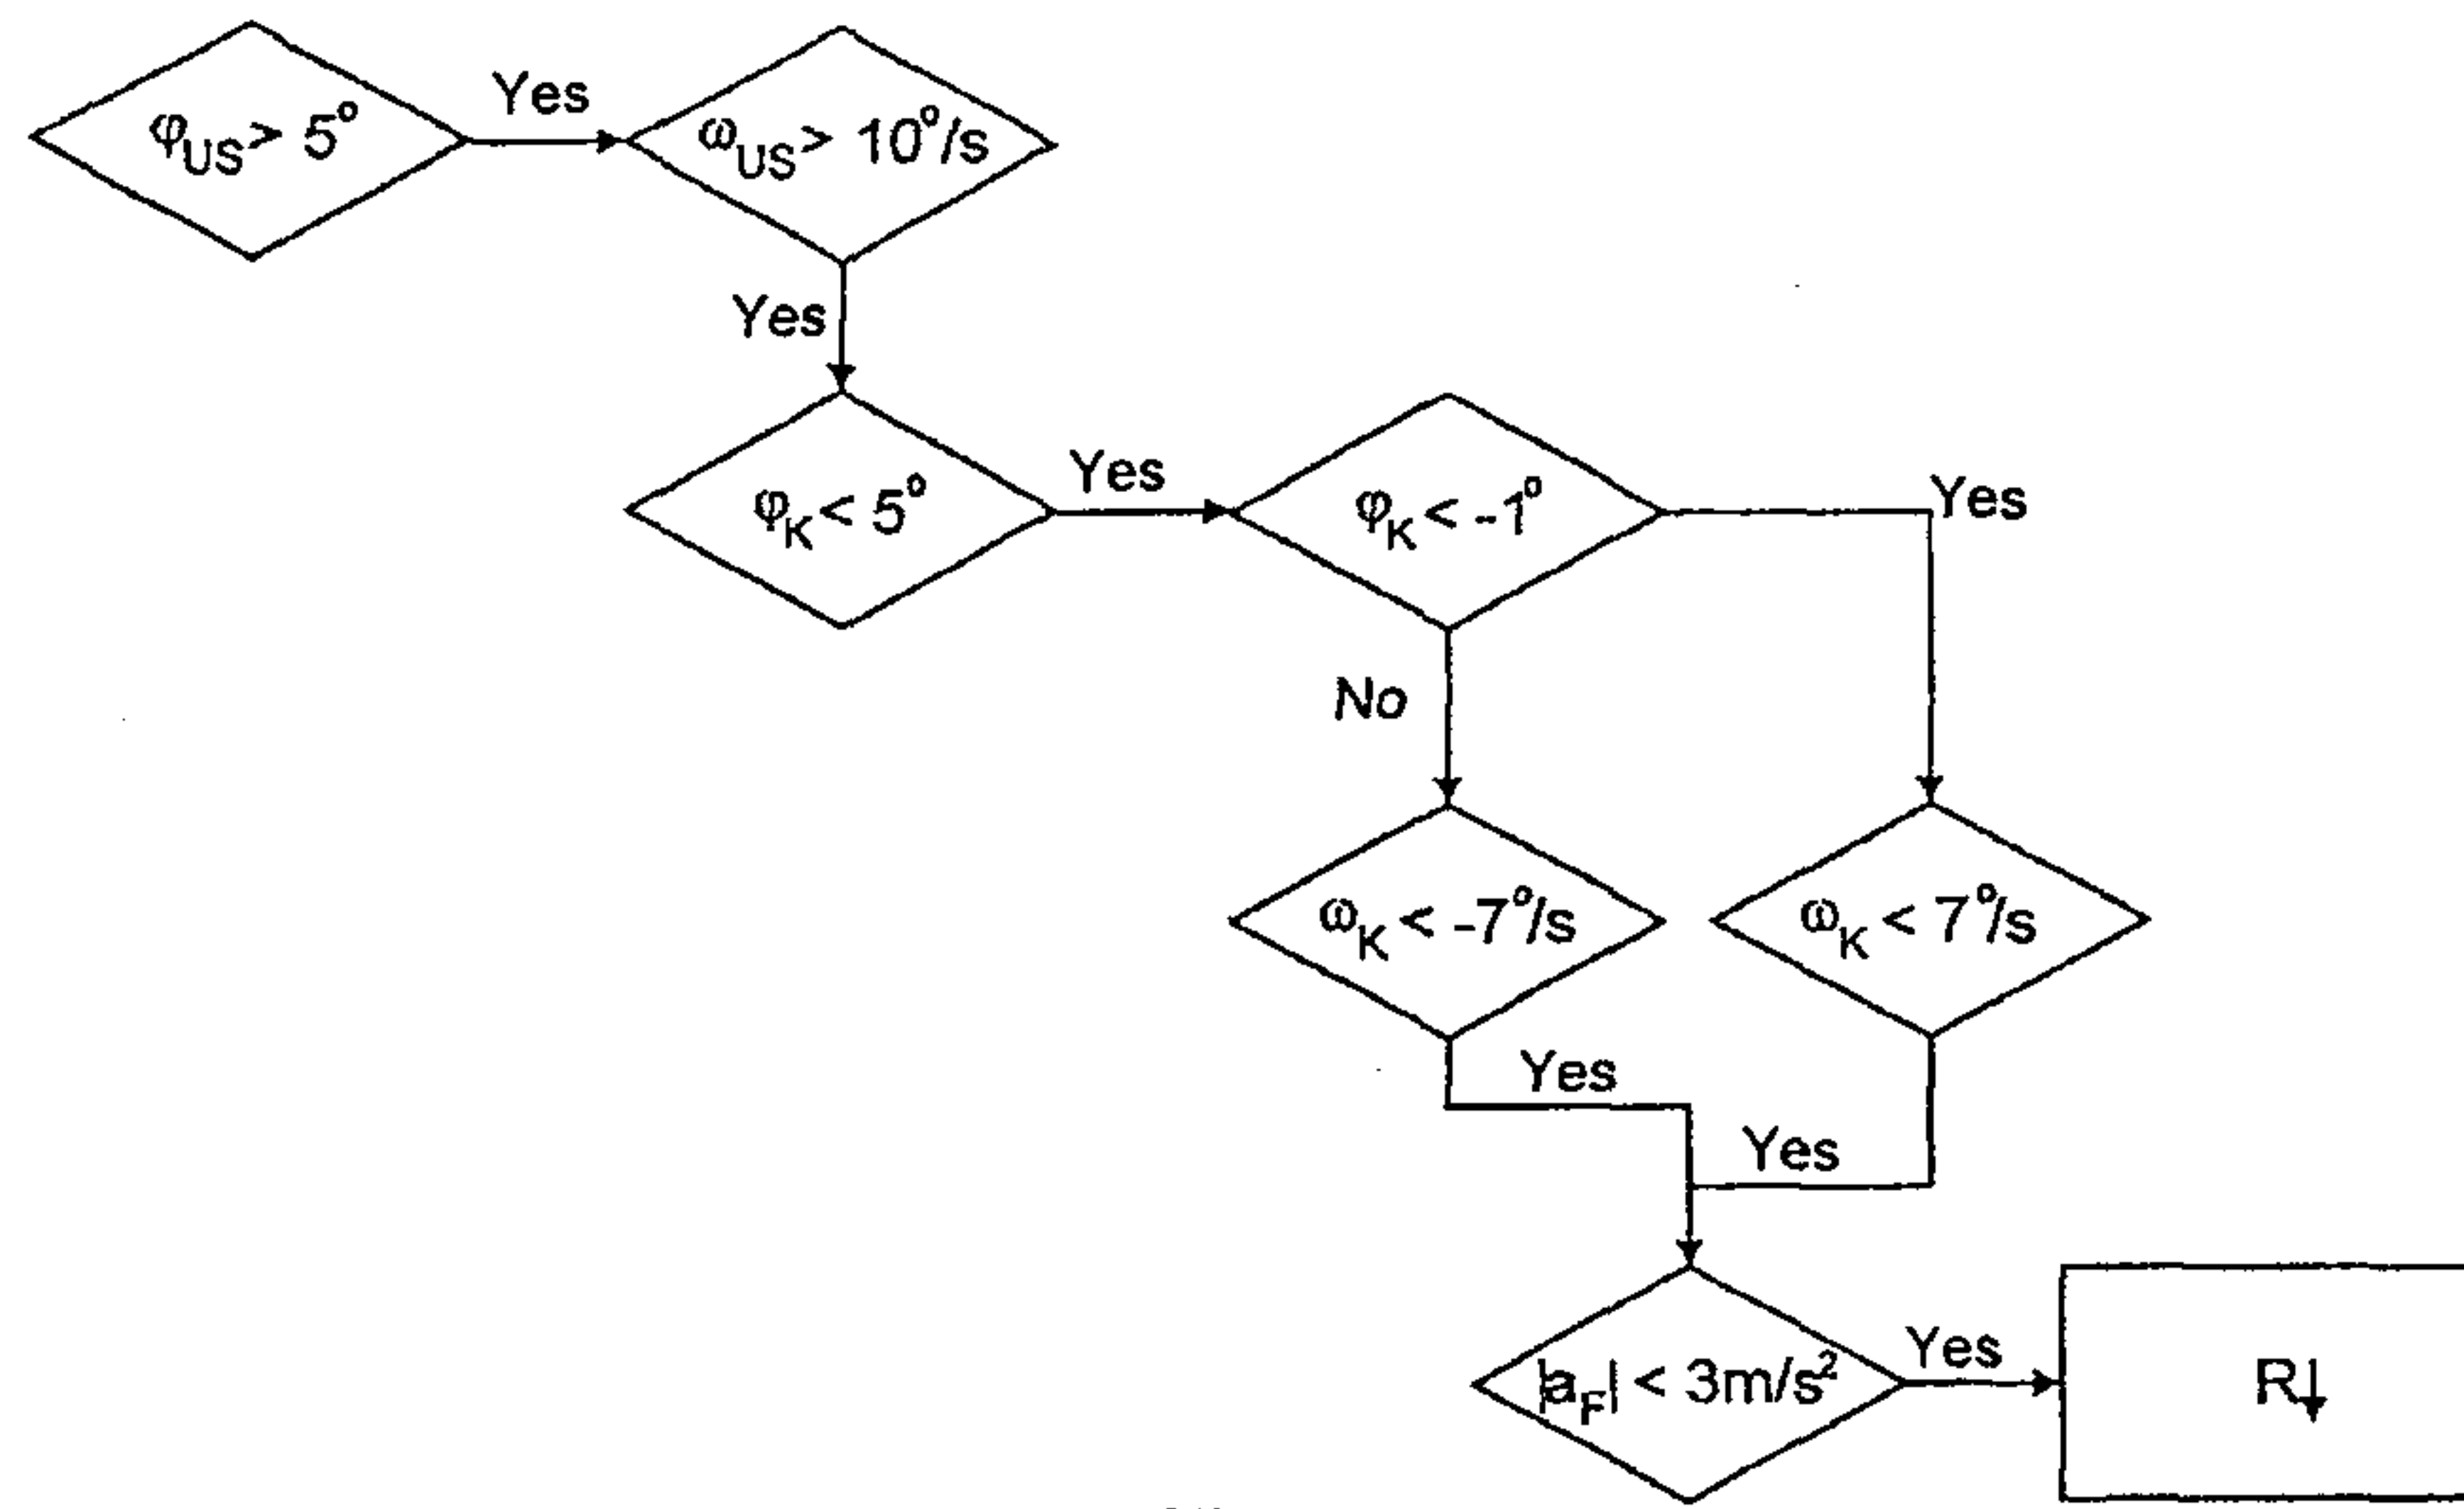


Fig. 3

WO 2015/024612

PCT/EP2014/001869

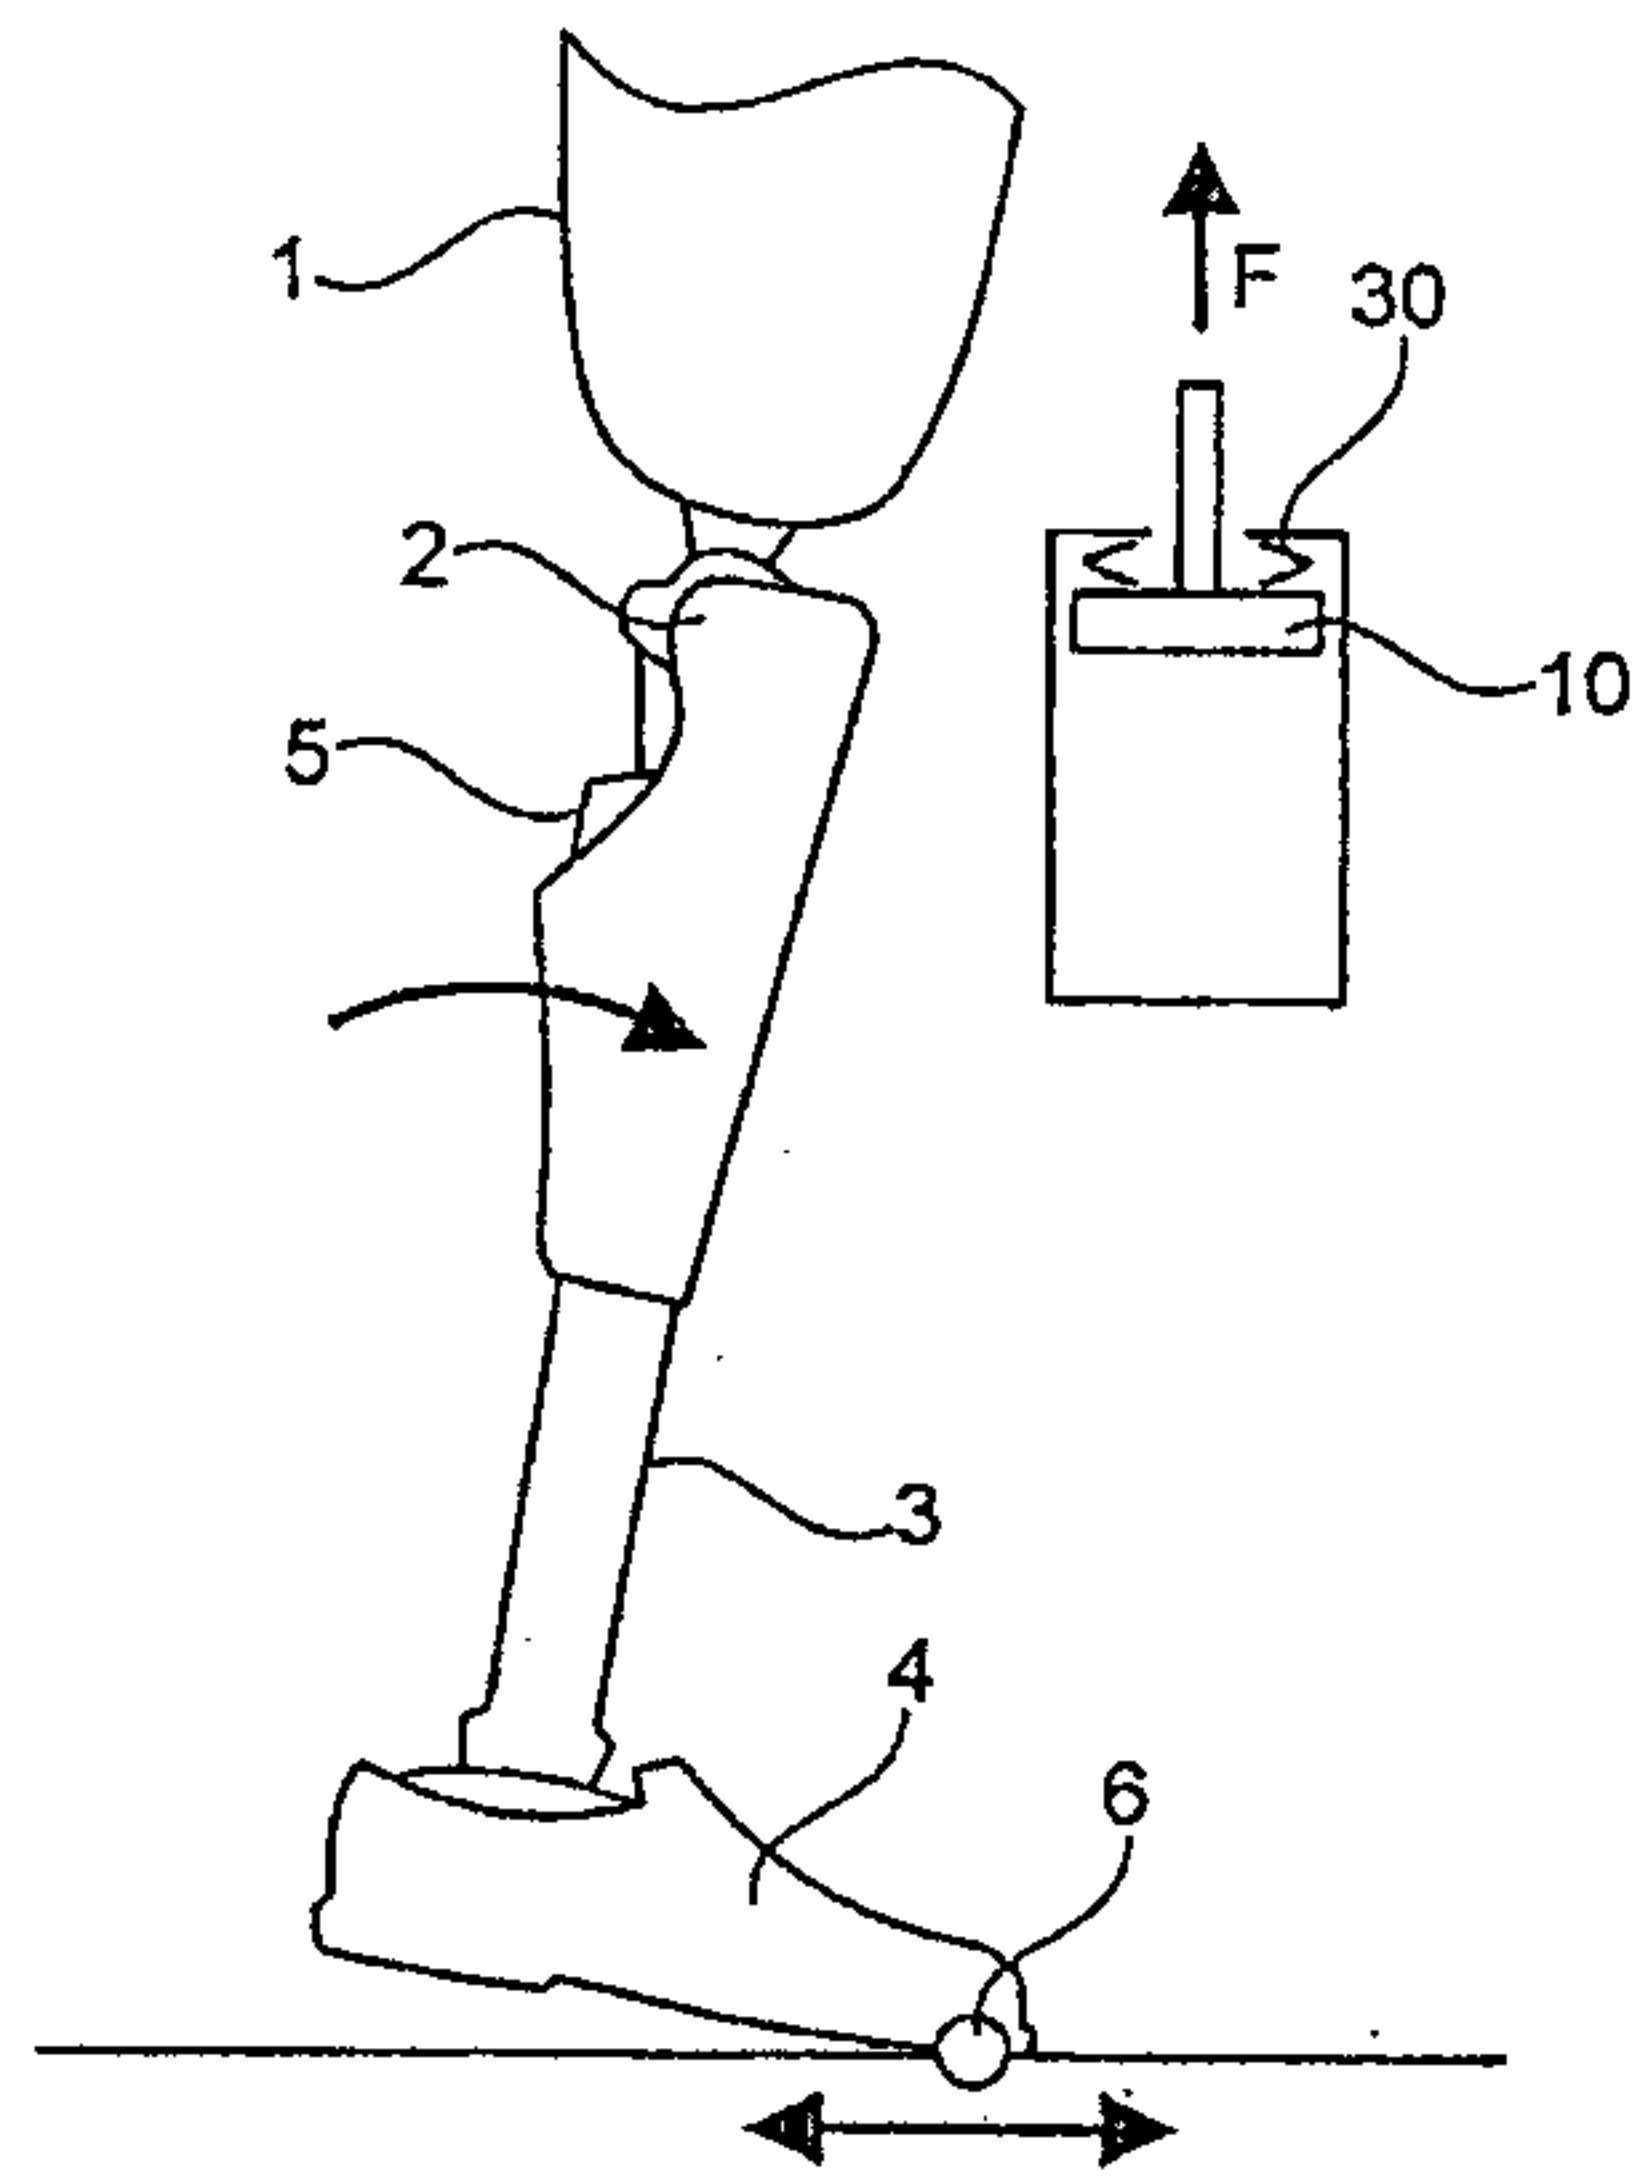


Fig. 4

