



US012165928B2

(12) **United States Patent**
Mukherjee et al.

(10) **Patent No.:** **US 12,165,928 B2**

(45) **Date of Patent:** **Dec. 10, 2024**

(54) **INTEGRATED CIRCUITS WITH RECESSED GATE ELECTRODES**

(58) **Field of Classification Search**

None

See application file for complete search history.

(71) Applicant: **Intel Corporation**, Santa Clara, CA (US)

(56) **References Cited**

(72) Inventors: **Srijit Mukherjee**, Hillsboro, OR (US); **Christopher J. Wiegand**, Portland, OR (US); **Tyler J. Weeks**, Hillsboro, OR (US); **Mark Y. Liu**, West Linn, OR (US); **Michael L Hattendorf**, Portland, OR (US)

U.S. PATENT DOCUMENTS

6,512,258 B2 1/2003 Maeda
6,774,441 B2 8/2004 Maki et al.
(Continued)

(73) Assignee: **Intel Corporation**, Santa Clara, CA (US)

FOREIGN PATENT DOCUMENTS

JP 2008130797 6/2008
JP 2010010218 1/2010
WO WO-2011-062788 A1 5/2011

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 495 days.

OTHER PUBLICATIONS

Official Letter and Search Report (with English Translation) from the Taiwan Patent Office for Taiwan Patent Application No. 10212827, dated Dec. 16, 2015.

(21) Appl. No.: **17/505,468**

(Continued)

(22) Filed: **Oct. 19, 2021**

(65) **Prior Publication Data**

US 2022/0044971 A1 Feb. 10, 2022

Primary Examiner — Bilkis Jahan

(74) *Attorney, Agent, or Firm* — Schwabe, Williamson & Wyatt, P.C.

Related U.S. Application Data

(60) Continuation of application No. 16/844,588, filed on Apr. 9, 2020, now Pat. No. 11,183,432, which is a (Continued)

(57) **ABSTRACT**

Integrated circuits including MOSFETs with selectively recessed gate electrodes. Transistors having recessed gate electrodes with reduced capacitive coupling area to adjacent source and drain contact metallization are provided alongside transistors with gate electrodes that are non-recessed and have greater z-height. In embodiments, analog circuits employ transistors with gate electrodes of a given z-height while logic gates employ transistors with recessed gate electrodes of lesser z-height. In embodiments, subsets of substantially planar gate electrodes are selectively etched back to differentiate a height of the gate electrode based on a given transistor's application within a circuit.

(51) **Int. Cl.**

H01L 29/66 (2006.01)

H01L 21/28 (2006.01)


(Continued)

(52) **U.S. Cl.**

CPC **H01L 21/82385** (2013.01); **H01L 21/28008** (2013.01); **H01L 21/823431** (2013.01);

(Continued)

20 Claims, 12 Drawing Sheets

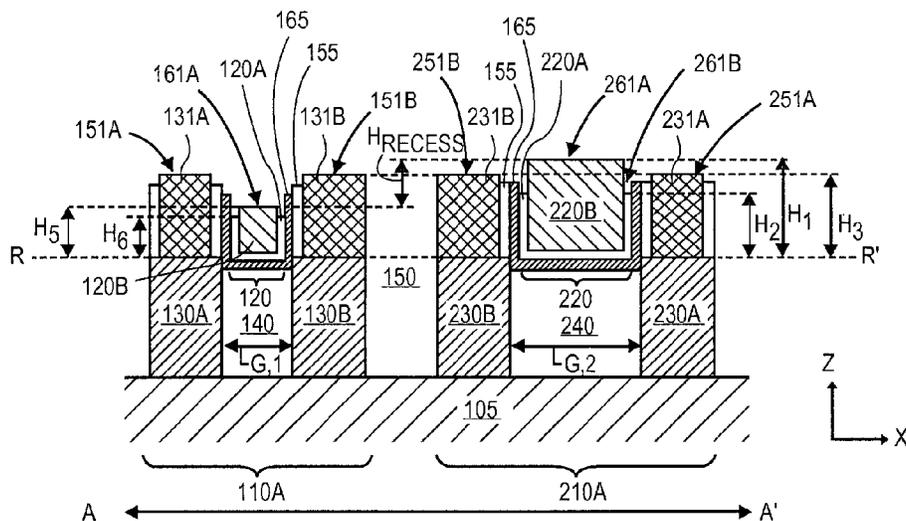

Related U.S. Application Data

continuation of application No. 16/020,722, filed on Jun. 27, 2018, now Pat. No. 10,651,093, which is a continuation of application No. 15/221,515, filed on Jul. 27, 2016, now Pat. No. 10,020,232, which is a continuation of application No. 14/548,215, filed on Nov. 19, 2014, now Pat. No. 9,418,898, which is a division of application No. 13/606,768, filed on Sep. 7, 2012, now Pat. No. 8,896,030.

(51) **Int. Cl.**

H01L 21/8234 (2006.01)
H01L 21/8238 (2006.01)
H01L 27/088 (2006.01)
H01L 27/092 (2006.01)
H01L 29/49 (2006.01)
H10B 10/00 (2023.01)

(52) **U.S. Cl.**

CPC **H01L 21/823456** (2013.01); **H01L 21/823821** (2013.01); **H01L 27/088** (2013.01); **H01L 27/0886** (2013.01); **H01L 27/0924** (2013.01); **H01L 29/495** (2013.01); **H01L 29/66477** (2013.01); **H10B 10/12** (2023.02)

(56)

References Cited

U.S. PATENT DOCUMENTS

7,148,548 B2	12/2006	Doczy	
7,157,378 B2	1/2007	Brask	
7,381,608 B2	6/2008	Brask	
7,397,095 B2	7/2008	Kim	
7,465,996 B2*	12/2008	Satou	H01L 21/823443 257/E21.624
8,232,607 B2	7/2012	Edge et al.	
8,896,030 B2	11/2014	Mukherjee	
10,651,093 B2	5/2020	Mukherjee	
2002/0052086 A1	5/2002	Maeda	
2005/0051854 A1	3/2005	Cabral, Jr. et al.	
2006/0076579 A1	4/2006	Thean et al.	
2006/0197165 A1	9/2006	Kim	

2007/0075374 A1	4/2007	Kudou	
2007/0122961 A1	5/2007	Zhu et al.	
2007/0278593 A1	12/2007	Watanabe	
2008/0224225 A1	9/2008	Ko	
2008/0261394 A1*	10/2008	Wang	H01L 29/665 257/E21.632
2010/0052074 A1	3/2010	Lin et al.	
2010/0297844 A1	11/2010	Yelehanka et al.	
2011/0108922 A1*	5/2011	Liu	H01L 27/092 257/E21.632
2011/0309450 A1	12/2011	Shifren et al.	
2013/0154026 A1*	6/2013	Alptekin	H01L 23/485 257/E21.585
2013/0175619 A1	7/2013	Fan et al.	
2013/0181265 A1*	7/2013	Grasshoff	H01L 21/76897 438/692
2013/0187236 A1*	7/2013	Xie	H01L 29/66553 257/369
2014/0027816 A1*	1/2014	Cea	H01L 29/1054 257/E29.085
2014/0131735 A1	5/2014	Hoentschel	
2014/0319623 A1*	10/2014	Tsai	H01L 21/823431 438/588
2015/0295087 A1	10/2015	Cheng	

OTHER PUBLICATIONS

International Preliminary Report on Patentability for International Application No. PCT/US2013/056804 mailed Mar. 19, 2015, full document.
 Notice of Allowance (2pages) from the Taiwan Patent Office for Taiwan Patent Application No. 10212827 mailed Jul. 20, 2016 and English Translation (1 page) thereof.
 International Search Report and Written Opinion for International Application No. PCT/US2013/056804 mailed Dec. 17, 2013, 11 pgs.
 Hsieh, Y.H. et al, "Process Development of High-k Meta! Gate Aluminum CMP at 28nm Technology Node", Sematech Advanced Metallization conference 2010, Oct 5- 8, Albany NY.
 Niwa, M., "Development of 32 nm CMOS and recent Trend for Beyond 32 nm", 7th Annual Sematech Symposium, Jun. 22, 2011, Tokyo Japan.

* cited by examiner

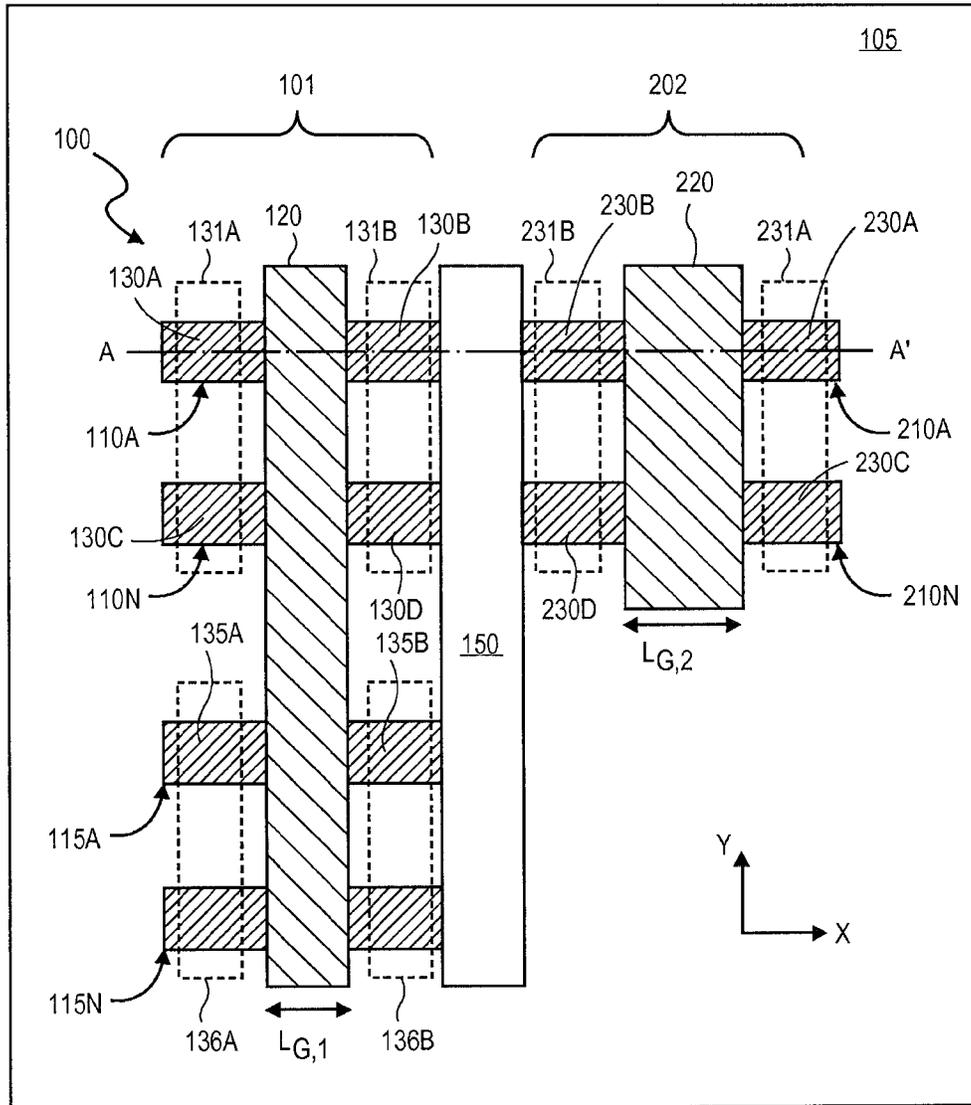


FIG. 1A

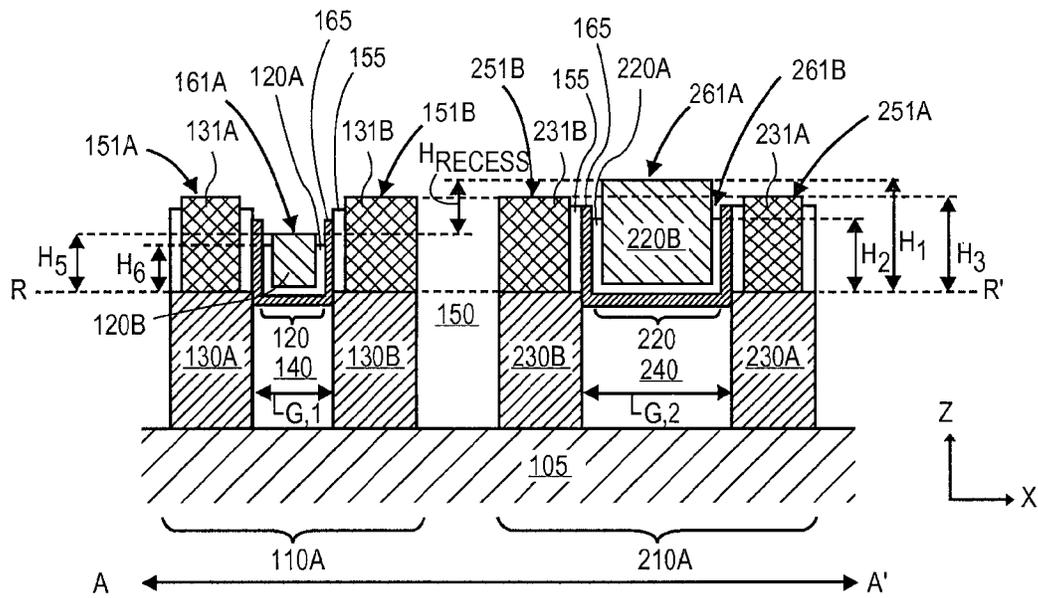


FIG. 1B

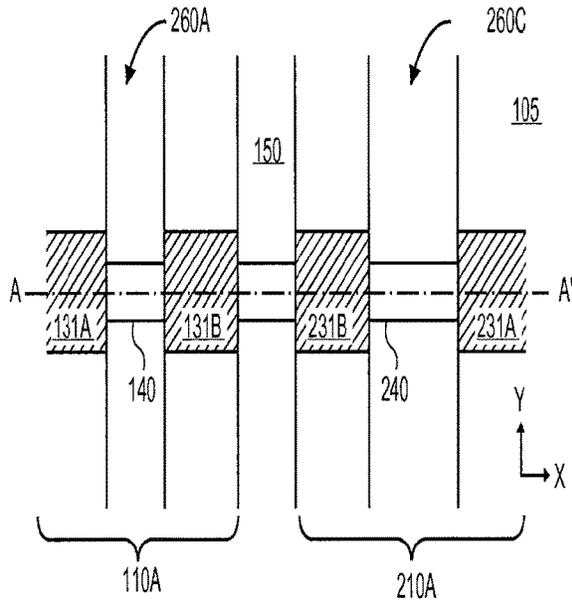


FIG. 2A

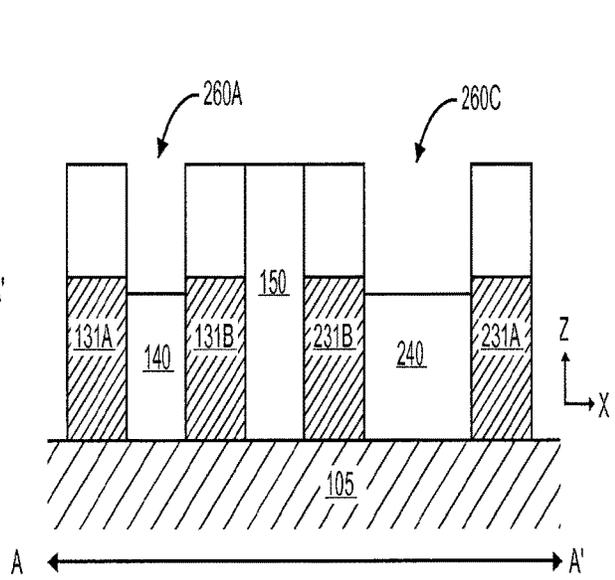


FIG. 2B

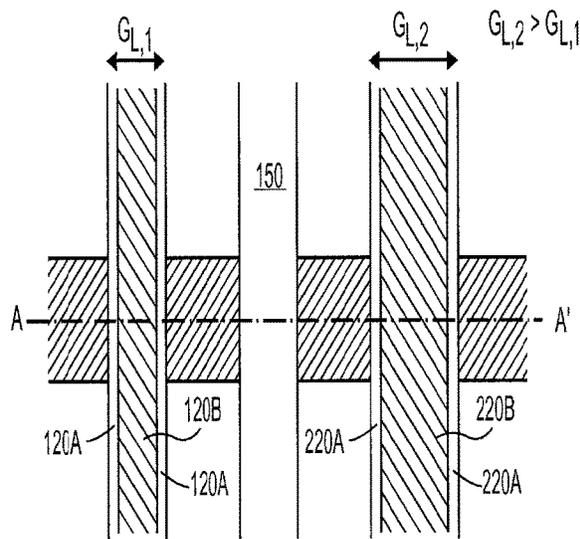


FIG. 3A

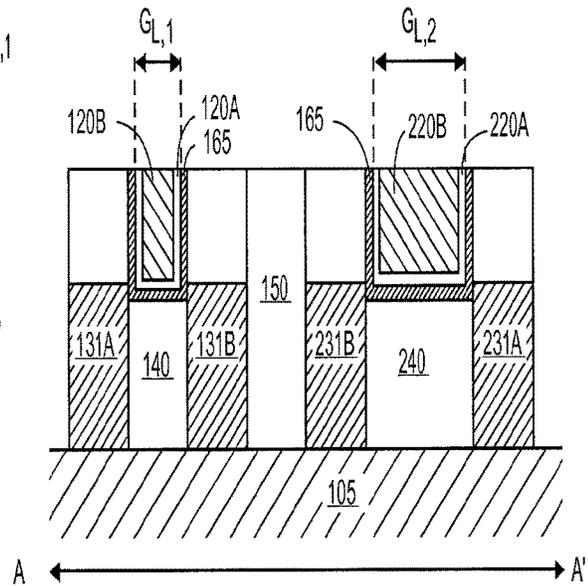


FIG. 3B

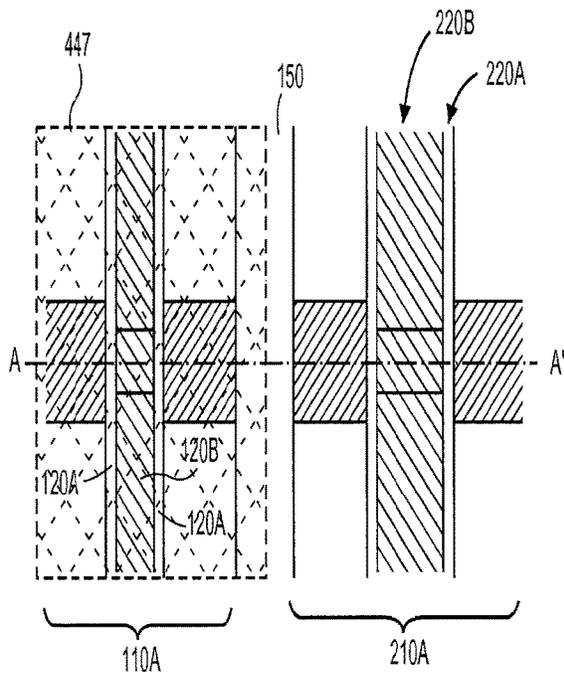


FIG. 4A

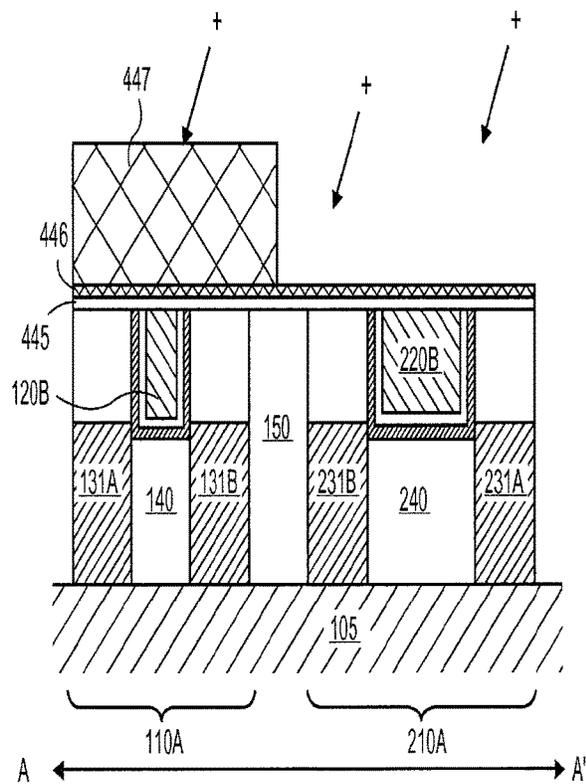


FIG. 4B

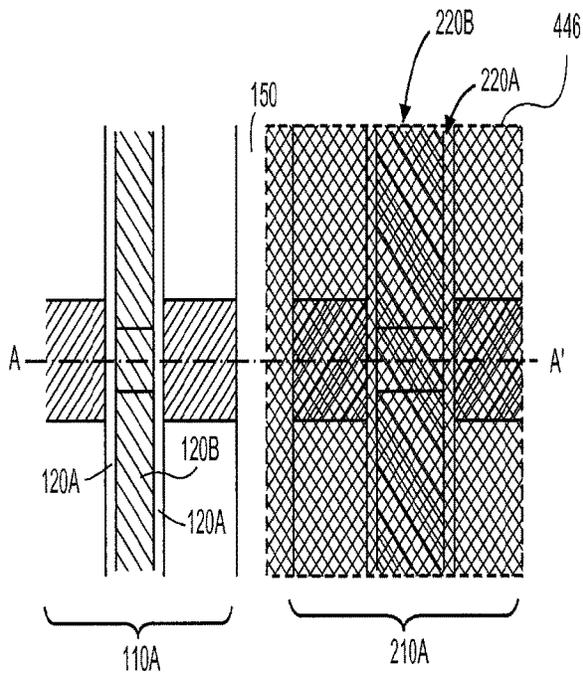


FIG. 5A

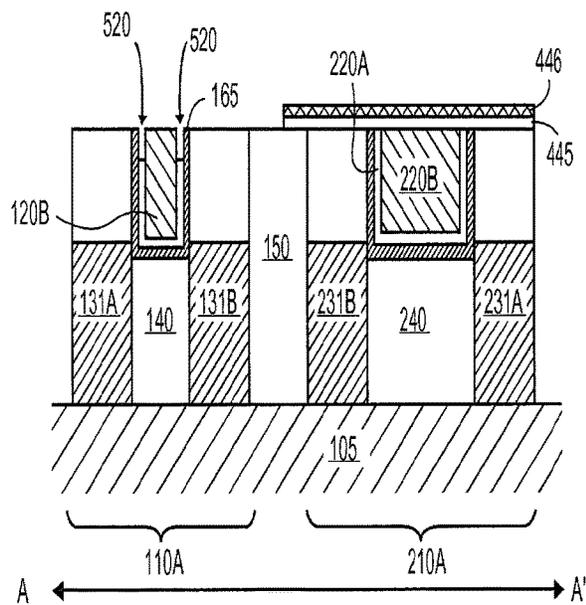


FIG. 5B

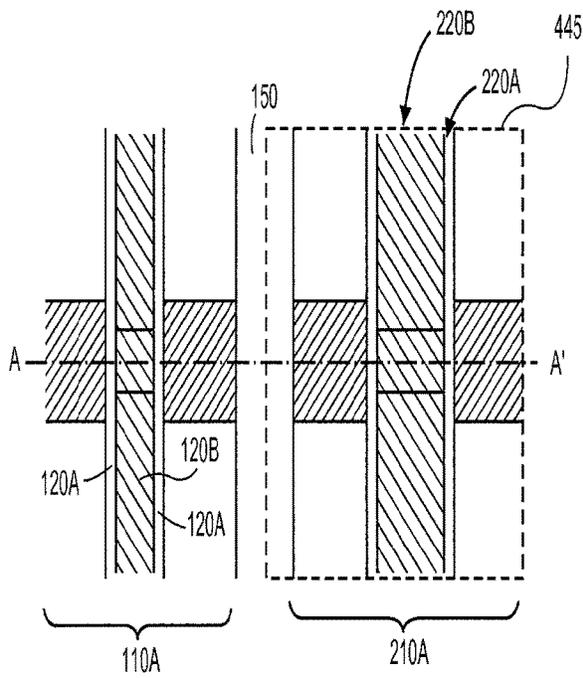


FIG. 6A

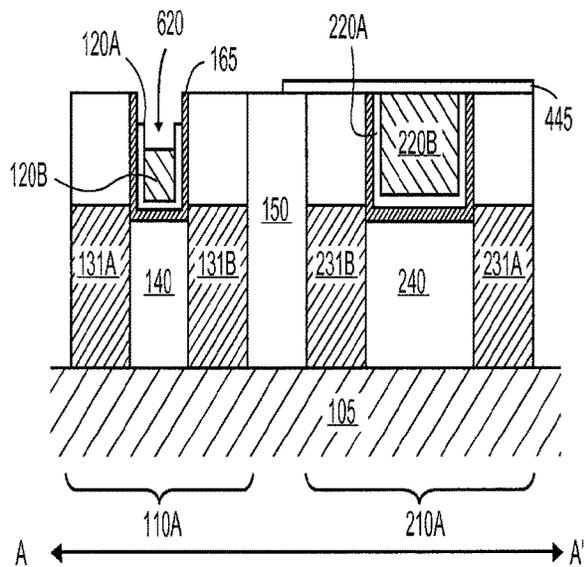


FIG. 6B

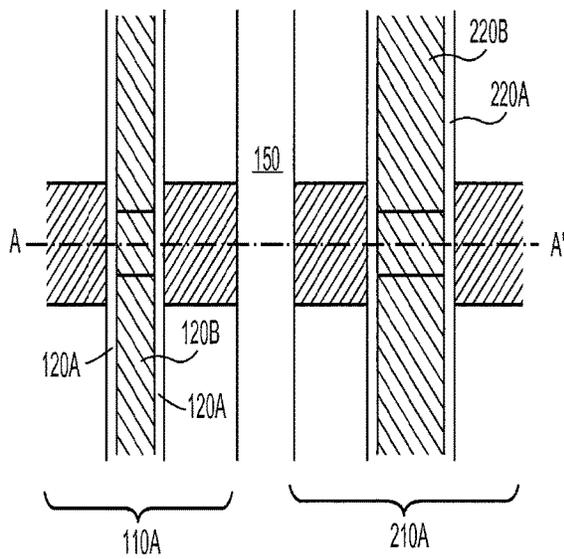


FIG. 7A

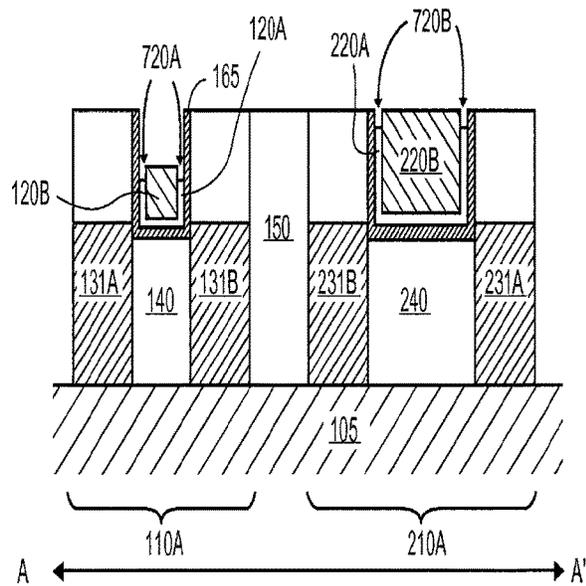


FIG. 7B

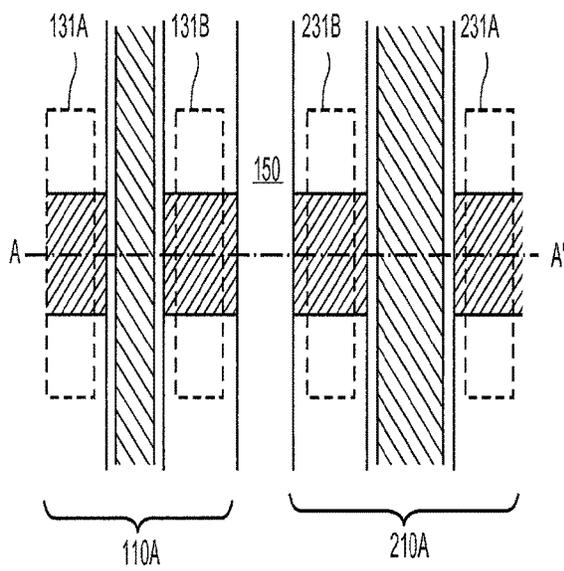


FIG. 8A

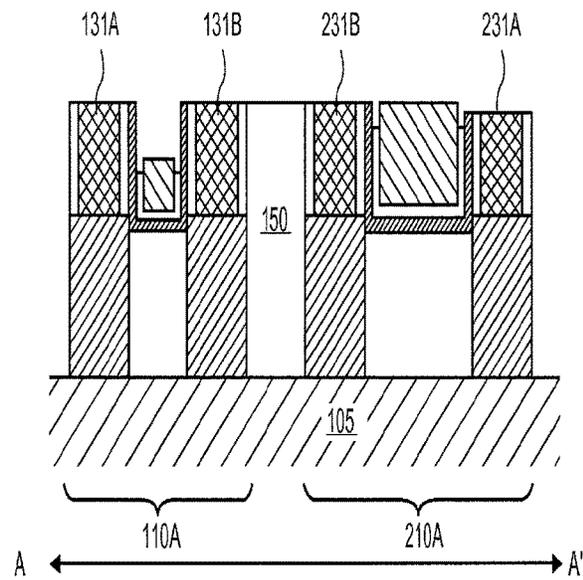


FIG. 8B

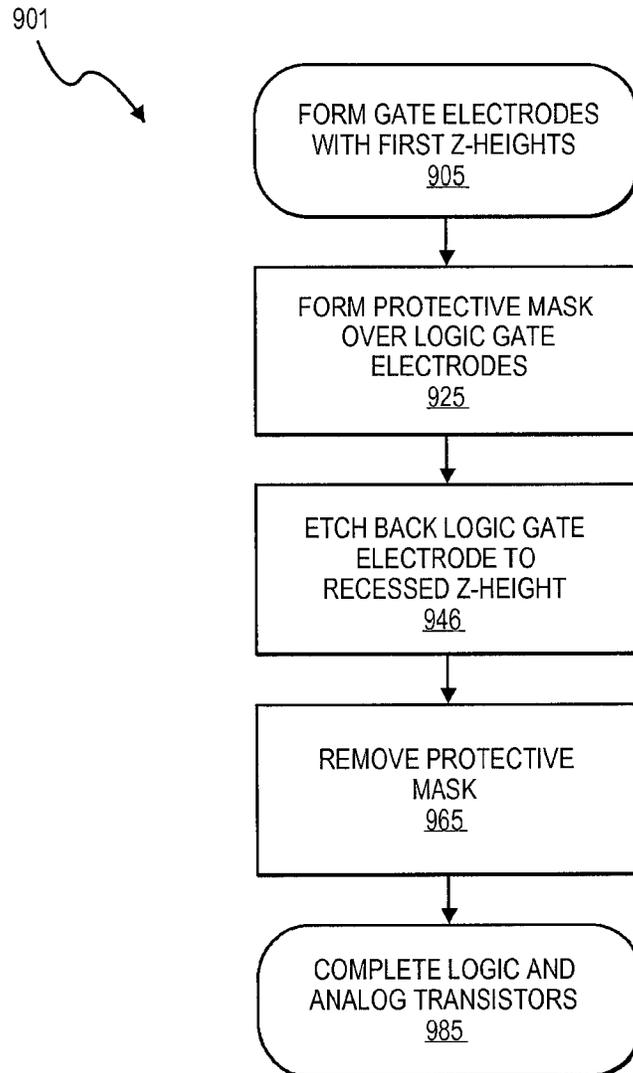


FIG. 9A

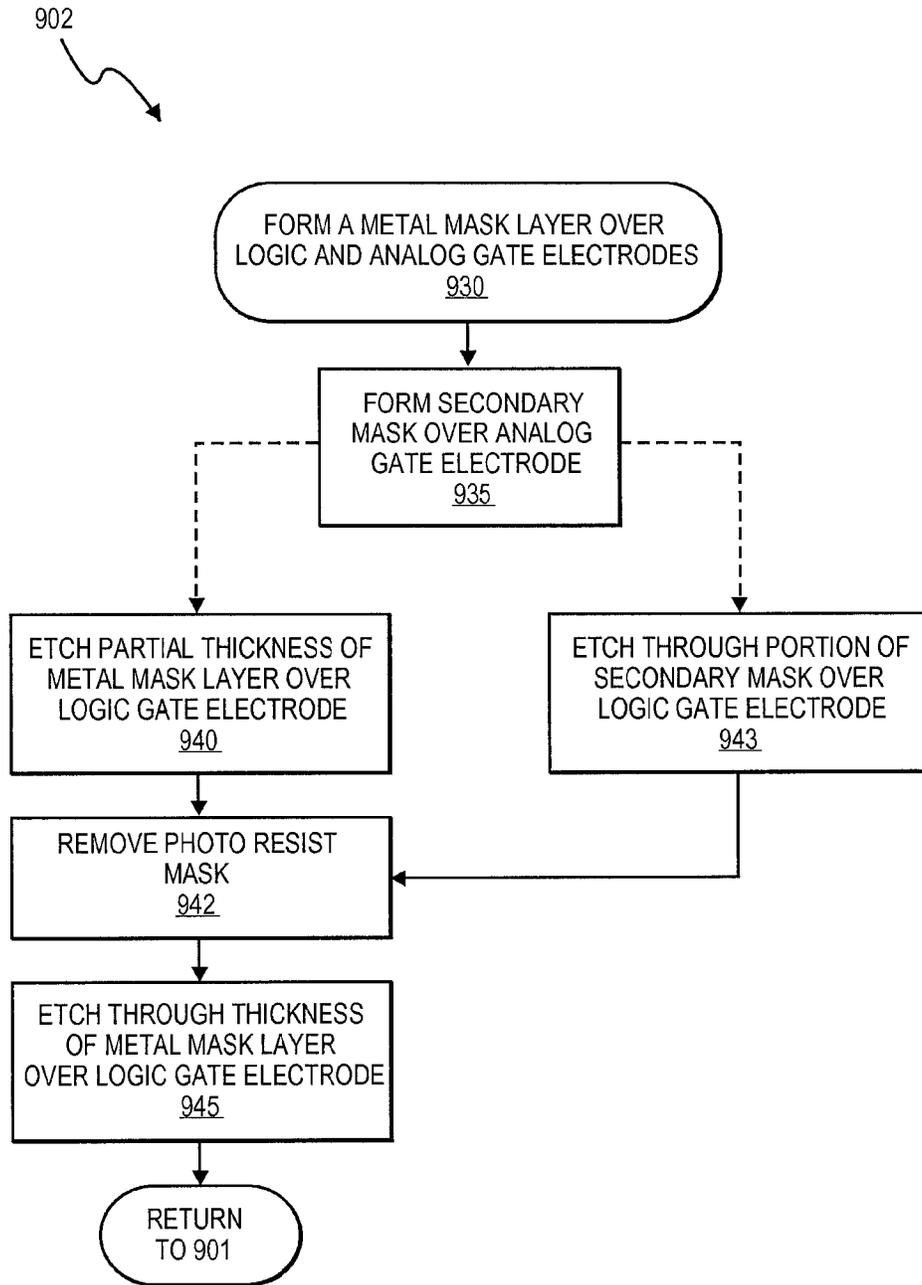


FIG. 9B

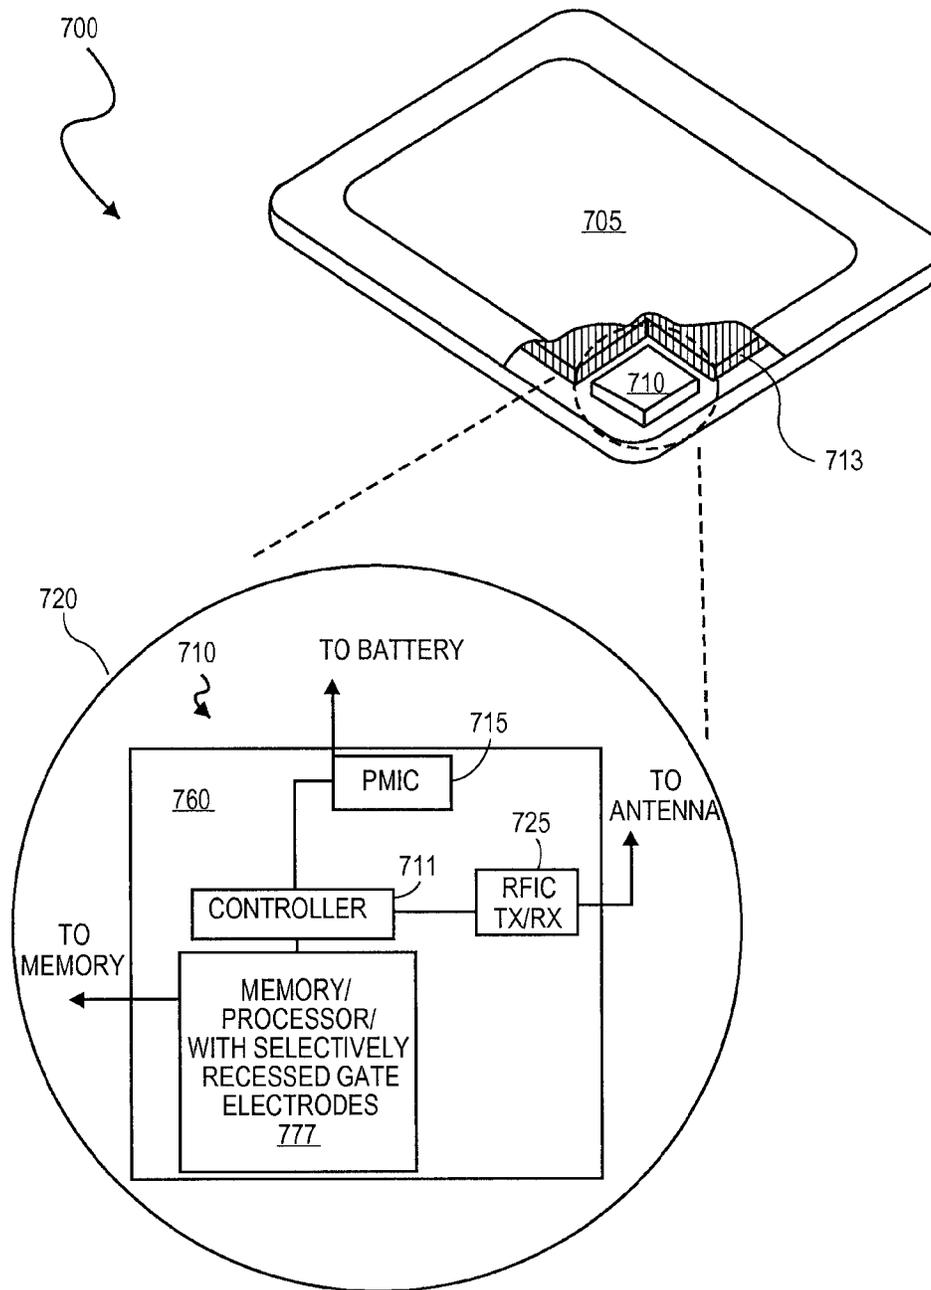


FIG. 10

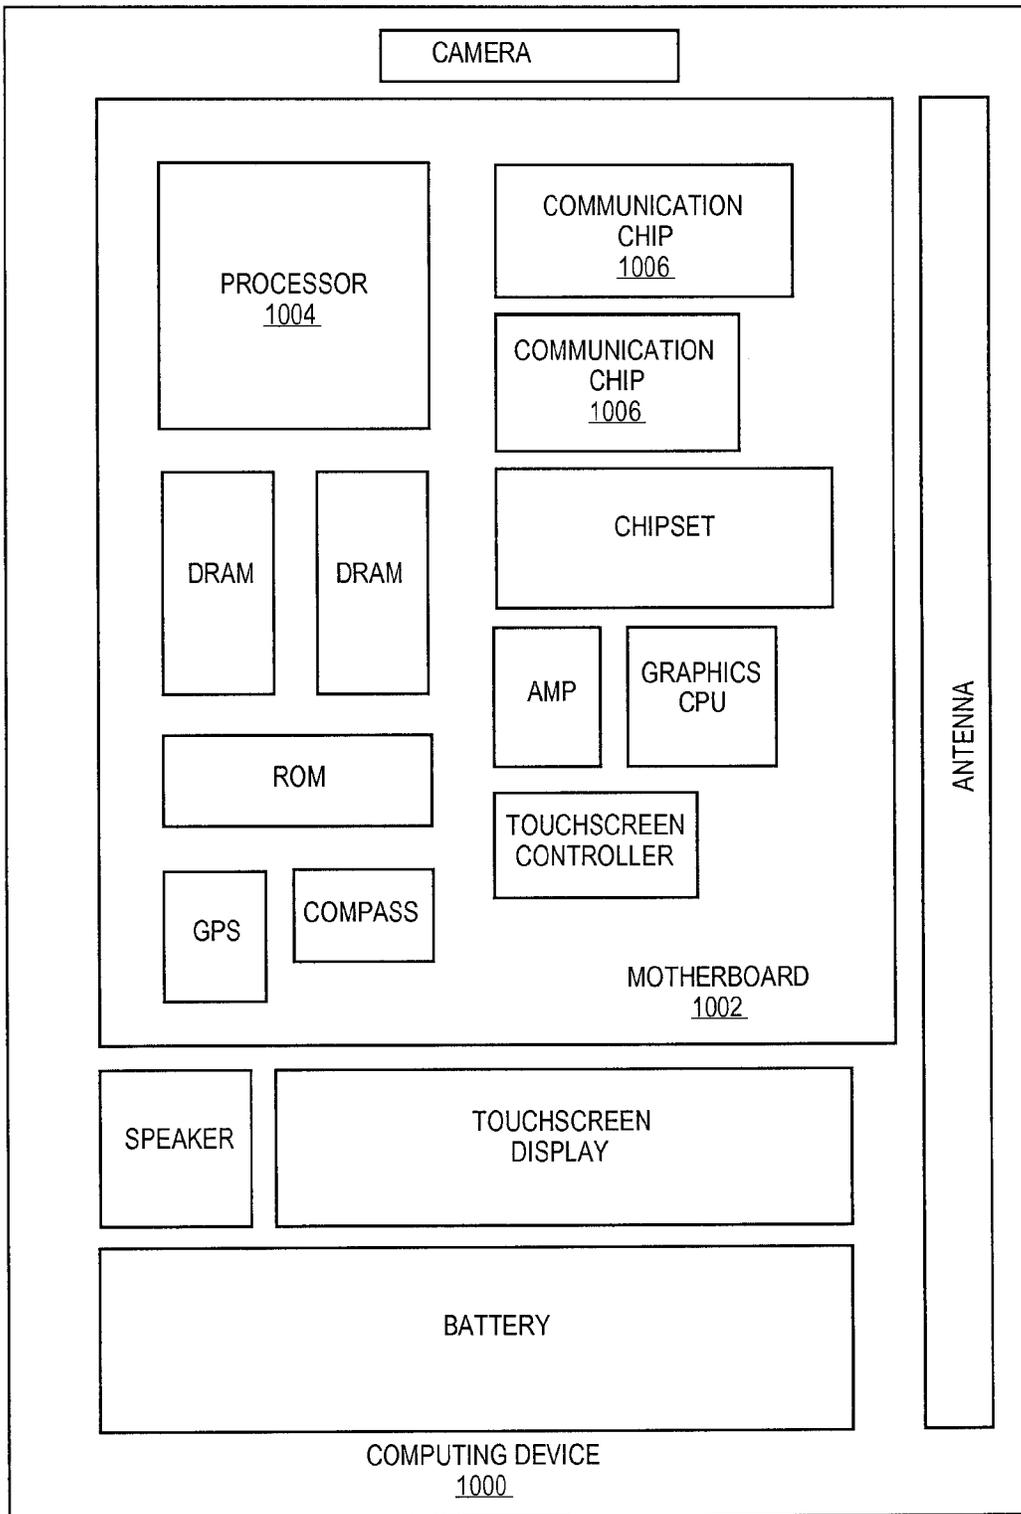


FIG. 11

INTEGRATED CIRCUITS WITH RECESSED GATE ELECTRODES

CROSS-REFERENCE TO RELATED APPLICATION

This is a Continuation of U.S. patent application Ser. No. 16/844,588, filed Apr. 9, 2020, which is a Continuation of U.S. patent application Ser. No. 16/020,722, filed Jun. 27, 2018, now U.S. Pat. No. 10,651,093, issued May 12, 2020, which is a Continuation of U.S. patent application Ser. No. 15/221,515 filed Jul. 27, 2016, now U.S. Pat. No. 10,020,232, issued Jul. 10, 2018, which is a Continuation of U.S. patent application Ser. No. 14/548,215, filed Nov. 19, 2014, now U.S. Pat. No. 9,418,898, issued Aug. 16, 2016, which is a Divisional of U.S. patent application Ser. No. 13/606,768, filed Sep. 7, 2012, now U.S. Pat. No. 8,896,030, issued Nov. 25, 2014, the entire contents of which are hereby incorporated by reference herein.

TECHNICAL FIELD

Embodiments of the invention generally relate to integrated circuits (ICs), and more particularly relate to transistor gate electrode structures where some gate electrodes are recessed relative to other gate electrodes.

BACKGROUND

In modern complementary metal-oxide-semiconductor (CMOS) technology, parasitic transistor gate electrode capacitance is an ever more significant limiter of device performance. With device scaling, reductions in feature pitch continue to reduce distances between electrical nodes of a physical transistor. The introduction of high-k gate dielectrics may also adversely impact parasitic capacitances, for example where fabrication of the high-k gate dielectrics results in high-k films in regions other than at the interface between a transistor channel and the gate electrode. Furthermore, in addition to scaling and new materials introductions, structure geometries are now changing dramatically as the microelectronics industry now transitions from a planar to a non-planar field effect transistor (i.e., Tri-gate or FinFET). Pioneers of non-planar transistor technology are now developing second generation non-planar devices.

Techniques to reduce parasitic gate electrode capacitance are therefore advantageous. Furthermore, because gate electrodes for a given IC chip are typically all of a same z-height, unlike lithographically defined x and y dimensions of the gate electrode, transistor-level z-height control is also advantageous for selective tuning of gate electrode properties.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present invention are illustrated by way of example, and not by way of limitation, and can be more fully understood with reference to the following detailed description when considered in connection with the figures in which:

FIG. 1A is a plan view of a layout of transistors in different circuits on a substrate, in accordance with an embodiment of the present invention;

FIG. 1B is a cross-sectional view of two transistors illustrated in FIG. 1A further illustrating one gate electrode recessed relative to another gate electrode, in accordance with an embodiment;

FIGS. 2A, 3A, 4A, 5A, 6A, 7A, and 8A are plan views of MOS transistors as particular fabrication operations are performed to selectively recess gate electrodes, in accordance with an embodiment;

FIGS. 2B, 3B, 4B, 5B, 6B, 7B, and 8B are cross-sectional views corresponding to the plan views in FIGS. 2A, 3A, 4A, 5A, 6A, 7A, and 8A, in accordance with embodiments;

FIGS. 9A and 9B are flow diagrams illustrating methods of selectively recessing gate electrodes, in accordance with embodiments;

FIG. 10 is an isometric view of a mobile computing platform employing an IC with transistors of recessed and non-recessed gate electrode z-heights, in accordance with an embodiment of the present invention; and

FIG. 11 is a functional block diagram of the mobile device illustrated in FIG. 10, in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION

In the following description, numerous details are set forth, however, it will be apparent to one skilled in the art, that the present invention may be practiced without these specific details. In some instances, well-known methods and devices are shown in block diagram form, rather than in detail, to avoid obscuring the present invention. Reference throughout this specification to “an embodiment” or “in one embodiment” means that a particular feature, structure, function, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. Thus, the appearances of the phrase “in an embodiment” in various places throughout this specification are not necessarily referring to the same embodiment of the invention. Furthermore, the particular features, structures, functions, or characteristics may be combined in any suitable manner in one or more embodiments. For example, a first embodiment may be combined with a second embodiment anywhere the two embodiments are not specified to be mutually exclusive.

The terms “coupled” and “connected,” along with their derivatives, may be used herein to describe structural relationships between components. It should be understood that these terms are not intended as synonyms for each other. Rather, in particular embodiments, “connected” may be used to indicate that two or more elements are in direct physical or electrical contact with each other. “Coupled” may be used to indicate that two or more elements are in either direct or indirect (with other intervening elements between them) physical or electrical contact with each other, and/or that the two or more elements co-operate or interact with each other (e.g., as in a cause an effect relationship).

The terms “over,” “under,” “between,” and “on” as used herein refer to a relative position of one material layer or component with respect to other layers or components. For example, one layer disposed over or under another layer may be directly in contact with the other layer or may have one or more intervening layers. Moreover, one layer disposed between two layers may be directly in contact with the two layers or may have one or more intervening layers. In contrast, a first layer “on” a second layer is in direct contact with that second layer. Similarly, unless explicitly stated otherwise, one feature disposed between two features may be in direct contact with the adjacent features or may have one or more intervening features.

In embodiments, integrated circuits (ICs) including MOSFETs have selectively recessed transistor gate electrodes. In other words, a transistor with a gate electrode of lesser

z-height (i.e., a recessed gate electrode) is monolithically integrated with a transistor having a gate electrode of greater z-height (i.e., non-recessed gate electrodes). As such, in addition to x and y dimensions of a gate electrode being definable at a transistor-level, so too is the gate electrode z-dimension. Transistors with gate electrodes of lesser z-height benefit from reduced parasitic capacitive coupling area, for example, to adjacent source/drain diffusion contact metallization. Parasitic gate capacitance can be most simply modeled as $C = \epsilon A/d$ with A being proportional to z-height of a gate electrode, d being the spacing between the gate electrode and adjacent source/drain contact metallization, and ϵ being an effective dielectric constant of material disposed between the electrode and contact metallization. As such, a parasitic capacitive area associated with a gate electrode may be modulated through fabrication, along with other structural attributes of the gate electrode, such as gate length (L_g) and gate width, based on a given transistor's function within a circuit. Similarly, other gate electrode properties beyond parasitic capacitive area, such as, but not limited to, work function, may be tuned through a modulation of z-height. In embodiments, transistor gate electrode z-heights are differentiated based on individual circuit demands. For example, in circuits where maximum consistency of gate electrode dimension is advantageous for analog transistor matching, or where retention of a greater amount of one or more gate materials enables advantageous tuning of transistor gate electrode work functions, transistors of a greater gate electrode z-height may be employed alongside circuits employing transistors with a recessed gate electrode where minimum parasitic gate capacitance is advantageous.

In one exemplary embodiment, one or more logic gate is recessed from a z-height associated with one or more analog gate. In other words, a greater gate electrode z-height may be provided for an analog gate than a logic gate. In certain such embodiments, all logic gates of a particular IC are recessed from a nominal z-height of all analog gates in the IC. In other embodiments, gate electrode z-height, and the associated parasitic gate electrode capacitance, is differentiated on another basis where only a subset of logic transistors have recessed gate electrodes, or where one or more analog transistors have recessed gates. For example, gate electrode z-height may be modulated between transistors on the basis of conductivity type where NMOS and PMOS transistors have different gate electrode z-heights. In still other embodiments, gate electrode z-height may be varied between two recessed gates. For example, a first transistor in a logic circuit may be recessed relative to reference z-height (e.g., that of an analog gate) by a first amount, such as 25%, while a second transistor in the logic circuit may be recessed by a second amount, such as 45%. While gate electrode z-height differentiation is most thoroughly described herein in the context of logic and analog gates, it will be appreciated that the exemplary structures are equally applicable for differentiating gate electrode z-heights based on any circuit design criteria, or transistor function.

FIG. 1A is a plan view of a layout of certain transistors in a microelectronic device **100**, such as an IC, formed on a substrate **105**. The microelectronic device **100** includes a circuit **101** and a circuit **202**. Generally, the circuit **101** represents a portion of any circuit employing a MOSFET logic gate electrode **120** (i.e., logic circuitry). In the illustrated embodiment, the circuit **101** is an inverter (i.e., NOT gate). In one such embodiment, the circuit **101** is a portion of a static random access memory (SRAM) circuit, for example part of an SRAM cache memory of a micropro-

cessor. The circuit **202** generally represents a portion of any circuit employing MOSFET analog gate electrode **220** (i.e., analog circuitry). For example, the circuit **202** may be a portion of an amplifier circuit, driving a load in response to a control voltage on the gate electrode, as for an I/O circuit of the microelectronic device **100**, as part of a thermal sensing circuit, or part of a band gap reference circuit, etc. As illustrated, the MOSFET logic gate electrode **120** has a gate length, $L_{g,1}$ and the MOSFET analog gate electrode **220** has a gate length, $L_{g,2}$. Generally, analog gates are of a greater length than logic gates. In the exemplary embodiment, $L_{g,2}$ is at least 50% larger than $L_{g,1}$. Although the circuits **101**, **202** are separated only by an isolation region **150** of minimum dimension, the circuits employing transistor with differentiated gate electrode heights may also be separated by much greater distances, for example where the circuit **101** is located in a core of a microprocessor and the circuit **202** is located in a periphery of the microprocessor core.

As further illustrated in FIG. 1A, the circuit **101** includes a first MOS transistor utilizing a non-planar semiconductor "fin" **110A** disposed over a first portion of the substrate **105** while the circuit **202** includes a second MOS transistor utilizing a non-planar semiconductor fin **210A**. While the exemplary embodiments utilize non-planar MOSFETs, or "finFETs," the skilled artisan may also apply the teachings herein to a planar MOS transistor. In one embodiment illustrated by FIG. 1A, gate electrodes of different heights are employed in the different circuits **101** and **202**. For example, a transistor of circuit **101** includes a logic gate electrode **120** disposed over the fin **110A** that is "recessed from" or "shorter than" the "non-recessed" analog gate electrode **220** disposed over the fin **210A** found in the transistor of circuit **202**.

FIG. 1B is a cross-sectional view of the two transistors **110A** and **210A** along the dashed A-A' line of FIG. 1A and further illustrates a z-height difference between the logic gate electrode **120** and analog gate electrode **220**. As shown in FIG. 1B, the logic gate electrode **120** is disposed over a semiconductor channel region **140** of the fin **110A** while the analog gate electrode **220** is disposed over a semiconductor channel region **240**. Both the gate electrodes **120** and **220** have bottom electrode surfaces proximate to the semiconductor channel regions **140**, **240**, respectively, with a gate dielectric **165** disposed there between. In the exemplary embodiment, bottom electrode surfaces of the gate electrodes **120** and **220** are at a same reference plane R-R', however bottom gate surfaces may also be different between gate electrodes of different z-height. The analog gate electrode **220** has a top surface portion **261A** at a z-height H_1 from the bottom gate electrode surface disposed at RR' while the logic gate electrode **120** has a top surface portion **161A** at a gate electrode z-height H_5 from the bottom gate electrode surface disposed at R-R'. As shown, at least a portion of the top electrode surface **161A** is recessed below at least a portion of the top electrode surface **261A** such that the gate electrode z-height H_5 is different than the gate electrode z-height H_1 by the recess amount H_{recess} . Although the gate electrodes **120** and **220** are depicted as having perfectly flat, or level top surfaces, real devices can be expected to have at least some variation in z-height at different points within a given gate electrode. As such, H_1 , H_5 , and similar quantities, may be considered averages taken over a same area over a semiconductor channel region and between source-drain contact metallization.

Generally, the recess amount H_{recess} is more than the z-height variation to be found in the gate electrode height H_1

such that a recessed gate electrode with z-height H_5 is statistically different from a population of gate electrodes characterized by a nominal z-height H_1 . A population of transistors with recessed gate electrodes characterized as having a z-height H_5 , along with a population of gate electrodes characterized by a nominal z-height H_1 , would form a bimodal distribution of gate electrode z-heights. In embodiments where good z-height control is achieved for the analog gate electrode **220** (i.e., deviation about H_1 is small), H_{recess} may be as little as 5% of H_1 . Noting a greater H_{recess} corresponds to greater reduction in parasitic capacitance associated with the logic gate electrode **120**, H_{recess} is at least 15% of H_1 in more favorable embodiments, at least 25% of H_1 in highly advantageous embodiments, and at least 30-50% of H_1 (i.e., H_5 is 50%-70% H_1) in exemplary embodiments. Although a practical upper bound on H_{recess} may vary considerably as a function of implementation and process tolerances, z-height may differ between electrodes by even 80%.

As illustrated in FIGS. 1A and 1B, the semiconductor fin **110A** further includes a first source/drain region **130A** and a second source/drain region **130B** disposed on either side of the logic gate electrode **120** while the semiconductor fin **210A** further includes a first source/drain region **230A** and a second source/drain region **230B**. As further illustrated in FIG. 1A, the exemplary microelectronic device **100** replicates each of the semiconductor fins **110A**, **115A**, **210A**, and **215A** as fins **110N**, **115N**, **210N**, and **215N**, respectively, having source/drain regions (e.g., **130C**, **130D**, **230C**, **230D**) that also couple to source/drain contacts (e.g., **131A**, **131B**, **231A**, **231B**). Any number of such fins may share a same gate electrode.

The source/drain regions (e.g., **130A**, **130B**, **230A**, **230B**) may be doped regions of the semiconductor fin **110A** and may include regrown or epitaxially deposited semiconductor regions such that the z-heights of the source/drain regions exceeds that of the channel regions **140**, **240**, as depicted. In one exemplary embodiment where the circuit **101** is a CMOS inverter the circuit **101** includes a transistor of a first conductivity type (e.g., N-type) and a transistor of a second, complementary, conductivity type (e.g., P-type). For example, referring to FIG. 1A, where a first transistor employing the semiconductor fin **110A** has source/drain regions **130A**, **130B** of a first conductivity type (e.g., N-type); a second transistor sharing the logic gate electrode **120** employing a semiconductor fin **115A** has source/drain regions **135A**, **135B** of a second conductivity type (e.g., P-type). Each of these source/drain regions are further coupled to source/drain contacts **131A**, **131B**, **136A**, **136B**, drawn in dashed line for the sake of clear illustration. Notably, although in the exemplary CMOS inverter embodiment the logic gate electrode **120** has the approximately the same z-height (e.g., H_5) over both the semiconductor fins **110A** and **115A**, the techniques described herein also enable gate electrode z-height differentiation even between two transistors having a same gate electrode. For example, the height of the logic gate electrode **120** may vary from the z-height H_5 proximate to the semiconductor fin **110A** to the z-height H_1 proximate to the semiconductor fin **115A**. Furthermore, although not depicted, it should be appreciated that the gate electrode z-height differentiation illustrated in FIG. 1B between a logic transistor and an analog transistor may also be extended to three or more different gate electrode z-heights. As one example, for an SRAM embodiment employing the circuit **101**, a pull-down transistor may have a first recessed gate electrode (e.g., recessed 45% relative to

an analog gate of the IC) while a pass transistor has a second recessed gate electrode (e.g., recessed 25% relative to an analog gate of the IC).

In embodiments, an entire width of a gate electrode is recessed. For example, referring to FIG. 1A, where the logic gate electrode **120** makes a stripe, the entire stripe is of a same z-height (e.g., H_5 from FIG. 1B). In alternate embodiments, where a gate electrode is recessed only along portions of its width, the gate electrode has a reduced z-height along a width of the gate extending adjacent to a source/drain contact. For example, as also illustrated in FIG. 1A, the microelectronic device **100** may include any number of non-planar transistors electrically coupled together in parallel for a greater current carrying channel width and embodiments of the present invention are not limited in this respect. For the exemplary microelectronic device **100**, each of the semiconductor fins **110A**, **115A**, and **210A** are replicated as fins **110N**, **115N**, and **210N**, respectively, having source/drain regions that also couple to source/drain contact metallization. In the exemplary embodiment where a single contact metallization **131A** spans multiple fins **110A** and **110N**, the logic gate electrode **120** is recessed along a width adjacent to the contact metallization **131A**. The logic gate electrode **120** may then be similarly recessed along the width adjacent to **135A**, with a full z-height (e.g., H_1) in the intervening span of the logic gate electrode **120**, for example where the logic gate electrode **120** may be contacted by an upper level metal.

In embodiments, a gate electrode with a reduced z-height has a top gate electrode surface that is recessed below a top surface of the contact metallization by an amount greater than is the top electrode surface of a gate electrode having a full z-height. For example, as illustrated in FIG. 1B, the logic gate electrode top surface **161A** is recessed from the contact metallization top surfaces **151A**, **151B** while the analog gate electrode top surface **261A** is not recessed from the contact metallization top surfaces **251A**, **251B**, and may actually be proud of the top surfaces **251A**, **251B**, as depicted. In further embodiments, a gate electrode with a reduced z-height has a top gate electrode surface that is recessed below a top surface of an adjacent spacer dielectric. For example, as also illustrated in FIG. 1B, the logic gate electrode top surface **161A** is recessed from a top surface of the dielectric spacer **155** while the analog gate electrode top surface **261A** is not recessed from the adjacent dielectric spacer **155**.

In embodiments where gate electrodes include a bulk material and a work function material (i.e., a gate electrode stack), at least the bulk material of a recessed gate electrode has a reduced z-height relative to bulk material of a non-recessed gate electrode. In the exemplary embodiment illustrated in FIG. 1B, the gate electrodes **120**, **220** have work function materials **120A**, **220A** respectively disposed between the bulk materials **120B**, **220B** and the gate dielectric **165**. In the depicted embodiment where the gate electrodes are formed by filling a trench, as in a gate replacement process, the work function materials **120A**, **220A** are disposed along opposite sidewalls of the bulk materials **120B**, **220B** with both the bulk materials **120B**, **220B** and the work function materials **120A**, **120B** present at portions of the first and second top electrode surfaces **161A**, **261A**, respectively. Generally, the work function materials **120A**, **120B** may be any known in the art. Notably, the work function material **120A** may also be different than the work function material **220A**, for example where different work functions are desired for transistors of different conductivity type. Similarly, the bulk materials **120B**, **220B** may be any known in

the art, such as, but not limited to polysilicon or one or metals (e.g., tungsten (W), copper (Cu), aluminum (Al), their alloys, etc.). For alternative embodiments where a gate electrode is a homogenous material, the entire gate electrode is represented by the bulk material illustrated in the more complex gate electrode stack.

As illustrated in FIG. 1B, both the bulk material **120B** and the work function material **120A** in the logic gate electrode **120** are recessed, to z-heights H_5 and H_6 , respectively. Depending on the embodiment, H_5 and H_6 may be approximately equal, H_6 may be significantly less than H_5 , as depicted, or H_6 may be significantly larger than H_5 , (e.g., where work function material stringers are left as fabrication artifacts along the adjacent gate dielectric **165** and/or spacer dielectric **155** separating the logic gate electrode **120** from the adjacent source/drain contacts **131A**, **131B**). In advantageous embodiments, both H_5 and H_6 are recessed by H_{recess} that is at least 5%, and more advantageously at least 25% and most advantageously at least 30-50% the z-height H_1 . Reducing z-height of both bulk and work function materials may have a greater impact on parasitic capacitance, although depending on the conductivity of the work function material **120A**, recessing of the bulk material **120B** alone may provide a notable reduction in parasitic gate capacitance, or favorable tuning of work function. Conversely, having the analog gate **220** at a z-height of H_1 may advantageously provide a desired amount of one or more work function material **220A** and/or bulk material **220B** desired for analog circuit performance (e.g., to achieve a particular work function for the analog gate **220** or achieve a level of matching between two analog gates). While the illustrative embodiment depicts gate electrode structure indicative of a gate replacement fabrication technique, embodiments of the present invention are also applicable to "gate first" fabrication techniques where a gate electrode top surface typically entails only the bulk material with the work function material and/or the gate dielectric **165** absent from the sidewalls of the bulk gate material. Thus, in both replacement-gate and gate-first embodiments, at least the bulk material of a recessed gate electrode has a reduced z-height.

Depending on the technique employed to selectively differentiate gate electrode z-heights between transistors, the amount of recess between two gate electrodes may further differ between bulk materials and work function materials as a function of a difference in z-height between the bulk material and the work function metal present in a gate electrode having the greater z-height. For example, as illustrated for the analog gate **220** in FIG. 1B, the work function material forms a sidewall having a top surface **261B** at z-height H_2 from the bottom gate electrode surface on the R-R' plane. In the exemplary embodiment where H_2 is less than H_1 associated with the bulk material, the work function metal of the analog gate **220** is itself recessed relative to the bulk material such that the top surface portion **161A** of the logic gate electrode **120** is recessed from the bulk material top surface **261A** more than it is from the work function material top surface **261B**.

With structural features associated with embodiments of the present invention described, techniques for selectively recessing gate electrode in accordance with embodiments of the present invention are now described. FIGS. **2A**, **3A**, **4A**, **5A**, **6A**, **7A**, and **8A** are plan views of transistors as particular fabrication operations are performed to selectively recess gate electrodes, in accordance with an embodiment. Such techniques may be utilized to arrive at the structures of FIGS. **1A**, **1B**. FIGS. **2B**, **3B**, **4B**, **5B**, **6B**, **7B**, and **8B** are

cross-sectional views corresponding to the plan views in FIGS. **2A**, **3A**, **4A**, **5A**, **6A**, **7A**, and **8A**, in accordance with embodiments. FIG. **9A** is a flow diagram illustrating methods **901**, **902** for recessing logic gate electrodes selectively to analog gate electrodes, in accordance with embodiments. It is noted that while the exemplary methods are described in furtherance of the exemplary embodiment where gate electrode z-height is differentiated between logic and analog gates, it will be appreciated that the exemplary methods are equally applicable to differentiating gate electrode z-heights for any subset of gate electrodes based on any circuit design criteria, or transistor function.

Referring first to FIG. **9A**, the method **901** generally entails forming first and second gate electrodes (e.g., a logic and an analog gate) at given z-heights and then selectively etching back the first (logic) gate electrode relative to the second (analog) gate electrode to arrive at electrodes with differing z-heights. The exemplary method **901** begins at operation **905** with forming logic and analog gate electrodes having bottom electrode surfaces proximate to a gate dielectric disposed over semiconductor channel regions and having a top electrode surface at a nominal height from the bottom gate electrode surface. While operation **905** may be performed with any techniques known in the art and embodiments of the present invention are not limited in this respect, in the exemplary embodiment illustrated in FIGS. **2A** and **2B**, operation **905** entails first processing the substrate **105** to form trenches **260A** and **260C** exposing semiconductor channel regions **140** and **240**. As further illustrated in FIGS. **3A** and **3B**, operation **905** then entails filling the trenches **260A** and **260C** with the gate dielectric **165**, the work function materials **120A**, **220A** and the bulk materials **120B**, **220B** and polishing back any overburden to arrive at substantially planarized logic and analog gate electrode top surfaces of a substantially same z-height for both a logic gate and an analog gate.

The method **901** then proceeds to operation **925** where a protective mask is formed over an analog gate electrode as a basis for selectively recessing at least a portion of an unmasked (logic) gate electrode to a level below at least a portion of the protected top electrode surface. Formation of the protective mask may be non-trivial in view of the materials employed for the gate electrodes and their reactivity with mask materials and/or the susceptibility of the mask material to processes employed to recess one or more portions of the first gate electrode. For example, where a bulk material of the gate electrodes is tungsten, a tungsten etch process may have insufficient selectivity to a photosensitive mask (e.g., photo resist) or a subsequent photo resist strip (e.g., ash) may be detrimental to one or more materials present after recessing a gate electrode. As such, method **902** (FIG. **9B**) illustrates advantageous embodiments where forming the protective mask further entails forming a multi-layered mask. In embodiments, the multi-layered mask comprises a plurality of layers, at least one of which is a non-photosensitive hard mask. In particularly advantageous embodiments where a gate electrode includes at least a metal bulk material, such as tungsten, the multi-layered mask includes a metal mask layer, formed in direct contact with the logic and analog gate electrodes at operation **930**. In exemplary embodiments, the metal mask layer is a metal present in the gate electrode, for example in the bulk material or in a work function material.

FIGS. **4A** and **4B** further illustrate a metal mask layer **445** deposited over the substrate **105**, in contact with top surfaces of the gate electrode bulk materials **120B**, **220B**, as well as the work function materials **120A**, **220A**. For the exemplary

metal gate embodiments where the gate electrode bulk materials **120B**, **220B** and work function materials **120A**, **220A** are all metals, the metal mask **445** includes a metal which may be etched selectively to at least the metal(s) employed in the bulk materials **120B**, **220B**. In one exemplary embodiment where the bulk materials **120B**, **220B** are tungsten, the metal mask **445** comprises titanium (Ti) or a non-tungsten alloy thereof having good etching properties (e.g., TiN, TiAl, etc.). In advantageous embodiments, the metal mask **445** is a binary non-tungsten Ti alloy, which has only trace levels of impurities that are immaterial to the functions of the metal mask **445** described herein. As described further herein, depending on the embodiment, the metal mask **445** may have a range of thicknesses between 20 nm and 300 nm, for example.

Returning to FIG. 9B, with the metal mask layer in place, formation of the protective mask proceeds with operation **935** wherein a secondary mask is formed over a portion the metal mask layer that is disposed over only the analog gate electrode (i.e., the electrode that is to remain at a full z-height as formed at operation **905** (FIG. 9A). As illustrated by the dashed lines in FIG. 9B, the method **902** depends on whether the secondary mask formed at operation **935** is a photosensitive or non-photosensitive mask.

In one embodiment, where a photosensitive secondary mask (i.e., photo resist) is formed on the metal mask layer at operation **935**, the method **902** proceeds to operation **940** where a partial thickness of the metal mask layer disposed over the logic gate electrode unprotected by the photo resist mask is etched. Any etch process known in the art to be suitable for the particular composition of the metal mask layer may be utilized at operation **940** with a goal being to controllably thin, but not clear, the metal mask layer in the regions which are to have recessed gate electrodes. For example, a timed etch performed operation **940** may provide a differential hard mask thickness over logic and analog gates which is to be subsequently utilized to expose the logic gate electrode. The method **902** then proceeds to operation **942** where the photo resist mask is removed by any conventional technique (e.g., plasma ash, wet strip, etc.). At operation **945** a blanket etch of the metal mask layer is then performed to clear the thinner portions of the metal mask layer (e.g., disposed over a logic gate) while only a partial thickness of the thicker regions of the metal mask layer is removed by the etch. For such embodiments, the metal mask layer is in the upper end of the range described elsewhere herein (e.g., 200 nm-300 nm) with the etch process being any wet or dry etch known to be suitable for the given composition of the metal mask layer (e.g., Ti alloy, etc.). With the metal mask layer now patterned as the protective mask, the method **902** returns to operation **946** in method **901** (FIG. 9A).

Continuing with description of FIG. 9B, where the secondary mask is non-photosensitive and one or more hard mask layer is deposited on the metal mask layer at operation **935**, the method **902** proceeds to operation **943** where the portion of the hard mask disposed over the logic gate electrode is etched through to expose the metal mask layer. FIGS. 4A, 4B further illustrate one such embodiment where a hard mask layer **446** is deposited over the metal mask layer **445**. The composition of the hard mask layer **446** is dependent on the composition of the metal mask layer **445** at least to the extent that a selective etch of the hard mask layer **446** is advantageous as is an etch process that can be performed over a logic gate selectively to an analog gate. While silicon dioxide and silicon nitride hard mask materials may be used in certain embodiments, in an exemplary embodiment where

the metal mask layer **445** is a Ti alloy, the hard mask layer **446** is predominantly silicon. A silicon hard mask layer **446** can, under certain circumstances, be advantageously etched with good selectivity to TiN, and other Ti alloys. Over one portion of the hard mask layer, a photo resist pattern is then formed. In the exemplary embodiment further illustrated in FIG. 4B, a photo resist mask **447** is formed over a portion of the hard mask layer **446** disposed over the logic gate electrode (i.e., the gate that is to be recessed).

In embodiments, the material composition of one of the first and second portions the secondary mask is modified to enhance selectivity of an etchant employed in the etching of the secondary mask. Generally, modifying material composition of a hard mask layer forming the secondary mask may entail one or more of: oxidation, nitridation, or doping with a species, that either enhances or retards the etch rate of the modified portion of the material. FIGS. 4A and 4B further illustrate an exemplary embodiment where a dopant species is implanted into a portion of the hard mask **446** not protected by the photo resist mask **447**. In the context of a silicon hard mask layer **446**, doping of the silicon can serve as a basis of etch selectivity between doped and undoped regions for certain wet etch chemistries known in the art. For example, where the species is p-type (e.g., boron), the wet etch rate can be reduced relative to an undoped region. With the hard mask layer **446** composition selectively modified based on the photo resist pattern, the method **902** then proceeds to operation **942** where the photo resist mask is removed by any conventional technique (e.g., plasma ash, wet strip, etc.) such that photo resist selectivity of the process subsequently employed to etch the hard mask is inconsequential. The hard mask layer **446** is then blanket etched for a time sufficient to clear either the modified portion without clearing the unmodified portion (as for a silicon hard mask modified into p-type for the embodiment depicted in FIG. 5A, 5B), or vice versa. At operation **945** the metal mask layer unprotected (e.g., region over a logic gate) by the hard mask is etched to clear. For such embodiments, the metal mask layer may be advantageously relative thin (e.g., 20 nm-30 nm) and any wet or plasma-based metal etch process may be utilized depending on the metal mask composition. With the metal mask layer now patterned as the protective mask, the method **902** returns to operation **946** in method **901** (FIG. 9A).

In another embodiment of method **902** (FIG. 9B) where operation **935** entails depositing a hard mask, a multi-layered hard mask is deposited over the metal mask layer, for example to form a tri-layer mask. In a tri-layer mask embodiment, the hard mask layers deposited over the metal mask layer may be of any material and thickness that offer sufficient etch selectivity between each other if the layer in contact with the metal mask layer also offers sufficient etch selectivity relative to the metal mask layer. In one exemplary embodiment where a first hard mask layer in contact with the metal mask layer is silicon, the second hard mask layer is silicon dioxide (SiO₂), although other combinations may also be utilized. Following deposition of the multi-layered hard mask, a photo resist is patterned, and at least the first layer of the multi-layered hard mask is etched (e.g., silicon dioxide layer) using any technique conventional to the material. The method **902** then proceeds to operation **942** where the photo resist mask is removed by any conventional technique (e.g., plasma ash, wet strip, etc.) such that photo resist selectivity of the process employed to further etch the hard mask is inconsequential. After the second layer of the multi-layered hard mask is etched, the metal mask layer unprotected by the hard mask (e.g., region over a logic gate)

is etched to clear at operation **945**. For such embodiments, the metal mask layer may be advantageously relative thin (e.g., 20 nm-30 nm) and any wet or plasma-based metal etch process may be utilized depending on the metal mask composition. With the metal mask layer now patterned as the protective mask, the method **902** returns to operation **946** in method **901** (FIG. **9A**).

As illustrated in FIG. **9A**, at operation **946** the logic gate is etched back. As further illustrated in FIGS. **6A**, **6B**, gate electrode recesses **620** are first formed by etching the work function material **120A**. In advantageous embodiments wherein the metal mask layer **445** includes a metal present in work function material, etching of the metal mask layer **445** may also serve to form the recesses **620**. In other embodiments, the recesses **620** are formed with a second etch process, distinct from that used to pattern the metal mask layer **445**. As further illustrated in FIG. **6A**, **6B**, the etchback of gate electrode further entails recessing the bulk material **120B**. In advantageous embodiments, recessing of the bulk material **120B**, for example with a plasma etch process where the bulk material **120B** is tungsten, also etches through the hard mask layer **446** without etching through the metal mask layer **445**, thereby maintaining protection of the bulk material **220B** from the bulk recess etch while preparing for subsequent removal of the remain metal mask layer **445**, if desired.

In embodiments, recessing of a gate electrode further comprises a second recessing of the work function material after recessing the bulk material. As illustrated in FIG. **7B** recesses **720A** are formed by a second etch of the work function material **120A** that may, for example, occur during the removal of the metal mask **445** (e.g., at operation **965** in FIG. **9A**), just as the first recessing of the work function material may occur during patterning of the metal mask **445**. In further embodiments, as also illustrated in FIGS. **6B**, **7B**, removal of the metal mask **445** also recesses the work function material **220A** relative to the bulk material **220B** and/or the gate dielectric, forming recesses **720B**. With the metal mask layer **445** being of a same or similar material as the work function material **120A**, compatibility with the bulk material **120B** with respect to etch chemistry and reactivity is advantageously ensured, and the gate recess etch process is efficient with little overhead associated with hard mask removal.

With the gate electrode z-heights now differentiated, the method **901** may proceed to operation **985** with completion of the logic and analog finFETs. For example, with formation of the source-drain contact metallization **131A**, **231A**, as illustrated in FIGS. **8A**, **8B**. Any conventional interconnect process may then be utilized to complete fabrication of an IC with selectively recessed gate electrodes. Alternatively, before interconnect processing is commenced, a blanket electrode recessing may be performed to non-selectively reduce the z-height of all gate electrodes below that provided at operation **905** while retaining a z-height difference between gate electrodes (e.g., a logic gate may be recessed by 45% relative to an initial height while an analog gate, or other logic gate is recessed by 25%). In still other embodiments, one or more additional iterations of method **901** are performed to achieve more than the two z-heights illustrated in the exemplary embodiment. For example, selective thinning of the metal hard mask with a separate mask may be combined with one of the exemplary hard mask technique to selectively thin portions of the metal mask remaining after gates in a first region are recessed. Second regions where the metal mask are thinned would then be exposed before third regions allowing for gate

electrodes in the second regions to be recessed a second, lesser, amount while the gates in the first region are recessed again to a greater amount.

FIG. **10** is an isometric view and schematic of a mobile computing platform **700** which employs an IC including extended drain non-planar MOSFET ESD circuitry, in accordance with embodiments of the present invention. The mobile computing platform **700** may be any portable device configured for each of electronic data display, electronic data processing, and wireless electronic data transmission. For example, mobile computing platform **700** may be any of a tablet, a smart phone, laptop computer, etc. and includes a display screen **705** which in the exemplary embodiment is a touchscreen (capacitive, inductive, resistive, etc.), a chip-level (SoC) or package-level integrated system **710**, and a battery **713**.

The integrated system **710** is further illustrated in the expanded view **720**. In the exemplary embodiment, packaged device **777** includes at least one memory chip (e.g., RAM), and/or at least one processor chip (e.g., a multi-core microprocessor and/or graphics processor) employing transistors with gate electrodes of differing z-height. In one particular embodiment, the package device **777** is a micro-processor with a logic gate of a lesser z-height than an analog gate. The packaged device **777** is further coupled to the board, substrate, or interposer **760** along with, one or more of a power management integrated circuit (PMIC) **715**, RF (wireless) integrated circuit (RFIC) **725** including a wideband RF (wireless) transmitter and/or receiver (e.g., including a digital baseband and an analog front end module further comprises a power amplifier on a transmit path and a low noise amplifier on a receive path), and a controller thereof **711**.

Functionally, the PMIC **715** performs battery power regulation, DC-to-DC conversion, etc., and so has an input coupled to the battery **713** and with an output providing a current supply to all the other functional modules. As further illustrated, in the exemplary embodiment the RFIC **725** has an output coupled to an antenna to provide to implement any of a number of wireless standards or protocols, including but not limited to Wi-Fi (IEEE 802.11 family), WiMAX (IEEE 802.16 family), IEEE 802.20, long term evolution (LTE), Ev-DO, HSPA+, HSDPA+, HSUPA+, EDGE, GSM, GPRS, CDMA, TDMA, DECT, Bluetooth, derivatives thereof, as well as any other wireless protocols that are designated as 3G, 4G, 5G, and beyond. In alternative implementations, each of these board-level modules may be integrated onto separate ICs coupled to the package substrate of the packaged device **777** or within a single IC (SoC) coupled to the package substrate of the packaged device **777**.

FIG. **11** is a functional block diagram of a computing device **1000** in accordance with one embodiment of the invention. The computing device **1000** may be found inside the platform **700**, for example, and further includes a board **1002** hosting a number of components, such as but not limited to a processor **1004** (e.g., an applications processor) and at least one communication chip **1006**. In embodiments, at least one of the processor **1004** and communication chip **1006** incorporate transistors with selectively recessed gate electrodes, as have been described in the context of certain exemplary embodiments elsewhere herein. The processor **1004** is physically and electrically coupled to the board **1002**. The processor **1004** includes an integrated circuit die packaged within the processor **1004**. The term "processor" may refer to any device or portion of a device that processes electronic data from registers and/or memory to transform

that electronic data into other electronic data that may be stored in registers and/or memory.

In some implementations at least one communication chip **1006** is also physically and electrically coupled to the board **1002**. In further implementations, the communication chip **1006** is part of the processor **1004**. Depending on its applications, computing device **1000** may include other components that may or may not be physically and electrically coupled to the board **1002**. These other components include, but are not limited to, volatile memory (e.g., DRAM), non-volatile memory (e.g., ROM), flash memory, a graphics processor, a digital signal processor, a crypto processor, a chipset, an antenna, touchscreen display, touchscreen controller, battery, audio codec, video codec, power amplifier, global positioning system (GPS) device, compass, accelerometer, gyroscope, speaker, camera, and mass storage device (such as hard disk drive, solid state drive (SSD), compact disk (CD), digital versatile disk (DVD), and so forth).

At least one of the communication chips **1006** enables wireless communications for the transfer of data to and from the computing device **1000**. The term “wireless” and its derivatives may be used to describe circuits, devices, systems, methods, techniques, communications channels, etc., that may communicate data through the use of modulated electromagnetic radiation through a non-solid medium. The term does not imply that the associated devices do not contain any wires, although in some embodiments they might not. The communication chip **1006** may implement any of a number of wireless standards or protocols, including but not limited to those described elsewhere herein. The computing device **1000** may include a plurality of communication chips **1006**. For instance, a first communication chip **1006** may be dedicated to shorter range wireless communications such as Wi-Fi and Bluetooth and a second communication chip **1006** may be dedicated to longer range wireless communications such as GPS, EDGE, GPRS, CDMA, WiMAX, LTE, Ev-DO, and others.

It will be recognized that the invention is not limited to the embodiments so described, but can be practiced with modification and alteration without departing from the scope of the appended claims. The scope of the invention should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled.

We claim:

1. An integrated circuit structure, comprising:

a gate electrode over a semiconductor channel region, the gate electrode comprising a bulk material having a bottom surface, a first side, a second side, and a top surface, and the gate electrode comprising a workfunction material along the bottom surface and partially along the first and second sides of the bulk material, the workfunction material having a top surface below the top surface of the bulk material;

a first dielectric spacer adjacent to a first side of the gate electrode;

a second dielectric spacer adjacent to a second side of the gate electrode, the second side opposite the first side; and

a high-k dielectric layer between the gate electrode and the semiconductor channel region, the high-k dielectric layer laterally between the first dielectric spacer and the portion of the workfunction material partially along the first side of the bulk material, and the high-k dielectric layer laterally between the second dielectric spacer and the portion of the workfunction material partially along

the second side of the bulk material, wherein the high-k dielectric layer has a top surface above the top surface of the bulk material, the top surface of the high-k dielectric layer below a top surface of the first and second dielectric spacers.

2. The integrated circuit structure of claim **1**, wherein the semiconductor channel region is a semiconductor fin.

3. The integrated circuit structure of claim **1**, further comprising:

a first source or drain structure adjacent to the first dielectric spacer; and

a second source or drain structure adjacent to the second dielectric spacer.

4. The integrated circuit structure of claim **3**, further comprising:

a first conductive contact structure in direct contact with the first source or drain structure; and

a second conductive contact structure in direct contact with the second source or drain structure.

5. The integrated circuit structure of claim **1**, wherein high-k dielectric layer comprises hafnium and oxygen.

6. An integrated circuit structure, comprising:

a gate electrode over a semiconductor channel region, the gate electrode comprising a first material having a bottom surface, a first side, a second side, and a top surface, and the gate electrode comprising a second material along the bottom surface and partially along the first and second sides of the first material, the second material having a top surface below the top surface of the first material;

a first dielectric spacer adjacent to a first side of the gate electrode;

a second dielectric spacer adjacent to a second side of the gate electrode, the second side opposite the first side; and

a high-k dielectric layer between the gate electrode and the semiconductor channel region, the high-k dielectric layer laterally between the first dielectric spacer and the portion of the second material partially along the first side of the first material, and the high-k dielectric layer laterally between the second dielectric spacer and the portion of the second material partially along the second side of the first material, wherein the high-k dielectric layer has a top surface above the top surface of the first material, the top surface of the high-k dielectric layer below a top surface of the first and second dielectric spacers.

7. The integrated circuit structure of claim **6**, wherein the semiconductor channel region is a semiconductor fin.

8. The integrated circuit structure of claim **6**, further comprising:

a first source or drain structure adjacent to the first dielectric spacer; and

a second source or drain structure adjacent to the second dielectric spacer.

9. The integrated circuit structure of claim **8**, further comprising:

a first conductive contact structure in direct contact with the first source or drain structure; and

a second conductive contact structure in direct contact with the second source or drain structure.

10. The integrated circuit structure of claim **6**, wherein high-k dielectric layer comprises hafnium and oxygen.

15

11. A computing device, comprising:
 a board; and
 a component coupled to the board, the component including an integrated circuit structure, comprising:
 a gate electrode over a semiconductor channel region,
 the gate electrode comprising a bulk material having a bottom surface, a first side, a second side, and a top surface, and the gate electrode comprising a workfunction material along the bottom surface and partially along the first and second sides of the bulk material, the workfunction material having a top surface below the top surface of the bulk material;
 a first dielectric spacer adjacent to a first side of the gate electrode;
 a second dielectric spacer adjacent to a second side of the gate electrode, the second side opposite the first side; and
 a high-k dielectric layer between the gate electrode and the semiconductor channel region, the high-k dielectric layer laterally between the first dielectric spacer and the portion of the workfunction material partially along the first side of the bulk material, and the high-k dielectric layer laterally between the second dielectric spacer and the portion of the workfunction material partially along the second side of the bulk material, wherein the high-k dielectric layer has a top surface above the top surface of the bulk material, the top surface of the high-k dielectric layer below a top surface of the first and second dielectric spacers.

16

12. The computing device of claim 11, further comprising:
 a memory coupled to the board.
 13. The computing device of claim 11, further comprising:
 a communication chip coupled to the board.
 14. The computing device of claim 11, further comprising:
 a camera coupled to the board.
 15. The computing device of claim 11, further comprising:
 a battery coupled to the board.
 16. The computing device of claim 11, further comprising:
 a GPS coupled to the board.
 17. The computing device of claim 11, further comprising:
 a compass coupled to the board.
 18. The computing device of claim 11, further comprising:
 a speaker coupled to the board.
 19. The computing device of claim 11, further comprising:
 a touchscreen display coupled to the board.
 20. The computing device of claim 11, wherein the component is a packaged integrated circuit die.

* * * * *