



(11) **EP 3 988 716 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:

25.12.2024 Bulletin 2024/52

(51) International Patent Classification (IPC):

E02D 5/34 (2006.01) **E02D 5/36** (2006.01)
E02D 5/56 (2006.01) **E02D 7/22** (2006.01)
E21B 7/26 (2006.01) **E21B 7/20** (2006.01)

(21) Application number: **21203715.4**

(52) Cooperative Patent Classification (CPC):

(22) Date of filing: **20.10.2021**

**E21B 7/26; E02D 5/36; E02D 5/56; E02D 7/22;
E21B 7/201**

(54) **DISPLACEMENT TOOL FOR DISPLACING SOIL**

VERSCHIEBUNGSMASCHINE ZUM VERSCHIEBEN VON ERDREICH

OUTIL DE DÉPLACEMENT DE SOL

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

- **KOWAL, Robert**
63067 Offenbach (DE)
- **BRZOZOWSKI, Tadeusz**
63067 Offenbach (DE)

(30) Priority: **21.10.2020 LU 102150**

(74) Representative: **Dennemeyer & Associates S.A.**
Postfach 70 04 25
81304 München (DE)

(43) Date of publication of application:
27.04.2022 Bulletin 2022/17

(73) Proprietor: **Keller Holding GmbH**
63067 Offenbach/Main (DE)

(56) References cited:
EP-A1- 2 246 479 WO-A1-00/22244
DE-U1- 202010 006 129 GB-A- 2 556 915
US-A1- 2008 131 211

(72) Inventors:

- **MARCHWICKI, Michal**
63067 Offenbach (DE)

EP 3 988 716 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] For making a concrete pile it is known to make use of a displacement tool. The displacement tool serves to dig a substantially cylindrical pile bore in the ground wherein the pile bore corresponds to the dimensions of the pile. In order to increase a load bearing capacity of the pile it is known to use a threaded displacement tool. The soil is displaced sideways during the insertion of the displacement tool. Such a displacement results in an improvement of the pile bearing condition. The pile is generated by inserting concrete through a hollow of the displacement tool while pulling out the tool from the pile bore. EP 2 685 006 B1 discloses such a displacement tool.

[0002] The German Utility Model No. DE 20 2010 006 129 U1 discloses a device for inserting a standing pipe assembly into the soil with a drill head which is formed at the lower end of the pipe assembly. The drill head comprises a cylindrical part which is connected to a tapered part at the tip of the drill head and a tapered part at the top of the cylindrical part. A thread is arranged circumferentially around the entire length of the drill head including multiple windings around the cylindrical part.

[0003] UK Patent Application No. GB 2556915 A teaches a modular displacement bore tool-head for use in displacement boring for forming a pile comprising a module releasably attachable to another module of the tool-head and featuring a displacement body that defines a displacement profile and means for receiving or transmitting torque from or to another module. The displacement profile may be a helical flight and the module may be connectable to a lead taper and a drive coupling.

[0004] A disadvantage of the known displacement tool is that the friction between the displacement tool and the soil increases with increasing length of the thread. This leads to that a huge high weight machine has to be provided in order to apply the needed torque to the displacement tool. However, sometimes it is not possible or not wished to use such a machine for various reasons.

[0005] The object of the invention is to provide an improved displacement tool.

[0006] The object is solved by a displacement tool for displacing soil according to claim 1

[0007] The displacement tool comprises a tubular member and a displacement means connected to the tubular member in a rotationally fixed manner, wherein the displacement means comprises a cylindrical portion enclosing the tubular member, wherein the displacement means comprises a, in particular helical, thread that is only arranged on the cylindrical portion wherein the thread comprise at least one, in particular merely one, winding wherein.

- a. at least one tooth is arranged at an end of the thread and/or in that
- b. at least one further tooth is arranged at another end of the thread.

[0008] The inventive subject-matter has the advantage that the friction between the thread and the soil is lower as the thread is only arranged at the cylindrical portion of the displacement tool. It has been recognized that it is not necessary to provide the thread over the complete length of the tubular member but only on cylindrical portion of the displacement means. Additionally, a high load bearing capacity of the pile is achieved in that the cylindrical portion encloses the tubular member and, thus, has a larger diameter than the tubular member. Such a displacement means enables the usage of a low-weight machine in order to dig pile bores. The cylindrical portion encloses the tubular member in circumferential direction of the tubular member. In particular, the cylindrical portion encloses the tubular member by 360° in circumferential direction of the tubular member.

[0009] As the thread comprises merely one winding the friction between the displacement tool, in particular between the thread and the soil, is low. A winding of the thread is achieved by a rotation of the tubular means and, thus, the displacement means by 360°.

[0010] Another advantage of the displacement tool is that the tooth and/or further tooth ensure easy cutting through the soil, hence reducing the friction between the displacement tool and the soil. The tooth and/or further tooth can be from a different material than the remaining part of the thread.

[0011] According to an embodiment the thread can extend from one end of the cylindrical portion to another end of the cylindrical portion in axial direction of the cylindrical portion and/or the tubular means. Thus, a plane exists that comprises the end of the cylindrical portion and the thread. Additionally, another plane exists that comprises the other end of the cylindrical portion and the thread. The extension of the thread over the complete length of the cylindrical portion in axial direction has the advantage that the contact surface between the thread and the soil is low.

[0012] However, as the thread has a long extension in axial direction of the cylindrical portion and/or tubular means a lot of soil can be displaced in radial direction with respect to the tubular means during one rotation of the tubular means. By using the displacement means for digging a vertical pile bore the radial direction corresponds with a horizontal direction. The thread can be welded to the cylindrical portion.

[0013] The thread can comprise exactly two teeth arranged at the end of the thread and/or exactly two further teeth arranged at the other end of the helical thread. The teeth can be arranged adjacent to each other in radial direction of the tubular means and/or the displacement means. Additionally, the helical thread can comprise exactly two further teeth arranged at the other end of the thread wherein the further teeth are arranged adjacent to each other in radial direction of the tubular means and/or the displacement means. The provision of two teeth and/or two further teeth further simplifies the cutting through the soil. Additionally, it enables that the thread

is longer in radial direction of the tubular means and/or the displacement means. A teeth having a long radial length leads to a pile with a high load bearing capacity.

[0014] The tooth and the further tooth can be identically shaped. A tip of the tooth and a further tip of the further tooth are arranged such that they lie on a thread line of the thread. Such a formed tooth and/or further tooth can be achieved when the tooth and/or the further tooth are formed mirror symmetric. A mirror plane can comprise the thread line of the helical thread. The tooth and/or the further tooth can be shaped like an arrow. The tip of the tooth and/or the tip of the further tooth can be arranged offset to the remaining part of the thread.

[0015] The tooth and the further tooth can be are arranged such that the tooth moves along a trajectory when the tubular member is rotated and that the further tooth moves along the same trajectory when the tubular member is rotated in an opposite direction. The provision of the further tooth ensures maintaining the clear groove of the pile bore in the soil. This is important as the groove of the pile bore contributes to load bearing capacity of the pile while saving concrete in the volume between the helical threads.

[0016] Protrusions can be arranged on an upper face of the thread. The protrusions can extend from the upper face of the thread in radial direction and can be arranged adjacent to each other along the thread line of the thread. The provision of the protrusions has the advantage that the thread is protected from wear and tear during the operation of the displacement means.

[0017] According to another embodiment of the invention the displacement means can comprise a conical portion that is connected with an end of the cylindrical portion and/or the displacement means can comprises a further conical portion that is connected with another end of the cylindrical portion. The conical portion can be arranged in an area of the displacement means proximal to an end of the tubular member that has the opening through which concrete can be released. The further conical portion can be arranged in an area of the displacement means distal to the end of the tubular means. The cylindrical portion can be arranged between the conical portion and the further conical portion in axial direction of the displacement means and/or the tubular member.

[0018] The conical portion induces radial, in particular, horizontal forces in the soil. The cylindrical portion together with the thread arranged is used for the stabilization of the soil. The further conical portion is used for densification of any loose soil areas during extraction of the soil. The conical portion, the cylindrical portion and the further conical shaped portion can form a one piece displacement means.

[0019] The conical portion and/or the further conical portion can be connected to the tubular member in a rotationally fixed manner. It is possible to connect the conical portion and/or the further conical portion via a weld connection with the tubular member. In particular, an end of the conical portion offset to the cylindrical portion

and/or an end of the further conical portion offset to the cylindrical portion is connected to the tubular member in the rotationally fixed manner.

[0020] The displacement means can comprise a plurality of further protrusions arranged adjacent to each other in a circumferential direction of the displacement means. The further protrusions protect the displacement means from tear and wear during its operation. The further protrusions can extend in axial direction of the displacement means from the conical portion and extend via the cylindrical portion to the further conical portion. The further protrusion extending in the cylindrical portion can be interrupted by the thread.

[0021] The tubular member can pass through the displacement means. In particular, the tubular member can pass through the displacement means such that an end of the tubular member protrudes from the displacement means in axial direction.

[0022] According to an embodiment of the invention the displacement tool can comprises a closure means that in a closed state closes a hollow of the tubular member and in an opened state releases the hollow of the tubular member. In the closed state of the closure means the concrete cannot flow out of the tubular member. In the opened state of the closure means the concrete cannot flow out of the tubular member. Such a closure means has the advantage that the closure means does not remain in the pile bore when the displacement means is retracted. This does not occur as the closure means is mechanically connected to the tubular member.

[0023] The closure means can be built such that it rotates in order to change from the closed state to the opened state or vice versa. The closure means can be attached to the end of the tubular member.

[0024] The displacement tool can comprise at least one other tooth that is arranged at the end of the tubular member. The tooth protects the closure means from being destroyed or damaged by loosening the soil when the displacement tool is drilled.

[0025] According to an embodiment of the invention the cylindrical portion can be arranged coaxially to the tubular member and/or the cylindrical portion and the conical portion and/or the further conical portion can be arranged coaxially to each other.

[0026] The displacement means can be built such that a ratio of an outer diameter of the cylindrical portion to an outer diameter of the tubular member is between 1,5 to 2,5, in particular 1,8 to 2,2. Additionally, the displacement tool can be built such that a ratio of an axial length of the cylindrical portion to the length of the conical portion and/or the further conical portion is between 1,5 to 2,5, in particular 1,8 to 2,2. The length of the conical portion can be longer in axial direction than the length of the conical portion and/or the further conical portion. Such a formed displacement tool has the advantage that a pile with a high load bearing capacity can be achieved wherein the torque to be applied is not such that huge weight machines have to be used.

[0027] Of particular advantage is a machine comprising a displacement tool according to the invention. The machine comprises a drive unit for driving the displacement tool. The drive unit can rotate the displacement tool. Additionally, the drive unit can move the displacement tool along the axial direction of the displacement means.

[0028] The machine comprises a control unit for controlling the drive unit. The control unit can control the rotational speed of the displacement tool. Additionally, the control unit can control a downlift speed of the displacement tool when it creates the pile bore and an uplift speed of the displacement tool when the pile bore is generated and concrete is inserted into the pile bore. For controlling the drive unit, the control unit can send electric control signals to the drive unit.

[0029] According to an embodiment of the invention the control unit controls the drive unit such that a ratio between the uplift speed of the displacement tool and the rotational speed of the displacement tool corresponds with a predetermined value. The value does not change during the operation of the displacement tool and, thus, is constant. Keeping a constant ratio between the rotational speed and the uplift speed of the displacement tool enables that the concrete screw created in the pile bore has desired shape and strength properties. In particular, the control unit can automatically control the drive unit in order to keep the value constant during operation. In particular, the control unit keeps the ratio constant when the rotation speed and/or the uplift speed change during the operation. The control unit can control the drive unit such that e.g. the uplift speed is reduced when the rotation speed of the displacement tool is limited by soil resistance.

[0030] The control unit can control the drive unit such that the drilling is made with maximum speed of the displacement tool when the pile bore is generated. In particular, the drive unit can be controlled such that the ratio between the rotational speed and the uplift speed is not constant during creation of the pile bore.

[0031] The ratio depends on a thread pitch of the helical thread. If flight spacing is x [meter], then relation between uplift speed and rotation speed is equal to $1 \text{ [meter]}/x \text{ [meter]}$, eg. if the flight spacing is 0,25 m the displacement tool rotation speed combined with uplift speed is equal $1/0,25 = 4$, which means that in order to achieve required pile shape it is necessary to get four rotations on each 1m of uplift.

[0032] In the figures, the subject-matter of the invention is schematically shown, wherein identical or similarly acting elements are usually provided with the same reference signs. Here shows:

Fig. 1 shows a perspective view of the displacement tool according to an embodiment of the invention,

Fig. 2 shows a side view of the displacement tool shown in fig. 1,

Fig 3 shows a cross section view of the displacement means shown in fig. 2,

Fig. 4 shows a front view of the displacement tool shown in fig. 1,

Fig. 5 shows a rear view of the displacement tool shown in fig. 1,

Fig. 6 shows a machine to which a displacement tool as shown in fig. 1 to 5 is attached.

[0033] A displacement tool 1 shown in fig. 1 comprises a tubular member 2 and a displacement means 3. The displacement means 3 is connected with the tubular member 2 in a rotationally fixed manner. That means, it is not possible that the displacement means 3 and the tubular member 2 rotate relative to each other. The displacement means 3 comprises a cylindrical portion 4 enclosing the tubular member 2. In particular, the tubular member 2 passes through the displacement means 3 and protrudes from the displacement means 3 in an axial direction A of the displacement tool 1. The displacement means 3 comprises a thread 5 that is only arranged on the cylindrical portion 4. The thread 5 can be a helical thread.

[0034] The tubular member 2 is arranged coaxially with respect to the displacement means 3. A closure means 20 is attached to the end of the tubular member 2 that protrudes from the displacement means 3. A connection means 23 is arranged at another end of the tubular member 2. The connection means 23 is used to attach the displacement tool 1 to a machine 24 that is shown in figure 6. The machine 24 applies a torque to the displacement tool 1 and can move the displacement tool 1 along the axial direction A so that the displacement tool 1 can dig a pile bore in a ground.

[0035] The displacement means 3 comprises a conical portion 17 that is connected with the cylindrical portion 4. In particular, the conical portion 17 is connected with an end of the cylindrical portion 4. An end of the conical portion 17 offset from the cylindrical portion 4 is connected with the tubular member 2 in a rotationally fixed manner. The end of the conical portion 17 has a cross section, in particular diameter, smaller than the cross section, in particular diameter, of the conical portion 17 being connected with the cylindrical portion 4. Thus, the conical portion 17 is arranged such that the cross section, in particular diameter, increases from the end of the conical portion 17 along the axial direction A towards the connection means 23.

[0036] Additionally, the displacement means 3 comprises a further conical portion 18 that is connected with the cylindrical portion 4. In particular, the further conical portion 18 is connected with another end of the cylindrical portion 4. An end of the further conical portion 18 offset from the cylindrical portion 4 is connected with the tubular member 2 in a rotationally fixed manner. The end of the

further conical portion 18 has a cross section, in particular diameter, smaller than the cross section, in particular diameter, of the further conical portion 18 being connected with the cylindrical portion 4. Thus, the further conical portion 18 is arranged such that the cross section, in particular diameter, decreases from the cylindrical portion 4 along the axial direction A towards the connection means 23.

[0037] The cylindrical portion 4 is arranged between the conical portion 17 and the further conical portion 18 in axial direction A of the displacement tool 1. The conical portion 17, the cylindrical portion 4 and the further conical portion 4 are formed as one piece component.

[0038] The displacement means 3 comprises protrusions 15 that are arranged on an upper face 16 of the thread 5. The protrusions 15 are arranged adjacent to each other along the extension of a thread line 14 shown in fig. 2. Additionally, the displacement means 3 comprises further protrusions 19. The further protrusions 19 are arranged on the conical portion 17, the cylindrical portion 4 and the further conical portion 18. They extend in axial direction A from the conical portion 17 towards the further conical portion 18. The further protrusions 19 arranged on the cylindrical portion 4 are interrupted in their extension by the helical thread 5.

[0039] Two teeth 8 are arranged at an end 10 of the helical thread 5. The end 10 of the thread 5 is arranged proximal to the conical portion 17. The two teeth 8 are arranged adjacent to each other in a radial direction R of the displacement tool 1 as can be seen in fig. 4. Two further teeth 9 are arranged at another end 11 of the helical thread 5. The other end 11 of the thread 5 is arranged proximal to the further conical portion 18. The two further teeth 9 are arranged adjacent to each other in the radial direction R of the displacement tool 1.

[0040] The teeth 8 and further teeth 9 are arranged and orientated such that the teeth 8 move along a trajectories when the tubular member 2 is rotated in order to create the pile bore and that the further teeth 9 move along the same trajectories when the tubular member 2 is orientated in the opposite direction during the extraction of the displacement tool 1.

[0041] The displacement tool 1 comprises two other teeth 22. The other teeth 22 are arranged on the end of the tubular member 2 that protrudes from the displacement means 3 in axial direction. The other teeth 22 are arranged adjacent to each other in a circumferential direction of the tubular member 2.

[0042] Fig. 2 shows a side view of displacement tool 1 shown in fig. 1. The thread 5 attached directly on the cylindrical portion 4 comprises one winding and extends from the end of the cylindrical portion 4 connected with the cylindrical portion 17 to the other end of the cylindrical portion 4 connected with the further conical portion 18.

[0043] The tooth 8 and the further tooth 9 are identically shaped. Thus, in the following, only the structure of the tooth 8 is described. The tooth 8 has a tip 12 that lies on the thread line 14 of the helical thread 5. The tooth 8 is

formed mirror symmetrically. In particular, the tooth 8 is symmetrically to a plane comprising the thread line 14. Likewise, the further tooth 9 comprises a further tip 13 that lies on the thread line 14.

[0044] Fig. 3 shows a cross section of the displacement means 3 shown in fig. 2. The tubular member 2 comprises a hollow 21 that extends through the complete tubular member 3. Concrete is inserted via the hollow 21 in order to create the pile while the displacement tool 1 is retracted. The closure means 20 is positioned in an opened state so that concrete can be released by the tubular means 2 into the pile bore that is not shown in the figures. The closure means 20 is attached to the tubular member 2 and is transferred from the opened state to a closed state by rotation in the bore. In the closed state no concrete can be released by the displacement tool 1.

[0045] The displacement means 3 has an interior through which the tubular member 2 passes. The cylindrical portion 4 has an outer diameter that is larger than an outer diameter of the tubular member 2. Additionally, an inner diameter of the cylindrical portion 4 is chosen such that there is a distance in radial direction between the cylindrical portion 4 and the tubular member 2.

[0046] Fig. 4 shows a front view of the displacement tool 1 shown in fig. 1 and fig. 5 shows a rear view of the displacement tool 1 shown in fig. 1. As is evident from fig. 4, the other teeth 22 are diametrically arranged to each other with respect to the tubular member 2.

[0047] The two teeth 8 arranged at the end 10 of the thread 5 are arranged adjacent to each other in radial direction R. Likewise, the two further teeth 9 arranged at the other end 11 of the thread 5 are arranged adjacent to each other in radial direction R.

[0048] Fig. 6 shows a machine 24 to which a displacement tool 1 as shown in fig. 1 to 5 is attached. The machine 24 comprises a drive unit 25. The drive unit 25 is adapted to rotate the non-shown displacement tool 1 and to move it in vertical direction that corresponds the axial direction A of the displacement tool 1. By moving the displacement tool 1 in vertical direction the pile bore is created or the displacement tool is retracted from the pile bore. The retraction direction is opposite to the drilling direction. The machine 24 also comprises a control unit 26 that controls the drive unit 25. In particular, the control unit 26 sends electric control signals to the drive unit 25 via non-shown wires in order to control the drive unit 25.

[0049] The control unit 26 controls the drive unit 25 such that a ratio between an uplift speed of the displacement tool 1 and a rotational speed of the displacement tool is constant. The ratio depends on a thread pitch of the helical thread 5. During the uplift movement of the displacement means concrete can be inserted into the pile bore via the displacement tool 1.

Reference Signs

[0050]

1	displacement tool	(4) in axial direction (A).
2	tubular member	
3	displacement means	3. Displacement tool (1) according to claim 1 or 2,
4	cylindrical portion	wherein
5	helical thread	5
8	tooth	a. exactly two teeth (8) are arranged at the end
9	further tooth	(10) of the thread (5) and/or exactly two further
10	end of helical thread	teeth (9) arranged at the other end (11) of the
11	other end of helical thread	thread (5) or in that
12	tip	10 b. exactly two teeth (8) are arranged at the end
13	further tip	(10) of the thread (5) wherein the teeth (8) are
14	thread line	arranged adjacent to each other in radial direc-
15	protrusion	tion (R) and/or in that
16	upper face	c. exactly two further teeth (9) are arranged at
17	conical portion	15 the other end (11) of the thread (5) wherein the
18	further conical portion	further teeth (9) are arranged adjacent to each
19	further protrusions	other in radial direction (R).
20	closure means	
21	hollow	4. Displacement tool (1) according to claim 1 or 2,
22	other tooth	20 wherein
23	connection means	
24	machine	a. the tooth (8) and the further tooth (9) are iden-
25	drive unit	tically shaped and/or in that
26	control unit	b. the tooth (8) and/or the further tooth (9) is
		25 formed mirror symmetric and/or in that
A	axial direction	c. the tooth (8) and the further tooth (9) are ar-
R	radial direction	ranged such that the tooth (8) moves along a

Claims

1. Displacement tool (1) for displacing soil, wherein the displacement tool (1) comprises:
a tubular member (2) and a displacement means (3) connected to the tubular member (2) in a rotationally fixed manner, wherein the displacement means (3) comprises a cylindrical portion (4) enclosing the tubular member (2), wherein:
- the displacement means (3) comprises a thread (5), wherein
at least one tooth (8) is arranged at an end (10) of the thread (5); and
at least one further tooth (9) is arranged at another end (11) of the thread (5), wherein:
- the thread (5) is only arranged on the cylindrical portion (4);
the thread (5) comprises merely one winding; and
a tip (12) of the tooth (8) and a further tip (13) of the further tooth (9) are arranged such that they lie on a thread line (14) of the thread (5).
2. Displacement tool (1) according to claim 1, wherein the thread (5) extends from one end of the cylindrical portion (4) to another end of the cylindrical portion
5. Displacement tool (1) according to one of the claims 1 to 4, wherein protrusions (15) are arranged on an upper face (16) of the thread (5).
6. Displacement tool (1) according to one of the claims 1 to 5, wherein
- a. a conical portion (17) connected to the cylindrical portion (4) and a further conical portion (18) connected to the cylindrical portion (4) is connected to the tubular member (2) in a rotationally fixed manner; or
b. an end of the conical portion (17) offset to the cylindrical portion (4) and/or an end of the further conical portion (18) offset to the cylindrical portion (4) is connected to the tubular member (2) in a rotationally fixed manner.
7. Displacement tool (1) according to one of the claims 1 to 6, wherein the displacement means (3) comprises a plurality of further protrusions (19) arranged adjacent to each other in a circumferential direction of the displacement means (3) wherein
- a. the further protrusions (19) extend in axial direction (A) from the conical portion (17) via the

- cylindrical portion (4) to the further conical portion (18) and/or wherein
 b. the further protrusions (19) extending in the cylindrical portion (4) are interrupted by the thread (5).
8. Displacement tool (1) according to one of the claims 1 to 7, wherein the tubular member (2) passes through the displacement means (3).
9. Displacement tool (1) according to one of the claims 1 to 8, wherein that the displacement tool (1) comprises a closure means (20) that in a closed state closes a hollow (21) of the tubular member (2) and in an opened state releases the hollow (21) of the tubular member (2).
10. Displacement tool (1) according to claim 9, wherein
- a. the closure means (20) rotates in order to change from the closed state to the opened state or vice versa and/or
 b. the closure means (20) is attached to an end of the tubular member (2).
11. Displacement tool (1) according to one of the claims 1 to 10, wherein the displacement tool (1) comprises at least one other tooth (22) that is arranged at the end of the tubular member (2).
12. Displacement tool (1) according to one of the claims 1 to 11, wherein
- a. a ratio of an outer diameter of the cylindrical portion (4) to an outer diameter of the tubular member (2) is between 1,5 to 2,5.
 b. a ratio of an axial length of the cylindrical portion (4) to the length of the conical portion is between 1,5 to 2,5.
13. Machine (24) for creating a pile bore comprising the displacement tool (1) according to one of the claims 1 to 12.
14. Machine (24) according to claim 13, wherein the machine (24) comprises a drive unit (25) for driving the displacement tool (1) and a control unit (26) for controlling the drive unit (25) wherein the control unit (26) controls the drive unit (25) such that a ratio between an uplift speed of the displacement tool (1) and a displacement tool (1) rotational speed corresponds with a predetermined value.
15. Machine (24) according to claim 14, wherein the ratio depends on a thread pitch of the thread (5).

Patentansprüche

1. Verdrängungswerkzeug (1) zum Verdrängen von Boden, wobei das Verdrängungswerkzeug (1) Folgendes umfasst:
 ein rohrförmiges Element (2) und ein mit dem rohrförmigen Element (2) drehfest verbundenes Verdrängungsmittel (3), wobei das Verdrängungsmittel (3) einen zylindrischen Abschnitt (4) umfasst, der das rohrförmige Element (2) umschließt, wobei:
 das Verdrängungsmittel (3) ein Gewinde (5) umfasst, wobei
 mindestens ein Zahn (8) an einem Ende (10) des Gewindes (5) angeordnet ist; und
 mindestens ein weiterer Zahn (9) an einem anderen Ende (11) des Gewindes (5) angeordnet ist, wobei:
 das Gewinde (5) nur auf dem zylindrischen Teil (4) angeordnet ist;
 das Gewinde (5) nur eine Windung umfasst; und
 eine Spitze (12) des Zahns (8) und eine weitere Spitze (13) des weiteren Zahns (9) so angeordnet sind, dass sie auf einer Gewindelinie (14) des Gewindes (5) liegen.
2. Verdrängungswerkzeug (1) nach Anspruch 1, wobei sich das Gewinde (5) von einem Ende des zylindrischen Abschnitts (4) zu einem anderen Ende des zylindrischen Abschnitts (4) in axialer Richtung (A) erstreckt.
3. Verdrängungswerkzeug (1) nach Anspruch 1 oder 2, wobei
- a. genau zwei Zähne (8) an dem Ende (10) des Gewindes (5) und/oder genau zwei weitere Zähne (9) an dem anderen Ende (11) des Gewindes (5) angeordnet sind oder dass
 b. genau zwei Zähne (8) an dem Ende (10) des Gewindes (5) angeordnet sind, wobei die Zähne (8) in radialer Richtung (R) nebeneinander angeordnet sind und/oder dass
 c. genau zwei weitere Zähne (9) an dem anderen Ende (11) des Gewindes (5) angeordnet sind, wobei die weiteren Zähne (9) in radialer Richtung (R) nebeneinander angeordnet sind.
4. Verdrängungswerkzeug (1) nach Anspruch 1 oder 2, wobei
- a. der Zahn (8) und der weitere Zahn (9) identisch geformt sind und/oder dass
 b. der Zahn (8) und/oder der weitere Zahn (9) spiegelsymmetrisch ausgebildet ist und/oder dass

- c. der Zahn (8) und der weitere Zahn (9) so angeordnet sind, dass sich der Zahn (8) entlang einer Trajektorie bewegt, wenn das rohrförmige Element (2) gedreht wird, und dass sich der weitere Zahn (9) entlang der gleichen Trajektorie bewegt, wenn das rohrförmige Element (2) in einer entgegengesetzten Richtung gedreht wird.
- 5
5. Verdrängungswerkzeug (1) nach einem der Ansprüche 1 bis 4, wobei Vorsprünge (15) an einer oberen Fläche (16) des Gewindes (5) angeordnet sind. 10
6. Verdrängungswerkzeug (1) nach einem der Ansprüche 1 bis 5, wobei 15
- a. ein mit dem zylindrischen Abschnitt (4) verbundener konischer Abschnitt (17) und ein weiterer mit dem zylindrischen Abschnitt (4) verbundener konischer Abschnitt (18) mit dem rohrförmigen Element (2) drehfest verbunden ist; oder 20
- b. ein Ende des zu dem zylindrischen Abschnitt (4) versetzten konischen Abschnitts (17) und/oder ein Ende des zu dem zylindrischen Abschnitt (4) versetzten weiteren konischen Abschnitts (18) mit dem rohrförmigen Element (2) drehfest verbunden ist. 25
7. Verdrängungswerkzeug (1) nach einem der Ansprüche 1 bis 6, wobei das Verdrängungsmittel (3) eine Vielzahl von weiteren Vorsprüngen (19) umfasst, die in Umfangsrichtung des Verdrängungsmittels (3) nebeneinander angeordnet sind, wobei 30
- a. sich die weiteren Vorsprünge (19) in axialer Richtung (A) von dem konischen Abschnitt (17) über den zylindrischen Abschnitt (4) zu dem weiteren konischen Abschnitt (18) erstrecken und/oder wobei 35
- b. die sich in dem zylindrischen Abschnitt (4) erstreckenden weiteren Vorsprünge (19) durch das Gewinde (5) unterbrochen sind. 40
8. Verdrängungswerkzeug (1) nach einem der Ansprüche 1 bis 7, wobei das rohrförmige Element (2) durch das Verdrängungsmittel (3) hindurchgeht. 45
9. Verdrängungswerkzeug (1) nach einem der Ansprüche 1 bis 8, wobei das Verdrängungswerkzeug (1) ein Verschlussmittel (20) umfasst, das in einem geschlossenen Zustand einen Hohlraum (21) des rohrförmigen Elements (2) verschließt und in einem geöffneten Zustand den Hohlraum (21) des rohrförmigen Elements (2) freigibt. 50
10. Verdrängungswerkzeug (1) nach Anspruch 9, wobei 55
- a. das Verschlussmittel (20) rotiert, um von dem geschlossenen Zustand in den geöffneten Zustand oder umgekehrt überzugehen und/oder
- b. das Verschlussmittel (20) an einem Ende des rohrförmigen Elements (2) angebracht ist.
11. Verdrängungswerkzeug (1) nach einem der Ansprüche 1 bis 10, wobei das Verdrängungswerkzeug (1) mindestens einen weiteren Zahn (22) umfasst, der an dem Ende des rohrförmigen Elements (2) angeordnet ist.
12. Verdrängungswerkzeug (1) nach einem der Ansprüche 1 bis 11, wobei
- a. ein Verhältnis des Außendurchmessers des zylindrischen Abschnitts (4) zum Außendurchmesser des rohrförmigen Elements (2) zwischen 1,5 und 2,5 liegt.
- b. ein Verhältnis zwischen einer axialen Länge des zylindrischen Abschnitts (4) und der Länge des konischen Abschnitts zwischen 1,5 und 2,5 liegt.
13. Maschine (24) zum Herstellen einer Pfahlbohrung, umfassend das Verdrängungswerkzeug (1) nach einem der Ansprüche 1 bis 12.
14. Maschine (24) nach Anspruch 13, wobei die Maschine (24) eine Antriebseinheit (25) zum Antreiben des Verdrängungswerkzeugs (1) und eine Steuereinheit (26) zum Steuern der Antriebseinheit (25) umfasst, wobei die Steuereinheit (26) die Antriebseinheit (25) so steuert, dass ein Verhältnis zwischen einer Hubgeschwindigkeit des Verdrängungswerkzeugs (1) und einer Drehgeschwindigkeit des Verdrängungswerkzeugs (1) einem vorbestimmten Wert entspricht.
15. Maschine (24) nach Anspruch 14, wobei das Verhältnis von einer Gewindesteigung des Gewindes (5) abhängig ist.
- Revendications**
1. Outil de déplacement (1) pour déplacer le sol, dans lequel l'outil de déplacement (1) comprend : un élément tubulaire (2) et un dispositif de déplacement (3) relié à l'élément tubulaire (2) par un système de rotation fixe, dans lequel le dispositif de déplacement (3) comprend une partie cylindrique (4) entourant l'élément tubulaire (2), dans lequel :
- le dispositif de déplacement (3) comprend un filetage (5), dans lequel
- au moins une dent (8) est disposée à une extrémité (10) du filetage (5) ; et

au moins une autre dent (9) est disposée à une autre extrémité (11) du filetage (5), dans lequel :

- le filetage (5) est uniquement disposé sur la partie cylindrique (4) ;
le filetage (5) ne comprend qu'une spire ; et une pointe (12) de la dent (8) et une autre pointe (13) de l'autre dent (9) sont disposées de manière à se situer sur une ligne de filetage (14) du filetage (5).
2. Outil de déplacement (1) selon la revendication 1, dans lequel le filetage (5) s'étend d'une extrémité de la partie cylindrique (4) à une autre extrémité de la partie cylindrique (4) dans la direction axiale (A).
3. Outil de déplacement (1) selon la revendication 1 ou 2, dans lequel
- a. exactement deux dents (8) sont disposées à l'extrémité (10) du filetage (5) et/ou exactement deux autres dents (9) sont disposées à l'autre extrémité (11) du filetage (5), ou en ce que
- b. exactement deux dents (8) sont disposées à l'extrémité (10) du filetage (5), les dents (8) étant disposées de façon adjacente l'une par rapport à l'autre dans la direction radiale (R) et/ou en ce que
- c. exactement deux autres dents (9) sont disposées à l'autre extrémité (11) du filetage (5), les autres dents (9) étant disposées de façon adjacente l'une par rapport à l'autre dans la direction radiale (R).
4. Outil de déplacement (1) selon la revendication 1 ou 2, dans lequel
- a. la dent (8) et l'autre dent (9) sont de forme identique et/ou en ce que
- b. la dent (8) et/ou l'autre dent (9) est formée symétriquement en miroir et/ou en ce que
- c. la dent (8) et l'autre dent (9) sont disposées de sorte que la dent (8) se déplace le long d'une trajectoire lorsque l'élément tubulaire (2) est en rotation et que l'autre dent (9) se déplace le long de la même trajectoire lorsque l'élément tubulaire (2) est en rotation dans une direction opposée.
5. Outil de déplacement (1) selon l'une des revendications 1 à 4, dans lequel des saillies (15) sont disposées sur une face supérieure (16) du filetage (5).
6. Outil de déplacement (1) selon l'une des revendications 1 à 5, dans lequel
- a. une partie conique (17) reliée à la partie cylindrique (4) et une autre partie conique (18) reliée à la partie cylindrique (4) sont reliées à l'élément tubulaire (2) par un système de rotation fixe ; ou
- b. une extrémité de la partie conique (17) en décalage par rapport à la partie cylindrique (4) et/ou une extrémité de l'autre partie conique (18) en décalage par rapport à la partie cylindrique (4) est reliée à l'élément tubulaire (2) par un système de rotation fixe.
7. Outil de déplacement (1) selon l'une des revendications 1 à 6, dans lequel le dispositif de déplacement (3) comprend une pluralité d'autres saillies (19) disposées de façon adjacente les unes par rapport aux autres dans une direction circonférentielle du dispositif de déplacement (3) dans lequel
- a. les autres saillies (19) s'étendent dans la direction axiale (A) depuis la partie conique (17) jusqu'à l'autre partie conique (18) en passant par la partie cylindrique (4) et/ou dans lequel
- b. les autres saillies (19) s'étendant dans la partie cylindrique (4) sont interrompues par le filetage (5).
8. Outil de déplacement (1) selon l'une des revendications 1 à 7, dans lequel l'élément tubulaire (2) traverse le dispositif de déplacement (3).
9. Outil de déplacement (1) selon l'une des revendications 1 à 8, dans lequel l'outil de déplacement (1) comprend un dispositif de fermeture (20) qui, en état de fermeture, ferme un creux (21) de l'élément tubulaire (2) et, en état d'ouverture, dégage le creux (21) de l'élément tubulaire (2).
10. Outil de déplacement (1) selon la revendication 9, dans lequel
- a. le dispositif de fermeture (20) pivote afin de passer de l'état de fermeture à l'état d'ouverture ou vice versa et/ou
- b. le dispositif de fermeture (20) est fixé à une extrémité de l'élément tubulaire (2).
11. Outil de déplacement (1) selon l'une des revendications 1 à 10, dans lequel l'outil de déplacement (1) comprend au moins une autre dent (22) disposée à l'extrémité de l'élément tubulaire (2).
12. Outil de déplacement (1) selon l'une des revendications 1 à 11, dans lequel
- a. un rapport entre un diamètre extérieur de la partie cylindrique (4) et un diamètre extérieur de l'élément tubulaire (2) est compris entre 1,5 et 2,5.
- b. un rapport entre une longueur axiale de la

partie cylindrique (4) et la longueur de la partie conique est compris entre 1,5 et 2,5.

13. Machine (24) pour créer un forage de pieu comprenant l'outil de déplacement (1) selon l'une des revendications 1 à 12. 5
14. Machine (24) selon la revendication 13, dans laquelle la machine (24) comprend une unité d'entraînement (25) pour entraîner l'outil de déplacement (1) et une unité de commande (26) pour contrôler l'unité d'entraînement (25), dans laquelle l'unité de commande (26) contrôle l'unité d'entraînement (25) de sorte qu'un rapport entre une vitesse de levage de l'outil de déplacement (1) et une vitesse de rotation de l'outil de déplacement (1) corresponde à une valeur prédéterminée. 10 15
15. Machine (24) selon la revendication 14, dans laquelle le rapport dépend d'un pas de filetage du filetage (5). 20

25

30


35


40

45

50

55

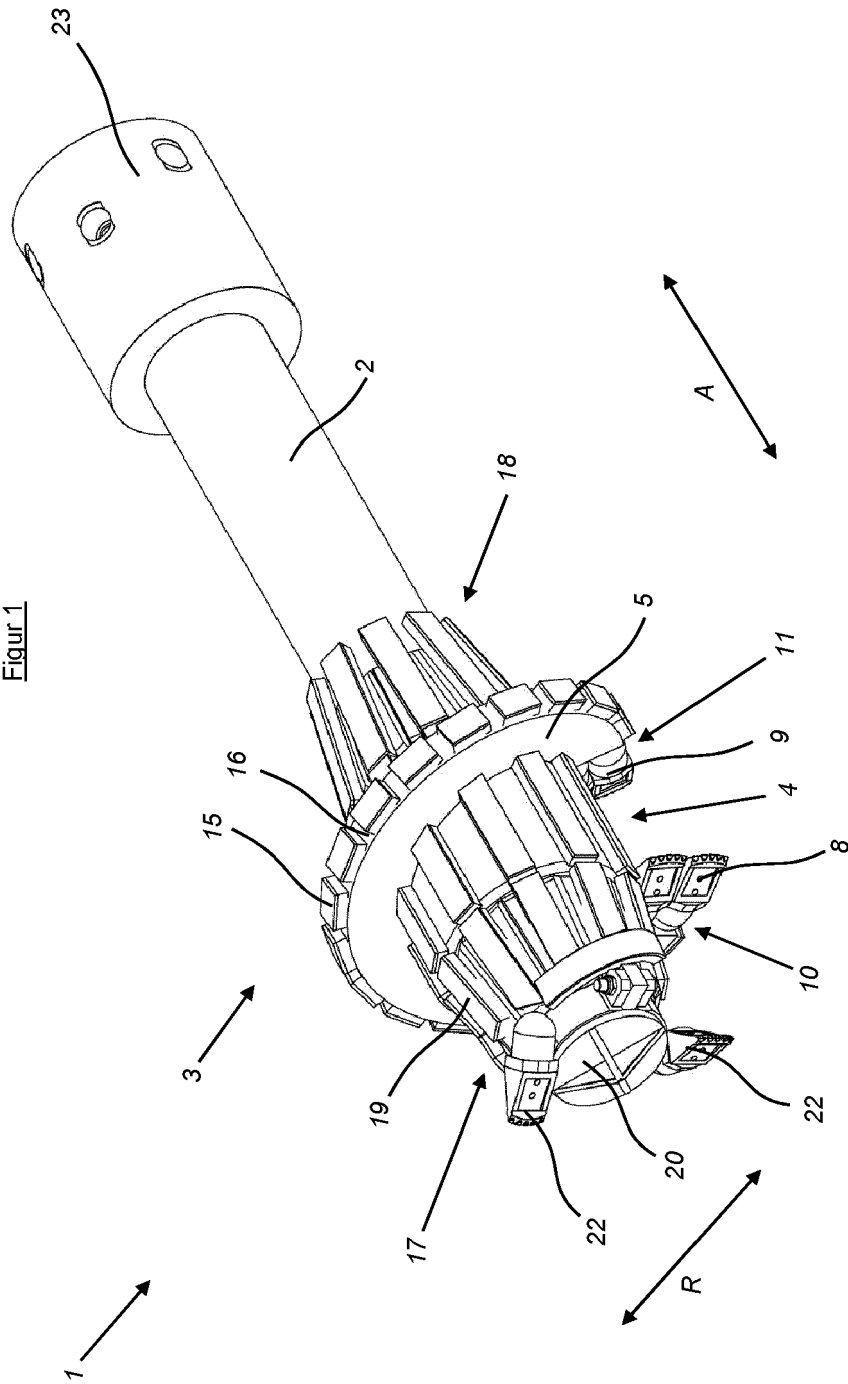

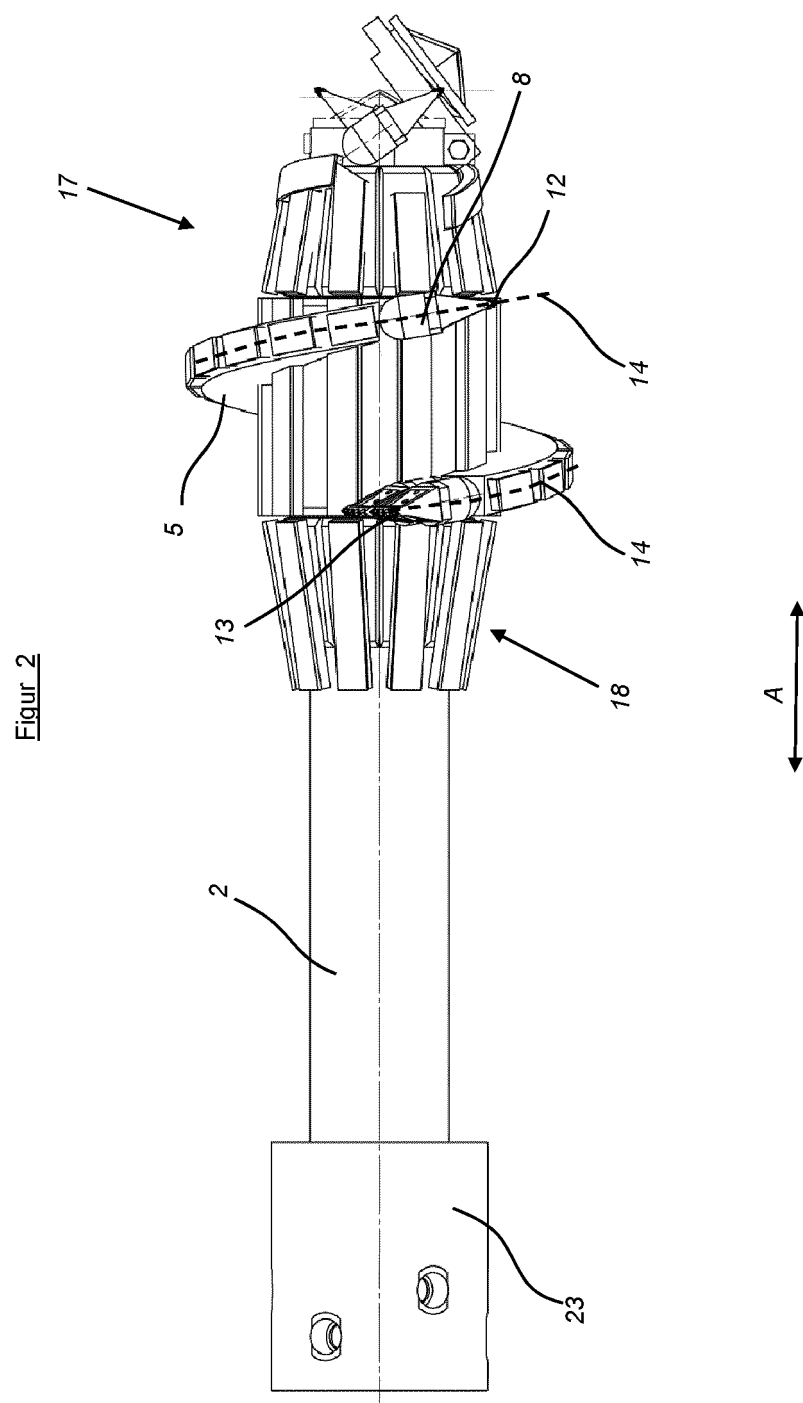




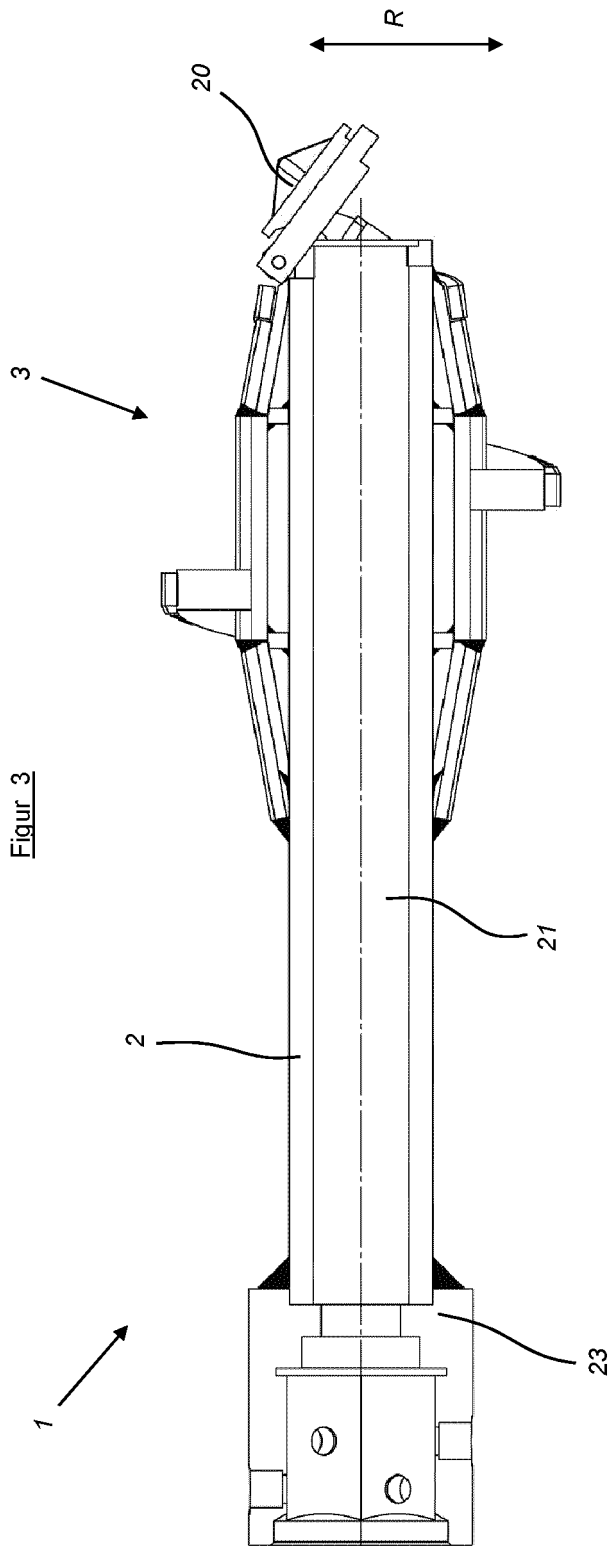


Figure 3

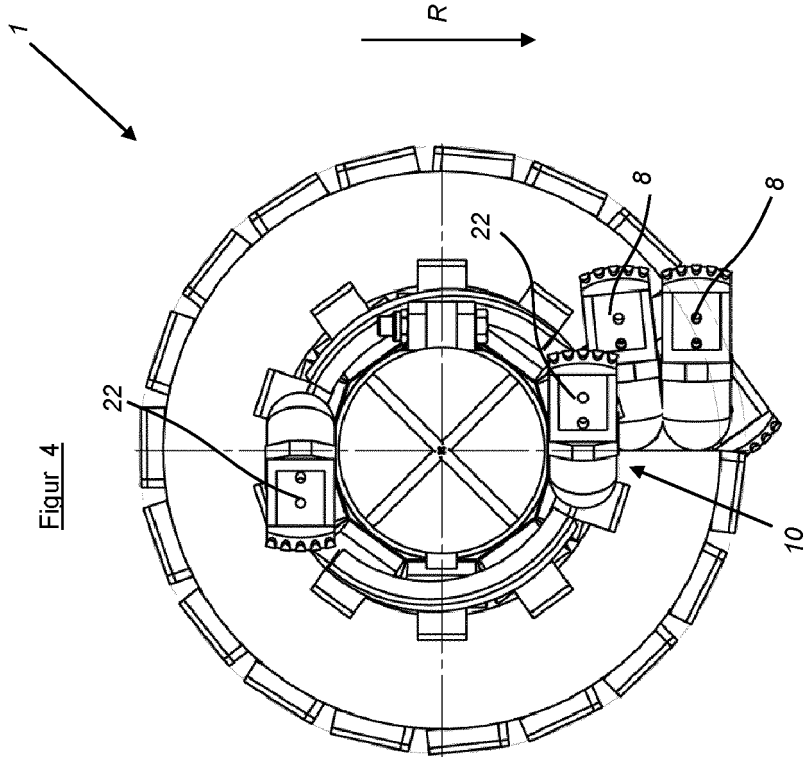

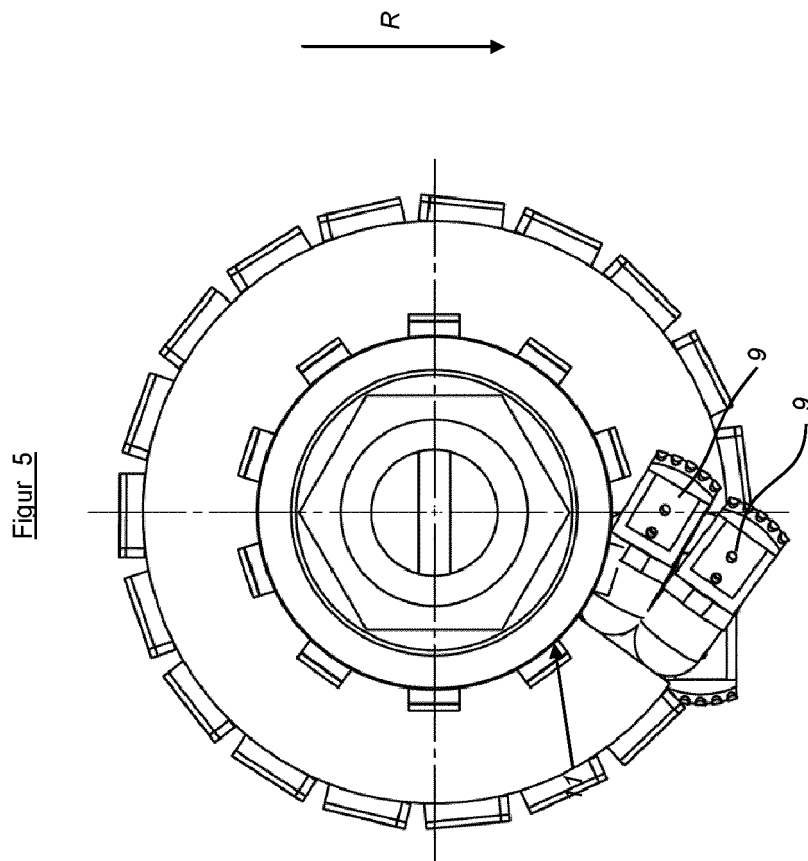

Figur 6

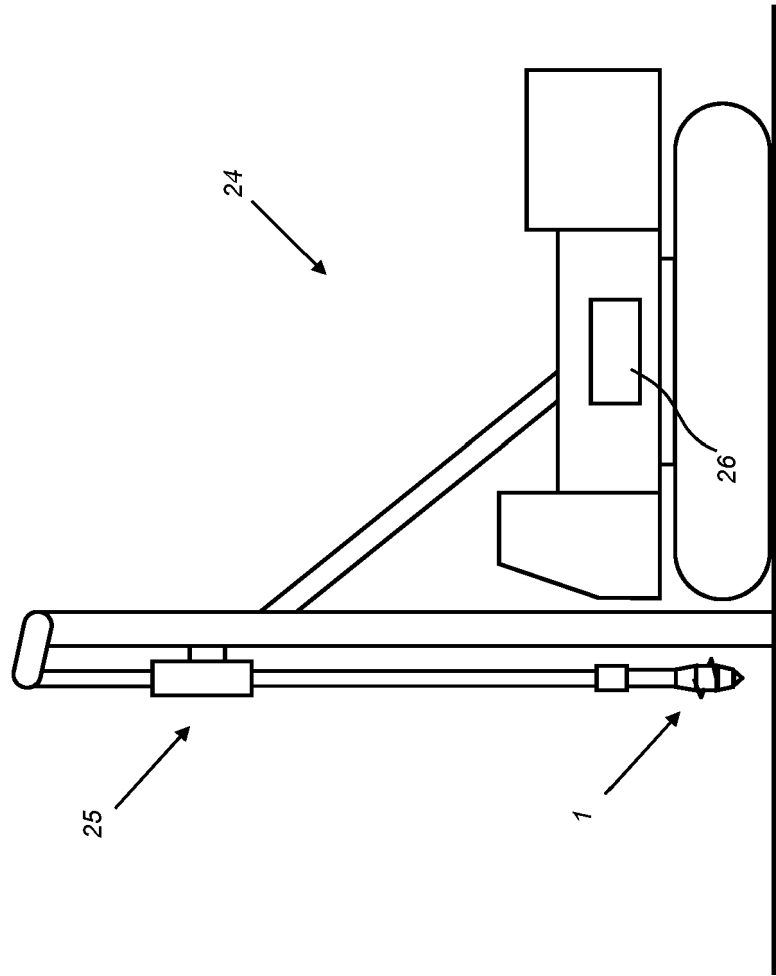

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2685006 B1 [0001]
- DE 202010006129 U1 [0002]
- GB 2556915 A [0003]