

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 November 2002 (21.11.2002)

PCT

(10) International Publication Number
WO 02/092966 A1

(51) International Patent Classification⁷: E21B 44/00

(21) International Application Number: PCT/FI02/00409

(22) International Filing Date: 14 May 2002 (14.05.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20011021 15 May 2001 (15.05.2001) FI

(71) Applicant (for all designated States except US):
SANDVIK TAMROCK OY [FI/FI]; Pihlisulunkatu 9, FIN-33330 Tampere (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SALMINEN, Pekka [FI/FI]; Pitkäniemenkatu 11, FIN-33330 Tampere (FI). SAHA, Heikki [FI/FI]; Karjakontie 4 C, FIN-33340 Tampere (FI).

(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O.Box 148, FIN-00121 Helsinki (FI).

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

[Continued on next page]

(54) Title: DRILLING CONTROL ARRANGEMENT

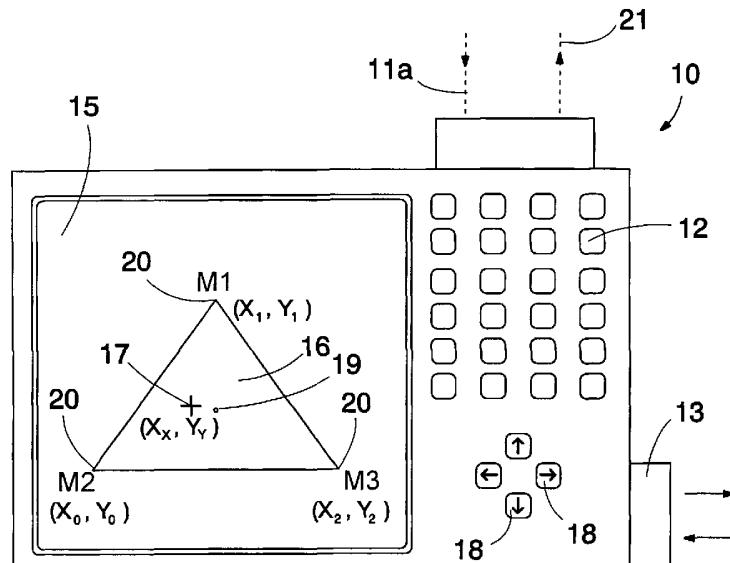

WO 02/092966 A1

(57) Abstract: A method and a control system for controlling rock drilling. A control unit (10) of a rock drilling apparatus is provided with one or more control modes (M1 - M4), each determining the drilling variables to be measured, their threshold values and the operating principles according to which the operating parameters of drilling are controlled to achieve a desired control criterion. According to a preferred embodiment of the invention, a user interface of the control system comprises a polygonal operating area (16) comprising in each corner (20) one control mode (M1 - M4). When the operating point in the operating area (16) has been selected, the control system calculates the distance from the operating point to each corner (20) and determines a coefficient for each control mode (M1 - M4) to be taken into account in determination of the drilling parameters.



CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DRILLING CONTROL ARRANGEMENT

The invention relates to a method of controlling rock drilling, the method comprising drilling rock with a rock drilling apparatus comprising a carrier, a feeding beam, a rock drill movable with respect to the feeding beam, and a control unit for controlling the rock drilling, the method also comprising providing a memory of the control unit with default settings for drilling, measuring the operation of the apparatus during drilling, and adjusting the operating parameters of drilling to accomplish a desired control operation.

The invention further relates to a control system for a rock drilling apparatus comprising a carrier, a feeding beam, a rock drill movable with respect to the feeding beam, a control unit provided with a user interface for controlling the drilling, and at least one sensor for measuring drilling operation.

Rock drilling utilizes a rock drilling apparatus comprising a carrier, a feeding beam and a rock drill moved with respect to the feeding beam. The rock drill comprises a percussion device for delivering impacts on a tool connected to the drill, and a rotating device for rotating the tool. The rock drill further comprises means for guiding a flushing agent into a drill hole for flushing drill cuttings out of the hole. Operating parameters of rock drilling include impact pressure, feed pressure, rotation pressure medium flow and flushing pressure, which are adjusted in order to control the operation of the drilling apparatus as desired. In a widely used control arrangement the aim is to provide the drill bit with a maximum penetration rate. This arrangement comprises measuring the penetration rate of the drill bit and empirically adjusting individual operating parameters to achieve the highest possible penetration rate. The aim of another generally used control arrangement is to optimise transfer of energy from the drill to the rock. This arrangement comprises measuring the rotation power and/or rotation torque of the drill bit and keeping the variables in predetermined limits by adjusting individual operating parameters.

A disadvantage of the prior art methods is that when the operator is adjusting individual operating parameters, he/she cannot perceive the effect of the adjustment measures to the entire drilling situation and the total costs of drilling. Therefore it is very difficult to optimise drilling by adjusting individual absolute values. Adjustment of a single drilling parameter affects positively certain target criteria representing the success of drilling, but it can simultaneously affect other target criteria negatively. For example, an increase in impact power expedites drilling and thus reduces the costs of drilling, but unfortunately

the service life of the drilling equipment simultaneously decreases, which in turn adds considerably to the costs of drilling. In all, in the present systems successful adjustment and control of a drilling situation is highly dependent on the experience and skills of the operator.

5 An objective of the present invention is to provide a new and improved arrangement for controlling rock drilling.

The method according to the invention is characterized by providing the control unit with at least two control modes with different control strategies, each control mode determining at least one criterion to be measured during 10 drilling, a threshold value for a measurement result, and at least one adjustable operating parameter, prioritising one control mode over the other modes, and calculating, based on the measurement results, control values for the operating parameters to be adjusted in the control unit in order to automatically control the drilling such that the control strategy of the prioritised control mode is 15 weighted.

Further, the control system according to the invention is characterized in that the user interface of the control unit is provided with at least two preformed control modes, each control mode has a particular control strategy and determines at least one criterion to be measured during the drilling, a 20 threshold value for a measurement result, and at least one adjustable operating parameter, one control mode can be prioritised over the other modes, and the control unit is arranged to automatically adjust, based on the measurement results, the operating parameters determined by the control modes such that the drilling result according to the prioritised control mode is weighted over the 25 other control modes.

According to an essential idea of the invention, a number of control modes with different weighting required to optimise rock drilling are determined in a control unit of a rock drilling apparatus. According to the control strategy of each control mode, one or more critical control criteria are measured and individual operating parameters are adjusted automatically in a manner determined by the control mode in order to achieve a desired state of the control mode. In practice, the control system forms, by means of the control mode, 30 coefficients used to determine allowed limits for measurement results and adjusts individual operating parameters. Default settings of the rock drilling apparatus, which are also required in the control, are stored in advance in the control unit and are taken into account in adjusting the operating parameters. 35

5 A criterion to be measured, determined in a control mode, represents the effect of adjusting one or more operating parameters of drilling, this effect being measured either directly by sensors or calculated in the control unit of the rock drilling apparatus from measurement data obtained from the sensors.

10 The invention has the advantage that the control modes facilitate the control of drilling performed by the operator of the rock drilling apparatus. The control modes clearly describe how an individual control action affects the entire drilling situation. The operator can select the control mode optimising the target criterion that he/she considers the most important. Furthermore, the operator can switch from one control mode to another in a simple manner even 15 during drilling as the circumstances of drilling or the control targets change.

15 According to an essential idea of an embodiment of the invention, the control unit comprises a user interface, where the control modes are arranged in corners of a plane geometrical polygon. The area defined by the polygon thus determines the available operating area, where the operator can move a control cursor or the like during adjustment. The location of the control cursor in the operating area illustrates the selected operating point. The closer 20 the operating point is to a single corner of the polygon and thus an individual control mode, the greater the importance of the control mode. Due to the geometrical shape of the operating area, transfer of the control cursor closer to a corner moves the operating point further from the other corners and the control modes determined therein. An advantage of this embodiment is that the operator can weight, in a simple manner, a control mode he/she considers to be important. The user interface also clearly shows how prioritising one control 25 mode also affects the other target criteria of drilling. Furthermore, since prioritising one control mode automatically diminishes the importance of the other modes, the operator cannot give the control system such unreasonable control commands that might conflict with one another and thus cause problems in the 30 operation of the drilling apparatus. In practice, the control unit uses the location of the control cursor to calculate a weighting coefficient for each control mode, and values of the individual operating parameters based on the weighting coefficients.

35 The invention will be described in more detail in the accompanying drawings, in which

Figure 1 is a schematic side view of a rock drilling apparatus,

Figure 2 shows schematically a control unit according to the invention and a user interface thereof,

Figure 3 shows schematically another control unit according to the invention and a user interface thereof, and

5 Figure 4 shows schematically a third control unit according to the invention and a user interface thereof.

For the sake of clarity, the figures show the invention in a simplified form. Like reference numerals refer to like parts.

10 The rock drilling apparatus shown in Figure 1 comprises a carrier 1, a power unit 2 arranged on the carrier, a control cabin 3 and in this case three drilling booms 4 that are movable with respect to the carrier. The free end of each drilling boom 4 is provided with a feeding beam 5 with a rock drill 6 arranged movably therein. The rock drill 6, the feeding beam 5 and the drilling boom 4 form a unit referred to herein as a drilling unit 7. For the sake of clarity, 15 Figure 1 does not show any accessory equipment required for drilling, such as devices related to replacement of drill rods 8 and a drill bit 9. The rock drilling apparatus further comprises a control unit 10 arranged on the carrier 1, preferably in the control cabin in connection with the equipment for controlling the rock drilling apparatus. The control unit 10 receives measurement data on e.g. 20 impact pressure, feed pressure, feed flow, feed rate, rate of rotation, rotation pressure, rotation pressure medium flow, flow of flushing agent, sound pressure intensity, and vibration via a line 11a from sensors 11 arranged in the drilling units 7. The control unit transmits control commands via a control line 21 to the drilling units 7 to control them.

25 Figure 2 shows a control unit 10 of a rock drilling apparatus. The control unit 10 comprises a keypad 12 for inputting data into the memory of the control unit. For example the default settings of the drilling equipment, such as data about the drill, drill rods, drill bit etc., can be supplied via the keypad to the control unit. Alternatively, the default settings can be read by a suitable reading 30 device 13 for example from a memory disc or transferred from a unit outside the rock drilling apparatus via a wired or a wireless data transmission connection. The control unit shown in the figure comprises four control modes M1 – M4, and the desired control mode can be selected by means of selecting switches 14. In this case the operator selects one control mode at a time, the 35 control strategy of the control mode being used by the control unit to control the drilling.

The control modes M1 – M4 shown in Figure 2 can be determined e.g. according to the following control strategies:

5 M1 = drilling efficiency mode that measures the rate at which the drill tool penetrates the rock. The drilling efficiency mode M1 comprises adjusting the operating parameters to obtain a maximum penetration rate. Therefore the target criterion is the maximum penetration rate. Alternatively, the target criterion of the drilling efficiency mode can be drilling at a substantially constant penetration rate. The control unit adjusts the penetration rate e.g. by varying the feed force, impact power and rotation torque.

10 M2 = quality mode, which measures e.g. the rotation torque acting on the drill tool. The quality mode M2 comprises adjusting the operating parameters so that the rotation torque remains within predetermined limits. It is also possible to measure the feed force and to adjust the feeding so as to avoid overfeed during the drilling, since this usually makes the hole to be 15 drilled less straight. Sufficient straightness of a hole, which can be one of the target criteria of the quality mode, is obtained by using a low impact power. One of the characteristics illustrating the quality of drilling can be the ease of unscrewing the threaded connections between the drilling components. The connections can be opened more easily when overfeed is avoided during the 20 drilling.

M3 = cost mode that measures e.g. vibration occurring in the drilling equipment. The cost mode M3 comprises adjusting the operating parameters so as to minimize the vibration. The cost mode determines limits for allowed vibrations. Diminishing vibration lengthens the service life of the drilling equipment, thus minimizing costs of spare parts, and idle time resulting from repairs. The target criterion of this mode is the service life of the drilling equipment. In order to minimize vibration, the aim is to avoid both underfeed and overfeed, and a high impact power and rotation torque during the drilling.

30 M4 = optimisation mode, where the control unit automatically adjusts the operating parameters one at a time. The mode comprises measuring a change in the measuring values caused by the operating parameter that is being adjusted. Measuring values have preset limits. When adjustment of an individual operating parameter provides the allowed area preset for a measuring value, this adjustment value is locked and a new operating parameter is 35 selected and adjusted to obtain the allowed area preset for the measuring value. The adjustment is continued in this manner as a continuous cycle.

Fulfilment of the target criteria requires fulfilment of certain measurable criteria.

Figure 3 shows another control unit 10, which comprises a keypad 12 and a reading device 13 for supplying default data to the control unit. The 5 control unit further comprises a screen 15 and a graphical user interface. The screen 15 displays a polygonal operating area 16 that defines the area where a control cursor 17 can be moved by means of arrow keys 18. Alternatively, the cursor can be moved with other guides, such as a mouse, a pointing ball or a touch screen. The location of the control cursor 17 in the operating area 16 10 determines the current operating point of the control system. In this case the operating area 16 is triangular, and each corner 20 of the triangle represents one control mode. The triangle has three control modes: M1, M2 and M3. By moving the control cursor 17 the operator can weight one control mode over the other two modes. In a situation where the control cursor 17 is placed in the 15 centre 19 of the triangle, the distance to each corner 20 is equal and each control mode is thus equally weighted. When the control cursor 17 is moved towards one corner 20, the distance thereto decreases while the distance to the other two corners of the triangle increases. The control system calculates the weighting of the control modes M1, M2 and M3 with respect to the distance 20 from the cursor 17 to the corners 20 of the triangle.

Weighting coefficients used by the control system can be determined as follows:

25

- calculating the maximum distance R of the cursor by formula
$$R = \text{Sqrt}((X1-X0)^2 + (Y1-Y0)^2)$$
- calculating weighting coefficients C0, C1, C2 by subtracting the direct distance to the corner from the maximum distance R

30

$$C0 = R - \text{Sqrt}((XX-X0)^2 + (YY-Y0)^2)$$
$$C1 = R - \text{Sqrt}((XX-X1)^2 + (YY-Y1)^2)$$
$$C2 = R - \text{Sqrt}((XX-X2)^2 + (YY-Y2)^2),$$

followed by

35

- calculating limits for the measurement data, and control values of individual operating parameters by means of the weighting coefficients C0, C1, C2.

Furthermore, the graphical user interface enables the operator to select the desired control modes M1 – M3 to the corners 20 of the operating

area 16 from the memory of the control unit 10. Also, the control unit can store different operating areas 16, from which the operator can choose one.

Figure 4 shows yet another control unit 10, where four control modes M1, M2, M3 and M4 are arranged in a square. In this case the control cursor 17 is a mechanical guide, such as a joystick or the like, the location of the guide within the square operating area 16 determining the operating point of the control system. Similarly as in the arrangement shown in Figure 3, the control system utilizes the distance between the cursor and an individual control mode to calculate, for each control mode, the weighting coefficients corresponding to the operating point, and it thereafter calculates the operating parameters for the drilling by means of the coefficients.

Operating areas 16 of other shapes are also possible, depending on the number of the control modes to be used, for instance. In the simplest form the operating area can be a line segment, where two control modes are arranged at the end points of the line segment. Moving the control cursor towards one end point of the line segment simultaneously lengthens the distance to the other end point, thus decreasing the weighting of the control mode at the other end point.

It should further be mentioned that the criterion to be measured, mentioned in the control mode, can be e.g. the noise of drilling, state of motion of the shank, temperature of the drilling equipment, or strain of the drill rod, in addition to the criteria disclosed above.

When the rock drill and/or the feed means are operated by a pressurized medium, the pressure and flow of the pressurized medium acting on the equipment are measured. Correspondingly, the operating parameters include impact pressure, feed pressure, feed flow, rotation pressure, rotation flow, and pressure and flow of the flushing agent. On the other hand, when the drilling equipment is operated electrically, the sensors measure electrical values, such as voltage and current. Correspondingly, when the equipment is electrical, the operating parameters are electrical control variables.

The drawings and the related description are only intended to illustrate the inventive idea. The details of the invention can vary within the scope of the claims. Therefore the invention can be applied in all types of rock drilling.

CLAIMS

1. A method of controlling rock drilling, the method comprising drilling rock with a rock drilling apparatus comprising a carrier (1), a feeding beam (5), a rock drill (6) movable with respect to the feeding beam (5), and a control unit (10) for controlling the rock drilling, the method also comprising providing a memory of the control unit (10) with default settings for drilling, measuring the operation of the apparatus during drilling, and adjusting the operating parameters of drilling to accomplish a desired control operation, **characterized** by
 - 10 providing the control unit (10) with at least two control modes (M1 – M4) with different control strategies, each control mode (M1 – M4) determining at least one criterion to be measured during drilling, a threshold value for a measurement result, and at least one adjustable operating parameter, prioritising one control mode over the other modes, and
 - 15 calculating, based on the measurement results, control values for the operating parameters to be adjusted in the control unit (10) in order to automatically control the drilling such that the control strategy of the prioritised control mode (M1 – M4) is weighted.
2. A method according to claim 1, **characterized** by providing the operating system of the control unit (10) with at least two simultaneously active control modes (M1 – M4) with different control strategies, and prioritising one control mode over the other modes.
3. A method according to claim 2, **characterized** by providing the operating system of the control unit (10) with an operating area (16) of the shape of a plane geometrical polygon, selecting the operating point of the control by moving a control cursor (17) in the operating area (16), placing one control mode (M1 – M4) in each corner (20) of the operating area (16), and calculating a weighting coefficient for each control mode (M1 – M4) by means of the distance between the operating point and the corners (20).
4. A control system for a rock drilling apparatus comprising a carrier (1), a feeding beam (5), a rock drill (6) movable with respect to the feeding beam, a control unit (10) provided with a user interface for controlling the drilling, and at least one sensor (11) for measuring drilling operation, **characterized** in that
 - 30 the user interface of the control unit (10) is provided with at least two preformed control modes (M1 – M4),

each control mode (M1 – M4) has a particular control strategy and determines at least one criterion to be measured during the drilling, a threshold value for a measurement result, and at least one adjustable operating parameter,

5 one control mode can be prioritised over the other modes, and the control unit (10) is arranged to automatically adjust, based on the measurement results, the operating parameters determined by the control modes (M1 – M4) such that the drilling result according to the prioritised control mode is weighted over the other control modes (M1 – M4).

10 5. A control system according to claim 4, **characterized** in that the user interface of the control unit (10) is provided with at least two simultaneously active control modes (M1 – M4) with different control strategies, and the user interface comprises means for prioritising one control mode over the other modes.

15 6. A control system according to claim 5, **characterized** in that the user interface of the control unit (10) comprises an operating area (16) of the shape of a plane geometrical polygon, that one control mode (M1 – M4) is placed in each corner (20) of the polygon, that the user interface comprises a control cursor (17) whose location in the operating area (16) is arranged to 20 represent the currently selected operating point of the control, and that the control unit (10) is arranged to calculate the weighting of each control mode (M1 – M4) depending on the distance from the operating point to the corners (20) of the polygon.

25 7. A control system according to claim 6, **characterized** in that the operating system comprises a triangular operating area (16).

30 8. A control system according to claim 7, **characterized** in that the first corner (20) of the triangular operating area (16) is provided with a control mode (M1) optimising the penetration rate of drilling, that the second corner of the triangle is provided with a control mode (M2) optimising the 35 straightness of the hole to be drilled, and the third corner of the triangle is provided with a control mode (M3) optimising the service life of the drilling equipment.

35 9. A control system according to any one of claims 4 to 8, **characterized** in that the control unit (10) comprises a graphical user interface.

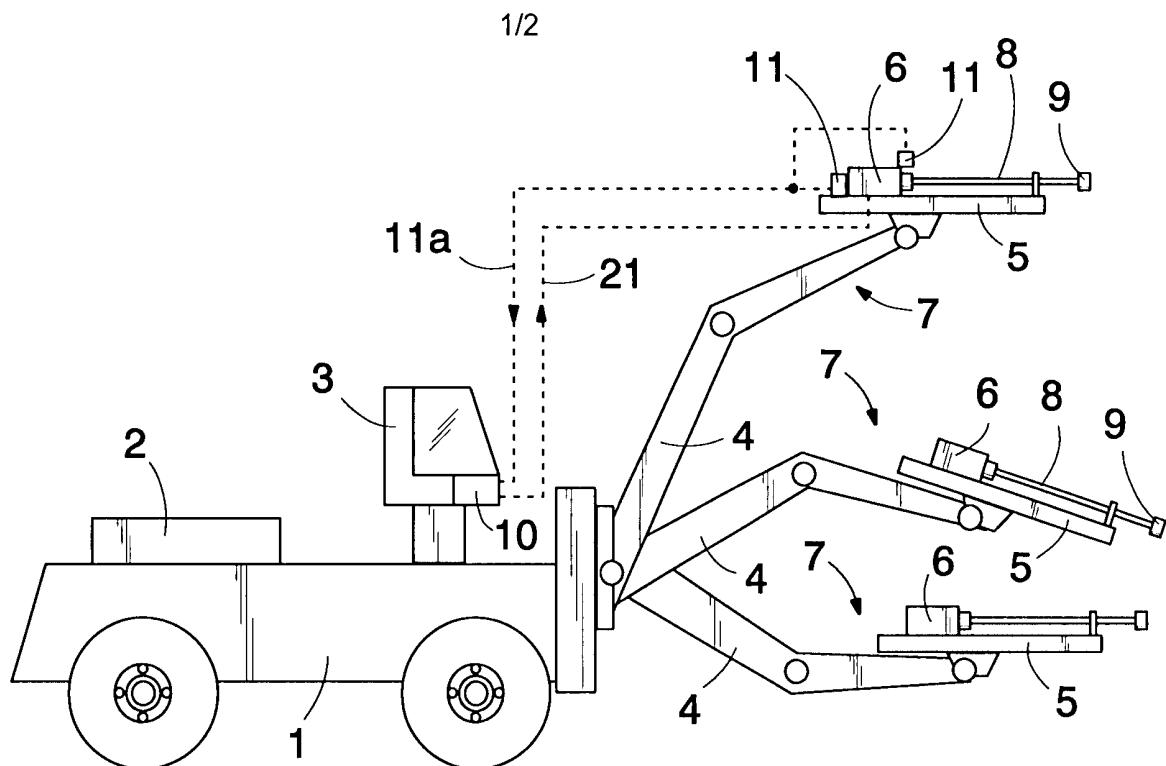


FIG. 1

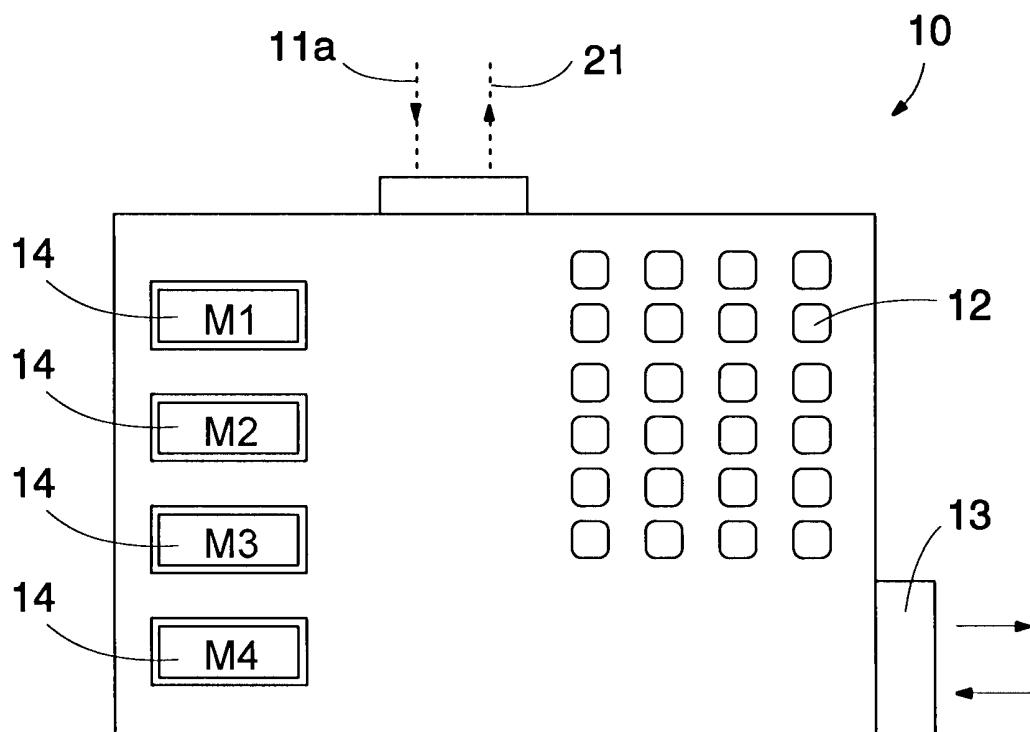


FIG. 2

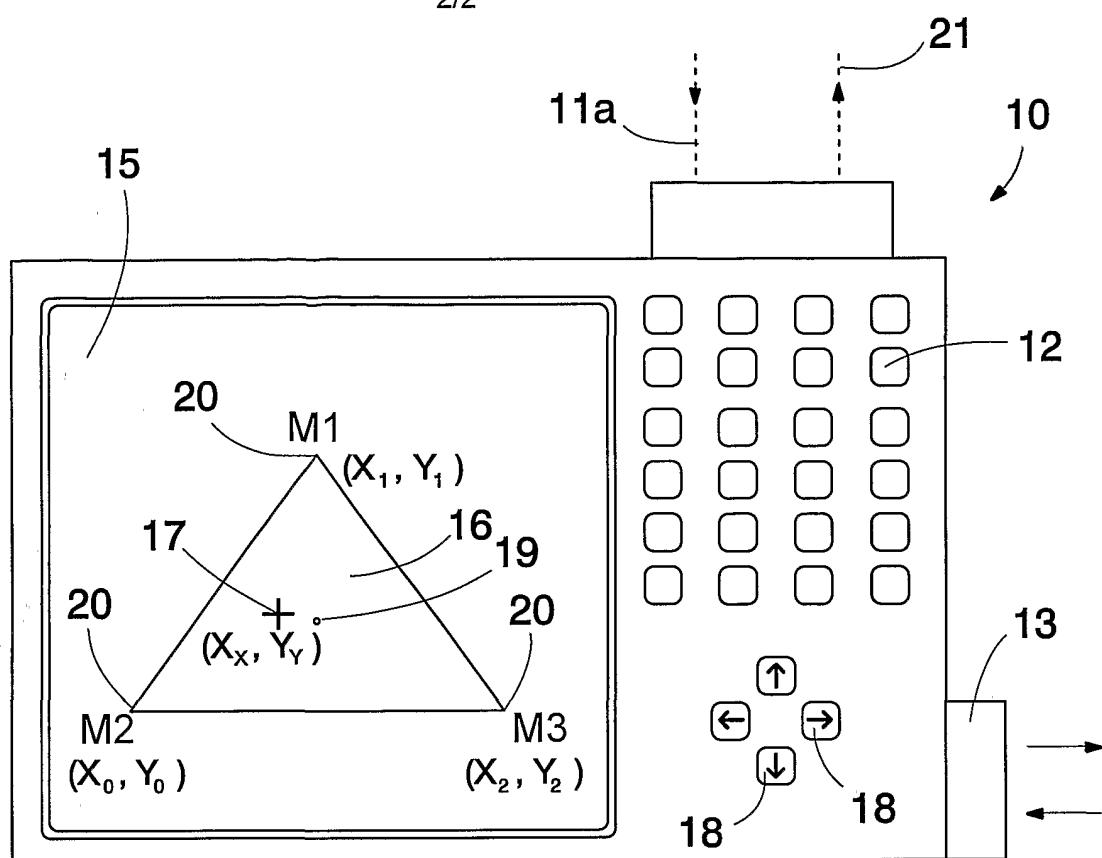


FIG. 3

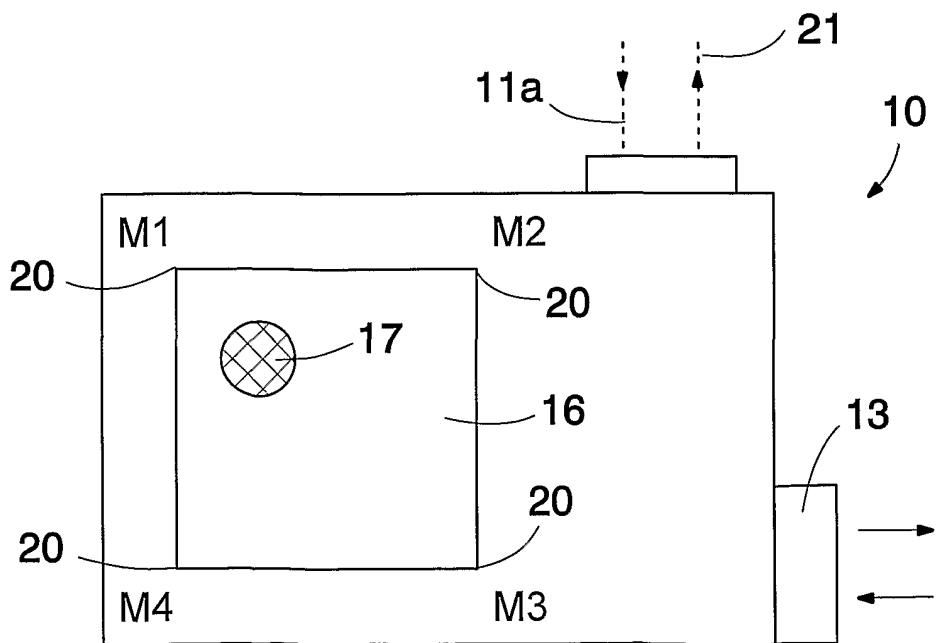


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 02/00409

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: E21B 44/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5679894 A (V. KRUGER ET AL), 21 October 1997 (21.10.97), column 4, line 37 - line 57, figure 3 --	1-9
X	US 5713422 A (J.S. DHINDSA), 3 February 1998 (03.02.98), column 3, line 10 - line 35, figure 1 --	1-9
X	WO 0042287 A1 (VERMEER MANUFACTURING COMPANY), 20 July 2000 (20.07.00), page 45, line 18 - page 47, line 9 -- -----	1-9

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

5 Sept 2002

09-09-2002

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86Authorized officer
Christer Bäcknert / MRO
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

06/07/02

International application No.

PCT/FI 02/00409

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 5679894 A	21/10/97	CA 2144497 A		15/09/95
		EP 0672818 A,B		20/09/95
		NO 311271 B		05/11/01
		NO 950972 A		15/09/95
		US 5456106 A		10/10/95
		CA 2123273 A		13/11/94
		EP 0624706 A		17/11/94
		NO 941769 A		14/11/94
		US 5325714 A		05/07/94
<hr/>				
US 5713422 A	03/02/98	CA 2143596 A		29/08/95
		GB 2286847 A,B		30/08/95
		GB 2321483 A,B		29/07/98
		GB 9504008 D		00/00/00
		GB 9804328 D		00/00/00
<hr/>				
WO 0042287 A1	20/07/00	AU 2725900 A		01/08/00
		EP 1153194 A		14/11/01
		US 6389360 B		14/05/02
<hr/>				