

H. J. HICK,  
FILING APPLIANCE,  
APPLICATION FILED JULY 24, 1914.

1,251,663.

Patented Jan. 1, 1918.

4 SHEETS—SHEET 1.

FIG. 2


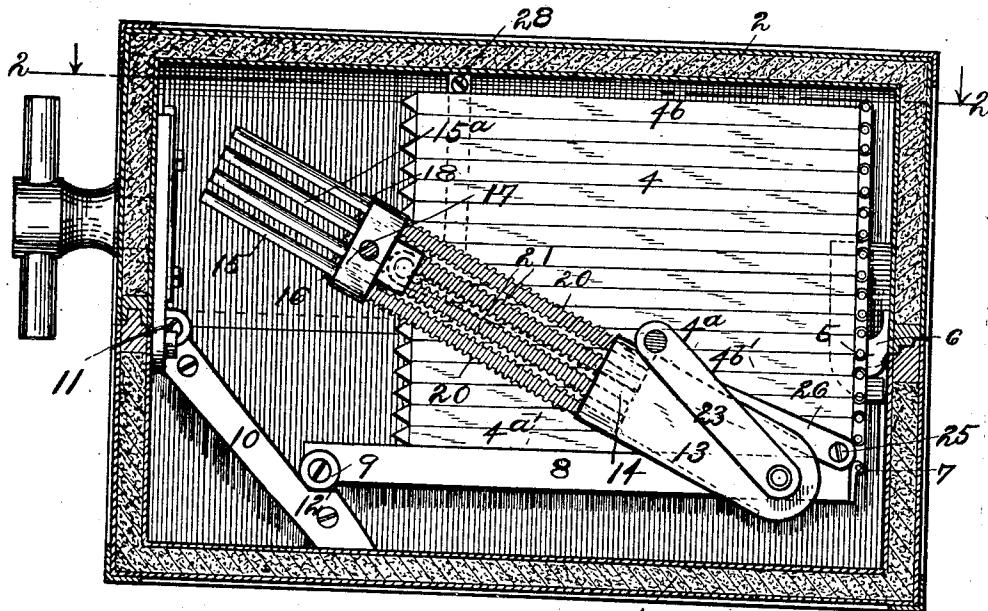


FIG. 1

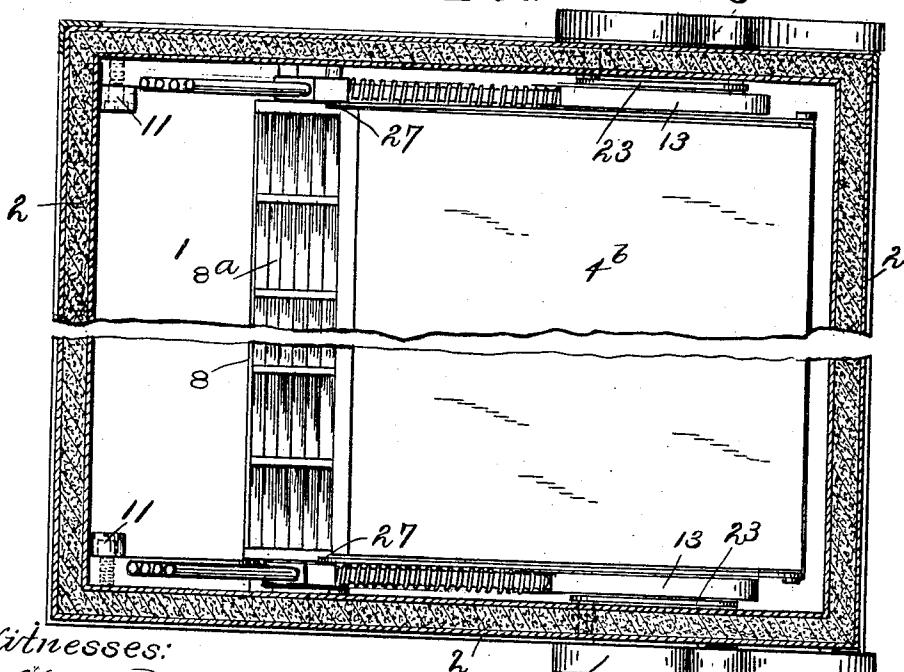

Witnesses:

J. C. Turner  
Earl C. Carlson

3 Inventor.  
Harry J. Hick.

By Harry F. Greene  
Attorney.

1,251,663.


H. J. HICK.  
FILING APPLIANCE.  
APPLICATION FILED JULY 24, 1914.

Patented Jan. 1, 1918.

4 SHEETS—SHEET 2.

FIG. 3.

FIG. 4

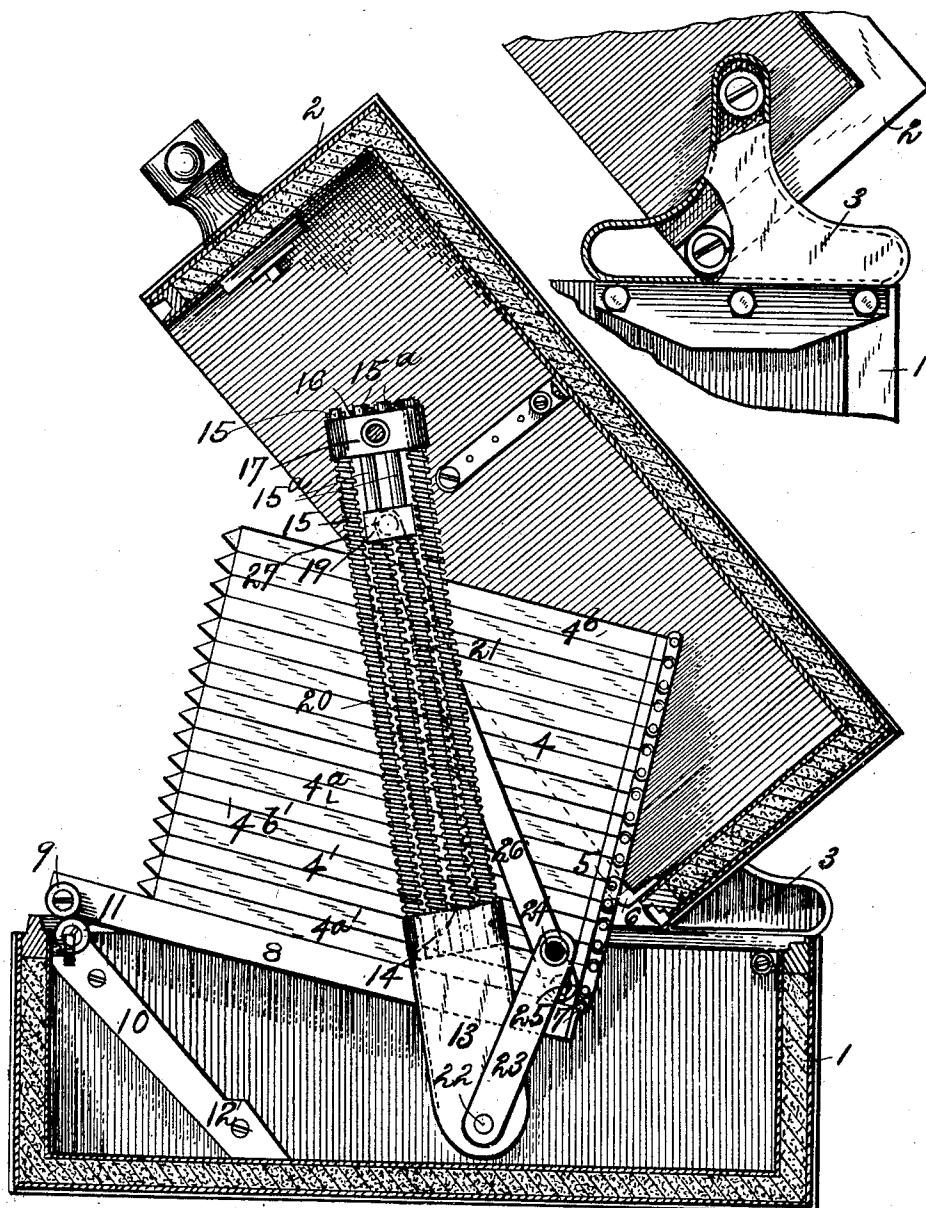

*Witnesses:*

J. C. Turner  
E. C. Ganson

### *Inventor.*

*Harry J. Hick.*

By Harry Frease  
Attorney.


1,251,663.

H. J. HICK.  
FILING APPLIANCE.  
APPLICATION FILED JULY 24, 1914.

Patented Jan. 1, 1918.

4 SHEETS—SHEET 3.

FIG. 5.

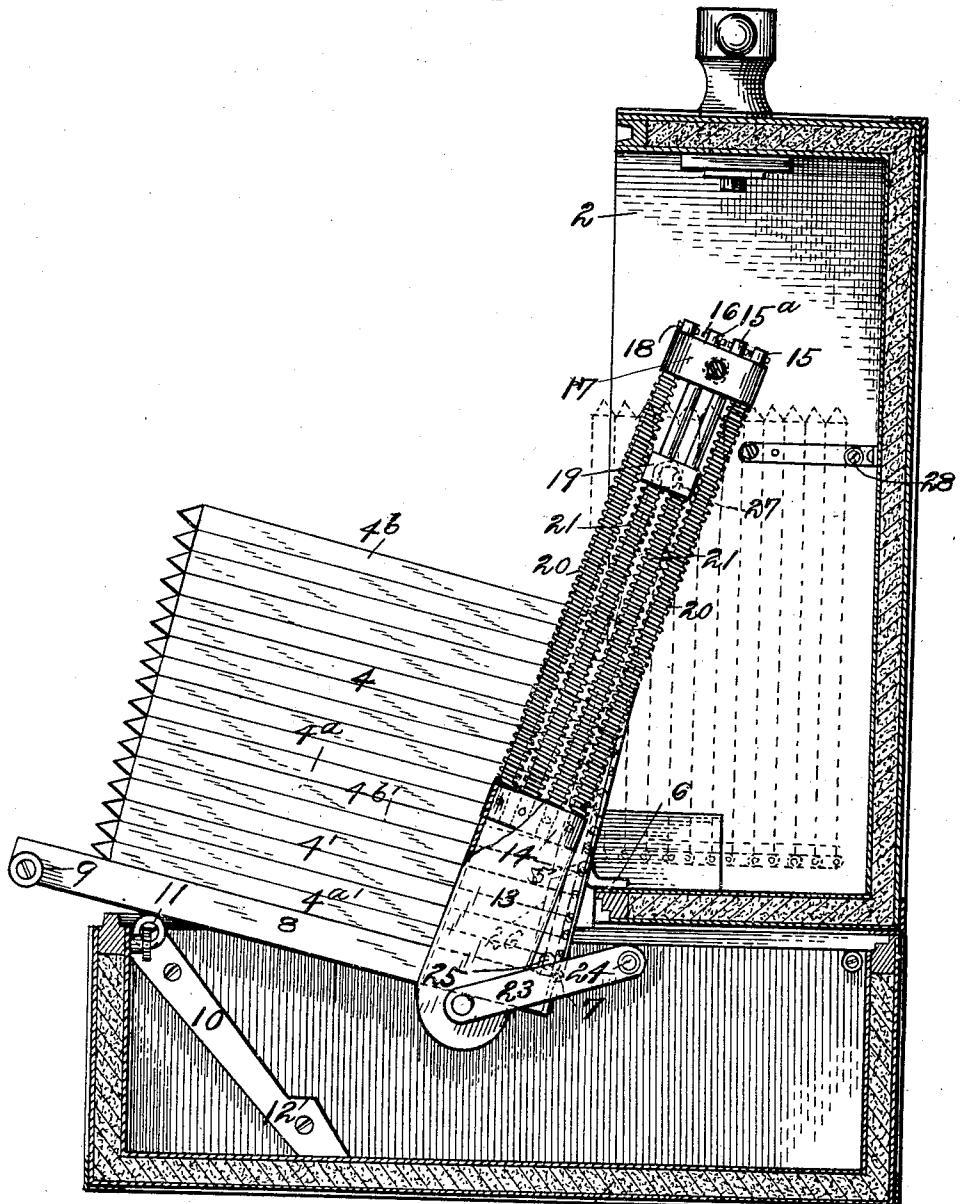

*Witnesses:*

J. C. Turner  
Earl C. Carlson

*Inventor.*

*Harry J. Hick.*

By Harry Frease  
Attorney

H. J. HICK.  
FILING APPLIANCE.


APPLICATION FILED JULY 24, 1914.

1,251,663.


Patented Jan. 1, 1918.

4 SHEETS—SHEET 4.

五〇七

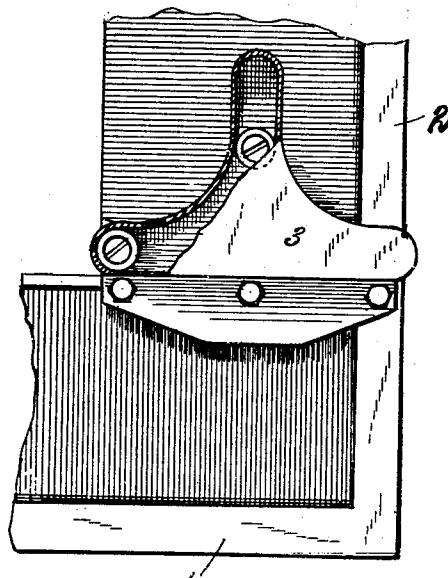

**FIG. 6.**

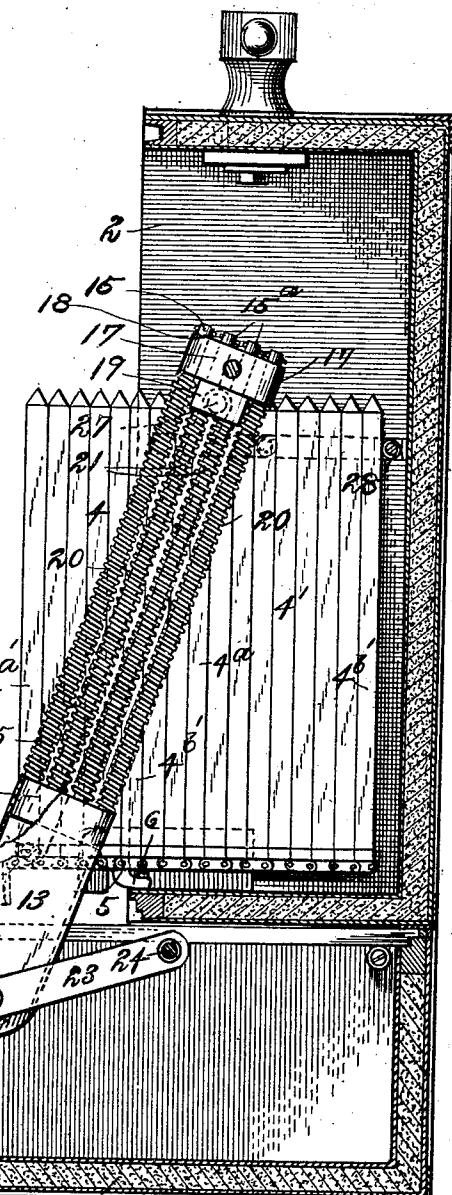

*Witnesses:*

J. C. Turner  
Earl C. Carlson

*Inventor.*

*Harry J. Hick.*

By Harry Grease  
Attorney.

# UNITED STATES PATENT OFFICE.

HARRY J. HICK, OF ALLIANCE, OHIO, ASSIGNOR TO THE McCASKEY REGISTER COMPANY, (INCORPORATED IN 1914,) OF ALLIANCE, OHIO, A CORPORATION OF OHIO.

## FILING APPLIANCE.

1,251,663.

Specification of Letters Patent.

Patented Jan. 1, 1918.

Application filed July 24, 1914. Serial No. 852,835.

To all whom it may concern:

Be it known that I, HARRY J. HICK, a citizen of the United States, residing at Alliance, in the county of Stark and State of Ohio, have invented certain new and useful Improvements in Filing Appliances, of which the following is a specification.

The invention relates to a filing appliance for sales bills and other similar papers, in which a plurality of bill holders are operatively mounted in a fire-proof case comprising a rectangular base section and a similar cover section adapted to be swung on the base section to incase the bill holders when closed, and to form a back for the same when opened.

In a former application filed June 8, 1914, Serial No. 843,602, a filing appliance of this type or character has been illustrated, described and claimed, in which guiding hinge connections between the cover and base sections and external counterbalancing means for the cover section are provided for swinging and shifting the cover section upon the base section, and in which a series of hinged bill holders and an index frame are pivoted to the rear rim of the cover section.

In a subsequent application filed June 12, 1914, Serial No. 844,672, a filing appliance of this type and character has been illustrated, described and claimed, in which a series of hinged holders have their hinged ends pivoted intermediate the end holders to the rear rim of the cover section of the case, with supporting and guiding means for the free ends of the holders in the base section of the case, and with swinging contracting connections between the hinged end of the lower holder of the series and the cover section of the case for elevating and sustaining the pendent hinged ends of the lower holders.

And in a later application filed July 23, 1914, Serial No. 852,600, a filing appliance of this type or character has been illustrated, described and claimed, in which a plurality of hinged holders have their hinged ends depending from a pivotal connection with the rear rim of the cover section, with means for supporting and guiding the free ends of the holders upward and forward from within the base section over and upon the forward rim thereof, and means bearing in the base section for elevating and sustaining the hinged ends of the holders.

The object of the present invention is to

combine within the case, counterbalancing means for the cover section thereof, and elevating and sustaining means for the pendent hinged ends of the holders therein; and to coördinate the operation of these means so that the counterbalance will not come into play until the cover section has been swung part way downward from upright position, and so that the energy of the holder elevating and sustaining means will be added to the cover counterbalancing means, as the cover is swung toward and into its reclined closed position.

This object is attained by assembling the cover counterbalance springs and the holder elevating and sustaining springs in extensible frames within each side of the case, by pivotally connecting the upper ends of these frames with the cover section of the case, by providing the lower end of the frame with a pendent link connection with the base section of the case, and by providing a swinging link connection between the upper ends of the elevating and supporting springs, and the hinged end of the lower holder.

A preferred embodiment of the invention, thus briefly set forth, is illustrated in the accompanying drawings, forming part hereof, in which—

Fig. 1 is a side elevation section of the case showing the cover section closed downward upon the base section thereof and the holders inclosed therein;

Fig. 2, a plan section of the case on line 2—2, Fig. 1, showing the holders and other parts therein, as in Fig. 1;

Fig. 3, a side elevation section of the case showing the cover section swung upward part way upon the rear end of the base section and the bill holders carried part way upward and forward toward operative position;

Fig. 4, a fragmentary side elevation, partly in section, showing one guiding hinge connection, with the cover section positioned as in Fig. 3;

Fig. 5, a similar section of the case, showing the cover section swung into upright position upon the rear end of the base and the bill holders carried fully upward and forward into reclined operative position;

Fig. 6, a similar section showing all the bill holders rotated into upright position;

85

90

95

110

Fig. 7, a side elevation partly in section, of one guiding hinge connection showing the cover section positioned as in Figs. 5 and 6.

Similar numerals refer to similar parts 5 throughout the drawings.

The case is composed of the substantially rectangular bottom or base section 1 and the top or cover section 2, which are operatively connected together by means of the guiding hinge brackets 3, one bracket being located 10 on each side of the rear end portion of the base section; by means of which the cover section can be swung and shifted upon the base section to aline either the top or rear 15 end of the cover section with the rear end of the base section.

The series of bill holders 4 and 4' are hinged together at the lower rear ends, and the pivot 5 between two adjoining intermediate holders 4<sup>a</sup> and 4<sup>b</sup>' are mounted in 20 the bearing 6 secured on the rear end of the cover section; so that the holders above this bearing may be referred to as the upper division of the series, and the holders below 25 this bearing may be referred to as the lower division of the series.

The lower forward bill holder 4<sup>a</sup>' of the series is pivoted at 7 to the rear end of the frame 8, which may carry an index 8<sup>a</sup> for 30 the bill holders, or may form a table for writing or other use, or may be considered merely as a tray for supporting the superposed holders at certain times. Rollers 9 are journaled on each side of the forward end 35 of the frame 8, and tracks 10 are secured on each inner side of the side walls of the base section of the case; on which tracks the rollers 9 are adapted to ride as the frame 8 is carried downward and rearward into 40 the base section by its rear end pivotal connection with the lower holder of the series, when the cover section is closed downward upon the base section, as shown in Fig. 1.

The rollers 11 are preferably journaled to 45 the upper end of each track 10, upon which rollers the side edge portion of the frame 8 may travel after the frame rollers 9 have passed upward and forward beyond the track rollers 11. And a bearing shoulder 12 50 may be provided in each track upon which the frame rollers 9 are adapted to rest when the frame and superposed holders are carried fully downward and rearward into the base section of the case, as shown in Fig. 1.

55 The spring frame is composed of the bearing plate 13 having the bearing head 14 on its upper end, the outer and inner guide rods 15 and 15<sup>a</sup> secured to the bearing head at their lower end and having the stop pins 60 16 on their upper free ends, the main sliding head 17 having apertures 18 therein for each of the guide rods 15 and 15<sup>a</sup> and the minor sliding head 19 having apertures 20 therein for the inner guide rods 15<sup>a</sup>.

65 The outer and inner coiled compression

70 springs 20 and 21 are located around the outer and inner guide rods 15 and 15<sup>a</sup>, the outer springs extending between the bearing head 14 and the main sliding head 17, and the inner springs extending between the bearing head 14 and the minor sliding head 19.

75 The lower end of the bearing plate 13 is pivoted at 22 to the lower end of the pendent link 23, which has its upper end pivoted by the post 24 to the adjacent side wall of the base section of the case, which pivot post extends inward beyond the inner side of the link 23 of the bearing plate 13, to serve as a pivotal abutment or stop for the rear edge thereof. The main sliding head 17 is pivoted at 17<sup>a</sup> to the adjacent side wall of the cover section of the case adjacent to the forward edge thereof; and the hinged end of the lower holder 4<sup>a</sup>' is pivoted at 25 to the lower end of the swinging link 26, which link has its upper end pivoted at 27 to the inner side of the minor sliding head 19.

80 The parts and the strength of the springs are so proportioned and arranged that when the cover section is swung and shifted into upright position upon the rear end of the base section of the case, with the holders carried forward into reclined operative position, as shown in Fig. 5, the stop pins 16 on the upper ends of the guide rods 15 and 15<sup>a</sup> 85 will bear upon the upper side of the main slide head 17 which is pivoted at 17<sup>a</sup> to the cover section of the case, the weight of the pendent parts being supplemented by the energy of the several springs. During this movement of the cover section, the lower end of the bearing plate 13 is swung forward by its pivotal connection with the pendent link 23 to carry the link upward nearly into horizontal position; and the swinging link 26 between the hinged end of the lower holder 4<sup>a</sup> and the minor slide head 19 draws this head downward, by sliding upon the inner guide rods against the resistance of the inner compression springs 21<sup>a</sup>, to a substantial distance below the main slide head 17, all as 90 shown in the same figure.

95 In this relation of the parts it is evident that the bill holders 4, 4<sup>a</sup> and 4<sup>b</sup>, comprising the upper division of the series, may be rotated upon their hinged ends into upright position, either singly or collectively, in which upright position the upper rear holder of this division is sustained and guided by the abutment rollers 28 provided 100 one in each side of the cover section, and the forward holder 4<sup>a</sup> thereof is supported by the pivotal bearing 6 on the rear rim of the cover section, as shown by broken lines in Fig. 5; so that the rotated holders of this division will be maintained in upright position by the action of gravity in the manner well known in this art.

105 Furthermore, when one or more of the bill holders 4', 4<sup>a</sup>' and 4<sup>b</sup>', comprising the 110

lower division of the series, are rotated on a section, means for supporting and guiding their hinged ends into upright position, as the free ends of the holders upward and shown for all the holders in Fig. 6, the action forward from within the base section over 70 portion of the inner compression springs 15, the forward rim thereof including inclined 75 by thrusting upward the minor slide head 19 and the swinging link 26 pivoted thereto, for bearing the forward ends of the holders 79 serves to elevate and sustain the hinged ends when extending over the base rim.

of the lower holder 4, so that all the 2. A filing case including similar base and 75 holders in the lower division of the series cover sections with guiding hinge connections for swinging and shifting the cover 75 which have been rotated into upright position will be maintained in such position. In section upon the base section, a plurality of 80 this operation the minor head 19 may slide hinged holders mounted in the case having upward into contact with the main head 17, their hinged ends depending from a pivotal 85 when all the holders of the lower series are connection with the rear end of the cover 85 rotated into upright position, as shown in section, means for supporting and guiding 80 the same figure.

For closing the case, it is preferred to 2. A filing case including similar base 85 rotate all the bill holders of the series forward from within the base section over the 85 forward rim thereof including inclined 85 upon their hinged ends into reclined 85 position, superposed upon the frame 8, as for bearing the forward ends of the holders 85 shown in Fig. 5, whereupon a forward 85 when carried downward within the base section, means for supporting and guiding 85 swinging and rearward shifting of the cover section.

section to close it upon the base section, will 3. A filing case including similar base 90 carry the frame 8 and superposed holders 90 and cover sections with guiding hinge 90 connections for swinging and shifting the cover 90 within the two sections of the case, as shown in Fig. 1.

During the first portion of this movement it is evident that the lower pivoted 95 pivot connection with the rear end of the 95 ends of the bearing plate 13 and the pendent 95 link 23 will swing freely downward and 95 guiding the free ends of the holders upward 95 rearward as shown in Fig. 3, and the energy 95 and forward from within the base section 100 of the outer compression springs 21 will 100 not be brought into play to counterbalance 100 the cover section until the rear edge of the 100 bearing plate 13 impinges the protruding 100 pivot post 24, whereupon a further downward 100 swinging of the cover section will 100 intermediate and closed positions.

rotate the spring frame around the pivot 4. A filing case including similar base and 105 post 24 as a fulcrum, and will also slide the 105 cover sections with guiding hinge connec- 105 main head 17 downward upon the guide rods, thereby compressing the outer springs 105 sections upon the base section, a plurality of 15 between this head and the bearing head, 15 hinged holders mounted in the case having 15 which counterbalancing resistance will be 15 supplemented by a further compression of 15 the inner springs 21 when the main head 15 slides downward upon the guide rods far 15 enough to impinge the minor head 19; so 15 that all the compression springs will serve 50 to counterbalance the weight of the cover 50 section of the case during the final portion 50 of its downward movement toward and upon 50 the base section of the case; and reversely, 55 all the compression springs will serve to 55 assist in elevating the cover section during 55 the first portion of its movement into up- 55 right position.

I claim:

1. A filing case including similar base and 60 cover sections with guiding hinge connec- 60 tions for swinging and shifting the cover 60 section upon the base section, a plurality of 65 hinged holders mounted in the case having 65 their hinged ends depending from a pivotal 65 connection with the rear end of the cover

5. A filing case including similar base and 125 cover sections with guiding hinge connec- 125 tions for swinging and shifting the cover 125 sections upon the base section, a plurality of 130 hinged holders mounted in the case having 130 their hinged ends depending from a pivotal 130 connection with the rear end of the cover 130 section, means for supporting and guiding

the free ends of the holders upward and forward from within the base section over the forward rim thereof, means inoperative when the cover section is in and near its upright position for counterbalancing the same when swung downward into intermediate and closed positions, and means for elevating and sustaining the hinged ends of the holders coördinated with and supplementing the cover counterbalance means when the cover section is in and near its closed position.

6. A filing case including similar base and cover sections with guiding hinge connections for swinging and shifting the cover sections upon the base section, a plurality of hinged holders mounted in the case, having their hinged ends depending from a pivotal connection with the rear end of the cover section, means for supporting and guiding the free ends of the holders upward and forward from within the base section over the forward rim thereof, a frame including a bearing member with a plurality of slide rods extending upward therefrom having stop pins on their upper ends, a main head pivoted to the case cover having sliding engagement with the rods, a minor head in the path of the main head having sliding engagement with certain of the rods, compression springs around the rods between the bearing member and the respective sliding heads, a pendent link pivoted to the base and the bearing member and having the case pivot extended to form a pivotal abutment for the bearing member, and a swinging link pivotally connected with the minor head and the hinged end of the lower holder.

7. A filing case including similar base and cover sections with guiding hinge connections for swinging and shifting the cover section upon the base section, a plurality of hinged holders mounted in the case having their hinged ends depending from a pivotal connection with the rear end of the cover section, counterbalance means for the cover section, and means for elevating and sustaining the hinged ends of the holders supplementing the counterbalance means

when the cover section is in and near its closed position.

8. A filing appliance including a case having base and cover sections hinged together, a plurality of bill holders operatively mounted within the case, and counterbalancing and sustaining means for the cover section and bill holders, the counterbalancing means for the cover section being inoperative when the cover section is in and near its upright position and being operative when swung downward into intermediate or closed position.

9. A filing case including similar base and cover sections with guiding hinge connections for swinging and shifting the cover sections upon the base section, a plurality of hinged holders mounted in the case, having their hinged ends depending from a pivotal connection with the rear end of the cover section, an index frame pivoted to the hinged end of the lower holder, a roller on the free end of the frame, and means for supporting and guiding the free end of the frame upward and forward from within the base section over the forward rim thereof including inclined tracks upon which the rollers of the index frame are adapted to travel.

10. A filing case including similar base and cover sections with guiding hinge connections for swinging and shifting the cover section upon the base section, a plurality of hinged holders mounted in the case, having their hinged ends depending from a pivotal connection with the rear end of the cover section, an index frame pivoted to the hinged end of a lower holder, a roller on the free end of the frame, and means for supporting and guiding the free end of the frame upward and forward from within the base section over the forward rim thereof including inclined tracks upon which the rollers of the index frame are adapted to travel.

HARRY J. HICK.

Witnesses:

JACOB BACHOFEN,  
EARL C. CARLSON.

Copies of this patent may be obtained for five cents each, by addressing the "Commissioner of Patents, Washington, D. C."